

78-9, I

REPORT NO. CG-D-69-77, I

MARITIME COMMUNICATION EXPERIMENTS AND SEARCH-AND-
RESCUE EVALUATIONS WITH THE NASA ATS-6 SATELLITE

Volume I - Summary

P.D. Engels, et al.

U.S. Department of Transportation
Transportation Systems Center
Kendall Square
Cambridge MA 02142



FINAL REPORT

MAY 1978

THIS DOCUMENT IS AVAILABLE TO THE PUBLIC
THROUGH THE DEFENSE DOCUMENTATION CENTER,
CAMERON STATION, ALEXANDRIA VA 22314

U.S. DEPARTMENT OF TRANSPORTATION
United States Coast Guard
Office of Research and Development
Washington DC 20590

Technical Report Documentation Page

1. Report No. CG-D-69-77, I		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle MARITIME COMMUNICATION EXPERIMENTS AND SEARCH-AND-RESCUE EVALUATIONS WITH THE NASA ATS-6 SATELLITE Volume I - Summary				5. Report Date MAY 1978	
				6. Performing Organization Code	
7. Author(s) P.D. Engels, et al.*				8. Performing Organization Report No. DOT-TSC-USCG-78-9, I	
9. Performing Organization Name and Address U.S. Department of Transportation Transportation Systems Center Kendall Square Cambridge MA 02142				10. Work Unit No. (TRAIS) CG809/R8003	
				11. Contract or Grant No.	
12. Sponsoring Agency Name and Address U.S. Department of Transportation United States Coast Guard Office of Research and Development Washington DC 20590				13. Type of Report and Period Covered Final Report Jan. 1974 - Dec. 1975	
				14. Sponsoring Agency Code	
15. Supplementary Notes *C.B. Duncombe J.M. Gutwein C.J. Murphy A.T. Caporale A.E. Foley J.H. Kraemer W.I. Thompson III R.J. Jones P.G. Mauro J.A. Wolfson					
16. Abstract Maritime satellite communication experiments were conducted by the Transportation Systems Center using the NASA Applications Technology Satellite-Number 6 (ATS-6) from September 1975 through April 1975. The objectives were: to acquire a base of satellite technology knowledge applicable to ship-satellite-shore system design; and to demonstrate, by means of coordination among several ships, aircraft, and ground/shore control centers, some operational uses of satellites for ATC and SAR applications. Volume I provides a brief description of the ATS-6 experiments along with a description of the shipboard terminal equipment used in the experiments. Volume I also contains an executive summary of the experiments, a summary of the more significant results, major conclusions and recommendations for future activities. The ATS-6 satellite maritime technology experiments have produced data which will be utilized in preparing specifications of ship terminals for possible future operational satellite systems. Evaluations were made of a shipboard antenna design, various types of voice, data, and ranging modulations, and the effects of multipath reflections off the sea and the ship superstructure. The safety demonstration experiments are expected to aid in evaluating the effectiveness of satellite communications in maritime safety-of-life-at-sea applications. In these tests, the satellite-to-ship link was used in a typical search and rescue incident along with the Emergency Position Indicating Radio Beacon (EPIRB) Buoy which initiated the distress alert. Volume II contains the text of the report, together with references and an appendix listing contracts (268 pp.).					
17. Key Words Maritime Satellite Search-and-Rescue Satellite Communications L-Band ATS-6			18. Distribution Statement THIS DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE DEFENSE DOCUMENTATION CENTER, CAMERON STATION, ALEXANDRIA VA 22314		
19. Security Classif. (of this report) unclassified		20. Security Classif. (of this page) unclassified		21. No. of Pages 44	22. Price

PREFACE

The success of this program attests to the dedication and total commitment of all team members. Gratitude is expressed to the United States Coast Guard, Office of Research and Development, for their support in directing and sponsoring the Transportation Systems Center in the conduct of the ATS-6 experiments. We wish to specifically acknowledge the active support and technical assistance of Mr. John Carros/GDOE and LCDR R.E.Fenton and LT B.M. Chiswell formerly of the USCG, Office of Operations. We would also like to thank the National Aeronautics and Space Administration for making available the ATS-6 spacecraft along with all support facilities and personnel. In addition, the officers and crew aboard the participating USCG cutters, SHERMAN and GALLATIN, along with the TSC experimental crews manning the shipboard terminal, deserve a special note of praise for fine support and for enduring the hardships of shipboard life and long tedious hours away from home.

It is fitting to acknowledge the cooperation and contributions of all others in this activity, in addition to those specifically mentioned above:

European Space Agency
Federal Aviation Administration, National
Aviation Facilities Experimental Center
Federal Republic of Germany
USCG, First and Third Districts
Officers and crew of the German ship OTTO HAHN

Finally, we wish to remember the late John Winchus of TSC who was responsible for assembly of the maritime shipboard terminal.

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1. INTRODUCTION.....	1-1
1.1 Background.....	1-1
1.2 Objectives and Participants.....	1-2
2. EXPERIMENT DESCRIPTION.....	2-1
2.1 Link Configurations.....	2-1
2.2 Shipboard Terminal Equipment.....	2-1
2.3 Test Conditions.....	2-4
3. TEST RESULTS.....	3-1
3.1 Channel Characterization.....	3-1
3.2 Antenna Tests.....	3-2
3.3 Voice and Data Modem Tests.....	3-5
3.4 Ranging Modem Tests.....	3-11
4. MARITIME SAFETY COMMUNICATIONS EVALUATIONS.....	4-1
5. CONCLUSIONS.....	5-1
6. RECOMMENDATIONS.....	6-1
6.1 System Performance.....	6-1
6.2 Technological Developments.....	6-1
6.2.1 Error Correction Coding.....	6-1
6.2.2 Antenna Inertial Reference.....	6-2
6.2.3 Omni Antenna Tests.....	6-2
REFERENCES.....	R-1

EXECUTIVE SUMMARY

The U.S. Department of Transportation completed a series of tests in 1975 as part of the international ATS-6 experiment for Aeronautical and Maritime Satellite Communications. This internationally coordinated experiment used the U.S. National Aeronautics and Space Administration (NASA) Application Technology Satellite No. 6 (ATS-6) as the space segment. The United States Coast Guard (USCG) sponsored and directed the maritime satellite communications aspects of the experiment concerned with improvement of safety of life at sea. The DOT/USCG ATS-6 maritime experiments were planned to provide a comprehensive communication technology data base of satellite-to-mobile applications for maritime traffic service and improved search and rescue operations.

The general objectives of the U.S. DOT/USCG ATS-6 satellite experiments fell into three major categories: technical data acquisition, system demonstration, and the evaluation of potential operational benefits. The accomplishments of the ATS-6 experiments are stated as follows:

- o Acquired technical data essential to the design of satellite communications systems for marine applications.
- o Tested and rated components of potential new user electronics operating at L-Band (1600 MHz) for maritime services.
- o The experiments validated the applicability of laboratory simulation of propagation phenomena. Scientists can now be assured of knowledge gained pertinent to propagation using the laboratory simulation without resorting to costly field tests.
- o The advantages of a coordinated USCG and FAA effort using satellites to interconnect widely dispersed aircraft and ships in a search and rescue operation were clearly demonstrated. The usefulness of satellites in conjunction with emergency notification procedures was borne out in

1. INTRODUCTION

Satellite telecommunications offers several potential advantages to the maritime community: 1) provides full oceanic coverage, 2) provides rapid access to any ship in the world, 3) provides satellite radio position determination, and 4) provides reliable communications with a link quality that is capable of supporting telephone-grade voice and high data-rate transmissions. The safety of life at sea is greatly enhanced by a maritime satellite system which provides improved distress alerting, more reliable communications, more accurate determination of the position of a vessel in distress, and improved rescue coordination. This report discusses the maritime satellite experimental program, sponsored by the U.S. DOT/United States Coast Guard, and carried out with the U.S. DOT/Transportation Systems Center using the National Aeronautics and Space Administration Application Technology Satellite, ATS-6.

1.1 BACKGROUND

The International Maritime Consultative Organization, Maritime Safety Committee (IMCO/MSC) has been active over the past six years in establishing the technical parameters of various maritime satellite system design alternatives. In addition it has helped formulate the organizational and institutional arrangements for cost-sharing, procuring, managing, and operating such a system. Although consideration is being given to a public correspondence (general telephone traffic) maritime communication satellite system with global coverage, the enhancement of the safety of life at sea is the paramount objective specified by the IMCO/MSC charter. The U.S. Coast Guard, representing the United States Government at the IMCO/MSC, is an active participant in the satellite discussions aimed at the enhancement of safety.

The practicability of a dedicated maritime satellite system for commercial worldwide shipping has been established through extensive tradeoff analyses, experimentation, technological



FIGURE 1-1. DOT/USCG EXPERIMENT USING THE NASA ATS-6 SATELLITE

benefits of satellite SAR operations.

The international agencies involved in the ATS-6 experiments, along with their respective mobile and stationary terminals (aircraft, ships, and land) are shown in Table 1-1.

TABLE 1-1 PARTICIPANTS COOPERATING IN THE ATS-6 TESTS

<u>Agency</u>	<u>Mobile Description</u>
FAA/TSC	1-KC135 airplane
ESA (aircraft)	1-Comet airplane
Canada, Ministry of Transport	1-Lockheed Jetstar
DOC/MARAD	2-cargo ships - AMERICAN ALLIANCE and LASH ATLANTICO
USCG/TSC	2-cutters, GALLATIN and SHERMAN
ESA (Maritime)	German ship, OTTO HAHN
Federal Republic of Germany	Buoy-Emergency Position Indication Radio Beacon (EPIRB)
The ground and support facilities utilized in these experiments were:	
NASA/Goddard Space Flight Ctr.	Applications Technology Satellite Operations Control Center
NASA/Rosman	ATS-6 Ground Station Earth Terminal
National Aviation Facilities Experimental Center	Experimental Oceanic Air Traffic Control Center
Transportation Systems Center	ATS-6 Technology Experiment Coordination Center
USCG/New York City	Rescue Coordination Center and the Automated Mutual-Assistance Vessel Rescue System (AMVER)

A test plan was coordinated by NASA from test proposals received from the DOT/Transportation Systems Center (TSC), Federal Aviation Administration (FAA), U.S. Coast Guard (USCG), Canadian Ministry of Transport (MOT), European Space Agency (ESA), and the U.S. Maritime Administration (MARAD). Coordination provided by NASA allowed joint use of the satellite and effective use of the allocated satellite time.

2. EXPERIMENT DESCRIPTION

2.1 LINK CONFIGURATIONS

The overall configuration for the ATS-6 experiments is illustrated in Figure 2-1. For the DOT/USCG experiments, a two-way simultaneous communication channel between the NASA ground station at Rosman, NC, and a USCG cutter (either the GALLATIN or the SHERMAN) was established through ATS-6. Telephone land lines were set up between Rosman and various remote ground facilities such as the NASA operations center, DOT Headquarters, DOT/TSC, USCG Rescue Coordination Centers, FAA/NAFEC, etc. The communications link from the satellite consisted of a frequency division multiplex of various combinations of modulations which were transmitted as subcarriers on the nominal 1550 MHz carrier. The links between the ground and the satellite were at C-band. The signal quality over the C-band uplink was sufficient to consider the link transparent for the tests. All measured propagation phenomena, therefore, pertained exclusively to the L-band ship-to-satellite channels.

2.2 SHIPBOARD TERMINAL EQUIPMENT

The shipboard communications terminal used for the DOT/USCG was a self-contained small laboratory housed in a transportable shelter as shown in Figure 2-2. The shelter was strapped down to the helicopter deck of the U.S. Coast Guard cutter. During the ocean test campaigns, the cutters were assigned to the experiment and operated in conjunction with pre-determined experiment plans. All communications, analysis, and maintenance equipment was installed and operated in the shelter.

The shipboard communications terminal was designed to operate with an experimental medium gain antenna. The antenna had a nominal gain of 15 dB and was capable of various modes of stabilization and control as follows:

- a. Autotrack Mode - The antenna had a self contained monopulse tracking system which locked to the L-band satellite transmission.

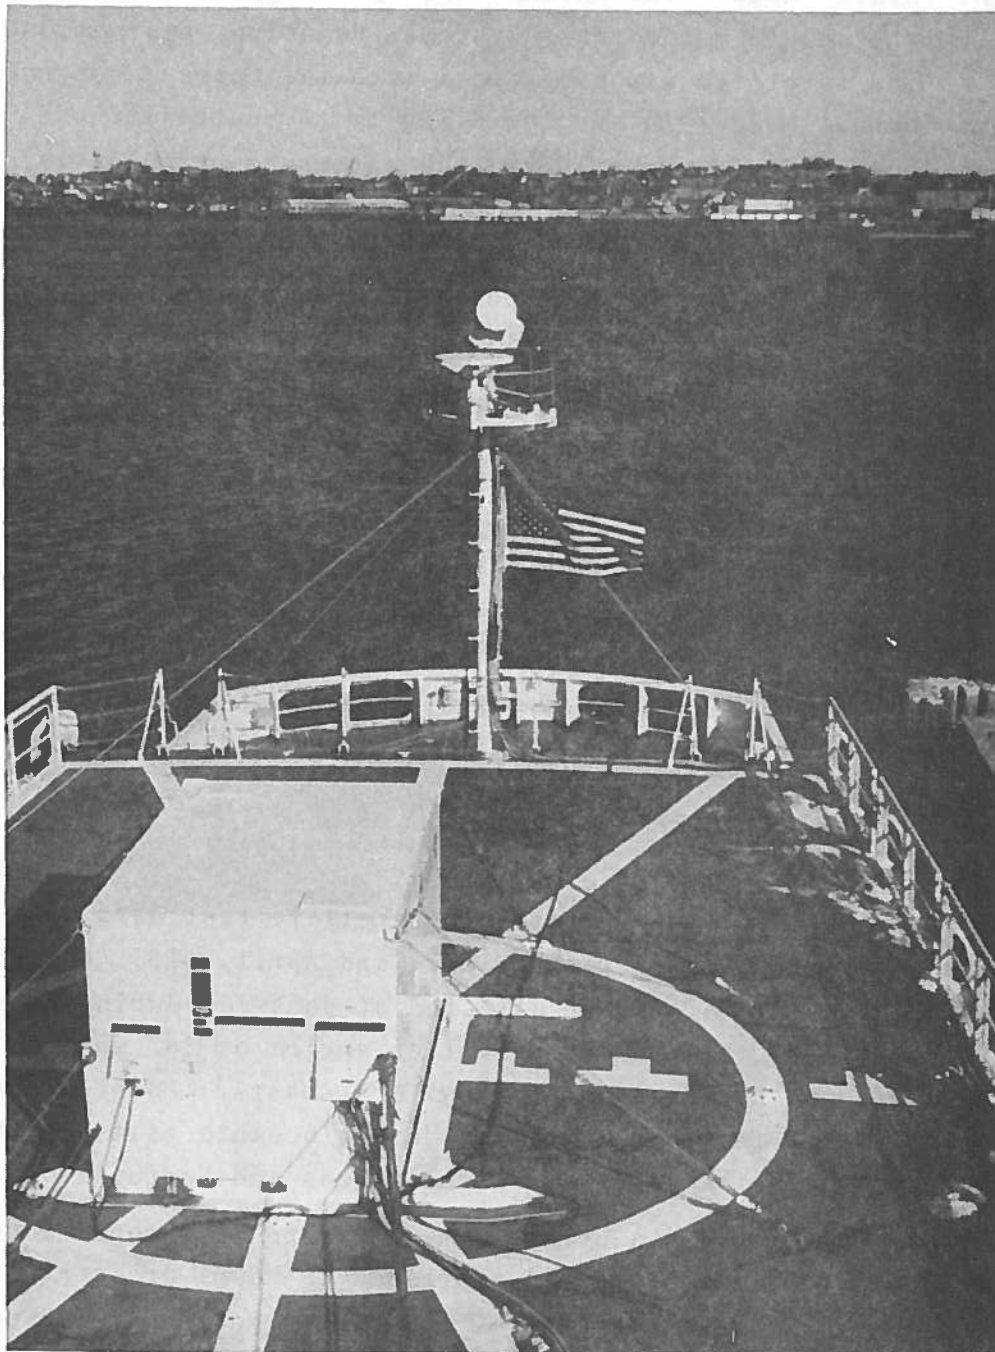


FIGURE 2-2. DOT/USCG PORTABLE TERMINAL LABORATORY SHELTER

(50). Additionally, the test hours listed refer to "satellite time" and do not account for simultaneous operation of several communications modems using the same received signal.

TABLE 2-1 USCG/TSC ATS-6 EXPERIMENT - SUMMARY OF TESTS

Range of satellite elevation angles: 2° to 38°
 Wave heights: calm seas to 30 to 40 foot seas
 Wind velocities: calm to 70 knots +
 Total numbers of test hours: 142.2
 Demonstration test hours 15
 Technology test hours 127.2
 Total number of test days: 47 (41 at sea)

TEST	IN PORT	AT SEA	TOTAL
Modem	5	28	33
Antenna	-	11	11
Demonstration	3	3	6

3. TEST RESULTS

3.1 CHANNEL CHARACTERIZATION

The channel measurements used to characterize multipath operation were accomplished in two modes. First, the transmission from Rosman included a continuous wave (CW) signal which was received at the ship and recorded. The multipath component on the signal was measured simultaneously with the antenna and modem tests. Multipath data collected in this way provides channel parameters for correlation of propagation conditions with measured modem and antenna performance. The narrowband channel measurement experiment provided complete channel characterization data for channel bandwidths less than 200 kHz.

In addition, the shelter equipment included a wideband transmitter and modulator. With this equipment, wideband (10 MHz) channel probing signals consisting of pseudo-noise modulations were sent through the ATS-6 satellite back to the Rosman facility. The received wideband probing signal was analyzed at Rosman by a multiple channel correlation instrument, the satellite aeronautical channel prober (SACP), which was implemented for similar aeronautical satellite tests and adapted for the maritime tests. These SACP tests were designed to determine the multipath delay spreads of the channel along with many other parameters. The wideband measurements showed that for all observations of this experiment, the delay spread was less than 100 nanoseconds. It has been shown that when the inverse of the delay spread is much wider than the signal bandwidth, a narrowband propagation model adequately characterizes the channel.^[4] The experimental results justify the use of the narrowband channel/model and CW data for all system designs which use channel bandwidths less than 200 kHz.

The channel characterization data collected during the ATS-6 maritime satellite tests also supports the conclusion that the reflected multipath is diffuse. A typical carrier-to-multipath (C/M) ratio before antenna discrimination is 8 dB. The C/M = 8 dB holds for a wide range of sea state conditions and satellite eleva-

TABLE 3-2 SUMMARY OF ANTENNA TEST CONDITIONS - SPRING 1975

Wave heights	1 ft to 20 ft
Satellite elevation angles	8.7° to 39°
C/M ratios	6.9 dB to 21.2 dB*
Heading standard deviation, σ_H	0.6° to 3.6°
Roll standard deviation, σ_R	1.1° to 5.2°
Pitch standard deviation, σ_P	0.5° to 2.0°

*The carrier-to-multipath power ratio, C/M, ranged from 10.3 dB to 13.1 dB during autotrack measurements.

The following observations are drawn from the data presented in Volume II of this report.

1. The slave mode of antenna stabilization generally gave performance superior to that of the autotrack mode.
2. The maximum total pointing error never exceeded 8.4° in the slave mode nor 14.8° in the autotrack mode. Thus, the slave mode of operation was capable of maintaining the satellite within the -1 dB contour of the antenna pattern (approximately +11° off boresight).
3. Reflections and shadows from the ship's superstructure were encountered at low elevation angles with the antenna-satellite geometry such that the superstructure was within the antenna beam. Fades of 8 to 10 dB were encountered when the view of the satellite was obscured by the superstructure. The autotrack system was generally able to maintain lock during turns when the aft mast of cutter passed through the line-of-sight to the satellite. During such turns the view of the satellite was obscured for approximately three seconds producing signal fading typified by that shown in Figure 3-1. A ship-to-satellite link, under conditions where the received signal was near the thermal noise threshold, would incur an outage under those satellite-ship orientations where the superstructure obstructed the direct path to the satellite. This suggests careful positioning of the shipboard antenna so as to min-

imize such obstructions.

Although this report presents no quantitative data for fixed antenna pointing (manual mode), evaluation of data taken in either the slave or autotrack modes indicates that in many instances manual pointing would have been adequate to maintain the satellite within the antenna beamwidth. It should be noted that this form of manual pointing would be suitable only for constant headings since the antenna would have no provision for automatic tracking of the satellite in azimuth during turns.

Data was acquired to evaluate an antenna with a nominal gain of 4 dB over a 160° solid angle in the upper hemisphere. These tests were intended to provide data representative of an omni antenna element as might be used in a low cost shipboard application. Unfortunately, anomalous performance for the 4 dB omni was revealed upon examination of the data after the experiment was concluded. The performance observed indicated an antenna malfunction which was confirmed when it was learned that the antenna was improperly connected because of an error in polarization labeling. Consequently, none of the data obtained for the omni antenna is representative of the performance expected. Therefore, no omni data is presented and conclusions are not drawn in this report regarding omni antenna performance in satellite to ship links. It is recommended that future tests be conducted to fill this void.

3.3 VOICE AND DATA MODEM TESTS

Modulation techniques for maritime satellite services have not been standardized and are therefore under investigation by various countries. Consequently, several types of modems were evaluated as part of these ATS-6 experiments. The technical characteristics of the voice modems tested are summarized in Table 3-3. The Hybrid I modem combined suppressed carrier amplitude modulation of the voice signal in phase quadrature with differentially encoded phase-shift keyed (PSK) modulation of the digital data followed by hard limiting. This process results in a low deviation phase modulation for voice and differentially encoded PSK for digital data and provides the capability of simultaneous transmission of

voice and data. This modem could also be switched so as to transmit and receive adaptive variable slope delta modulation (ADVM) for voice at a bit rate of 19.2 kb/s. The demodulation process provides for either digital or analog processing of the 19.2 kb/sec. data stream. Analog processing provides improved intelligibility over digital matched filtering below 46 dB-Hz carrier-to-noise power density ratio. It should be noted that voice and data can not be transmitted simultaneously when the modem is used in the ADVM mode. Hybrid II modem used 9.6 kb/s suppressed clock pulse duration modulation of digitized voice and differentially encoded phase shift keyed modulation for digital data. It also had the capability of simultaneous transmission of voice and data combined in phase quadrature on the same carrier and at constant envelope. A third modem was also tested which had adaptive narrow-band frequency modulation (ANBFM) for voice and differentially encoded phase-shift keyed modulation for data. Simultaneous voice and data operation was not possible with this third modem.

These modems were first evaluated under laboratory conditions using the TSC multipath simulator^(5,6,7) then field tested under typical operating conditions of satellite elevation angles, carrier-to-noise and carrier-to-multipath ratios, and varying sea states. Performance capabilities were demonstrated for voice and 1200 bps digital data transmission in conjunction with the medium gain (15 dB) directive antenna. Voice modem performance was measured in terms of phonetically balanced 400 word intelligibility.

Comparisons of the voice modem results obtained for the satellite-to-ship experiments are shown in the composite plot of Figure 3-2. The data points presented in this figure are averages of all the data for all parametric conditions shown in Table 3-1 for each modem. The modems were tested simultaneously over the links with each modulation on a different subcarrier of a frequency division multiplex spectrum. Averaged over the range of conditions encountered, the Hybrid I modem consistently had the highest scores of all modems tested. The ADVM and Hybrid II modems ranked second and third, respectively. The average voice intelligibility of the Hybrid I modem in the voice-only mode exceeded 80 percent for

carrier-to-noise density ratios of 43 dB-Hz or higher. Above 46 dB-Hz, Hybrid I achieved intelligibility scores of approximately 95 percent. For C/N_0 greater than 43 dB-Hz, the performance of all three modems is within 10 percent wordscore intelligibility. However, ADVN and Hybrid II appeared to experience a definite threshold at or below $C/N_0 = 43$ dB-Hz. The performance of the Hybrid I modem when operated in the voice-plus-data mode was greater than 80 percent intelligibility at 43 dB-Hz and reached 90 percent intelligibility at 46 dB-Hz. Examination of voice modem data collected over the full range of satellite elevation angles and sea states revealed that the voice modems were not susceptible to degradation due to multipath. This finding agrees with the results of extensive laboratory testing using the TSC multipath channel simulator. Voice modem performance is primarily a function of received carrier-to-noise density ratio for all test conditions. This held true even for situations wherein measured levels of multipath were only 5 dB below the carrier level.

Plots of the data modem performance obtained in the satellite-to-ship tests for the Hybrid I modem are presented in Figure 3-3. Results are plotted for a data rate of 1200 bps. The Hybrid I data modem results shown are typical of the performance for all of the data modems tested since they were all similar in basic modulation and design. Hence only the one set of results from Hybrid I is presented. The performance of the modem in terms of bit error rate is plotted vs. carrier-to-noise density (C/N_0) with measured C/M (carrier/multipath) as a test parameter. The multipath was measured simultaneously on a separate subcarrier. Each C/M value is noted adjacent to the modem performance data point. A theoretical curve for optimum demodulation in the presence of Gaussian noise only is included for comparison. This represents the best achievable performance of the modem since no multipath is present.

Superimposed on the data modem performance of Figure 3-3 are laboratory measured results obtained using the multipath channel simulator facility at TSC.^[7] The laboratory results are the solid curves shown in Figure 3-3 with each plot representing the

bit error rate vs. C/N_0 , with C/M values of 11 dB, 8 dB, and 5 dB, respectively. It was possible, using the simulator in this way, to control the multipath level and obtain modem measurements at several fixed values of carrier-to-multipath ratio.

The field test data agrees closely with the laboratory data. For example, the data taken when C/M is greater than 14 dB are all in the vicinity of the "no-multipath" laboratory derived performance curve ($C/M=\infty$). The data collected when C/M was below this value are approximately in the region between the C/M = 11 dB and C/M = 8 dB performance curves. Field data points above the C/M = 8 dB laboratory derived curve have not been plotted. Data points, for C/M less than 8 dB were erratic because the modem and data error analyzer would not remain in lock to allow counting errors. Similar effects were observed during laboratory testing of the modems.


Data modem performance in the voice-plus-data mode for the Hybrid I modem is presented in Figure 3-4. The curve shows that the presence of the quadrature voice signal causes minor performance degradation of 1 to 2 dB (in the absence of multipath) compared to performance with data only. At 43 dB-Hz, this modem provided a bit error rate of 5×10^{-6} with voice on the quadrature channel. The modem simultaneously provided an average voice intelligibility of 84 percent. Carrier-to-multipath values in the range of 10 to 12 dB produced similar results in the voice-plus-data mode as in the data-only mode. It should be noted that the voice performance in either the voice-only or voice-and data mode compared closely regardless of the multipath level encountered.

3.4 RANGING MODEM TESTS

A digital tone ranging modem was developed at TSC. To evaluate this technique the system was configured as a one-way ranging system. The time delay of the transmitted signal was measured relative to a local onboard precision clock. These measurements at C/N_0 varying between 38 and 44 dB-Hz and various C/M determined the extent of random errors caused by multipath and noise. Timing and bias errors were not measured, however, these variables are common to all systems and are not modulation dependent.

The significant results obtained during the ranging modem tests are plotted in Figure 3-5. The figure shows the performances achieved with the modem operating with a clock of 156 kHz and a clock of 20 kHz.

One set of solid curves represents the theoretical performance estimates for these operating modes. Data obtained with the TSC channel simulator for the same operating modes are also presented in Figure 3-5 for the purpose of comparisons of ATS-6 and laboratory results. The ATS-6 test results are in general agreement with the laboratory simulator tests. The precision measured for the narrow-band, 20 kHz, code was about 200 to 500 feet for the range of signal levels used with the ATS-6 (36 - 44 dB-Hz). The precision of the wide-band, 156 kHz, code ranged from 20 to 80 feet over the same signal level range.

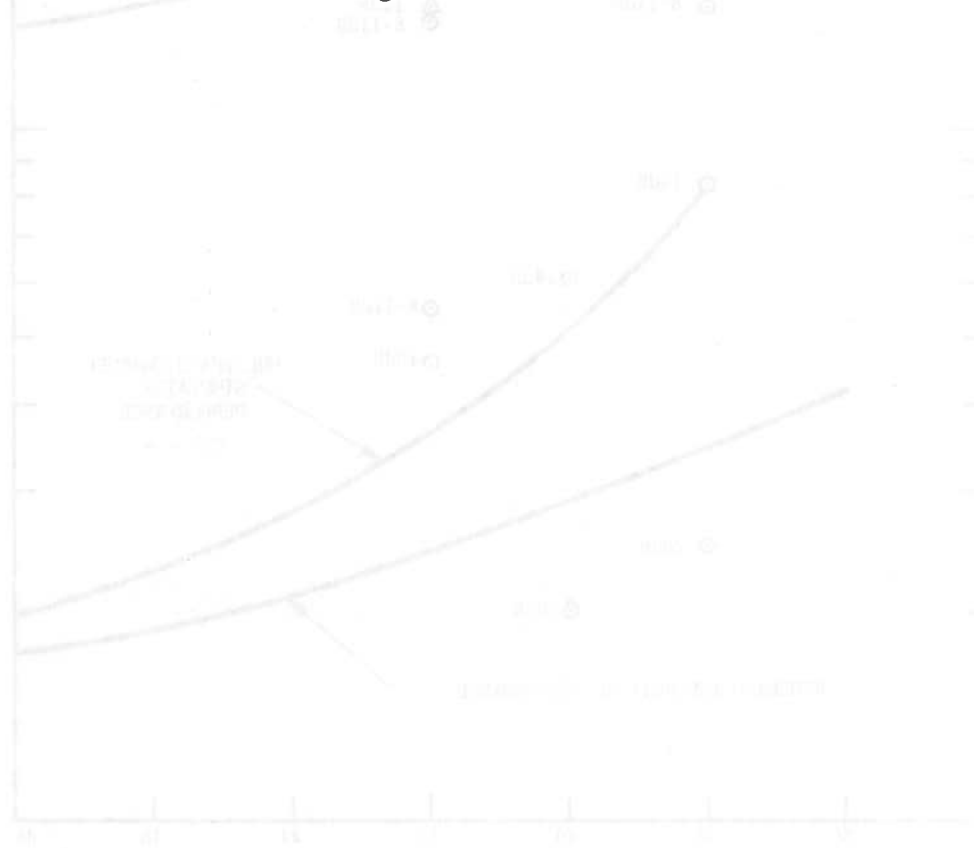

4. MARITIME SAFETY COMMUNICATIONS EVALUATIONS

Future application of satellite communications to distress and safety will require evaluation of operational techniques and/or technical performance of selected equipment. The following tests were therefore conducted with ATS-6.

- a. Selective calling
- b. Low-speed teleprinter/data
- c. Ship-aircraft search and rescue

A digital selective calling (SELCAL) system was planned for maritime use in MF, HF, and VHF terrestrial communications. Tests were conducted to determine the utility of such a system for L-band signaling. The SELCAL performed well at C/No above 42 dB-Hz.

To demonstrate typical operational radio-teleprinter equipment interfaces with satellite systems, General Electric Terminet-300 teleprinters were installed on the GALLATIN and linked via ATS -6 to the Rosman Earth station. Teleprinter performance was found acceptable at 40 dB-Hz and higher. Automatic control of the receiving data terminal was also demonstrated.

The ship/aircraft search and rescue (SAR) demonstration used the same equipment as the technology tests. A detailed scenario was developed which focused on the simulation of a SAR incident. The simulated SAR incident was initiated when an L-band Emergency Position Indicating Radio Beacon (EPIRB) buoy was deployed in the general vicinity of the Azores Islands. The EPIRB buoy^(8,9) developed by the Federal Republic of Germany, was provided by ESA. The "distressed vessel's" call sign was transmitted by the EPIRB buoy to the NASA Rosman Earth Station via the ATS-6 satellite. Additionally, the EPIRB buoy provided a homing beacon on the international distress frequency of 2182 kHz. Full duplex voice communication was established at L-band via the ATS-6 satellite among the various participants (sea, air, and land) in the SAR incident. The SAR participants were the USCG cutter GALLATIN, the West German ship OTTO HAHN, the FAA KC-135, and the ESA Comet

5. CONCLUSIONS

The major technical findings of the ATS-6 satellite maritime experiment program can be summarized as follows:

- a. High quality voice performance was achieved using the Hybrid I modem. Performance of this modem exceeded 80 percent voice intelligibility down to 40 dB-Hz and exceeded 90 percent intelligibility for carrier-to-noise power density ratios above 46 dB-Hz. Ninety percent voice intelligibility corresponds to telephone voice quality communications.* Hybrid I performance was superior to that of all other voice modems tested.
- b. In the voice plus data mode (simultaneous transmission of voice and data on a single carrier), the Hybrid I modem voice intelligibility exceeded 80 percent from 40 to 48 dB-Hz. This modem will simultaneously provide a 1200 b/s data stream with a bit error rate of 1×10^{-5} , for C/No above 43 dB-Hz.
- c. Under all conditions the performance of both the Hybrid I and Hybrid II modems was closely consistent with theoretical predictions and laboratory simulations, including degradation due to multipath. Voice modem performance was essentially non dependent on multipath level.
- d. Multipath was worst at low elevation angles and high sea states; however, it was present under almost all test conditions. The observed multipath was predominantly diffuse. In addition, it appeared to fit an empirical model in which the majority of the energy was reflected near the horizon rather than the point of geometrical specular reflection. The measured diffuse multipath energy was typically 6-9 dB below the incident (direct path) signal.

* This correspondence is based upon an interpolation of data for phonetically balanced (PB) word lists of 250 words and 1,000 words. [10,11] The ATS-6 tests were run with 400 PB word lists. Similarly, a voice quality of 78 percent (400 PB word lists) is considered acceptable for military and industrial applications.

occasional large pointing error due to the loss of receiver lock as a result of particularly severe multipath.

- h. The advantages of a coordinated USCG and FAA effort using satellites to interconnect widely dispersed aircraft and ships in a search and rescue operation were clearly demonstrated. The usefulness of satellites in conjunction with emergency notification procedures was borne out in demonstrating significant reduction in the distress alerting interval.

6. RECOMMENDATIONS

6.1 SYSTEM PERFORMANCE

The data presented in this report provides a basis for recommending an achievable performance specification for a maritime satellite communication system. Such a system would provide communication service to the USCG and achieve performance levels exceeding those of the systems currently in use. This satellite communication system would provide performance as follows:

- a. Voice - 80 percent intelligibility at 43 dB-Hz.
- b. Data - Bit error rate of 1×10^{-5} at 43 dB-Hz using 1200 b/s.
- c. Combined voice and data - a single channel modem providing simultaneous voice and data. At 43 dB-Hz the voice intelligibility would be better than 70 percent and the data bit error rate would be less than 1×10^{-5} .
- d. Ranging - Radio position determination accuracies of 20 80 feet in a channel bandwidth of 300 kHz and with a carrier-to-noise power density ratio as low as 36 dB-Hz.
- e. Antenna - A medium gain (approximately 15 dB) antenna appears suitable for this application. The slave mode of tracking would be selected in those instances where an electrical signal (synchro or resolver) is available which corresponds to ships heading. A pitch derived signal is probably not needed and a roll signal of sufficient accuracy (a few degrees) could probably be made available through the use of a relatively inexpensive vertical reference. Such a reference might be developed to provide both roll and pitch signals.

6.2 TECHNOLOGICAL DEVELOPMENTS

6.2.1 Error Correction Coding

Forward correction coding is recommended for adaption to digital transmission on the satellite-mobile link. The purpose of

REFERENCES

1. L.M. Keane and E.J. Martin, "MARISAT Gapfiller for Navy Satellite Communications," Signal, November/December 1974.
2. Heckert, G.P., "Investigation of L-Band Shipboard Antennas for Maritime Satellite Applications," AMI Report No. NASW-2165, Automated Marine International, Newport Beach, California, February 2, 1972.
3. "ATS-6 L-Band Experiment Integrated Operation Plan", vols. I-V, Prepared for NASA Goddard Space Flight Center, Greenbelt, Maryland, Contract No. NAS-5-21789, Westinghouse Electric Corp. Defense and Electronics Systems Center, Baltimore, Maryland 21203.
4. Bello, P.A., "Measurement of Random Time-Variant Linear Channels," IEEE Trans. on Information Theory, vol. IT-15, No. 4, July 1969.
5. Duncombe, C.B., "Multipath Channel Simulation and Modem Evaluation Program," Report No. FAA-RD-74-151, August 1974, U.S. Department of Transportation, Transportation Systems Center, Kendall Square, Cambridge MA 02142
6. Duncombe, C.B., "Results of AEROSAT Channel Simulation Tests, Q-M/PSK Voice/Data Modem, TSC Ranging Modem," Report No. FAA-RD-76-103, July 1976, U.S. Department of Transportation, Kendall Square, Cambridge MA 02142.
7. Salwen, H.C. and C.B. Duncombe, "Performance Evaluation of Data Modems for the Aeronautical Satellite Channel," IEEE Trans. on Communications, vol. COM 23, No. 7, July 1975.
8. Gobel, W., "Proposal for a Distress Radio Call System via Satellite, ESRO-Experiments in the North Atlantic in March/April 1975," paper presented at 1975 LANTSAR Conference, U.S. Dept. of Transportation, New York NY.
9. Gobel, W., "European Communications Experiment in L-Band with ATS-6, vol. 6: Distress Buoy, Systems Design, Instrumentation