

PB85167880



UMTA-MA-06-0153-84-4
DOT-TSC-UMTA-84-14



U.S. Department
of Transportation
**Urban Mass
Transportation
Administration**

Transit Reliability Information Program: PATCO-WMATA Propulsion System Reliability/Productivity Analysis

A. S. Millen
D. R. Cohen

Dynamics Research Corporation
Systems Division
60 Concord St.
Wilmington MA 01887

October 1984
Final Report

This document is available to the public
through the National Technical Information
Service, Springfield, Virginia 22161.

UMTA Technical Assistance Program

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE


NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

| | | | | | |
|---|--|--|---|--|-----------|
| 1. Report No. UMTA-MA-06-0153-84-4 | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle TRANSIT RELIABILITY INFORMATION PROGRAM: PATCO-WMATA PROPULSION SYSTEM RELIABILITY/PRODUCTIVITY ANALYSIS. | | | | 5. Report Date October 1984 | |
| | | | | 6. Performing Organization Code DTS-66 | |
| 7. Author(s) A. S. Millen and D. R. Cohen | | | | 8. Performing Organization Report No. DOT-TSC-UMTA-84-14 | |
| 9. Performing Organization Name and Address Dynamics Research Corporation* Systems Division 60 Concord Street Wilmington MA 01887 | | | | 10. Work Unit No. (TRIS) MA-06-0153 UM476/R4632 | |
| | | | | 11. Contract or Grant No. MA-06-0153 DTRS-57-81-C-00084 | |
| 12. Sponsoring Agency Name and Address U.S. Department of Transportation Urban Mass Transportation Administration Office of Technical Assistance Washington DC 20590 | | | | 13. Type of Report and Period Covered Final Report April 1982 - March 1983 | |
| | | | | 14. Sponsoring Agency Code URT-11 | |
| 15. Supplementary Notes U.S. Department of Transportation *Under contract to: Research and Special Programs Administration Transportation Systems Center Cambridge MA 02142 | | | | | |
| 16. Abstract <p>The Transit Reliability Information Program (TRIP) is a government-initiated program to assist the transit industry in satisfying its need for transit reliability information. TRIP provides this assistance through the operation of a national data bank. This data bank collects, stores, and analyzes data generated by transit operators during the course of revenue service operation and equipment maintenance. The results of the periodic analyses of the stored data are distributed to TRIP participants and users.</p> <p>This report provides a description of the utilization of TRIP data as a tool for reliability/productivity analysis. The Port Authority Transit Corporation (PATCO) and the Washington Metropolitan Area Transit Authority (WMATA) are the participating transit authorities for which there is some maintainability data (labor hours by maintenance action) on the data base, thus restricting the reliability/productivity analysis to these two authorities. The purpose of this report is to compare detailed maintenance (reliability and maintainability) information on propulsion systems in use at PATCO and WMATA and to demonstrate the analytical capabilities of the TRIP Data Bank using maintainability data (labor hours by maintenance action).</p> | | | | | |
| 17. Key Words High Driver; Labor Hours; Labor Rate; Maintenance Actions; Maintenance Rate; Maintainability; Port Authority Transit Corporation; Productivity; Propulsion System Reliability; Rail Transit; Transit Information Reliability Program; TRIP; Washington Metropolitan Area Transit Auth. | | | 18. Distribution Statement DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161 | | |
| 19. Security Classif. (of this report) UNCLASSIFIED | | 20. Security Classif. (of this page) UNCLASSIFIED | | 21. No. of Pages 184 | 22. Price |



PREFACE


This document describes the utilization of the Transit Reliability Information Program (TRIP) as a tool for conducting a reliability/productivity analysis on rapid rail car systems. This document has been prepared by the Dynamics Research Corporation (DRC), Wilmington, Massachusetts, under contract number DTRS-57-81-C-00084, issued by the U.S. Department of Transportation (DOT), Transportation Systems Center (TSC), on behalf of the Office of Systems Engineering of the Urban Mass Transportation Administration (UMTA), Office of Technical Assistance, U.S. Department of Transportation.

The purpose of this document is to demonstrate the analytical capabilities of the TRIP Data Bank using maintainability data (labor hours by maintenance action).

The authors wish to thank all those individuals from the transit authorities, the suppliers, the American Public Transit Association, and the U.S. Department of Transportation, who provided data and assistance during this effort.

METRIC CONVERSION FACTORS

| Approximate Conversions to Metric Measures | | | | Approximate Conversions from Metric Measures | | | |
|--|------------------------|----------------------------|---------------------|--|-----------------------------------|-------------------|------------------------|
| Symbol | When You Know | Multiply by | To Find | Symbol | When You Know | Multiply by | To Find |
| LENGTH | | | | | | | |
| in | inches | 2.5 | centimeters | mm | millimeters | 0.04 | inches |
| ft | feet | 30 | centimeters | cm | centimeters | 0.4 | inches |
| yd | yards | 0.9 | meters | m | meters | 3.3 | feet |
| mi | miles | 1.6 | kilometers | km | kilometers | 1.1 | yards |
| | | | | | | 0.6 | miles |
| AREA | | | | | | | |
| in ² | square inches | 6.5 | square centimeters | cm ² | square centimeters | 0.16 | square inches |
| ft ² | square feet | 0.09 | square meters | m ² | square meters | 1.2 | square yards |
| yd ² | square yards | 0.8 | square meters | km ² | square kilometers | 0.4 | square miles |
| mi ² | square miles | 2.6 | square kilometers | ha | hectares (10,000 m ²) | 2.5 | acres |
| | acres | 0.4 | hectares | | | | |
| MASS (weight) | | | | | | | |
| oz | ounces | 28 | grams | g | grams | 0.035 | ounces |
| lb | pounds | 0.45 | kilograms | kg | kilograms | 2.2 | pounds |
| | short tons (2000 lb) | 0.9 | tonnes | t | tonnes (1000 kg) | 1.1 | short tons |
| VOLUME | | | | | | | |
| tp | teaspoons | 5 | milliliters | ml | milliliters | 0.03 | fluid ounces |
| Tbsp | tablespoons | 15 | milliliters | l | liters | 2.1 | pints |
| fl oz | fluid ounces | 30 | milliliters | l | liters | 1.06 | quarts |
| c | cups | 0.24 | liters | l | liters | 0.26 | gallons |
| pt | pints | 0.47 | liters | m ³ | cubic meters | 36 | cubic feet |
| qt | quarts | 0.95 | liters | m ³ | cubic meters | 1.3 | cubic yards |
| gal | gallons | 3.8 | liters | | | | |
| ft ³ | cubic feet | 0.03 | cubic meters | | | | |
| yd ³ | cubic yards | 0.76 | cubic meters | | | | |
| TEMPERATURE (exact) | | | | | | | |
| oF | Fahrenheit temperature | 5/9 (after subtracting 32) | Celsius temperature | oC | Celsius temperature | 9/5 (then add 32) | Fahrenheit temperature |

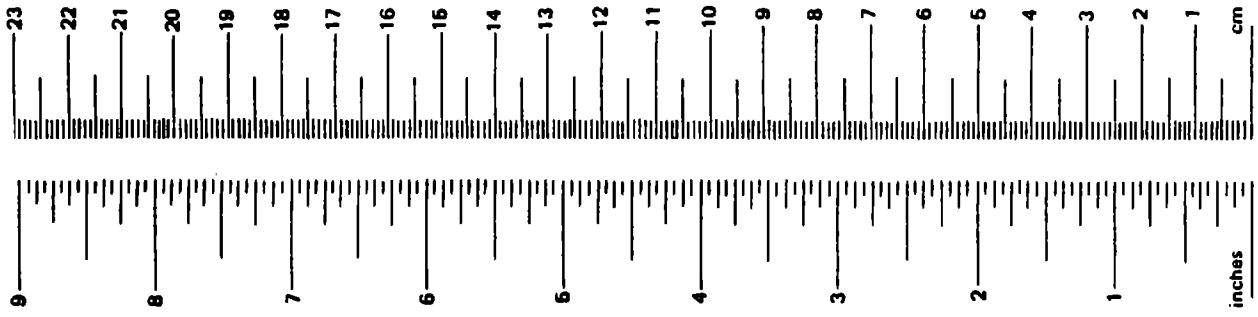

¹ 1 in. = 2.54 cm (exactly). For other exact conversions and more detail tables see NBS Misc. Publ. 288, Units of Weight and Measure. Price \$2.25 SD Catalog No. C13 10 286.

TABLE OF CONTENTS

| <u>Section</u> | <u>Page</u> |
|--|-------------|
| 1. INTRODUCTION AND OVERVIEW..... | 1 |
| 1.1 Introduction and Purpose..... | 1 |
| 1.2 Scope..... | 2 |
| 2. DEFINITIONS AND DATA PRESENTATION CONVENTIONS..... | 8 |
| 2.1 Definitions and Terms..... | 8 |
| 2.1.1 Generic Defect Code..... | 8 |
| 2.1.2 Generic Part Number..... | 8 |
| 2.1.3 Generic Repair Code..... | 9 |
| 2.1.4 Labor Hour Repair Rate..... | 10 |
| 2.1.5 Labor Rate..... | 10 |
| 2.1.6 Maintenance Action..... | 12 |
| 2.1.7 Maintenance Rate..... | 13 |
| 2.1.8 Mean Labor Hours to Repair..... | 13 |
| 2.1.9 Mean Miles Between Maintenance Actions..... | 14 |
| 2.1.10 Universal Component Code..... | 14 |
| 2.2 Data Presentation Conventions..... | 14 |
| 3. EQUIPMENT DESCRIPTION..... | 16 |
| 3.1 PATCO..... | 16 |
| 3.2 WMATA..... | 19 |
| 3.3 Comparison..... | 22 |
| 4. DYNAMIC DATA ANALYSIS..... | 23 |
| 4.1 Maintenance Actions Per 100,000 Miles of Revenue Service Operation..... | 23 |
| 4.1.1 Data Extraction Description..... | 23 |
| 4.1.2 Analysis..... | 24 |
| 4.1.2.1 PATCO Analysis..... | 24 |
| 4.1.2.2 WMATA Analysis..... | 25 |
| 4.2 Labor Hours Per 100,000 Miles of Revenue Service Operation..... | 29 |
| 4.2.1 Data Extraction Description..... | 29 |
| 4.2.2 Analysis..... | 29 |
| 4.2.2.1 PATCO Analysis..... | 30 |
| 4.2.2.2 WMATA Analysis..... | 33 |

TABLE OF CONTENTS (continued)

| <u>Section</u> | <u>Page</u> |
|--|-------------|
| 4.3 Reliability Statistics For Four Quarter Period and Maintainability Statistics For Four Quarter Period..... | 36 |
| 4.3.1 Data Extraction Descriptions..... | 36 |
| 4.3.2 Analysis..... | 38 |
| 4.3.2.1 Traction Motor Assembly..... | 39 |
| 4.3.2.2 Power Regulation..... | 40 |
| 4.3.2.3 Logic and Low Voltage..... | 41 |
| 4.3.3 Analysis Summary..... | 45 |
| 4.4 Maintainability High-Driver By Defect And Repair Codes..... | 48 |
| 4.4.1 Data Extraction Descriptions..... | 48 |
| 4.4.2 Analysis..... | 49 |
| 4.5 Maintenance High-Drivers By Defect And Repair Codes..... | 50 |
| 4.5.1 Data Extractions Descriptions..... | 50 |
| 4.5.2 Analysis..... | 51 |
| 4.5.2.1 Power Regulation..... | 51 |
| 4.5.2.2 Logic and Low Voltage Control..... | 51 |
| 5. SUMMARY AND CONCLUSIONS..... | 54 |
| 5.1 General Discussion..... | 54 |
| 5.2 Data Analysis Summary..... | 55 |
| 5.3 Equipment Summary..... | 58 |
| 5.3.1 Traction Motor..... | 59 |
| 5.3.2 Power Regulation..... | 59 |
| 5.3.3 Logic and Low Voltage..... | 60 |
| APPENDIX A - DATA EXTRACTION NO. 1 MAINTENANCE ACTIONS..... | A-1 |
| APPENDIX B - DATA EXTRACTION NO. 2 LABOR HOURS..... | B-1 |
| APPENDIX C - DATA EXTRACTION NO. 3 RELIABILITY STATISTICS..... | C-1 |
| APPENDIX D - DATA EXTRACTION NO. 4 MAINTAINABILITY STATISTICS..... | D-1 |
| APPENDIX E - DATA EXTRACTION NO. 5 TRACTION MOTOR ASSEMBLY BY DEFECT CODE..... | E-1 |

TABLE OF CONTENTS (continued)

| <u>Section</u> | <u>Page</u> |
|---|-------------|
| APPENDIX F - DATA EXTRACTION NO. 6 TRACTION MOTOR ASSEMBLY BY REPAIR CODE.. | F-1 |
| APPENDIX G - DATA EXTRACTION NO. 7 POWER REGULATOR BY DEFECT CODE..... | G-1 |
| APPENDIX H - DATA EXTRACTION NO. 8 POWER REGULATOR BY REPAIR CODE..... | H-1 |
| APPENDIX I - DATA EXTRACTION NO. 9 LOGIC AND LOW VOLTAGE BY DEFECT CODE.... | I-1 |
| APPENDIX J - DATA EXTRACTION NO. 10 LOGIC AND LOW VOLTAGE BY REPAIR CODE.... | J-1 |
| APPENDIX K - PROPULSION SYSTEM FUNCTIONAL HIERARCHY..... | K-1 |
| APPENDIX L - UNIVERSAL COMPONENT CODES..... | L-1 |
| APPENDIX M - GENERIC DEFECT CODES..... | M-1 |
| APPENDIX N - GENERIC REPAIR CODES..... | N-1 |
| APPENDIX O - PATCO GENERIC PARTS LIST..... | O-1 |
| APPENDIX P - WMATA GENERIC PARTS LIST..... | P-1 |

LIST OF FIGURES


| <u>Figure</u> | | <u>Page</u> |
|---------------|--|-------------|
| 4.1 | DISTRIBUTION OF PATCO MAINTENANCE RATES Four Quarter Period By Major Assembly..... | 26 |
| 4.2 | DISTRIBUTION OF WMATA MAINTENANCE RATES Four Quarter Period By Major Assembly..... | 28 |
| 4.3 | DISTRIBUTION OF PATCO LABOR RATES Four Quarter Period By Major Assembly..... | 32 |
| 4.4 | DISTRIBUTION OF WMATA LABOR RATES Four Quarter Period By Major Assembly..... | 35 |
| 4.5 | DISTRIBUTION OF PATCO LOGIC AND LOW VOLTAGE MAINTENANCE RATES Four Quarter Period By Assembly..... | 42 |
| 4.6 | DISTRIBUTION OF WMATA LOGIC AND LOW VOLTAGE MAINTENANCE RATES Four Quarter Period By Assembly..... | 43 |

EXECUTIVE SUMMARY


This Special Report (Number 8) of the TRIP Data Bank (DB) has been prepared by Dynamics Research Corporation, operators of the TRIP DB. The purpose of this report is to compare detailed maintenance (reliability and maintainability) information on propulsion systems in use at the Port Authority Transit Corporation (PATCO) and the Washington Metropolitan Area Transit Authority (WMATA).

The report shows that PATCO's propulsion system is more reliable. PATCO's Maintenance Rate (maintenance action per 10,000 miles) is 19% lower than WMATA's. WMATA's system, however, exhibits a higher level of maintainability. WMATA's Labor Rate (maintenance labor hour expenditures per 10,000 miles) is 20% lower than PATCO's. The distribution of Labor (and Maintenance) Rates by major assembly, assembly etc. varies between the two authorities as shown below.


DISTRIBUTION OF PATCO LABOR RATES
PER MAJOR PORTION OF MAJOR ASSEMBLY

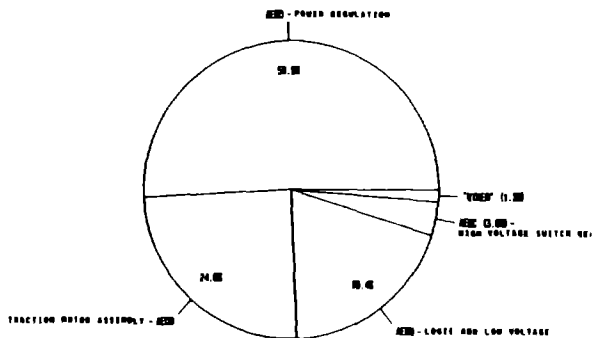

DISTRIBUTION OF WMATA LABOR RATES
PER MAJOR PORTION OF MAJOR ASSEMBLY

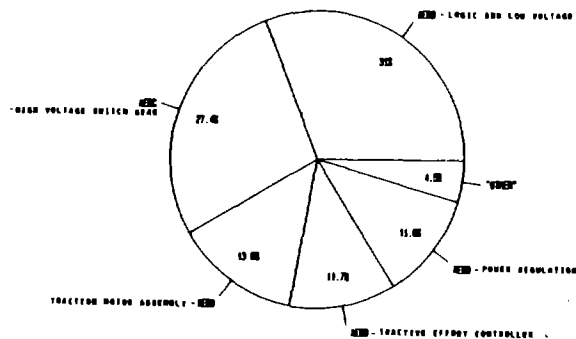

The TRIP Data Bank is best used in the comparison of data on a uniform basis, over time, between authorities. This capability makes possible the highlighting of differences and specific factors such as vehicle utilization, maintenance policies and equipment application which can influence hardware reliability and maintainability. The reasons for differences in the statistics may be investigated further in order to pinpoint specific problem(s); develop strategies, actions to improve equipment reliability, maintainability, and maintenance productivity; and therefore, lower operating and maintenance costs.



SECTION 1 - INTRODUCTION AND OVERVIEW

1.1 INTRODUCTION AND PURPOSE

This analytical report has been produced from data contained in the Transit Reliability Information Program (TRIP) Data Bank (DB) by Dynamics Research Corporation (DRC) under Contract Number DTRS-57-81-C-00084. The TRIP DB is an automated system for the collection, storage, retrieval, analysis and reporting of maintenance/reliability data which is being generated by transit operators in the course of revenue service operation and equipment maintenance of rapid rail vehicles. Its development has been initiated by the U.S. Government to assist the transit industry in satisfying an acknowledged need for transit reliability information on a national basis. TRIP provides this assistance through the operation of a national reliability Data Bank.

Review of TRIP Output Reports since June, 1979 indicate that the propulsion system is the transit car reliability high-driver, (least reliable) system throughout the industry. The propulsion system therefore, is the appropriate system to choose for this analysis which has been performed to help demonstrate analytical capabilities of the TRIP DB. Since the Port Authority Transit Corporation (PATCO) and the Washington Metropolitan Area Transit Authority (WMATA) are the two participating transit authorities for which there is some maintainability data (labor hours by maintenance action) on the data base, this

reliability/productivity analysis is restricted to these two authorities.

* * * NOTICE * * *

The information in this document has been obtained from data voluntarily submitted to the TRIP Data Bank by the Port Authority Transit Corporation and the Washington Metropolitan Area Transit Authority. This data has not been verified for completeness or accuracy.

Operating requirements and environments, maintenance procedures, and other factors contribute to variations in equipment repair and replacement rates. Any comparison of repair or replacement rates for specific types of equipment must consider the effects of these factors on the data reported herein.

This notice should accompany any subsequent use or reproduction of the information contained in this document.

* * * * *

1.2 SCOPE

The data used for this report covers a one year period from April 1, 1982 through March 31, 1983. This period was chosen because prior to April 1982, PATCO labor hours associated with duplicate records resulting from different

employee numbers were not captured. Duplicate records arise because a separate record is created by PATCO for each employee who works on a specific job and for each unique date associated with a given job number. Effective in April 1982, the PATCO Data Extraction Program was modified so that while records are automatically being checked for duplicates, a running total of the labor hours expended on each inspection and repair job is kept, with the total being included in the final record that is written for data base input.

Ten separate dynamic data extractions, which are discussed in detail in Section 4, were made for this report. The vehicle fleets from which the statistics in the data extractions are derived are:

- PATCO: All cars - 121 Cars:
 - Singles: 25 Cars;
 - Old Pairs: 50 Cars;
 - New Pairs: 46 Cars.

- WMATA: All ROHR Pairs - 300 Cars.

The ten data extractions are:

(NOTE: See Section 2 for a complete list of definitions and terms used throughout this report.)

1. Maintenance Actions per 100,000 Miles of Revenue Service Operation:

For each authority, quarterly statistics and the four quarterly period total statistics are given for:

- Mileage
- Maintenance Actions at the third (of four) level of Generic Part Number (GPN) Indenture
- Maintenance Rate at the third level of GPN Indenture.

2. Labor Hours per 100,000 Miles of Revenue Service Operation:

For each authority, quarterly statistics and the four quarter periods total statistics are given for:

- Mileage
- Labor Hours at the third level of GPN Indenture
- Labor Rates at the third level of GPN Indenture.

3. Reliability Statistics for the Four Quarter Period Based on 10,000 Miles of Revenue Service Operation:

For the reliability and maintainability (R&M) high-drivers identified via data extraction numbers 2 & 3, the following reliability statistics are given for each authority by the full GPN (fourth level of indenture), and Universal Component Code (UCC) associated with each GPN:

- Maintenance Actions
- Maintenance Rates
- Mean Miles Between Maintenance Actions (MMBMA).

4. Maintainability Statistics for the Four Quarter Period Based on 10,000 Miles of Revenue Service Operation:

For the R&M high-drivers identified via data extraction nos. 2 & 3 (same as in no. 4), the following maintainability statistics (indicies of productivity) are given for each authority by the full GPN, and UCC associated with each GPN:

- Labor Hours
- Labor Rates
- Mean Labor Hours to Repair (MLHTR)
- Labor Hour Repair Rate (1/MLHTR).

5. Maintainability High-Driver by Defect Code:

For the Major Assembly identified as the least maintainable for both PATCO and WMATA (Traction Motor Assembly), the following R&M statistics are given for the four quarter period for each authority by the full GPN, UCC and Generic Defect Code associated with each GPN/UCC combination.

- Maintenance Actions
- Maintenance Rates
- Labor Hours
- Labor Rates
- Mean Labor Hours to Repair.

6. Maintainability High Driver By Repair Code:

Same as data extraction no. 6 except the Generic Repair Code replaces the Generic Defect Code as the tertiary search key.

7. PATCO Maintenance High-Driver By Defect Code:

Same as data extraction no. 5 except the statistics are presented for the Power Regulation Major Assembly.

8. PATCO Maintenance High-Driver By Repair Code:

Same as data extraction no. 6 except the statistics are presented for the Power Regulation Major Assembly.

9. WMATA Maintenance High-Driver By Defect Code:

Same as data extraction nos. 5 & 7 except for WMATA's instead of PATCO's Major Assembly R&M high-driver (Logic and Low Voltage).

10. WMATA Maintenance High-Driver By Repair Code:

Same as data extraction nos. 6 & 8 except for WMATA's instead of PATCO's Major Assembly R&M high-driver (Logic and Low Voltage).

One additional data extraction was anticipated during the analysis description formulation for the Contract Statement of Work. This was the identification of labor expenditures on unscheduled versus scheduled maintenance. Because TRIP is not presently monitoring all vehicle

systems, the Data Bank does not contain total vehicle unscheduled maintenance labor hours. A comparison of labor hour expenditures for scheduled maintenance versus a subset of the total unscheduled maintenance labor hours would not be meaningful. In addition, TRIP monitors only the fact that a scheduled maintenance function was performed and captures the total labor hours for the inspection (PATCO & WMATA). The capability does not exist to extract scheduled maintenance labor hour expenditures for any given vehicle system separately. A comparison of labor expenditures on unscheduled versus scheduled maintenance for just the propulsion system is therefore not possible. For these reasons this data extraction was not performed. All the above described data extractions are presented and discussed in Section 4 of this report.

Section 2 contains a complete list of definitions and terms used throughout the report. Section 3 presents a description of the propulsion system being analyzed at each authority and the environment in which the cars are operated. Section 5 presents conclusions that may be drawn from the data analyses.

SECTION 2 - DEFINITIONS AND DATA PRESENTATION CONVENTIONS

The following is a summary of definitions, terms and data presentation conventions used throughout this report.

2.1 DEFINITIONS AND TERMS


The terms are presented in order alphabetically in the following subsections.

2.1.1 Generic Defect Code

The Generic Defect Code is a standard 4-character "number" used in the TRIP Data Bank to represent transit authority defect codes of equivalent definition. Defect codes describe equipment failures or defects. They are presented as Appendix M.

2.1.2 Generic Part Number

The Generic Part Number (GPN) is a standard, 6-character "number" used in the TRIP Data Bank to represent components of equivalent function, regardless of the specific part number used by the transit authority to identify a component. The GPN contains four levels of indenture (LOI) as follows:

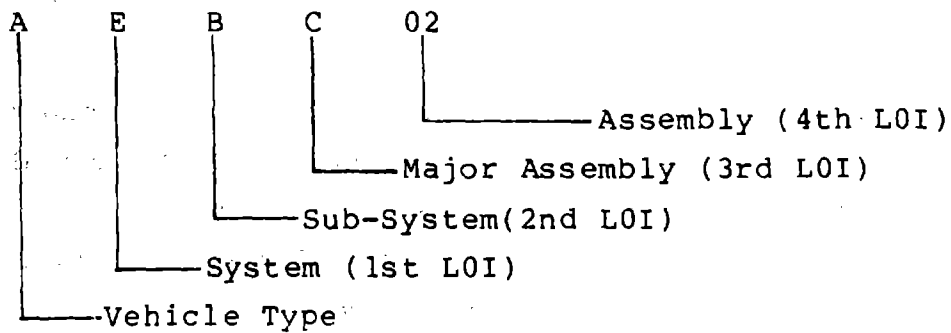

In the above example,

- A000000 = Rapid Rail Vehicle
- AE00000 = Propulsion System
- AEB0000 = Tractive Effort Controller
- AEBC000 = High Voltage Switchgear
- AEBC02 = Field (Contactor)

The complete GPN hierarchical listing for the propulsion system is shown in Appendix K.

2.1.3 Generic Repair Code

The Generic Repair Code is a standard, 4-character "number" used in the TRIP Data Bank to represent transit authority repair codes of equivalent definition. Repair codes describe the actions taken to correct known defects or to treat observed symptoms. They are presented as Appendix N.

2.1.4 Labor Hour Repair Rate

The Labor Hour Repair Rate (LHRR) is a number expressing how many vehicle Maintenance Actions attributed to a given item are completed in an hour. If the LHRR is 2.0 for a given item, then the Mean Labor Hours to Repair (MLHTR - see 2.1.8) is 0.5. These two terms are the reciprocals of each other.

2.1.5 Labor Rate

The Labor Rate (LRATE) is a number expressing how many maintenance labor hours are expended over a given amount of revenue service miles. Labor Rates are computed on different bases within this report. The first grouping is "Labor Hours per 100,000 Miles of Revenue Service Operation", by quarter and 4 quarter period or

Total Labor Hours per Given Time Period x 100,000
Mileage for the given time period.

The second grouping is "Labor Hours per 10,000 Miles of Revenue Service Operation", by 4 quarter period, or

Total Labor Hours per 4 Quarter Period x 10,000
4 Quarter Period Mileage

Quarterly mileages used in the calculations are shown below. These figures were obtained from the utilization data submitted to the TRIP Data Bank by PATCO and WMATA. The quarterly average number of cars

operated in revenue service by each authority is also given.

| <u>QUARTER</u> | <u>MILEAGE</u> | | <u>AVE. NO. OF CARS OPERATED</u> | |
|----------------|----------------|--------------|----------------------------------|--------------|
| | <u>PATCO</u> | <u>WMATA</u> | <u>PATCO</u> | <u>WMATA</u> |
| 2Q82 | 1,001,157 | 4,165,366 | 120 | 299 |
| 3Q82 | 964,911 | 4,165,638 | 118 | 297 |
| 4Q82 | 1,014,728 | 4,206,663 | 109 | 299 |
| 1Q83 | 1,007,152 | 3,997,136 | 109 | 294 |
| TOTAL PERIOD | 3,987,948 | 16,534,803 | 114 | 297 |

When labor hours, instead of elapsed time, is used as the basis for expressions of maintainability the following three indicies of productivity are equivalent measures: Labor Rate; Maintenance Support Index (MSI); and Maintenance Load Factor (MLF). The MSI is a measure of the average maintenance support required to maintain a system expressed in terms of labor hours per 10,000 miles/hours of revenue service operation. Its equivalency to the labor rate, defined above, is self evident. The classical definition of a MLF is a measure reflecting the repair load experienced in maintaining a vehicle/component and is determined by multiplying the vehicle/component's failure rate and Mean Time To Repair (MTTR). In this report failure rates are expressed as MRATE (see Sec. 2.1.7). The labor rate equivalent to MTTR is the MLHTR (see Sec. 2.1.8). A Maintenance Labor Hour Load Factor (MLHLF) is therefore expressed as:

$$\begin{aligned}
 \text{MLHLF} &= \text{MRATE} \times \text{MLHTR} \\
 &= \frac{\text{MACT}}{\text{MILES}} \times \frac{\text{LHRS}}{\text{MACT}} \\
 &= \frac{\text{LHRS}}{\text{MILES}} = \text{LRATE} = \text{MSI.}
 \end{aligned}$$

2.1.6 Maintenance Action

TRIP monitors primary (vehicular) maintenance i.e., maintenance on the vehicle to return it to revenue service. TRIP does not monitor secondary maintenance, i.e., off-the-vehicle shop maintenance to repair failed components.

A Maintenance Action (MACT), in its first definition, is the number of times that a vehicle is brought into a shop for maintenance (over a specified period) as determined by a physical count of the number of unique maintenance dates contained in the set of maintenance records for each vehicle. Since this Special Report pertains to only the Propulsion System, the set of maintenance records used to estimate the number of maintenance actions contains only those records whose Generic Part Number (GPN) begins with "AE".

A second definition of "maintenance action" is used herein to describe the unique combination of Car Number, Maintenance Date, GPN (or any of its four levels of indenture), Universal Component Code (UCC), and/or Generic Repair or Defect Code. As the number or detail of elements is increased, the number of unique combinations of elements within the set of maintenance records also increases. For example, the four quarter period data for PATCO contains 328

unique combinations of Car Number and Maintenance Data for GPN = "AEBB00". Adding UCC to the search for unique combinations raises the count to 332, and adding Generic Defect Code raises the count to 333. For this period there are 335 PATCO maintenance records.

2.1.7 Maintenance Rate

The Maintenance Rate (MRATE) is a number expressing how many Maintenance Actions occur during a given amount of revenue service miles. As with the Labor Rates, Maintenance Rates are computed on different bases within this report. The first grouping is "Maintenance Actions per 100,000 Miles of Revenue Service Operation", by quarter and 4 quarter period, or

$$\frac{\text{No. Maintenance Actions per Quarter Period} \times 100,000}{\text{Mileage per Period}}$$

The second grouping is "Maintenance Actions per 10,000 Miles of Revenue service Operations", by 4 quarter period, or

$$\frac{\text{No. Maintenance Actions per 4 Quarter Period} \times 10,000}{\text{4 Quarter Period Mileage}}$$

2.1.8 Mean Labor Hours to Repair

The Mean Labor Hours to Repair (MLHTR) is a number expressing the mean number of labor hours experienced in effecting a given vehicle repair (maintenance) action.

MLHTR is computed by dividing Labor Hours by Maintenance Actions. It is the reciprocal of the Labor Hour Repair Rate (see Sec. 2.1.4). So, if the MLHTR is 2.0 (2 labor hours to accomplish the vehicle repair), then the LHRR is 0.5.

2.1.9 Mean Miles Between Maintenance Actions

Mean Miles Between Maintenance Actions (MMBMA) is the reciprocal of the MRATE, expressing the utilization of a vehicle, component, etc., in terms of revenue service miles (10,000 or 100,000 in this report) between Maintenance Actions on the vehicle, component.

2.1.10 Universal Component Code

The Universal Component Code (UCC) is a standard, 2-character "number" used in the TRIP Data Bank to identify the specific component or assembly which has been functionally identified by the GPN. For example, the UCC "6S" means "contactor". Combining this UCC with the example GPN (see Section 2.1.2) thus identifies the "Field [Shunt] Contactor". Other components of the contactor are identified by different UCCs in combination with the same GPN. The UCCs are presented as Appendix L.

2.2 DATA PRESENTATION CONVENTIONS

The following data presentation conventions are used for the data extraction exhibits (Appendix A through J).

- "--": value exactly equals zero
- "0.0": for data extraction nos. 1 & 2 and 5 through 8, where the data is presented to one decimal place,

zero < "0.0" < 0.01.
- "0.00": for data extraction nos. 3 & 4, where the data is presented to two decimal places,

zero < "0.00" < 0.001
- "*****": MMBMA value exceeds 999.99. Since this appears where the mileage basis is 10,000 miles it actually means the value exceeds 9,999,900.
- "----": value is not applicable or indeterminate. For example where MACT, and therefore MRATE and LRATE, equals zero, MLHTR is not applicable, and MMBMA and LHRR is indeterminate.

SECTION 3 - EQUIPMENT DESCRIPTION

This section provides background information on the equipment being analyzed and the environment in which it is operated. The propulsion equipment operated at each authority is presented separately in the following sections. Table 3.1 contains static reference data on PATCO's and WMATA's propulsion equipment and on the environment in which it is operated. This data can be useful in interpreting any conclusions drawn from the dynamic data analyses.

3.1 PATCO

The PATCO fleet from which the data contained in this report is derived consists of three series of cars (see Section 1.2). The 25 single unit cars and 50 married pairs ("old pairs") were built by the BUDD Co. They were put into revenue service in 1969. The single unit cars carry an APTA Type-of-Car Code of N signifying double-ended powered MU connections. The 50 married pairs are Type H - single-ended; powered; one unit of a semi-permanently coupled "married pair". The third series of 46 cars ("new pairs"), built by Vickers Canada Inc., are also Type H and were put into service in 1980. These "new pairs" are of the same basic design as the "old pairs".

All cars are equipped with General Electric Company's Static Cam Magnetic (SCM) IV switched resistor control, utilizing the model 17KM52A1 controller. The KM52

TABLE 3-1. STATIC REFERENCE DATA

| | <u>PATCO</u> | <u>WMATA</u> |
|---|---|--------------------------|
| Average Passenger Station Spacing ³ | 1.18 miles | 0.94 miles |
| Maximum Line Voltage ¹ | 780 VDC | 860 VDC |
| Minimum Line Voltage ¹ | 650 VDC | 430 VDC |
| Nominal Line Voltage ¹ | 750 VDC | 700 VDC |
| Maximum Consist Length ¹ | 6 | 8 |
| Minimum Consist Length ¹ | 1 | 2 |
| Average Daily Passenger Volume (1983) ¹ | 40,000 | 317,276 |
| Annual Passenger Volume (1983) ¹ | 10,671,000 | 270,000,000 |
| Maximum Operating Speed ⁴ | 75 mph | 75 mph |
| Balancing Speed ⁴ | 87 mph | 72 mph |
| Average Running Speed ⁵ | 39 mph | 35 mph |
| Acceleration Rate ⁴ | 3.0 mph/s | 3.0 mph/s |
| Braking rate - Service Min./Max. ⁴ | 1.0/3.0 mph/s | 0.75/3.0 mph/s |
| Maximum Braking Rate - Emergency ⁴ | >3.0 mph/s | 3.2 mph/s |
| Maximum Jerk Rate | 3.0 mph/s ² | 1.84 mph/s ² |
| AW ₀ Car Weight (Empty) ⁴ | 79,500 lbs ⁶ 74,800 lbs ⁷ | 73,500 lbs |
| AW ₁ Car Weight (Seated) ¹ | 91,900 lbs ⁶ 87,200 lbs ⁷ | 85,650 lbs |
| AW ₂ Car Weight (Seated & Standing) ¹ | 98,875 lbs ⁶ 94,175 lbs ⁷ | 99,750 lbs |
| AW ₃ Car Weight (Crush) ¹ | 104,725 lbs ⁶ 105,025 lbs ⁷ | 106,550 lbs |
| Starting Current Draw per Car ¹ | 1200 amps | 940 amps |
| Current at Full Speed per Car ¹ | 1000 amps | 600 amps |
| Motor Rating ⁴ | 140hp (300v 1850 rpm) | 175hp (325v 2450 rpm) |
| Maximum Motor Speed | 4600 rpm | 5400 rpm |
| Maintenance Employees per Vehicle ³ | 0.92 | 1.13 |

1 Provided by each respective Authority

2 Does not include newly opened yellow line

3 From Urban Rail in America, Pushkarev, 1982.

4 From Roster of North American Rail Transit Cards, APTA, July 1980.

5 From Railway Age, September 28, 1982 p. 49.

6 Single (double-ended) Cars

7 Married Pair Cars

controller is a pilot motor-driven, revolving-cam, electrical switching device which responds to the Automatic Train Control (ATC) System or the train operator via the master controller to control train acceleration, braking and direction. The KM52 controller has twenty-five switch positions to control motor power switching for series, series-parallel, coast and braking operations. The principal parts of the controller include a low voltage operated pilot motor, a reduction gear case, three camshafts, notch interlock, modular reverser and circuit breaker and modular contact units for power and control.

In operation, the pilot motor rotates the three camshafts through the gear case. The two smaller camshafts operate low voltage contact units. The larger camshaft operates high voltage contact units. As the camshafts revolve, the contact units open and close the low and high voltage circuits in a preset sequence. The controller has a notch interlock which assures that the controller, once started by a run signal, will run to the next notch. The interlock does not start or stop the pilot motor.

The circuit breaker is a modular contact unit incorporated on the main cam controller, unlike many other control systems where it is a separate unit. The breaker is operated by the motion of the camshaft in normal operation. It is equipped with an overload trip device.

Reversing direction is performed by a modular unit, mounted on the camshaft frame and actuated by a combination of camshaft and contact movement. The contacts reverse the motor fields to achieve a change in direction of the car.

Additional contactors handle portions of functions such as dynamic brake set-up and series-parallel change over.

The master controller is a two-handle unit consisting of a power handle incorporating a "dead man" feature, and a reversing handle. Each handle operates a small camshaft with a number of roller operated, normally closed, modular switches along its shaft. The power camshaft also operates two potentiometers which give rate requested commands to the vehicle's main cam controller.

PATCO cars are equipped with GE1255A1 and A2 motors which are rated at 140 HP with 300 volts at 1850 RPM with a maximum of 4600 RPM. The general classification of the motor is a four pole, series-wound, commutating-pole, self-ventilated, direct current motor. The motor is equipped with grease-lubricated ball bearings at the commutator end and grease-lubricated roller bearings at the pinion end. The leads are connected to the car body by G.E. modular motor lead couplers. Each motor drives the adjacent axle through a GE type GA56 double reduction parallel drive gear unit with helical gears with a 6.21 to 1 gear ratio.

3.2 WMATA

The fleet from which the WMATA data contained in this report is derived, is the 300 "married pairs" (Car Type H), built by Rohr. The cars went into revenue service operation in 1976. They are equipped with Westinghouse Electric Corporation's switched resistor air-operated cam type control. The cam controller responds to both traction and dynamic braking commands from the ATC System or from the

train operator via the master controller. These commands are carried on trainline wires to the Package Unit (motor control unit) which controls the amount of current fed to the traction motors through the main power and braking resistors.

The Package Unit consists of two air operated double-ended cam controllers. One is the power cam controller (PCC) and the other for dynamic braking is the brake cam controller (BKCC). Each consists of an air cylinder assembly which drives a camshaft through a rack and pinion to operate the high voltage cam switches and their low voltage interlocks. The air cylinders which operate the cam controllers are operated by magnet valves, which are, in turn controlled by the limit relay system and logic circuits.

The limit relay system is the heart of the acceleration and dynamic brake control function, the decision-making part of which is the logic cradle. The basic function of the limit relay system is to maintain the desired car acceleration and braking currents in response to request signals from the master controller or the ATC system. In addition to controlling the PCC and BKCC, the limit relay system also controls the field shunt contactors through the logic cradle.

The limit relay system receives commands in the form of four-bit binary coded logic trainline wire signals from the master controller or ATC system. It decodes these commands into propulsion system current levels. These signals are processed by the logic cradle and connected to either the propulsion or braking systems. Traction motor currents are

controlled by the operation of the PCC and BKCC switches. Motor current values from the transducers (current sensing transformers) are compared with the trainline rate value requested at the master controller or ATC and a difference signal is developed which then drives the PCC, BKCC and field contactors.

The Package Unit also contains a number of magnetically operated contactors which control series and paralleled changing, field shunting, dynamic braking and other features. In addition to the two cam controllers in the Package Unit, each car contains an air-operated line switch unit with two air piston operated line contactors. Each contactor is closed by air pressure controlled by a magnet valve, and rapidly opened by spring pressure.

Reversing is accomplished by an air cylinder operated reverser cylinder controlled by two magnet valves, one to turn the cylinder to the forward position and one to reverse the direction of travel. Series-parallel switching and power-brake circuit changeover are performed by air operated single-ended rocker-cam switches with sliding cam interlocks.

The master controller consists of a single handle unit incorporating a "dead man" feature. Reversing is controlled by a 12 position rotary switch called a mode selection switch. The power handle operates a camshaft with two rows of normally closed, roller operated cam switches along its shaft.

WMATA's cars are equipped with Westinghouse type 1462B motors which are rated at 175 HP with 325 volts at 2450 RPM,

with a maximum of 5400 RPM. The basic design is similar to PATCO's GE motors. The general motor classification is also a four pole, series-wound, commutating-pole, self-ventilating, direct current motor. As with PATCO, each motor is equipped with grease-lubricated bearings, with ball bearings at the commutator end and roller bearings at the pinion end. WMATA's leads, however, are connected to the carbody by bolted leads protected by insulated cleat blocks and neoprene tubes. Each motor drives the adjacent axle through a Westinghouse WR500 double reduction drive gear unit with helical gears with a 5.54 to 1 gear ratio.

3.3 COMPARISON

The major difference between the PATCO and WMATA propulsion systems is the design and method of operation of the cam control system. The WMATA camshafts are operated by separate rack and pinion air engines controlled by magnet valves. The PATCO camshafts are turned by a pilot motor turning three camshafts through a gearbox. WMATA has a separate air operated reverser and a separate air operated line switch while the PATCO circuit breaker and reverser are incorporated into the cam controller.

SECTION 4 - DYNAMIC DATA ANALYSIS

As stated in Section 1.2, ten separate dynamic data extractions were made for this report. They are discussed in the following sections.

4.1 MAINTENANCE ACTIONS PER 100,000 MILES OF REVENUE SERVICE OPERATION.

4.1.1 Data Extraction Description

This data extraction (No. 1), displayed as Appendix A, was made to determine the reliability high-drivers for each authority. Quarterly statistics and four quarter period total statistics for each authority are given for:

- Utilization (period revenue service mileage);
- Maintenance Actions (counts);
- Maintenance Rates (MACTS/100,000 miles).

The extraction was made at the 3rd LOI (Major Assembly) of the GPN. The complete GPN hierarchical listing for the propulsion system is shown in Appendix K. For this data extraction, only those GPNs are displayed for which there are MACT counts for PATCO or WMATA or both. If there were no counts against a particular GPN for both authorities, the GPN is not displayed. Propulsion System total statistics are also provided as are verbal descriptions of the GPNs.

4.1.2 Analysis

The system total MRATES show that, using this statistic as a measure of reliability, PATCO's Propulsion System is slightly more reliable than WMATA's. PATCO's Propulsion System, for all cars for the four quarter period investigated, has an MRATE of 31.7 (MACTs per 100,000 miles), while WMATA's (ROHR cars), is 39.3. This ranking is true for three of the four quarters investigated. The fourth quarter 1983 (Oct., Nov., Dec.) is the only quarter where WMATA has a lower MRATE.

The statistics for the individual GPNs clearly shows the reliability high-driver Major Assemblies of the Propulsion System. They are discussed in the following subsections.

4.1.2.1 PATCO Analysis

For PATCO, three of the four high-driver Major Assemblies are within the Subsystem - Tractive Effort Controller (GPN - AEB). The fourth is within the Subsystem - Traction Motor Assembly (GPN - AED). PATCO's reliability high-driver Major Assemblies, measured by maintenance action counts and maintenance rates, are (in descending order):

- AEBD - Power Regulation
- AEBC - Logic and Low Voltage
- AED0 - Traction Motor Assembly
- AEBC - High Voltage Switch Gear

This ranking holds for the four quarter total and for three of the four quarters. Only during the second quarter 1982 does AEBC slightly outrank AED0. There is, therefore, no seasonal variation as to what the reliability high-drivers are and virtually no variation as to their relative ranking by season. Figure 4.1 displays the Four Quarter Period distribution of Maintenance Rates by Major Assembly for PATCO. The Power Regulation Major Assembly within the Tractive Effort Controller Subsystem is the reliability high-driver of PATCO's Propulsion System, accounting for 52.8% of all Major Assembly MACTs.

4.1.2.2 WMATA Analysis

In addition to the above four Major Assemblies, GPN AEBO - Tractive Effort Controller appears as a reliability high-driver for WMATA. The five WMATA reliability high-driver Major Assemblies, displayed in the data extraction presented as Appendix A, are essentially equivalent to the four displayed for PATCO. PATCO does not show any MACT counts against GPN AEBO-Tractive Effort Controller. This is due to the relative complexities of PATCO's and WMATA's part number schemes. PATCO has 515 part numbers identifying the parts of their propulsion system versus 91 part numbers for WMATA. (The Generic Part Lists, cross-referencing Property Part Numbers to TRIP Generic Part Numbers are presented as Appendices O and P for PATCO and WMATA respectively). PATCO's part numbering system is, therefore, more detailed i.e., there is a lower degree of parts grouping. Because of PATCO's higher level of specificity in identifying parts, the MACTs against GPN AEBO showing for WMATA are actually included in the other AEB GPNs for PATCO i.e., in other

FOUR QUARTER PERIOD BY MAJOR ASSEMBLY

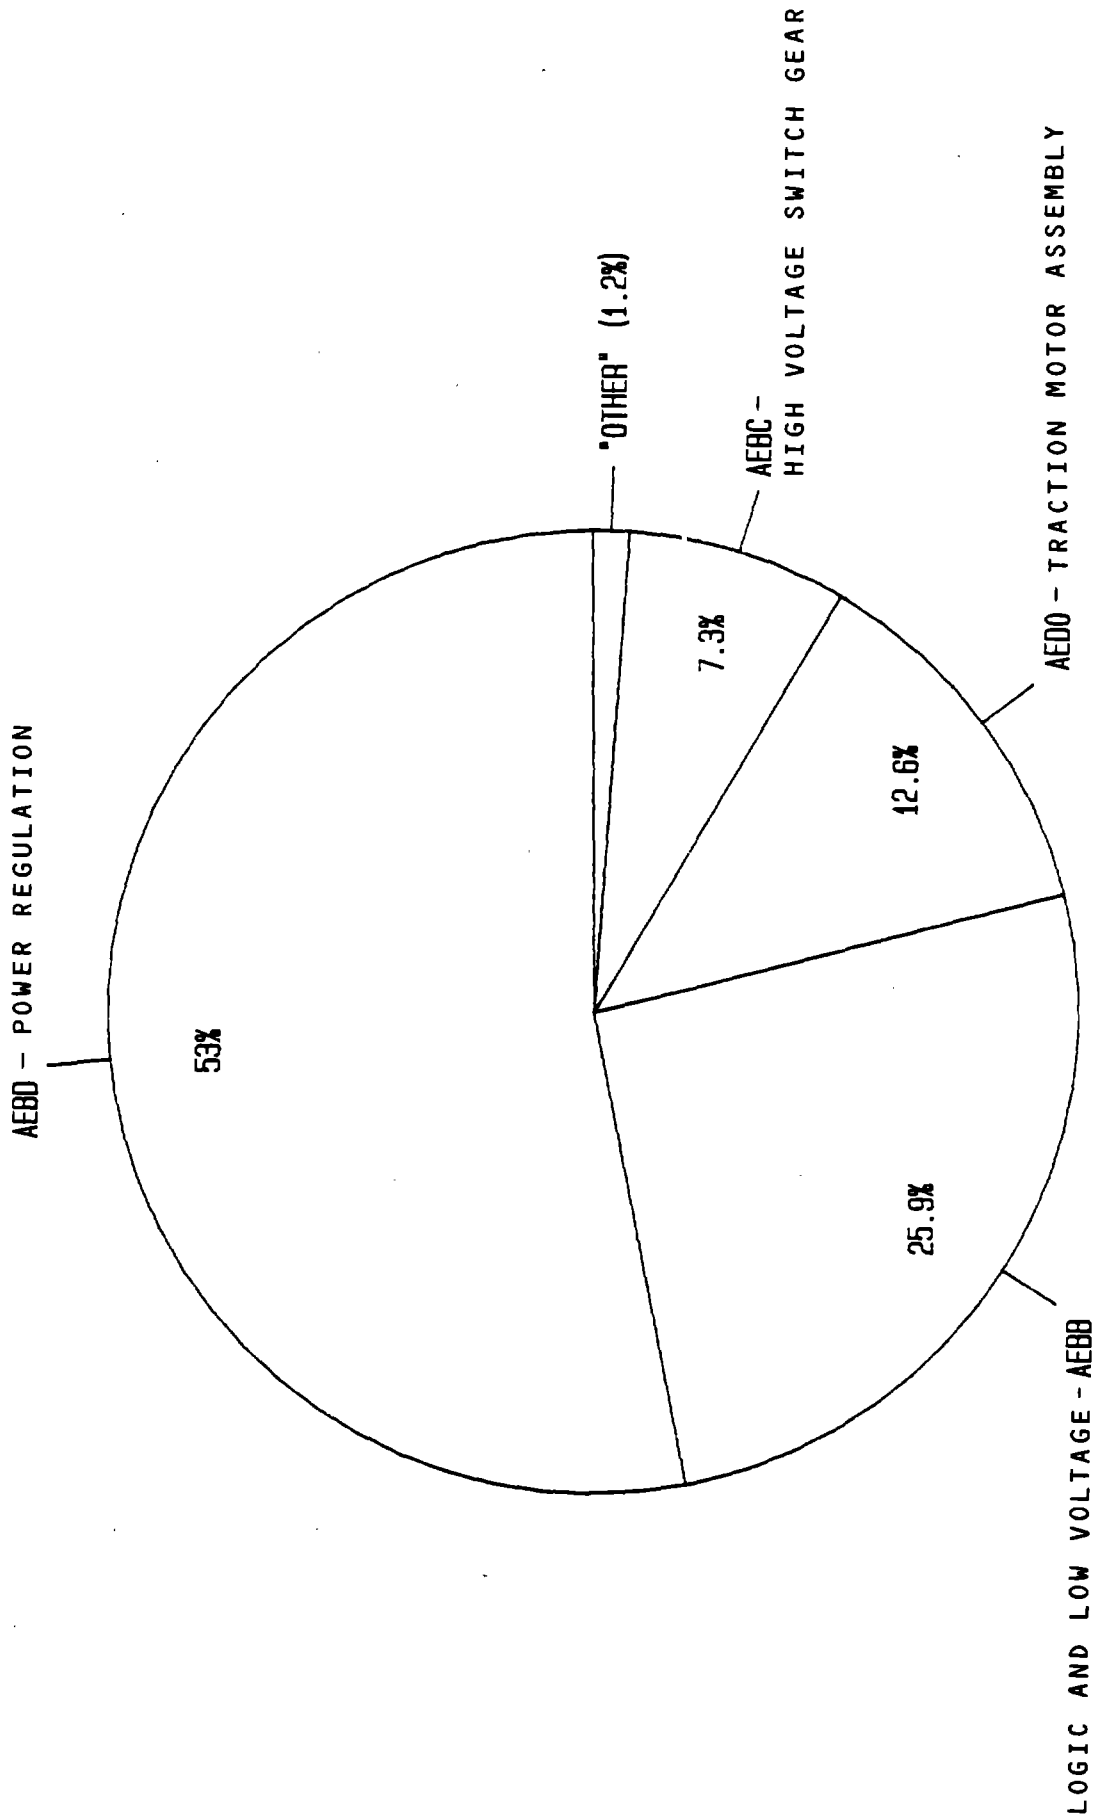


FIGURE 4-1. DISTRIBUTION OF PATCO MAINTENANCE RATES

Major Assembly designations of the Tractive Effort Controller instead of against the Tractive Effort Controller itself. This phenomenon does not hamper the validity of this overall analysis because data extraction nos. 3 through 8 (see Section 1.2) include the UCC as an additional data extraction search key, so actual components are addressed.

As with PATCO, the only Major Assembly reliability high-driver not in the Tractive Effort Controller Subsystem is the Traction Motor Assembly. Although the same Major Assemblies appear for both authorities as the reliability high-drivers, the ranking of the Major Assemblies by Maintenance Rates differ between WMATA and PATCO. For WMATA the ranking is as follows (in descending order):

- AEBB - Logic and Low Voltage (2nd for PATCO)
- AEBC - High Voltage Switch Gear (4th for PATCO)
- AEB0 - Tractive Effort Controller (not displayed for PATCO)
- AED0 - Traction Motor Assembly (3rd for PATCO)
- AEBD - Power Regulation (1st for PATCO)

This ranking holds for the four quarter total and for three of the four quarters. Only during the first quarter 1983 does AED0 slightly outrank AEB0. As with PATCO there is no seasonal variation as to what the reliability high-drivers are and virtually no variation as to their relative ranking by season. Figure 4.2 displays the Four Quarter Period distribution of Maintenance Rates by Major Assembly for WMATA. The Logic and Low Voltage Major Assembly within the Tractive Effort Controller Subsystem is the reliability high-driver of WMATA's Propulsion System, accounting for 31.5% of all Major Assembly MACTs.

FOUR QUARTER PERIOD BY MAJOR ASSEMBLY

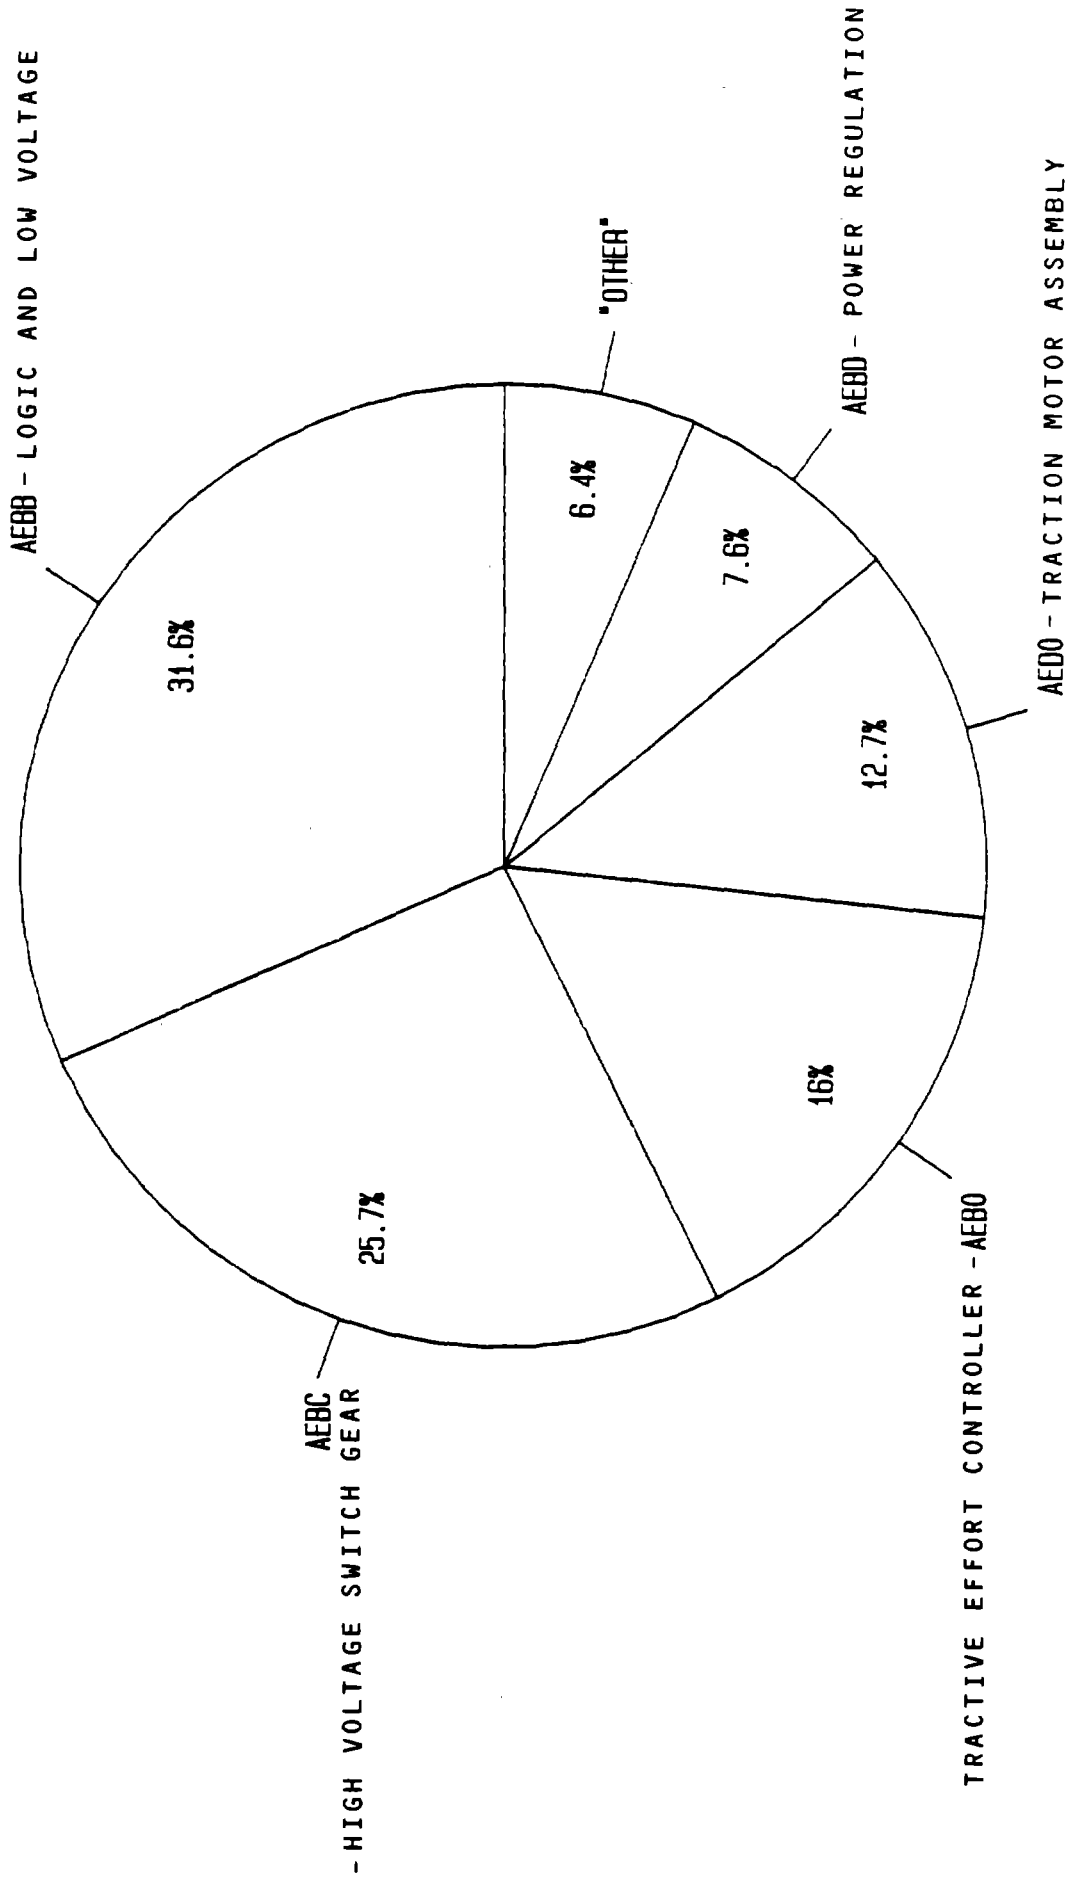


FIGURE 4-2. DISTRIBUTION OF WMATA MAINTENANCE RATES

4.2 LABOR HOURS PER 100,000 MILES OF REVENUE SERVICE OPERATION

4.2.1 Data Extraction Description

This data extraction (No. 2), displayed as Appendix B, is the companion to data extraction no. 1. It was made to determine the Labor Hour high-drivers for each authority. Quarterly statistics and four quarter period total statistics for each authority are given for:

- Utilization
- Labor Hours (counts)
- Labor Rates (Labor Hours/100,000 miles).

As with data extraction No. 1, this data extraction was made at the 3rd LOI (Major Assembly) of the GPN for the same GPNs displayed in data extraction No. 1. Propulsion System total statistics are also provided in this data extraction as are verbal descriptions of the GPNs.

4.2.2 Analysis

The system total LRATES indicate that, using this statistic as a measure of maintainability, WMATA's Propulsion System exhibits a slightly higher level of maintainability than PATCO's. WMATA's Propulsion System for the four quarter period has an LRATE of 150.4 (Labor Hours per 100,000 miles) while PATCO's is 188.8. This is true for three of the four quarters investigated. The second quarter 1982 (Apr., May, June) is the only quarter where PATCO has a lower LRATE.

WMATA's overall lower LRATE, when taken with its overall higher MRATE (see Section 4.1.2) would seem to indicate a higher level of equipment maintainability and/or maintenance personnel productivity for WMATA. It must be noted however, that although the statistics indicate such a conclusion, caution should be exercised in drawing concrete conclusions because no information is presented regarding vehicle design, the maintenance policies and practices, and repair facilities and equipment of each authority, which could influence the LRATES.

The statistics for the individual GPNs clearly show the Labor Hour high-driver Major Assemblies of the Propulsion System for each authority, within which the maintenance policies and practices would be a constant.

4.2.2.1 PATCO Analysis

As expected, the same Major Assemblies are the maintenance Labor Hour high-drivers as are the reliability high-drivers. The rankings, however, differ. In descending order by LRATE, the Major Assemblies are:

- AEED - Power Regulation
- AED0 - Traction Motor Assembly
- AEBB - Logic and Low Voltage
- AEBC - High Voltage Switch Gear

This ranking holds for all four quarters. There is therefore, no seasonal variation as to the Labor Hour high-drivers, and also as to their relative ranking by season. Figure 4.3 displays the Four Quarter Period distribution of

Labor Rates by Major Assembly for PATCO. The Power Regulation Major Assembly is the Labor Hour high-driver of PATCO's Propulsion System, accounting for 50.9% of all Major Assembly Labor Hours.

The following is a summary of data extraction nos. 1 & 2 for PATCO:

- Power Regulation ranks first in both Labor Hour expenditures and Maintenance Actions, accounting for 50.9% of Labor Hours and 52.8% of Maintenance Actions .
- The Traction Motor Assembly ranks second in Labor expenditures and third in Maintenance Actions, accounting for 24.8% of Labor Hours and 12.5% of Maintenance Actions.
- Logic and Low Voltage ranks third in Labor Hour expenditures and second in Maintenance Actions, accounting for 19.4% of Labor Hours and 25.9% of Maintenance Actions.
- High Voltage Switch Gear ranks last (of the high-drivers) in both, accounting for 3.6% of Labor Hours and 7.1% of Maintenance Actions.
- Other Major Assemblies, in total, account for 1.3% of Labor Hours and 1.7% of Maintenance Actions.

The above statistics indicate that, of the Major Assembly high-drivers, Logic and Low Voltage is the most

FOUR QUARTER PERIOD BY MAJOR ASSEMBLY

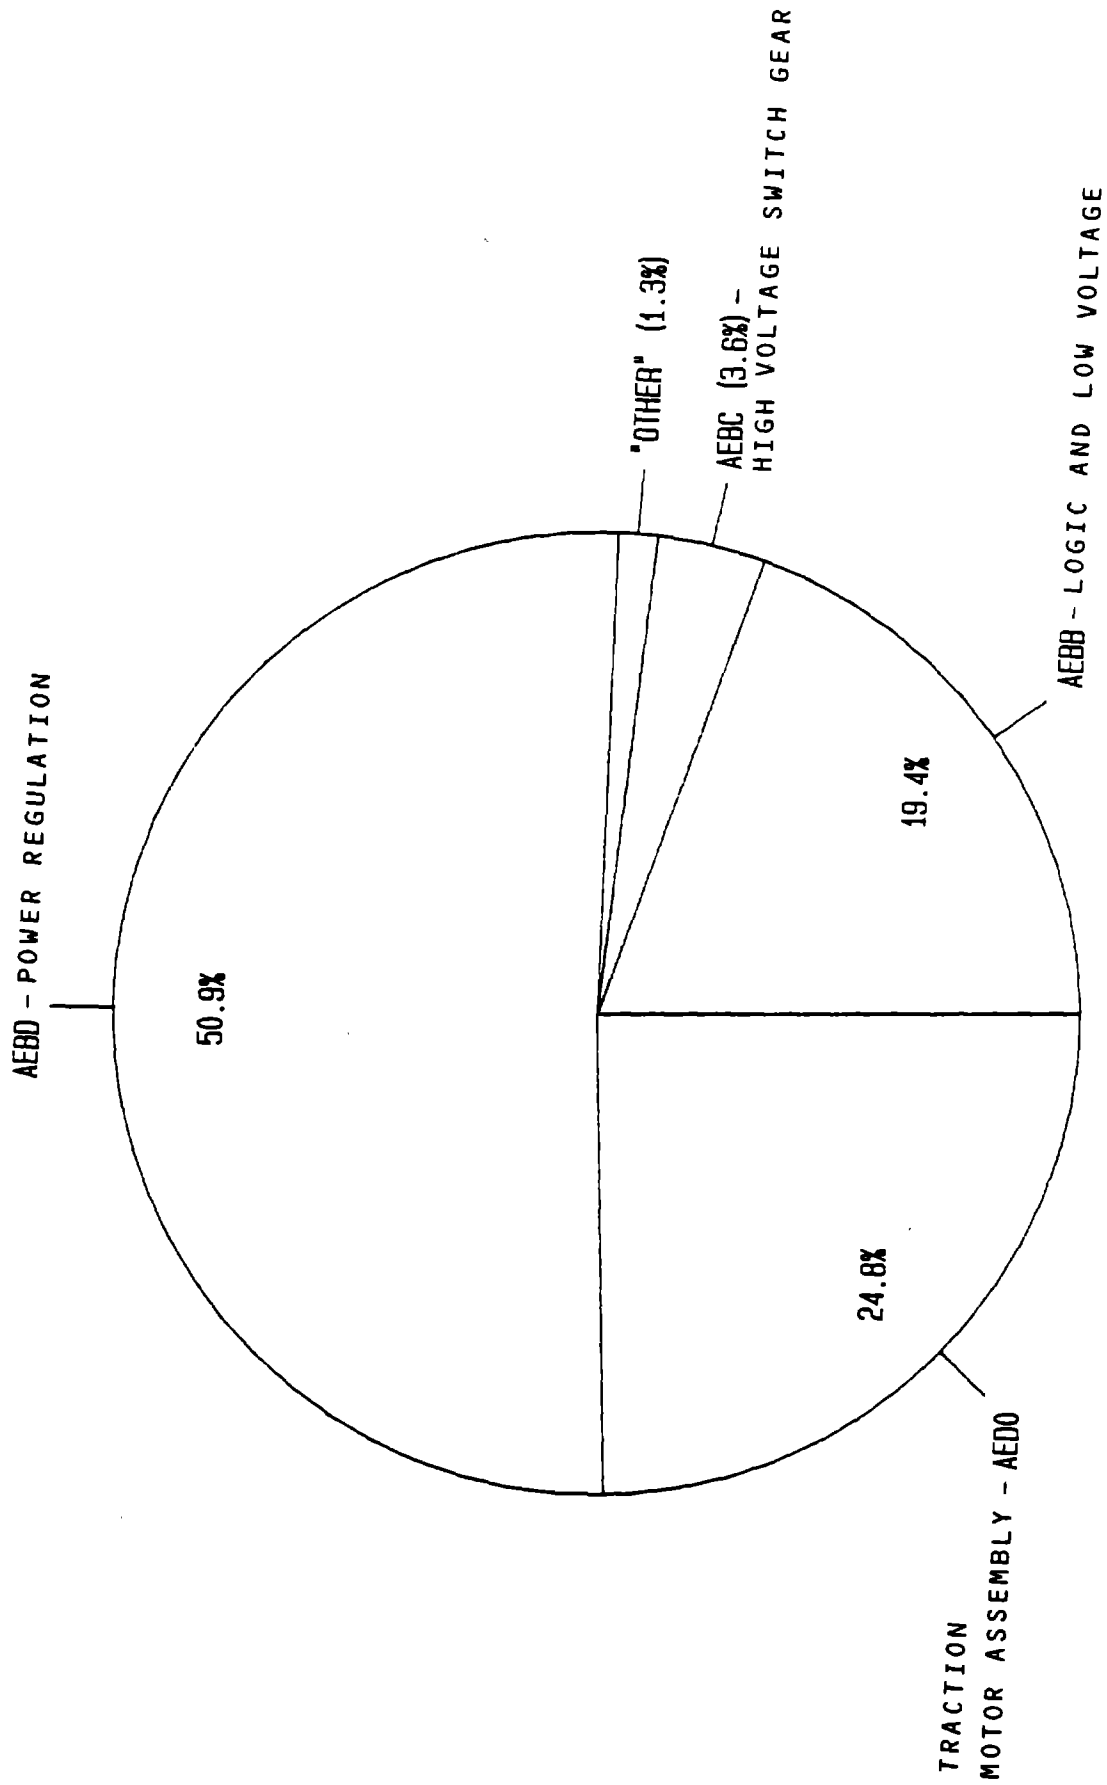


FIGURE 4-3. DISTRIBUTION OF PATCO LABOR RATES

maintainable, while the Traction Motor Assembly is the least. This conclusion is drawn from the lower Labor Hour ranking coupled with the higher Maintenance Action ranking for Logic and Low Voltage (vice versa for Traction Motor Assembly).

Power Regulation, which demonstrated the highest MRATE and LRATE, is the maintenance high-driver Major Assembly for PATCO.

4.2.2.2 WMATA Analysis

As the PATCO analysis revealed, the same Major Assemblies are both the maintenance Labor Hour and the reliability high-drivers. As with PATCO, the rankings differ. The Four Quarter Period ranking of the maintainability high-driver Major Assemblies are (in descending order by LRATE):

- AEBC - High Voltage Switch Gear (4th for PATCO)
- AED0 - Traction Motor Assembly (2nd for PATCO)
- AEBO - Tractive Effort Controller (not displayed for PATCO)
- AEBD - Power Regulation (1st for PATCO)

In contrast to PATCO, WMATA's ranking is not the same for any of the four quarters. Labor Hour expenditures, by Major Assembly, for WMATA are, therefore, slightly more variable than those for PATCO. However, there is a high level of consistency for WMATA showing little seasonal

variations. AEBB and AEBC for instance, rank first for all four quarters. The other Major Assemblies exhibit some seasonal variation regarding Labor Hour expenditures while there was almost no seasonal variation regarding Maintenance Actions. Analysis of the statistics by themselves cannot account for the slight seasonal variation in Labor Hour expenditures by Major Assembly for WMATA. An investigation of the maintenance function (policies and practices) would be needed to explain the variation.

Figure 4.4 displays the Four Quarter Period distribution of Labor Rates by Major Assembly for WMATA. The Logic and Low Voltage Major Assembly is the Labor Hour high-driver of WMATA's Propulsion System, accounting for 31.0% of all Major Assembly Labor Hours.

The following is a summary of data extraction nos. 1 & 2 for WMATA:

- Logic and Low Voltage ranks first in both Labor Hour expenditures and Maintenance Actions, accounting for 31.0% of Labor Hours and 31.5% of Maintenance Actions.
- High Voltage Switch Gear ranks second in both, accounting for 27.4% of Labor Hours and 25.8% of Maintenance Actions.
- The Traction Motor Assembly ranks third in Labor Hour expenditures and fourth in Maintenance Actions, accounting for 13.8% of Labor Hours and 12.8% of Maintenance Actions.

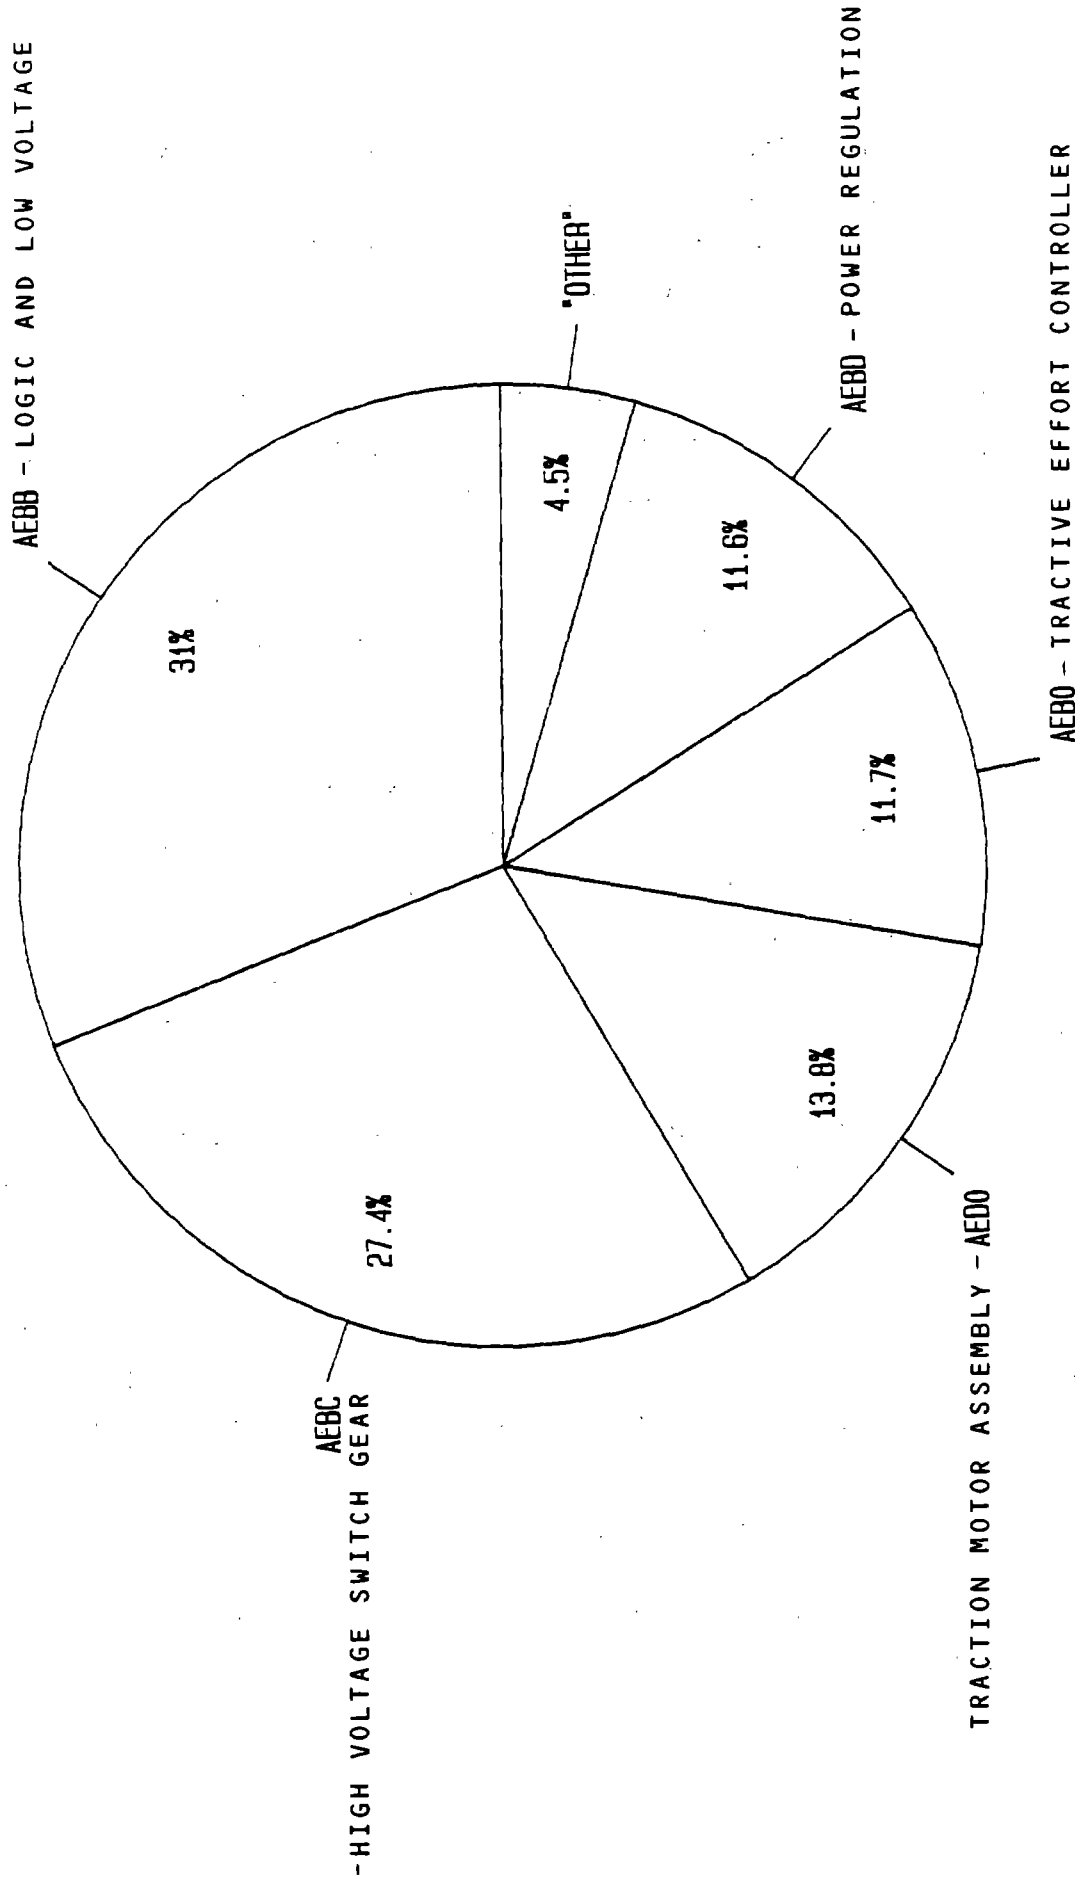


FIGURE 4-4. DISTRIBUTION OF WMATA LABOR RATES

- The Tractive Effort Controller ranks fourth in Labor Hour expenditures and third in Maintenance Actions, accounting for 11.7% of Labor Hours and 15.9% of Maintenance Actions
- Power Regulation ranks last (of the high-drivers) in both, accounting for 11.6% of Labor Hours and 7.7% of Maintenance Actions
- Other Major Assemblies in total account for 4.5% of Labor Hours and 6.3% of Maintenance Actions.

Although the percentage differences are not as extreme in comparison with PATCO, the Traction Motor Assembly appears to be the least maintainable Major Assembly for WMATA as it is for PATCO. This conclusion is drawn from the higher Labor Hour ranking over the Maintenance Action ranking.

Logic and Low Voltage, which demonstrated the highest MRATE and LRATE, is the maintenance high-driver Major Assembly for WMATA.

4.3 RELIABILITY STATISTICS FOR FOUR QUARTER PERIOD AND MAINTAINABILITY STATISTICS FOR FOUR QUARTER PERIOD

4.3.1 Data Extraction Descriptions

These data extractions (nos. 3 & 4), displayed as Appendices C & D, were made to provide greater detailed statistics on the high-driver Major Assemblies identified

via data extraction nos. 1 & 2. Because the statistics of these two extractions exhibit virtually no seasonal variation, extractions 3 & 4 (and all subsequent extractions) are made for the four quarter period only.

Data extraction no. 3 presents four quarter period total statistics for:

- Utilization (period revenue service mileage)
- Maintenance Actions (counts)
- Maintenance Rates (MACTs/10,000 miles)
- Mean Miles Between Maintenance Actions (10,000 mile basis)

Data extraction no. 4 presents four quarter period total statistics for:

- Utilization
- Labor Hours (counts)
- Labor Rate (Labor Hours/ 10,000 miles)
- Mean Labor Hours to Repair
- Labor Hour Repair Rate

Where data extraction nos. 1 & 2 are based on 100,000 miles of revenue service operation, extractions 3 through 8 are based on 10,000 miles of revenue service operation. 100,000 miles was used for the first two extractions to make certain that the high-driver Major Assemblies would clearly stand out. The remainder of the data extractions use the same revenue service mileage base (10,000 miles) as the periodic TRIP Output Reports.

Data extraction nos. 3 and 4 present the above statistics for each authority by the full GPN (fourth level of indenture) and UCC associated with each GPN, thereby providing the data by equipment function, via the GPN, and for actual components, via the UCC.

The data provided for the GPN-UCC combinations represents the breakdown by UCC of the data provided on each line where the UCC column contains "--". These lines precede the GPN-UCC combinations associated with them. Statistical totals, for the presented data, are provided as are narrative descriptions of the GPNs and UCCs.

4.3.2 Analysis

No attempt is made here, or in subsequent data extractions, to exhaustively analyze all of the data. The analysis of these two extractions (nos. 3 and 4) pertains to only the following Major Assemblies:

- Traction Motor Assembly (Major Assembly identified as the least maintainable for both PATCO and WMATA)
- Power Regulation (PATCO's Major Assembly high-driver)
- Logic and Low Voltage (WMATA's Major Assembly high-driver)

Within the framework, only data points of significance will be highlighted to demonstrate the kinds of findings that can be derived from the TRIP Data Bank.

4.3.2.1 Traction Motor Assembly: GPN AED000

The Traction Motor Assembly has been identified as the least maintainable Major Assembly for both PATCO and WMATA. This conclusion was drawn from the fact that this Major Assembly exhibited a Labor Hour ranking higher than its Maintenance Action ranking.

Data extraction nos. 3 and 4 show that the motor itself (UCC=MR) is the component high-driver within the Traction Motor Assembly. For PATCO, the motor accounts for 96.2% (154/160) of the MACTs attributed to the Traction Motor Assembly, and 93.9% (1752.5/1865.5) of the Labor Hour expenditures. For WMATA, the corresponding percentages are 87.6% of the MACTs and 92% of the Labor Hours.

The reliability of the motors is comparable, with PATCO's exhibiting a slightly higher level, i.e., slightly more reliable. This is demonstrated by their relative MRATES and MMBMAs. PATCO's traction motor MRATE is 0.39 versus 0.46 for WMATA. MMBMAs are 25,900 miles for PATCO versus 22,000 for WMATA.

Although the traction motors being used on the vehicle fleets monitored by TRIP for each authority exhibit comparable reliability levels, the maintainability levels differ by a significant amount. For the traction motor, PATCO expends 4.39 Labor Hours per 10,000 miles of revenue service

operation where WMATA expands 1.92 Labor Hours. PATCO's MLHTR is 11.38 versus WMATA's 4.21. Therefore, it takes PATCO 2.7 times as many labor hours to repair a vehicle with a traction motor failure (not to repair the motor itself) in comparison with WMATA.

Again, it should be noted that these statistics do not take into account vehicle design, maintenance policies and practices, repair facilities and equipment etc., which could be influencing the indices of productivity.

4.3.2.2 Power Regulation - CAM: GPN AEBD01

Power Regulation has been identified as the MACT and Labor Hour high-driver Major Assembly for PATCO. It ranks last, however, of the Major Assembly high-drivers identified for WMATA. Data extraction nos. 3 and 4 show how the MACTS attributed to the Assembly are distributed among its components. 95.5% of the PATCO MACTs against AEBD01 is attributed to the "shaft" (UCC=SM). This is the cam shaft. The next ranking contributing component is the "cam switch" (UCC=CF), accounting for only 2.2% of the MACTs.

WMATA's data shows no MACTs against these components. The components which contribute to the WMATA MACTs against this Assembly are as follows:

- Controller (power and/or brake, CAM controller)-
54.7%
- Hardware - 23.2%
- Resistor - 16.1%

- Insulator - 5.4%
- Rod - 0.6%

The maintainability statistics (extraction no. 4) show that Power Regulation has a greater effect on PATCO's labor force than on WMATA's. This is expected given the reliability levels for each authority. PATCO expends 9.61 maintenance Labor Hours per 10,000 miles of revenue service operation versus 1.74 for WMATA. (This was also shown in extraction nos. 1 and 2). The indice of productivity given in extraction no. 4 shows that although Power Regulation impacts PATCO more than WMATA, the Labor Hour productivity for each authority as measured by MLHTR, is comparable. PATCO's overall MLHTR for Power Regulation failures is 5.71 versus 5.59 for WMATA.

4.3.2.3 Logic and Low Voltage: GPN AEBB

Logic and Low Voltage has been identified as the MACT and Labor Hour high-driver Major Assembly for WMATA. For PATCO, it ranks as the second and third high-driver for MACTs and Labor Hours respectively.

Figures 4.5 and 4.6 display the distribution of MRATES by Assembly for this Major Assembly for PATCO and WMATA respectively. For PATCO, Logic and Low Voltage Control (AEBB00) accounts for 58%, with Performance Modification (AEBB05) and Annunciator (AEBB01) contributing 22% and 12% respectively. Other Assemblies, in total, account for the remaining 7% of maintenance activities against the Logic and

FOUR QUARTER PERIOD BY ASSEMBLY

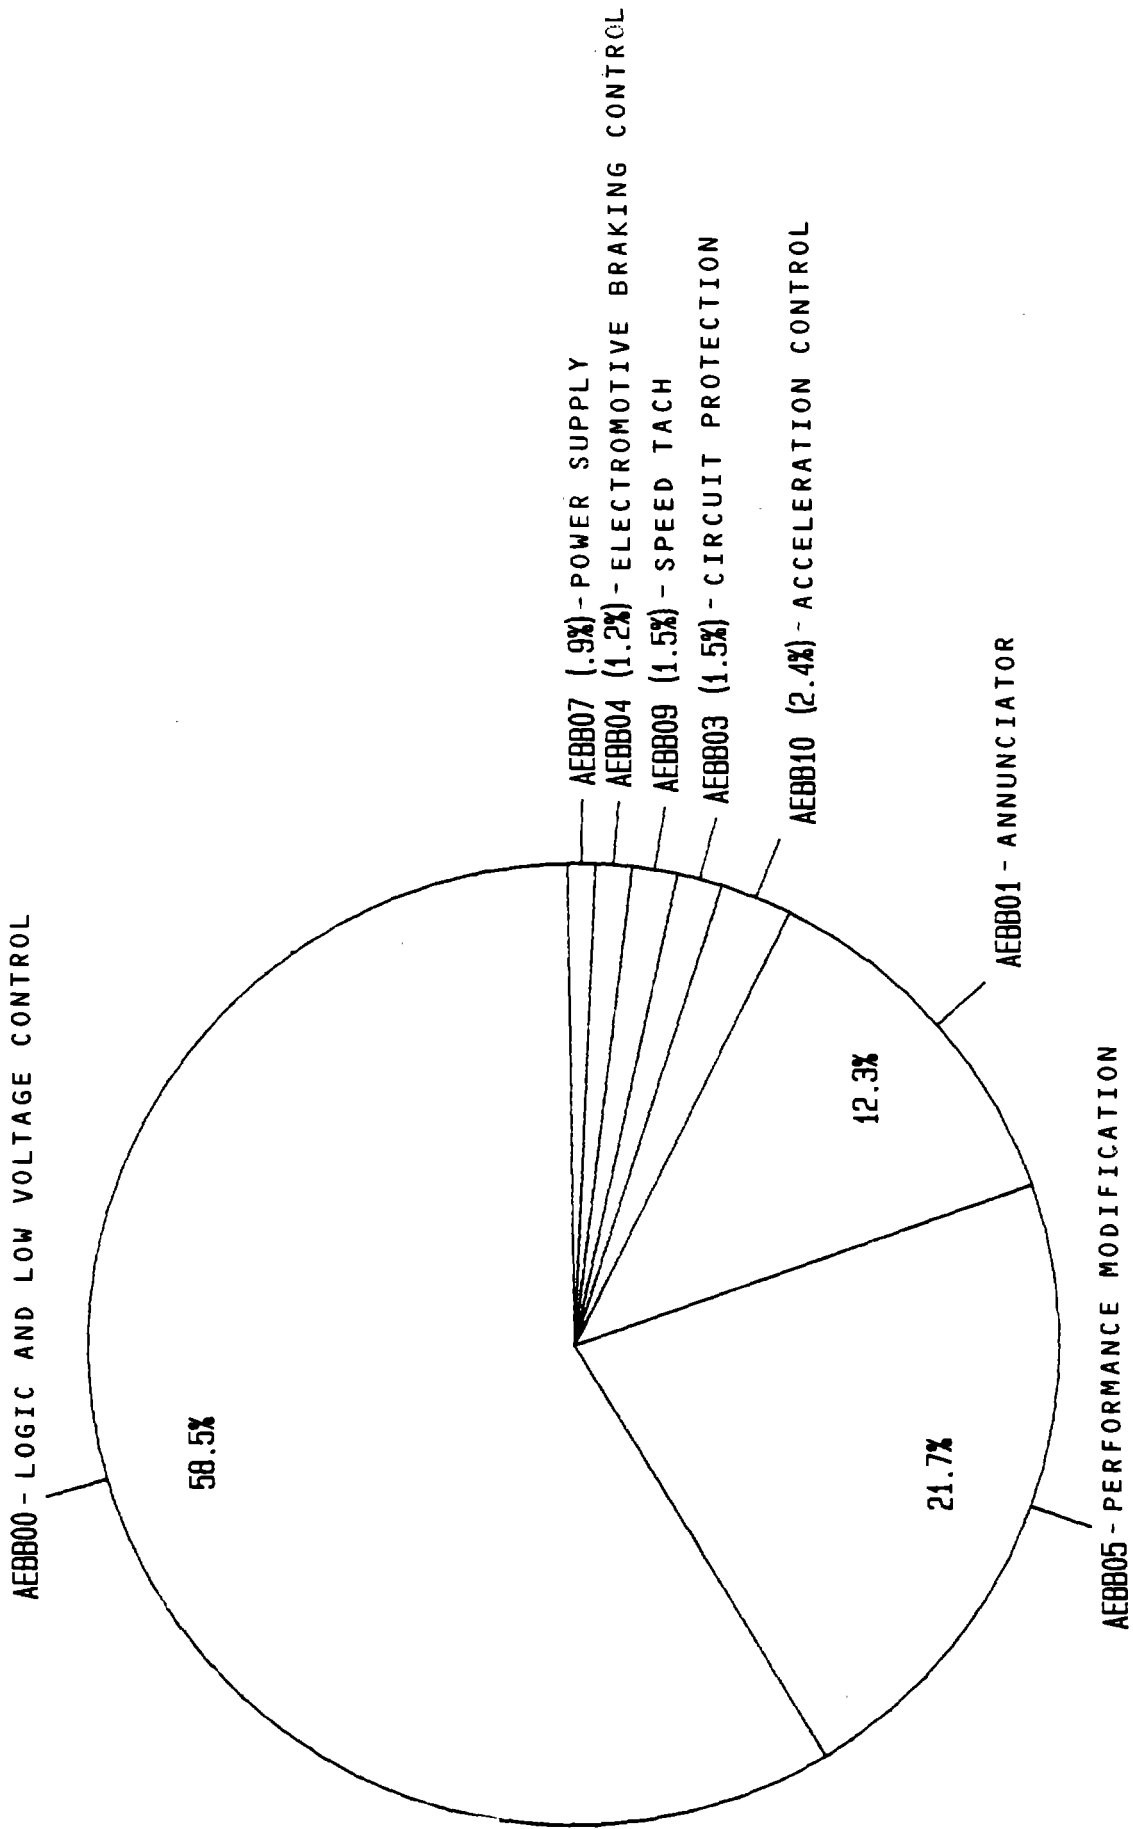


FIGURE 4-5. DISTRIBUTION OF PATCO LOGIC AND LOW-V MAINTENANCE RATES

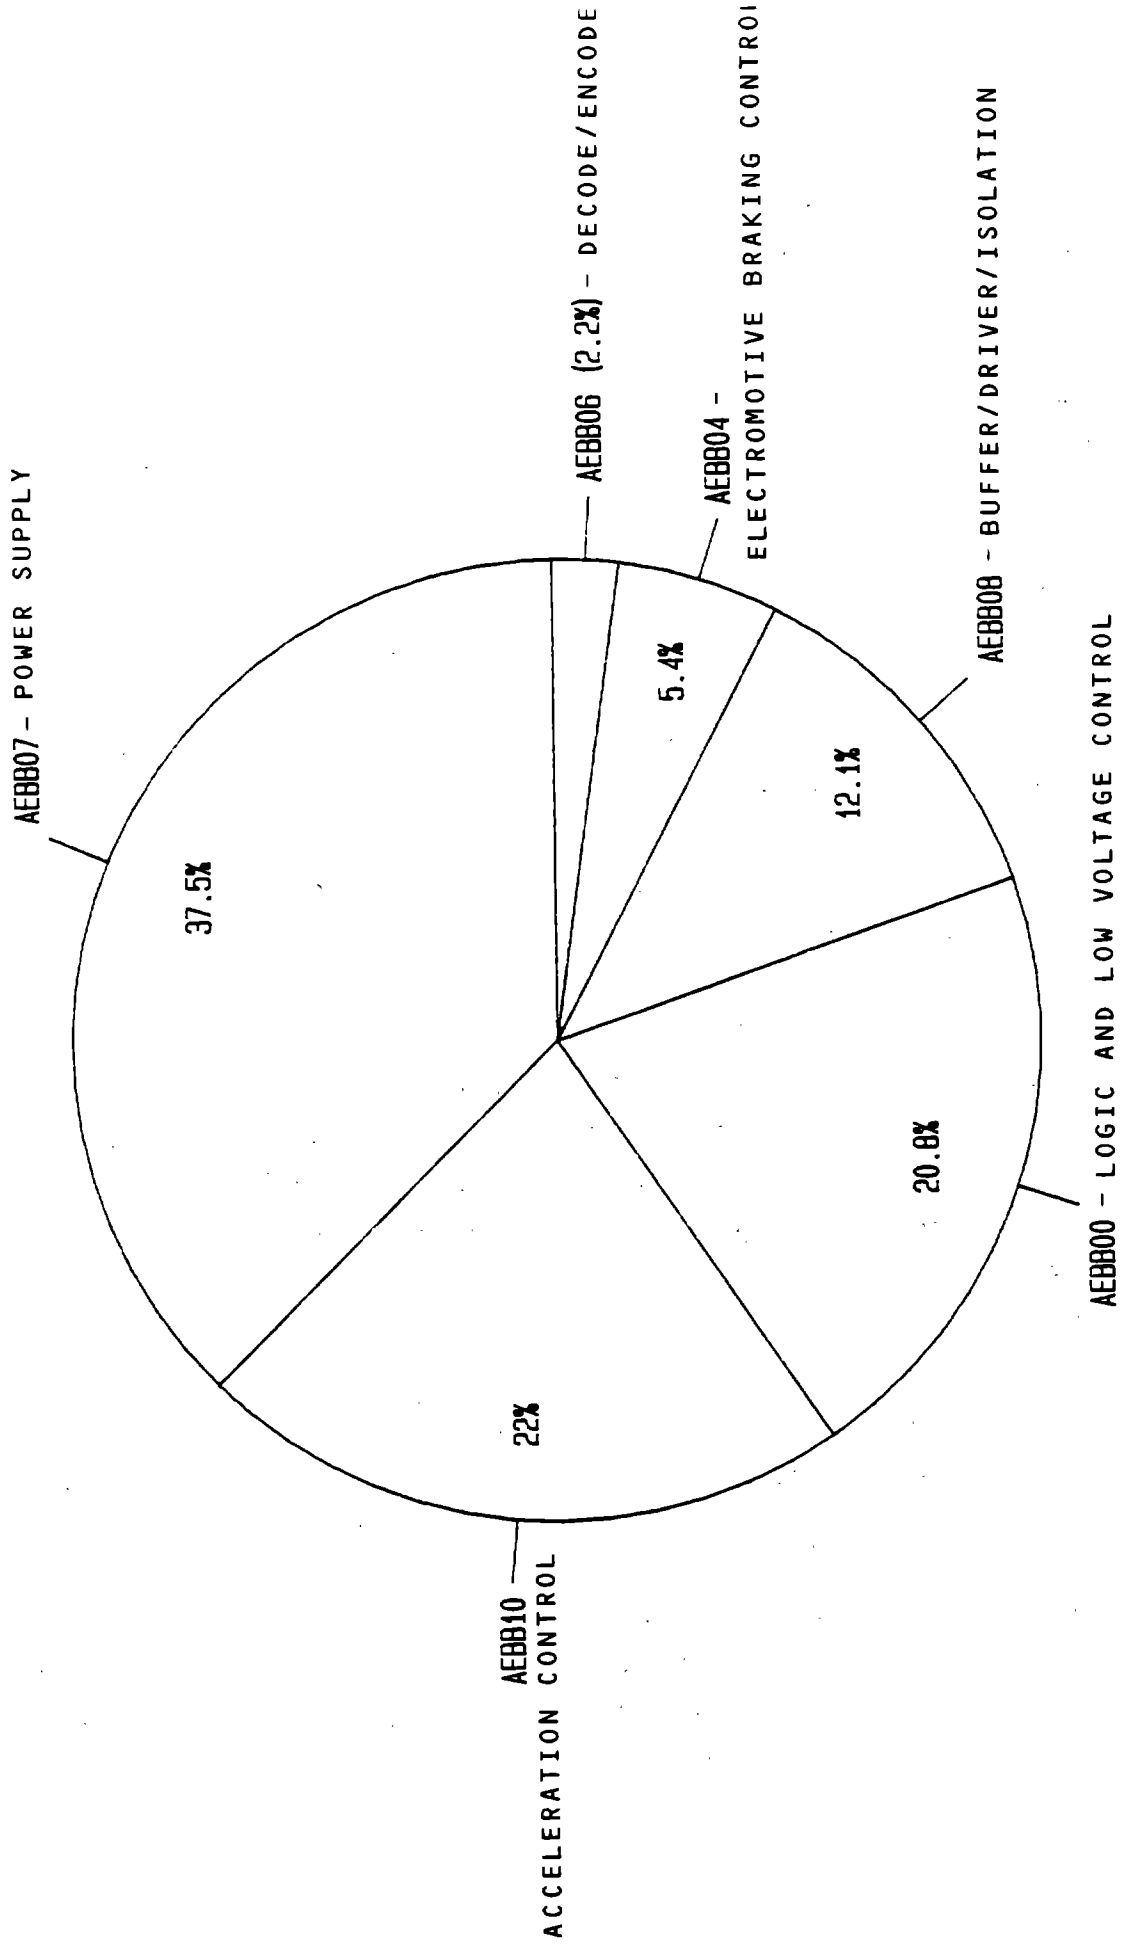


FIGURE 4-6. DISTRIBUTION OF WMATA LOGIC AND LOW-V MAINTENANCE RATES

Low Voltage Major Assembly. These Assembly high-drivers remain constant when looking at LRATES.

For WMATA, the Assembly high-driver within this Major Assembly is Power Supply (AEBB07) accounting for 38%, with Acceleration Control (AEBB10), Logic and Low Voltage Control (AEBB00), and Buffer/Driver/Isolation (AEBB08) contributing 22%, 21%, and 12% respectively. Other Assemblies, in total, account for the remaining 7%. As with PATCO these Assembly high-drivers remain constant when looking at LRATES.

The Assembly high-driver common to both PATCO and WMATA is Logic and Low Voltage Control (AEBB00). This assembly exhibits a lower reliability level at PATCO than at WMATA. PATCO's MRATE is 0.49 versus 0.26 for WMATA. MMBMAs are 20,600 miles for PATCO versus 38,700 for WMATA. This lower reliability level results in a greater Labor Hour expenditure level for PATCO. PATCO's LRATE for this Assembly is 21,500 Labor Hours per 10,000 miles of revenue service operation versus 13,200 for WMATA. Although this Assembly impacts PATCO more than WMATA, PATCO's Labor Hour productivity is slightly higher as demonstrated by a lower MLHTR statistic. PATCO's MLHTR is 4.42 versus 5.11 for WMATA.

The significant components which account for the MACTs and Labor Hour expenditures against this Assembly are as follows: For PATCO, 92% of the MACTs and 89% of the Labor Hours are attributed to two components; for WMATA, three components account for 91% of the MACTs and 92% of the Labor Hours; for PATCO, the "Panel" (UCC=PE) accounts for 81% of the MACTs and 76% of the Labor Hours, while "Relays" (UCC=RU) accounts for 11% (MACT) and 13% (LHRS). Because the

Labor Hour percentage is lower than the MACT percentage for the "Panel" and vice versa for "Relay", the "Panel" exhibits a higher level of maintainability. This conclusion, that the "Panel" exhibits a higher Labor Hour productivity rating than "Relays", is specifically shown by the MLHTR statistics. The MLHTR for "Panel" is 4.17 versus 5.38 for "Relay".

For WMATA, "Hardware" (UCC=HE) accounts for 76% of the MACTs and 77% of the Labor Hours. The "Cradle" (UCC=64) accounts for 9% of the MACTs and Labor Hours, while "PC Board" (UCC=PJ) accounts for 6% of each. Because the MACT percentages and Labor Hour percentages are essentially equal for all three components, the initial conclusion is that they exhibit approximately the same level of maintainability. This is supported by the MLHTR statistics. They are: 5.18 for "Hardware", 5.28 for "Cradle", and 5.34 for "PC Board (card)".

4.3.3 Analysis Summary

This section summarizes the significant findings of data extraction nos. 3 & 4.

The Traction Motor exhibits comparable reliability levels for PATCO and WMATA, but significantly lower maintainability and labor hour productivity levels for PATCO versus WMATA.

Of the identified Major Assembly high-drivers (from data extraction nos. 1 & 2), Power Regulation is the top ranking reliability and maintainability high-driver for PATCO and the least ranking high-driver for WMATA. Although Power Regulation has a greater impact on PATCO's maintenance

function than on WMATA's, the Labor Hour productivity level, as measured by MLHTR, is comparable for both transit authorities. For each authority, different components account for Power Regulation MACTs and Labor Hour expenditures with the Cam-shaft being the high-driver component for PATCO in comparison with the Controller at WMATA.

The Logic and Low Voltage Major Assembly exhibits higher reliability and maintainability levels for PATCO versus WMATA. PATCO's MRATEs and LRATEs are 0.83 and 3.65 respectively versus 1.25 and 4.66 respectively for WMATA. Different Assemblies within this Major Assembly account for the maintenance activity at each authority with one exception. Logic and Low Voltage Control, at the fourth level of GPN indenture (Assembly), exhibits lower reliability and maintainability levels for PATCO versus WMATA. PATCO's MRATEs and LRATEs are 0.49 and 2.15 respectively versus 0.26 and 1.32 respectively for WMATA. Therefore, this Assembly impacts PATCO's maintenance function more than WMATA's, but PATCO's labor hour productivity is higher. PATCO's MLHTR is 4.42 versus 5.11 for WMATA. Different components at each authority account for the majority of the vehicle maintenance activity on the Assembly. For PATCO they are the Panel and Relays. For WMATA they are Hardware, the Cradle, and PC Boards. The following components, although not reliability/maintainability high-drivers, exhibit the lowest labor hour productivity levels within this Assembly. For PATCO: "Support" (UCC=5N) has a MLHTR of 16; and "Shunt" (UCC=SU) has a MLHTR of 13.25. For WMATA: "Resistors" (UCC=RY) has a MLHTR of 6.13; and "Inductor" (UCC=1C) has a MLHTR of 5.64.

The other Assemblies within the Logic and Low Voltage Major Assembly for which there are MACTs for both authorities are:

- Electromotive Braking Control - GPN AE~~BB~~04
- Power Supply - GPN AE~~BB~~07
- Acceleration Control - GPN AE~~BB~~10

Power Supply and Acceleration Control are two of the Assembly high-drivers for WMATA. None of the above assemblies are PATCO high-drivers.

Data extraction no. 4 shows that the productivity levels for PATCO and WMATA are comparable for the Electromotive Braking Control Assembly. PATCO's MLHTR is 2.25 versus 2.29 for WMATA. Two components within this assembly account for the MACTs for each authority. For PATCO they are the "Switch" (UCC=SR) and "PC Board" (UCC=PJ). For WMATA they are "PC Board" and "Relay" (UCC=RU). For the common component, "PC Board", WMATA exhibits a higher level of productivity. WMATA's MLHTR is 2.2 versus 3.0 for PATCO.

"PC Boards" account for all MACTs for both authorities against Power Supply. WMATA exhibits a substantially higher productivity level with a MLHTR of 3.02 versus 7.0 for PATCO.

"PC Boards" also account for the PATCO MACTs against Acceleration Control. "PC Boards", "Relays", and "Transformer" are the three components within this assembly which account for the WMATA MACTs. WMATA's overall productivity level is lower with a MLHTR of 4.26 versus 3.38 for PATCO. WMATA's productivity level for MACATs involving "PC Boards" is lower than PATCO's at 4.38 MLHTR.

4.4 MAINTAINABILITY HIGH-DRIVER BY DEFECT AND REPAIR CODES

4.4.1 Data Extraction Descriptions

These data extractions (nos. 5 & 6), displayed as Appendices E & F, were made to provide additional defect and repair code information on the traction motor assembly (GPN AED000) for each authority. This major assembly has been identified as the least maintainable major assembly for both PATCO and WMATA. Previous analysis has shown that although the motors at each authority exhibit comparable reliability levels, the maintainability levels differ significantly.

Data extraction no. 5 presents four quarter period total statistics for:

- Maintenance Actions (counts)
- Maintenance Rates (MACTS/10,000 miles)
- Labor Hours (counts)
- Labor Rates (Labor Hours/10,000 miles)
- Mean Labor Hours to Repair

The above statistics are presented for each authority by the full GPN (fourth level of indenture), UCC, and Generic Defect Code associated with each GPN/UCC combination.

Data extraction no. 6 presents the same statistics but the Generic Repair Code replaces the Generic Defect Code as the tertiary search key.

4.4.2 Analysis

These data extractions also show that the motor itself (UCC=MR) is the component high-driver within the Traction Motor Assembly. Extraction no. 5 shows that 28% of PATCO's and 30% of WMATA's MACTs against the motor have defect codes in various categories of "No Defect", eg. Component Removed, Programmed Maintenance, Scheduled Modification.

The defect code most prevalent among those which appear for both authorities is "Flashed/Arcing" (D-CODE=DE2A). It accounts for 14.1% of PATCO's and 8.7% of WMATA's MACTs against the motor. The productivity level of PATCO, for MACTs involving this defect code, is significantly lower than WMATA. PATCO's MLHTR is 24.0 versus 4.9 for WMATA. PATCO's LRATE of 1.3 for this defect code is the highest for all D-CODES against the motor, with the exception of "Not Designated" (D-CODE=[]), indicating that this defect accounts for PATCO's greatest maintenance workload concerning the motor.

Data extraction no. 6, which presents the statistics by repair codes, further demonstrates WMATA's higher productivity level in this area. "Removed and Replaced" is the repair code, for the motor of the Traction Motor Assembly, which is most prevalent among those codes which appear for both authorities. It accounts for 73.4% of PATCO's and 20% for WMATA's MACTs against the motor. For these MACTs, WMATA's productivity level is higher with a MLHTR of 4.2 versus 23.8 for PATCO. Although there are other PATCO repair actions with high MLHTR statistics, "Removed and Replaced", with an LRATE of 3.2, accounts for the greatest maintenance workload concerning the motor.

Data extraction nos. 1 & 2 indicate that the Traction Motor Assembly appears to be the least maintainable Major Assembly for WMATA and PATCO. This conclusion is drawn from the higher Labor Hour ranking over the MACT ranking. The above analysis, and the information presented in discussing data extraction nos. 3 & 4 (see Section 4.3.2.1), support extraction nos. 1 & 2 where PATCO's relative LRATE/MACT rankings strongly suggested the traction motor as the least maintainable Major Assembly, while WMATA's relative LRATE/MACT rankings only marginally suggested so.

4.5 MAINTENANCE HIGH-DRIVERS BY DEFECT AND REPAIR CODES

4.5.1 Data Extractions Descriptions

These data extractions (nos. 7, 8, 9 & 10), displayed as Appendices G, H, I & J, were made to provide the same information as data extraction nos. 5 & 6, but for the major assemblies previously identified as the maintenance high-drivers for PATCO and WMATA. Data extraction nos. 7 & 8 present the defect code and repair code break downs for both authorities for the Power Regulation Major Assembly, which has been identified as the PATCO maintenance high-driver. Data extraction nos. 9 & 10 present this information for the Logic and Low Voltage Major Assembly, the WMATA maintenance high-driver.

4.5.2 Analysis

4.5.2.1 Power Regulation

Previous analysis of the Power Regulation Major Assembly (see Section 4.3.2.2) showed that within this Major Assembly, different components comprise the maintenance high-drivers for each authority. This fact is clearly shown in data extraction nos. 7 & 8. When data is presented for one authority, none is presented for the other. These extractions, therefore, are not very useful for a comparative analysis. Such information would be useful to the Maintenance and Engineering Departments of the Authorities to discuss the differences which could lead to improved R&M at both authorities, and for an in-depth authority-specific analysis.

Separate in-depth analyses for each authority are beyond the scope of this report. These data extractions are presented for completeness of this report.

4.5.2.2 Logic and Low Voltage Control

Data extraction nos. 9 & 10 exhibit the same pattern as in extraction nos. 7 & 8, with few exceptions, i.e., where there is data present for one authority, there is none presented for the other. Previous analysis of the Logic and Low Voltage Major Assembly (see Section 4.3.2.3) showed that the assembly high-driver common to both PATCO and WMATA is Logic and Low Voltage Control (AEBB00), and that within this assembly, different components are the high-drivers for each authority. The PATCO component high-drivers within Logic

and Low Voltage Control are the "Panel" and "Relays", while those for WMATA are "Hardware", the "Cradle" and "PC Boards". The components which appear for both authorities are "Switch" (UCC=SR) and "Panel" (UCC=PE).

Data extraction nos. 9 & 10 show that PATCO has a higher overall productivity rating for MACTs involving the "Switch". PATCO's MLHTR is 1.7 versus 3.8 for WMATA. Extraction no. 9 shows no commonality between PATCO and WMATA with respect to Defect Codes for the "Switch". Extraction no. 10, however, shows that most repairs involving this component (all of PATCO's and 50% of WMATA's) is "Removed & Replaced" (R-CODE=RN03). For the specific repair action, "Removed & Replaced", PATCO again has a higher productivity rating with a MLHTR of 1.7 versus 4.4 for WMATA.

For MACTs involving the "Panel", extraction nos. 9 & 10 show that WMATA has a higher productivity rating (MLHTR=1.3) than PATCO (MLHTR=4.2). The only Defect Codes common to both authorities are "Tripped Circuit Breaker" (D-CODE=DE2L) and "Improper Adjustment" (D-CODE=DZ42). For both of these defects, WMATA exhibits higher productivity ratings. The Repair Codes common to both authorities are "Trouble Shooting" (R-CODE=RJ07) and "Removed & Replaced". As with MACTs involving the "Panel" overall and with the above common defects, WMATA's data exhibits a higher productivity rating with regard to these common repair codes. For "Trouble Shooting" WMATA's MLHTR is 1.5 versus 7.6 for PATCO. For "Removed & Replaced" WMATA's MLHTR is 1.1 versus 11.4 for PATCO (PATCO has a higher rating for this repair for the "Switch").

The above discussion highlights some statistics for those components within the Logic and Low Voltage Control Assembly (AEBB00) which appeared for both authorities. Data extraction nos. 9 & 10 also present the statistics for all components, within the Logic and Low Voltage Major Assembly (AEBB--), against which there are MACTs for either authority. As stated in Section 4.5.2.1 this information would be useful, as areas of discussion between the Engineering and Maintenance Departments of the authorities.

SECTION 5 - SUMMARY AND CONCLUSIONS

This section provides a final summary of the various analyses in Section 4, and a discussion of possible reasons for the differences in the statistics.

5.1 GENERAL DISCUSSION

The greatest value of using the TRIP Data Bank in performing such an analysis is in highlighting problem areas and differences between authorities. The reasons for the differences in the statistics should be further investigated in order to pinpoint the specific problem(s) and develop strategies and actions to improve equipment reliability and maintenance productivity.

The reasons for the findings of this analysis may fall into the following areas:

- Equipment:
 - design
 - quality control
 - materials
 - accessibility
 - protection (electrical, mechanical; environmental)

- Maintenance Methods:
 - policies and procedures
 - method of repair
 - personnel assignment - engineering, maintenance
 - training
 - reference material availability - prints, manuals, catalogs

- Resources - logistics of parts and repair equipment

- Facilities:
 - facilities management
 - physical plant - features and layout
 - equipment - type and layout

- Personnel:
 - management
 - supervision
 - qualifications and training
 - contract provisions
 - attitude and morale
 - communications

5.2 DATA ANALYSIS SUMMARY

The Propulsion System total MRATES show that PATCO's is more reliable. PATCO's MRATE is 19% lower than WMATA's. Even though the statistics for PATCO's Propulsion System exhibit a higher level of reliability, PATCO's labor hour expenditures in maintaining the system is relatively higher

than WMATA's. WMATA's LRATE is 20% lower than PATCO's, indicating that WMATA's Propulsion system exhibits a higher level of maintainability and/or WMATA's maintenance program operates at a higher level of productivity. The TRIP Data Bank does not contain the necessary information on maintenance policies and practices to determine the reasons for these statistical findings.

The Major Assemblies, within the Propulsion System, which are the MRATE and LRATE high-drivers for PATCO are:

- Power Regulation: ranks first in both
- Traction Motor Assembly: ranks second in labor hour expenditures and third in MACTs
- Logic and Low Voltage: ranks third in labor hour expenditures and second in MACTs
- High Voltage Switch Gear: ranks last in both

The ranking of these Major Assemblies for WMATA are:

- Logic and Low Voltage: ranks first in both labor hour expenditures and MACTs
- High Voltage Switch Gear: ranks second in both
- Traction Motor Assembly: ranks third in both
- Power Regulation: ranks last in both

The Traction Motor Assembly is the least maintainable of these Major Assemblies, although marginally so for WMATA. PATCO's is more reliable with an MMBMA 30% higher than WMATA's. WMATA's productivity level, however, is higher with a LHRR that is 178% higher than PATCO's. The high-driver component for both authorities is the motor itself within this Major Assembly. PATCO's is more reliable with an MMBMA 18% higher than WMATA's. WMATA's productivity level for the motor, however, is again higher with a LHRR that is 167% higher than PATCO's. For the motor, the defect code which is most prevalent among the codes which appear for both authorities is "Flashed/Arcing". WMATA's productivity level in correcting this defect is higher with a MLHTR that is 80% lower than PATCO's. The repair that is most prevalent, for those which appear for both, is "Removed and Replaced". WMATA's productivity level in accomplishing this repair action on the motor is higher with a MLHTR that is 82% lower than PATCO's.

Power Regulation is the high-driver Major Assembly for PATCO and ranks last for WMATA. Therefore, this Major Assembly creates a greater maintenance load for PATCO than for WMATA. WMATA's MRATE and LRATE are both 82% lower than PATCO's. PATCO's overall productivity level for this Major Assembly is the same as WMATA's. Both authorities exhibit a LHRR of 0.18. Different components account for the Power Regulation MACTs of each authority with the "camshaft" and "camswitch" being the high-driver components for PATCO versus the "cam-controller", "hardware" and "resistors" for WMATA.

The Logic and Low Voltage Major Assembly is the high-driver Major Assembly for WMATA, creating a greater

maintenance load for WMATA than for PATCO. The common Assembly high-driver is Logic and Low Voltage Control. This Assembly exhibits a higher reliability level for WMATA with an MMBMA that is 88% higher than PATCO's. PATCO's productivity level, however, is higher with a LHRR that is 15% higher than WMATA's. Within Logic and Low Voltage Control different components are the high-drivers for each authority. For PATCO they are the "panel" and "relays". For WMATA they are "hardware", the "cradle" and "PC Boards". The contributing components common to both authorities are the "switch" and "panel". For the "switch", PATCO's overall productivity level is higher with a MLHTR that is 55% lower than WMATA's. For the common repair code involving the "switch", "Removed and Replaced", PATCO's productivity level is again higher with a MLHTR that is 61% lower than WMATA's. For the "panel", WMATA's overall productivity level is higher with a MLHTR that is 69% lower than PATCO's. For the common repair codes involving the "panel", "Trouble Shooting", and "Removed and Replaced", WMATA's productivity levels are higher. For "Trouble Shooting" WMATA's MLHTR is 80% lower than PATCO's. For "Removed and Replaced" WMATA's MLHTR is 90% lower than PATCO's.

5.3 EQUIPMENT SUMMARY

An in-depth investigation of the areas listed in Section 5.1 would be necessary to determine the exact reasons for the statistical findings of this analysis. The following sections briefly highlighting some equipment related factors.

5.3.1 Traction Motor

The Traction Motor Assembly has been identified as the least maintainable among the Major Assembly high-drivers. This may be due to the relative inaccessibility of the motor as opposed to other vehicle components. In order to remove a motor, the trucks must first be disconnected and removed from the carbody which involves disconnecting wiring, hoses, truck fastenings and suspension connections between the truck and carbody. Once the truck is removed from the carbody, motor suspension assemblies and gearbox connections must be disconnected to remove the motor from the truck. The same work must then be performed in reverse to re-install the motor into the truck and the truck under the carbody.

PATCO's greater labor expenditure and lower productivity level regarding the traction motor may be attributable to differences in motor and gear box mounting, and truck and suspension connections to the carbody. Due to the nature of the work in removing and replacing a traction motor, tools and equipment, such as hoists, are major factors which could be affecting the productivity levels.

5.3.2 Power Regulation

The maintenance high-driver at PATCO is the pilot motor driven camshaft control. However, WMATA's air piston operated camshaft controller ranks last among its identified Major Assembly high-drivers. This may reflect the fact that PATCO's pilot motor rotates three camshafts through a gearbox while WMATA's Power Regulation consists of two


separate camshafts each driven by an air piston with magnet values and a rack and pinion gear. It should be noted that 96% of the MACTs against PATCO's Power Regulator are attributed to the camshafts. On PATCO's pilot motor camshafts, the notching interlocks are very critical to the proper operation of this type of control.

5.3.3 Logic and Low Voltage

To determine the reasons why this Major Assembly is WMATA's MACT and Labor Hour high-driver would require an in-depth study. Contributing factors might include the overall design of the equipment; quality of components; location of the logic package which could result in the intrusion of conductive dust, or dirt or humidity into the logic compartment; mounting and electrical connector problems; improper heat dissipation; or adjustment problems with interlocks.

APPENDIX A

Data Extraction No. 1 Maintenance Actions



MAINTENANCE ACTIONS PER 100,000 MILES OF REVENUE SERVICE OPERATION

PATCO

| 2Q82 | | 3Q82 | | 4Q82 | | 1Q83 | | TOTAL | |
|-----------|-----------|----------|-----------|-----------|-----------|-------|-------|-------|--------|
| MILEAGES: | 1001157.0 | 964911.0 | 1014728.0 | 1007152.0 | 3987948.0 | | | | |
| GPN : | MACT | MRATE | MACT | MRATE | MACT | MRATE | MACT | MRATE | MACT |
| AEAO : | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| AEAA : | 1.0 | 0.1 | 8.0 | 0.8 | 3.0 | 0.3 | 7.0 | 0.7 | 19.0 |
| AEAC : | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| AEBO : | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| AEBB : | 47.0 | 4.7 | 92.0 | 9.5 | 121.0 | 11.9 | 68.0 | 6.8 | 328.0 |
| AEEC : | 16.0 | 1.6 | 31.0 | 3.2 | 16.0 | 1.6 | 27.0 | 2.7 | 90.0 |
| AEBD : | 99.0 | 9.9 | 162.0 | 16.8 | 291.0 | 28.7 | 117.0 | 11.6 | 669.0 |
| AEDO : | 13.0 | 1.3 | 37.0 | 3.8 | 79.0 | 7.8 | 29.0 | 2.9 | 158.0 |
| AEDA : | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| AEDB : | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| AEDC : | 1.0 | 0.1 | -- | -- | -- | -- | -- | -- | 1.0 |
| AEDD : | 1.0 | 0.1 | -- | -- | -- | -- | -- | -- | 1.0 |
| TOTALS | 178.0 | 17.8 | 330.0 | 34.2 | 510.0 | 50.3 | 248.0 | 24.6 | 1266.0 |
| | | | | | | | | | 31.7 |

WMATA

| 2Q82 | | 3Q82 | | 4Q82 | | 1Q83 | | TOTAL | |
|-----------|-----------|-----------|-----------|-----------|------------|-------|--------|-------|--------|
| MILEAGES: | 4165366.0 | 4165638.0 | 4206663.0 | 3997136.0 | 16534803.0 | | | | |
| GPN : | MACT | MRATE | MACT | MRATE | MACT | MRATE | MACT | MRATE | MACT |
| AEAO : | 13.0 | 0.3 | 9.0 | 0.2 | 8.0 | 0.2 | 4.0 | 0.1 | 34.0 |
| AEAA : | 25.0 | 0.6 | 34.0 | 0.8 | 31.0 | 0.7 | 22.0 | 0.6 | 112.0 |
| AEAC : | 24.0 | 0.6 | 32.0 | 0.8 | 22.0 | 0.5 | 20.0 | 0.5 | 98.0 |
| AEBO : | 328.0 | 7.9 | 323.0 | 7.8 | 238.0 | 5.7 | 146.0 | 3.7 | 1035.0 |
| AEBB : | 683.0 | 16.4 | 607.0 | 14.6 | 427.0 | 10.2 | 328.0 | 8.2 | 2045.0 |
| AEEC : | 504.0 | 12.1 | 539.0 | 12.9 | 379.0 | 9.0 | 254.0 | 6.4 | 1676.0 |
| AEBD : | 124.0 | 3.0 | 186.0 | 4.5 | 122.0 | 2.9 | 68.0 | 1.7 | 500.0 |
| AEDO : | 176.0 | 4.2 | 229.0 | 5.5 | 233.0 | 5.5 | 194.0 | 4.9 | 832.0 |
| AEDA : | 1.0 | 0.0 | 2.0 | 0.0 | 1.0 | 0.0 | -- | -- | 4.0 |
| AEDB : | 15.0 | 0.4 | 18.0 | 0.4 | 22.0 | 0.5 | 14.0 | 0.4 | 69.0 |
| AEDC : | 22.0 | 0.5 | 14.0 | 0.3 | 6.0 | 0.1 | 7.0 | 0.2 | 49.0 |
| AEDD : | 12.0 | 0.3 | 9.0 | 0.2 | 9.0 | 0.2 | 10.0 | 0.3 | 40.0 |
| TOTALS | 1927.0 | 46.3 | 2002.0 | 48.1 | 1498.0 | 35.6 | 1067.0 | 26.7 | 6494.0 |
| | | | | | | | | | 39.3 |

APPENDIX B

Data Extraction No. 2 Labor Hours

PATCO LABOR HOURS PER 100,000 MILES OF REVENUE SERVICE OPERATION

| MILEAGES: | | 2082 | 3082 | 4082 | 1083 | TOTAL | | |
|-----------|----------|-----------|-----------|-----------|--------|-------|----------------------------|-------|
| 1001157.0 | 964911.0 | 1014728.0 | 1007152.0 | 3987948.0 | | | | |
| GPN | LABOR | LRATE | LABOR | LRATE | LABOR | LRATE | GPN DESCRIPTION | |
| AEA0 | -- | -- | -- | -- | -- | -- | MANUAL CONTROLS, T/L | |
| AEA1 | 2.0 | 0.2 | 32.0 | 3.3 | 56.0 | 5.6 | MASTER CONTROLLER | |
| AEA2 | -- | -- | -- | -- | -- | -- | T/L PROPULSION/BRAKING | |
| AEA3 | -- | -- | -- | -- | -- | -- | TRACTIVE EFFORT CONTROLLER | |
| AEA4 | 239.5 | 23.9 | 469.0 | 48.6 | 241.0 | 23.9 | LOGIC AND LO-V CONTROL | |
| AEA5 | 45.0 | 4.5 | 109.0 | 11.3 | 69.0 | 6.9 | HIGH VOLTAGE SWITCH GEAR | |
| AEA6 | 526.5 | 52.6 | 1159.0 | 120.1 | 915.0 | 90.9 | POWER REGULATION | |
| AEA7 | 250.5 | 25.0 | 495.0 | 51.3 | 608.0 | 59.9 | TRACTION MOTOR ASSY | |
| AEA8 | -- | -- | -- | -- | -- | -- | FIELD | |
| AEA9 | -- | -- | -- | -- | -- | -- | ARMATURE ASSY | |
| AEA10 | 4.0 | 0.4 | -- | -- | -- | -- | BRUSHHOLDER ASSY | |
| AEA11 | 2.0 | 0.2 | -- | -- | -- | -- | BRUSH | |
| TOTALS | 1069.5 | 106.8 | 2264.0 | 234.6 | 1793.0 | 178.0 | 7530.5 | 188.8 |

WMATA

| MILEAGES: | | 2082 | 3082 | 4082 | 1083 | TOTAL | | |
|-----------|-----------|-----------|-----------|------------|--------|-------|----------------------------|-------|
| 4165366.0 | 4165638.0 | 4306663.0 | 3997136.0 | 16534803.0 | | | | |
| GPN | LABOR | LRATE | LABOR | LRATE | LABOR | LRATE | GPN DESCRIPTION | |
| AEA0 | 17.6 | 0.4 | 25.3 | 0.6 | 8.0 | 0.2 | MANUAL CONTROLS, T/L | |
| AEA1 | 58.0 | 1.4 | 73.3 | 1.8 | 31.7 | 0.8 | MASTER CONTROLLER | |
| AEA2 | 35.9 | 0.9 | 89.2 | 2.1 | 37.6 | 0.9 | T/L PROPULSION/BRAKING | |
| AEA3 | 768.8 | 18.5 | 1223.6 | 29.4 | 440.6 | 11.0 | TRACTIVE EFFORT CONTROLLER | |
| AEA4 | 2114.7 | 50.8 | 2492.4 | 59.8 | 1337.3 | 33.5 | LOGIC AND LO-V CONTROL | |
| AEA5 | 1627.9 | 39.1 | 2258.4 | 54.2 | 1306.7 | 32.7 | HIGH VOLTAGE SWITCH GEAR | |
| AEA6 | 706.9 | 17.0 | 1132.3 | 27.2 | 426.1 | 10.7 | POWER REGULATION | |
| AEA7 | 757.9 | 18.2 | 947.4 | 22.7 | 852.4 | 21.3 | TRACTION MOTOR ASSY | |
| AEA8 | 1.0 | 0.0 | 6.5 | 0.2 | -- | -- | FIELD | |
| AEA9 | 61.6 | 1.5 | 59.4 | 1.4 | 71.5 | 1.8 | ARMATURE ASSY | |
| AEA10 | 64.6 | 1.6 | 65.6 | 1.6 | 37.8 | 0.9 | BRUSHHOLDER ASSY | |
| AEA11 | 49.4 | 1.2 | 23.6 | 0.6 | 27.7 | 0.7 | BRUSH | |
| TOTALS | 6264.3 | 150.4 | 8397.0 | 201.6 | 4577.4 | 114.5 | 24860.8 | 150.4 |





APPENDIX C

Data Extraction No. 3 Reliability Statistics



RELIABILITY STATISTICS FOR FOUR QUARTER PERIOD

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

PATCO MILES: 3987948.

WMATA MILES: 16534803.

| GPN | UCC | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | MMBMA | | DESCRIPTION |
|--------|-----|---------------------|-------|------------------|-------|--------|--------|-------------------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEB000 | -- | 1044.0 | 0.63 | -- | 0.63 | -- | 1.58 | TRACTIVE EFFORT CONTROLLER |
| AEB000 | 5H | 72.0 | 0.04 | -- | 0.04 | -- | 22.97 | STRAINER |
| AEB000 | 6U | 824.0 | 0.50 | -- | 0.50 | -- | 2.01 | CONTROL |
| AEB000 | HE | 29.0 | 0.02 | -- | 0.02 | -- | 57.02 | HARDWARE |
| AEB000 | RT | 116.0 | 0.07 | -- | 0.07 | -- | 14.25 | REGULATOR |
| AEB000 | RX | 3.0 | 0.00 | -- | 0.00 | -- | 551.16 | RESERVOIR |
| AEB000 | -- | 194.0 | 0.49 | -- | 0.49 | 2.06 | 3.87 | LOGIC AND LO-V CONTROL |
| AEB000 | 00 | 5.0 | 0.01 | -- | 0.01 | 79.76 | -- | NOT DESIGNATED |
| AEB000 | 1C | -- | 0.00 | -- | 0.00 | -- | 236.21 | INDUCTOR |
| AEB000 | 5N | 1.0 | 0.00 | -- | 0.00 | 398.79 | -- | SUPPORT |
| AEB000 | 5R | 3.0 | 0.01 | -- | 0.01 | 132.93 | 91.86 | SWITCH |
| AEB000 | 64 | -- | 0.02 | -- | 0.02 | -- | 42.40 | CRADLE |
| AEB000 | 6R | 3.0 | 0.01 | -- | 0.01 | 132.93 | -- | CONTACT |
| AEB000 | HE | -- | 0.20 | -- | 0.20 | -- | 5.12 | HARDWARE |
| AEB000 | PE | 157.0 | 0.39 | -- | 0.39 | 2.54 | 330.70 | PANEL |
| AEB000 | PJ | -- | 0.02 | -- | 0.02 | -- | 63.60 | PC BOARD (CARD) |
| AEB000 | RU | 21.0 | 0.05 | -- | 0.05 | 18.99 | -- | RELAY |
| AEB000 | RY | -- | 0.00 | -- | 0.00 | -- | 206.69 | RESISTOR |
| AEB000 | SU | 4.0 | 0.01 | -- | 0.01 | 99.70 | -- | SHUNT |
| AEB000 | TX | -- | 0.00 | -- | 0.00 | -- | ***** | TRANSDUCTOR |
| AEB001 | -- | 41.0 | 0.10 | -- | 0.10 | 9.73 | -- | ANNUNCIATOR |
| AEB001 | DF | 41.0 | 0.10 | -- | 0.10 | 9.73 | -- | DETECTOR |
| AEB003 | -- | 5.0 | 0.01 | -- | 0.01 | 79.76 | -- | CIRCUIT PROTECTION |
| AEB003 | PJ | 5.0 | 0.01 | -- | 0.01 | 79.76 | -- | PC BOARD (CARD) |
| AEB004 | -- | 4.0 | 0.07 | -- | 0.07 | 99.70 | 15.03 | ELECTROMOTIVE BRAKING CONTROL |
| AEB004 | 5R | 3.0 | 0.01 | -- | 0.01 | 132.93 | -- | SWITCH |
| AFRB04 | PJ | 1.0 | 0.00 | -- | 0.00 | 398.79 | 15.60 | PC BOARD (CARD) |
| AEBB04 | RU | -- | 0.00 | -- | 0.00 | -- | 413.37 | RELAY |
| AEBB05 | -- | 72.0 | 0.18 | -- | 0.18 | 5.54 | -- | PERFORMANCE MODIFICATION |
| AEBB05 | HT | 2.0 | 0.01 | -- | 0.01 | 199.40 | -- | HOSE |
| AEBB05 | PE | 17.0 | 0.04 | -- | 0.04 | 23.46 | -- | PANEL |
| AEBB05 | PJ | 35.0 | 0.09 | -- | 0.09 | 11.39 | -- | PC BOARD (CARD) |
| AEBB05 | RB | 4.0 | 0.01 | -- | 0.01 | 99.70 | -- | RACK |
| AEBB05 | RU | 2.0 | 0.01 | -- | 0.01 | 199.40 | -- | RELAY |
| AEBB05 | TW | 3.0 | 0.01 | -- | 0.01 | 132.93 | -- | TRANSDUCER |
| AEBB05 | WE | 9.0 | 0.02 | -- | 0.02 | 44.31 | -- | WHEEL |
| AEBB06 | -- | -- | 0.03 | -- | 0.03 | -- | 35.95 | DECODE/ENCODE |
| AEBB06 | PJ | -- | 0.03 | -- | 0.03 | -- | 35.95 | PC BOARD (CARD) |
| AEBB07 | -- | 3.0 | 0.01 | -- | 0.01 | 132.93 | 2.15 | POWER SUPPLY |
| AEBB07 | PJ | 3.0 | 0.01 | -- | 0.01 | 132.93 | 2.15 | PC BOARD (CARD) |
| AEBB08 | -- | -- | 0.15 | -- | 0.15 | -- | 6.67 | BUFFER/DRIVER/ISOLATION |
| AEBB08 | PJ | -- | 0.15 | -- | 0.15 | -- | 6.67 | PC BOARD (CARD) |
| AEBB09 | -- | 5.0 | 0.01 | -- | 0.01 | 79.76 | -- | SPEED/TACH |

RELIABILITY STATISTICS FOR FOUR QUARTER PERIOD

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

PATCO MILES: 3987948.


WMATA MILES: 16534803.

| GPN | UCC | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | MMBMA | | DESCRIPTION |
|--------|-----|---------------------|--------|------------------|-------|--------|--------|--------------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB09 | PJ | 5.0 | -- | 0.01 | -- | 79.76 | ---- | PC BOARD (CARD) |
| AEBB10 | -- | 8.0 | 452.0 | 0.02 | 0.27 | 49.85 | 3.66 | ACCELERATION CONTROL |
| AEBB10 | PJ | 8.0 | 300.0 | 0.02 | 0.18 | 49.85 | 5.51 | PC BOARD (CARD) |
| AEBB10 | RU | -- | 144.0 | -- | 0.09 | ---- | 11.48 | RELAY |
| AEBB10 | TY | -- | 8.0 | -- | 0.00 | ---- | 206.69 | TRANSFORMER |
| AEBB00 | -- | 36.0 | 1237.0 | 0.09 | 0.75 | 11.08 | 1.34 | HIGH VOLTAGE SWITCH GEAR |
| AEBB00 | IJ | 5.0 | -- | 0.01 | -- | 79.76 | ---- | INTERLOCK |
| AEBB00 | 5R | -- | 2.0 | -- | 0.00 | ---- | 826.74 | SWITCH |
| AEBB00 | 6N | -- | 2.0 | -- | 0.00 | ---- | 826.74 | CONNECTOR |
| AEBB00 | 6R | 9.0 | -- | 0.02 | -- | 44.31 | ---- | CONTACT |
| AEBB00 | 6S | 21.0 | 66.0 | 0.05 | 0.04 | 18.99 | 25.05 | CONTACTOR |
| AEBB00 | 6U | -- | 1130.0 | -- | 0.68 | ---- | 1.46 | CONTROL |
| AEBB00 | B2 | -- | 3.0 | -- | 0.00 | ---- | 551.16 | BOX |
| AEBB00 | HB | 1.0 | -- | 0.00 | -- | 398.79 | ---- | HANDLE |
| AEBB00 | HE | -- | 34.0 | -- | 0.02 | ---- | 48.63 | HARDWARE |
| AEBB01 | -- | 18.0 | -- | 0.05 | -- | 22.16 | ---- | BRAKE |
| AEBB01 | 4B | 1.0 | -- | 0.00 | -- | 398.79 | ---- | COIL |
| AEBB01 | 6R | 5.0 | -- | 0.01 | -- | 79.76 | ---- | CONTACT |
| AEBB01 | 6S | 12.0 | -- | 0.03 | -- | 33.23 | ---- | CONTACTOR |
| AEBB02 | -- | 9.0 | 72.0 | 0.02 | 0.04 | 44.31 | 22.97 | FIELD |
| AEBB02 | IJ | 1.0 | -- | 0.00 | -- | 398.79 | ---- | INTERLOCK |
| AEBB02 | 6S | 7.0 | 64.0 | 0.02 | 0.04 | 56.97 | 25.84 | CONTACTOR |
| AEBB02 | MM | 1.0 | -- | 0.00 | -- | 398.79 | ---- | MODULE |
| AEBB02 | RY | -- | 8.0 | -- | 0.00 | ---- | 206.69 | RESISTOR |
| AEBB03 | -- | 1.0 | -- | 0.00 | -- | 398.79 | ---- | GROUND |
| AEBB03 | 6S | 1.0 | -- | 0.00 | -- | 398.79 | ---- | CONTACTOR |
| AEBB04 | -- | 10.0 | 97.0 | 0.03 | 0.06 | 39.88 | 17.05 | LINE |
| AEBB04 | 6R | 2.0 | -- | 0.01 | -- | 199.40 | ---- | CONTACT |
| AEBB04 | 6S | 7.0 | 45.0 | 0.02 | 0.03 | 56.97 | 36.74 | CONTACTOR |
| AEBB04 | AT | 1.0 | -- | 0.00 | -- | 398.79 | ---- | ARM |
| AEBB04 | RU | -- | 152.0 | -- | 0.03 | ---- | 31.80 | RELAY |
| AEBB07 | -- | 11.0 | -- | 0.03 | -- | 36.25 | ---- | PARALLEL |
| AEBB07 | 4B | 1.0 | -- | 0.00 | -- | 398.79 | ---- | COIL |
| AEBB07 | 6R | 1.0 | -- | 0.00 | -- | 398.79 | ---- | CONTACT |
| AEBB07 | 6S | 8.0 | -- | 0.02 | -- | 49.85 | ---- | CONTACTOR |
| AEBB07 | S7 | 1.0 | -- | 0.00 | -- | 398.79 | ---- | SPRING |
| AEBB08 | -- | -- | 40.0 | -- | 0.02 | ---- | 41.34 | POWER BRAKE |
| AEBB08 | 6V | -- | 40.0 | -- | 0.02 | ---- | 41.34 | CONTROLLER |
| AEBB09 | -- | 2.0 | 83.0 | 0.01 | 0.05 | 199.40 | 19.92 | REVERSER |
| AEBB09 | 6S | 2.0 | -- | 0.01 | -- | 199.40 | ---- | CONTACTOR |
| AEBB09 | R2 | -- | 83.0 | -- | 0.05 | ---- | 19.92 | REVERSER |
| AEBB10 | -- | 4.0 | 38.0 | 0.01 | 0.02 | 99.70 | 43.51 | SERIES |
| AEBB10 | 4B | 1.0 | -- | 0.00 | -- | 398.79 | ---- | COIL |

RELIABILITY STATISTICS FOR FOUR QUARTER PERIOD

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | MMBMA | | DESCRIPTION |
|--------|-----|---------------------|--------|------------------|-------|--------|--------|---------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBCL0 | 6S | 3.0 | 38.0 | 0.01 | 0.02 | 132.93 | 43.51 | CONTACTOR |
| AEBCL1 | -- | -- | 113.0 | -- | 0.07 | -- | 14.63 | CIRCUIT PROTECTION |
| AEBCL1 | 6V | -- | 96.0 | -- | 0.06 | -- | 17.22 | CONTROLLER |
| AEBCL1 | FV | -- | 7.0 | -- | 0.00 | -- | 236.21 | FUSE |
| AEBCL1 | HE | -- | 10.0 | -- | 0.01 | -- | 165.35 | HARDWARE |
| AEBD01 | -- | 671.0 | 514.0 | 1.68 | 0.31 | 0.59 | 3.22 | CAM |
| AEBD01 | 1F | -- | 28.0 | -- | 0.02 | -- | 59.05 | INSULATOR |
| AEBD01 | 5N | 1.0 | -- | 0.00 | -- | 398.79 | -- | SUPPORT |
| AEBD01 | 5R | 2.0 | -- | 0.01 | -- | 199.40 | -- | SWITCH |
| AEBD01 | 6P | 6.0 | -- | 0.02 | -- | 66.47 | -- | CONTACT |
| AEBD01 | 6V | -- | 281.0 | -- | 0.17 | -- | 5.88 | CONTROLLER |
| AEBD01 | 9C | 2.0 | -- | 0.01 | -- | 199.40 | -- | GEAR |
| AEBD01 | 9D | 1.0 | -- | 0.00 | -- | 398.79 | -- | GEARBOX |
| AEBD01 | BV | 2.0 | -- | 0.01 | -- | 199.40 | -- | BLOCK |
| AEBD01 | CF | 15.0 | -- | 0.04 | -- | 26.59 | -- | CAM SWITCH |
| AEBD01 | HE | -- | 119.0 | -- | 0.07 | -- | 13.89 | HARDWARE |
| AEBD01 | PJ | 1.0 | -- | 0.00 | -- | 398.79 | -- | PC BOARD (CARD) |
| AEBD01 | R9 | -- | 3.0 | -- | 0.00 | -- | 551.16 | ROD |
| AEBD01 | RY | -- | 83.0 | -- | 0.05 | -- | 19.92 | RESISTOR |
| AEBD01 | SM | 641.0 | -- | 1.61 | -- | 0.62 | -- | SHAFT |
| AED000 | -- | 160.0 | 860.0 | 0.40 | 0.52 | 2.49 | 1.92 | TRACTION MOTOR ASSY |
| AED000 | 62 | -- | 17.0 | -- | 0.01 | -- | 97.26 | COUPLING |
| AED000 | FT | -- | 5.0 | -- | 0.00 | -- | 330.70 | FRAME |
| AED000 | HE | -- | 85.0 | -- | 0.05 | -- | 19.45 | HARDWARE |
| AED000 | HV | 6.0 | -- | 0.02 | -- | 66.47 | -- | HUB |
| AED000 | MR | 154.0 | 753.0 | 0.39 | 0.46 | 2.59 | 2.20 | MOTOR |
| TOTALS | -- | 1254.0 | 6151.0 | 3.14 | 3.72 | 0.32 | 0.27 | ***** |



APPENDIX D

Data Extraction No. 4 Maintainability Statistics

1000

1000

1000

MAINTAINABILITY STATISTICS FOR FOUR QUARTER PERIOD
(INDICIES OF PRODUCTIVITY)
BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

PATCO MILES: 3987948.

WMATA MILES: 16534803.

| GPN | UCC | LABOR HOURS | | LABOR RATE | | MLHTR | | REPAIR RATE | | DESCRIPTION |
|--------|-----|-------------|--------|------------|-------|-------|-------|-------------|-------|-------------------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEB000 | -- | -- | 2914.5 | -- | 1.76 | -- | 2.79 | -- | 0.36 | TRACTIVE EFFORT CONTROLLER |
| AEB000 | 5H | -- | 51.6 | -- | 0.03 | -- | 0.72 | -- | 1.40 | STRAINER |
| AEB000 | 6U | -- | 1926.5 | -- | 1.17 | -- | 2.34 | -- | 0.43 | CONTROL |
| AEB000 | HE | -- | 41.9 | -- | 0.03 | -- | 1.44 | -- | 0.69 | HARDWARE |
| AEB000 | RT | -- | 890.3 | -- | 0.54 | -- | 7.68 | -- | 0.13 | REGULATOR |
| AEB000 | RX | -- | 4.2 | -- | 0.00 | -- | 1.40 | -- | 0.71 | RESERVOIR |
| AEB000 | -- | 858.0 | 2181.8 | 2.15 | 1.32 | 4.42 | 5.11 | 0.23 | 0.20 | LOGIC AND LO-V CONTROL |
| AEB000 | 00 | 9.0 | -- | 0.02 | -- | 1.80 | -- | 0.56 | -- | NOT DESIGNATED |
| AEB000 | 1C | -- | 39.5 | -- | 0.02 | -- | 5.64 | -- | 0.18 | INDUCTOR |
| AEB000 | 5N | 16.0 | -- | 0.04 | -- | 16.00 | -- | 0.06 | -- | SUPPORT |
| AEB000 | 5R | 5.0 | 67.6 | 0.01 | 0.04 | 1.67 | 3.76 | 0.60 | 0.27 | SWITCH |
| AEB000 | 64 | -- | 206.1 | -- | 0.12 | -- | 5.28 | -- | 0.19 | CRADLE |
| AEB000 | 6R | 8.0 | -- | 0.02 | -- | 2.67 | -- | 0.38 | -- | CONTACT |
| AEB000 | HE | -- | 1673.0 | -- | 1.01 | -- | 5.18 | -- | 0.19 | HARDWARE |
| AEB000 | PE | 654.0 | 6.3 | 1.64 | 0.00 | 4.17 | 1.26 | 0.24 | 0.79 | PANEL |
| AEB000 | PJ | -- | 138.8 | -- | 0.08 | -- | 5.34 | -- | 0.19 | PC BOARD (CARD) |
| AEB000 | RU | 113.0 | -- | 0.28 | -- | 5.38 | -- | 0.19 | -- | RELAY |
| AEB000 | RY | -- | 49.0 | -- | 0.03 | -- | 6.13 | -- | 0.16 | RESISTOR |
| AEB000 | SU | 53.0 | -- | 0.13 | -- | 13.25 | -- | 0.08 | -- | SHUNT |
| AEB000 | TX | -- | 1.5 | -- | 0.00 | -- | 1.50 | -- | 0.67 | TRANSDUCTOR |
| AEB001 | -- | 101.0 | -- | 0.25 | -- | 2.46 | -- | 0.41 | -- | ANNUNCIATOR |
| AEB001 | DF | 101.0 | -- | 0.25 | -- | 2.46 | -- | 0.41 | -- | DETECTOR |
| AEB003 | -- | 4.0 | -- | 0.01 | -- | 0.80 | -- | 1.25 | -- | CIRCUIT PROTECTION |
| AEB003 | PJ | 4.0 | -- | 0.01 | -- | 0.80 | -- | 1.25 | -- | PC BOARD (CARD) |
| AEB004 | -- | 9.0 | 251.7 | 0.02 | 0.15 | 2.25 | 2.29 | 0.44 | 0.44 | ELECTROMOTIVE BRAKING CONTROL |
| AEB004 | 5R | 6.0 | -- | 0.02 | -- | 2.00 | -- | 0.50 | -- | SWITCH |
| AEB004 | PJ | 3.0 | 233.0 | 0.01 | 0.14 | 3.00 | 2.20 | 0.33 | 0.45 | PC BOARD (CARD) |
| AEB004 | RU | -- | 18.7 | -- | 0.01 | -- | 4.68 | -- | 0.21 | RELAY |
| AEB005 | -- | 409.5 | -- | 1.03 | -- | 5.69 | -- | 0.18 | -- | PERFORMANCE MODIFICATION |
| AEB005 | HT | 18.0 | -- | 0.05 | -- | 9.00 | -- | 0.11 | -- | HOSE |
| AEB005 | PE | 78.0 | -- | 0.20 | -- | 4.59 | -- | 0.22 | -- | PANEL |
| AEB005 | PJ | 151.5 | -- | 0.38 | -- | 4.33 | -- | 0.23 | -- | PC BOARD (CARD) |
| AEB005 | RB | 61.0 | -- | 0.15 | -- | 15.25 | -- | 0.07 | -- | RACK |
| AEB005 | RU | 8.0 | -- | 0.02 | -- | 4.00 | -- | 0.25 | -- | RELAY |
| AEB005 | TW | 20.0 | -- | 0.05 | -- | 6.67 | -- | 0.15 | -- | TRANSUDER |
| AEB005 | WE | 73.0 | -- | 0.18 | -- | 8.11 | -- | 0.12 | -- | WHEEL |
| AEB006 | -- | -- | 149.9 | -- | 0.09 | -- | 3.26 | -- | 0.31 | DECODE/ENCODE |
| AEB006 | PJ | -- | 149.9 | -- | 0.09 | -- | 3.26 | -- | 0.31 | PC BOARD (CARD) |
| AEB007 | -- | 21.0 | 2323.5 | 0.05 | 1.41 | 7.00 | 3.02 | 0.14 | 0.33 | POWER SUPPLY |
| AEB007 | PJ | 21.0 | 2323.5 | 0.05 | 1.41 | 7.00 | 3.02 | 0.14 | 0.33 | PC BOARD (CARD) |
| AEB008 | -- | -- | 877.5 | -- | 0.53 | -- | 3.54 | -- | 0.28 | BUFFER/DRIVER/ISOLATION |
| AEB008 | PJ | -- | 877.5 | -- | 0.53 | -- | 3.54 | -- | 0.28 | PC BOARD (CARD) |
| AEB009 | -- | 29.0 | -- | 0.07 | -- | 5.80 | -- | 0.17 | -- | SPEED/TACH |

MAINTAINABILITY STATISTICS FOR FOUR QUARTER PERIOD
 (INDICIES OF PRODUCTIVITY)
 BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

PATCO MILES: 3987948.


WMATA MILES: 16534803.

| GPN | UCC | LABOR HOURS | | LABOR RATE | | MLHTR | | REPAIR RATE | | DESCRIPTION |
|--------|-----|-------------|--------|------------|-------|-------|-------|-------------|-----------|--------------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | (L/MLHTR) | GPN / UCC | |
| AEBB09 | PJ | 29.0 | -- | 0.07 | -- | 5.80 | -- | 0.17 | -- | PC BOARD (CARD) |
| AEBB10 | -- | 27.0 | 1925.1 | 0.07 | 1.16 | 3.38 | 4.26 | 0.30 | 0.23 | ACCELERATION CONTROL |
| AEBB10 | PJ | 27.0 | 1313.4 | 0.07 | 0.79 | 3.38 | 4.38 | 0.30 | 0.23 | PC BOARD (CARD) |
| AEBB10 | RU | -- | 546.2 | -- | 0.33 | -- | 3.79 | -- | 0.26 | RELAY |
| AEBB10 | TY | -- | 65.5 | -- | 0.04 | -- | 8.19 | -- | 0.12 | TRANSFORMER |
| AEBB00 | -- | 112.0 | 4729.7 | 0.28 | 2.86 | 3.11 | 3.82 | 0.32 | 0.26 | HIGH VOLTAGE SWITCH GEAR |
| AEBB00 | IJ | 17.0 | -- | 0.04 | -- | 3.40 | -- | 0.29 | -- | INTERLOCK |
| AEBB00 | 5R | -- | 3.2 | -- | 0.00 | -- | 1.60 | -- | 0.63 | SWITCH |
| AEBB00 | 6N | -- | 0.4 | -- | 0.00 | -- | 0.20 | -- | 5.00 | CONNECTOR |
| AEBB00 | 6R | 16.0 | -- | 0.04 | -- | 1.78 | -- | 0.56 | -- | CONTACT |
| AEBB00 | 6S | 78.0 | 212.0 | 0.20 | 0.13 | 3.71 | 3.21 | 0.27 | 0.31 | CONTACTOR |
| AEBB00 | 6U | -- | 4462.4 | -- | 2.70 | -- | 3.95 | -- | 0.25 | CONTROL |
| AEBB00 | B2 | -- | 7.8 | -- | 0.00 | -- | 2.60 | -- | 0.38 | BOX |
| AEBB00 | HB | 1.0 | -- | 0.00 | -- | 1.00 | -- | 1.00 | -- | HANDLE |
| AEBB00 | HE | -- | 43.9 | -- | 0.03 | -- | 1.29 | -- | 0.77 | HARDWARE |
| AEBB01 | -- | 37.0 | -- | 0.09 | -- | 2.06 | -- | 0.49 | -- | BRAKE |
| AEBB01 | 4B | 3.0 | -- | 0.01 | -- | 3.00 | -- | 0.33 | -- | COIL |
| AEBB01 | 6R | 4.0 | -- | 0.01 | -- | 0.80 | -- | 1.25 | -- | CONTACT |
| AEBB01 | 6S | 30.0 | -- | 0.08 | -- | 2.50 | -- | 0.40 | -- | CONTACTOR |
| AEBB02 | -- | 43.0 | 288.7 | 0.11 | 0.17 | 4.78 | 4.01 | 0.21 | 0.25 | FIELD |
| AEBB02 | IJ | 3.0 | -- | 0.01 | -- | 3.00 | -- | 0.33 | -- | INTERLOCK |
| AEBB02 | 6S | 36.0 | 261.9 | 0.09 | 0.16 | 5.14 | 4.09 | 0.19 | 0.24 | CONTACTOR |
| AEBB02 | MM | 4.0 | -- | 0.01 | -- | 4.00 | -- | 0.25 | -- | MODULE |
| AEBB02 | RY | -- | 26.8 | -- | 0.02 | -- | 3.35 | -- | 0.30 | RESISTOR |
| AEBB03 | -- | 1.0 | -- | 0.00 | -- | 1.00 | -- | 1.00 | -- | GROUND |
| AEBB03 | 6S | 1.0 | -- | 0.00 | -- | 1.00 | -- | 1.00 | -- | CONTACTOR |
| AEBB04 | -- | 27.0 | 309.3 | 0.07 | 0.19 | 2.70 | 3.19 | 0.37 | 0.31 | LINE |
| AEBB04 | 6R | 4.0 | -- | 0.01 | -- | 2.00 | -- | 0.50 | -- | CONTACT |
| AEBB04 | 6S | 19.0 | 171.7 | 0.05 | 0.10 | 2.71 | 3.82 | 0.37 | 0.26 | CONTACTOR |
| AEBB04 | AT | 4.0 | -- | 0.01 | -- | 4.00 | -- | 0.25 | -- | ARM |
| AEBB04 | RU | -- | 137.6 | -- | 0.08 | -- | 2.65 | -- | 0.38 | RELAY |
| AEBB07 | -- | 39.0 | -- | 0.10 | -- | 3.55 | -- | 0.28 | -- | PARALLEL |
| AEBB07 | 4B | 8.0 | -- | 0.02 | -- | 8.00 | -- | 0.13 | -- | COIL |
| AEBB07 | 6R | 2.0 | -- | 0.01 | -- | 2.00 | -- | 0.50 | -- | CONTACT |
| AEBB07 | 6S | 21.0 | -- | 0.05 | -- | 2.63 | -- | 0.38 | -- | CONTACTOR |
| AEBB07 | S7 | 8.0 | -- | 0.02 | -- | 8.00 | -- | 0.13 | -- | SPRING |
| AEBB08 | -- | -- | 178.4 | -- | 0.11 | -- | 4.46 | -- | 0.22 | POWER BRAKE |
| AEBB08 | 6V | -- | 178.4 | -- | 0.11 | -- | 4.46 | -- | 0.22 | CONTROLLER |
| AEBB09 | -- | 4.0 | 412.9 | 0.01 | 0.25 | 2.00 | 4.97 | 0.50 | 0.20 | REVERSER |
| AEBB09 | 6S | 4.0 | -- | 0.01 | -- | 2.00 | -- | 0.50 | -- | CONTACTOR |
| AEBB09 | R2 | -- | 412.9 | -- | 0.25 | -- | 4.97 | -- | 0.20 | REVERSER |
| AEBB10 | -- | 12.0 | 220.7 | 0.03 | 0.13 | 3.00 | 5.81 | 0.33 | 0.17 | SERIES |
| AEBB10 | 4B | 1.0 | -- | 0.00 | -- | 1.00 | -- | 1.00 | -- | COIL |

MAINTAINABILITY STATISTICS FOR FOUR QUARTER PERIOD
 (INDICES OF PRODUCTIVITY)
 BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

PATCO MILES: 3987948. WMATA MILES: 16534803.

| GPN | UCC | LABOR HOURS | | LABOR RATE | | MLHTR | | REPAIR RATE | | DESCRIPTION |
|--------|-----|-------------|---------|------------|-------|-------|-------|-------------|-------|---------------------|
| | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBD01 | 6S | 11.0 | 220.7 | 0.03 | 0.13 | 3.67 | 5.81 | 0.27 | 0.17 | CONTRACTOR |
| AEBD01 | 6T | --- | 678.6 | --- | 0.41 | --- | 6.01 | --- | 0.17 | CIRCUIT PROTECTION |
| AEBD01 | 6V | --- | 647.3 | --- | 0.39 | --- | 6.74 | --- | 0.15 | CONTROLLER |
| AEBD01 | 6W | --- | 20.3 | --- | 0.01 | --- | 2.90 | --- | 0.34 | FUSE |
| AEBD01 | 6X | --- | 11.0 | --- | 0.01 | --- | 1.10 | --- | 0.91 | HARDWARE |
| AEBD01 | 6Y | 3830.5 | 2872.3 | 9.61 | 1.74 | 5.71 | 5.59 | 0.18 | 0.18 | CAM |
| AEBD01 | 1F | --- | 130.8 | --- | 0.08 | --- | 4.67 | --- | 0.21 | INSULATOR |
| AEBD01 | 5N | 16.0 | --- | 0.04 | --- | 16.00 | --- | 0.06 | --- | SUPPORT |
| AEBD01 | 5R | 30.0 | --- | 0.08 | --- | 15.00 | --- | 0.07 | --- | SWITCH |
| AEBD01 | 6R | 28.0 | --- | 0.07 | --- | 4.67 | --- | 0.21 | --- | CONTACT |
| AEBD01 | 6V | --- | 1403.9 | --- | 0.85 | --- | 5.00 | --- | 0.20 | CONTROLLER |
| AEBD01 | 9C | 14.0 | --- | 0.04 | --- | 7.00 | --- | 0.14 | --- | GEAR |
| AEBD01 | 9D | --- | --- | --- | --- | --- | --- | --- | --- | GEARBOX |
| AEBD01 | BV | 17.0 | --- | 0.04 | --- | 8.50 | --- | 0.12 | --- | BLOCK |
| AEBD01 | CF | 108.0 | --- | 0.27 | --- | 7.20 | --- | 0.14 | --- | CAM SWITCH |
| AEBD01 | HE | --- | 787.9 | --- | 0.48 | --- | 6.62 | --- | 0.15 | HARDWARE |
| AEBD01 | PJ | 22.0 | --- | 0.06 | --- | 22.00 | --- | 0.05 | --- | PC BOARD (CARD) |
| AEBD01 | R9 | --- | 16.2 | --- | 0.01 | --- | 5.40 | --- | 0.19 | ROD |
| AEBD01 | RY | --- | 533.5 | --- | 0.32 | --- | 6.43 | --- | 0.16 | RESISTOR |
| AEBD01 | SM | 3595.5 | --- | 9.02 | --- | 5.61 | --- | 0.18 | --- | SHAFT |
| AED000 | --- | 1865.5 | 3443.7 | 4.68 | 2.08 | 11.66 | 4.00 | 0.09 | 0.25 | TRACTION MOTOR ASSY |
| AED000 | 62 | --- | 35.0 | --- | 0.02 | --- | 2.06 | --- | 0.49 | COUPLING |
| AED000 | FT | --- | 21.2 | --- | 0.01 | --- | 4.24 | --- | 0.24 | FRAME |
| AED000 | HE | --- | 218.4 | --- | 0.13 | --- | 2.57 | --- | 0.39 | HARDWARE |
| AED000 | HV | 113.0 | --- | 0.28 | --- | 18.83 | --- | 0.05 | --- | HUB |
| AED000 | MR | 1752.5 | 3169.1 | 4.39 | 1.92 | 11.38 | 4.21 | 0.09 | 0.24 | MOTOR |
| TOTALS | --- | 7429.5 | 23758.3 | 18.63 | 14.37 | 5.92 | 3.86 | 0.17 | 0.26 | ***** |



APPENDIX E

Data Extraction No. 5

Traction Motor Assembly By Defect Code

MAINTAINABILITY HIGH-DRIVER BY DEFECT CODE

TRACTION MOTOR ASSEMBLY
(AED000)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|--------|------------------|-------|-------------|--------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AED000 | -- | ---- | 162.0 | 1079.0 | 0.4 | 0.7 | 1865.5 | 3443.7 | 4.7 | 2.1 | 11.5 | 3.2 | TRACTION MOTOR ASSY |
| AED000 | 62 | DM13 | -- | 18.0 | -- | 0.0 | -- | 35.0 | -- | 0.0 | -- | 1.9 | COUPLING |
| AED000 | 62 | DM23 | -- | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 2.0 | BROKEN/SHEARED |
| AED000 | 62 | DM5B | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | DIRTY |
| AED000 | 62 | DM5B | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | WORN |
| AED000 | 62 | DN33 | -- | 5.0 | -- | 0.0 | -- | 12.5 | -- | 0.0 | -- | 2.5 | NO DEFECT, SCHED MOD |
| AED000 | 62 | DZ19 | -- | 9.0 | -- | 0.0 | -- | 14.5 | -- | 0.0 | -- | 1.6 | REM FOR OTHER MAINT A |
| AED000 | FT | ---- | -- | 5.0 | -- | 0.0 | -- | 21.2 | -- | 0.0 | -- | 4.2 | FRAME |
| AED000 | FT | DD28 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.5 | LEAKING |
| AED000 | FT | DE67 | -- | 1.0 | -- | 0.0 | -- | 15.0 | -- | 0.0 | -- | 15.0 | INCORRECT CURRENT |
| AED000 | FT | DE73 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | SHORTED |
| AED000 | FT | DS26 | -- | 1.0 | -- | 0.0 | -- | 0.2 | -- | 0.0 | -- | 0.2 | FAILS TO OPERATE |
| AED000 | FT | DZ19 | -- | 1.0 | -- | 0.0 | -- | 2.5 | -- | 0.0 | -- | 2.5 | REM FOR OTHER MAINT A |
| AED000 | HE | ---- | -- | 90.0 | -- | 0.1 | -- | 218.4 | -- | 0.1 | -- | 2.4 | HARDWARE |
| AED000 | HE | DD28 | -- | 4.0 | -- | 0.0 | -- | 2.2 | -- | 0.0 | -- | 0.5 | LEAKING |
| AED000 | HE | DD2A | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | 0.3 | PUNCTURED |
| AED000 | HE | DD2B | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | TORN |
| AED000 | HE | DE21 | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | 0.3 | BURNED CONTACT |
| AED000 | HE | DE2A | -- | 6.0 | -- | 0.0 | -- | 18.5 | -- | 0.0 | -- | 3.1 | FLASHED/ARCING |
| AED000 | HE | DE46 | -- | 1.0 | -- | 0.0 | -- | 7.5 | -- | 0.0 | -- | 7.5 | OUT OF ROUND |
| AED000 | HE | DE48 | -- | 1.0 | -- | 0.0 | -- | 10.5 | -- | 0.0 | -- | 10.5 | OVERLOADED MOTOR |
| AED000 | HE | DE51 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | BLOWN FUSE |
| AED000 | HE | DE54 | -- | 6.0 | -- | 0.0 | -- | 18.7 | -- | 0.0 | -- | 3.1 | OPEN CIRCUIT |
| AED000 | HE | DE69 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.5 | INCORRECT SIGNAL |
| AED000 | HE | DE71 | -- | 1.0 | -- | 0.0 | -- | 2.5 | -- | 0.0 | -- | 2.5 | CHANGE OF VALUE |
| AED000 | HE | DE73 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | SHORTED |
| AED000 | HE | DM13 | -- | 17.0 | -- | 0.0 | -- | 56.1 | -- | 0.0 | -- | 3.3 | BROKEN/SHEARED |
| AED000 | HE | DM14 | -- | 3.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 1.0 | CRACKED |
| AED000 | HE | DM23 | -- | 1.0 | -- | 0.0 | -- | 0.2 | -- | 0.0 | -- | 0.2 | DIRTY |
| AED000 | HE | DM32 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | DEFECTIVE BEARING |
| AED000 | HE | DM3A | -- | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | ROUGH/SCORED |
| AED000 | HE | DM41 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | BENT/BUCKLED/DENTED |
| AED000 | HE | DM53 | -- | 3.0 | -- | 0.0 | -- | 1.6 | -- | 0.0 | -- | 0.5 | LOOSE |
| AED000 | HE | DM55 | -- | 15.0 | -- | 0.0 | -- | 7.9 | -- | 0.0 | -- | 0.5 | LOST/MISSING |
| AED000 | HE | DM59 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 1.0 | WORN HOLES/OVERSIDED |
| AED000 | HE | DM5B | -- | 4.0 | -- | 0.0 | -- | 8.5 | -- | 0.0 | -- | 2.1 | WORN |
| AED000 | HE | DM5C | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | WORN BEYOND LIMITS |
| AED000 | HE | DM72 | -- | 5.0 | -- | 0.0 | -- | 34.2 | -- | 0.0 | -- | 6.8 | BURNED |
| AED000 | HE | DN12 | -- | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | NO DEFECT NOTED |
| AED000 | HE | DN32 | -- | 1.0 | -- | 0.0 | -- | 3.3 | -- | 0.0 | -- | 0.8 | NO DEFECT, PROG MAINT |
| AED000 | HE | DN33 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | NO DEFECT, SCHED MOD |
| AED000 | HE | DZ19 | -- | 3.0 | -- | 0.0 | -- | 9.5 | -- | 0.0 | -- | 3.2 | REM FOR OTHER MAINT A |

MAINTAINABILITY HIGH-DRIVER BY DEFECT CODE

TRACTION MOTOR ASSEMBLY
(AED000)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION


| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-----------------------|------------|-------|-------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AED000 | HE | DZ42 | 2.0 | 0.0 | 2.1 | 0.0 | 1.0 | IMPROPER ADJUSTMENT | | | | |
| AED000 | HV | ---- | 6.0 | 0.0 | 113.0 | 0.3 | 18.8 | HUD | | | | |
| AED000 | HV | DM5B | 5.0 | 0.0 | 105.0 | 0.3 | 21.0 | WORN | | | | |
| AED000 | HV | [] | 1.0 | 0.0 | 8.0 | 0.0 | 8.0 | NOT DESIGNATED | | | | |
| AED000 | MR | ---- | 156.0 | 0.4 | 1752.5 | 4.4 | 11.2 | MOTOR | | | | |
| AED000 | MR | DC12 | 1.0 | 0.0 | 2.0 | 0.0 | 2.0 | MOISTURE PRESENT | | | | |
| AED000 | MR | DC22 | 2.0 | 0.0 | 4.0 | 0.0 | 2.0 | FROZEN | | | | |
| AED000 | MR | DC23 | 1.0 | 0.0 | 0.5 | 0.0 | 0.5 | PITTED | | | | |
| AED000 | MR | DD21 | 1.0 | 0.0 | 6.0 | 0.0 | 6.0 | CUT | | | | |
| AED000 | MR | DD24 | 3.0 | 0.0 | 10.2 | 0.0 | 3.4 | DESTROYED | | | | |
| AED000 | MR | DD26 | 1.0 | 0.0 | 0.2 | 0.0 | 0.2 | FOREIGN OBJECT DAMAGE | | | | |
| AED000 | MR | DD28 | 4.0 | 0.0 | 7.1 | 0.0 | 1.8 | LEAKING | | | | |
| AED000 | MR | DE14 | 2.0 | 0.0 | 5.5 | 0.0 | 2.8 | LOOSE CONNECTION | | | | |
| AED000 | MR | DE2A | 84.0 | 0.1 | 527.0 | 1.3 | 24.0 | FLASHED/ARCING | | | | |
| AED000 | MR | DE2B | 5.0 | 0.0 | 15.0 | 0.0 | 3.0 | INSULATION BREAKDOWN | | | | |
| AED000 | MR | DE2F | 7.0 | 0.0 | 171.0 | 0.4 | 24.4 | MISC ELECT TROUBLE | | | | |
| AED000 | MR | DE2K | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | TRIPPED | | | | |
| AED000 | MR | DE41 | 16.0 | 0.0 | 25.0 | 0.0 | 5.0 | TRIPPED CKT BREAKER | | | | |
| AED000 | MR | DE42 | 10.0 | 0.0 | 40.3 | 0.0 | 2.5 | DAMAGED ARMATURE | | | | |
| AED000 | MR | DE44 | 1.0 | 0.0 | 26.9 | 0.0 | 2.7 | DAMAGED COMMUTATOR | | | | |
| AED000 | MR | DE46 | 212.0 | 0.1 | 13.0 | 0.0 | 13.0 | LOW MICA | | | | |
| AED000 | MR | DE48 | 25.0 | 0.0 | 850.5 | 0.5 | 4.0 | OUT OF ROUND | | | | |
| AED000 | MR | DE49 | 2.0 | 0.0 | 93.8 | 0.1 | 3.8 | OVERLOADED MOTOR | | | | |
| AED000 | MR | DE51 | 1.0 | 0.0 | 1.5 | 0.0 | 0.8 | WORN BRUSHES | | | | |
| AED000 | MR | DE54 | 5.0 | 0.0 | 4.0 | 0.0 | 4.0 | BLOWN FUSE | | | | |
| AED000 | MR | DE71 | 1.0 | 0.0 | 16.7 | 0.0 | 3.3 | OPEN CIRCUIT | | | | |
| AED000 | MR | DE72 | 2.0 | 0.0 | 3.3 | 0.0 | 3.3 | CHANGE OF VALUE | | | | |
| AED000 | MR | DE73 | 25.0 | 0.0 | 54.5 | 0.0 | 8.0 | GROUNDED | | | | |
| AED000 | MR | DM13 | 14.0 | 0.0 | 80.3 | 0.0 | 3.2 | SHORTED | | | | |
| AED000 | MR | DM14 | 6.0 | 0.0 | 35.3 | 0.1 | 2.5 | BROKEN/SHEARED | | | | |
| AED000 | MR | DM23 | 4.0 | 0.0 | 9.5 | 0.0 | 1.6 | CRACKED | | | | |
| AED000 | MR | DM32 | 30.0 | 0.0 | 18.0 | 0.0 | 4.5 | DIRTY | | | | |
| AED000 | MR | DM37 | 2.0 | 0.0 | 82.2 | 0.1 | 18.7 | DEFECTIVE BEARING | | | | |
| AED000 | MR | DM38 | 9.0 | 0.0 | 6.0 | 0.0 | 3.0 | DELAMINATED | | | | |
| AED000 | MR | DM39 | 1.0 | 0.0 | 31.2 | 0.0 | 3.5 | DETERIORATED | | | | |
| AED000 | MR | DM3A | 2.0 | 0.0 | 3.0 | 0.0 | 3.0 | PULLED APART | | | | |
| AED000 | MR | DM41 | 1.0 | 0.0 | 5.5 | 0.0 | 2.8 | ROUGH/SCORED | | | | |
| AED000 | MR | DM44 | 4.0 | 0.0 | 2.0 | 0.0 | 2.0 | BENT/BUCKLED/DENTED | | | | |
| AED000 | MR | DM51 | 17.0 | 0.0 | 6.0 | 0.1 | 3.0 | OUT OF BAL/TOL | | | | |
| AED000 | MR | DM53 | 6.0 | 0.0 | 44.3 | 0.0 | 2.6 | CHIPPED/PEELING | | | | |
| AED000 | MR | DM55 | 4.0 | 0.0 | 14.7 | 0.0 | 2.5 | LOOSE | | | | |
| AED000 | MR | DM55 | 4.0 | 0.0 | 1.5 | 0.0 | 0.4 | LOST/MISSING | | | | |

MAINTAINABILITY HIGH-DRIVER BY DEFECT CODE

TRACTION MOTOR ASSEMBLY
(AED000)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|-------------|-------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AED000 | MR | DM56 | 2.0 | -- | 9.0 | -- | 0.0 | -- | 4.5 | -- | MISSING MINOR HWRE |
| AED000 | MR | DM5B | 3.0 | 4.0 | 65.0 | 12.5 | 0.0 | 0.2 | 21.7 | 3.1 | WORN |
| AED000 | MR | DM65 | -- | 4.0 | -- | 17.0 | 0.0 | -- | -- | 4.3 | JAM/BINDING/LOCKED |
| AED000 | MR | DM72 | -- | 4.0 | -- | 5.1 | 0.0 | -- | -- | 1.3 | BURNED |
| AED000 | MR | DM75 | -- | 3.0 | -- | 5.5 | 0.0 | -- | -- | 1.8 | HOT/OVERHEATED |
| AED000 | MR | DN11 | -- | 2.0 | -- | 2.0 | 0.0 | -- | -- | 1.0 | FAILURE, CANNOT DUP |
| AED000 | MR | DN12 | -- | 1.0 | -- | 1.0 | 0.0 | -- | -- | 1.0 | NO DEFECT NOTED |
| AED000 | MR | DN13 | -- | 1.0 | -- | 0.1 | 0.0 | -- | -- | 0.1 | NO DEFECT, OPER ERROR |
| AED000 | MR | DN22 | 43.0 | -- | 69.0 | -- | 0.1 | 0.2 | 1.6 | -- | NO DEFECT, COMP REM |
| AED000 | MR | DN32 | 1.0 | 243.0 | 15.0 | 627.5 | 0.1 | 0.0 | 15.0 | 2.6 | NO DEFECT, PROG MAINT |
| AED000 | MR | DN33 | -- | 45.0 | -- | 203.8 | 0.0 | -- | -- | 4.5 | NO DEFECT, SCHED MOD |
| AED000 | MR | DP42 | -- | 2.0 | -- | 2.5 | 0.0 | -- | -- | 1.3 | LOW LUBRICANT |
| AED000 | MR | DS12 | -- | 1.0 | -- | 3.0 | 0.0 | -- | -- | 3.0 | ERRATIC OPERATION |
| AED000 | MR | DS16 | 1.0 | 37.0 | 8.0 | 83.3 | 0.0 | 0.0 | 8.0 | 2.3 | NOISY |
| AED000 | MR | DS23 | 5.0 | -- | 12.0 | -- | 0.0 | 0.0 | 2.4 | -- | DEAD CAR |
| AED000 | MR | DS26 | -- | 6.0 | -- | 26.0 | 0.0 | -- | -- | 4.3 | FAILS TO OPERATE |
| AED000 | MR | DS2C | -- | 32.0 | -- | 100.9 | 0.0 | -- | -- | 3.2 | FAILURE, INTERNAL |
| AED000 | MR | DS2E | 2.0 | -- | 2.0 | -- | 0.0 | 0.0 | 1.0 | -- | NO DYNAMIC BRAKE |
| AED000 | MR | DS2F | -- | 1.0 | -- | 2.0 | 0.0 | -- | -- | 2.0 | NO GO INDICATION |
| AED000 | MR | DS43 | -- | 1.0 | -- | 5.0 | 0.0 | -- | -- | 5.0 | ERROR, DISPLAY READ00 |
| AED000 | MR | DS4C | 3.0 | 62.0 | 10.0 | 132.8 | 0.0 | 0.0 | 3.3 | -- | SLOW ACCELERATION |
| AED000 | MR | DZ19 | -- | -- | -- | -- | -- | -- | -- | 2.1 | REM FOR OTHER MAINT A |
| AED000 | MR | DZ22 | 1.0 | -- | 33.0 | -- | 0.0 | 0.1 | -- | -- | DEFECTIVE, COUPLER |
| AED000 | MR | DZ25 | -- | 2.0 | -- | 8.5 | 0.0 | -- | -- | 4.3 | FAILS DIAGNOSTIC TEST |
| AED000 | MR | DZ33 | 3.0 | -- | 70.0 | -- | 0.0 | 0.2 | 23.3 | -- | MISCELLANEOUS DEFECTS |
| AED000 | MR | DZ43 | -- | 2.0 | -- | 3.0 | 0.0 | -- | -- | 1.5 | IMPROPER SPACING/CLEA |
| AED000 | MR | [] | 31.0 | 6.0 | 583.5 | 28.0 | 0.1 | 1.5 | 18.8 | 4.7 | NOT DESIGNATED |



APPENDIX F

Data Extraction No. 6

Traction Motor Assembly By Repair Code

MAINTAINABILITY HIGH-DRIVER BY REPAIR CODE
 TRACTION MOTOR ASSEMBLY
 (GPN AED000)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MIHTR | DESCRIPTION |
|--------|-----|--------|---------------------|--------|------------------|-------|-------------|--------|------------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AED000 | -- | -- | 162.0 | 1079.0 | 0.4 | 0.7 | 1865.5 | 3443.7 | 4.7 | 2.1 | 11.5 | TRACTION MOTOR ASSY |
| AED000 | 52 | RB01 | -- | 18.0 | -- | 0.0 | -- | 35.0 | -- | 0.0 | -- | COUPLING |
| AED000 | 62 | RJ07 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | ADJUSTED |
| AED000 | 62 | RJ07 | -- | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | TROUBLE SHOOTING |
| AED000 | 62 | RN03 | -- | 4.0 | -- | 0.0 | -- | 8.5 | -- | 0.0 | -- | REMOVED & REPLACED |
| AED000 | 62 | RN04 | -- | 3.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | REMOVED TO REPAIR |
| AED000 | 62 | RN05 | -- | 7.0 | -- | 0.0 | -- | 13.5 | -- | 0.0 | -- | REPLACED |
| AED000 | 62 | RR18 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | SERVICED |
| AED000 | FT | ---- | -- | 5.0 | -- | 0.0 | -- | 21.2 | -- | 0.0 | -- | FRAME |
| AED000 | FT | RJ02 | -- | 1.0 | -- | 0.0 | -- | 0.2 | -- | 0.0 | -- | INSP & FOUND OK |
| AED000 | FT | RN03 | -- | 2.0 | -- | 0.0 | -- | 15.5 | -- | 0.0 | -- | REMOVED & REPLACED |
| AED000 | FT | RN04 | -- | 1.0 | -- | 0.0 | -- | 2.5 | -- | 0.0 | -- | REMOVED TO REPAIR |
| AED000 | FT | RR10 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | REMOVE/REPAIR/REPLACE |
| AED000 | HE | ---- | -- | 90.0 | -- | 0.1 | -- | 218.4 | -- | 0.1 | -- | HARDWARE |
| AED000 | HE | RB01 | -- | 2.0 | -- | 0.0 | -- | 2.1 | -- | 0.0 | -- | ADJUSTED |
| AED000 | HE | RC03 | -- | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | COMPLETED PREVIOUSLY |
| AED000 | HE | RJ02 | -- | 10.0 | -- | 0.0 | -- | 17.5 | -- | 0.0 | -- | INSP & FOUND OK |
| AED000 | HE | RJ07 | -- | 13.0 | -- | 0.0 | -- | 13.3 | -- | 0.0 | -- | TROUBLE SHOOTING |
| AED000 | HE | RN03 | -- | 37.0 | -- | 0.0 | -- | 87.9 | -- | 0.1 | -- | REMOVED & REPLACED |
| AED000 | HE | RN04 | -- | 2.0 | -- | 0.0 | -- | 29.0 | -- | 0.0 | -- | REMOVED TO REPAIR |
| AED000 | HE | RN05 | -- | 15.0 | -- | 0.0 | -- | 27.6 | -- | 0.0 | -- | REPLACED |
| AED000 | HE | RN09 | -- | 6.0 | -- | 0.0 | -- | 22.3 | -- | 0.0 | -- | REPLACED MINOR HDWRE |
| AED000 | HE | RR10 | -- | 2.0 | -- | 0.0 | -- | 1.7 | -- | 0.0 | -- | REMOVE/REPAIR/REPLACE |
| AED000 | HE | RS06 | -- | 1.0 | -- | 0.0 | -- | 15.0 | -- | 0.0 | -- | MACHINED |
| AED000 | HE | [] | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | NOT DESIGNATED |
| AED000 | HV | ---- | -- | 6.0 | -- | 0.0 | -- | 113.0 | -- | 0.3 | -- | HUB |
| AED000 | HV | RN03 | -- | 2.0 | -- | 0.0 | -- | 24.0 | -- | 0.1 | -- | REMOVED & REPLACED |
| AED000 | HV | RR28 | -- | 3.0 | -- | 0.0 | -- | 66.0 | -- | 0.2 | -- | DISASSEMBLE/BREAKDOWN |
| AED000 | HV | [] | -- | 1.0 | -- | 0.0 | -- | 23.0 | -- | 0.1 | -- | NOT DESIGNATED |
| AED000 | MR | ---- | -- | 156.0 | -- | 0.4 | -- | 3169.1 | -- | 4.4 | -- | MOTOR |
| AED000 | MR | RB01 | -- | 10.0 | -- | 0.0 | -- | 35.0 | -- | 0.0 | -- | ADJUSTED |
| AED000 | MR | RC03 | -- | 2.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | COMPLETED PREVIOUSLY |
| AED000 | MR | RC06 | -- | 1.0 | -- | 0.0 | -- | 10.0 | -- | 0.0 | -- | DEFERRED REPAIR |
| AED000 | MR | RC15 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | SCRAPPED |
| AED000 | MR | RE02 | -- | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | MODIFIED |
| AED000 | MR | RE05 | -- | 1.0 | -- | 0.0 | -- | 22.0 | -- | 0.0 | -- | REBUILT |
| AED000 | MR | RJ02 | -- | 32.0 | -- | 0.1 | -- | 50.0 | -- | 0.1 | -- | INSP & FOUND OK |
| AED000 | MR | RJ05 | -- | 43.0 | -- | 0.1 | -- | 74.0 | -- | 0.2 | -- | TESTED |
| AED000 | MR | RJ06 | -- | 2.0 | -- | 0.0 | -- | 58.0 | -- | 0.1 | -- | TRACK TEST |
| AED000 | MR | RJ07 | -- | 4.0 | -- | 0.0 | -- | 623.7 | -- | 0.1 | -- | TROUBLE SHOOTING |
| AED000 | MR | RN03 | -- | 54.0 | -- | 0.1 | -- | 1286.5 | -- | 3.2 | -- | REMOVED & REPLACED |
| AED000 | MR | RN04 | -- | 1.0 | -- | 0.0 | -- | 33.0 | -- | 0.1 | -- | REMOVED TO REPAIR |
| AED000 | MR | RN05 | -- | 2.0 | -- | 0.0 | -- | 298.7 | -- | 0.1 | -- | REPLACED |

MAINTAINABILITY HIGH-DRIVER BY REPAIR CODE

TRACTION MOTOR ASSEMBLY
(GPN AED000)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MI/HTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|--------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AED000 | MR | RR09 | 2.0 | 26.0 | 0.0 | 0.0 | 9.0 | 150.1 | 0.0 | 0.1 | 4.5 | 5.8 | REPLACED MINOR HDWRF |
| AED000 | MR | RR01 | 3.0 | -- | 0.0 | -- | 39.0 | -- | 0.1 | -- | 13.0 | -- | CONNECTED |
| AED000 | MR | RR03 | 5.0 | -- | 0.0 | -- | 80.0 | -- | 0.2 | -- | 16.0 | -- | DISCONNECTED |
| AED000 | MR | RR10 | -- | 5.0 | -- | 0.0 | -- | 31.5 | -- | 0.0 | -- | 5.3 | REMOVE/REPAIR/REPLACE |
| AED000 | MR | RR18 | -- | 17.0 | -- | 0.0 | -- | 54.7 | -- | 0.0 | -- | 3.2 | SERVICED |
| AED000 | MR | RR24 | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | TEST & REPAIR |
| AED000 | MR | RR26 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | WEIDED |
| AED000 | MR | RS02 | 2.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | -- | CLEANED |
| AED000 | MR | RS06 | -- | 43.0 | -- | 0.0 | -- | 247.8 | -- | 0.1 | -- | 5.8 | MACHINED |

79

APPENDIX G

Data Extraction No. 7 Power Regulator By Defect Code

PATCO MAINTENANCE HIGH-DRIVER BY DEFECT CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBD01 | -- | ---- | 673.0 | 547.0 | 1.7 | 0.3 | 3830.5 | 2872.3 | 9.6 | 1.7 | 5.7 | CAM |
| AEBD01 | 1F | DE2C | -- | 30.0 | -- | 0.0 | -- | 130.8 | -- | 0.1 | 4.4 | INSULATOR |
| AEBD01 | 1F | DM13 | -- | 1.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | 14.0 | INTERLOCK MALFUNCTION |
| AEBD01 | 1F | DM14 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | 1.0 | BROKEN/SHEARED |
| AEBD01 | 1F | DM15 | -- | 22.0 | -- | 0.0 | -- | 88.3 | -- | 0.1 | 4.0 | CRACKED |
| AEBD01 | 1F | DM23 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | 3.0 | CRACKS, THERMAL |
| AEBD01 | 1F | DM53 | -- | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | 5.0 | DIRTY |
| AEBD01 | 1F | DM75 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | 0.5 | LOOSE |
| AEBD01 | 1F | DN32 | -- | 1.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | 14.0 | HOT/OVERHEATED |
| AEBD01 | 5N | ---- | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | 4.0 | NO DEFECT, PROG MAINT |
| AEBD01 | 5N | DE2N | -- | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | 16.0 | SUPPORT |
| AEBD01 | 5R | ---- | -- | 2.0 | -- | 0.0 | -- | 30.0 | -- | 0.1 | 15.0 | DEFECTIVE SWITCH |
| AEBD01 | 5R | DE2N | -- | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | 16.0 | DEFECTIVE SWITCH |
| AEBD01 | 5R | DM42 | -- | 1.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | 14.0 | CRUSHED/CRIMPED |
| AEBD01 | 6R | ---- | -- | 6.0 | -- | 0.0 | -- | 28.0 | -- | 0.1 | 4.7 | CONTACT |
| AEBD01 | 6R | DE2P | -- | 4.0 | -- | 0.0 | -- | 18.0 | -- | 0.0 | 4.5 | DEFECTIVE CONTACT TIP |
| AEBD01 | 6R | DE72 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | 6.0 | GROUND |
| AEBD01 | 6R | DZ42 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | 4.0 | IMPROPER ADJUSTMENT |
| AEBD01 | 6V | ---- | -- | 301.0 | -- | 0.2 | -- | 1403.9 | -- | 0.8 | 4.7 | CONTROLLER |
| AEBD01 | 6V | DC23 | -- | 1.0 | -- | 0.0 | -- | 0.1 | -- | 0.0 | 0.1 | PITTED |
| AEBD01 | 6V | DD28 | -- | 81.0 | -- | 0.0 | -- | 246.5 | -- | 0.1 | 3.0 | LEAKING |
| AEBD01 | 6V | DE14 | -- | 3.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | 3.7 | LOOSE CONNECTION |
| AEBD01 | 6V | DE21 | -- | 2.0 | -- | 0.0 | -- | 5.6 | -- | 0.0 | 2.8 | BURNED CONTACT |
| AEBD01 | 6V | DE29 | -- | 3.0 | -- | 0.0 | -- | 8.1 | -- | 0.0 | 2.7 | DIRTY CONTACTS |
| AEBD01 | 6V | DE2A | -- | 16.0 | -- | 0.0 | -- | 119.8 | -- | 0.1 | 7.5 | FLASHED/ARCING |
| AEBD01 | 6V | DE2C | -- | 1.0 | -- | 0.0 | -- | 5.5 | -- | 0.0 | 5.5 | INTERLOCK MALFUNCTION |
| AEBD01 | 6V | DE2E | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | 3.0 | RELAY COIL MALFUNCTION |
| AEBD01 | 6V | DE2L | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | 4.0 | TRIPPED CKT BREAKER |
| AEBD01 | 6V | DE48 | -- | 18.0 | -- | 0.0 | -- | 96.3 | -- | 0.1 | 5.4 | OVERLOADED MOTOR |
| AEBD01 | 6V | DE54 | -- | 4.0 | -- | 0.0 | -- | 13.0 | -- | 0.0 | 3.3 | OPEN CIRCUIT |
| AEBD01 | 6V | DE67 | -- | 4.0 | -- | 0.0 | -- | 21.0 | -- | 0.0 | 5.3 | INCORRECT CURRENT |
| AEBD01 | 6V | DE6F | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | 6.0 | LOW VOLTAGE |
| AEBD01 | 6V | DE73 | -- | 2.0 | -- | 0.0 | -- | 16.3 | -- | 0.0 | 8.1 | SHORTED |
| AEBD01 | 6V | DE74 | -- | 5.0 | -- | 0.0 | -- | 16.8 | -- | 0.0 | 3.4 | WELDED CONTACT |
| AEBD01 | 6V | DM13 | -- | 3.0 | -- | 0.0 | -- | 7.5 | -- | 0.0 | 2.5 | BROKEN/SHEARED |
| AEBD01 | 6V | DM14 | -- | 9.0 | -- | 0.0 | -- | 47.8 | -- | 0.0 | 5.3 | CRACKED |
| AEBD01 | 6V | DM23 | -- | 2.0 | -- | 0.0 | -- | 17.0 | -- | 0.0 | 8.5 | DIRTY |
| AEBD01 | 6V | DM24 | -- | 1.0 | -- | 0.0 | -- | 0.7 | -- | 0.0 | 0.7 | STICKY/GUMMY |
| AEBD01 | 6V | DM38 | -- | 5.0 | -- | 0.0 | -- | 17.1 | -- | 0.0 | 3.4 | DETERIORATED |
| AEBD01 | 6V | DM3C | -- | 4.0 | -- | 0.0 | -- | 8.9 | -- | 0.0 | 2.2 | STRIPPED |
| AEBD01 | 6V | DM43 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | 2.0 | DEFORMED/DISTORTED |

PATCO MAINTENANCE HIGH-DRIVER BY DEFECT CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBD01 | 6V | DM51 | 1.0 | 0.0 | 0.0 | 0.0 | 8.0 | 0.0 | 0.0 | 8.0 | CHIPPED/PEELING | |
| AEBD01 | 6V | DM53 | 5.0 | 0.0 | 0.0 | 0.0 | 37.8 | 0.0 | 0.0 | 7.6 | LOOSE | |
| AEBD01 | 6V | DM55 | 3.0 | 0.0 | 0.0 | 0.0 | 30.0 | 0.0 | 0.0 | 10.0 | LOST/MISSING | |
| AEBD01 | 6V | DM5B | 3.0 | 0.0 | 0.0 | 0.0 | 15.5 | 0.0 | 0.0 | 5.2 | WORN | |
| AEBD01 | 6V | DM65 | 7.0 | 0.0 | 0.0 | 0.0 | 19.9 | 0.0 | 0.0 | 2.8 | JAM/BINDING/LOCKED | |
| AEBD01 | 6V | DM67 | 12.0 | 0.0 | 0.0 | 0.0 | 24.1 | 0.0 | 0.0 | 2.0 | STICKING | |
| AEBD01 | 6V | DM72 | 10.0 | 0.0 | 0.0 | 0.0 | 157.0 | 0.1 | 0.0 | 15.7 | BURNED | |
| AEBD01 | 6V | DM75 | 2.0 | 0.0 | 0.0 | 0.0 | 29.0 | 0.0 | 0.0 | 14.5 | HOT/OVERHEATED | |
| AEBD01 | 6V | DN11 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | FAILURE, CANNOT DUP | |
| AEBD01 | 6V | DN32 | 7.0 | 0.0 | 0.0 | 0.0 | 26.6 | 0.0 | 0.0 | 3.8 | NO DEFECT, PROG MAINT | |
| AEBD01 | 6V | DP23 | 1.0 | 0.0 | 0.0 | 0.0 | 10.0 | 0.0 | 0.0 | 10.0 | DRY | |
| AEBD01 | 6V | DP42 | 2.0 | 0.0 | 0.0 | 0.0 | 11.0 | 0.0 | 0.0 | 5.5 | LOW LUBRICANT | |
| AEBD01 | 6V | DS12 | 16.0 | 0.0 | 0.0 | 0.0 | 80.1 | 0.0 | 0.0 | 5.0 | ERRATIC OPERATION | |
| AEBD01 | 6V | DS13 | 2.0 | 0.0 | 0.0 | 0.0 | 11.5 | 0.0 | 0.0 | 5.8 | INTERMITTENT OPER | |
| AEBD01 | 6V | DS26 | 4.0 | 0.0 | 0.0 | 0.0 | 13.3 | 0.0 | 0.0 | 3.3 | FAILS TO OPERATE | |
| AEBD01 | 6V | DS2C | 20.0 | 0.0 | 0.0 | 0.0 | 116.3 | 0.1 | 0.0 | 5.8 | FAILURE, INTERNAL | |
| AEBD01 | 6V | DS2K | 1.0 | 0.0 | 0.0 | 0.0 | 12.0 | 0.0 | 0.0 | 12.0 | OPEN, WILL NOT | |
| AEBD01 | 6V | DS2L | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | OPERATE, WILL NOT | |
| AEBD01 | 6V | DS45 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | HIGH TEMPERATURE | |
| AEBD01 | 6V | DS4E | 9.0 | 0.0 | 0.0 | 0.0 | 24.9 | 0.0 | 0.0 | 2.8 | SLUGGISH | |
| AEBD01 | 6V | DZ42 | 15.0 | 0.0 | 0.0 | 0.0 | 53.3 | 0.0 | 0.0 | 3.6 | IMPROPER ADJUSTMENT | |
| AEBD01 | 6V | DZ44 | 9.0 | 0.0 | 0.0 | 0.0 | 45.6 | 0.0 | 0.0 | 5.1 | INCORRECTLY ASSEMBLED | |
| AEBD01 | 6V | [] | 1.0 | 0.0 | 0.0 | 0.0 | --- | --- | --- | --- | NOT DESIGNATED | |
| AEBD01 | 9C | --- | 2.0 | 0.0 | 0.0 | 0.0 | 14.0 | 0.0 | 0.0 | 7.0 | GEAR | |
| AEBD01 | 9C | DM53 | 2.0 | 0.0 | 0.0 | 0.0 | 14.0 | 0.0 | 0.0 | 7.0 | LOOSE | |
| AEBD01 | 9D | --- | 1.0 | 0.0 | 0.0 | 0.0 | --- | --- | --- | --- | GEARBOX | |
| AEBD01 | 9D | DN33 | 1.0 | 0.0 | 0.0 | 0.0 | --- | --- | --- | --- | NO DEFECT, SCHED MOD | |
| AEBD01 | BV | --- | 2.0 | 0.0 | 0.0 | 0.0 | 17.0 | 0.0 | 0.0 | 8.5 | BLOCK | |
| AEBD01 | BV | DM53 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | LOOSE | |
| AEBD01 | BV | DS23 | 1.0 | 0.0 | 0.0 | 0.0 | 16.0 | 0.0 | 0.0 | 16.0 | DEAD CAR | |
| AEBD01 | CF | --- | 15.0 | 0.0 | 0.0 | 0.0 | 108.0 | 0.3 | 0.0 | 7.2 | CAM SWITCH | |
| AEBD01 | CF | DE2A | 2.0 | 0.0 | 0.0 | 0.0 | 11.0 | 0.0 | 0.0 | 5.5 | FLASHED/ARCING | |
| AEBD01 | CF | DE2N | 1.0 | 0.0 | 0.0 | 0.0 | 14.0 | 0.0 | 0.0 | 14.0 | DEFECTIVE SWITCH | |
| AEBD01 | CF | DE2P | 1.0 | 0.0 | 0.0 | 0.0 | 4.0 | 0.0 | 0.0 | 4.0 | DEFECTIVE CONTACT TIP | |
| AEBD01 | CF | DM13 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | BROKEN/SHEARED | |
| AEBD01 | CF | DM65 | 3.0 | 0.0 | 0.0 | 0.0 | 21.0 | 0.1 | 0.0 | 7.0 | JAM/BINDING/LOCKED | |
| AEBD01 | CF | DM77 | 1.0 | 0.0 | 0.0 | 0.0 | 7.0 | 0.0 | 0.0 | 7.0 | DEFECTIVE INTERLOCK | |
| AEBD01 | CF | DS13 | 3.0 | 0.0 | 0.0 | 0.0 | 33.0 | 0.1 | 0.0 | 11.0 | INTERMITTENT OPER | |
| AEBD01 | CF | DS2L | 2.0 | 0.0 | 0.0 | 0.0 | 12.0 | 0.0 | 0.0 | 6.0 | OPERATE, WILL NOT | |
| AEBD01 | CF | [] | 1.0 | 0.0 | 0.0 | 0.0 | --- | --- | --- | --- | NOT DESIGNATED | |
| AEBD01 | HE | --- | 126.0 | 0.1 | 0.0 | 0.0 | 787.9 | 0.5 | 0.0 | 6.3 | HARDWARE | |
| AEBD01 | HE | DC12 | 1.0 | 0.0 | 0.0 | 0.0 | 3.1 | 0.0 | 0.0 | 3.1 | MOISTURE PRESENT | |

PATCO MAINTENANCE HIGH-DRIVER BY DEFECT CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBD01 | HE | DC21 | 1.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | CORRODED | |
| AEBD01 | HE | DD21 | 1.0 | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | CUT | |
| AEBD01 | HE | DD24 | 2.0 | 0.0 | 9.0 | 0.0 | 9.0 | 0.0 | 9.0 | 0.0 | 4.5 | DESTROYED | |
| AEBD01 | HE | DD26 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | FOREIGN OBJECT DAMAGE | |
| AEBD01 | HE | DE14 | 1.0 | 0.0 | 5.5 | 0.0 | 5.5 | 0.0 | 5.5 | 0.0 | 5.5 | LOOSE CONNECTION | |
| AEBD01 | HE | DE2A | 5.0 | 0.0 | 48.7 | 0.0 | 48.7 | 0.0 | 48.7 | 0.0 | 9.7 | FLASHED/ARCING | |
| AEBD01 | HE | DE2B | 1.0 | 0.0 | 6.0 | 0.0 | 6.0 | 0.0 | 6.0 | 0.0 | 6.0 | INSULATION BREAKDOWN | |
| AEBD01 | HE | DE2L | 1.0 | 0.0 | 3.0 | 0.0 | 3.0 | 0.0 | 3.0 | 0.0 | 3.0 | TRIPPED CKT BREAKER | |
| AEBD01 | HE | DE31 | 1.0 | 0.0 | 6.0 | 0.0 | 6.0 | 0.0 | 6.0 | 0.0 | 6.0 | CROSSED LEADS | |
| AEBD01 | HE | DE48 | 2.0 | 0.0 | 7.0 | 0.0 | 7.0 | 0.0 | 7.0 | 0.0 | 3.5 | OVERLOADED MOTOR | |
| AEBD01 | HE | DE49 | 1.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | WORN BRUSHES | |
| AEBD01 | HE | DE52 | 1.0 | 0.0 | 7.0 | 0.0 | 7.0 | 0.0 | 7.0 | 0.0 | 7.0 | BROKEN LEAD | |
| AEBD01 | HE | DE54 | 1.0 | 0.0 | 16.0 | 0.0 | 16.0 | 0.0 | 16.0 | 0.0 | 16.0 | OPEN CIRCUIT | |
| AEBD01 | HE | DE73 | 1.0 | 0.0 | 3.0 | 0.0 | 3.0 | 0.0 | 3.0 | 0.0 | 3.0 | SHORTED | |
| AEBD01 | HE | DM13 | 5.0 | 0.0 | 9.6 | 0.0 | 9.6 | 0.0 | 9.6 | 0.0 | 1.9 | BROKEN/SHEARED | |
| AEBD01 | HE | DM14 | 4.0 | 0.0 | 11.3 | 0.0 | 11.3 | 0.0 | 11.3 | 0.0 | 2.8 | CRACKED | |
| AEBD01 | HE | DM37 | 1.0 | 0.0 | 10.0 | 0.0 | 10.0 | 0.0 | 10.0 | 0.0 | 10.0 | DELAMINATED | |
| AEBD01 | HE | DM38 | 22.0 | 0.0 | 196.6 | 0.0 | 196.6 | 0.0 | 196.6 | 0.0 | 8.9 | DETERIORATED | |
| AEBD01 | HE | DM3B | 2.0 | 0.0 | 3.1 | 0.0 | 3.1 | 0.0 | 3.1 | 0.0 | 1.5 | SEPARATED | |
| AEBD01 | HE | DM43 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | 0.0 | 1.0 | DEFORMED/DISTORTED | |
| AEBD01 | HE | DM53 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 2.0 | 0.0 | 1.0 | LOOSE | |
| AEBD01 | HE | DM59 | 1.0 | 0.0 | 10.0 | 0.0 | 10.0 | 0.0 | 10.0 | 0.0 | 10.0 | WORN HOLES/OVERSIZE | |
| AEBD01 | HE | DM5B | 2.0 | 0.0 | 4.0 | 0.0 | 4.0 | 0.0 | 4.0 | 0.0 | 2.0 | WORN | |
| AEBD01 | HE | DM72 | 18.0 | 0.0 | 129.6 | 0.0 | 129.6 | 0.0 | 129.6 | 0.0 | 7.2 | BURNED | |
| AEBD01 | HE | DM74 | 11.0 | 0.0 | 52.5 | 0.0 | 52.5 | 0.0 | 52.5 | 0.0 | 4.8 | CRYSTALLIZED | |
| AEBD01 | HE | DM75 | 26.0 | 0.0 | 170.2 | 0.0 | 170.2 | 0.0 | 170.2 | 0.0 | 6.5 | HOT/OVERHEATED | |
| AEBD01 | HE | DN32 | 2.0 | 0.0 | 0.7 | 0.0 | 0.7 | 0.0 | 0.7 | 0.0 | 0.4 | NO DEFECT, PROG MAINT | |
| AEBD01 | HE | DN33 | 7.0 | 0.0 | 66.0 | 0.0 | 66.0 | 0.0 | 66.0 | 0.0 | 9.4 | NO DEFECT, SCHED MOD | |
| AEBD01 | HE | DS45 | 1.0 | 0.0 | 1.5 | 0.0 | 1.5 | 0.0 | 1.5 | 0.0 | 1.5 | HIGH TEMPERATURE | |
| AEBD01 | PJ | DS2L | 1.0 | 0.0 | 22.0 | 0.0 | 22.0 | 0.1 | 22.0 | 0.1 | 22.0 | PC BOARD (CARD) | |
| AEBD01 | PJ | DS2L | 1.0 | 0.0 | 22.0 | 0.0 | 22.0 | 0.1 | 22.0 | 0.1 | 22.0 | OPERATE, WILL NOT | |
| AEBD01 | R9 | DE2A | 3.0 | 0.0 | 16.2 | 0.0 | 16.2 | 0.0 | 16.2 | 0.0 | 5.4 | ROD | |
| AEBD01 | R9 | DM72 | 1.0 | 0.0 | 8.0 | 0.0 | 8.0 | 0.0 | 8.0 | 0.0 | 8.0 | FLASHED/ARCING | |
| AEBD01 | R9 | RY | 2.0 | 0.0 | 8.2 | 0.0 | 8.2 | 0.0 | 8.2 | 0.0 | 4.1 | BURNED | |
| AEBD01 | RY | DC12 | 87.0 | 0.1 | 533.5 | 0.0 | 533.5 | 0.3 | 533.5 | 0.3 | 6.1 | RESISTOR | |
| AEBD01 | RY | DD26 | 1.0 | 0.0 | 11.0 | 0.0 | 11.0 | 0.0 | 11.0 | 0.0 | 11.0 | MOISTURE PRESENT | |
| AEBD01 | RY | DD28 | 1.0 | 0.0 | 15.0 | 0.0 | 15.0 | 0.0 | 15.0 | 0.0 | 15.0 | FOREIGN OBJECT DAMAGE | |
| AEBD01 | RY | DE2A | 2.0 | 0.0 | 23.5 | 0.0 | 23.5 | 0.0 | 23.5 | 0.0 | 11.8 | LEAKING | |
| AEBD01 | RY | DE48 | 23.0 | 0.0 | 165.6 | 0.0 | 165.6 | 0.1 | 165.6 | 0.1 | 7.2 | FLASHED/ARCING | |
| AEBD01 | RY | DE54 | 3.0 | 0.0 | 5.0 | 0.0 | 5.0 | 0.0 | 5.0 | 0.0 | 1.7 | OVERLOADED MOTOR | |
| AEBD01 | RY | DE67 | 1.0 | 0.0 | 6.5 | 0.0 | 6.5 | 0.0 | 6.5 | 0.0 | 4.7 | OPEN CIRCUIT | |
| AEBD01 | RY | | 1.0 | 0.0 | | 0.0 | | 0.0 | | 0.0 | 6.5 | INCORRECT CURRENT | |

PATCO MAINTENANCE HIGH-DRIVER BY DEFECT CODE
POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBD01 | RY | DE69 | -- | 2.0 | -- | 0.0 | 5.5 | -- | 0.0 | -- | 2.8 | INCORRECT SIGNAL | |
| AEBD01 | RY | DE73 | -- | 1.0 | -- | 0.0 | 2.0 | -- | 0.0 | -- | 2.0 | SHORTED | |
| AEBD01 | RY | DM13 | -- | 2.0 | -- | 0.0 | 6.0 | -- | 0.0 | -- | 3.0 | BROKEN/SHEARED | |
| AEBD01 | RY | DM14 | -- | 4.0 | -- | 0.0 | 3.6 | -- | 0.0 | -- | 0.9 | CRACKED | |
| AEBD01 | RY | DM23 | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | DIRTY | |
| AEBD01 | RY | DM38 | -- | 5.0 | -- | 0.0 | 15.7 | -- | 0.0 | -- | 3.1 | DETERIORATED | |
| AEBD01 | RY | DM41 | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | BENT/BUCKLED/DENTED | |
| AEBD01 | RY | DM72 | -- | 13.0 | -- | 0.0 | 157.5 | -- | 0.1 | -- | 12.1 | BURNED | |
| AEBD01 | RY | DM74 | -- | 1.0 | -- | 0.0 | 0.3 | -- | 0.0 | -- | 0.3 | CRYSTALIZED | |
| AEBD01 | RY | DM75 | -- | 13.0 | -- | 0.0 | 39.4 | -- | 0.0 | -- | 3.0 | HOT/OVERHEATED | |
| AEBD01 | RY | DN32 | -- | 3.0 | -- | 0.0 | 1.4 | -- | 0.0 | -- | 0.5 | NO DEFECT, PROG MAINT | |
| AEBD01 | RY | DN33 | -- | 2.0 | -- | 0.0 | 15.0 | -- | 0.0 | -- | 7.5 | NO DEFECT, SCHED MOD | |
| AEBD01 | RY | DS13 | -- | 1.0 | -- | 0.0 | 16.0 | -- | 0.0 | -- | 16.0 | INTERMITTENT OPER | |
| AEBD01 | RY | DS2L | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | OPERATE, WILL NOT | |
| AEBD01 | RY | DZ25 | -- | 1.0 | -- | 0.0 | 14.0 | -- | 0.0 | -- | 14.0 | FAILS DIAGNOSTIC TEST | |
| AEBD01 | RY | DZ37 | -- | 2.0 | -- | 0.0 | 4.5 | -- | 0.0 | -- | 2.3 | UNABLE TO ADJUST | |
| AEBD01 | SM | ---- | 643.0 | -- | 1.6 | -- | 3595.5 | 9.0 | -- | 5.6 | ---- | SHAFT | |
| AEBD01 | SM | DC21 | 1.0 | -- | 0.0 | -- | 4.0 | 0.0 | -- | 4.0 | ---- | CORRODED | |
| AEBD01 | SM | DE13 | 29.0 | -- | 0.1 | -- | 473.0 | 1.2 | -- | 16.3 | ---- | DEFECTIVE WIRING | |
| AEBD01 | SM | DE25 | 1.0 | -- | 0.0 | -- | 4.0 | 0.0 | -- | 4.0 | ---- | DEFECTIVE DIODE | |
| AEBD01 | SM | DE26 | 6.0 | -- | 0.0 | -- | 64.0 | 0.2 | -- | 10.7 | ---- | DEFECTIVE RELAY | |
| AEBD01 | SM | DE27 | 2.0 | -- | 0.0 | -- | 21.0 | 0.1 | -- | 10.5 | ---- | DEFECTIVE RESISTOR | |
| AEBD01 | SM | DE2A | 8.0 | -- | 0.0 | -- | 187.0 | 0.5 | -- | 23.4 | ---- | FLASHED/ARCING | |
| AEBD01 | SM | DE2F | 2.0 | -- | 0.0 | -- | 18.0 | 0.0 | -- | 9.0 | ---- | MISC ELECT TROUBLE | |
| AEBD01 | SM | DE2K | 4.0 | -- | 0.0 | -- | 13.0 | 0.0 | -- | 3.3 | ---- | TRIPPED | |
| AEBD01 | SM | DE2L | 151.0 | -- | 0.4 | -- | 73.0 | 0.2 | -- | 0.5 | ---- | TRIPPED CKT BREAKER | |
| AEBD01 | SM | DE2N | 4.0 | -- | 0.0 | -- | 21.0 | 0.1 | -- | 5.3 | ---- | DEFECTIVE SWITCH | |
| AEBD01 | SM | DE2P | 13.0 | -- | 0.0 | -- | 47.0 | 0.1 | -- | 3.6 | ---- | DEFECTIVE CONTACT TIP | |
| AEBD01 | SM | DE32 | 1.0 | -- | 0.0 | -- | 8.0 | 0.0 | -- | 8.0 | ---- | MISWIRED/CONNECT INCO | |
| AEBD01 | SM | DE72 | 6.0 | -- | 0.0 | -- | 66.0 | 0.2 | -- | 11.0 | ---- | GROUNDING | |
| AEBD01 | SM | DE74 | 1.0 | -- | 0.0 | -- | 8.0 | 0.0 | -- | 12.7 | ---- | WELDED CONTACT | |
| AEBD01 | SM | DM44 | 3.0 | -- | 0.0 | -- | 38.0 | 0.1 | -- | 35.0 | ---- | OUT OF BAL/TOL | |
| AEBD01 | SM | DM53 | 1.0 | -- | 0.0 | -- | 21.0 | 0.1 | -- | 21.0 | ---- | LOOSE | |
| AEBD01 | SM | DM5B | 1.0 | -- | 0.0 | -- | 388.0 | 0.1 | -- | 8.8 | ---- | WORN | |
| AEBD01 | SM | DN22 | 44.0 | -- | 0.1 | -- | 2.0 | 0.0 | -- | 1.0 | ---- | NO DEFECT, COMP REM | |
| AEBD01 | SM | DN33 | 2.0 | -- | 0.0 | -- | 54.0 | 0.1 | -- | 10.8 | ---- | NO DEFECT, SCHED MOD | |
| AEBD01 | SM | DS13 | 5.0 | -- | 0.0 | -- | 421.0 | 1.1 | -- | 5.3 | ---- | INTERMITTENT OPER | |
| AEBD01 | SM | DS23 | 79.0 | -- | 0.2 | -- | 4.0 | 0.0 | -- | 4.0 | ---- | DEAD CAR | |
| AEBD01 | SM | DS24 | 1.0 | -- | 0.0 | -- | 459.0 | 1.2 | -- | 4.5 | ---- | FAILED, BRAKE CHARGE | |
| AEBD01 | SM | DS2E | 102.0 | -- | 0.3 | -- | 5.0 | 0.0 | -- | 5.0 | ---- | NO DYNAMIC BRAKE | |
| AEBD01 | SM | DS4A | 1.0 | -- | 0.0 | -- | 157.0 | 0.4 | -- | 14.3 | ---- | POR BRAKING | |
| AEBD01 | SM | DS4C | 11.0 | -- | 0.0 | -- | | | -- | | ---- | SLOW ACCELERATION | |

A

PATCO MAINTENANCE HIGH-DRIVER BY DEFECT CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBD01 | SM | DW22 | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 2.0 | -- | FLAT SPOT |
| AEBD01 | SM | DW42 | 2.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | -- | 7.0 | -- | DEFECTIVE WHEEL TREAD |
| AEBD01 | SM | DZ33 | 3.0 | -- | 0.0 | -- | 17.5 | -- | 0.0 | -- | 5.8 | -- | MISCELLANEOUS DEFECTS |
| AEBD01 | SM | DZ42 | 8.0 | -- | 0.0 | -- | 77.0 | -- | 0.2 | -- | 9.6 | -- | IMPROPER ADJUSTMENT |
| AEBD01 | SM | DZ55 | 7.0 | -- | 0.0 | -- | 13.0 | -- | 0.0 | -- | 1.9 | -- | MISC INDICATORS |
| AEBD01 | SM | (J) | 142.0 | -- | 0.4 | -- | 879.0 | -- | 2.2 | -- | 6.2 | -- | NOT DESIGNATED |

*

APPENDIX H

Data Extraction No. 8 Power Regulator By Repair Code

PATCO MAINTENANCE HIGH-DRIVER BY REPAIR CODE
 POWER REGULATOR - CAM
 (GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBD01 | -- | -- | 673.0 | 547.0 | 1.7 | 0.3 | 3830.5 | 2872.3 | 9.6 | 1.7 | 5.7 | CAM |
| AEBD01 | 1F | RB01 | -- | 30.0 | -- | 0.0 | -- | 130.8 | -- | 0.1 | -- | INSULATOR |
| AEBD01 | 1F | RJ02 | -- | 1.0 | -- | 0.0 | 0.5 | -- | -- | 0.0 | -- | ADJUSTED |
| AEBD01 | 1F | RJ07 | -- | 1.0 | -- | 0.0 | 4.0 | -- | -- | 0.0 | -- | INSP & FOUND OK |
| AEBD01 | 1F | RN03 | -- | 2.0 | -- | 0.0 | 7.0 | -- | -- | 0.0 | -- | TROUBLE SHOOTING |
| AEBD01 | 1F | RN04 | -- | 23.0 | -- | 0.0 | 112.3 | -- | -- | 0.1 | -- | REMOVED & REPLACED |
| AEBD01 | 1F | RN09 | -- | 1.0 | -- | 0.0 | 1.0 | -- | -- | 0.0 | -- | REMOVED TO REPAIR |
| AEBD01 | 1F | RN09 | -- | 2.0 | -- | 0.0 | 6.0 | -- | -- | 0.0 | -- | REPLACED MINOR HDWRE |
| AEBD01 | 5N | --- | 1.0 | -- | 0.0 | -- | -- | 0.0 | -- | -- | -- | SUPPORT |
| AEBD01 | 5N | RN03 | -- | 1.0 | -- | 0.0 | 16.0 | -- | 0.0 | -- | 16.0 | REMOVED & REPLACED |
| AEBD01 | 5R | --- | 2.0 | -- | 0.0 | -- | 30.0 | -- | 0.1 | -- | 15.0 | SWITCH |
| AEBD01 | 5R | RN03 | -- | 2.0 | -- | 0.0 | 30.0 | -- | 0.1 | -- | 15.0 | REMOVED & REPLACED |
| AEBD01 | 6R | --- | 6.0 | -- | 0.0 | -- | 28.0 | -- | 0.1 | -- | 4.7 | CONTACT |
| AEBD01 | 6R | RB01 | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | ADJUSTED |
| AEBD01 | 6R | RJ06 | -- | 1.0 | -- | 0.0 | 3.0 | -- | 0.0 | -- | 3.0 | TRACK TEST |
| AEBD01 | 6R | RN03 | -- | 2.0 | -- | 0.0 | 14.0 | -- | 0.0 | -- | 7.0 | REMOVED & REPLACED |
| AEBD01 | 6R | RP05 | -- | 1.0 | -- | 0.0 | 6.0 | -- | 0.0 | -- | 6.0 | CLEARED GROUNDS |
| AEBD01 | 6R | RS03 | -- | 1.0 | -- | 0.0 | 1.0 | -- | 0.0 | -- | 1.0 | DRESSED & FILED |
| AEBD01 | 6V | --- | 301.0 | -- | 0.2 | -- | 1403.9 | -- | 0.8 | -- | 4.7 | CONTROLLER |
| AEBD01 | 6V | RB01 | -- | 25.0 | -- | 0.0 | -- | 75.1 | -- | 0.0 | -- | ADJUSTED |
| AEBD01 | 6V | RJ02 | -- | 6.0 | -- | 0.0 | 28.6 | -- | 0.0 | -- | 4.8 | INSP & FOUND OK |
| AEBD01 | 6V | RJ07 | -- | 33.0 | -- | 0.0 | 86.1 | -- | 0.1 | -- | 2.6 | TROUBLE SHOOTING |
| AEBD01 | 6V | RN03 | -- | 182.0 | -- | 0.1 | -- | 864.5 | -- | 0.5 | -- | REMOVED & REPLACED |
| AEBD01 | 6V | RN04 | -- | 6.0 | -- | 0.0 | 36.2 | -- | 0.0 | -- | 6.0 | REMOVED TO REPAIR |
| AEBD01 | 6V | RN05 | -- | 12.0 | -- | 0.0 | 140.1 | -- | 0.1 | -- | 11.7 | REPLACED |
| AEBD01 | 6V | RN09 | -- | 22.0 | -- | 0.0 | 119.2 | -- | 0.1 | -- | 5.4 | REPLACED MINOR HDWRE |
| AEBD01 | 6V | RR10 | -- | 5.0 | -- | 0.0 | 30.4 | -- | 0.0 | -- | 6.1 | REMOVE/REPAIR/REPLACE |
| AEBD01 | 6V | RR18 | -- | 7.0 | -- | 0.0 | 23.7 | -- | 0.0 | -- | 3.4 | SERVICED |
| AEBD01 | 6V | [] | -- | 3.0 | -- | 0.0 | -- | -- | -- | -- | -- | NOT DESIGNATED |
| AEBD01 | 9C | --- | 2.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | -- | 7.0 | GEAR |
| AEBD01 | 9C | RN03 | -- | 1.0 | -- | 0.0 | 6.0 | -- | 0.0 | -- | 6.0 | REMOVED & REPLACED |
| AEBD01 | 9C | RN09 | -- | 1.0 | -- | 0.0 | 8.0 | -- | 0.0 | -- | 8.0 | REPLACED MINOR HDWRE |
| AEBD01 | 9D | --- | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | GEARBOX |
| AEBD01 | 9D | RE02 | -- | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | MODIFIED |
| AEBD01 | BV | --- | 2.0 | -- | 0.0 | -- | 17.0 | -- | 0.0 | -- | 8.5 | BLOCK |
| AEBD01 | BV | RB04 | -- | 1.0 | -- | 0.0 | 1.0 | -- | 0.0 | -- | 1.0 | TIGHTENED |
| AEBD01 | BV | RR10 | -- | 1.0 | -- | 0.0 | 16.0 | -- | 0.0 | -- | 16.0 | REMOVE/REPAIR/REPLACE |
| AEBD01 | CF | --- | 15.0 | -- | 0.0 | -- | 108.0 | -- | 0.3 | -- | 7.2 | CAM SWITCH |
| AEBD01 | CF | RN03 | -- | 12.0 | -- | 0.0 | 99.0 | -- | 0.2 | -- | 8.3 | REMOVED & REPLACED |
| AEBD01 | CF | RN05 | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | REPLACED |
| AEBD01 | CF | RP04 | -- | 1.0 | -- | 0.0 | 1.0 | -- | 0.0 | -- | 1.0 | REMOVED FOREIGN OBJEC |
| AEBD01 | CF | RR10 | -- | 1.0 | -- | 0.0 | 4.0 | -- | 0.0 | -- | 4.0 | REMOVE/REPAIR/REPLACE |
| AEBD01 | HE | --- | 126.0 | -- | 0.1 | -- | 787.9 | -- | 0.5 | -- | 6.3 | HARDWARE |

PATCO MAINTENANCE HIGH-DRIVER BY REPAIR CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|---------------------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBD01 | HE | RB01 | -- | 2.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 2.5 | ADJUSTED |
| AEBD01 | HE | RE02 | -- | 5.0 | -- | 0.0 | -- | 57.0 | -- | 0.0 | -- | 11.4 | MODIFIED |
| AEBD01 | HE | RJ02 | -- | 3.0 | -- | 0.0 | -- | 13.7 | -- | 0.0 | -- | 4.6 | INSP & FOUND OK |
| AEBD01 | HE | RJ07 | -- | 8.0 | -- | 0.0 | -- | 28.2 | -- | 0.0 | -- | 3.5 | TROUBLE SHOOTING |
| AEBD01 | HE | RN03 | -- | 46.0 | -- | 0.0 | -- | 316.7 | -- | 0.2 | -- | 6.9 | REMOVED & REPLACED |
| AEBD01 | HE | RN04 | -- | 7.0 | -- | 0.0 | -- | 36.7 | -- | 0.0 | -- | 5.2 | REMOVED TO REPAIR |
| AEBD01 | HE | RN05 | -- | 10.0 | -- | 0.0 | -- | 107.5 | -- | 0.1 | -- | 10.8 | REPLACED |
| AEBD01 | HE | RN09 | -- | 41.0 | -- | 0.0 | -- | 208.4 | -- | 0.1 | -- | 5.1 | REPLACED MINOR HDWRE |
| AEBD01 | HE | RR10 | -- | 2.0 | -- | 0.0 | -- | 8.7 | -- | 0.0 | -- | 4.4 | REMOVE/REPAIR/REPLACE |
| AEBD01 | HE | RR18 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | SERVICED |
| AEBD01 | PJ | ---- | 1.0 | -- | 0.0 | -- | 22.0 | -- | 0.1 | -- | 22.0 | PC BOARD (CARD) | |
| AEBD01 | PJ | RN03 | 1.0 | -- | 0.0 | -- | 22.0 | -- | 0.1 | -- | 22.0 | REMOVED & REPLACED | |
| AEBD01 | R9 | ---- | -- | 3.0 | -- | 0.0 | -- | 16.2 | -- | 0.0 | -- | 5.4 | ROD |
| AEBD01 | R9 | RJ07 | -- | 1.0 | -- | 0.0 | -- | 0.7 | -- | 0.0 | -- | 0.7 | TROUBLE SHOOTING |
| AEBD01 | R9 | RN03 | -- | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | REMOVED & REPLACED |
| AEBD01 | R9 | RR10 | -- | 1.0 | -- | 0.0 | -- | 7.5 | -- | 0.0 | -- | 7.5 | REMOVE/REPAIR/REPLACE |
| AEBD01 | RY | ---- | -- | 87.0 | -- | 0.1 | -- | 533.5 | -- | 0.3 | -- | 6.1 | RESISTOR |
| AEBD01 | RY | RB01 | -- | 2.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | ADJUSTED |
| AEBD01 | RY | RE02 | -- | 2.0 | -- | 0.0 | -- | 15.0 | -- | 0.0 | -- | 7.5 | MODIFIED |
| AEBD01 | RY | RJ02 | -- | 3.0 | -- | 0.0 | -- | 2.2 | -- | 0.0 | -- | 0.7 | INSP & FOUND OK |
| AEBD01 | RY | RJ07 | -- | 11.0 | -- | 0.0 | -- | 23.4 | -- | 0.0 | -- | 2.1 | TROUBLE SHOOTING |
| AEBD01 | RY | RN03 | -- | 56.0 | -- | 0.0 | -- | 379.7 | -- | 0.2 | -- | 6.8 | REMOVED & REPLACED |
| AEBD01 | RY | RN04 | -- | 3.0 | -- | 0.0 | -- | 27.0 | -- | 0.0 | -- | 9.0 | REMOVED TO REPAIR |
| AEBD01 | RY | RN05 | -- | 4.0 | -- | 0.0 | -- | 58.5 | -- | 0.0 | -- | 14.6 | REPLACED |
| AEBD01 | RY | RN09 | -- | 3.0 | -- | 0.0 | -- | 14.7 | -- | 0.0 | -- | 4.9 | REPLACED MINOR HDWRE |
| AEBD01 | RY | RR10 | -- | 1.0 | -- | 0.0 | -- | 0.7 | -- | 0.0 | -- | 0.7 | REMOVE/REPAIR/REPLACE |
| AEBD01 | RY | RR18 | -- | 2.0 | -- | 0.0 | -- | 4.3 | -- | 0.0 | -- | 2.2 | SERVICED |
| AEBD01 | SM | ---- | 643.0 | -- | 1.6 | -- | 3595.5 | -- | 9.0 | -- | 5.6 | SHAFT | |
| AEBD01 | SM | RB01 | 13.0 | -- | 0.0 | -- | 110.0 | -- | 0.3 | -- | 8.5 | ADJUSTED | |
| AEBD01 | SM | RB04 | 1.0 | -- | 0.0 | -- | 35.0 | -- | 0.1 | -- | 35.0 | TIGHTENED | |
| AEBD01 | SM | RC10 | 11.0 | -- | 0.0 | -- | 37.0 | -- | 0.1 | -- | 3.4 | NO DEFECT FOUND | |
| AEBD01 | SM | RE05 | 2.0 | -- | 0.0 | -- | 21.5 | -- | 0.1 | -- | 10.8 | REBUILT | |
| AEBD01 | SM | RJ02 | 251.0 | -- | 0.6 | -- | 392.0 | -- | 1.0 | -- | 1.6 | INSP & FOUND OK | |
| AEBD01 | SM | RJ03 | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | ORIFICE TEST | |
| AEBD01 | SM | RJ05 | 64.0 | -- | 0.2 | -- | 696.0 | -- | 1.7 | -- | 10.9 | TESTED | |
| AEBD01 | SM | RJ06 | 80.0 | -- | 0.2 | -- | 552.0 | -- | 1.4 | -- | 6.9 | TRACK TEST | |
| AEBD01 | SM | RJ07 | 141.0 | -- | 0.4 | -- | 811.0 | -- | 2.0 | -- | 5.8 | TROUBLE SHOOTING | |
| AEBD01 | SM | RM02 | 3.0 | -- | 0.0 | -- | 36.0 | -- | 0.1 | -- | 12.0 | MISC REPAIRS | |
| AEBD01 | SM | RN03 | 21.0 | -- | 0.1 | -- | 127.0 | -- | 0.3 | -- | 6.0 | REMOVED & REPLACED | |
| AEBD01 | SM | RN05 | 3.0 | -- | 0.0 | -- | 44.0 | -- | 0.1 | -- | 14.7 | REPLACED | |
| AEBD01 | SM | RR03 | 1.0 | -- | 0.0 | -- | 46.0 | -- | 0.1 | -- | 46.0 | DISCONNECTED | |
| AEBD01 | SM | RR04 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | FREED BINDING PARTS | |
| AEBD01 | SM | RR14 | 5.0 | -- | 0.0 | -- | 17.0 | -- | 0.0 | -- | 3.4 | RESFT | |

PATCO MAINTENANCE HIGH-DRIVER BY REPAIR CODE

POWER REGULATOR - CAM
(GPN AEBD01)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE | | RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|-------------|-------|-------|-------|-------------|-------|------------|-------|-------|-----------------------|
| | | | ACTIONS | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBD01 | SM | RR15 | 3.0 | -- | 0.0 | -- | 180.0 | -- | 0.5 | -- | 60.0 | REWIRE |
| AEBD01 | SM | RR24 | 4.0 | -- | 0.0 | -- | 51.0 | -- | 0.1 | -- | 12.8 | TEST & REPAIR |
| AEBD01 | SM | RR28 | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | DISASSEMBLE/BREAKDOWN |
| AEBD01 | SM | RS03 | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 2.0 | DRESSED & FILED |

*

APPENDIX I

Data Extraction No. 9

Logic And Low Voltage By Defect Code

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|-------|---------------------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB00 | -- | --- | 195.0 | 452.0 | 0.5 | 0.3 | 858.0 | 2181.8 | 2.2 | 1.3 | 4.4 | 4.8 | GPN, UCC, D-CODE |
| AEBB00 | 00 | DE1L | 5.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | 1.8 | -- | LOGIC AND LO-V CONTROL NOT DESIGNATED |
| AEBB00 | 00 | DE2L | 3.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 0.7 | -- | TRIPPED CKT BREAKER |
| AEBB00 | 00 | DS2E | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | NO DYNAMIC BRAKE |
| AEBB00 | 00 | DS4C | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 5.0 | -- | SLOW ACCELERATION |
| AEBB00 | IC | ---- | -- | 7.0 | -- | 0.0 | 39.5 | -- | -- | 0.0 | -- | 5.6 | INDUCTOR |
| AEBB00 | IC | DE2A | -- | 1.0 | -- | 0.0 | 8.0 | -- | 0.0 | -- | -- | 8.0 | FLASHED/ARCING |
| AEBB00 | IC | DE2L | -- | 3.0 | -- | 0.0 | 9.5 | -- | 0.0 | -- | -- | 3.2 | TRIPPED CKT BREAKER |
| AEBB00 | IC | DP43 | -- | 1.0 | -- | 0.0 | 12.0 | -- | 0.0 | -- | -- | 12.0 | LOW REFRIGERANT |
| AEBB00 | IC | DS26 | -- | 1.0 | -- | 0.0 | 7.0 | -- | 0.0 | -- | -- | 7.0 | FAILS TO OPERATE |
| AEBB00 | IC | DS2F | -- | 1.0 | -- | 0.0 | 3.0 | -- | 0.0 | -- | -- | 3.0 | NO GO INDICATION |
| AEBB00 | 5N | ---- | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | -- | SUPPORT |
| AEBB00 | 5N | DM32 | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | -- | DEFECTIVE BEARING |
| AEBB00 | 5R | ---- | 3.0 | 18.0 | 0.0 | 0.0 | 5.0 | 67.6 | 0.0 | 1.7 | 19.5 | 3.8 | SWITCH |
| AEBB00 | 5R | DE2L | -- | 1.0 | -- | 0.0 | -- | 19.5 | 0.0 | -- | -- | 19.5 | TRIPPED CKT BREAKER |
| AEBB00 | 5R | DE48 | -- | 7.0 | -- | 0.0 | -- | 30.1 | 0.0 | -- | -- | 4.3 | OVERLOADED MOTOR |
| AEBB00 | 5R | DE74 | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | -- | WELDED CONTACT |
| AEBB00 | 5R | DS12 | -- | 1.0 | -- | 0.0 | -- | 1.0 | 0.0 | -- | -- | 1.0 | ERRATIC OPERATION |
| AEBB00 | 5R | DS13 | 2.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | -- | 1.0 | INTERMITTENT OPER |
| AEBB00 | 5R | DS26 | -- | 5.0 | -- | 0.0 | -- | 9.5 | 0.0 | -- | -- | 1.9 | FAILS TO OPERATE |
| AEBB00 | 5R | DS2C | -- | 1.0 | -- | 0.0 | -- | 2.5 | 0.0 | -- | -- | 2.5 | FAILURE, INTERNAL |
| AEBB00 | 5R | DS43 | -- | 1.0 | -- | 0.0 | -- | 2.0 | 0.0 | -- | -- | 2.0 | ERROR, DISPLAY READOU |
| AEBB00 | 5R | DZ34 | -- | 1.0 | -- | 0.0 | -- | 1.0 | 0.0 | -- | -- | 1.0 | OPEN |
| AEBB00 | 5R | DZ42 | -- | 1.0 | -- | 0.0 | -- | 2.0 | 0.0 | -- | -- | 2.0 | IMPROPER ADJUSTMENT |
| AEBB00 | 64 | ---- | -- | 42.0 | -- | 0.0 | -- | 206.1 | 0.1 | -- | -- | 4.9 | CRADLE |
| AEBB00 | 64 | DE12 | -- | 1.0 | -- | 0.0 | -- | 7.0 | 0.0 | -- | -- | 7.0 | DEFECTIVE PLUG |
| AEBB00 | 64 | DE14 | -- | 2.0 | -- | 0.0 | -- | 11.5 | 0.0 | -- | -- | 5.8 | LOOSE CONNECTION |
| AEBB00 | 64 | DE2L | -- | 2.0 | -- | 0.0 | -- | 2.0 | 0.0 | -- | -- | 1.0 | TRIPPED CKT BREAKER |
| AEBB00 | 64 | DE32 | -- | 1.0 | -- | 0.0 | -- | 4.0 | 0.0 | -- | -- | 4.0 | MISWIRED/CONNECT INCO |
| AEBB00 | 64 | DE48 | -- | 6.0 | -- | 0.0 | -- | 26.2 | 0.0 | -- | -- | 4.4 | OVERLOADED MOTOR |
| AEBB00 | 64 | DE54 | -- | 2.0 | -- | 0.0 | -- | 10.5 | 0.0 | -- | -- | 5.3 | OPEN CIRCUIT |
| AEBB00 | 64 | DE69 | -- | 1.0 | -- | 0.0 | -- | 12.0 | 0.0 | -- | -- | 12.0 | INCORRECT SIGNAL |
| AEBB00 | 64 | DE6L | -- | 1.0 | -- | 0.0 | -- | 15.0 | 0.0 | -- | -- | 15.0 | NO OUTPUT |
| AEBB00 | 64 | DM13 | -- | 3.0 | -- | 0.0 | -- | 21.0 | 0.0 | -- | -- | 7.0 | BROKEN/SHEARED |
| AEBB00 | 64 | DM55 | -- | 1.0 | -- | 0.0 | -- | 4.5 | 0.0 | -- | -- | 4.5 | LOST/MISSING |
| AEBB00 | 64 | DM56 | -- | 1.0 | -- | 0.0 | -- | 3.0 | 0.0 | -- | -- | 3.0 | MISSING MINOR HDWRE |
| AEBB00 | 64 | DM65 | -- | 1.0 | -- | 0.0 | -- | 1.0 | 0.0 | -- | -- | 1.0 | JAM/BINDING/LOCKED |
| AEBB00 | 64 | DN32 | -- | 2.0 | -- | 0.0 | -- | 3.3 | 0.0 | -- | -- | 1.7 | NO DEFECT, PROG MAINT |
| AEBB00 | 64 | DN33 | -- | 9.0 | -- | 0.0 | -- | 35.9 | 0.0 | -- | -- | 4.0 | NO DEFECT, SCHED MOD |
| AEBB00 | 64 | DS13 | -- | 3.0 | -- | 0.0 | -- | 5.5 | 0.0 | -- | -- | 1.8 | INTERMITTENT OPER |
| AEBB00 | 64 | DS26 | -- | 3.0 | -- | 0.0 | -- | 28.2 | 0.0 | -- | -- | 9.4 | FAILS TO OPERATE |
| AEBB00 | 64 | DS2C | -- | 2.0 | -- | 0.0 | -- | 9.5 | 0.0 | -- | -- | 4.8 | FAILURE, INTERNAL |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBB00 | 64 | DZ25 | 1.0 | 0.0 | 0.0 | 0.0 | 6.0 | 0.0 | 0.0 | 6.0 | FAILS DIAGNOSTIC TEST | |
| AEBB00 | 6R | --- | 3.0 | 0.0 | 0.0 | 0.0 | 8.0 | 0.0 | 0.0 | 2.7 | CONTACT | |
| AEBB00 | 6R | DE2P | 2.0 | 0.0 | 0.0 | 0.0 | --- | --- | --- | --- | DEFECTIVE CONTACT TIP | |
| AEBB00 | 6R | DM3D | 1.0 | 0.0 | 0.0 | 0.0 | 8.0 | 0.0 | 0.0 | 8.0 | DEFECTIVE SHUNT | |
| AEBB00 | HE | ---- | 344.0 | 0.2 | 0.0 | 0.0 | 1673.0 | 1.0 | 1.0 | 4.9 | HARDWARE | |
| AEBB00 | HE | DC22 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | FROZEN | |
| AEBB00 | HE | DD26 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | FOREIGN OBJECT DAMAGE | |
| AEBB00 | HE | DD28 | 25.0 | 0.0 | 0.0 | 0.0 | 83.0 | 0.1 | 0.1 | 3.3 | LEAKING | |
| AEBB00 | HE | DE12 | 1.0 | 0.0 | 0.0 | 0.0 | 2.3 | 0.0 | 0.0 | 2.3 | DEFECTIVE PLUG | |
| AEBB00 | HE | DE14 | 12.0 | 0.0 | 0.0 | 0.0 | 44.3 | 0.0 | 0.0 | 3.7 | LOOSE CONNECTION | |
| AEBB00 | HE | DE21 | 2.0 | 0.0 | 0.0 | 0.0 | 4.0 | 0.0 | 0.0 | 2.0 | BURNED CONTACT | |
| AEBB00 | HE | DE29 | 2.0 | 0.0 | 0.0 | 0.0 | 6.0 | 0.0 | 0.0 | 3.0 | DIRTY CONTACTS | |
| AEBB00 | HE | DE2A | 15.0 | 0.0 | 0.0 | 0.0 | 145.5 | 0.1 | 0.1 | 9.7 | FLASHED/ARCING | |
| AEBB00 | HE | DE2C | 1.0 | 0.0 | 0.0 | 0.0 | 6.5 | 0.0 | 0.0 | 6.5 | INTERLOCK MALFUNCTION | |
| AEBB00 | HE | DE2L | 5.0 | 0.0 | 0.0 | 0.0 | 23.5 | 0.0 | 0.0 | 4.7 | TRIPPED CKT BREAKER | |
| AEBB00 | HE | DE32 | 5.0 | 0.0 | 0.0 | 0.0 | 14.7 | 0.0 | 0.0 | 2.9 | MISWIRED/CONNECT INCO | |
| AEBB00 | HE | DE48 | 29.0 | 0.0 | 0.0 | 0.0 | 136.3 | 0.1 | 0.1 | 4.7 | OVERLOADED MOTOR | |
| AEBB00 | HE | DE51 | 2.0 | 0.0 | 0.0 | 0.0 | 2.5 | 0.0 | 0.0 | 1.3 | BLOWN FUSE | |
| AEBB00 | HE | DE52 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | BROKEN LEAD | |
| AEBB00 | HE | DE53 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | BURNED OUT BULB | |
| AEBB00 | HE | DE54 | 23.0 | 0.0 | 0.0 | 0.0 | 89.8 | 0.1 | 0.1 | 3.9 | OPEN CIRCUIT | |
| AEBB00 | HE | DE67 | 3.0 | 0.0 | 0.0 | 0.0 | 22.8 | 0.0 | 0.0 | 7.6 | INCORRECT CURRENT | |
| AEBB00 | HE | DE71 | 1.0 | 0.0 | 0.0 | 0.0 | 5.0 | 0.0 | 0.0 | 5.0 | CHANGE OF VALUE | |
| AEBB00 | HE | DE72 | 1.0 | 0.0 | 0.0 | 0.0 | 7.0 | 0.0 | 0.0 | 7.0 | GROUNDED | |
| AEBB00 | HE | DE73 | 6.0 | 0.0 | 0.0 | 0.0 | 23.5 | 0.0 | 0.0 | 3.9 | SHORTED | |
| AEBB00 | HE | DE74 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | WELDED CONTACT | |
| AEBB00 | HE | DM13 | 13.0 | 0.0 | 0.0 | 0.0 | 34.9 | 0.0 | 0.0 | 2.7 | BROKEN/SHEARED | |
| AEBB00 | HE | DM14 | 10.0 | 0.0 | 0.0 | 0.0 | 39.2 | 0.0 | 0.0 | 3.9 | CRACKED | |
| AEBB00 | HE | DM38 | 5.0 | 0.0 | 0.0 | 0.0 | 47.5 | 0.0 | 0.0 | 9.5 | DETERIORATED | |
| AEBB00 | HE | DM3C | 6.0 | 0.0 | 0.0 | 0.0 | 5.7 | 0.0 | 0.0 | 0.9 | STRIPPED | |
| AEBB00 | HE | DM41 | 1.0 | 0.0 | 0.0 | 0.0 | 5.0 | 0.0 | 0.0 | 5.0 | BENT/BUCKLED/DENTED | |
| AEBB00 | HE | DM51 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | CHIPPED/PEELING | |
| AEBB00 | HE | DM53 | 2.0 | 0.0 | 0.0 | 0.0 | 1.7 | 0.0 | 0.0 | 0.9 | LOOSE | |
| AEBB00 | HE | DM54 | 1.0 | 0.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | LOOSE/DAMAGED COMM HD | |
| AEBB00 | HE | DM55 | 9.0 | 0.0 | 0.0 | 0.0 | 20.3 | 0.0 | 0.0 | 2.3 | LOST/MISSING | |
| AEBB00 | HE | DM5B | 3.0 | 0.0 | 0.0 | 0.0 | 14.0 | 0.0 | 0.0 | 4.7 | WORN | |
| AEBB00 | HE | DM5C | 5.0 | 0.0 | 0.0 | 0.0 | 18.2 | 0.0 | 0.0 | 3.6 | WORN BEYOND LIMITS | |
| AEBB00 | HE | DM65 | 2.0 | 0.0 | 0.0 | 0.0 | 1.1 | 0.0 | 0.0 | 0.5 | JAM/BINDING/LOCKED | |
| AEBB00 | HE | DM67 | 1.0 | 0.0 | 0.0 | 0.0 | 0.7 | 0.0 | 0.0 | 0.7 | STICKING | |
| AEBB00 | HE | DM72 | 34.0 | 0.0 | 0.0 | 0.0 | 386.9 | 0.2 | 0.2 | 11.4 | BURNED | |
| AEBB00 | HE | DM74 | 1.0 | 0.0 | 0.0 | 0.0 | 15.0 | 0.0 | 0.0 | 15.0 | CRYSTALIZED | |
| AEBB00 | HE | DM75 | 23.0 | 0.0 | 0.0 | 0.0 | 122.5 | 0.1 | 0.1 | 5.3 | HOT/OVERHEATED | |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBB00 | HE | DN11 | -- | 2.0 | -- | 0.0 | -- | 1.7 | -- | 0.0 | -- | GPN,UCC,D-CODE |
| AEBB00 | HE | DN13 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | FAILURE, CANNOT DUP |
| AEBB00 | HE | DN32 | -- | 24.0 | -- | 0.0 | -- | 57.2 | -- | 0.0 | -- | NO DEFECT, OPER ERROR |
| AEBB00 | HE | DN33 | -- | 6.0 | -- | 0.0 | -- | 33.5 | -- | 0.0 | -- | NO DEFECT, PROG MAINT |
| AEBB00 | HE | DS12 | -- | 5.0 | -- | 0.0 | -- | 8.2 | -- | 0.0 | -- | NO DEFECT, SCHED MOD |
| AEBB00 | HE | DS13 | -- | 5.0 | -- | 0.0 | -- | 32.6 | -- | 0.0 | -- | ERRATIC OPERATION |
| AEBB00 | HE | DS26 | -- | 8.0 | -- | 0.0 | -- | 33.5 | -- | 0.0 | -- | INTERMITTENT OPER |
| AEBB00 | HE | DS2C | -- | 14.0 | -- | 0.0 | -- | 74.8 | -- | 0.0 | -- | FAILS TO OPERATE |
| AEBB00 | HE | DS2V | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | FAILURE, INTERNAL |
| AEBB00 | HE | DS48 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | TURN OFF, WILL NOT |
| AEBB00 | HE | DS4E | -- | 2.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | LOW PRESSURE |
| AEBB00 | HE | DZ25 | -- | 3.0 | -- | 0.0 | -- | 24.0 | -- | 0.0 | -- | SLUGGISH |
| AEBB00 | HE | DZ34 | -- | 2.0 | -- | 0.0 | -- | 3.5 | -- | 0.0 | -- | FAILS DIAGNOSTIC TEST |
| AEBB00 | HE | DZ42 | -- | 13.0 | -- | 0.0 | -- | 39.0 | -- | 0.0 | -- | OPEN |
| AEBB00 | HE | DZ44 | -- | 2.0 | -- | 0.0 | -- | 8.3 | -- | 0.0 | -- | IMPROPER ADJUSTMENT |
| AEBB00 | PE | DD25 | 157.0 | 5.0 | 0.4 | 0.0 | 654.0 | 6.3 | 1.6 | 0.0 | 4.1 | INCORRECTLY ASSEMBLED |
| AEBB00 | PE | DE13 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 1.3 | PANEL |
| AEBB00 | PE | DE26 | 4.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | FIRE DAMAGE/SMOKE |
| AEBB00 | PE | DE2K | 1.0 | -- | 0.0 | -- | 42.0 | -- | 0.1 | -- | 8.0 | DEFECTIVE WIRING |
| AEBB00 | PE | DE2L | 13.0 | 2.0 | 0.0 | 0.0 | 15.0 | -- | 0.0 | -- | 10.5 | DEFECTIVE RELAY |
| AEBB00 | PE | DE48 | -- | 1.0 | -- | 0.0 | -- | 1.3 | -- | 0.0 | -- | TRIPPED |
| AEBB00 | PE | DE72 | 1.0 | -- | 0.0 | -- | 22.0 | -- | 0.1 | -- | 1.2 | TRIPPED CKT BREAKER |
| AEBB00 | PE | DM44 | 2.0 | -- | 0.0 | -- | 20.0 | -- | 0.1 | -- | 2.0 | OVERLOADED MOTOR |
| AEBB00 | PE | DM77 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 22.0 | GROUNDLED |
| AEBB00 | PE | DN22 | 19.0 | -- | 0.0 | -- | 59.0 | -- | 0.1 | -- | 10.0 | OUT OF BAL/TOL |
| AEBB00 | PE | DN32 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | DEFECTIVE INTERLOCK |
| AEBB00 | PE | DN33 | 36.0 | -- | 0.1 | -- | 95.0 | -- | 0.2 | -- | 8.0 | NO DEFECT, PROG MAINT |
| AEBB00 | PE | DS13 | 3.0 | -- | 0.0 | -- | 45.0 | -- | 0.1 | -- | 2.6 | NO DEFECT, SCHED MOD |
| AEBB00 | PE | DS23 | 11.0 | -- | 0.0 | -- | 52.0 | -- | 0.1 | -- | 15.0 | INTERMITTENT OPER |
| AEBB00 | PE | DS2E | 13.0 | -- | 0.0 | -- | 79.0 | -- | 0.2 | -- | 4.7 | DEAD CAR |
| AEBB00 | PE | DS2L | 2.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | -- | 6.1 | NO DYNAMIC BRAKE |
| AEBB00 | PE | DS4C | 2.0 | -- | 0.0 | -- | 21.0 | -- | 0.1 | -- | 7.0 | OPERATE, WILL NOT |
| AEBB00 | PE | DW42 | 2.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | -- | 10.5 | SLOW ACCELERATION |
| AEBB00 | PE | DZ42 | 5.0 | 1.0 | 0.0 | 0.0 | 41.0 | 2.0 | 0.1 | 0.0 | 5.5 | DEFECTIVE WHEEL TREAD |
| AEBB00 | PJ | ---- | 40.0 | -- | 0.1 | -- | 108.0 | -- | 0.3 | -- | 8.2 | IMPROPER ADJUSTMENT |
| AEBB00 | PJ | DD28 | -- | 27.0 | -- | 0.0 | -- | 138.8 | -- | 0.1 | 2.7 | NOT DESIGNATED |
| AEBB00 | PJ | DE14 | -- | 1.0 | -- | 0.0 | -- | 0.1 | -- | 0.0 | 5.1 | PC BOARD (CARD) |
| AEBB00 | PJ | DE21 | -- | 1.0 | -- | 0.0 | -- | 0.1 | -- | 0.0 | 0.1 | LEAKING |
| AEBB00 | PJ | DE48 | -- | 5.0 | -- | 0.0 | -- | 37.6 | -- | 0.0 | 1.5 | LOOSE CONNECTION |
| AEBB00 | PJ | DE54 | -- | 2.0 | -- | 0.0 | -- | 22.5 | -- | 0.0 | 7.5 | BURNED CONTACT |
| AEBB00 | PJ | DE54 | -- | 2.0 | -- | 0.0 | -- | 22.5 | -- | 0.0 | 11.3 | OVERLOADED MOTOR |
| AEBB00 | PJ | DE54 | -- | 2.0 | -- | 0.0 | -- | 22.5 | -- | 0.0 | 11.3 | OPEN CIRCUIT |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB00 | PJ | DE6A | -- | 2.0 | -- | 0.0 | 20.5 | -- | 0.0 | -- | 10.3 | INCORRECT TIME DELAY | |
| AEBB00 | PJ | DM72 | -- | 1.0 | -- | 0.0 | 3.0 | -- | 0.0 | -- | 3.0 | BURNED | |
| AEBB00 | PJ | DM75 | -- | 2.0 | -- | 0.0 | 23.0 | -- | 0.0 | -- | 11.5 | HOT/OVERHEATED | |
| AEBB00 | PJ | DN11 | -- | 1.0 | -- | 0.0 | 3.0 | -- | 0.0 | -- | 3.0 | FAILURE, CANNOT DUP | |
| AEBB00 | PJ | DS12 | -- | 3.0 | -- | 0.0 | 9.0 | -- | 0.0 | -- | 3.0 | ERRATIC OPERATION | |
| AEBB00 | PJ | DS13 | -- | 1.0 | -- | 0.0 | 2.0 | -- | 0.0 | -- | 2.0 | INTERMITTENT OPER | |
| AEBB00 | PJ | DS26 | -- | 2.0 | -- | 0.0 | 2.5 | -- | 0.0 | -- | 1.3 | FAILS TO OPERATE | |
| AEBB00 | PJ | DS2C | -- | 4.0 | -- | 0.0 | 12.0 | -- | 0.0 | -- | 3.0 | FAILURE, INTERNAL | |
| AEBB00 | PJ | DZ25 | -- | 1.0 | -- | 0.0 | 2.0 | -- | 0.0 | -- | 2.0 | FAILS DIAGNOSTIC TEST | |
| AEBB00 | RU | ---- | 22.0 | -- | 0.1 | -- | -- | 113.0 | 0.3 | -- | 5.1 | RELAY | |
| AEBB00 | RU | DE26 | 6.0 | -- | 0.0 | -- | 31.0 | -- | 0.1 | -- | 5.2 | DEFECTIVE RELAY | |
| AEBB00 | RU | DE2K | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | TRIPPED | |
| AEBB00 | RU | DE2L | 1.0 | -- | 0.0 | -- | 12.0 | -- | 0.0 | -- | 12.0 | TRIPPED CKT BREAKER | |
| AEBB00 | RU | DE2N | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | DEFECTIVE SWITCH | |
| AEBB00 | RU | DM42 | 1.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | CRUSHED/CRIMPED | |
| AEBB00 | RU | DM53 | 2.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 3.0 | LOOSE | |
| AEBB00 | RU | DS13 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | INTERMITTENT OPER | |
| AEBB00 | RU | DS2E | 4.0 | -- | 0.0 | -- | 32.0 | -- | 0.1 | -- | 8.0 | NO DYNAMIC BRAKE | |
| AEBB00 | RU | DZ42 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | IMPROPER ADJUSTMENT | |
| AEBB00 | RY | [] | 4.0 | -- | 0.0 | -- | 12.0 | -- | 0.0 | -- | 3.0 | NOT DESIGNATED | |
| AEBB00 | RY | ---- | -- | 8.0 | -- | 0.0 | 49.0 | -- | 0.0 | -- | 6.1 | RESISTOR | |
| AEBB00 | RY | DE2A | -- | 4.0 | -- | 0.0 | 20.0 | -- | 0.0 | -- | 5.0 | FLASHED/ARCING | |
| AEBB00 | RY | DE54 | -- | 1.0 | -- | 0.0 | 2.0 | -- | 0.0 | -- | 2.0 | OPEN CIRCUIT | |
| AEBB00 | RY | DM72 | -- | 1.0 | -- | 0.0 | 10.5 | -- | 0.0 | -- | 10.5 | BURNED | |
| AEBB00 | RY | DM74 | -- | 1.0 | -- | 0.0 | 15.0 | -- | 0.0 | -- | 15.0 | CRYSTALLIZED | |
| AEBB00 | RY | DM75 | -- | 1.0 | -- | 0.0 | 1.5 | -- | 0.0 | -- | 1.5 | HOT/OVERHEATED | |
| AEBB00 | SU | ---- | 4.0 | -- | 0.0 | -- | 53.0 | -- | 0.1 | -- | 13.3 | SHUNT | |
| AEBB00 | SU | DE13 | 1.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | 9.0 | DEFECTIVE WIRING | |
| AEBB00 | SU | DE2A | 1.0 | -- | 0.0 | -- | 28.0 | -- | 0.1 | -- | 28.0 | FLASHED/ARCING | |
| AEBB00 | SU | DN33 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | NO DEFECT, SCHED MOD | |
| AEBB00 | SU | [] | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | NOT DESIGNATED | |
| AEBB00 | TX | ---- | -- | 1.0 | -- | 0.0 | 1.5 | -- | 0.0 | -- | 1.5 | TRANSDUCTOR | |
| AEBB00 | TX | DE48 | -- | 1.0 | -- | 0.0 | 1.5 | -- | 0.0 | -- | 1.5 | OVERLOADED MOTOR | |
| AEBB01 | DF | ---- | 41.0 | -- | 0.1 | -- | 101.0 | -- | 0.3 | -- | 2.5 | ANNUNCIATOR | |
| AEBB01 | DF | DE26 | 41.0 | -- | 0.1 | -- | 101.0 | -- | 0.3 | -- | 2.5 | DETECTOR | |
| AEBB01 | DF | DE2K | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | DEFECTIVE RELAY | |
| AEBB01 | DF | DN22 | 13.0 | -- | 0.0 | -- | 15.0 | -- | 0.0 | -- | 1.5 | TRIPPED | |
| AEBB01 | DF | DS23 | 1.0 | -- | 0.0 | -- | 48.0 | -- | 0.1 | -- | 3.7 | NO DEFECT, COMP REM | |
| AEBB01 | DF | DS2L | 4.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | DEAD CAR | |
| AEBB01 | DF | DZ42 | 1.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | 2.3 | OPERATE, WILL NOT | |
| AEBB01 | DF | [] | 11.0 | -- | 0.0 | -- | 19.0 | -- | 0.0 | -- | 1.7 | IMPROPER ADJUSTMENT | |
| AEBB01 | DF | [] | -- | -- | -- | -- | -- | -- | -- | -- | -- | NOT DESIGNATED | |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|---------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBB03 | | | 5.0 | | 0.0 | | 4.0 | | 0.0 | | 0.8 | CIRCUIT PROTECTION |
| AEBB03 | PJ | | 5.0 | | 0.0 | | 4.0 | | 0.0 | | 0.8 | PC BOARD (CARD) |
| AEBB03 | PJ | DE2K | 2.0 | | 0.0 | | 3.0 | | 0.0 | | 1.5 | TRIPPED |
| AEBB03 | PJ | DE2P | 1.0 | | 0.0 | | 1.0 | | 0.0 | | 1.0 | DEFECTIVE CONTACT TIP |
| AEBB03 | PJ | DS13 | 1.0 | | 0.0 | | | | | | | INTERMITTENT OPER |
| AEBB03 | PJ | DS2L | 1.0 | | 0.0 | | | | | | | OPERATE, WILL NOT |
| AEBB04 | | | 4.0 | 110.0 | 0.0 | 0.1 | 9.0 | 251.7 | 0.0 | 0.2 | 2.3 | ELECTROMOTIVE BRAKING CON |
| AEBB04 | 5R | | 3.0 | | 0.0 | | 6.0 | | 0.0 | | 2.0 | SWITCH |
| AEBB04 | 5R | DE2N | 3.0 | | 0.0 | | 6.0 | | 0.0 | | 2.0 | DEFECTIVE SWITCH |
| AEBB04 | PJ | | 1.0 | 106.0 | 0.0 | 0.1 | 3.0 | 233.0 | 0.0 | 0.1 | 3.0 | PC BOARD (CARD) |
| AEBB04 | PJ | DD24 | | | 0.0 | | | 0.3 | 0.0 | 0.0 | 0.3 | DESTROYED |
| AEBB04 | PJ | DE14 | | | 0.0 | | | 1.3 | 0.0 | 0.0 | 1.3 | LOOSE CONNECTION |
| AEBB04 | PJ | DE2L | | | 0.0 | | | 3.8 | 0.0 | 0.0 | 1.3 | TRIPPED CKT BREAKER |
| AEBB04 | PJ | DE48 | | | 0.0 | | | 11.0 | 0.0 | 0.0 | 3.7 | OVERLOADED MOTOR |
| AEBB04 | PJ | DE65 | | | 0.0 | | | 1.3 | 0.0 | 0.0 | 1.3 | HIGH VOLTAGE |
| AEBB04 | PJ | DE67 | | | 0.0 | | | 20.4 | 0.0 | 0.0 | 4.1 | INCORRECT CURRENT |
| AEBB04 | PJ | DE69 | | | 0.0 | | | 10.6 | 0.0 | 0.0 | 1.2 | INCORRECT SIGNAL |
| AEBB04 | PJ | DE6F | | | 0.0 | | | 2.0 | 0.0 | 0.0 | 2.0 | LOW VOLTAGE |
| AEBB04 | PJ | DE6L | | | 0.0 | | | 4.6 | 0.0 | 0.0 | 2.3 | NO OUTPUT |
| AEBB04 | PJ | DM13 | | | 0.0 | | | 0.7 | 0.0 | 0.0 | 0.4 | BROKEN/SHEARED |
| AEBB04 | PJ | DM23 | | | 0.0 | | | 1.0 | 0.0 | 0.0 | 1.0 | DIRTY |
| AEBB04 | PJ | DM53 | | | 0.0 | | | 1.0 | 0.0 | 0.0 | 1.0 | LOOSE |
| AEBB04 | PJ | DN11 | | | 0.0 | | | 11.0 | 0.0 | 0.0 | 3.7 | FAILURE, CANNOT DUP |
| AEBB04 | PJ | DN32 | | | 0.0 | | | 7.2 | 0.0 | 0.0 | 1.8 | NO DEFECT, PROG MAINT |
| AEBB04 | PJ | DN33 | | | 0.0 | | | 10.3 | 0.0 | 0.0 | 2.1 | NO DEFECT, SCHED MOD |
| AEBB04 | PJ | DS11 | | | 0.0 | | | | | | | CHATTERING |
| AEBB04 | PJ | DS12 | | | 0.0 | | | 27.6 | 0.0 | 0.0 | 3.4 | ERRATIC OPERATION |
| AEBB04 | PJ | DS13 | | | 0.0 | | | 15.7 | 0.0 | 0.0 | 3.1 | INTERMITTENT OPER |
| AEBB04 | PJ | DS26 | | | 0.0 | | | 69.6 | 0.0 | 0.0 | 2.2 | FAILS TO OPERATE |
| AEBB04 | PJ | DS2C | | | 0.0 | | | 31.1 | 0.0 | 0.0 | 1.8 | FAILURE, INTERNAL |
| AEBB04 | PJ | DS2L | 1.0 | | 0.0 | | 3.0 | | 0.0 | 3.0 | | OPERATE, WILL NOT |
| AEBB04 | PJ | DS2V | | | 0.0 | | | 1.5 | 0.0 | 0.0 | 1.5 | TURN OFF, WILL NOT |
| AEBB04 | PJ | DZ13 | | | 0.0 | | | 18.7 | 0.0 | 0.0 | 1.0 | FAILED SAFETY TEST |
| AEBB04 | RU | | | | 0.0 | | | 2.2 | 0.0 | 0.0 | 4.7 | RELAY |
| AEBB04 | RU | DC21 | | | 0.0 | | | | 0.0 | 0.0 | 2.2 | CORRODED |
| AEBB04 | RU | DE2L | | | 0.0 | | | 0.5 | 0.0 | 0.0 | 0.5 | TRIPPED CKT BREAKER |
| AEBB04 | RU | DE48 | | | 0.0 | | | 11.0 | 0.0 | 0.0 | 11.0 | OVERLOADED MOTOR |
| AEBB04 | RU | DZ42 | | | 0.0 | | | 5.0 | 0.0 | 0.0 | 5.0 | IMPROPER ADJUSTMENT |
| AEBB05 | | | 73.0 | | 0.2 | | 409.5 | | 1.0 | | 5.6 | PERFORMANCE MODIFICATION |
| AEBB05 | HT | | 2.0 | | 0.0 | | 18.0 | | 0.0 | | 9.0 | HOSE |
| AEBB05 | HT | DD28 | 1.0 | | 0.0 | | 2.0 | | 0.0 | | 2.0 | LEAKING |
| AEBB05 | HT | DN33 | 1.0 | | 0.0 | | 16.0 | | 0.0 | | 16.0 | NO DEFECT, SCHED MOD |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--).

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB05 | PE | --- | 17.0 | -- | 0.0 | -- | 78.0 | -- | 0.2 | -- | 4.6 | -- | PANEL |
| AEBB05 | PE | DM44 | 2.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 2.5 | -- | OUT OF BAL/TOL |
| AEBB05 | PE | DS13 | 7.0 | -- | 0.0 | -- | 23.0 | -- | 0.1 | -- | 3.3 | -- | INTERMITTENT OPER |
| AEBB05 | PE | DS23 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | -- | DEAD CAR |
| AEBB05 | PE | DS2L | 3.0 | -- | 0.0 | -- | 21.0 | -- | 0.1 | -- | 7.0 | -- | OPERATE, WILL NOT |
| AEBB05 | PE | DZ42 | 2.0 | -- | 0.0 | -- | 19.0 | -- | 0.0 | -- | 9.5 | -- | IMPROPER ADJUSTMENT |
| AEBB05 | PE | [] | 2.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 2.0 | -- | NOT DESIGNATED |
| AEBB05 | PJ | --- | 36.0 | -- | 0.1 | -- | 151.5 | -- | 0.4 | -- | 4.2 | -- | PC BOARD (CARD) |
| AEBB05 | PJ | DE26 | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | -- | DEFECTIVE RELAY |
| AEBB05 | PJ | DM44 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | -- | OUT OF BAL/TOL |
| AEBB05 | PJ | DN22 | 8.0 | -- | 0.0 | -- | 37.0 | -- | 0.1 | -- | 4.6 | -- | NO DEFECT, COMP REM |
| AEBB05 | PJ | DN33 | 1.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | -- | 11.0 | -- | NO DEFECT, SCHED MOD |
| AEBB05 | PJ | DS13 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | INTERMITTENT OPER |
| AEBB05 | PJ | DS2E | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 5.0 | -- | NO DYNAMIC BRAKE |
| AEBB05 | PJ | DS2L | 4.0 | -- | 0.0 | -- | 15.0 | -- | 0.0 | -- | 3.8 | -- | OPERATE, WILL NOT |
| AEBB05 | PJ | DW34 | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | EXCESSIVE SLIP |
| AEBB05 | PJ | DW42 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | DEFECTIVE WHEEL TREAD |
| AEBB05 | PJ | DZ42 | 16.0 | -- | 0.0 | -- | 42.5 | -- | 0.1 | -- | 2.7 | -- | IMPROPER ADJUSTMENT |
| AEBB05 | PJ | [] | 1.0 | -- | 0.0 | -- | 7.0 | -- | 0.0 | -- | 7.0 | -- | NOT DESIGNATED |
| AEBB05 | RB | --- | 4.0 | -- | 0.0 | -- | 61.0 | -- | 0.2 | -- | 15.3 | -- | RACK |
| AEBB05 | RB | DE72 | 2.0 | -- | 0.0 | -- | 40.0 | -- | 0.1 | -- | 20.0 | -- | GROUNDING |
| AEBB05 | RB | DS23 | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | -- | DEAD CAR |
| AEBB05 | RU | DW22 | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 5.0 | -- | FLAT SPOT |
| AEBB05 | RU | --- | 2.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | -- | RELAY |
| AEBB05 | RU | DE26 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | DEFECTIVE RELAY |
| AEBB05 | RU | DS13 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | INTERMITTENT OPER |
| AEBB05 | TW | --- | 3.0 | -- | 0.0 | -- | 20.0 | -- | 0.1 | -- | 6.7 | -- | TRANSDUCER |
| AEBB05 | TW | DM44 | 2.0 | -- | 0.0 | -- | 18.0 | -- | 0.0 | -- | 9.0 | -- | OUT OF BAL/TOL |
| AEBB05 | TW | DS13 | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | INTERMITTENT OPER |
| AEBB05 | WE | --- | 9.0 | -- | 0.0 | -- | 73.0 | -- | 0.2 | -- | 8.1 | -- | WHEEL |
| AEBB05 | WE | DE72 | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | -- | GROUNDING |
| AEBB05 | WE | DN22 | 8.0 | -- | 0.0 | -- | 57.0 | -- | 0.1 | -- | 7.1 | -- | NO DEFECT, COMP REM |
| AEBB06 | PJ | --- | 47.0 | -- | 0.0 | -- | 149.9 | -- | 0.1 | -- | 3.2 | -- | DECODE/ENCODE |
| AEBB06 | PJ | DE14 | 47.0 | -- | 0.0 | -- | 149.9 | -- | 0.1 | -- | 3.2 | -- | PC BOARD (CARD) |
| AEBB06 | PJ | DE2A | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | LOOSE CONNECTION |
| AEBB06 | PJ | DE2L | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | FLASHED/ARCING |
| AEBB06 | PJ | DE48 | 4.0 | -- | 0.0 | -- | 9.3 | -- | 0.0 | -- | 2.3 | -- | TRIPPED CKT BREAKER |
| AEBB06 | PJ | DE54 | 6.0 | -- | 0.0 | -- | 38.5 | -- | 0.0 | -- | 6.4 | -- | OVERLOADED MOTOR |
| AEBB06 | PJ | DE5A | 2.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.3 | -- | OPEN CIRCUIT |
| AEBB06 | PJ | DE67 | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | -- | INCORRECT CURRENT |
| AEBB06 | PJ | DE69 | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.5 | -- | INCORRECT SIGNAL |
| AEBB06 | PJ | DE73 | 2.0 | -- | 0.0 | -- | 7.5 | -- | 0.0 | -- | 3.8 | -- | SHORTED |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|----------------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB06 | PJ | DM65 | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | 0.3 | JAM/BINDING/LOCKED |
| AEBB06 | PJ | DN32 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | NO DEFECT, PROG MAINT |
| AEBB06 | PJ | DN33 | -- | 11.0 | -- | 0.0 | -- | 34.4 | -- | 0.0 | -- | 3.1 | NO DEFECT, SCHED MOD |
| AEBB06 | PJ | DS12 | -- | 2.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 1.5 | ERRATIC OPERATION |
| AEBB06 | PJ | DS13 | -- | 4.0 | -- | 0.0 | -- | 14.3 | -- | 0.0 | -- | 3.6 | INTERMITTENT OPER |
| AEBB06 | PJ | DS26 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | FAILS TO OPERATE |
| AEBB06 | PJ | DS2C | -- | 8.0 | -- | 0.0 | -- | 29.1 | -- | 0.0 | -- | 3.6 | FAILURE, INTERNAL |
| AEBB06 | PJ | DZ25 | -- | 1.0 | -- | 0.0 | -- | 1.5 | -- | 0.0 | -- | 1.5 | FAILS DIAGNOSTIC TEST |
| AEBB07 | -- | ---- | 3.0 | 817.0 | 0.0 | 0.5 | 21.0 | 2323.5 | 0.1 | 1.4 | 7.0 | 2.8 | POWER SUPPLY |
| AEBB07 | PJ | ---- | 3.0 | 817.0 | 0.0 | 0.5 | 21.0 | 2323.5 | 0.1 | 1.4 | 7.0 | 2.8 | PC BOARD (CARD) |
| AEBB07 | PJ | DD11 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.5 | ACCIDENT/COLLISION |
| AEBB07 | PJ | DE14 | -- | 14.0 | -- | 0.0 | -- | 13.2 | -- | 0.0 | -- | 0.9 | LOOSE CONNECTION |
| AEBB07 | PJ | DE2A | -- | 29.0 | -- | 0.0 | -- | 330.3 | -- | 0.2 | -- | 11.4 | FLASHED/ARCING |
| AEBB07 | PJ | DE2K | -- | 1.0 | -- | 0.0 | -- | 2.2 | -- | 0.0 | -- | 2.2 | TRIPPED |
| AEBB07 | PJ | DE2L | -- | 508.0 | -- | 0.3 | -- | 1001.5 | -- | 0.6 | -- | 2.0 | TRIPPED CKT BREAKER |
| AEBB07 | PJ | DE32 | -- | 6.0 | -- | 0.0 | -- | 30.1 | -- | 0.0 | -- | 5.0 | MISWIRED/CONNECT INCO |
| AEBB07 | PJ | DE48 | -- | 29.0 | -- | 0.0 | -- | 162.0 | -- | 0.1 | -- | 5.6 | OVERLOADED MOTOR |
| AEBB07 | PJ | DE51 | -- | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 5.0 | BLOWN FUSE |
| AEBB07 | PJ | DE54 | -- | 3.0 | -- | 0.0 | -- | 6.5 | -- | 0.0 | -- | 2.2 | OPEN CIRCUIT |
| AEBB07 | PJ | DE65 | -- | 4.0 | -- | 0.0 | -- | 17.5 | -- | 0.0 | -- | 4.4 | HIGH VOLTAGE |
| AEBB07 | PJ | DE67 | -- | 9.0 | -- | 0.0 | -- | 22.1 | -- | 0.0 | -- | 2.5 | INCORRECT CURRENT |
| AEBB07 | PJ | DE69 | -- | 4.0 | -- | 0.0 | -- | 8.8 | -- | 0.0 | -- | 2.2 | INCORRECT SIGNAL |
| AEBB07 | PJ | DE6F | -- | 48.0 | -- | 0.0 | -- | 139.2 | -- | 0.1 | -- | 2.9 | LOW VOLTAGE |
| AEBB07 | PJ | DE6J | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | NO INPUT |
| AEBB07 | PJ | DE6L | -- | 27.0 | -- | 0.0 | -- | 58.5 | -- | 0.0 | -- | 2.2 | NO OUTPUT |
| AEBB07 | PJ | DE73 | -- | 4.0 | -- | 0.0 | -- | 34.0 | -- | 0.0 | -- | 8.5 | SHORTED |
| AEBB07 | PJ | DM13 | -- | 1.0 | -- | 0.0 | -- | 1.1 | -- | 0.0 | -- | 1.1 | BROKEN/SHEARED |
| AEBB07 | PJ | DM32 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | DEFECTIVE BEARING |
| AEBB07 | PJ | DM3C | -- | 4.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 0.8 | STRIPPED |
| AEBB07 | PJ | DM44 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | OUT OF BAL/TOL | |
| AEBB07 | PJ | DM53 | -- | 1.0 | -- | 0.0 | -- | 0.2 | -- | 0.0 | -- | 0.2 | LOOSE |
| AEBB07 | PJ | DM57 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | UNSEATED |
| AEBB07 | PJ | DM72 | -- | 9.0 | -- | 0.0 | -- | 139.5 | -- | 0.1 | -- | 15.5 | BURNED |
| AEBB07 | PJ | DM75 | -- | 2.0 | -- | 0.0 | -- | 10.0 | -- | 0.0 | -- | 5.0 | HOT/OVERHEATED |
| AEBB07 | PJ | DN11 | -- | 4.0 | -- | 0.0 | -- | 9.5 | -- | 0.0 | -- | 2.4 | FAILURE, CANNOT DUP |
| AEBB07 | PJ | DN32 | -- | 9.0 | -- | 0.0 | -- | 36.6 | -- | 0.0 | -- | 4.1 | NO DEFECT, PROG MAINT |
| AEBB07 | PJ | DN33 | -- | 19.0 | -- | 0.0 | -- | 69.0 | -- | 0.0 | -- | 3.6 | NO DEFECT, SCHED MOD |
| AEBB07 | PJ | DS12 | -- | 7.0 | -- | 0.0 | -- | 20.7 | -- | 0.0 | -- | 3.0 | ERRATIC OPERATION |
| AEBB07 | PJ | DS13 | -- | 11.0 | -- | 0.0 | -- | 30.7 | -- | 0.0 | -- | 2.8 | INTERMITTENT OPER |
| AEBB07 | PJ | DS23 | 1.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | -- | 11.0 | DEAD CAR | |
| AEBB07 | PJ | DS26 | -- | 27.0 | -- | 0.0 | -- | 69.9 | -- | 0.0 | -- | 2.6 | FAILS TO OPERATE |
| AEBB07 | PJ | DS2C | -- | 21.0 | -- | 0.0 | -- | 62.4 | -- | 0.0 | -- | 3.0 | FAILURE, INTERNAL |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------------------------|-----------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB07 | PJ | DS2D | 1.0 | 0.0 | 0.0 | 0.0 | 1.6 | 0.0 | 0.0 | 0.0 | 1.6 | INOP CHANNEL SELECTOR | |
| AEBB07 | PJ | DS2L | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | OPERATE, WILL NOT | | |
| AEBB07 | PJ | DZ19 | 1.0 | 0.0 | 0.0 | 0.0 | 4.0 | 0.0 | 0.0 | 4.0 | REM FOR OTHER MAINT A | | |
| AEBB07 | PJ | DZ25 | 2.0 | 0.0 | 0.0 | 0.0 | 1.5 | 0.0 | 0.0 | 0.8 | FAILS DIAGNOSTIC TEST | | |
| AEBB07 | PJ | DZ42 | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | IMPROPER ADJUSTMENT | | |
| AEBB07 | PJ | DZ44 | 1.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.1 | INCORRECTLY ASSEMBLED | | |
| AEBB07 | PJ | [] | 5.0 | 0.0 | 0.0 | 0.0 | 19.3 | 0.0 | 0.0 | 3.9 | NOT DESIGNATED | | |
| AEBB08 | -- | ---- | 254.0 | 0.2 | 0.2 | 0.2 | 877.5 | 0.5 | 0.5 | 3.5 | BUFFER/DRIVER/ISOLATION | | |
| AEBB08 | PJ | ---- | 254.0 | 0.2 | 0.2 | 0.2 | 877.5 | 0.5 | 0.5 | 3.5 | PC BOARD (CARD) | | |
| AEBB08 | PJ | DE14 | 3.0 | 0.0 | 0.0 | 0.0 | 2.2 | 0.0 | 0.0 | 0.7 | LOOSE CONNECTION | | |
| AEBB08 | PJ | DE2A | 6.0 | 0.0 | 0.0 | 0.0 | 63.0 | 0.0 | 0.0 | 10.5 | FLASHED/ARCING | | |
| AEBB08 | PJ | DE2L | 8.0 | 0.0 | 0.0 | 0.0 | 11.4 | 0.0 | 0.0 | 1.4 | TRIPPED CKT BREAKER | | |
| AEBB08 | PJ | DE32 | 1.0 | 0.0 | 0.0 | 0.0 | 6.0 | 0.0 | 0.0 | 6.0 | MISWIRED/CONNECT INCO | | |
| AEBB08 | PJ | DE48 | 39.0 | 0.0 | 0.0 | 0.0 | 152.2 | 0.1 | 0.1 | 3.9 | OVERLOADED MOTOR | | |
| AEBB08 | PJ | DE52 | 1.0 | 0.0 | 0.0 | 0.0 | 1.7 | 0.0 | 0.0 | 1.7 | BROKEN LEAD | | |
| AEBB08 | PJ | DE54 | 10.0 | 0.0 | 0.0 | 0.0 | 34.6 | 0.0 | 0.0 | 3.5 | OPEN CIRCUIT | | |
| AEBB08 | PJ | DE67 | 5.0 | 0.0 | 0.0 | 0.0 | 26.0 | 0.0 | 0.0 | 5.2 | INCORRECT CURRENT | | |
| AEBB08 | PJ | DE69 | 8.0 | 0.0 | 0.0 | 0.0 | 13.3 | 0.0 | 0.0 | 1.7 | INCORRECT SIGNAL | | |
| AEBB08 | PJ | DE6L | 2.0 | 0.0 | 0.0 | 0.0 | 16.0 | 0.0 | 0.0 | 8.0 | NO OUTPUT | | |
| AEBB08 | PJ | DE71 | 2.0 | 0.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 1.5 | CHANGE OF VALUE | | |
| AEBB08 | PJ | DE73 | 1.0 | 0.0 | 0.0 | 0.0 | 3.0 | 0.0 | 0.0 | 3.0 | SHORTED | | |
| AEBB08 | PJ | DM23 | 1.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | DIRTY | | |
| AEBB08 | PJ | DM55 | 1.0 | 0.0 | 0.0 | 0.0 | 0.5 | 0.0 | 0.0 | 0.5 | LOST/MISSING | | |
| AEBB08 | PJ | DM56 | 1.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.2 | MISSING MINOR HDWRE | | |
| AEBB08 | PJ | DM65 | 1.0 | 0.0 | 0.0 | 0.0 | 0.6 | 0.0 | 0.0 | 0.6 | JAM/BINDING/LOCKED | | |
| AEBB08 | PJ | DM72 | 3.0 | 0.0 | 0.0 | 0.0 | 23.1 | 0.0 | 0.0 | 7.7 | BURNED | | |
| AEBB08 | PJ | DM75 | 2.0 | 0.0 | 0.0 | 0.0 | 8.0 | 0.0 | 0.0 | 4.0 | HOT/OVERHEATED | | |
| AEBB08 | PJ | DN32 | 4.0 | 0.0 | 0.0 | 0.0 | 7.5 | 0.0 | 0.0 | 1.9 | NO DEFECT, PROG MAINT | | |
| AEBB08 | PJ | DN33 | 30.0 | 0.0 | 0.0 | 0.0 | 65.5 | 0.0 | 0.0 | 2.2 | NO DEFECT, SCHED MOD | | |
| AEBB08 | PJ | DP52 | 1.0 | 0.0 | 0.0 | 0.0 | 5.0 | 0.0 | 0.0 | 5.0 | RESTRICTED AIR FLOW | | |
| AEBB08 | PJ | DS12 | 11.0 | 0.0 | 0.0 | 0.0 | 24.0 | 0.0 | 0.0 | 2.2 | ERRATIC OPERATION | | |
| AEBB08 | PJ | DS13 | 15.0 | 0.0 | 0.0 | 0.0 | 56.8 | 0.0 | 0.0 | 3.8 | INTERMITTENT OPER | | |
| AEBB08 | PJ | DS26 | 40.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.1 | 0.1 | 2.5 | FAILS TO OPERATE | | |
| AEBB08 | PJ | DS2C | 55.0 | 0.0 | 0.0 | 0.0 | 237.9 | 0.1 | 0.1 | 4.3 | FAILURE, INTERNAL | | |
| AEBB08 | PJ | DS2X | 1.0 | 0.0 | 0.0 | 0.0 | 2.0 | 0.0 | 0.0 | 2.0 | UNABLE TO MOVE | | |
| AEBB08 | PJ | DZ25 | 2.0 | 0.0 | 0.0 | 0.0 | 13.0 | 0.0 | 0.0 | 6.5 | FAILS DIAGNOSTIC TEST | | |
| AEBB09 | -- | ---- | 5.0 | 0.0 | 0.0 | 0.0 | 29.0 | 0.1 | 0.1 | 5.8 | SPEED/TACH | | |
| AEBB09 | PJ | ---- | 5.0 | 0.0 | 0.0 | 0.0 | 29.0 | 0.1 | 0.1 | 5.8 | .PC BOARD (CARD) | | |
| AEBB09 | PJ | DN33 | 3.0 | 0.0 | 0.0 | 0.0 | 11.0 | 0.0 | 0.0 | 3.7 | NO DEFECT, SCHED MOD | | |
| AEBB09 | PJ | DS2L | 2.0 | 0.0 | 0.0 | 0.0 | 18.0 | 0.0 | 0.0 | 9.0 | OPERATE, WILL NOT | | |
| AEBB10 | -- | ---- | 8.0 | 0.3 | 0.3 | 0.3 | 27.0 | 1.2 | 1.2 | 4.1 | ACCELERATION CONTROL | | |
| AEBB10 | PJ | ---- | 8.0 | 0.2 | 0.2 | 0.2 | 27.0 | 0.8 | 0.8 | 3.4 | PC BOARD (CARD) | | |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | |
| AEBB10 | PJ | DE14 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | LOOSE CONNECTION |
| AEBB10 | PJ | DE2A | -- | 5.0 | -- | 0.0 | -- | 54.0 | -- | 0.0 | -- | FLASHED/ARCING |
| AEBB10 | PJ | DE2K | -- | 1.0 | -- | 0.0 | -- | 1.5 | -- | 0.0 | -- | TRIPPED |
| AEBB10 | PJ | DE2L | -- | 8.0 | -- | 0.0 | -- | 18.7 | -- | 0.0 | -- | TRIPPED CKT BREAKER |
| AEBB10 | PJ | DE46 | -- | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | OUT OF ROUND |
| AEBB10 | PJ | DE48 | -- | 74.0 | -- | 0.0 | -- | 366.9 | -- | 0.2 | -- | OVERLOADED MOTOR |
| AEBB10 | PJ | DE54 | -- | 2.0 | -- | 0.0 | -- | 12.6 | -- | 0.0 | -- | OPEN CIRCUIT |
| AEBB10 | PJ | DE67 | -- | 8.0 | -- | 0.0 | -- | 42.5 | -- | 0.0 | -- | INCORRECT CURRENT |
| AEBB10 | PJ | DE69 | -- | 18.0 | -- | 0.0 | -- | 46.5 | -- | 0.0 | -- | INCORRECT SIGNAL |
| AEBB10 | PJ | DE6A | -- | 1.0 | -- | 0.0 | -- | 2.3 | -- | 0.0 | -- | INCORRECT TIME DELAY |
| AEBB10 | PJ | DE6F | -- | 2.0 | -- | 0.0 | -- | 4.1 | -- | 0.0 | -- | LOW VOLTAGE |
| AEBB10 | PJ | DE6L | -- | 4.0 | -- | 0.0 | -- | 13.5 | -- | 0.0 | -- | NO OUTPUT |
| AEBB10 | PJ | DM14 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | CRACKED |
| AEBB10 | PJ | DM23 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | DIRTY |
| AEBB10 | PJ | DM37 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | DELAMINATED |
| AEBB10 | PJ | DM53 | -- | 1.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | LOOSE |
| AEBB10 | PJ | DM65 | -- | 2.0 | -- | 0.0 | -- | 4.6 | -- | 0.0 | -- | JAM/BINDING/LOCKED |
| AEBB10 | PJ | DM72 | -- | 1.0 | -- | 0.0 | -- | 12.0 | -- | 0.0 | -- | BURNED |
| AEBB10 | PJ | DM75 | -- | 2.0 | -- | 0.0 | -- | 9.2 | -- | 0.0 | -- | HOT/OVERHEATED |
| AEBB10 | PJ | DN11 | -- | 3.0 | -- | 0.0 | -- | 7.5 | -- | 0.0 | -- | FAILURE, CANNOT DUP |
| AEBB10 | PJ | DN13 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | NO DEFECT, OPER ERROR |
| AEBB10 | PJ | DN32 | -- | 3.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | -- | NO DEFECT, PROG MAINT |
| AEBB10 | PJ | DN33 | -- | 32.0 | -- | 0.0 | -- | 114.4 | -- | 0.1 | -- | NO DEFECT, SCHED MOD |
| AEBB10 | PJ | DS12 | -- | 27.0 | -- | 0.0 | -- | 116.0 | -- | 0.1 | -- | ERRATIC OPERATION |
| AEBB10 | PJ | DS13 | -- | 20.0 | -- | 0.0 | -- | 63.6 | -- | 0.0 | -- | INTERMITTENT OPER |
| AEBB10 | PJ | DS21 | -- | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | CLOSE, WILL NOT |
| AEBB10 | PJ | DS26 | -- | 25.0 | -- | 0.0 | -- | 66.8 | -- | 0.0 | -- | FAILS TO OPERATE |
| AEBB10 | PJ | DS2C | -- | 61.0 | -- | 0.0 | -- | 287.6 | -- | 0.2 | -- | FAILURE, INTERNAL |
| AEBB10 | PJ | DS2L | 4.0 | 1.0 | 0.0 | 0.0 | 12.0 | 4.0 | 0.0 | 0.0 | 3.0 | OPERATE, WILL NOT |
| AEBB10 | PJ | DS43 | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | ERROR, DISPLAY READOU |
| AEBB10 | PJ | DS4E | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | SLUGGISH |
| AEBB10 | PJ | DZ13 | -- | 1.0 | -- | 0.0 | -- | 0.3 | -- | 0.0 | -- | FAILED SAFETY TEST |
| AEBB10 | PJ | DZ25 | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | FAILS DIAGNOSTIC TEST |
| AEBB10 | PJ | DZ42 | 3.0 | 1.0 | 0.0 | 0.0 | 4.5 | 0.5 | 0.0 | 0.0 | 4.3 | IMPROPER ADJUSTMENT |
| AEBB10 | PJ | DZ43 | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | IMPROPER SPACING/CLEA |
| AEBB10 | PJ | f j | 1.0 | 1.0 | 0.0 | 0.0 | 2.0 | 4.0 | 0.0 | 0.0 | 2.0 | NOT DESIGNATED |
| AEBB10 | RU | ---- | -- | 149.0 | -- | 0.1 | -- | 546.2 | -- | 0.3 | -- | RELAY |
| AEBB10 | RU | DE14 | -- | 12.0 | -- | 0.0 | -- | 51.8 | -- | 0.0 | -- | LOOSE CONNECTION |
| AEBB10 | RU | DE21 | -- | 6.0 | -- | 0.0 | -- | 14.5 | -- | 0.0 | -- | BURNED CONTACT |
| AEBB10 | RU | DE29 | -- | 6.0 | -- | 0.0 | -- | 19.5 | -- | 0.0 | -- | DIRTY CONTACTS |
| AEBB10 | RU | DE2A | -- | 11.0 | -- | 0.0 | -- | 44.6 | -- | 0.0 | -- | FLASHED/ARCING |
| AEBB10 | RU | DE2C | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | INTERLOCK MALFUNCTION |

WMATA MAINTENANCE HIGH-DRIVER BY DEFECT CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | D-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-------|------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB10 | RU | DE2E | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | RELAY COIL MALFUNCTION |
| AEBB10 | RU | DE32 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | MISWIRED/CONNECT INCO |
| AEBB10 | RU | DE48 | -- | 8.0 | -- | 0.0 | -- | 28.5 | -- | 0.0 | -- | 3.6 | OVERLOADED MOTOR |
| AEBB10 | RU | DE54 | -- | 16.0 | -- | 0.0 | -- | 54.0 | -- | 0.0 | -- | 3.4 | OPEN CIRCUIT |
| AEBB10 | RU | DE67 | -- | 2.0 | -- | 0.0 | -- | 7.7 | -- | 0.0 | -- | 3.8 | INCORRECT CURRENT |
| AEBB10 | RU | DE6A | -- | 1.0 | -- | 0.0 | -- | 2.5 | -- | 0.0 | -- | 2.5 | INCORRECT TIME DELAY |
| AEBB10 | RU | DE71 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | CHANGE OF VALUE |
| AEBB10 | RU | DE73 | -- | 5.0 | -- | 0.0 | -- | 15.5 | -- | 0.0 | -- | 3.1 | SHORTED |
| AEBB10 | RU | DE74 | -- | 18.0 | -- | 0.0 | -- | 73.8 | -- | 0.0 | -- | 4.1 | WELDED CONTACT |
| AEBB10 | RU | DM12 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | BROKEN SPRING |
| AEBB10 | RU | DM13 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | BROKEN/SHEARED |
| AEBB10 | RU | DM53 | -- | 3.0 | -- | 0.0 | -- | 6.3 | -- | 0.0 | -- | 2.1 | LOOSE |
| AEBB10 | RU | DM54 | -- | 2.0 | -- | 0.0 | -- | 17.0 | -- | 0.0 | -- | 8.5 | LOOSE/DAMAGED COMM HD |
| AEBB10 | RU | DM57 | -- | 1.0 | -- | 0.0 | -- | 1.5 | -- | 0.0 | -- | 1.5 | UNSEATED |
| AEBB10 | RU | DM65 | -- | 2.0 | -- | 0.0 | -- | 6.4 | -- | 0.0 | -- | 3.2 | JAM/BINDING/LOCKED |
| AEBB10 | RU | DM67 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | STICKING |
| AEBB10 | RU | DM72 | -- | 4.0 | -- | 0.0 | -- | 27.0 | -- | 0.0 | -- | 6.8 | BURNED |
| AEBB10 | RU | DN32 | -- | 4.0 | -- | 0.0 | -- | 3.6 | -- | 0.0 | -- | 0.9 | NO DEFECT, PROG MAINT |
| AEBB10 | RU | DN33 | -- | 3.0 | -- | 0.0 | -- | 5.7 | -- | 0.0 | -- | 1.9 | NO DEFECT, SCHED MOD |
| AEBB10 | RU | DS11 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | CHATTERING |
| AEBB10 | RU | DS12 | -- | 2.0 | -- | 0.0 | -- | 10.0 | -- | 0.0 | -- | 5.0 | ERRATIC OPERATION |
| AEBB10 | RU | DS13 | -- | 9.0 | -- | 0.0 | -- | 26.5 | -- | 0.0 | -- | 2.9 | INTERMITTENT OPER |
| AEBB10 | RU | DS26 | -- | 12.0 | -- | 0.0 | -- | 33.5 | -- | 0.0 | -- | 2.8 | FAILS TO OPERATE |
| AEBB10 | RU | DS2C | -- | 4.0 | -- | 0.0 | -- | 33.0 | -- | 0.0 | -- | 8.3 | FAILURE, INTERNAL |
| AEBB10 | RU | DZ12 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | CONDEMNED, ADMIN |
| AEBB10 | RU | DZ42 | -- | 8.0 | -- | 0.0 | -- | 33.8 | -- | 0.0 | -- | 4.2 | IMPROPER ADJUSTMENT |
| AEBB10 | RU | () | -- | 1.0 | -- | 0.0 | -- | 0.5 | -- | 0.0 | -- | 0.5 | NOT DESIGNATED |
| AEBB10 | TY | ---- | -- | 8.0 | -- | 0.0 | -- | 65.5 | -- | 0.0 | -- | 8.2 | TRANSFORMER |
| AEBB10 | TY | DE2L | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | TRIPPED CKT BREAKER |
| AEBB10 | TY | DE32 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | MISWIRED/CONNECT INCO |
| AEBB10 | TY | DE67 | -- | 1.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | -- | 14.0 | INCORRECT CURRENT |
| AEBB10 | TY | DN33 | -- | 4.0 | -- | 0.0 | -- | 31.5 | -- | 0.0 | -- | 7.9 | NO DEFECT, SCHED MOD |
| AEBB10 | TY | DS13 | -- | 1.0 | -- | 0.0 | -- | 14.0 | -- | 0.0 | -- | 14.0 | INTERMITTENT OPER |

APPENDIX J

Data Extraction No. 10 Logic And Low Voltage By Repair Code



WMATA MAINTENANCE HIGH-DRIVER BY REPAIR CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | DESCRIPTION | |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|-------------|------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | | | |
| AEBB00 | -- | --- | 195.0 | 452.0 | 0.5 | 0.3 | 858.0 | 2181.8 | 2.2 | 1.3 | 4.4 | 4.8 | LOGIC AND LO-V CONTROL |
| AEBB00 | 00 | --- | 5.0 | --- | 0.0 | --- | 9.0 | --- | 0.0 | --- | 1.8 | --- | NOT DESIGNATED |
| AEBB00 | 00 | RJ02 | 4.0 | --- | 0.0 | --- | 7.0 | --- | 0.0 | --- | 1.8 | --- | INSP & FOUND OK |
| AEBB00 | 00 | RJ06 | 1.0 | --- | 0.0 | --- | 2.0 | --- | 0.0 | --- | 2.0 | --- | TRACK TEST |
| AEBB00 | 1C | --- | --- | 7.0 | --- | 0.0 | 39.5 | --- | --- | 0.0 | 5.6 | 5.6 | INDUCTOR |
| AEBB00 | 1C | RN03 | --- | 6.0 | --- | 0.0 | 36.5 | --- | --- | 0.0 | 6.1 | 6.1 | REMOVED & REPLACED |
| AEBB00 | 1C | RN09 | --- | 1.0 | --- | 0.0 | 3.0 | --- | --- | 0.0 | 3.0 | 3.0 | REPLACED MINOR HDWRE |
| AEBB00 | 5N | --- | 1.0 | --- | 0.0 | --- | --- | 0.0 | 0.0 | --- | --- | --- | SUPPORT |
| AEBB00 | 5N | RN03 | 1.0 | --- | 0.0 | --- | 16.0 | --- | 0.0 | --- | 16.0 | --- | REMOVED & REPLACED |
| AEBB00 | 5R | --- | 3.0 | 18.0 | 0.0 | 0.0 | 16.0 | --- | 0.0 | --- | 16.0 | --- | SWITCH |
| AEBB00 | 5R | RJ02 | --- | 1.0 | --- | 0.0 | 67.6 | --- | 0.0 | --- | 1.7 | 3.8 | SWITCH |
| AEBB00 | 5R | RJ07 | --- | 5.0 | --- | 0.0 | 1.0 | --- | 0.0 | --- | --- | 1.0 | INSP & FOUND OK |
| AEBB00 | 5R | RN03 | 3.0 | 9.0 | 0.0 | 0.0 | 21.1 | --- | 0.0 | --- | --- | 4.2 | TROUBLE SHOOTING |
| AEBB00 | 5R | RN09 | --- | 2.0 | --- | 0.0 | 40.0 | 0.0 | 0.0 | 1.7 | 4.4 | 4.4 | REMOVED & REPLACED |
| AEBB00 | 5R | I I | --- | 42.0 | --- | 0.0 | 2.0 | --- | 0.0 | --- | 2.0 | 2.0 | REPLACED MINOR HDWRE |
| AEBB00 | 64 | --- | --- | 1.0 | --- | 0.0 | 206.1 | --- | 0.1 | --- | 4.9 | 4.9 | NOT DESIGNATED |
| AEBB00 | 64 | RE01 | --- | 1.0 | --- | 0.0 | 4.0 | --- | 0.0 | --- | 4.0 | 4.0 | CRADLE |
| AEBB00 | 64 | RE02 | --- | 1.0 | --- | 0.0 | 6.0 | --- | 0.0 | --- | 6.0 | 6.0 | ADJUSTED |
| AEBB00 | 64 | RJ02 | --- | 1.0 | --- | 0.0 | 0.5 | --- | 0.0 | --- | 0.5 | 0.5 | MODIFIED |
| AEBB00 | 64 | RJ07 | --- | 4.0 | --- | 0.0 | 16.2 | --- | 0.0 | --- | 4.1 | 4.1 | INSP & FOUND OK |
| AEBB00 | 64 | RN03 | --- | 29.0 | --- | 0.0 | 163.4 | --- | 0.1 | --- | 5.6 | 5.6 | TROUBLE SHOOTING |
| AEBB00 | 64 | RN05 | --- | 4.0 | --- | 0.0 | 13.0 | --- | 0.0 | --- | 3.3 | 3.3 | REMOVED & REPLACED |
| AEBB00 | 64 | RN09 | --- | 2.0 | --- | 0.0 | 3.0 | --- | 0.0 | --- | 1.5 | 1.5 | REPLACED |
| AEBB00 | 6R | --- | 3.0 | --- | 0.0 | --- | 8.0 | --- | 0.0 | --- | 2.7 | 2.7 | REPLACED MINOR HDWRE |
| AEBB00 | 6R | RN03 | 3.0 | --- | 0.0 | --- | 8.0 | --- | 0.0 | --- | 2.7 | 2.7 | CONTACT |
| AEBB00 | HE | --- | --- | 344.0 | --- | 0.2 | 1673.0 | --- | 1.0 | --- | 4.9 | 4.9 | REMOVED & REPLACED |
| AEBB00 | HE | RB01 | --- | 39.0 | --- | 0.0 | 109.7 | --- | 0.1 | --- | 2.8 | 2.8 | HARDWARE |
| AEBB00 | HE | RC03 | --- | 1.0 | --- | 0.0 | 0.5 | --- | 0.0 | --- | 0.5 | 0.5 | ADJUSTED |
| AEBB00 | HE | RE02 | --- | 2.0 | --- | 0.0 | 9.0 | --- | 0.0 | --- | 4.5 | 4.5 | COMPLETED PREVIOUSLY |
| AEBB00 | HE | RJ02 | --- | 23.0 | --- | 0.0 | 67.2 | --- | 0.0 | --- | 2.9 | 2.9 | MODIFIED |
| AEBB00 | HE | RJ07 | --- | 50.0 | --- | 0.0 | 308.0 | --- | 0.2 | --- | 6.2 | 6.2 | INSP & FOUND OK |
| AEBB00 | HE | RN03 | --- | 168.0 | --- | 0.1 | 778.3 | --- | 0.5 | --- | 4.6 | 4.6 | TROUBLE SHOOTING |
| AEBB00 | HE | RN04 | --- | 10.0 | --- | 0.0 | 99.0 | --- | 0.1 | --- | 9.9 | 9.9 | REMOVED & REPLACED |
| AEBB00 | HE | RN05 | --- | 8.0 | --- | 0.0 | 29.0 | --- | 0.0 | --- | 3.6 | 3.6 | REMOVED TO REPAIR |
| AEBB00 | HE | RN09 | --- | 39.0 | --- | 0.0 | 254.3 | --- | 0.2 | --- | 6.5 | 6.5 | REPLACED |
| AEBB00 | HE | RR10 | --- | 2.0 | --- | 0.0 | 10.0 | --- | 0.0 | --- | 5.0 | 5.0 | REPLACED MINOR HDWRE |
| AEBB00 | HE | RR18 | --- | 2.0 | --- | 0.0 | 8.0 | --- | 0.0 | --- | 4.0 | 4.0 | REMOVE/REPAIR/REPLACE |
| AEBB00 | PE | --- | 157.0 | 5.0 | 0.4 | 0.0 | 654.0 | --- | 0.0 | --- | 4.2 | 4.2 | SERVICED |
| AEBB00 | PE | RB01 | 13.0 | --- | 0.0 | --- | 65.0 | --- | 0.2 | --- | 5.0 | 5.0 | PANEL |
| AEBB00 | PE | RC10 | 3.0 | --- | 0.0 | --- | 7.0 | --- | 0.0 | --- | 2.3 | 2.3 | ADJUSTED |
| AEBB00 | PE | RE02 | 28.0 | --- | 0.1 | --- | 79.0 | --- | 0.2 | --- | 2.8 | 2.8 | NO DEFECT FOUND |
| AEBB00 | PE | RE03 | 1.0 | --- | 0.0 | --- | 8.0 | --- | 0.0 | --- | 8.0 | 8.0 | MODIFIED |
| AEBB00 | PE | RE05 | 1.0 | --- | 0.0 | --- | 8.0 | --- | 0.0 | --- | 8.0 | 8.0 | OVERHAULED |
| AEBB00 | PE | RE05 | 1.0 | --- | 0.0 | --- | 8.0 | --- | 0.0 | --- | 8.0 | 8.0 | REBUILT |

WMATA MAINTENANCE HIGH-DRIVER BY REPAIR CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB00 | PE | RF02 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | RENEW SOLUTION |
| AEBB00 | PE | RJ02 | 30.0 | -- | 0.1 | -- | 81.0 | -- | 0.2 | -- | 2.7 | -- | INSP & FOUND OK |
| AEBB00 | PE | RJ05 | 17.0 | -- | 0.0 | -- | 44.0 | -- | 0.1 | -- | 2.6 | -- | TESTED |
| AEBB00 | PE | RJ06 | 31.0 | -- | 0.1 | -- | 107.0 | -- | 0.3 | -- | 3.5 | -- | TRACK TEST |
| AEBB00 | PE | RJ07 | 19.0 | 2.0 | 0.0 | 0.0 | 144.0 | 3.0 | 0.4 | 0.0 | 7.6 | 1.5 | TROUBLE SHOOTING |
| AEBB00 | PE | RN03 | 8.0 | 3.0 | 0.0 | 0.0 | 91.0 | 3.3 | 0.2 | 0.0 | 11.4 | 1.1 | REMOVED & REPLACED |
| AEBB00 | PE | RR14 | 2.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 1.0 | -- | RESET |
| AEBB00 | PE | RR15 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | -- | REWired |
| AEBB00 | PE | RR24 | 2.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 3.0 | -- | TEST & REPAIR |
| AEBB00 | PJ | ---- | 27.0 | -- | 0.0 | -- | 138.8 | -- | 0.1 | -- | 5.1 | -- | PC BOARD (CARD) |
| AEBB00 | PJ | RJ07 | -- | 1.0 | 0.0 | 0.0 | 3.0 | -- | 0.0 | 0.0 | 3.0 | -- | TROUBLE SHOOTING |
| AEBB00 | PJ | RN03 | -- | 25.0 | 0.0 | 0.0 | 134.3 | -- | 0.1 | -- | 5.4 | -- | REMOVED & REPLACED |
| AEBB00 | PJ | RR18 | -- | 1.0 | 0.0 | 0.0 | 1.5 | -- | 0.0 | -- | 1.5 | -- | SERVICED |
| AEBB00 | RU | ---- | 22.0 | -- | 0.1 | -- | 113.0 | -- | 0.3 | -- | 5.1 | -- | RELAY |
| AEBB00 | RU | RA06 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | CHARGED W/REFRIGERANT |
| AEBB00 | RU | RB01 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | -- | ADJUSTED |
| AEBB00 | RU | RB04 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | TIGHTENED |
| AEBB00 | RU | RE05 | 2.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 8.0 | -- | REBUILT |
| AEBB00 | RU | RJ02 | 3.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 2.0 | -- | INSP & FOUND OK |
| AEBB00 | RU | RJ05 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | TESTED |
| AEBB00 | RU | RJ06 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | -- | TRACK TEST |
| AEBB00 | RU | RJ07 | 1.0 | -- | 0.0 | -- | 12.0 | -- | 0.0 | -- | 12.0 | -- | TROUBLE SHOOTING |
| AEBB00 | RU | RN03 | 6.0 | -- | 0.0 | -- | 33.0 | -- | 0.1 | -- | 5.5 | -- | REMOVED & REPLACED |
| AEBB00 | RU | RN05 | 1.0 | -- | 0.0 | -- | 12.0 | -- | 0.0 | -- | 12.0 | -- | REPLACED |
| AEBB00 | RU | RN13 | 2.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 1.0 | -- | REPLACED TERMINAL |
| AEBB00 | RU | RR10 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | -- | REMOVE/REPAIR/REPLACE |
| AEBB00 | RU | [] | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | -- | NOT DESIGNATED |
| AEBB00 | RY | ---- | -- | 8.0 | 0.0 | 0.0 | 49.0 | -- | 0.0 | 0.0 | 6.1 | -- | RESISTOR |
| AEBB00 | RY | RN03 | -- | 8.0 | 0.0 | 0.0 | 49.0 | -- | 0.0 | 0.0 | 6.1 | -- | REMOVED & REPLACED |
| AEBB00 | SU | ---- | 4.0 | -- | 0.0 | -- | 53.0 | -- | 0.1 | -- | 13.3 | -- | SHUNT |
| AEBB00 | SU | RM02 | 1.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 8.0 | -- | MISC REPAIRS |
| AEBB00 | SU | RR01 | 2.0 | -- | 0.0 | -- | 36.0 | -- | 0.1 | -- | 18.0 | -- | CONNECTED |
| AEBB00 | SU | RR15 | 1.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | 9.0 | -- | REWired |
| AEBB00 | TX | ---- | -- | 1.0 | 0.0 | 0.0 | 1.5 | -- | 0.0 | 0.0 | 1.5 | -- | TRANSDUCTOR |
| AEBB00 | TX | RJ07 | -- | 1.0 | 0.0 | 0.0 | 1.5 | -- | 0.0 | 0.0 | 1.5 | -- | TROUBLE SHOOTING |
| AEBB01 | -- | ---- | 41.0 | -- | 0.1 | -- | 101.0 | -- | 0.3 | -- | 2.5 | -- | ANNUNCIATOR |
| AEBB01 | DF | ---- | 41.0 | -- | 0.1 | -- | 101.0 | -- | 0.3 | -- | 2.5 | -- | DETECTOR |
| AEBB01 | DF | RB01 | 1.0 | -- | 0.0 | -- | 1.0 | -- | 0.0 | -- | 1.0 | -- | ADJUSTED |
| AEBB01 | DF | RC10 | 3.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 2.0 | -- | NO DEFECT FOUND |
| AEBB01 | DF | RJ02 | 15.0 | -- | 0.0 | -- | 25.0 | -- | 0.1 | -- | 1.7 | -- | INSP & FOUND OK |
| AEBB01 | DF | RJ05 | 8.0 | -- | 0.0 | -- | 30.0 | -- | 0.1 | -- | 3.8 | -- | TESTED |
| AEBB01 | DF | RJ07 | 3.0 | -- | 0.0 | -- | 9.0 | -- | 0.0 | -- | 3.0 | -- | TROUBLE SHOOTING |
| AEBB01 | DF | RN13 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | -- | REPLACED TERMINAL |

WMATA MAINTENANCE HIGH-DRIVER BY REPAIR CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|-------|------------|-------|-------|---------------------------|-------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB01 | DF | RR10 | -- | -- | -- | -- | -- | -- | -- | -- | -- | REMOVE/REPAIR/REPLACE | |
| AEBB01 | DF | RR14 | 8.0 | -- | 0.0 | -- | 10.0 | -- | 0.0 | -- | 1.3 | RESET | |
| AEBB01 | DF | RR24 | 1.0 | -- | 0.0 | -- | 10.0 | -- | 0.0 | -- | 10.0 | TEST & REPAIR | |
| AEBB03 | PJ | ---- | 5.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 0.8 | CIRCUIT PROTECTION | |
| AEBB03 | PJ | ---- | 5.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 0.8 | PC BOARD (CARD) | |
| AEBB03 | PJ | RN03 | 2.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | REMOVED & REPLACED | |
| AEBB03 | PJ | RR14 | 2.0 | -- | 0.0 | -- | -- | -- | -- | -- | -- | RESET | |
| AEBB03 | PJ | RS03 | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 1.5 | DRESSED & FILED | |
| AEBB04 | -- | ---- | 4.0 | 110.0 | 0.0 | 0.1 | 9.0 | 0.2 | 0.0 | 2.3 | 2.3 | ELECTROMOTIVE BRAKING CON | |
| AEBB04 | 5R | ---- | 3.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 2.0 | SWITCH | |
| AEBB04 | 5R | RN03 | 3.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 2.0 | REMOVED & REPLACED | |
| AEBB04 | PJ | ---- | 1.0 | 106.0 | 0.0 | 0.1 | 3.0 | 0.1 | 0.0 | 3.0 | 2.2 | PC BOARD (CARD) | |
| AEBB04 | PJ | ---- | -- | 2.0 | -- | 0.0 | 2.3 | 0.0 | -- | -- | 1.2 | ADJUSTED | |
| AEBB04 | PJ | RJ02 | -- | 1.0 | -- | 0.0 | 6.5 | 0.0 | -- | -- | 6.5 | INSP & FOUND OK | |
| AEBB04 | PJ | RJ07 | -- | 3.0 | -- | 0.0 | 17.2 | 0.0 | -- | -- | 5.7 | TROUBLE SHOOTING | |
| AEBB04 | PJ | RN03 | 1.0 | 99.0 | 0.0 | 0.1 | 206.0 | 0.0 | 0.1 | 3.0 | 2.1 | REMOVED & REPLACED | |
| AEBB04 | PJ | RR18 | -- | 1.0 | -- | 0.0 | 1.0 | 0.0 | -- | -- | 1.0 | SERVICED | |
| AEBB04 | RU | ---- | -- | 4.0 | -- | 0.0 | 18.7 | -- | 0.0 | -- | 4.7 | RELAY | |
| AEBB04 | RU | RN03 | -- | 3.0 | -- | 0.0 | 16.5 | -- | 0.0 | -- | 5.5 | REMOVED & REPLACED | |
| AEBB04 | RU | RR10 | -- | 1.0 | -- | 0.0 | 2.2 | 0.0 | -- | -- | 2.2 | REMOVE/REPAIR/REPLACE | |
| AEBB05 | -- | ---- | 73.0 | -- | 0.2 | -- | 409.5 | -- | 1.0 | -- | 5.6 | PERFORMANCE MODIFICATION | |
| AEBB05 | HT | ---- | 2.0 | -- | 0.0 | -- | 18.0 | -- | 0.0 | -- | 9.0 | HOSE | |
| AEBB05 | HT | RE02 | 1.0 | -- | 0.0 | -- | 16.0 | -- | 0.0 | -- | 16.0 | MODIFIED | |
| AEBB05 | HT | RN03 | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | REMOVED & REPLACED | |
| AEBB05 | PE | ---- | 17.0 | -- | 0.0 | -- | 78.0 | -- | 0.2 | -- | 4.6 | PANEL | |
| AEBB05 | PE | RB01 | 2.0 | -- | 0.0 | -- | 19.0 | -- | 0.0 | -- | 9.5 | ADJUSTED | |
| AEBB05 | PE | RC13 | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | REMOVED FOR OTHER USE | |
| AEBB05 | PE | RN03 | 12.0 | -- | 0.0 | -- | 47.0 | -- | 0.1 | -- | 3.9 | REMOVED & REPLACED | |
| AEBB05 | PE | RN05 | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | REPLACED | |
| AEBB05 | PE | RR10 | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | REMOVE/REPAIR/REPLACE | |
| AEBB05 | PJ | ---- | 36.0 | -- | 0.1 | -- | 151.5 | -- | 0.4 | -- | 4.2 | PC BOARD (CARD) | |
| AEBB05 | PJ | RB01 | 16.0 | -- | 0.0 | -- | 42.5 | -- | 0.1 | -- | 2.7 | ADJUSTED | |
| AEBB05 | PJ | RE02 | 1.0 | -- | 0.0 | -- | 11.0 | -- | 0.0 | -- | 11.0 | MODIFIED | |
| AEBB05 | PJ | RJ05 | 8.0 | -- | 0.0 | -- | 37.0 | -- | 0.1 | -- | 4.6 | TESTED | |
| AEBB05 | PJ | RJ07 | 2.0 | -- | 0.0 | -- | 7.0 | -- | 0.0 | -- | 3.5 | TROUBLE SHOOTING | |
| AEBB05 | PJ | RN03 | 7.0 | -- | 0.0 | -- | 46.0 | -- | 0.1 | -- | 6.6 | REMOVED & REPLACED | |
| AEBB05 | PJ | RN05 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | REPLACED | |
| AEBB05 | PJ | RR10 | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | REMOVE/REPAIR/REPLACE | |
| AEBB05 | RB | ---- | 4.0 | -- | 0.0 | -- | 61.0 | -- | 0.2 | -- | 15.3 | RACK | |
| AEBB05 | RB | RJ02 | 1.0 | -- | 0.0 | -- | 5.0 | -- | 0.0 | -- | 5.0 | INSP & FOUND OK | |
| AEBB05 | RB | RJ07 | 3.0 | -- | 0.0 | -- | 56.0 | -- | 0.1 | -- | 18.7 | TROUBLE SHOOTING | |
| AEBB05 | RU | ---- | 2.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | RELAY | |
| AEBB05 | RU | RN03 | 2.0 | -- | 0.0 | -- | 8.0 | -- | 0.0 | -- | 4.0 | REMOVED & REPLACED | |

WMATA MAINTENANCE HIGH-DRIVER BY REPAIR CODE
 LOGIC AND LOW VOLTAGE CONTROL
 (GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|-------|-------------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB05 | TW | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | TRANSDUCER |
| AEBB05 | TW | RN03 | 3.0 | --- | 0.0 | --- | 20.0 | --- | 0.1 | --- | 6.7 | --- | REMOVED & REPLACED |
| AEBB05 | WE | --- | --- | --- | 0.0 | --- | 73.0 | --- | 0.2 | --- | 8.1 | --- | WHEEL |
| AEBB05 | WE | RJ05 | 5.0 | --- | 0.0 | --- | 20.0 | --- | 0.1 | --- | 4.0 | --- | TESTED |
| AEBB05 | WE | RP05 | 1.0 | --- | 0.0 | --- | 16.0 | --- | 0.0 | --- | 16.0 | --- | CLEARED GROUNDS |
| AEBB05 | WE | RR24 | 3.0 | --- | 0.0 | --- | 37.0 | --- | 0.1 | --- | 12.3 | --- | TEST & REPAIR |
| AEBB06 | --- | --- | --- | 47.0 | 0.0 | --- | 149.9 | --- | 0.1 | --- | 3.2 | --- | DECODE/ENCODE |
| AEBB06 | PJ | --- | --- | 47.0 | 0.0 | --- | 149.9 | --- | 0.1 | --- | 3.2 | --- | PC BOARD (CARD) |
| AEBB06 | PJ | RB01 | --- | 1.0 | 0.0 | --- | 2.0 | --- | 0.0 | --- | 2.0 | --- | ADJUSTED |
| AEBB06 | PJ | RE02 | --- | 2.0 | 0.0 | --- | 1.7 | --- | 0.0 | --- | 0.9 | --- | MODIFIED |
| AEBB06 | PJ | RJ07 | --- | 1.0 | 0.0 | --- | 1.0 | --- | 0.0 | --- | 1.0 | --- | TROUBLE SHOOTING |
| AEBB06 | PJ | RN03 | --- | 43.0 | 0.0 | --- | 145.2 | --- | 0.1 | --- | 3.4 | --- | REMOVED & REPLACED |
| AEBB07 | --- | --- | 3.0 | 817.0 | 0.0 | 0.5 | 21.0 | 2323.5 | 0.1 | 1.4 | 7.0 | --- | POWER SUPPLY |
| AEBB07 | PJ | --- | 3.0 | 817.0 | 0.0 | 0.5 | 21.0 | 2323.5 | 0.1 | 1.4 | 7.0 | --- | PC BOARD (CARD) |
| AEBB07 | PJ | RB01 | --- | 9.0 | 0.0 | --- | 22.6 | --- | 0.0 | --- | 2.5 | --- | ADJUSTED |
| AEBB07 | PJ | RE02 | --- | 4.0 | 0.0 | --- | 12.7 | --- | 0.0 | --- | 3.2 | --- | MODIFIED |
| AEBB07 | PJ | RJ02 | --- | 7.0 | 0.0 | --- | 50.6 | --- | 0.0 | --- | 7.2 | --- | INSP & FOUND OK |
| AEBB07 | PJ | RJ07 | 1.0 | 63.0 | 0.0 | 0.0 | 11.0 | 76.8 | 0.0 | 0.0 | 11.0 | --- | TROUBLE SHOOTING |
| AEBB07 | PJ | RN03 | 2.0 | 713.0 | 0.0 | 0.4 | 10.0 | 1979.2 | 0.0 | 1.2 | 5.0 | --- | REMOVED & REPLACED |
| AEBB07 | PJ | RN04 | --- | 4.0 | 0.0 | --- | 5.4 | --- | 0.0 | --- | 1.3 | --- | REMOVED TO REPAIR |
| AEBB07 | PJ | RN05 | --- | 8.0 | 0.0 | --- | 62.7 | --- | 0.0 | --- | 7.8 | --- | REPLACED |
| AEBB07 | PJ | RN09 | --- | 4.0 | 0.0 | --- | 52.5 | --- | 0.0 | --- | 13.1 | --- | REPLACED MINOR HDWRE |
| AEBB07 | PJ | RR10 | --- | 1.0 | 0.0 | --- | 15.0 | --- | 0.0 | --- | 15.0 | --- | REMOVE/REPAIR/REPLACE |
| AEBB07 | PJ | RR18 | --- | 3.0 | 0.0 | --- | 34.0 | --- | 0.0 | --- | 11.3 | --- | SERVICED |
| AEBB07 | PJ | I | --- | 1.0 | 0.0 | --- | 12.0 | --- | 0.0 | --- | 12.0 | --- | NOT DESIGNATED |
| AEBB08 | --- | --- | --- | 254.0 | 0.2 | --- | 877.5 | --- | 0.5 | --- | 3.5 | --- | BUFFER/DRIVER/ISOLATION |
| AEBB08 | PJ | --- | --- | 254.0 | 0.2 | --- | 877.5 | --- | 0.5 | --- | 3.5 | --- | PC BOARD (CARD) |
| AEBB08 | PJ | RB01 | --- | 3.0 | 0.0 | --- | 2.2 | --- | 0.0 | --- | 0.7 | --- | ADJUSTED |
| AEBB08 | PJ | RC03 | --- | 1.0 | 0.0 | --- | 1.0 | --- | 0.0 | --- | 1.0 | --- | COMPLETED PREVIOUSLY |
| AEBB08 | PJ | RE02 | --- | 6.0 | 0.0 | --- | 10.1 | --- | 0.0 | --- | 1.7 | --- | MODIFIED |
| AEBB08 | PJ | RJ02 | --- | 2.0 | 0.0 | --- | 4.5 | --- | 0.0 | --- | 2.3 | --- | INSP & FOUND OK |
| AEBB08 | PJ | RJ07 | --- | 10.0 | 0.0 | --- | 38.1 | --- | 0.0 | --- | 3.8 | --- | TROUBLE SHOOTING |
| AEBB08 | PJ | RN03 | --- | 226.0 | 0.1 | --- | 817.0 | --- | 0.5 | --- | 3.6 | --- | REMOVED & REPLACED |
| AEBB08 | PJ | RN05 | --- | 2.0 | 0.0 | --- | 0.6 | --- | 0.0 | --- | 0.3 | --- | REPLACED |
| AEBB08 | PJ | RN09 | --- | 2.0 | 0.0 | --- | 2.0 | --- | 0.0 | --- | 1.0 | --- | REPLACED MINOR HDWRE |
| AEBB08 | PJ | RR18 | --- | 2.0 | 0.0 | --- | 2.0 | --- | 0.0 | --- | 1.0 | --- | SERVICED |
| AEBB09 | --- | --- | 5.0 | --- | 0.0 | --- | 29.0 | --- | 0.1 | --- | 5.8 | --- | SPEED/TACH |
| AEBB09 | PJ | --- | 5.0 | --- | 0.0 | --- | 29.0 | --- | 0.1 | --- | 5.8 | --- | PC BOARD (CARD) |
| AEBB09 | PJ | RE02 | 3.0 | --- | 0.0 | --- | 11.0 | --- | 0.0 | --- | 3.7 | --- | MODIFIED |
| AEBB09 | PJ | RN03 | 2.0 | --- | 0.0 | --- | 18.0 | --- | 0.0 | --- | 9.0 | --- | REMOVED & REPLACED |
| AEBB10 | --- | --- | 8.0 | 472.0 | 0.0 | 0.3 | 27.0 | 1925.1 | 0.1 | 1.2 | 3.4 | --- | ACCELERATION CONTROL |
| AEBB10 | PJ | --- | 8.0 | 315.0 | 0.0 | 0.2 | 27.0 | 1313.4 | 0.1 | 0.8 | 3.4 | --- | PC BOARD (CARD) |
| AEBB10 | PJ | RB01 | 3.0 | 4.0 | 0.0 | 0.0 | 13.0 | 10.0 | 0.0 | 0.0 | 4.3 | --- | ADJUSTED |

WMATA MAINTENANCE HIGH-DRIVER BY REPAIR CODE

LOGIC AND LOW VOLTAGE CONTROL
(GPN AEBB--)

BASED ON 10,000 MILES OF REVENUE SERVICE OPERATION

| GPN | UCC | R-CODE | MAINTENANCE ACTIONS | | MAINTENANCE RATE | | LABOR HOURS | | LABOR RATE | | MLHTR | | DESCRIPTION |
|--------|-----|--------|---------------------|-------|------------------|-------|-------------|--------|------------|-------|-------|-------|-----------------------|
| | | | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | PATCO | WMATA | |
| AEBB10 | PJ | RJ07 | 1.0 | 10.0 | 0.0 | 0.0 | 6.0 | 41.0 | 0.0 | 0.0 | 6.0 | 4.1 | TROUBLE SHOOTING |
| AEBB10 | PJ | RN03 | 3.0 | 296.0 | 0.0 | 0.2 | 6.0 | 1251.8 | 0.0 | 0.8 | 2.0 | 4.2 | REMOVED & REPLACED |
| AEBB10 | PJ | RN05 | -- | 1.0 | -- | 0.0 | -- | 0.1 | -- | 0.0 | -- | 0.1 | REPLACED |
| AEBB10 | PJ | RR10 | -- | 1.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 6.0 | REMOVE/REPAIR/REPLACE |
| AEBB10 | PJ | RR18 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | SERVICED |
| AEBB10 | PJ | [] | 1.0 | 1.0 | 0.0 | 0.0 | 2.0 | -- | 0.0 | -- | 2.0 | -- | NOT DESIGNATED |
| AEBB10 | RU | ---- | -- | 149.0 | -- | 0.1 | -- | 546.2 | -- | 0.3 | -- | 3.7 | RELAY |
| AEBB10 | RU | RB01 | -- | 22.0 | -- | 0.0 | -- | 63.4 | -- | 0.0 | -- | 2.9 | ADJUSTED |
| AEBB10 | RU | RJ02 | -- | 2.0 | -- | 0.0 | -- | 6.0 | -- | 0.0 | -- | 3.0 | INSP & FOUND OK |
| AEBB10 | RU | RJ07 | -- | 17.0 | -- | 0.0 | -- | 36.8 | -- | 0.0 | -- | 2.2 | TROUBLE SHOOTING |
| AEBB10 | RU | RN03 | -- | 82.0 | -- | 0.0 | -- | 338.4 | -- | 0.2 | -- | 4.1 | REMOVED & REPLACED |
| AEBB10 | RU | RN04 | -- | 1.0 | -- | 0.0 | -- | 0.2 | -- | 0.0 | -- | 0.2 | REMOVED TO REPAIR |
| AEBB10 | RU | RN09 | -- | 15.0 | -- | 0.0 | -- | 72.0 | -- | 0.0 | -- | 4.8 | REPLACED MINOR HDWRE |
| AEBB10 | RU | RR10 | -- | 3.0 | -- | 0.0 | -- | 14.1 | -- | 0.0 | -- | 4.7 | REMOVE/REPAIR/REPLACE |
| AEBB10 | RU | RR18 | -- | 6.0 | -- | 0.0 | -- | 12.3 | -- | 0.0 | -- | 2.1 | SERVICED |
| AEBB10 | RU | [] | -- | 1.0 | -- | 0.0 | -- | 3.0 | -- | 0.0 | -- | 3.0 | NOT DESIGNATED |
| AEBB10 | TY | ---- | -- | 8.0 | -- | 0.0 | -- | 65.5 | -- | 0.0 | -- | 8.2 | TRANSFORMER |
| AEBB10 | TY | RN03 | -- | 6.0 | -- | 0.0 | -- | 59.5 | -- | 0.0 | -- | 9.9 | REMOVED & REPLACED |
| AEBB10 | TY | RN05 | -- | 1.0 | -- | 0.0 | -- | 2.0 | -- | 0.0 | -- | 2.0 | REPLACED |
| AEBB10 | TY | RR10 | -- | 1.0 | -- | 0.0 | -- | 4.0 | -- | 0.0 | -- | 4.0 | REMOVE/REPAIR/REPLACE |




APPENDIX K

Propulsion System Functional Hierarchy

A00000 . TRANSIT VEHICLE
 AE0000 . . . PROPULSION SYSTEM
 AEAC00 MANUAL CONTROLS, T/L
 AEAA00 MASTER CONTROLLER
 AEAA01 MASTER KEY SWITCH
 AEAA02 MODE SELECTOR
 AEAA03 DIRECTION SELECTOR
 AEAA04 RATE CONTROLLER
 AEAA05 RESET
 AEAA06 CIRCUIT PROTECTION
 AEAB00 AUXILIARY CONTROLLER
 AEAB01 MASTER KEY SWITCH
 AEAB02 MODE SELECTOR
 AEAB03 DIRECTION SELECTOR
 AEAB04 RATE CONTROLLER
 AEAB05 RESET
 AEAB06 CIRCUIT PROTECTION
 AEAC00 T/L PROPULSION/BRAKING
 AEB000 TRACTIVE EFFORT CONTROLLER
 AEBA00 TRAINLINE DETECTORS
 AEBB00 LOGIC AND LO-V CONTROL
 AEBB01 ANNUNCIATOR
 AEBB02 CUTOUT
 AEBB03 CIRCUIT PROTECTION
 AEBB04 ELECTROMOTIVE BRAKING CONTROL
 AEBB05 PERFORMANCE MODIFICATION
 AEBB06 DECODE/ENCODE

AEBB07 POWER SUPPLY
 AEBB08 BUFFER/DRIVER/ISOLATION
 AEBB09 SPEED/TACH
 AEBB10 ACCELERATION CONTROL
 AEBC00 HIGH VOLTAGE SWITCH GEAR
 AEBC01 BRAKE
 AEBC02 FIELD
 AEBC03 GROUND
 AEBC04 LINE
 AEBC05 LOOP
 AEBC06 OVERLOAD
 AEBC07 PARALLEL
 AEBC08 POWER BRAKE
 AEBC09 REVERSER
 AEBC10 SERIES
 AEBC11 CIRCUIT PROTECTION
 AEBC12 SERIES PARALLEL
 AEBC13 RETROGRESSION
 AEBC14 POWER
 AEBD00 POWER REGULATION
 AEBD01 CAM
 AEBD02 SOLID STATE
 AEBD03 ACCELERATOR
 AEBE00 LINE FILTER
 AEC000 VENTILATION-COOLING
 AECA00 BLOWERS
 AECB00 CONTROLS

AECC00 FILTERS
AECD00 DUCTING
AECE00 CIRCUIT PROTECTION
AED000 TRACTION MOTOR ASSY
AEDA00 FIELD
AEDA01 MAIN
AEDA02 COMMUTATING
AEDB00 ARMATURE ASSY
AEDB01 COMMUTATOR ASSY
AEDC00 BRUSHHOLDER ASSY
AEDD00 BRUSH
AEDF00 BEARINGS



APPENDIX L

Universal Component Codes

1. The first part of the document is a list of names.

2.

3. The second part of the document is a list of names.

UNIVERSAL COMPONENT CODES

| CODE | DESCRIPTION | CODE | DESCRIPTION |
|------|----------------|------|-----------------|
| 00 | NOT DESIGNATED | B5 | BRAKE |
| AA | ABSORBER | B6 | BREATHER |
| AB | ACCELERATOR | B7 | BRIDGE |
| AC | ACCELEROMETER | B8 | BRUSH |
| AD | ACCUMULATOR | B9 | BRUSHHOLDER |
| AX | ACTUATOR | 3A | BUFFER |
| AE | ADAPTER | 3B | BULB |
| AF | ALARM | 3C | BULKHEAD |
| AH | ALTERNATOR | 3D | BUMPER |
| AJ | AMMETER | 3E | BUS |
| AK | AMPLIFIER | 3F | BUS BAR |
| AL | ANCHOR | 3H | BUSHING |
| AM | ANGLE IRON | 3J | BUZZER |
| AN | ANNUNCIATOR | CA | CAB |
| AP | ANODE | CB | CABINET |
| AR | ANTENNA | CC | CABLE |
| AS | ARCHORN | CD | CALIPER |
| AT | ARM | CE | CAM |
| AU | ARMATURE | CF | CAM SWITCH |
| AV | ARRESTOR | CH | CAP |
| AW | AXLE | CJ | CAPACITOR |
| BA | BAFFLE | CK | CARD |
| BB | BALLAST | CL | CARRIER |
| BC | BAND | CM | CARTRIDGE |
| BD | BAR | CN | CASE |
| BE | BARRIER | CP | CASEMENT |
| BF | BASE | CR | CASING |
| BH | BASEPLATE | CS | CASTING |
| BJ | BATTEN | CT | CATCH |
| BK | BATTERY | CU | CATHODE |
| BL | BEAM | CV | CELL |
| BM | BEARING | CW | CHAIN |
| BN | BELL | CX | CHANNEL |
| BP | BELLOWS | CY | CHARGER |
| BR | BELT | CZ | CHASSIS |
| BS | BEZEL | C0 | CHECK |
| BT | BLADDER | C1 | CHOKE |
| BU | BLADE | C2 | CHOPPER |
| BV | BLOCK | C3 | CHUTE |
| BW | BLOWER | C4 | CIRCUIT |
| BX | BOARD | C5 | CIRCUIT BREAKER |
| BY | BODY | C6 | COCK |
| BZ | BOLSTER | C7 | CLAMP |
| B0 | BOLT | C8 | CLEAT |
| B1 | BOOT | C9 | CLEVIS |
| B2 | BOX | 6A | CLEVIS PIN |
| B3 | BRACE | 6B | CLIP |
| B4 | BRACKET | 6C | CLOCK |
| | | 6D | CLOSER |

UNIVERSAL COMPONENT CODES

| CODE | DESCRIPTION | CODE | DESCRIPTION |
|------|---------------|------|--------------|
| 6E | CLUTCH | DW | DRIVER |
| 4B | COIL | DX | DRUM |
| 6F | COLLAR | DY | DUCT |
| 6H | COLLECTOR | | |
| 6J | COMMUTATOR | EA | ELEMENT |
| 6K | COMPRESSOR | EB | ENCLOSURE |
| 6L | CONDENSOR | EC | ENCODER |
| 6M | CONDUIT | ED | ENGINE |
| 6N | CONNECTOR | EE | EQUALIZER |
| 6P | CONSOLE | EF | EVAPORATOR |
| 6R | CONTACT | EH | EXCITER |
| 6S | CONTACTOR | EJ | EXTINGUISHER |
| 6T | CONTAINER | | |
| 6U | CONTROL | FA | FAN |
| 6V | CONTROLLER | FC | FIELD |
| 6W | CONVERTER | FD | FILTER |
| 6X | CORD | FE | FIN |
| 6Y | CORE | FF | FINGER |
| 6Z | COTTER PIN | FH | FINGER BOARD |
| 60 | COUNTER | FJ | FITTING |
| 61 | COUPLER | FK | FIXTURE |
| 62 | COUPLING | FL | FLANGE |
| 63 | COVER | FM | FLASHBOARD |
| 64 | CRADLE | FN | FLOAT |
| 65 | CRANK | FP | FLUID |
| 66 | CRANKCASE | FR | FLYWHEEL |
| 67 | CRANKSHAFT | FS | FOLLOWER |
| 68 | CURTAIN | FT | FRAME |
| 69 | CUSHION | FU | FUEL |
| 4A | CYLINDER | FV | FUSE |
| | | FW | FUSE BLOCK |
| DA | DAMPER | | |
| DB | DECAL | 9A | GASKET |
| DC | DECODER | 9B | GAUGE |
| DD | DEHYDRATOR | 9C | GEAR |
| DE | DEMODULATOR | 9D | GEARBOX |
| DZ | DESICCANT | 9E | GENERATOR |
| DF | DETECTOR | 9F | GLAND |
| DH | DIAPHRAGM | 9H | GLASS |
| DJ | DIFFERENTIAL | 9J | GLAZING |
| DK | DIFFUSER | 9K | GONG |
| DL | DIODE | 9L | GOVERNOR |
| DM | DISC | 9M | GRID |
| DN | DISCRIMINATOR | 9N | GRILL |
| DP | DISPENSER | 9P | GROMMET |
| DR | DISPLAY | 9R | GUARD |
| DS | DISSIPATOR | 9S | GUIDE |
| DT | DOOR | | |
| DU | DRAWER | HA | HAMMER |
| DV | DRIER | HB | HANDLE |

UNIVERSAL COMPONENT CODES


| CODE | DESCRIPTION | CODE | DESCRIPTION |
|------|----------------|------|------------------|
| HC | HANDSET | LP | LOUVER |
| HD | HANGER | LR | LUBRICANT |
| HE | HARDWARE | LS | LUG |
| HF | HARNESS | | |
| HH | HEAD | MA | MAGAZINE |
| HJ | HEADSET | MB | MAGNET |
| HK | HEAT EXCHANGER | MC | MAGNET VALVE |
| HL | HEAT SINK | MD | MANIFOLD |
| HM | HEATER | ME | MARKER |
| HN | HINGE | MF | METER |
| HP | HOLDER | MH | MICROPHONE |
| HR | HOPPER | MJ | MIXER |
| HS | HORN | MK | MODEM |
| HT | HOSE | ML | MODULATOR |
| HU | HOUSING | MM | MODULE |
| HV | HUB | MN | MOLDING |
| | | MP | MONITOR |
| 1A | IMPELLER | MR | MOTOR |
| 1B | INDICATOR | MS | MOTOR-ALTERNATOR |
| 1C | INDUCTOR | MT | MOTOR-GENERATOR |
| 1D | INSERT | MU | MOUNT |
| 1E | INSULATION | MV | MUFFLER |
| 1F | INSULATOR | | |
| 1H | I.C. | NA | NIPPLE |
| 1J | INTERLOCK | NB | NUT |
| 1K | INTERPOLE | NC | NUTSERT |
| 1L | INVERTER | | |
| | | OA | ODOMETER |
| JA | JACK | OB | OPERATOR |
| JB | JOINT | OC | ORIFICE |
| JC | JOURNAL | OD | O-RING |
| JD | JUMPER | OE | OSCILLATOR |
| | | OF | OUTLET |
| KA | KEEPER | | |
| KB | KEY | PA | PACKING |
| KC | KIT | PB | PAD |
| KD | KNOB | PC | PADDLE |
| | | PD | PADLOCK |
| LA | LAMINATION | PE | PANEL |
| LB | LAMP | PF | PANTOGRAPH |
| LC | LATCH | PH | PAWL |
| LD | LEAD | PJ | PC BOARD (CARD) |
| LE | LENS | PK | PEDESTAL |
| LF | LEVER | PL | PETCOCK |
| LH | LIGHT | PM | PIN |
| LJ | LINING | PN | PINION |
| LK | LINK | PP | PIPE |
| LL | LINKAGE | PR | PIPING |
| LM | LOCK | PS | PISTON |
| LN | LOGIC | PT | PISTON RING |

UNIVERSAL COMPONENT CODES

| CODE | DESCRIPTION | CODE | DESCRIPTION |
|------|--------------|------|----------------|
| PU | PIVOT | 5T | SANDER |
| PV | PLATE | SA | SCREEN |
| PW | PLENUM | SB | SCREW |
| PX | PLUG | SC | SCROLL |
| PY | PLUNGER | 5U | SCRUBBER |
| PZ | POLE | SD | SEAL |
| P0 | POST | SE | SEALANT |
| P1 | POWER SUPPLY | SF | SEAT |
| P2 | PRIMER | SH | SENSITIVE EDGE |
| P3 | PRINTER | SJ | SENSOR |
| P4 | PROTECTOR | SK | SEPARATOR |
| P5 | PULLEY | SL | SHADE |
| P6 | PUMP | SM | SHAFT |
| | | SN | SHELL |
| RA | RACE | SP | SHIELD |
| RB | RACK | SR | SHIM |
| RC | RADIO | SS | SHOE |
| RD | RADOME | ST | SHROUD |
| RE | RAIL | SU | SHUNT |
| RF | RAMP | SV | SHUTTER |
| RH | RATCHET | SW | SIGN |
| RJ | REACTOR | SX | SLIP RING |
| RK | RECEIVER | SY | SOCKET |
| RL | RECEPTACLE | SZ | SOLENOID |
| RM | RECTIFIER | S0 | SOLENOID VALVE |
| RN | REDUCER | S1 | SNUBBER |
| RP | REFLECTOR | S2 | SPACER |
| RR | REFRIGERANT | S3 | SPEAKER |
| RS | REGISTER | S4 | SPEEDOMETER |
| RT | REGULATOR | S5 | SPIDER |
| RU | RELAY | S6 | SPLINE |
| RV | RELAY DRIVER | S7 | SPRING |
| RW | REPEATER | S8 | STABILIZER |
| RX | RESERVOIR | S9 | STANCHION |
| RY | RESISTOR | 5A | STARTER |
| RZ | RESTRICTOR | 5B | STARWHEEL |
| R0 | RETAINER | 5C | STATOR |
| R1 | RETURN | 5D | STIFFENER |
| R2 | REVERSER | 5E | STOP |
| R3 | RHEOSTAT | 5F | STRAIN RELIEF |
| R4 | RIBBON | 5H | STRAINER |
| R5 | RING | 5J | STRAP |
| R6 | RISER | 5K | STRIP |
| R7 | RIVET | 5L | STUD |
| R8 | ROCKER | 5M | SUMP |
| R9 | ROD | 5N | SUPPORT |
| 8A | ROLLER | 5P | SUPPRESSOR |
| 8C | ROPE | 5R | SWITCH |
| 8B | ROTOR | 5S | SWITCHBOARD |

UNIVERSAL COMPONENT CODES

| CODE | DESCRIPTION | CODE | DESCRIPTION |
|------|----------------|------|---------------|
| TA | TACHOMETER | WE | WHEEL |
| TB | TANK | WF | WINDING |
| TC | TAPE | WH | WINDOW |
| TD | TELEPHONE | WJ | WIPER |
| TE | TERMINAL | WK | WIRE |
| TF | TERMINAL BOARD | WL | WIREWAY |
| TH | TROLLEY POLE | WM | WIRING |
| TJ | THERMISTOR | | |
| TK | THERMOSTAT | YA | YOKE |
| TL | THRESHOLD | | |
| TM | THROWER | ZZ | MISCELLANEOUS |
| TN | THYRECTOR | | |
| TP | THYRISTOR | | |
| TR | TIE | | |
| TS | TIMER | | |
| TT | TIP | | |
| TU | TIRE | | |
| TV | TRACK | | |
| TW | TRANSDUCER | | |
| TX | TRANSDUCTOR | | |
| TY | TRANSFORMER | | |
| TZ | TRANSISTOR | | |
| T0 | TRANSMITTER | | |
| T1 | TRANSPORT | | |
| T2 | TRAP | | |
| T3 | TRAY | | |
| T4 | TREAD | | |
| T5 | TRIM | | |
| T6 | TRIP | | |
| T7 | TRUNNION | | |
| T8 | TUBE | | |
| T9 | TUBING | | |
| 7A | TURBINE | | |
| 7B | TURNBUCKLE | | |
| UA | UNION | | |
| VA | VALIDATOR | | |
| VB | VALVE | | |
| VC | VANE | | |
| VD | VARISTOR | | |
| VE | VENT | | |
| VF | VISOR | | |
| VH | VOLTMETER | | |
| VJ | VOLTRAP | | |
| WA | WASHER | | |
| WB | WEDGE | | |
| WC | WEIGHT | | |
| WD | WELDMENT | | |



APPENDIX M

Generic Defect Codes



| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|-------------------------|-------|------------|
| D000 | DEFECT CODES | | |
| DC00 | CLIMATIC/CORROSION | | |
| DC10 | CONDENSATION | | |
| DC11 | DAMP | | |
| DC12 | MOISTURE PRESENT | 623 | |
| DC13 | WET | | |
| DC20 | CORROSION | | |
| DC21 | CORRODED | 391 | 115 |
| DC22 | FROZEN | 492 | 152 |
| DC22 | FROZEN | | 194 |
| DC23 | PITTED | 713 | 163 |
| DC24 | RUSTED | 759 | |
| DD00 | DAMAGE | | |
| DD10 | ACCIDENT/COLLISION | | |
| DD11 | ACCIDENT, COLLISION | 301 | 140 |
| DD12 | DAMAGE, DERAIL | 415 | 149 |
| DD13 | DROPPED | | |
| DD20 | GENERAL | | |
| DD21 | CUT | 406 | 117 |
| DD22 | DAMAGE, SEC AC | | |
| DD23 | DAMAGED | | |
| DD24 | DESTROYED | 414 | |
| DD25 | FIRE DAMAGE/SMOKE | 443 | 191 282 |
| DD26 | FOREIGN OBJECT DAMAGE | 486 | |
| DD27 | FOREIGN OBJECT OBSTRUCT | 483 | 123 |
| DD28 | LEAKING | 583 | 133 |
| DD29 | OBSTRUCTED | | |
| DD2A | PUNCTURED | 731 | |
| DD2B | TORN | 826 | |
| DD30 | VANDALISM | | |
| DD31 | BROKEN GLASS | 517 | 199 |
| DD32 | DEFECTS, FLOOR/SEATS | | 285 |
| DD33 | GRAFFITI | 520 | |
| DD34 | VANDALISM | | 0300 |
| DE00 | ELECTRICAL | | |
| DE10 | BAD CONNECTION | | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|--------------------------|-------|-------|
| DE11 | BAD SOLDER CONNECTION | 320 | 161 |
| DE12 | DEFECTIVE CANNON PLUG | 350 | |
| DE13 | DEFECTIVE WIRING | | 144 |
| DE14 | LOOSE CONNECTION, NONE | 381 | 157 |
| DE15 | PUSHED PIN | | |
| DE20 | GENERAL | | |
| DE21 | BURNED CONTACT | 383 | |
| DE22 | DEFECT, POTTING MATTER | 719 | |
| DE23 | DEFECTIVE CAPACITOR | | 148 |
| DE24 | DEFECTIVE CONDENSOR | | 147 |
| DE25 | DEFECTIVE DIODE | | 122 |
| DE26 | DEFECTIVE RELAY | | 165 |
| DE27 | DEFECTIVE RESISTOR | | 166 |
| DE28 | DEFECTIVE TRANSISTOR | | 136 |
| DE29 | DIRTY CONTACTS | 380 | 171 |
| DE33 | CONFLICTING CAB SIGNALS | | 266 |
| DE2A | FLASHED/ARCING | 317 | 188 |
| | | | 192 |
| DE2B | INSULATION BREAKDOWN | 553 | 153 |
| DE2C | INTERLOCK MALFUNCTION | 556 | |
| DE2D | LOST THIRD RAIL POWER | 590 | |
| DE2E | MALFUNCTION, RELAY COIL | 753 | |
| DE2F | MISC ELECTRICAL TRBLE | | 269 |
| DE2H | NO PRIMARY POWER | | 158 |
| DE2J | OVERLOAD | | 206 |
| DE2K | TRIPPED | 832 | 137 |
| DE2L | TRIPPED, CIRCUIT BREAKER | 371 | 210 |
| DE2M | TROUBLE, TRAINLINE | | 198 |
| DE2N | DEFECTIVE SWITCH | | 290 |
| DE2P | DEFECTIVE CONTACT TIP | | 295 |
| DE30 | MISWIRED | | |
| DE31 | CROSSED LEADS | 397 | |
| DE32 | MISWIRED/CONNECT INCORR | 377 | 116 |
| DE33 | CONFLICTING CAB SIGNALS | | 266 |
| DE40 | MOTOR-SPECIFIC | | |
| DE41 | DAMAGED ARMATURE | 309 | 156 |
| DE42 | DAMAGED COMMUTATOR | 399 | |
| DE43 | HIGH MICA | 613 | 293 |
| DE44 | LOW MICA | 619 | 294 |
| DE45 | OPEN AT RISER, COMM | | 113 |
| DE46 | OUT OF ROUND | 679 | |
| DE47 | OUT OF ROUND, COMM | | 114 |
| DE48 | OVERLOADED MOTOR | 626 | 202 |
| DE49 | WORN BRUSHES | 335 | 267 |
| DE50 | OPEN CIRCUIT | | |
| DE51 | BLOWN FUSE | 508 | 124 |
| DE52 | BROKEN LEAD | 580 | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|-----------------------|-------|-------|
| DE53 | BURNED OUT BULB | 347 | |
| DE54 | OPEN CIRCUIT | 368 | 169 |
| DE55 | OPEN FILAMENT | | |
| DE60 | OUT OF SPECIFICATION | | |
| DE61 | DISTORTED OUTPUT | | |
| DE62 | EXCESSIVE HUM/STATIC | 423 | |
| DE63 | HIGH INPUT | | |
| DE64 | HIGH OUTPUT | | |
| DE65 | HIGH VOLTAGE | 531 | |
| DE66 | INCORRECT CAPACITANCE | 356 | |
| DE67 | INCORRECT CURRENT | 401 | |
| DE68 | INCORRECT FREQUENCY | 489 | |
| DE69 | INCORRECT SIGNAL | 557 | 200 |
| DE6A | INCORRECT TIME DELAY | 823 | |
| DE6B | INCORRECT VOLTAGE | 860 | |
| DE6C | LOSS OF GAIN | | |
| DE6D | LOW INPUT | | |
| DE6E | LOW OUTPUT | | |
| DE6F | LOW VOLTAGE | 598 | |
| DE6H | NO HIGH TONE | 660 | |
| DE6J | NO INPUT | 651 | |
| DE6K | NO LOW TONE | 663 | |
| DE6L | NO OUTPUT | 648 | |
| DE6M | OVERSPEED | 697 | 203 |
| DE70 | SHORTED | | |
| DE71 | CHANGE OF VALUE | 359 | |
| DE72 | GROUNDING | 516 | 126 |
| DE73 | SHORTED | 791 | 135 |
| DE74 | WELDED, CONTACTS | 386 | 109 |
| DE76 | DEFECTIVE I.C. | | 298 |
| DM00 | PHYSICAL/MECHANICAL | | |
| DM10 | BROKEN/CRACKED | | |
| DM11 | BROKEN SEAL | 776 | |
| DM12 | BROKEN SPRING | 341 | 162 |
| DM13 | BROKEN/SHEARED | 338 | 108 |
| DM14 | CRACKED | 394 | |
| DM15 | CRACKS, THERMAL | 820 | |
| DM16 | RUPTURED | 349 | 132 |
| DM17 | SHEARED SHAFT | 788 | |
| DM20 | CONTAMINATED, SURFACE | | |
| DM21 | BUILDUP SCALE | 770 | |
| DM22 | CONTAMINATED | 387 | 172 |
| DM23 | DIRTY | 419 | 120 |
| DM24 | STICKY/GUMMY | 812 | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|-------------------------|-------|-------|
| DM30 | DEFECTIVE | | |
| DM31 | DEFECTIVE | | |
| DM32 | DEFECTIVE BEARING | 323 | 104 |
| DM33 | DEFECTIVE FUEL LINE | | |
| DM34 | DEFECTIVE GASKET | 510 | 125 |
| DM35 | DEFECTIVE GROMMET | 513 | |
| DM36 | DEFECTIVE PACKING | 710 | |
| DM37 | DELAMINATED | 410 | 182 |
| DM38 | DETERIORATED | 416 | |
| DM39 | PULLED APART | 728 | 164 |
| DM3A | ROUGH/SCORED | 750 | 131 |
| DM3B | SEPARATED | 779 | |
| DM3C | STRIPPED | 815 | |
| DM3D | DEFECTIVE SHUNT | | 208 |
| DM40 | DEFORMED/DISTORTED | | |
| DM41 | BENT/BUCKLED/DENT/TWIST | 326 | 105 |
| DM42 | CRUSHED/CRIMPED | 403 | 179 |
| DM43 | DEFORMED/DISTORTED | 411 | |
| DM44 | OUT OF BAL/TOL | 676 | 146 |
| DM45 | STRETCHED | | |
| DM46 | UNBALANCED | 856 | 205 |
| DM50 | GENERAL | | |
| DM51 | CHIPPED/PEELING | 366 | |
| DM52 | INCORRECT TORQUE | 554 | |
| DM53 | LOOSE | 589 | 155 |
| DM54 | LOOSE/DAMAGED COMM HDW | 592 | |
| DM55 | LOST/MISSING | 595 | 145 |
| DM56 | MISSING MINOR HDW | 616 | 107 |
| DM57 | UNSEATED | 859 | 138 |
| DM58 | WEAK | 870 | |
| DM59 | WORN HOLES/OVERSIZE | 533 | |
| DM5A | WORN, BRAKE RIGGING | | |
| DM5B | WORN | 899 | 143 |
| DM5C | WORN BEYOND LIMITS | 899 | |
| DM60 | JAMMED/STUCK | | |
| DM61 | BOUND, BOX | | |
| DM62 | JAM, COIN | | 176 |
| DM63 | JAM, PAPER/TRANSFER | | 180 |
| DM64 | JAM, TICKET | | 177 |
| DM65 | JAM/BINDING/LOCKED | 332 | 106 |
| DM66 | SEIZED | | |
| DM67 | STICKING | 809 | |
| DM68 | TIGHT | | 170 |
| DM70 | THERMAL | | |
| DM71 | BLISTERED | | |
| DM72 | BURNED | 329 | 111 |
| DM73 | CARBONIZED | | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|--------------------------|-------|-------|
| DM74 | CRYSTALIZED | 409 | 174 |
| DM75 | HOT/OVERHEATED | 536 | 130 |
| DM76 | THERMAL | | 204 |
| DM77 | DEFECTIVE INTER LOCK | | 296 |
| DM78 | DEFECTIVE TRANSFORMER | | 299 |
| DN00 | NO DEFECT | | |
| DN10 | CND/NTF | | |
| DN11 | FAILURE, CANNOT DUP | 353 | |
| DN12 | NO DEFECT NOTED | 654 | |
| DN13 | NO DEFECT, OPER ERROR | 636 | |
| DN14 | SELF-CLEAR | | |
| DN20 | INSPECTION/TEST | | |
| DN21 | INSPECTION, SPECIAL | | |
| DN21 | INSPECTION, SPECIAL | | |
| DN22 | NO DEFECT, COMP REM/TEST | 633 | 185 |
| DN23 | TRACK TEST REQUIREMENT | | |
| DN30 | SCHEDULED MAINT | | |
| DN31 | INIT CONSTRUCTION/FAB | 560 | |
| DN32 | NO DEFECT, PROG/MAIN | 630 | 119 |
| DN33 | NO DEFECT, SCHED MOD/MAI | 639 | 118 |
| DN34 | NO DEFECT, TIME CHG REM | 642 | |
| DP00 | PNEUMATIC/HYDRAULIC | | |
| DP10 | CONTAMINATED | | |
| DP11 | AIR IN SYSTEM | 312 | |
| DP12 | CONTAMINATED, OIL | 670 | |
| DP20 | DEFECTIVE | | |
| DP21 | DEFECTIVE AIR BELLOWS | | 258 |
| DP22 | DEFECTIVE PIPING | | |
| DP23 | DRY | 418 | 183 |
| DP30 | GENERAL | | |
| DP31 | EXCESSIVE LUB/OIL | 420 | 184 |
| DP32 | EXCESSIVE REFRIGERANT | 429 | |
| DP33 | OFF, FITTING | | |
| DP34 | OVERAGE | | 167 |
| DP35 | OVERSERVICED | 694 | |
| DP40 | LOW/INSUFFICIENT | | |
| DP41 | LOW FLUID LEVEL | 480 | 151 |
| DP42 | LOW LUBRICANT | 603 | |
| DP43 | LOW REFRIGERANT | 602 | 297 |
| DP44 | LOW TRANS OIL | | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|-----------------------|-------|-------|
| DP50 | RESTRICTED | | |
| DP51 | RESTRICTED | | |
| DP52 | RESTRICTED AIR FLOW | 315 | 160 |
| DS00 | SYSTEM OPERATION | | |
| DS10 | ERRATIC | | |
| DS11 | CHATTERING | 365 | |
| DS12 | ERRATIC OPERATION | 425 | |
| DS12 | ERRATIC OPERATION | | |
| DS12 | ERRATIC OPERATION | | |
| DS12 | ERRATIC OPERATION | | |
| DS12 | ERRATIC OPERATION | | |
| DS13 | INTERMITTENT OPER | 559 | 154 |
| DS14 | MOTION, LATERAL | | 139 |
| DS15 | MOTION, VERTICAL | | 142 |
| DS16 | NOISY | 645 | 281 |
| DS20 | FAILURE TO OPERATE | | |
| DS21 | CLOSE, WILL NOT | 879 | 232 |
| DS22 | DARK CAR | | 264 |
| DS23 | DEAD CAR | | 263 |
| DS24 | FAILED, BRAKE CHARGE | | 216 |
| DS25 | FAILED, BRAKE RELEASE | | 215 |
| DS26 | FAILS TO OPERATE | 441 | |
| DS27 | FAILURE, A/C | | 134 |
| DS28 | FAILURE, ASSOCIATED | | |
| DS29 | FAILURE, ATC | | 255 |
| DS2A | FAILURE, ATO | | 250 |
| DS2B | FAILURE, CAB SIGNAL | | 251 |
| DS2C | FAILURE, INTERNAL | 562 | |
| DS2D | INOP CHANNEL SELECTOR | 362 | |
| DS2E | NO DYNAMIC BRAKE | | 212 |
| DS2F | NO GO INDICATION | 657 | |
| DS2H | NO PRESSURE | | |
| DS2J | NO PUBLIC ADDRESS | | 175 |
| DS2K | OPEN, WILL NOT | 885 | 231 |
| DS2K | OPEN, WILL NOT | | |
| DS2L | OPERATE, WILL NOT | 682 | 141 |
| DS2M | RECEIVE, WILL NOT | | 186 |
| DS2N | RECHARGE, WILL NOT | 888 | |
| DS2P | RECOVER, WILL NOT | 876 | |
| DS2R | STATION BYPASSED | | 129 |
| DS2S | STATION STOP LONG | | 112 |
| DS2T | STATION STOP SHORT | | 127 |
| DS2U | TRANSMIT, WILL NOT | 882 | 187 |
| DS2V | TURN OFF, WILL NOT | 894 | |
| DS2W | TURN ON, WILL NOT | 891 | |
| DS2X | UNABLE TO MOVE | 850 | |


| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|------------------------|-------|-------|
| DS30 | GENERAL | | |
| DS31 | FALSE REJECTION | | |
| DS32 | FAULTY AUDIO | 319 | 121 |
| DS33 | FREE-WHEELING | | |
| DS34 | BRAKE PENALTY | | 265 |
| DS35 | BRAKE FAULT | | 289 |
| DS40 | OUT OF SPECIFICATION | | |
| DS41 | BRAKES, IN EMERGENCY | | 213 |
| DS42 | COLD CAR | | 243 |
| DS43 | ERROR, DISPLAY READOUT | 417 | |
| DS44 | HIGH PRESSURE | 530 | 128 |
| DS45 | HIGH TEMPERATURE | 532 | |
| DS46 | LOW | | 181 |
| DS47 | LOW COMPRESSION | 389 | 173 |
| DS47 | LOW COMPRESSION | | 201 |
| DS48 | LOW PRESSURE | 601 | 211 |
| DS49 | LOW TEMPERATURE | 599 | |
| DS4A | POOR BRAKING | | 214 |
| DS4B | SLOW | 797 | |
| DS4C | SLOW ACCELERATION | | 159 |
| DS4C | SLOW ACCLERATION | | 291 |
| DS4D | SLOW BRAKE RELEASE | | 102 |
| DS4E | SLUGGISH | 800 | |
| DS4F | SQUELCH | 782 | |
| DS4G | DEFECTIVE THERMOSTAT | | 209 |
| DS4H | FAILS TO MEET SPEC | | 292 |
| DS4J | EXCESSIVE POWER | | |
| DS4K | P-SIG PROBLEM | | |
| DW00 | WHEELS | | |
| DW10 | FLANGE | | |
| DW11 | CHIPPED FLANGE | 466 | |
| DW12 | CUT FLANGE | 469 | |
| DW13 | HIGH FLANGE | 471 | 103 |
| DW14 | LOW FLANGE | | |
| DW15 | SHARP FLANGE | 474 | |
| DW16 | THIN FLANGE | 477 | 195 |
| DW20 | FLATS | | |
| DW21 | FLAT | | |
| DW22 | FLAT SPOT | | 190 |
| DW23 | FLAT SPOT, 1.5-2.5" | 454 | |
| DW24 | FLAT SPOT, 2.5-3.5" | 457 | |
| DW25 | FLAT SPOT, 3.5-4.5" | 460 | |
| DW26 | FLAT SPOT, 4.5-6.5" | 463 | |
| DW27 | FLAT SPOT, <1.5" | 451 | |
| DW28 | FLAT SPOT, >6" | | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|------------------------|-------|-------|
| DW30 | GENERAL | | |
| DW31 | CONDEMNED, WHEELS | | 197 |
| DW32 | LIMIT, WHEEL | 586 | |
| DW33 | MISMATCHED WHEELS | | |
| DW34 | EXCESSIVE SLIP | | 207 |
| DW40 | PROFILE | | |
| DW41 | CONTOUR, TREAD OUT OF | | |
| DW42 | DEFECTIVE WHEEL TREAD | | 196 |
| DW43 | PROFILE BAD | | |
| DZ00 | MISCELLANEOUS | | |
| DZ10 | ADMINISTRATIVE | | |
| DZ11 | CANNIBALIZED | 355 | |
| DZ12 | CONDEMNED, ADMIN | 303 | |
| DZ13 | FAILED SAFETY TEST | 442 | 0193 |
| DZ14 | NOT REPORTED | | |
| DZ15 | NUMBER CHANGE, CAR | | |
| DZ16 | OFF, TRUCK (TEMP) | | |
| DZ17 | SHORTAGE | | 168 |
| DZ18 | UNKNOWN | | |
| DZ19 | REM FOR OTHER MAIN ACT | 735 | |
| DZ20 | EQUIPMENT | | |
| DZ21 | DEFECT, CONSOLE | | 252 |
| DZ22 | DEFECT, COUPLER | | 288 |
| DZ23 | DEFECTIVE HORN | | 287 |
| DZ24 | DEFECTIVE INDENTRA | | 110 |
| DZ25 | FAILS DIAGNOSTIC TEST | 440 | |
| DZ26 | FIRE EXTING EMPTY | 446 | |
| DZ27 | LIGHTS, EXTERIOR | | 253 |
| DZ29 | LIGHTS, INTERIOR | | 254 |
| DZ1A | SUBASSEMBLY FAILURE | 805 | |
| DZ2A | PROBLEM, ENGINE | | |
| DZ30 | GENERAL | | |
| DZ31 | CLOSED | | |
| DZ32 | MERCURY SPLIT | | |
| DZ33 | MISCELLANEOUS DEFECTS | | 189 |
| DZ34 | OPEN | 673 | 178 |
| DZ35 | OVERCHARGED | 691 | |
| DZ36 | SECONDARY | | |
| DZ37 | UNABLE TO ADJUST | 853 | |
| DZ41 | HUMAN ERROR | | |
| DZ42 | IMPROPER ADJUSTMENT | 300 | 101 |
| DZ43 | IMPROPER SPACING/CLEAR | 550 | |
| DZ44 | INCORRECTLY ASSEMBLED | 306 | 150 |
| DZ45 | MISMATCHED PAIR | | |

| D-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|---------------------|-------|-------|
| DZ46 | STUCK IN GAP, TRAIN | 833 | |
| DZ47 | WRONG PART | | |
| DZ50 | INDICATORS/SIGNALS | | |
| DZ51 | BLUE LIGHT | | |
| DZ52 | CONDUCTOR INDICATOR | | |
| DZ53 | GUARD LIGHT | | |
| DZ54 | MOTORMAN INDICATOR | | |
| DZ55 | MISC INDICATORS | | 233 |

APPENDIX N

Generic Repair Codes



| R-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|--------------------------|-------|-------|
| R000 | REPAIR CODES | | |
| RA00 | ADDITION | | |
| RA01 | ADDED | | 26 |
| RA02 | ADDED ANTI-FREEZE | | |
| RA03 | ADDED ENGINE OIL | | |
| RA04 | ADDED FLUID | | 04 |
| RA05 | ADDED OIL | | 14 |
| RA06 | CHARGED WITH REFRIGERANT | | 22 |
| RA07 | LUBRICATED | | 37 |
| RA08 | CHECK SOLUTION | | 32 |
| RB00 | ADJUSTMENT | | |
| RB01 | ADJUSTED | 22 | 01 |
| RB02 | ALIGNED | | 24 |
| RB03 | SHIMMED | | 55 |
| RB04 | TIGHTENED | | 65 |
| RB05 | CALIBRATED | | |
| RC00 | ADMINISTRATIVE | | |
| RC01 | ADDITIONAL MATERIAL REQ | | |
| RC02 | CAR NOT YET IN SHOP | | 83 |
| RC03 | COMPLETED PREVIOUSLY | 35 | |
| RC04 | COMPLETED PROGRAM | | |
| RC05 | COMPLETED TEST | | |
| RC06 | DEFERRED REPAIR | | 88 |
| RC07 | INSUFFICIENT TIME | | 81 |
| RC08 | JOB INCOMPLETE | | |
| RC09 | LABOR NOT AVAILABLE | | 80 |
| RC10 | NO DEFECT FOUND | | 99 |
| RC11 | NO MATERIAL AVAILABLE | | 82 |
| RC12 | OPERATOR ERROR | | 98 |
| RC13 | REMOVED FOR OTHER USE | | 74 |
| RC14 | REPAIRED BY VENDOR | | |
| RC15 | SCRAPPED | 97 | |
| RC16 | TRANSFER JOB SITE | | |
| RC17 | TRANSFER TO MAIN SHOP | | |
| RC18 | VENDOR TO REPAIR | 93 | 85 |
| RC19 | WARRANTY REPAIR | | |
| RC20 | WAITING FOR CAR MOVE | | 87 |

| R-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|------------------------|-------|-------|
| RC21 | WAITING FOR CAR SHIFT | | 86 |
| RC22 | WAITING FOR TRACK TEST | | 84 |
| RC23 | WRONG PART | | |
| RC24 | WAIVED REPAIR | | |
| RD00 | DRAIN / PURGE | | |
| RD01 | DRAINED REFRIGERANT | | |
| RD02 | DRAINED TANKS | | |
| RD03 | EVACUATED | | |
| RD04 | PURGED | | 18 |
| RE00 | FAB / MODIFY / REBUILD | | |
| RE01 | FABRICATE | 85 | |
| RE02 | MODIFIED | 55 | 38 |
| RE03 | OVERHAULED | 75 | 31 |
| | | | 58 |
| RE04 | OVERHAULED TRUCK | | |
| RE05 | REBUILT | | 97 |
| RF00 | FILTER / RENEW | | |
| RF01 | FILTERED OIL | | 78 |
| RF02 | RENEW SOLUTION | | 28 |
| RJ00 | INSPECTION / TEST | | |
| RJ01 | DIAGNOSTIC TESTED | | |
| RJ02 | INSPECTED & FOUND OK | 11 | 67 |
| RJ03 | ORIFICE TEST | | 35 |
| RJ04 | QC TEST - MOTOR BRUSH | | |
| RJ05 | TESTED | | 03 |
| RJ06 | TRACK TEST | | 89 |
| RJ07 | TROUBLE SHOOTING | 33 | 12 |
| RJ08 | VOLTAGE CHECK | | 30 |
| RJ09 | CURRENT CHECK | | |
| RM00 | MISCELLANEOUS | | |
| RM01 | JUMPER | | 79 |
| RM02 | MISC REPAIRS | | 47 |

| R-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|-------------------------|-------|-------|
| RM03 | PRELOADED | | |
| RM04 | ACCIDENT REPAIR | | |
| RM05 | VANDALISM REPAIR | | |
| RM06 | RERAILED | | 50 |
| RN00 | REMOVAL / REPLACEMENT | | |
| RN01 | CHANGED OIL | | 77 |
| RN02 | REMOVED | | |
| RN03 | REMOVED & REPLACED | 21 | 75 |
| RN04 | REMOVED TO MAKE REPAIRS | 15 | 73 |
| RN05 | REPLACED | 20 | 76 |
| RN06 | REPLACED DIODE | | 42 |
| RN07 | REPLACED GASKET | | |
| RN08 | REPLACED GROMMET | | |
| RN09 | REPLACED MINOR HARDWARE | 41 | 51 |
| RN10 | REPLACED RELAY | 25 | 38 |
| RN11 | REPLACED RESISTOR | | 43 |
| RN12 | REPLACED SPRING | | 51 |
| RN13 | REPLACED TERMINAL | | 16 |
| RN14 | REPLACED TRANSISTOR | | 32 |
| RN15 | REPLACED, BRUSHES | | 36 |
| RN16 | REPLACED, NEW | | |
| RN17 | REPLACED, RECONDITIONED | | |
| RP00 | REMOVE OBSTRUCTION | | |
| RP01 | CLEARED JAM | | 29 |
| RP02 | REMOVED BAD COIN | | 20 |
| RP03 | REMOVED BAD TICKET | | 21 |
| RP04 | REMOVED FOREIGN OBJECT | | 17 |
| RP05 | CLEARED GROUNDS | | 56 |
| RR00 | REPAIR / CORRECTION | | |
| RR01 | CONNECTED | | 10 |
| RR02 | DISCHARGE/RECHARGE | | 36 |
| RR03 | DISCONNECTED | | 27 |
| RR04 | FREED BINDING PARTS | | 19 |
| RR05 | PACKED | | |
| RR06 | RE-BONDED | | |
| RR07 | REASSEMBLED CORRECTLY | | |
| RR08 | RECOUPLED | | 15 |
| RR09 | REJOINED MERCURY | | |
| RR10 | REMOVE/REPAIR/REPLACED | 25 | 13 |
| RR11 | REPAIRED | | |
| RR12 | REPAIRED FUEL LINE | | |

| R-CODE | CODE DEFINITION | WMATA | PATCO |
|--------|------------------------------|-------|-------|
| RR13 | REPAIRED PIPING | | |
| RR14 | RESET | | 07 |
| RR15 | REWired | | 54 |
| RR16 | RIVETED | | 52 |
| RR17 | SEALED | | 40 |
| RR18 | SERVICED | 23 | |
| RR19 | SET | | 53 |
| RR20 | SOLDERED | | 57 |
| RR21 | SPLICED | | 59 |
| RR22 | STANDARD TRUCK REPAIRS | | |
| RR23 | STRAIGHTEN | | 63 |
| RR24 | TEST & REPAIR | | 62 |
| RR25 | THAWED | | 64 |
| RR26 | WELDED | | 66 |
| RR27 | WIRING REPLACED/SPLICED | | |
| RR28 | DISASSEMBLE AND/OR BREAKDOWN | | 68 |
| RS00 | SURFACE TREATMENT | | |
| RS01 | BURNISHED/POLISHED | | 05 |
| RS02 | CLEANED | | 09 |
| RS03 | DRESSED & FILED | | 11 |
| RS04 | GROUND/TURNED | | 48 |
| RS05 | INSULATED | | 33 |
| RS06 | MACHINED | 76 | 34 |
| RS07 | PAINTED/COATED | | 39 |
| RS08 | PATCHED | | 41 |
| RS09 | REBORED CYLINDER | | |
| RS10 | TURNED/UNDERCUT | | 25 |
| RS11 | WHEEL TRUED BY HAND | | |
| RS12 | WHEEL TRUED OFF CAR | | |
| RS13 | WHEEL TRUED ON CAR | | 72 |
| RS14 | WHEEL TRUED ON LATHE | | 23 |
| RS15 | WHEEL PRESSED OFF | | 44 |
| RS16 | UPHOLSTERED, PATCHED OR SEWN | | |
| RS17 | WHEEL BORED | | 46 |
| RS18 | WHEEL MOUNTED | | 45 |

APPENDIX O

Reproduced from
best available copy. 

PATCO Generic Parts List

| GENERIC PART NO | UCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|-----|-----------|--|----------------------|
| AEA000 | 6V | AF | CONTROLLER, ASSY *MASTER | 41V |
| AEA000 | KD | 00 | KNOB *CONTROLLER | 41V0201 |
| AEA000 | 5R | 00 | SWITCH | 41V09 |
| AEA000 | 6B | 00 | CLIP *GRAY SWITCH | 41V0901 |
| AEA000 | RY | VA | RESISTOR, VARIABLE | 41V10 |
| AEA000 | AT | 00 | ARM *POT CONTACT ASSY | 41V1001 |
| AEA000 | S7 | CJ | SPRING, COMPRESSION *CONT ARM | 41V1002 |
| AEA000 | PV | 00 | PLATE *POTENTIOMETER DRIVE | 41V11 |
| AEA003 | CE | AF | CAM, ASSY *REVERSE | 41V05 |
| AEA003 | DM | 00 | DISC *DETENT REVERSE CAM | 41V0501 |
| AEA003 | SM | 00 | SHAFT *W/GEAR KEY P N REV | 41V0804 |
| AEA004 | CE | AF | CAM, ASSY *THRITTLE | 41V03 |
| AEA004 | S7 | 00 | SPRING *THRITTLE CAM | 41V0302 |
| AEA004 | SM | 00 | SHAFT *W/GEAR & KEY THRITL | 41V08 |
| AEA004 | 9C | 00 | GEAR *THRITTLE SHAFT | 41V0801 |
| AEA004 | DM | TJ | BEARING, THIKST *THRITL SHAFT | 41V0902 |
| AEA004 | S7 | 00 | SPRING *STUD THRITTLE SHAFT | 41V0902 |
| AE0000 | PE | 00 | PANEL *PART OF AUX CNTL GRP | 41V0803 |
| AE0000 | R3 | 00 | RHEOSTAT *175 OHMS AUX CNTL GRP | 42K |
| AE0000 | BV | 00 | BLOCK *SWITCH ASSY TIMING RELAY | 42M |
| AE0000 | RU | AF | RELAY, ASSY *PROPULSION ETC | 43B |
| AE0000 | RU | 00 | RELAY *BRAKE, BR-GE9 9323 | 43B01 |
| AE0000 | 4B | 00 | COIL *OPERATING BR | 43B0101 |
| AE0000 | 6R | MH | CONTACT, MOVABLE *BR | 43B0102 |
| AE0000 | 6R | SN | CONTACT, STATIONARY *INNER BR | 43B0103 |
| AE0000 | 6R | SN | CONTACT, STATIONARY *OUTER BR | 43B0104 |
| AE0000 | 5N | SN | SUPPORT, STATIONARY *BR | 43B0105 |
| AE0000 | S7 | CJ | SPRING, COMPRESSION *CONTACT FINGER BR | 43B0106 |
| AE0000 | S7 | CJ | SPRING, COMPRESSION *ARMATURE BR | 43B0107 |
| AE0000 | RU | 00 | RELAY *BRAKE CHECK DCR | 43B02 |
| AE0000 | RU | 00 | RELAY *CKT BRKR RESET CBR | 43B03 |
| AE0000 | RU | 00 | COIL *OPERATING CBR | 43B0J01 |
| AE0000 | 4B | 00 | RELAY *CRT CHECK CLR | 43B04 |
| AE0000 | RU | 00 | RELAY *CURRENT LEVEL CLR | 43B05 |
| AE0000 | RU | 00 | RELAY *DYN GRID CHECK DGC | 43B06 |
| AE0000 | 4B | 00 | COIL *OPERATING DGC | 43B07 |
| AE0000 | S7 | CJ | SPRING, COMPRESSION *ARMATURE DGC | 43B0701 |
| AE0000 | 6R | SN | CONTACT, STATIONARY *DGC | 43B0702 |
| AE0000 | 5N | 00 | SUPPORT *CONTACT DGC | 43B0703 |
| AE0000 | 5N | 00 | SCREW *ARMATURE ADJUSTING DGC | 43B0705 |
| AE0000 | 6F | 00 | COLLAR *ADJUSTING SCREW DGC | 43B0706 |
| AE0000 | RU | 00 | RELAY *DIRECTIONAL DIR | 43B0707 |
| AE0000 | RU | 00 | RELAY *DIFFERENTIAL DIR | 43B08 |
| AE0000 | RU | 00 | RELAY *DIFFERENTIAL DIR | 43B09 |

| GENERIC PART NO | IUCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|------|-----------|--|----------------------|
| AEBB00 | 5R | 00 | SWITCH *W/SUPPORTS DR | 43D0901 |
| AEBB00 | RU | 00 | RELAY *EMERGENCY FR | 43B10 |
| AEBB00 | RU | 00 | RELAY *FIELD "A" FAR | 43B11 |
| AEBB00 | RU | 00 | RELAY *FIELD "B" FBR | 43B12 |
| AEBB00 | RU | TL | RELAY, TIME DELAY *GRID PROTECTION | 43B13 |
| AEBB00 | RU | 00 | RELAY *TRANSITION LRTR | 43D14 |
| AEBB00 | RU | 00 | RELAY *PARALLEL PAR | 43B15 |
| AEBB00 | RU | 00 | RELAY *PWR CHECK PC | 43B16 |
| AEBB00 | 5R | 00 | SWITCH *REED PC | 43B1601 |
| AEBB00 | RU | 00 | RELAY *PILOT MTR PMR | 43D17 |
| AEBB00 | RU | 00 | RELAY *POWER PR | 43B18 |
| AEBB00 | RU | 00 | RELAY *POTENTIAL PTR | 43B19 |
| AEBB00 | RY | AR | RESISTOR, ADJUSTABLE *PTR | 43B1905A |
| AEBB00 | RY | FC | RESISTOR, FIXED *PTR | 43B1905B |
| AEBB00 | 3H | 00 | BUSHING *RESISTOR PTR | 43B1905C |
| AEBB00 | SB | 00 | SCREW *RESISTOR PTR | 43B1905D |
| AEBB00 | RY | FC | RESISTOR, FIXED *WIRE WD PTR | 43D1905E |
| AEBB00 | RY | VA | RESISTOR, VARIABLE *WIRE WD PTR | 43B1905F |
| AEBB00 | BV | TL | RELAY, TIME DELAY *POWER PTR | 43D20 |
| AEBB00 | RU | 00 | RELAY *RUN BACK RBR | 43B2001 |
| AEBB00 | RU | 00 | RELAY *WHEEL SLIP 1 TRUCK WSR1 | 43B21 |
| AEBB00 | RU | 00 | RELAY *WHEEL SLIP 2 TRUCK WSR2 | 43B22 |
| AEBB00 | RU | 00 | RELAY *PWR INTERLOCK PIR | 43B23 |
| AEBB00 | GR | MII | CONTACT, MOVABLE *PTR | 43B24 |
| AEBB00 | GR | SN | CONTACT, STATIONARY *PTR | 43B2401 |
| AEBB00 | 4B | 00 | COIL *OPERATING PTR | 43B2402 |
| AEBB00 | SU | 00 | SHUNT *MOVABLE CONTACT PIR | 43B2403 |
| AEBB00 | S7 | CJ | SPRING, COMPRESSION *ARMATURE PIR | 43B2404 |
| AEBB00 | RU | 00 | RELAY *CONTROL PLUG CPRA | 43B2405 |
| AEBB00 | RU | TL | RELAY, TIME DELAY *MAIN CNTRL SRP | 43B26 |
| AEBB00 | RU | TL | RELAY, TIME DELAY *LIGHTING | 43B28 |
| AEBB00 | CJ | 00 | CAPACITOR *SURGE MAIN CNTRL GRP | 43C01 |
| AEBB00 | RY | VA | RESISTOR, VARIABLE *MAIN CNTRL GRP | 43C02 |
| AEBB00 | 00 | 00 | LOGIC AND LO-V CONTROL | 43C09 |
| AEBB00 | PJ | 00 | PC BOARD | 43F |
| AEBB00 | RJ | 00 | REACTOR *ATX | 43F19 |
| AEBB00 | S2 | 00 | SPACER *REACTOR SUPPORT | 43G01 |
| AEBB00 | S2 | 00 | SPACER *REACTOR TO SHUNT BUS BAR | 43G0201 |
| AEBB00 | S2 | 00 | SPACER *REACTOR SUPPORT | 43G0202 |
| AEBB00 | B0 | MJ | BOLT, MOUNTING *REACTOR | 43G0203 |
| AEBB00 | 3F | 00 | BUS BAR *REACTOR TO SHUNT | 43G0204 |
| AEBB00 | RJ | 00 | REACTOR *OLMXI OVERLOAD | 43G0205 |

| GENERIC PART NO | IUCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|------|-----------|--|----------------------|
| AEBB00 | SU | IC | SHUNT, INDUCTIVE. | 43G05 |
| AEBB00 | RY | FC | RESISTOR, FIXED | 43G12 |
| AEBB00 | RY | FC | RESISTOR, FIXED *MAIN CNTRL GRP | 43G14 |
| AEBB00 | RY | FC | RESISTOR, FIXED *MAIN CNTRL GRP | 43G15 |
| AEBB00 | RY | FC | RESISTOR *MAIN CNTRL GRP | 43G16 |
| AEBB00 | RY | FC | RESISTOR, FIXED *MAIN CNTRL GRP | 43G17 |
| AEBB00 | RY | FC | RESISTOR, FIXED *MAIN CNTRL GRP | 43G18 |
| AEBB00 | PE | 00 | PANEL | 43H |
| AEBB00 | PE | 00 | PANEL *PILOT MOTOR & RATE CONTROL | 43H0101 |
| AEBB01 | DF | AF | DETECTOR ASSY *DEAD CAR | 43D |
| AEBB01 | RU | 00 | RELAY *PRO DEAD CAR DET | 43D0101 |
| AEBB01 | RU | TL | RELAY, TIME DELAY *DCTD DEAD CAR DET. | 43D0102 |
| AEBB01 | CJ | 00 | CAPACITOR *DCT DEAD CAR DET | 45D0103 |
| AEBB01 | RU | 00 | RELAY *DCR DEAD CAR DET | 43D0104 |
| AEBB01 | DL | 00 | DIODE *MODULE CRD DEAD CAR DET. | 43D0105 |
| AEBB03 | 60 | 00 | COUNTER *VEEDED ROOT CTR. | 43D0106 |
| AEBB03 | PJ | 00 | PC BOARD *DIFFERENTIAL RELAY 109 | 43F01 |
| AEBB03 | RU | 00 | RELAY *POTTED DIFFERENTIAL RELAY | 43F01G01 |
| AEBB03 | PJ | 00 | PC BOARD *OVERLOAD TRIP RELAY 109 | 43F02 |
| AEBB03 | RU | 00 | RELAY *POTTED OVLD TRIP RELAY | 43F0201 |
| AEBB04 | FJ | 00 | PC BOARD *DYN BRK FEEDBACK 353 | 43F05 |
| AEBB04 | R3 | 00 | RHEOSTAT *353 | 43F0501 |
| AEBB04 | R3 | 00 | RHEOSTAT *353 | 43F0502 |
| AEBB04 | PJ | 00 | PC BOARD *DYN BRAKE FEEDBACK 1313 | 43H0103E |
| AEBB05 | PJ | 00 | PC BOARD *LOAD WEIGHT 352 | 43F04 |
| AEBB05 | RX | FC | RESISTOR, FIXED *352 | 43F0401 |
| AEBB05 | RY | FC | RESISTOR, FIXED *352 | 43F0402 |
| AEBB05 | RY | FC | RESISTOR, FIXED *352 | 43F0403 |
| AEBB05 | RU | 00 | RELAY *REED 352 | 43F0404 |
| AEBB05 | RU | 00 | RELAY *REED 352 | 43F0405 |
| AEBB05 | RY | VA | RESISTOR, VARIABLE *TRIMMER 352 | 43F0406 |
| AEBB05 | RY | VA | RESISTOR, VARIABLE *TRIMMER 352 | 43F0407 |
| AEBB05 | RY | VA | RESISTOR, VARIABLE *TRIMMER 352 | 43F0408 |
| AEBB05 | RY | VA | RESISTOR, VARIABLE *TRIMMER 352 | 43F0409 |
| AEBB05 | PJ | 00 | PC BOARD *SPEED EVENT WHEEL SLIP GRP 277 | 43F21 |
| AEBB05 | DL | 2A | DIODE *ZENER *IN751 277 | 43F2101 |
| AEBB05 | RU | 00 | RELAY *PART OF CARD 277 | 43F2102 |
| AEBB05 | PJ | 00 | PC BOARD *SLIP COMPARTOR 278 | 43F22 |
| AEBB05 | CJ | 00 | CAPACITOR *0.047 MED 278 | 43F2201 |
| AEBB05 | CJ | 00 | CAPACITOR *68 MED 278 | 43F2202 |
| AEBB05 | RU | 00 | RELAY *PART OF CARD 278 | 43F2203 |
| AEBB05 | PJ | 00 | PC BOARD *SYNC SLIP 279 | 43F23 |
| AEBB05 | TZ | 00 | TRANSISTOR *2N2904 279 | 43F2301 |
| AEBB05 | RB | AF | RACK ASSEMBLY *WHEEL SLIP LESS PC BOARDS | 43F29 |

10/18/62
PATCO
COMPONENT DESCRIPTION AND TYPE/USE

10/18/62
PATCO
COMPONENT DESCRIPTION AND TYPE/USE

10/18/62
PATCO
COMPONENT DESCRIPTION AND TYPE/USE

10/18/62
PATCO
COMPONENT DESCRIPTION AND TYPE/USE

10/18/62
PATCO
COMPONENT DESCRIPTION AND TYPE/USE

| GENERIC PART NO | IUCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|------|-----------|---|----------------------|
| AEBB05 | PM | CK | PIN, CONNECTING *WHEEL SLIP RACK ASSY | 43F2901 |
| AEBB05 | PE | AF | PANEL, ASSY *LOAD WEIGHING, | 43G19 |
| AEBB05 | TW | PH | TRANSUDGER, PRESSURE *LOAD WEIGH | 43G1901 |
| AEBB05 | VB | MA | VALVE, MAGNETIC *LOAD WEIGH | 43G1902 |
| AEBB05 | HT | AF | HOSE, ASSY *LOAD WEIGH | 43G1903 |
| AEBB05 | HT | AF | HOSE, ASSY *LOAD WEIGH | 43G1904 |
| AEBB05 | KC | 00 | KIT *REPAIR LOAD WEIGH TRANSDUCER | 43G1905 |
| AEBB05 | PE | 00 | PANEL *SPIN SLIDE SYSTEM | 43H0102 |
| AEBB05 | PJ | 00 | PC BOARD *RATE OF CHANGE DETECTOR 1206 | 43H0102D |
| AEBB05 | PE | AF | PANEL, ASSY *LOAD WEIGH FOR CVI CARS | 43H19 |
| AEBB05 | TW | 00 | TRANSDUCER *LD WHT PHIL ASSY ON CVI CARS | 43H1901 |
| AEBB06 | PJ | 00 | PC BOARD *TRANSLATOR 355 | 43F08 |
| AEBB06 | PE | 00 | PANEL *TRANSLATOR LESS PC BOARDS | 43F30 |
| AEBB06 | PJ | 00 | PC BOARD *TRAIN LINE DECODER PWR CHK 1212 | 43H0101A |
| AEBB07 | PJ | 00 | PC BOARD *15 VOLT REGULATOR 354 | 43F06 |
| AEBB07 | DL | ZA | DIODE, ZENER *354 | 43F0601 |
| AEBB07 | CJ | EE | CAPACITOR, ELECTROLYTIC *354 | 43F0602 |
| AEBB07 | RY | FC | RESISTOR, FIXED *354 | 43F0603 |
| AEBB07 | TZ | 00 | TRANSISTOR *354 | 43F0604 |
| AEBB07 | PJ | 00 | PC BOARD *15 VOLT REGULATOR 354 | 43F07 |
| AEBB07 | PJ | 00 | RESISTOR, FIXED *354 | 43F09 |
| AEBB07 | PJ | 00 | PC BOARD *ZENER VOLTAGE 363 | 43F0901 |
| AEBB07 | DL | ZA | DIODE, ZENER *363 | 43F24 |
| AEBB07 | PJ | 00 | PC BOARD *FREQ 0 DC WHEEL SLIP GRP | 43F2401 |
| AEBB07 | D7 | 00 | BRIDGE *RECTIFIER 280 | 43F26 |
| AEBB07 | PJ | 00 | PC BOARD *27V ZENER SUPPLY WHL SLIP GRP 202 | 43F28 |
| AEBB07 | P1 | 00 | POWER SUPPLY *900 CYCLE | 43F2801 |
| AEBB07 | DL | ZA | DIODE, ZENER *900HZ PWR SUPPLY | 43H0101C |
| AEBB07 | PJ | 00 | PC BOARD *1/V CONVERTER 422 | 43H0101D |
| AEBB07 | PJ | 00 | PC BOARD *PLUS 10 VDC LD WHL PWR SUP 1209 | 43H0102A |
| AEBB07 | PJ | 00 | PC BOARD *FREQ TO DC CONVERTER 1204 | 43H0103 |
| AEBB07 | PE | 00 | PANEL *PWR SUPPLY 08FB LATCHING RELAYS | 43H0103A |
| AEBB07 | FD | 00 | FILTER *PWR SUPPLY | 43H0103B |
| AEBB07 | PJ | 00 | PC BOARD *OSCILLATOR 472 | 43H0103C |
| AEBB07 | PJ | 00 | PC BOARD *15 VOLT REGULATOR 1135 | 43H0103D |
| AEBB07 | PJ | 00 | PC BOARD *PLUS 22 VOLT REGULATOR | 43H0101E |
| AEBB08 | PJ | 00 | PC BOARD *CMR FILTER 6801 | 43H0102F |
| AEBB08 | PJ | 00 | PC BOARD *RELAY DRIVER 764 | 43F25 |
| AEBB09 | PJ | 00 | PC BOARD *TACH SQUARING WHEEL SLIP GRP | 43F2501 |
| AEBB09 | RY | FC | RESISTOR, FIXED *1/2W 180K OHM 201 | 43H0102B |
| AEBB09 | PJ | 00 | PC BOARD *MANUAL DIAMETER CORRECTION 401 | 43H0102C |
| AEBB09 | PJ | 00 | PC BOARD *DIFFERENTIAL SPEED DETECTOR G91 | 43H0102E |
| AEBB09 | PJ | 00 | PC BOARD *SPEED COMPARITOR & SPEED OUTPUT 752 | 43F03 |
| AEBB10 | PJ | 00 | PC BOARD *SPEED TAPER 350 | |

| GENERIC PART NO | UICC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | 10/18/02 | PROPERTY PART NUMBER |
|-----------------|------|-----------|---|----------|----------------------|
| AEBB10 | RM | 00 | RECTIFIER *344. | | 43F0301 |
| AEBB10 | RM | 00 | RECTIFIER *344. | | 43F0302 |
| AEBB10 | RY | VA | RESISTOR, VARIABLE *TRIM 350. | | 43F0303 |
| AEBB10 | RY | VA | RESISTOR, VARIABLE *350 | | 43F0304 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR CURRENT LIMIT 2 103 | | 43F100 |
| AEBB10 | TZ | 00 | TRANSISTOR *2N527 103 | | 43F1001 |
| AEBB10 | TZ | 00 | TRANSISTOR *2N388 103 | | 43F1002 |
| AEBB10 | RY | FC | RESISTOR, FIXED *5W 5K OHM 103. | | 43F1003 |
| AEBB10 | RY | FC | RESISTOR, FIXED *10W 0.1 OHM 103. | | 43F1004 |
| AEBB10 | DL | 00 | DIODE *1N1200 103 | | 43F1005 |
| AEBB10 | RY | FC | RESISTOR, FIXED *3W 1K OHM 103. | | 43F1006 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR CURRENT LIMIT 1 107 | | 43F1101 |
| AEBB10 | TZ | 00 | TRANSISTOR *MPT560 107. | | 43F1102 |
| AEBB10 | DL | 00 | DIODE *1N1200 107 | | 43F1101 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR POWER CUSHION 346 | | 43F1201 |
| AEBB10 | DL | 00 | DIODE *1N5060 346 | | 43F1202 |
| AEBB10 | RY | VA | RESISTOR, VARIABLE *2W 10K 346. | | 43F1301 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR CURRENT LIMIT 4 349 | | 43F1302 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR ADVANCE 351 | | 43F1303 |
| AEBB10 | RY | FC | RESISTOR, FIXED *5W 12K OHM 351 | | 43F1401 |
| AEBB10 | CJ | 00 | CAPACITOR *2MFD 351 | | 43F1402 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR KM BACKUP 356 | | 43F1501 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR KM BACKUP 359 | | 43F1601 |
| AEBB10 | TZ | 00 | TRANSISTOR *484 359 | | 43F1602 |
| AEBB10 | DL | 00 | DIODE *1N469 359 | | 43F1603 |
| AEBB10 | DL | 00 | DIODE *1N470 359 | | 43F1604 |
| AEBB10 | DL | 00 | DIODE *1N961 359 | | 43F1701 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR FIELD SHUNT 1360. | | 43F1702 |
| AEBB10 | DL | 00 | DIODE *1N746 360 | | 43F1801 |
| AEBB10 | TZ | 00 | TRANSISTOR *RA360 | | 43F1802 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR FIELD SHUNT 361 | | 43F1803 |
| AEBB10 | DL | 00 | DIODE *1N9648 361 | | 43F2001 |
| AEBB10 | TZ | 00 | TRANSISTOR *361 | | 43F31 |
| AEBB10 | RY | VA | RESISTOR, VARIABLE *TRIM 361. | | 43H0101B |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR CURRENT LIMIT 3 404 | | 43H0101F |
| AEBB10 | TZ | 00 | TRANSISTOR *2N333 | | 43H0101G |
| AEBB10 | PE | 00 | PANEL *PILOT MOTOR LESS PC BOARDS | | 43H0101H |
| AEBB10 | PJ | 00 | PC BOARD *RATE CONTROL 1165 | | 42 |
| AEBB10 | PJ | 00 | PC BOARD *CAM BACKUP & SUMMING 1192 | | 42G |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR CONTROL 1312. | | 42G01 |
| AEBB10 | PJ | 00 | PC BOARD *PILOT MOTOR DRIVER 1111 | | |
| AEBB10 | AF | 00 | CONTACTOR, ASSY | | |
| AEBB10 | 1J | 00 | INTERLOCK *CONTROL | | |
| AEBB10 | 6R | MH | CONTACT, MOVABLE *INTERLOCK | | |

| GENERIC PART NO. | UCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | 10/18/82 | PROPERTY PART NUMBER |
|------------------|-----|-----------|--|----------|----------------------|
| AEBC00 | 6R | SN | CONTACT, STATIONARY *INTERLOCK. | | 42G02 |
| AEBC00 | 6R | SN | CONTACT, STATIONARY *INTERLOCK. | | 42G03 |
| AEBC00 | S7 | 00 | SPRING *CONTACT INTERLOCK | | 42G04 |
| AEBC00 | 1J | 00 | INTERLOCK *CONTROL GEG9343E | | 42H |
| AEBC00 | GR | AF | CONTACT, ASSY * & SHUNT INLK | | 42H01 |
| AEBC00 | 6R | SN | CONTACT, STATIONARY *INTERLOCK. | | 42H02 |
| AEBC00 | 6R | SN | CONTACT, STATIONARY *INTERLOCK. | | 42H03 |
| AEBC00 | S7 | CJ | SPRING, COMPRESSION *CONTACT. | | 42H04 |
| AEBC00 | 5R | KB | SWITCH, KNIFE *K5 | | 43G08 |
| AEBC00 | 6S | AF | CONTACTOR, ASSY | | 45A |
| AEBC01 | 6S | AF | CONTACTOR, ASSY *BRAKING SWITCH | | 42F01 |
| AEBC01 | GR | 00 | CONTACT *BRAKING SWITCH | | 42F01 |
| AEBC01 | C3 | 00 | CHUTE *ARC BRAKING SWITCH | | 42F03 |
| AEBC01 | 4B | 00 | COIL *OPERATING BRK SW. | | 42F04 |
| AEBC01 | AT | 00 | ARM *CONTACT BRK SW. | | 42F05 |
| AEBC01 | SF | 00 | SEAT *COMPRESSION SPRNG BRK SW. | | 42F06 |
| AEBC01 | AS | 00 | ARCHORN | | 42F07 |
| AEBC01 | S7 | 00 | SPRING *ARC HIRN SUPRT BRK SW. | | 42F08 |
| AEBC02 | 6S | 00 | CONTACTOR *FIELD SHUNT | | 42L |
| AEBC02 | 4D | 00 | COIL *OPERATING FS CONT | | 42L01 |
| AEBC02 | 6R | MH | CONTACT, MOVABLE *FS CONT | | 42L02 |
| AEBC02 | SU | 00 | SHUNT *FIELD SHUNT CONTACTR | | 42L03 |
| AEBC02 | AS | 00 | ARCHORN *FS CONTACTOR | | 42L04 |
| AEBC02 | C3 | AE | CHUTE, ARC *FS CONTACTOR | | 42L05 |
| AEBC02 | 1J | 00 | INTERLOCK *FIELD SHUNT CONTACTR | | 42L06 |
| AEBC02 | 63 | 00 | COVER *FIELD SHUNT CONTACTR | | 42Z |
| AEBC02 | SD | 00 | SEAL *COVER FS CMPRMTNT | | 42Z01 |
| AEBC03 | 6S | AF | CONTACTOR, ASSY *L SW FOR GND SW. | | 42D |
| AEBC04 | 6S | AF | CONTACTOR, ASSY *LINE SWITCH | | 42C |
| AEBC04 | 6R | SN | CONTACT, STATIONARY *L SWITCH | | 42C01 |
| AEBC04 | GR | MH | CONTACT, MOVABLE *L SWITCH. | | 42C02 |
| AEBC04 | 4B | 00 | COIL *OPERATING L SWITCH. | | 42C03 |
| AEBC04 | C3 | AE | CHUTE, ARC *L SWITCH. | | 42C04 |
| AEBC04 | SU | 00 | SHUNT, *LINE SWITCH. | | 42C05 |
| AEBC04 | S7 | TD | SPRING, TENSION *L SWITCH | | 42C06 |
| AEBC04 | S7 | TD | SPRING, TENSION *L SWITCH | | 42C07 |
| AEBC04 | AS | 00 | ARCHORN *MVL CONTACT TIP | | 42C08 |
| AEBC04 | AS | 00 | ARCHORN *W/SPRING L SW. | | 42C09 |
| AEBC04 | AS | 00 | ARCHORN *STAT CONT TIP. | | 42C10 |
| AEBC04 | 5N | 00 | SUPPORT *W/BLOWOUT COIL L SW. | | 42C13 |
| AEBC04 | AT | 00 | ARM *CONTACT W/BUSING L SW. | | 42C14 |
| AEBC04 | PM | 00 | PIN *CONTACT ARM HINGE L SW. | | 42C1401 |
| AEBC04 | C7 | 00 | CLAMP *HINGE PIN L SW. | | 42C1402 |
| AEBC04 | SF | 00 | SEAT *COMPRESSION SPRING L SW. | | 42C15 |

| GENERIC PART NO. | I.U.C.C. | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|------------------|----------|-----------|--|----------------------|
| AEBC04 | 5E | 00 | STOP *ARMATURE L SW | 42C16 |
| AEBC04 | AU | 00 | ARMATURE *W/SPRNG PST & BRCKT | 42C17 |
| AEBC07 | 6S | AF | CONTACTOR, ASSY *PARALLEL SWITCH | 42E00B |
| AEBC07 | 4B | 00 | COIL *OPERATING P SW | 42E00B1 |
| AEBC07 | 6R | 00 | CONTACT *TIP P SW | 42E0101 |
| AEBC07 | 5E | 00 | STOP *ARMATURE P SW | 42E0102 |
| AEBC07 | C3 | AE | CHUTE, ARC *P SW | 42E0103 |
| AEBC07 | AT | 00 | ARM *CONTACT F SW | 42E0104 |
| AEBC07 | PM | 00 | PN *CONT ARM HINGE P SW | 42E0104A |
| AEBC07 | C7 | 00 | CLAMP *HINGE PIN P SW | 42E0104B |
| AEBC07 | BF | 00 | BASE *PARALLEL SWITCH | 42E0105 |
| AEBC07 | SU | 00 | SHUNT *PARALLEL SWITCH | 42E0202 |
| AEBC07 | S7 | CJ | SPRING, COMPRESSION *P SW | 42E03 |
| AEBC07 | AS | 00 | ARCHORN *STAT CONT TIP | 42E06 |
| AEBC07 | AS | 00 | ARCHORN *MVB CONT TIP | 42E07 |
| AEBC07 | AS | 00 | ARCHORN *W/SPRING P SW | 42E08 |
| AEBC07 | 5N | 00 | SUPPORT *W/BLOWOUT COIL, P SW | 42E09 |
| AEBC09 | 6R | 00 | CONTACT *REV SW | 43A1301A |
| AEBC09 | 6R | SN | CONTACT, STATIONARY *REV SW | 43A1301D |
| AEBC09 | 6R | SN | CONTACT, STATIONARY *REV SW | 43A1301E |
| AEBC09 | 6S | 00 | CONTACTOR *REVERSER | 43A0108 |
| AEBC09 | RU | CH | RELAY COIL *REVERSER | 43A0108A |
| AEBC09 | 6R | 00 | CONTACT *PART OF CONTACTOR | 43A0108B |
| AEBC10 | 6S | AF | CONTACTOR, ASSY *SERIES SW | 43A0108C |
| AEBC10 | 4B | 00 | COIL *OPERATING SERIES SW | 42E00A |
| AEBC10 | 3F | 00 | BUS BAR *SERIES SW | 42E00A1 |
| AEBC10 | 3F | 00 | BASE *BLOCK SERIES SW | 42E00A2 |
| AEBD00 | B2 | EK | BOX, EQUIPMENT | 42E00A4 |
| AEBD01 | 5M | 00 | SHAFT *MAIN CAM RVRSR & CAM | 43 |
| AEBD01 | MR | 00 | MOTOR, DC *PILOT | 43A |
| AEBD01 | B8 | DA | DRUSH *CARDON PILOT MTR | 43A01 |
| AEBD01 | CH | 00 | CAP *BRUSH PILOT MTR | 43A0101 |
| AEBD01 | 4B | 00 | COIL *FIELD PILOT MTR | 43A0102 |
| AEBD01 | BM | BC | BEARING, BALL *PILOT MTR | 43A0103 |
| AEBD01 | 8B | 00 | ROTOR *PILOT MTR | 43A0104 |
| AEBD01 | 9C | 00 | GEAR *PILOT MTR GEAR CASE | 43A0105 |
| AEBD01 | KB | 00 | KEY *HUB PILOT MTR GR CS | 43A0106 |
| AEBD01 | 9D | AF | GEARBOX, ASSY *CAM CNTRLLR | 43A0107 |
| AEBD01 | SM | 00 | SHAFT, ASSY *CAM | 43A02 |
| AEBD01 | 9C | 00 | GEAR *CAMSHAFT 6 IN | 43A0204 |
| AEBD01 | 9C | 00 | GEAR *CAMSHAFT 3 IN | 43A0204A |
| AEBD01 | KB | 00 | KEY *GEAR TO SHAFT | 43A0204B |
| AEBD01 | SM | 00 | SHAFT *CAMSHAFT DRIVE | 43A0204C |
| AEBD01 | SM | 00 | | 43A0204D |

| GENERIC PART NO. | UICC. | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|------------------|-------|-----------|--|----------------------|
| AEBD01 | BM | BC | BEARING, BALL *CAMSHAFT | 43A0204E |
| AEBD01 | BM | BC | BEARING, BALL *CAMSHAFT | 43A0204F |
| ALBD01 | R5 | RF | RING, RETAINING *GEAR SHAFT | 43A0204G |
| AEBD01 | R5 | RF | RING, RETAINING *GEAR SHAFT | 43A0204H |
| AEBD01 | 6R | 00 | CONTACT *NOTCH INTILCK | 43A0301 |
| AEBD01 | 6R | 00 | CONTACT *NOTCH INTILCK ASSY | 43A0302 |
| AEBD01 | SM | AF | SHAFT, ASSY *MAIN CAM | 43A0401 |
| AEBD01 | CE | 00 | CAM *1ST MAIN CAMSHAFT ASSY | 43A0401A01 |
| AEBD01 | CE | 00 | CAM *2ND MAIN CAMSHAFT ASSY | 43A0401A02 |
| AEBD01 | CE | 00 | CAM *3RD MAIN CAMSHAFT ASSY | 43A0401A03 |
| AEBD01 | CE | 00 | CAM *4TH MAIN CAMSHAFT ASSY | 43A0401A04 |
| AEBD01 | CE | 00 | CAM *5TH MAIN CAMSHAFT ASSY | 43A0401A05 |
| AEBD01 | CE | 00 | CAM *6TH MAIN CAMSHAFT ASSY | 43A0401A06 |
| AEBD01 | CE | 00 | CAM *7TH MAIN CAMSHAFT ASSY | 43A0401A07 |
| AEBD01 | CE | 00 | CAM *8TH MAIN CAMSHAFT ASSY | 43A0401A08 |
| AEBD01 | CE | 00 | CAM *9TH MAIN CAMSHAFT ASSY | 43A0401A09 |
| AEBD01 | CE | 00 | CAM *10TH MAIN CAMSHAFT ASSY | 43A0401A10 |
| AEBD01 | CE | 00 | CAM *11TH MAIN CAMSHAFT ASSY | 43A0401A11 |
| AEBD01 | CE | 00 | CAM *12TH MAIN CAMSHAFT ASSY | 43A0401A12 |
| AEBD01 | CE | 00 | CAM *13TH MAIN CAMSHAFT ASSY | 43A0401A13 |
| AEBD01 | CE | 00 | CAM *14TH MAIN CAMSHAFT ASSY | 43A0401A14 |
| AEBD01 | CE | 00 | CAM *15TH MAIN CAMSHAFT ASSY | 43A0401A15 |
| AEBD01 | CE | 00 | CAM *16TH MAIN CAMSHAFT ASSY | 43A0401A16 |
| AEBD01 | CE | 00 | CAM *17TH MAIN CAMSHAFT ASSY | 43A0401A17 |
| AEBD01 | CE | 00 | CAM *18TH MAIN CAMSHAFT ASSY | 43A0401A18 |
| AEBD01 | CE | 00 | CAM *19TH MAIN CAMSHAFT ASSY | 43A0401A19 |
| AEBD01 | CE | 00 | CAM *20TH MAIN CAMSHAFT ASSY | 43A0401A20 |
| AEBD01 | CE | 00 | CAM *21ST MAIN CAMSHAFT ASSY | 43A0401A21 |
| AEBD01 | CE | 00 | CAM *22ND MAIN CAMSHAFT ASSY | 43A0401A22 |
| AEBD01 | CE | 00 | CAM *23RD MAIN CAMSHAFT ASSY | 43A0401A23 |
| AEBD01 | CE | 00 | CAM *24TH MAIN CAMSHAFT ASSY | 43A0401A24 |
| AEBD01 | CE | 00 | CAM *25TH MAIN CAMSHAFT ASSY | 43A0401A25 |
| AEBD01 | CE | 00 | CAM *26TH MAIN CAMSHAFT ASSY | 43A0401A26 |
| AEBD01 | CE | 00 | CAM *27TH MAIN CAMSHAFT ASSY | 43A0401A27 |
| AEBD01 | CE | 00 | CAM *28TH MAIN CAMSHAFT ASSY | 43A0401A28 |
| AEBD01 | CE | 00 | CAM *29TH MAIN CAMSHAFT ASSY | 43A0401A29 |
| AEBD01 | CE | 00 | CAM *30TH MAIN CAMSHAFT ASSY | 43A0401A30 |
| AEBD01 | CE | 00 | CAM *31ST MAIN CAMSHAFT ASSY | 43A0401A31 |
| AEBD01 | CE | 00 | CAM *32ND MAIN CAMSHAFT ASSY | 43A0401A32 |
| AEBD01 | CE | 00 | CAM *33RD MAIN CAMSHAFT ASSY | 43A0401A33 |
| AEBD01 | CE | 00 | CAM *34TH MAIN CAMSHAFT ASSY | 43A0401A34 |
| AEBD01 | CE | 00 | CAM *35TH MAIN CAMSHAFT ASSY | 43A0401A35 |
| AEBD01 | CE | 00 | CAM *36TH MAIN CAMSHAFT ASSY | 43A0401A36 |
| AEBD01 | CE | 00 | CAM *37TH MAIN CAMSHAFT ASSY | 43A0401A37 |

10/18/82

| GENERIC PART NO | IUCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|------|-----------|--|----------------------|
| AEBD01 | CE | 00 | CAM *38TH MAIN CAMSHAFT ASSY. | 43A0401A38 |
| AEBD01 | CE | 00 | CAM *39TH MAIN CAMSHAFT ASSY. | 43A0401A39 |
| AEBD01 | CE | 00 | CAM *40TH MAIN CAMSHAFT ASSY. | 43A0401A40 |
| AEBD01 | CE | 00 | CAM *41ST MAIN CAMSHAFT ASSY. | 43A0401A41 |
| AEBD01 | CE | 00 | CAM *42ND MAIN CAMSHAFT ASSY. | 43A0401A42 |
| AEBD01 | CE | 00 | CAM *43RD MAIN CAMSHAFT ASSY. | 43A0401A43 |
| AEBD01 | CE | 00 | CAM *44TH MAIN CAMSHAFT ASSY. | 43A0401A44 |
| AEBD01 | CE | 00 | CAM *45TH MAIN CAMSHAFT ASSY. | 43A0401A45 |
| AEBD01 | CE | 00 | CAM *46TH MAIN CAMSHAFT ASSY. | 43A0401A46 |
| AEBD01 | CE | 00 | CAM *47TH MAIN CAMSHAFT ASSY. | 43A0401A47 |
| AEBD01 | CE | 00 | CAM *48TH MAIN CAMSHAFT ASSY. | 43A0401A48 |
| AEBD01 | CE | 00 | CAM *49TH MAIN CAMSHAFT ASSY. | 43A0401A49 |
| AEBD01 | CE | 00 | CAM *50TH MAIN CAMSHAFT ASSY. | 43A0401A50 |
| AEBD01 | CE | 00 | CAM *51ST MAIN CAMSHAFT ASSY. | 43A0401A51 |
| AEBD01 | CE | 00 | CAM *52ND MAIN CAMSHAFT ASSY. | 43A0401A52 |
| AEBD01 | CE | 00 | CAM *53RD MAIN CAMSHAFT ASSY. | 43A0401A53 |
| AEBD01 | SR | 00 | SHIM *CAM SPACING MN SHIAFT. | 43A0401A54 |
| AEBD01 | S7 | 00 | SPRING *SPACER MN CMSHIFT ASSY. | 43A0402 |
| AEBD01 | 62 | 00 | COUPLING *RING MAIN CMSHIFT ASSY. | 43A0403 |
| AEBD01 | 3H | 00 | BUSHING *ROD PPR MN CMSHIFT ASSY. | 43A0403A |
| AEBD01 | SU | 00 | SCREW *CAP MAIN CMSHIFT ASSY. | 43A0601 |
| AEBD01 | BV | 00 | BLOCK *COUPLING MN CMSHIFT | 43A0602 |
| AEBD01 | CF | AF | CAM SWITCH, ASSY *BLUE CAM CNRLR | 43A12 |
| AEBD01 | 6R | 00 | CONTACT *BLUE SW | 43A1201A |
| AEBD01 | SU | 00 | SHUNT *BLUE SW | 43A1201B |
| AEBD01 | C3 | AE | CHUTE ARC *BLUE SW | 43A1201C |
| AEBD01 | AS | 00 | ARCHORN *BLUE SW | 43A1201D |
| AEBD01 | AS | 00 | ARCHORN *BLUE SW | 43A1201E |
| AEBD01 | S7 | 00 | SPRING *OPR ARM/SUPRT BL SW | 43A1201F |
| AEBD01 | S7 | 00 | SPRING *OPR ARM/SPR GD BL SW | 43A1201G |
| AEBD01 | AS | 00 | ARCHORN *STAT BLUE SW | 43A1201H |
| AEBD01 | 5N | 00 | SUPPORT *CONTACT TIP BLUE SW | 43A1201J |
| AEBD01 | BM | BC | BEARING BALL *BLUE SW | 43A1201K |
| AEBD01 | AT | 00 | ARM *W/BUSHING & PINS BL SW | 43A1201L |
| AEBD01 | 3H | 00 | BUSHING *BLUE SW | 43A1201M |
| AEBD01 | PM | 00 | PIN *SPRING BLUE SW | 43A1201N |
| AEBD01 | PM | 00 | PIN *RLLR/ARM BLUE SW | 43A1201P |
| AEBD01 | KC | 00 | KIT *LEVER PIN BLUE SW | 43A1201Q |
| AEBD01 | 4B | 00 | COIL *W/STAT CONT SUPRT SW | 43A1201R |
| AEBD01 | PM | 00 | PIN *T HEAD BLUE SW | 43A1201S |
| AEBD01 | CN | 00 | CASE *SWITCH BLUE SW | 43A1201T |
| AEBD01 | 6Y | 00 | CORE *BLUE SW | 43A1201U |
| AEBD01 | 3H | 00 | BUSHING *BLUE SW | 43A1201V |
| AEBD01 | CF | AF | CAM SWITCH, ASSY *REVERSER | 43A13 |

| GENERIC PART NO | IUC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | 10/18/B2 | PROPERTY PART NUMBER |
|-----------------|-----|-----------|--|----------|----------------------|
| AEBD01 | 5N | 00 | SUPPORT *STAT PORTION REV SW | | 43A1301 |
| AEBD01 | 5N | 00 | SUPPORT *REV SW | | 43A1301A01 |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *REV SW | | 43A1301A02 |
| AEBD01 | 3F | 00 | BUS BAR *8.75 IN REV SW | | 43A1301B01 |
| AEBD01 | 3F | 00 | BUS BAR *10 IN REV SW | | 43A1301B02 |
| AEBD01 | 5N | 00 | SUPPORT *BUS BAR REV SW | | 43A1301C01 |
| AEBD01 | 5N | 00 | SUPPORT *BUS BAR REV SW | | 43A1301C02 |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *ARM/SPT R SW | | 43A1301F |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *LEV/FRM R SW | | 43A1301G |
| AEBD01 | BV | ST | BLOCK, SUPPORTING *CONTACT R SW | | 43A1301H01 |
| AEBD01 | BV | ST | BLOCK, SUPPORTING *CONTACT R SW | | 43A1301H02 |
| AEBD01 | BV | ST | BLOCK, SUPPORTING *CONTACT R SW | | 43A1301H03 |
| AEBD01 | BV | ST | BLOCK, SUPPORTING *CONTACT R SW | | 43A1301H04 |
| AEBD01 | 4B | 00 | COIL *REV SW | | 43A1301J |
| AEBD01 | B0 | 00 | BOLT *REV SW | | 43A1301J01 |
| AEBD01 | CE | 00 | CAM *W/BUSHING REV SW | | 43A1301K01 |
| AEBD01 | BM | 00 | BEARING, BALL *REV SW | | 43A1301K02 |
| AEBD01 | PM | 00 | PIN *ARM RLLR/CAM REV SW | | 43A1301K03 |
| AEBD01 | PM | 00 | PIN *LNK/CNCTR ARM REV SW | | 43A1301K04 |
| AEBD01 | PM | 00 | PIN *RLLR/REV SW | | 43A1301L |
| AEBD01 | 5R | 00 | SWITCH *CONTACT GRAY | | 43A1301M |
| AEBD01 | RJ | 00 | REACTOR *CURXI AMP MEASURING | | 43A17 |
| AEBD01 | SU | 00 | SHUNT *MOTOR MAIN CNTRL GRP | | 43A18 |
| AEBD01 | PH | 00 | PAWL, ASSY *MAIN CNTRL GRP | | 43A19 |
| AEBD01 | C5 | 00 | CIRCUIT BREAKER *MAIN CONTROL GROUP | | 43A20 |
| AEBD01 | 6R | 00 | CONTACT *UNIT F/OLCB | | 43A2001 |
| AEBD01 | C3 | AE | CHUTE *ARC *W/POLE PCS & SUPRT | | 43A2001A |
| AEBD01 | AS | 00 | ARCHORN *CONTACT UNIT | | 43A2001B |
| AEBD01 | GR | 00 | CONTACT *CONTACT UNIT | | 43A2001C |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *LICH/ADAPTR | | 43A2001D |
| AEBD01 | SU | 00 | SHUNT *CONTACT UNIT | | 43A2001E |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *SUPRT/LVR | | 43A2001F |
| AEBD01 | DE | 00 | BARRIER *W/INSRTS CNCT UNIT | | 43A2001G |
| AEBD01 | BE | 00 | BARRIER *W/INSRTS CNCT UNIT | | 43A2001H |
| AEBD01 | AT | AF | ARM, ASSY *CONTACT UNIT | | 43A2001I |
| AEBD01 | 0B | AF | OPERATOR, ASSY *OPERATING UNIT | | 43A2001J |
| AEBD01 | S7 | LB | SPRING, LEAF *OPERATING UNIT | | 43A2002 |
| AEBD01 | 4B | CH | COIL *OPERATING UNIT | | 45A2002A |
| AEBD01 | 6Y | CH | CORE, COIL *OPERATING UNIT | | 43A2002B |
| AEBD01 | BM | RH | BEARING, ROLLER *LEVEL OPER UNIT | | 43A2002C |
| AEBD01 | LK | CK | LINK, CONNECTING *OPER UNIT | | 43A2002E |
| AEBD01 | 4B | 00 | COIL *OPERATING UNIT | | 43A2002F |
| AEBD01 | PM | 00 | PIN *TRIP UNIT STOP OP UNIT | | 43A2002G |
| AEBD01 | PM | 00 | PIN *LVR/FRM OPER UNIT | | 43A2002H |

| GENERIC PART NO | IUC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|-----|-----------|---|----------------------|
| AEBD01 | PM | 00 | PIN *SPRING POS OPER UNIT | 43A2002J |
| AEBD01 | LF | CK | LEVER, CONNECTING *PLATE OPER UNIT | 43A2002K |
| AEBD01 | SB | MJ | SCREW, MOUNTING *LEVER OPER UNIT | 43A2002L |
| AEBD01 | LK | 00 | LINK *OPERATING UNIT | 43A2002M |
| AEBD01 | LF | AF | LEVER, ASSY *OVRDLD CKT BKRR | 43A2002N |
| AEBD01 | PV | 00 | PLATE *W/PINS OPER UNIT | 43A2002P |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *LVR/FRM OPER | 43A2002Q |
| AEBD01 | S7 | TD | SPRING, TENSION *LVR/PIN OPER | 43A2002R |
| AEBD01 | S7 | TD | SPRING, TENSION *TRP/BKT OPER | 43A2002S |
| AEBD01 | CE | 00 | SPRING, TENSION *OPER UNIT | 43A2002S01 |
| AEBD01 | S7 | TD | CAM *CONTACT UNIT OPER UNIT | 43A2002T |
| AEBD01 | S7 | TD | SPRING, TENSION *LVR/PLT OPER | 43A2002V |
| AEBD01 | S7 | TD | SPRING, TENSION *LVR/PLT OPER | 43A2002W |
| AEBD01 | S7 | CJ | SPRING, COMPRESSION *LICH/PLT OPER | 43A2002X |
| AEBD01 | 6R | AF | CONTACT, ASSY *MAIN CNTRL GRP | 43A2201 |
| AEBD01 | 6R | SN | CONTACT, STATIONARY *MAIN CNTRL GRP | 43A2202 |
| AEBD01 | 5R | SN | SWITCH *CONTACT GRAY | 43A23 |
| AEBD01 | SM | AF | SHAFT, ASSY *CAM UPPER W/C CAMS & COUPLING SW | 43A24 |
| AEBD01 | BM | 00 | BEARING *MID FRAME CAMSHAFT | 43A2401 |
| AEBD01 | R5 | RF | RING, RETAINING *CAMSHAFT | 43A2402 |
| AEBD01 | SM | AF | SHAFT, ASSY *CAM LOWER W/C CAMS & COUPLING SW | 43A25 |
| AEBD01 | BM | 00 | BEARING *END FRAME CAMSHAFT | 43A2601 |
| AEBD01 | R5 | RF | RING, RETAINING *UPPER BEARING | 43A2602 |
| AEBD01 | CT | 00 | CATCH *COVER CAM CONTRLLR COVER | 43A2801 |
| AEBD01 | LC | 00 | LATCH *COVER CAM CONTRLLR COVER | 43A2802 |
| AEBD01 | 9S | 00 | GUIDE *CAM CONTRLLR COVER | 43A2803 |
| AEBD01 | SD | 00 | SEAL *CAM CONTRLLR COVER | 43A2804 |
| AEBD01 | 6V | RJ | CONTROLLER, ROTARY | 43G |
| AEBD01 | FD | AC | FILTER, AIR *DISPOSABLE TRACTION MTR | 44C0102 |
| AEBD01 | FD | 00 | FILTER *IRISH LINEN CLOTH FOR SNOW FILTER | 44C0102A |
| AEBD01 | FD | 00 | FILTER *SNOW TRACTION MTR | 44C0102A01 |
| AEBD01 | SU | 00 | SHUNT *MOTOR | 45G07 |
| AEBD01 | S2 | 00 | SPACER *SHUNT SUPPORT | 43G0701 |
| AEBD01 | S2 | 00 | SPACER *SHUNT SUPPORT | 43G0702 |
| AEBD01 | B0 | MJ | SPACER *SHUNT SUPPORT | 43G0703 |
| AEBD01 | B0 | MJ | BOLT, MOUNTING *SHUNT | 43G0704 |
| AEBD01 | PK | DA | MOTOR, DC *TRACTION MOTOR ASSY | 44C |
| AEBD01 | 63 | AF | COVER, ASSY *TOP INSPECTION & FILTER CASE | 44C0101 |
| AEBD01 | 63 | 00 | COVER *CMPLT W/HINGE RIVET TOP INSPECTION | 44C0101A |
| AEBD01 | LF | 00 | LEVER *W/SPRING LINK | 44C0101B |
| AEBD01 | R7 | 00 | LEVER *W/SPRING LINK CLAMPING | 44C0101C |
| AEBD01 | HN | 00 | RIVET *STEEL | 44C0101D |
| AEBD01 | HN | 00 | HINGE *COVER | 44C0101E |
| AEBD01 | 63 | 00 | COVER *BOTTOM INSPECTION TRACTION MTR | 44C0103 |

| GENERIC PART NO | IUCC | TYPE CODE | PATCO COMPONENT DESCRIPTION AND TYPE/USE | 10/18/82 | PROPERTY PART NUMBER |
|-----------------|------|-----------|--|----------|----------------------|
| AED000 | C8 | AF | CLEAT, ASSY *MOTOR. | | 44C0111 |
| AED000 | PV | 00 | PLATE, *CABLE. | | 44C0112 |
| AED000 | T8 | 1D | TUBE, INSULATING *SLEEVE. | | 44C0112A |
| AED000 | T8 | 1D | TUBE, INSULATING *SLEEVE. | | 44C0112B |
| AED000 | 6N | 00 | CONNECTOR *TRACTION MTR | | 44C0117A |
| AED000 | 6N | 00 | CONNECTOR *TRACTION MTR SMALL LEAD. | | 44C0117C |
| AED000 | 6N | 00 | CONNECTOR *TRACTION MTR LARGE HEAD. | | 44C0117D |
| AED000 | PM | 00 | CONNECTOR *THIRD RAIL BUSS 600V | | 44C0117E |
| AED000 | PM | 00 | PIN *PIVOT CONNECTOR. | | 44E |
| AED000 | G2 | ZZ | COUPLING, MISC. | | 44E0101 |
| AED000 | IV | 00 | HUB *MOTOR FRD. | | 44E0102 |
| AED000 | IV | 00 | HUB *GEAR LND. | | 44E0103 |
| AED000 | 6N | SF | CONNECTOR, SLEEVE | | 44E0104 |
| AED000 | NB | 00 | NUT | | 44E0107 |
| AED000 | 0D | 00 | O-RING | | 44E0108 |
| AED000 | SD | 0A | SEAL, OIL | | 44E0109 |
| AED000 | 6N | SF | CONNECTOR, SLEEVE | | 44G0108 |
| AEDA01 | 4B | AF | COIL, ASSY *FIELD | | 44C0109 |
| AEDA01 | 4B | AF | COIL, ASSY *FIELD | | 44C0110 |
| AEDA02 | 4B | AF | COIL, ASSY *FIELD | | 44C0116 |
| AEDB00 | AU | AF | ARMATURE, ASSY. | | 44C0113 |
| AEDC00 | B9 | AF | BRUSHHOLDER, ASSY | | 44C0113A |
| AEDC00 | T8 | 1D | TUBE, INSULATING *SLEEVE | | 44C0113H |
| AEDC00 | S7 | ZZ | SPRING, MISC *INCL PRESS ARM & SHUNT | | 44C0113C |
| AEDC00 | PM | 00 | PIN *HINGE. | | 44C0114 |
| AEDC00 | 5N | 00 | SUPPORT *BRUSHHOLDER. | | 44C0115 |
| AEDD00 | R8 | 00 | BRUSH *CARBON | | 44C0104 |
| AEDF00 | 9A | 00 | GASKET *BRNG CPY/FRAME HEAD | | 44C0105 |
| AEDF00 | 9A | 00 | GASKET *BRNG CAP/FRAME HEAD | | 44C0106 |
| AEDF00 | BM | KH | BEARING, ROLLER *PINION END | | 44C0107 |
| AEDF00 | BM | BC | BEARING, BALL *COMPUTATOR END | | 44C0107 |

APPENDIX P

WMATA Generic Parts List

PROPERTY
PART NUMBER

WMATA
COMPONENT DESCRIPTION AND TYPE/USE

GENERIC
PART NO

I.U.C.C.

TYPE
CODE

| GENERIC PART NO | I.U.C.C. | TYPE CODE | COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|----------|-----------|------------------------------------|----------------------|
| AE0000 | 00 | 0J | PROPULSION SYSTEM | 04A000 |
| AE0000 | 6U | 00 | CONTROL * CAB | 04A000 |
| AE0000 | 5R | AF | SWITCH, ASSY * OVER TRAVEL | 04A103 |
| AE0000 | 5R | AF | SWITCH, ASSY * DEADMAN | 04A106 |
| AE0000 | 5S | AF | SWITCHBOARD, ASSY | 04A108 |
| AE0000 | 6V | AF | CONTROLLER, ASSY * MASTER | 04A100 |
| AE0000 | CE | AF | CAN, ASSY * SHAFT | 04A107 |
| AE0000 | HB | AF | HANDLE, ASSY | 04A105 |
| AE0000 | HE | JZ | HARDWARE, MISC | 04A199 |
| AE0000 | HE | JZ | SWITCH, ASSY * KEY | 04A101 |
| AE0000 | 5R | AF | SWITCH, ASSY * MODE/DIRECTION | 04A102 |
| AE0003 | 00 | 00 | TRAIN LINES SYSTEM | 01B000 |
| AE0000 | B2 | JB | BOX, JUNCTION | 01B200 |
| AE0000 | C5 | 00 | CIRCUIT BREAKER * T/L | 01B101 |
| AE0000 | HE | JZ | HARDWARE, MISC | 01B199 |
| AE0000 | HE | JZ | HARDWARE, MISC | 01B299 |
| AE0000 | PE | AF | PANEL, ASSY * T/L C/B | 01B100 |
| AE0000 | 5H | AC | STRAINER, AIR | 04B201 |
| AE0000 | 6U | 00 | CONTROL * MOTOR | 04B000 |
| AE0000 | HE | JZ | HARDWARE, MISC | 04B299 |
| AE0000 | HE | JZ | HARDWARE, MISC | 01D399 |
| AE0000 | KT | AF | REGULATOR, ASSY * AIR PRESSURE | 04L200 |
| AE0000 | RT | PH | REGULATOR, PRESSURE * AIR | 04B202 |
| AE0000 | RX | AF | RESERVOIR, ASSY * AIR | 04B300 |
| AE0000 | IC | 00 | INDUCTOR | 04B143 |
| AE0000 | 5R | SR | SWITCH, STEPPER * OVLD CONTR | 04B147 |
| AE0000 | 64 | AF | CRADLE, ASSY * LOGIC | 04B126 |
| AE0000 | HE | JZ | HARDWARE, MISC | 04B199 |
| AE0000 | PE | MJ | PANEL, MOUNTING | 04B101 |
| AE0000 | PJ | 00 | PC BOARD * TIME DELAY A-13 | 04B138 |
| AE0000 | RY | FC | RESISTOR * FIXED | 04B146 |
| AE0000 | TX | 00 | TRANSDUCTOR | 04B145 |
| AE0004 | PJ | 00 | PC BOARD * DYN BRK FDRK A-14 | 04B140 |
| AE0004 | RJ | 0B | RELAY, OPEN FRAME * UT-123 BOL | 04B121 |
| AE0006 | PJ | 00 | PC BOARD * DECODE/MULTIPLEX A-5 | 04B131 |
| AE0007 | PJ | 00 | PC BOARD * POWER SUPPLY | 04B141 |
| AE0009 | PJ | 00 | PC BOARD * INPUT ISOLATION A-3 | 04B130 |
| AE0009 | PJ | 00 | PC BOARD * RELAY DRIVER A-11 | 04B137 |
| AE0010 | PJ | 00 | PC BOARD * RATE ADJUST A-1 | 04B127 |
| AE0010 | PJ | 00 | PC BOARD * CNCT BIAS LOAD A-2 | 04B128 |
| AE0010 | PJ | 00 | PC BOARD * SFD TAPER/LIMIT A-7 | 04B133 |
| AE0010 | PJ | 00 | PC BOARD * CURRENT DECSN A-9 | 04B135 |

| GENERIC PART NO | IUCG | TYPE CODE | WMAFA COMPONENT DESCRIPTION AND TYPE/USE | PROPERTY PART NUMBER |
|-----------------|------|-----------|--|----------------------|
| AEBB10 | PJ | 00 | PC BOARD *NTCH-SPT-HLD A-10 | 01B136 |
| AEBB10 | RJ | 00 | RELAY *2970A71 | 04B123 |
| AEBB10 | RU | 0B | RELAY, OPEN FRAME *UGB-566 | 04B118 |
| AEBB10 | RU | 0B | RELAY, OPEN FRAME *UGC-216 | 04B120 |
| AEBB10 | RU | 0B | RELAY, OPEN FRAME *UT-173 | 04B122 |
| AEBB10 | RU | 0B | RELAY, OPEN FRAME *227D046 | 04B125 |
| AEBB10 | TY | CN | TRANSFORMER, CURRENT | 04B142 |
| AEBB10 | 5R | KB | SWITCH, KNIFE | 07B101 |
| AEBB10 | 6N | PF | CUNNECTOR, POWER *SHOP | 07B102 |
| AEBB10 | 6S | MA | CONTRACTOR, MAGNETIC *UMD-125C | 04B110 |
| AEBB10 | 6U | 00 | CONTROL *PACKAGE UNIT ASSY | 04B100 |
| AEBB10 | B2 | AF | BOX ASSY *KNIFE SWITCH | 07B100 |
| AEBB10 | HE | ZZ | HARDWARE, MISC. | 07D199 |
| AEBB10 | 6S | MA | CONTACTOR, MAGNETIC *FIELD SHUNT | 04D102 |
| AEBB10 | 6S | MA | CONTACTOR, MAGNETIC *U1A-34B | 04B106 |
| AEBB10 | RY | FC | RESISTOR, FIXED *FIELD SHUNT | 04B103 |
| AEBB10 | 6S | PC | CONTACTOR, PNEUMATIC *UBP-55 | 04B105 |
| AEBB10 | RU | 0B | RELAY, OPEN FRAME *UNA-66 LR | 04B117 |
| AEBB10 | 6V | BF | CONTROLLER, BIN *SCD-248-H PBC | 04B112 |
| AEBB10 | R2 | AF | REVERSER, ASSY *SCR-482 | 04B111 |
| AEBB10 | 6S | MA | CONTACTOR, MAGNETIC *UMA-34F-JR | 04B108 |
| AEBB10 | 6V | BF | CONTROLLER, BIN *SCD-248-K SPC | 04B113 |
| AEBB10 | FV | 00 | FUSE *MAIN | 07B200 |
| AEBB10 | HE | ZZ | HARDWARE, MISC. | 07B299 |
| AEBB10 | 1F | 00 | INSULATOR | 04B402 |
| AEBB10 | 6V | RJ | CONTROLLER, ROT *SCD-248-J PCC | 04B115 |
| AEBB10 | 6V | RJ | CONTROLLER, ROT *XCD-248-I BKCC | 04B116 |
| AEBB10 | FT | 00 | FRAME | 04B403 |
| AEBB10 | HE | ZZ | HARDWARE, MISC. | 04B499 |
| AEBB10 | R9 | TK | ROU TIE | 04B405 |
| AEBB10 | RY | AF | RESISTOR, ASSY *ACCEL/BRK | 04B400 |
| AEBB10 | RY | FC | RESISTOR, FIXED | 04B401 |
| AEBB10 | 62 | 00 | COUPLING *HUB | 09A502 |
| AEBB10 | 62 | 00 | COUPLING *MOTOR FLANGE | 09A505 |
| AEBB10 | 62 | AF | COUPLING, ASSY *MOTOR HALF | 09A500 |
| AEBB10 | B4 | AF | BRACKET, ASSY *FRONT SUSPEN | 09A211 |
| AEBB10 | FT | AF | FRAME ASSY | 09A201 |
| AEBB10 | HE | ZZ | HARDWARE, MISC *TRACTION MOTOR | 09A299 |
| AEBB10 | HE | ZZ | HARDWARE, MISC. | 09A599 |
| AEBB10 | IV | AF | HUB, ASSY *MOTOR | 09A501 |
| AEBB10 | MR | DA | MOTOR, DC *TRACTION | 09A200 |
| AEBB10 | P2 | 00 | POLE *MAIN | 09A202 |
| AEBB10 | SD | AF | SEAL, ASSY *HOUSING | 09A503 |
| AEBB10 | 4B | 00 | COIL *MAIN FIELD | 09A203 |
| AEBB10 | 4B | 00 | COIL *COMMUTATING FIELD | 09A206 |
| AEBB10 | AU | AF | ARMATURE, ASSY *TRACTION MOTOR | 09A207 |
| AEBB10 | F2 | AF | POLE, ASSY *COMMUTATING | 09A205 |
| AEBB10 | B9 | AF | BRUSHHOLDER, ASSY *TRACTION MOTOR | 09A203 |
| AEBB10 | B8 | 00 | BRUSH *TRACTION MOTOR | 09A210 |