

HE
18.5
.A34
no.
DOT-
TSC-
NHTSA-
79-2


NO. DOT-TSC-NHTSA-79-2

HS-803-831

PERFORMANCE CHARACTERISTICS OF AUTOMOTIVE ENGINES IN THE UNITED STATES

Third Series - Report No. 2
1978 Pontiac, 301 CID (4.9 Liters), 2V

D.E. Koehler
W.F. Marshall

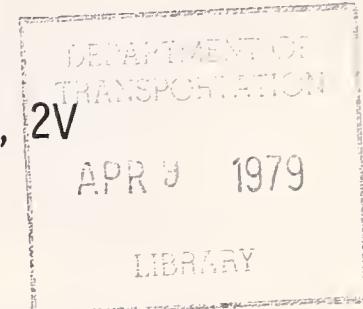

U.S. DEPARTMENT OF ENERGY
BARTLESVILLE ENERGY TECHNOLOGY CENTER
P.O. Box 1398
Bartlesville OK 74003



FEBRUARY 1979

INTERIM REPORT

DOCUMENT IS AVAILABLE TO THE PUBLIC
THROUGH THE NATIONAL TECHNICAL
INFORMATION SERVICE, SPRINGFIELD,
VIRGINIA 22161

Prepared for

U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
Office of Research and Development
Washington DC 20590

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

NOTICE

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the object of this report.

Technical Report Documentation Page

1. Report No. HS-803-831	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle PERFORMANCE CHARACTERISTICS OF AUTOMOTIVE ENGINES IN THE UNITED STATES Third Series - Report No. 2, 1978 Pontiac, 301 CID (4.9 Liters), 2V		5. Report Date February 1979	
7. Author(s) D.E. Koehler and W.F. Marshall		6. Performing Organization Code <input checked="" type="checkbox"/>	
9. Performing Organization Name and Address U.S. Department of Energy* Bartlesville Energy Technology Center P.O. Box 1398 Bartlesville OK 74003		8. Performing Organization Report No. BETC/OP-78/21 DOT-TSC-NHTSA-79-2	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration, Office of Research and Development, Office of Passenger Vehicle Research, Technology Assessment Division Washington DC 20590		10. Work Unit No. (TRAILS) HS927/R9404	
15. Supplementary Notes *Interagency agreement with:		11. Contract or Grant No. RA-77-07	
		13. Type of Report and Period Covered Interim Report May 1978	
		14. Sponsoring Agency Code	
16. Abstract Experimental data were obtained in dynamometer tests of a 1978 Pontiac 301 CID engine to determine fuel consumption and emissions (hydrocarbon, carbon monoxide, oxides of nitrogen) at steady-state engine operating modes. The objective of the program is to obtain engine performance data for estimating emissions and fuel economy for varied engine service and duty. The intent of the work is to provide basic engine characteristic data required as input for engineering calculations involving ground transportation.			
TRANSPORTATION APR 9 1979 LIBRARY			
17. Key Words Fuel Economy Auto Emissions	18. Distribution Statement DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22161		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 59	22. Price

PREFACE

This report, prepared by the U.S. Department of Energy, Bartlesville Energy Technology Center for the U.S. Department of Transportation, Transportation Systems Center, Energy Technology Branch, Cambridge, MA, presents results of experimental work to obtain information on performance characteristics of an engine used in automobiles sold in the United States. The engine used in this work is one of a series of 15 engines to be tested in the current program. This is the second of the reports to be published covering work with those engines.

This project is funded by the National Highway Traffic Safety Administration, Office of Research and Development, Office of Passenger Vehicle Research, Technology Assessment Division.

James A. Kidd, Jr. and Ralph G. Colello of the U.S. Department of Transportation, Transportation Systems Center, are the technical monitors.

METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol	When You Know	Multiply by	To Find
LENGTH							
in	inches	2.5	centimeters	mm	millimeters	0.04	inches
ft	feet	30	centimeters	cm	centimeters	0.4	inches
yd	yards	0.9	meters	m	meters	3.3	feet
mi	miles	1.6	kilometers	km	kilometers	1.1	yards
AREA							
m ²	square inches	6.5	square centimeters	cm ²	square centimeters	0.16	square inches
ft ²	square feet	0.09	square meters	m ²	square meters	1.2	square yards
yd ²	square yards	0.8	square meters	cm ²	square kilometers	0.4	square miles
mi ²	square miles	2.6	square kilometers	m ²	hectares (10,000 m ²)	2.5	acres
MASS (weight)							
oz	ounces	28	grams	g	grams	0.036	ounces
lb	pounds	0.45	kilograms	kg	kilograms	2.2	pounds
	short tons (2000 lb)	0.9	tonnes	t	tonnes (1000 kg)	1.1	short tons
VOLUME							
tsp	teaspoons	5	milliliters	ml	milliliters	0.03	fluid ounces
Tbsp	tablespoons	15	milliliters	ml	liters	2.1	pints
fl oz	fluid ounces	30	milliliters	ml	liters	1.06	quarts
C	cups	0.24	liters	l	liters	0.26	gallons
pt	pints	0.47	liters	l	cubic meters	36	cubic feet
qt	quarts	0.95	liters	l	cubic meters	1.3	cubic yards
gal	gallons	3.8	cubic meters	m ³			
ft ³	cubic feet	0.03	cubic meters	m ³			
yd ³	cubic yards	0.76	cubic meters	m ³			
TEMPERATURE (exact)							
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature

Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol	When You Know	Multiply by	To Find
LENGTH							
in	inches	0.04	inches	in	millimeters	25	inches
cm	centimeters	0.4	centimeters	cm	centimeters	25	inches
m	meters	3.3	meters	m	meters	25	feet
km	kilometers	1.1	kilometers	km	kilometers	25	yards
mi	miles	0.6	miles	mi	miles	25	miles
AREA							
m ²	square inches	65	square centimeters	cm ²	square centimeters	16	square inches
cm ²	square centimeters	1.2	square centimeters	in ²	square centimeters	16	square inches
m ²	square meters	4	square meters	m ²	square meters	16	square meters
km ²	square kilometers	2.5	square kilometers	km ²	square kilometers	16	square miles
ha	hectares (10,000 m ²)	2.5	hectares (10,000 m ²)	ha	hectares (10,000 m ²)	16	acres
MASS (weight)							
g	grams	0.036	ounces	oz	ounces	16	ounces
kg	kilograms	2.2	pounds	lb	pounds	16	pounds
t	tonnes (1000 kg)	1.1	short tons (2000 lb)	lb	short tons	16	short tons
VOLUME							
ml	milliliters	0.03	fluid ounces	fl oz	fluid ounces	16	fluid ounces
l	liters	2.1	pints	pt	pints	16	pints
l	liters	1.06	quarts	qt	quarts	16	quarts
l	liters	0.26	gallons	gal	gallons	16	gallons
m ³	cubic meters	36	cubic feet	ft ³	cubic feet	16	cubic feet
m ³	cubic meters	1.3	cubic yards	yd ³	cubic yards	16	cubic yards
TEMPERATURE (exact)							
°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F	Fahrenheit temperature	16	°F

1. INTRODUCTION

The objective of this program is to obtain engine performance data for estimating fuel economy and emissions for varied engine service and duty. The intent of this work done at Bartlesville Energy Technology Center is to provide basic engine characteristic data required as input for engineering calculations of fuel consumption and emissions involving ground transportation.

The data acquired from tests of a 1978 Pontiac 301 CID engine are presented in this report. This engine was intended for use in a 1978 forty-nine state (Federal) vehicle equipped with automatic transmission. Pontiac uses the 301 CID engine in vehicles in the 3,500 to 4,500 lb weight class. The test results are sufficient to establish steady-state maps for fuel consumption and emissions (carbon monoxide, unburned hydrocarbon, and oxides of nitrogen) over the entire operating range of the engine.

2. ENGINE TEST REPORT

The engine test set-up included a complete mean-tolerance engine (SAE definition) coupled to an eddy current dynamometer. A cooling tower was used in place of the fan and radiator. The alternator was included but was not wired into the engine's electrical system. Emission control systems included exhaust-gas-recirculation, positive crankcase ventilation, early fuel evaporation, and an oxidation catalyst. The manufacturer's engine specifications are listed in Table 1.

Prior to testing, engine break-in consisted of 40 hours of operation at various speeds and loads representative of normal engine operation. Table 2 contains details of the break-in schedule. A single batch of unleaded regular grade gasoline was used throughout the break-in and tests; a detailed fuel analysis is given in Table 3. Engine tests began on January 16, 1978 and ended on February 2, 1978. During steady-state tests, the engine was operated at the following speed load modes:

Speeds: 1,000; 1,300; 1,700; 2,000; 2,400; 2,800; 3,300;
3,600 rpm

Loads: 0, 10, 25, 40, 60, 75, 90, 100 pct of full load (0,
10, 25, 60, and 75 pct points were repeated for all
engine speeds.)

Idle speed/load modes: 650 rpm--0, 10, 16 lb-ft
550 rpm--15 lb-ft

Total number of test modes.....	68
Total number of repeats.....	44
Total number of tests.....	112

At the conclusion of the tests, the engine was motored at 1,000; 1,500; and 2,000 rpm. At each of the speeds, the engine was motored with the throttle in the idle position, ignition on; throttle in the idle position, ignition off; and wide-open-throttle, ignition off.

The following data were recorded for each test point:

Test number

Date

Barometric pressure, mm Hg

Dew point, °F

Inlet air temperature, °F

Speed, rpm

Torque, lb-ft -- Daytronics strain gauge load cell

Fuel rate, lb/hr -- Fluidyne positive displacement fuel flow meter

Ignition timing, °BTC
 Manifold vacuum, in. Hg
 Throttle angle, degrees
 CO, pct -- Beckman NDIR
 CO₂, pct -- Beckman NDIR
 O₂, pct -- Beckman polarographic detector
 HC, ppmC -- Custom-built heated flame ionization detector
 NO_x, ppm -- Thermo-Electron chemiluminescent detector
 Oil temperature, °F
 Oil pressure, psig
 Coolant temperature, °F
 Exhaust temperature, °F
 Exhaust pressure, in. H₂O
 Intake manifold temperature, °F
 Exhaust-gas-recirculation rate as determined by the intake
 manifold, CO₂

The following equations were used in calculating power, air/fuel ratio, absolute humidity, and mass emission rates of carbon monoxide (CO), unburned hydrocarbons (HC), and oxides of nitrogen (NO_x):

1. Partial pressure of water vapor in intake air (millimeters of mercury):

$$P = \exp \left[18.717 - \frac{7308.1}{393 + D} \right]$$

where D = Dew point, °F

2. Absolute humidity (grains moisture per pound dry air):

$$H = \frac{4347.8(P)}{B - P}$$

where B = Barometric pressure, mm Hg

3. Humidity correction factor (dimensionless):

$$K_H = \frac{1}{1 - 0.0047(H - 75)}$$

Note: This factor is used to correct the NO_x mass emission rate to a standard humidity of 75 grains moisture per pound dry air.

4. Stoichiometric air/fuel ratio (dimensionless):

$$AF_s = \frac{69(2 + \frac{x}{2} - y)}{MW_{fuel}}$$

where x = hydrogen-carbon ratio of fuel

y = oxygen-carbon ratio of fuel

MW_{fuel} = fuel molecular weight per carbon atom
 $= 12.01115 + 1.00797x + 16.00000y$

5. Hydrogen concentration in raw exhaust (percent):

$$H_2 = \frac{x(CO)(CO + CO_2)}{2(CO + 3CO_2)}$$

where CO = Carbon monoxide concentration (percent)

CO_2 = Carbon dioxide concentration (percent)

Note: This equation assumes a water-gas shift equilibrium constant

$$\frac{(CO)(H_2O)}{(CO_2)(H_2)} = 3$$

6. Correction factor for emission concentrations from wet basis to dry basis (dimensionless):

$$C_w = 1 + \frac{(\frac{x}{2})(CO + CO_2) - H_2}{100}$$

Note: In these tests only HC is measured on a wet basis.
All other species are measured on a dry basis.

7. Air/Fuel ratio (dimensionless):

$$AF = \frac{AF_s}{2 + \frac{x}{2} - y} \left[\frac{(1 + \frac{x}{2} - y)(CO) + (2 + \frac{x}{2} - y)(CO_2) + 2(O_2) + \frac{NO_x}{10^4} - H_2}{CO + CO_2 + C_w (\frac{HC}{10^4})} \right]$$

where O_2 = oxygen concentration (percent)

NO_x = oxides of nitrogen (ppm)

HC = unburned hydrocarbon concentration (ppmC)

8. Exhaust flow (pounds per hour):

$$M_{EX} = M_F(1 + AF)$$

where M_F = fuel flow rate (pounds per hour)

9. Carbon monoxide mass emission rate (grams per hour):

$$M_{CO} = \left(\frac{MW_{CO}}{MW_f} \right) \left[\frac{(\%CO)}{\%CO + \%CO_2 + C_w(\%HC)} \right] (453.59237)$$

MW_{CO} = molecular weight of CO (28.01115)
 MW_f = molecular weight of fuel (12.01115 +
 $1.00797x + 16.00000y$)
 M_f = fuel rate in lbs/hour
 $\%HC$ = HC(ppm)/10⁴

10. Unburned hydrocarbon mass emission rate (grams per hour):

$$M_{HC} = \left(\frac{MW_{HC}}{MW_f} \right) \left[\frac{(\%HC)}{\%CO + \%CO_2 + C_w(\%HC)} \right] (453.59237)$$

MW_{HC} = molecular weight of hydrocarbon
= 12.01115 + 1.00797x + 16.00000y

11. Oxides of nitrogen mass emission rate (grams per hour):

$$M_{NO_x} = \left(\frac{MW_{NO_x}}{MW_f} \right) \left[\frac{\%NO_x + M_f}{\%CO + \%CO_2 + C_w(\%HC)} \right] (453.59237)$$

MW_{NO_x} = molecular weight of NO₂ = 46.0055

12. Power (brake horsepower corrected to a standard barometric pressure of 736.6 mm Hg and a standard temperature of 85° F):

$$HP = \left(\frac{N(T)}{5252.113} \right) \left(\frac{736.6}{B - P} \right) \sqrt{\frac{t + 460}{545}}$$

where N = engine speed (revolutions per minute)

T = brake torque (lb-Ft)

t = air temperature (°F)

B = barometric pressure (mm Hg)

P = partial pressure of water vapor in intake air (mm Hg)

3. DISCUSSION OF TEST RESULTS

Maximum corrected brake horsepower, maximum corrected torque, and brake specific fuel consumption (bsfc) are plotted as a function of engine speed at wide-open-throttle (WOT) in Figure 1. The maximum power output of the engine was found at the specified speed but was slightly lower than the value quoted in Table 1. The maximum torque produced by the engine was similar to the value quoted in Table 1 but was found at a slightly lower rpm than specified. The fuel rate was found to be nearly linear with power for each engine speed as can be seen in the plots of fuel rate versus power for each speed (Figure 2). In the low power output modes, the engine's oxidation catalyst was effective at controlling carbon monoxide (CO) and hydrocarbons (HC). As power output was increased, the air/fuel ratio decreased (Figure 3), resulting in less effective catalytic treatment of CO and HC (Figures 4 and 5). The oxides of nitrogen (NO_x) emissions tended to peak at about 50 percent of maximum power for rpm's higher than 1,700 rpm (Figure 6). Beyond this power level, operation at rich air-fuel ratios resulted in a decrease in NO_x emission rates.

4. CONCLUSIONS

The experimental work to obtain performance data for the Pontiac 301 CID engine has been completed, and these data are presented in the tables accompanying this report.

TABLE 1. MANUFACTURER'S ENGINE SPECIFICATIONS

Displacement, cubic inches.....	301
Maximum horsepower, bhp @ 3,600 rpm.....	140
Maximum torque, lb-ft @ 2,000 rpm.....	235
Bore and stroke, inches.....	4.00-3.00
Configuration.....	V-8
Compression ratio.....	8.2:1
Firing order.....	1-8-4-3-6-5-7-2
Ignition timing at idle speed, BTDC @ 550 rpm....	12
Block material.....	cast alloy iron
Head material.....	cast alloy iron
Number of crankshaft main bearings.....	5
Number of compression rings/piston.....	2
Number of oil rings/piston.....	1
Cam drive type.....	chain
Engine weight, lb.....	525
Valve lift:	
Intake, inches.....	0.364
Exhaust, inches.....	0.364
Valve timing:	
Intake opens, °BTC.....	27
Intake closes, °ABC.....	67
Exhaust opens, °BBC.....	62
Exhaust closes, °ATC.....	32
Spark plug gap, inches.....	0.060
Exhaust-gas-recirculation system:	
Valve type.....	vacuum modulated
Control signal.....	ported vacuum, exhaust pressure modulated intake manifold
Point of discharge.....	
Crankcase emission control:	
Control method.....	positive crankcase ventilation
Point of discharge.....	intake manifold
Carburetor type.....	2V downdraft
Distributor specifications:*	
Centrifugal advance, begins, ° @ 825 rpm....	0
Centrifugal advance, intermediate, ° @ 1,800 rpm.....	10.1
Centrifugal advance, full, ° @ 3,400 rpm....	21.4
Vacuum advance, begins, ° @ 4 in. Hg.....	0
Vacuum advance, maximum, °@ 12 in. Hg.....	25
Carburetor number.....	17058160
Distributor number.....	1103314
EGR valve number.....	17056319

*Engine rpm, crankshaft degrees.

TABLE 2. ENGINE BREAK-IN SCHEDULE

Simulated vehicle speed, mph	Engine speed, rpm	Intake manifold vacuum, in Hg	Fraction of time in mode
0	650	15.8	1/10
20	750	16.9	"
30	1,090	12.1	"
40	1,375	13.1	"
50	1,675	12.5	"
60	1,975	10.3	"
25	880	17.5	"
35	1,190	12.1	"
45	1,500	12.6	"
55	1,825	11.4	"

Mileage per cycle = 90.

Total mileage simulated over 40 hours break-in period = 1,440.

TABLE 3. FUEL ANALYSIS

Fuel No.....	7718
Research octane No.....	91.8
Motor octane No.....	84.0
Specific gravity.....	0.717
API gravity, degrees.....	65.9
Distillation, °F:	
10 pct evaporated.....	123
50 pct " 	209
95 pct " 	402
100 pct " 	413
Reid vapor pressure, psi.....	11.26
FIA analysis, pct:	
Aromatics.....	9
Olefins.....	15
Paraffins.....	76
Sulfur, pct.....	0.016
Lead, grams per gallon.....	Trace
Hydrogen/carbon atomic ratio.....	2.038

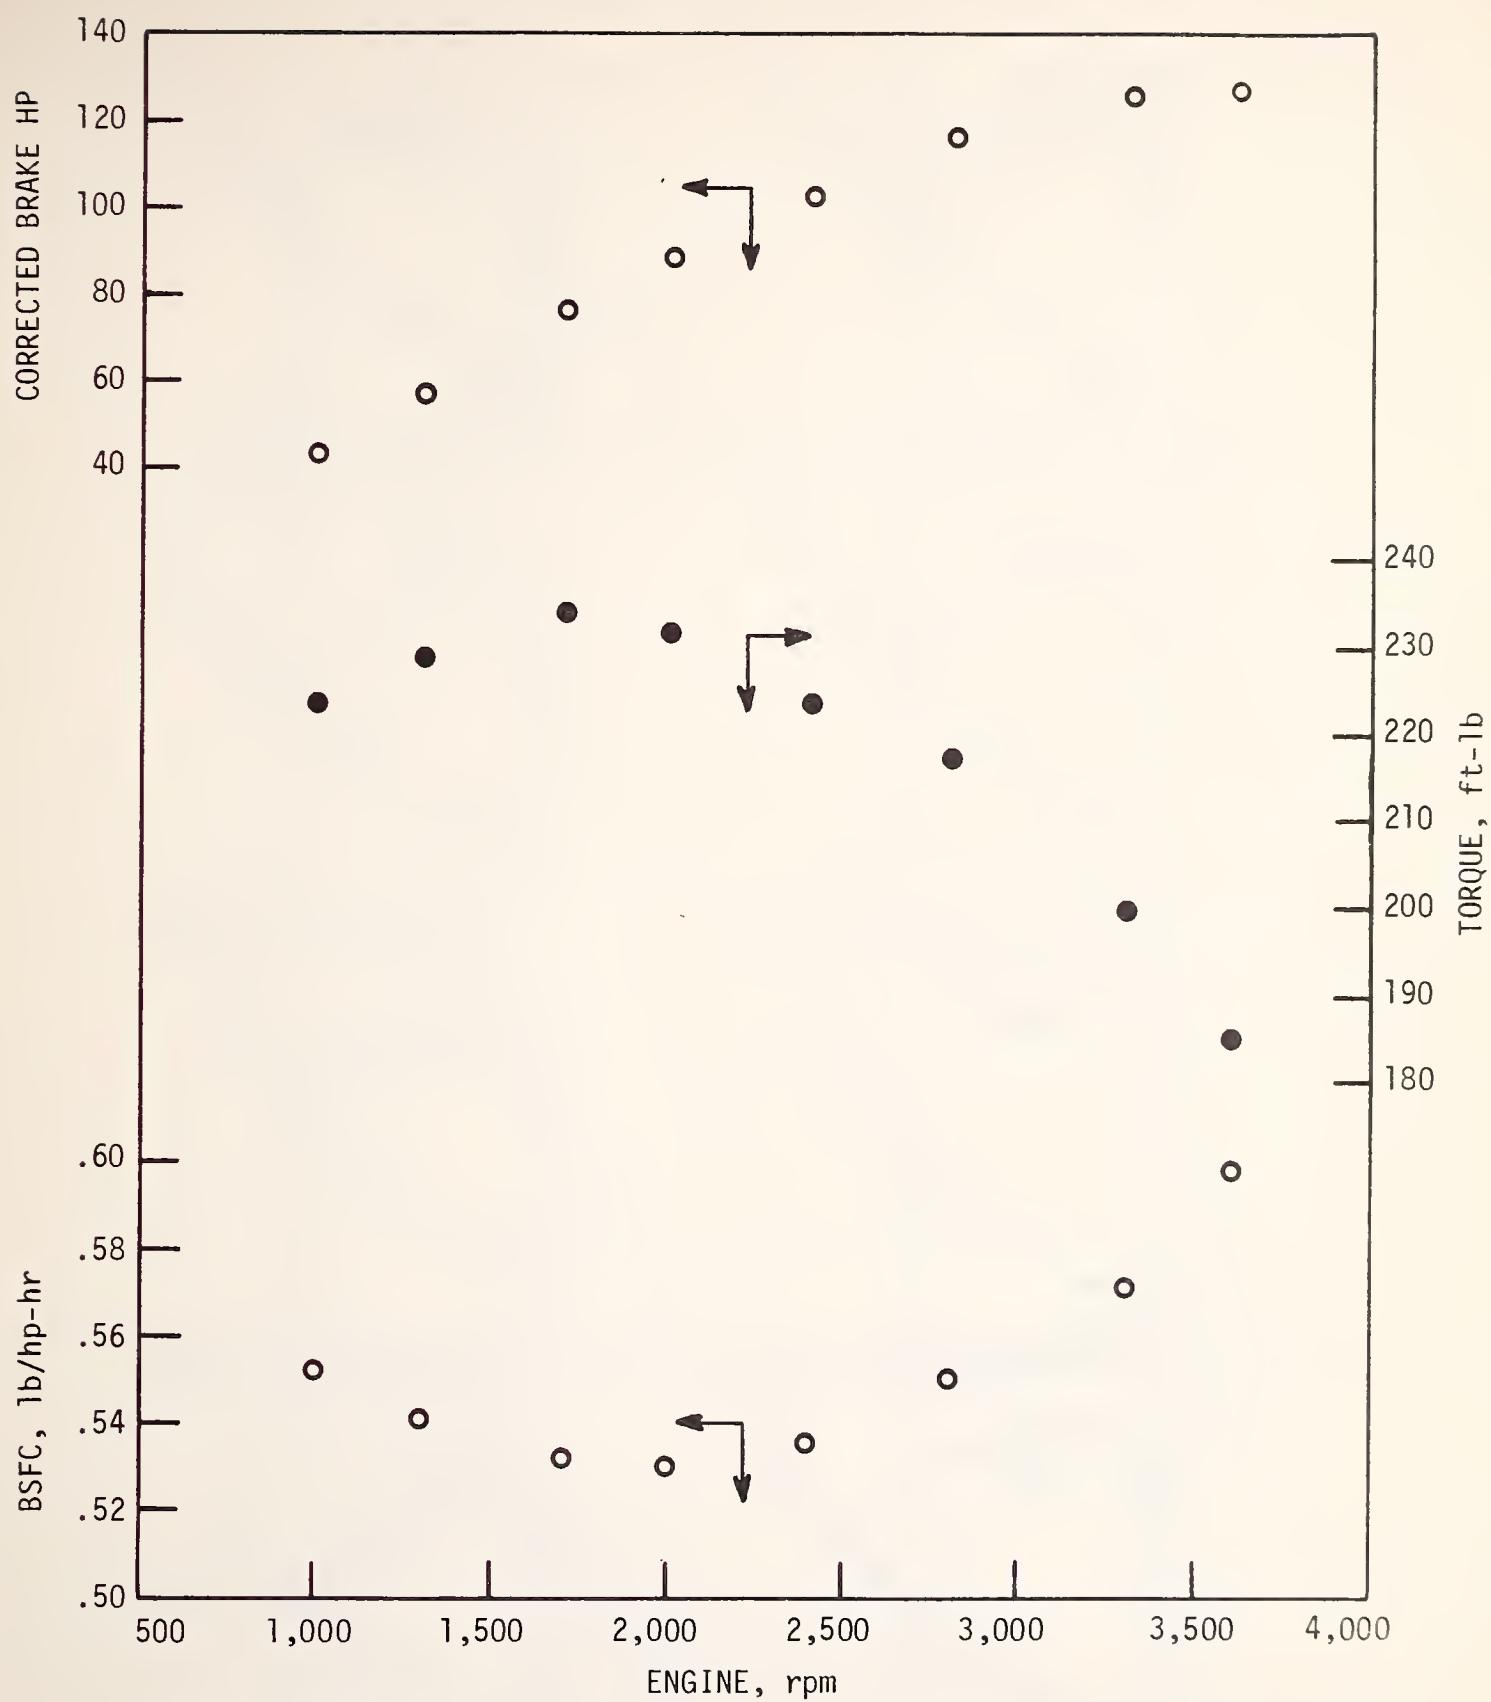


FIGURE 1. Brake Specific Fuel Consumption, Torque, and Brake Horsepower Versus Engine rpm at Wide-Open-Throttle--Pontiac 301 CID Engine.

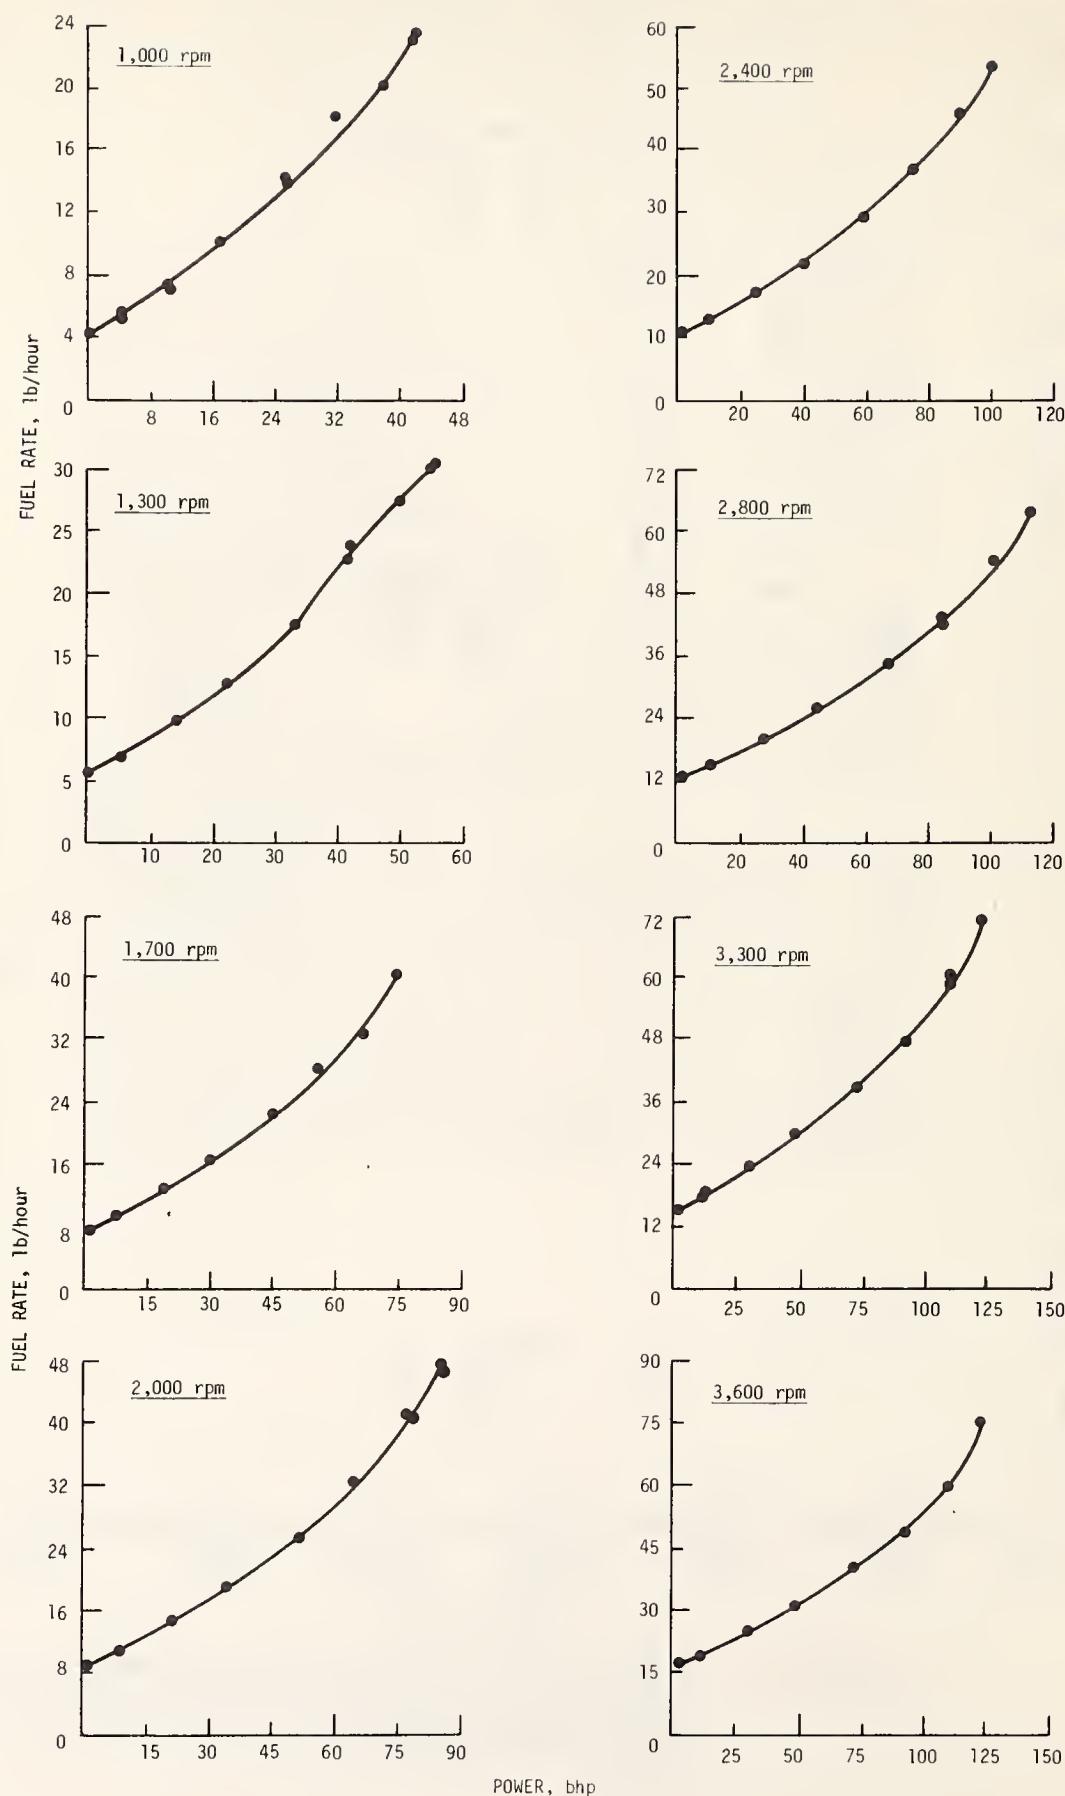


FIGURE 2. Fuel Rate Versus Power at Various Speed and Load Conditions-- Pontiac 301 CID Engine.

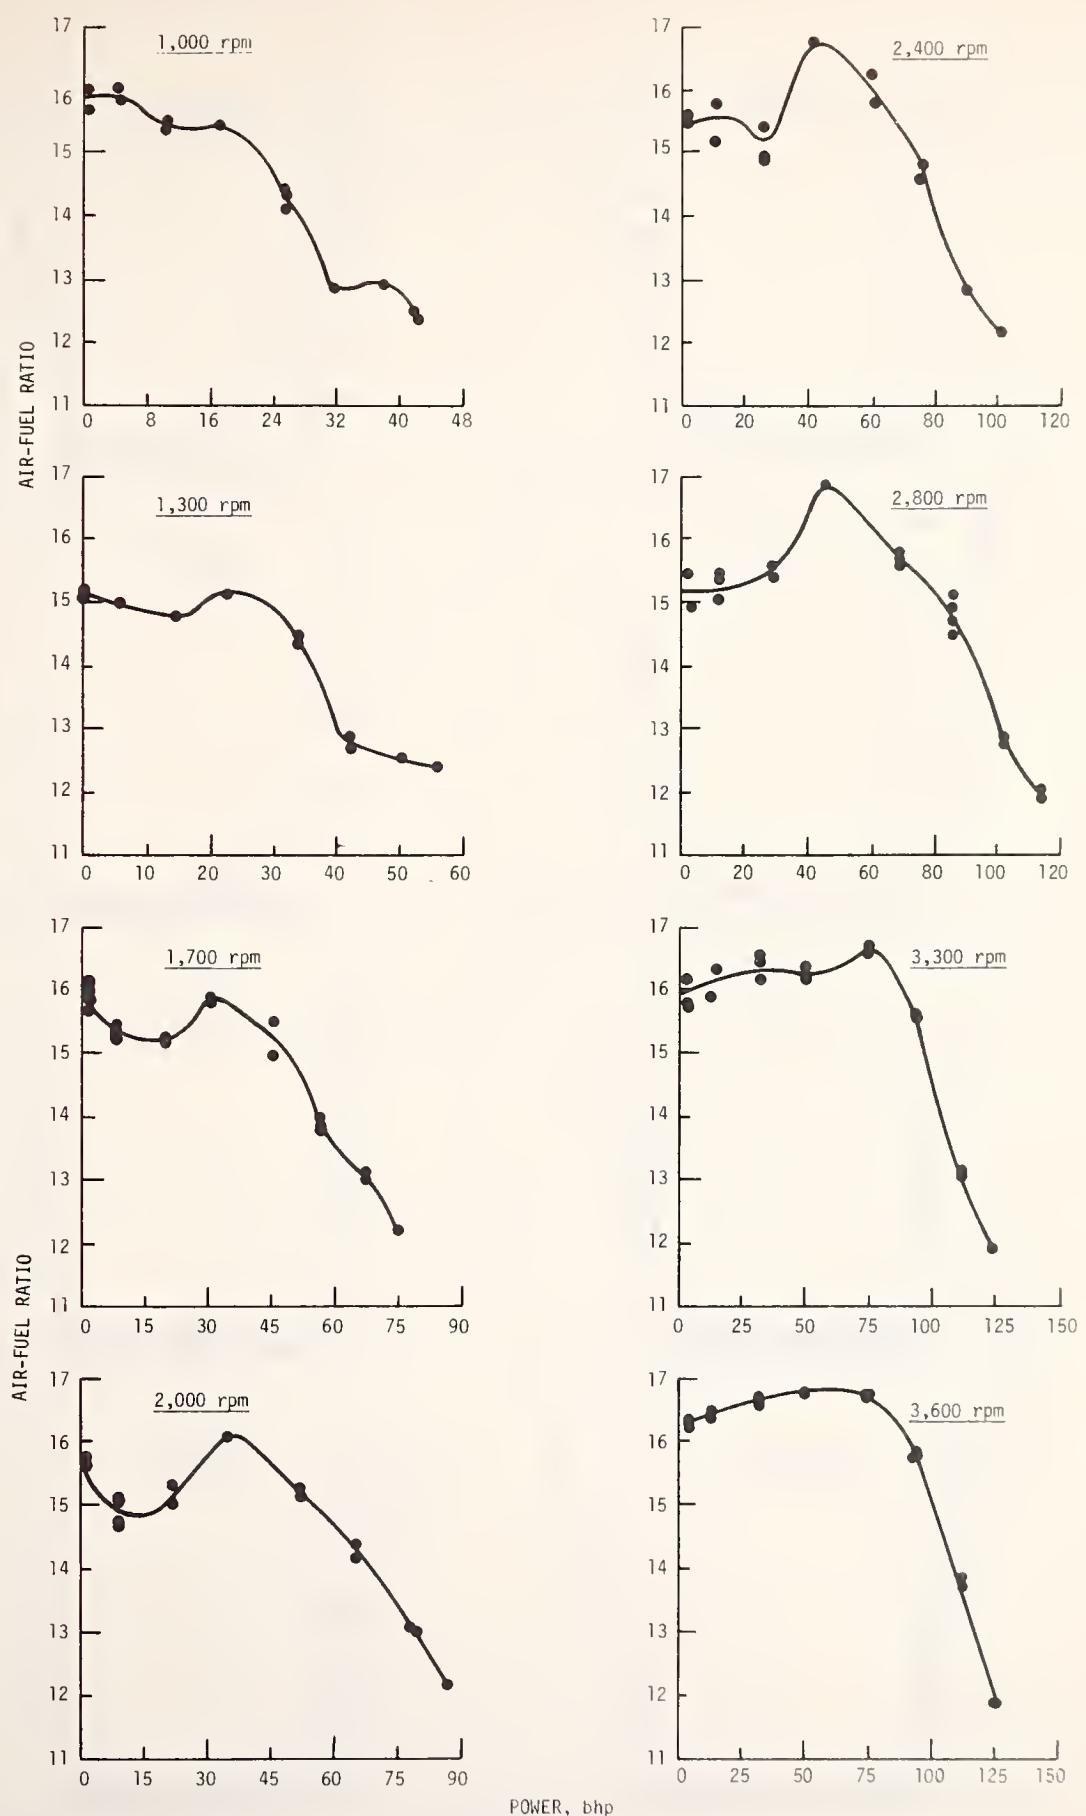


FIGURE 3. Air Fuel Ratio Versus Power at Various Speed and Load Conditions--Pontiac 301 CID Engine.

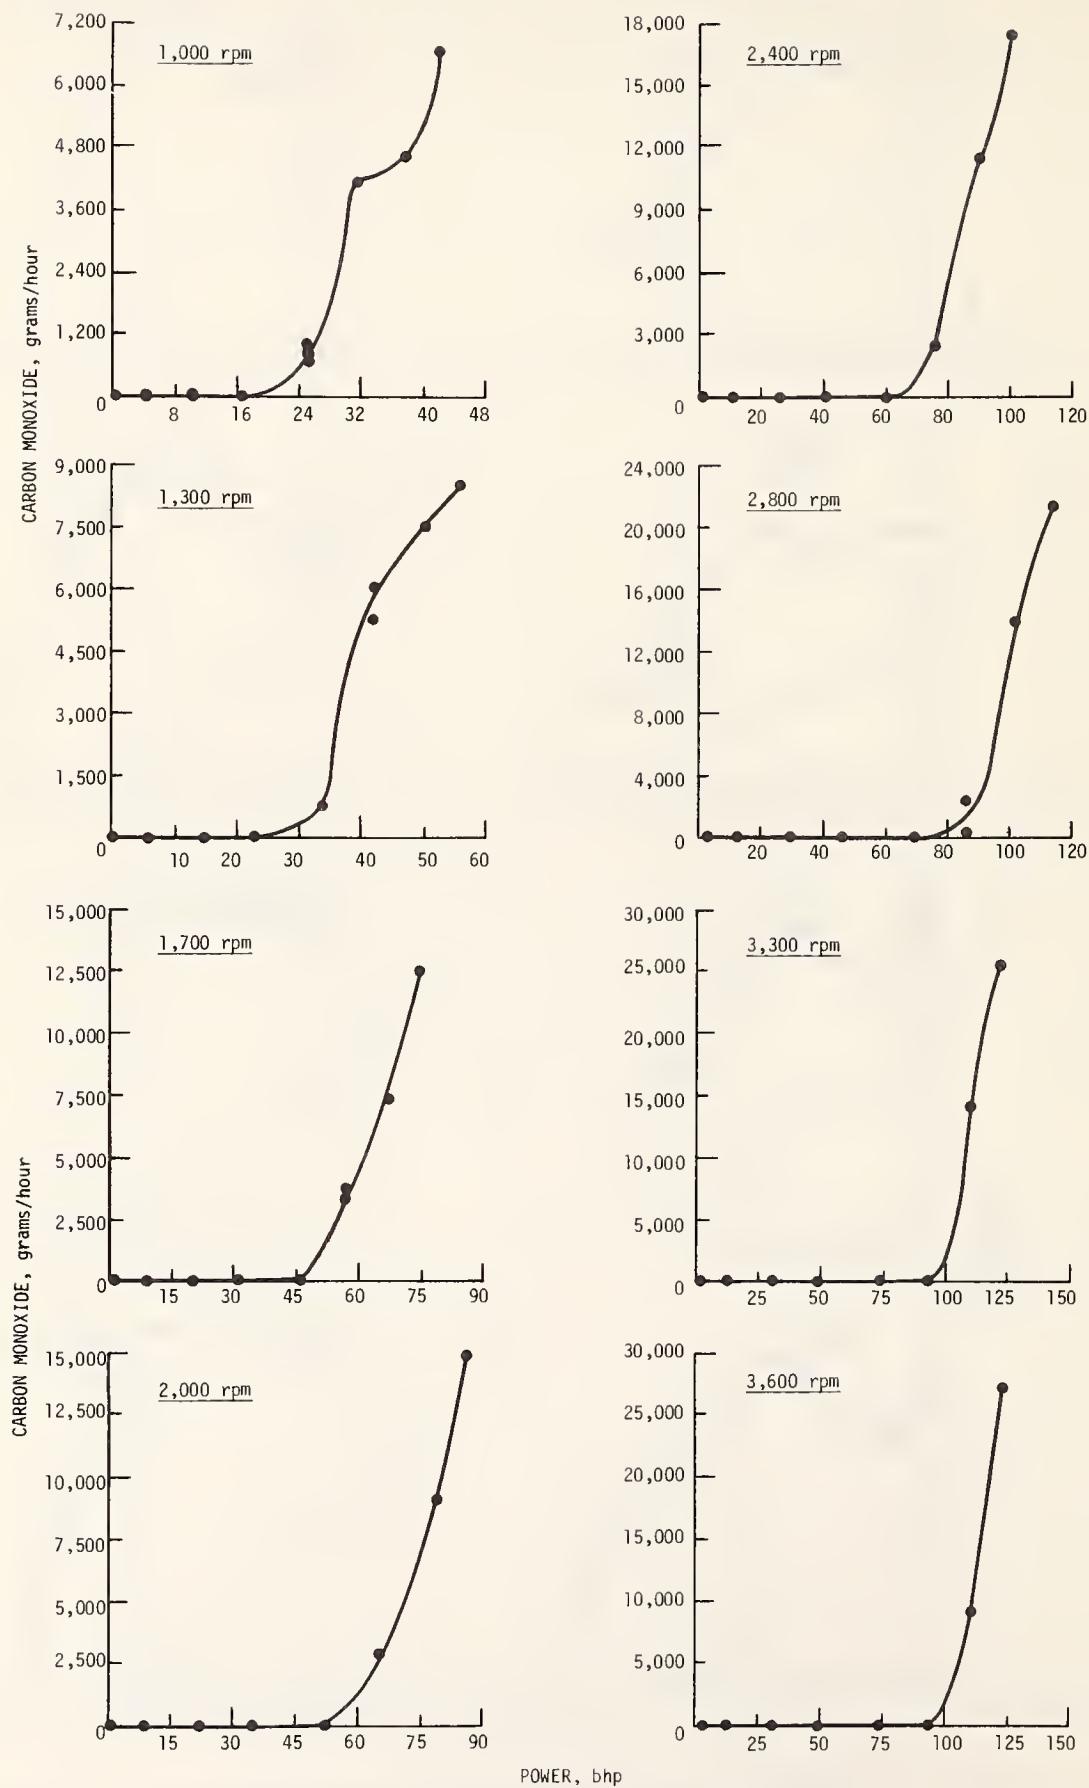


FIGURE 4. Carbon Monoxide Emissions Versus Power at Various Speed and Load Conditions--Pontiac 301 CID Engine.

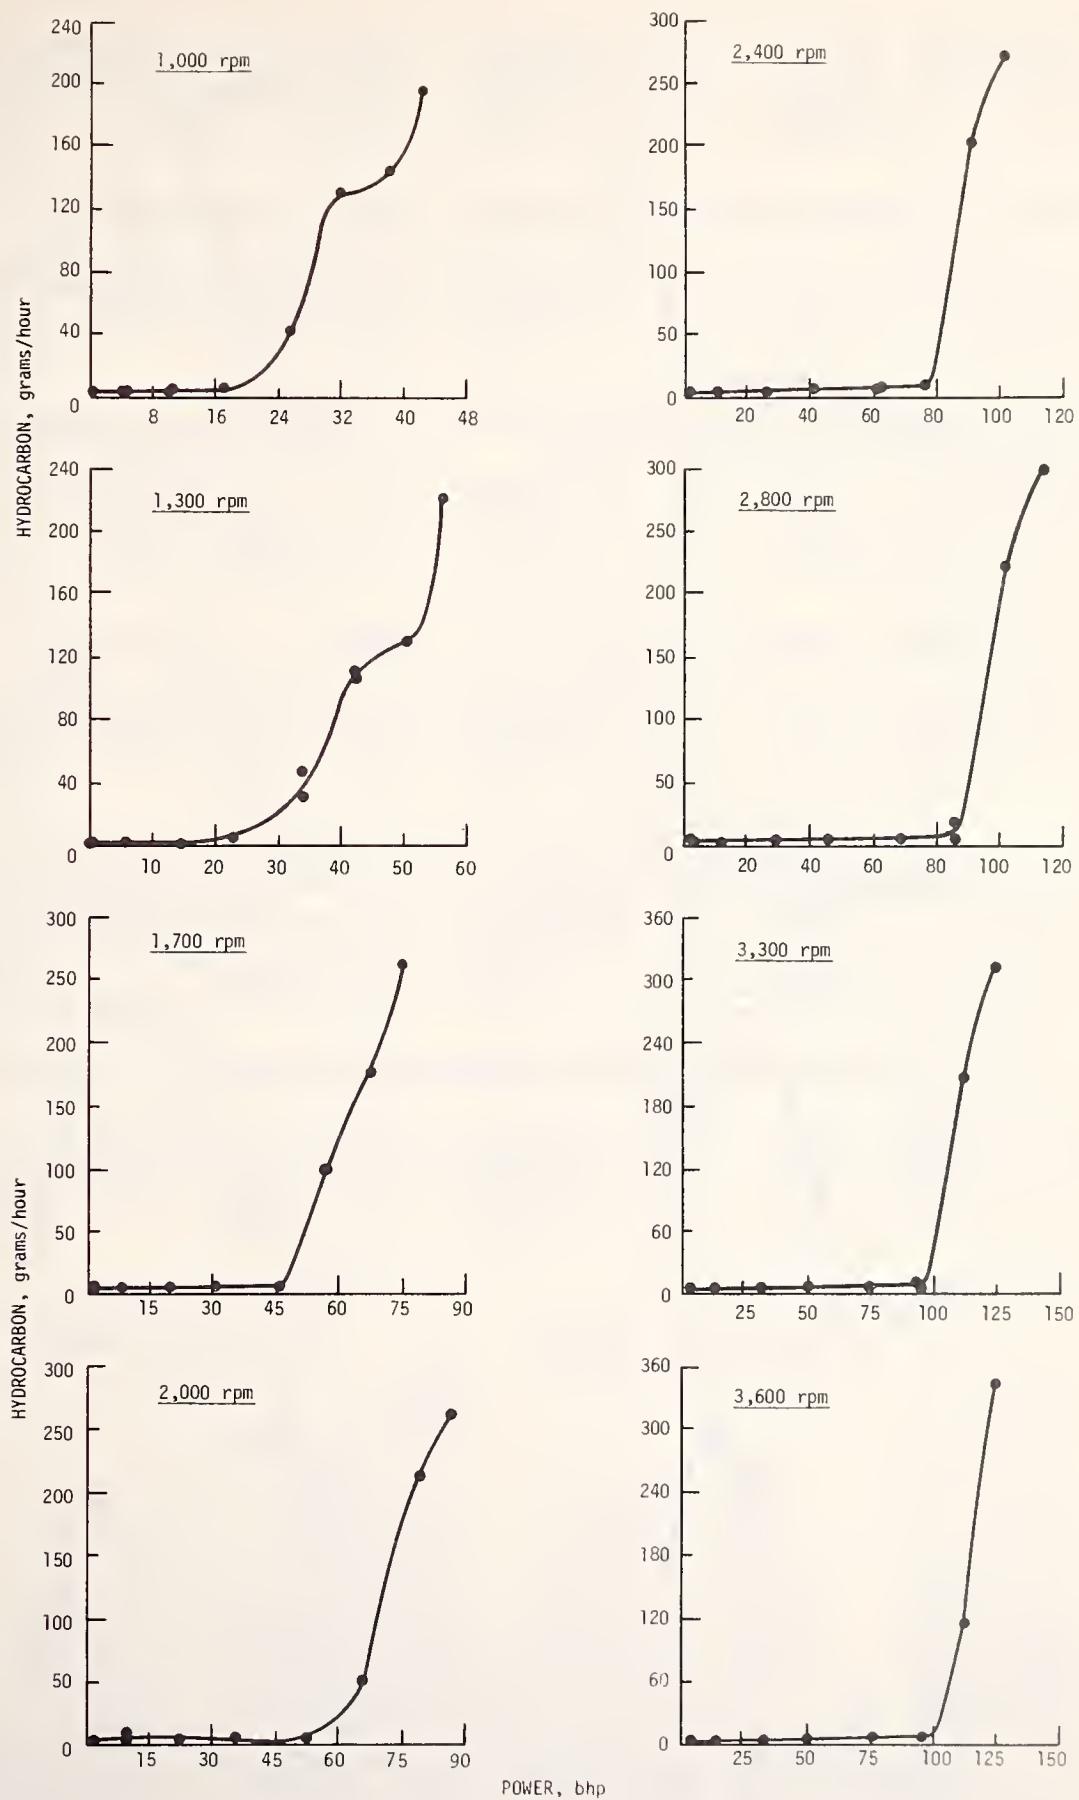


FIGURE 5. Hydrocarbon Emissions Versus Power at Various Speed and Load Conditions--Pontiac 301 CID Engine.

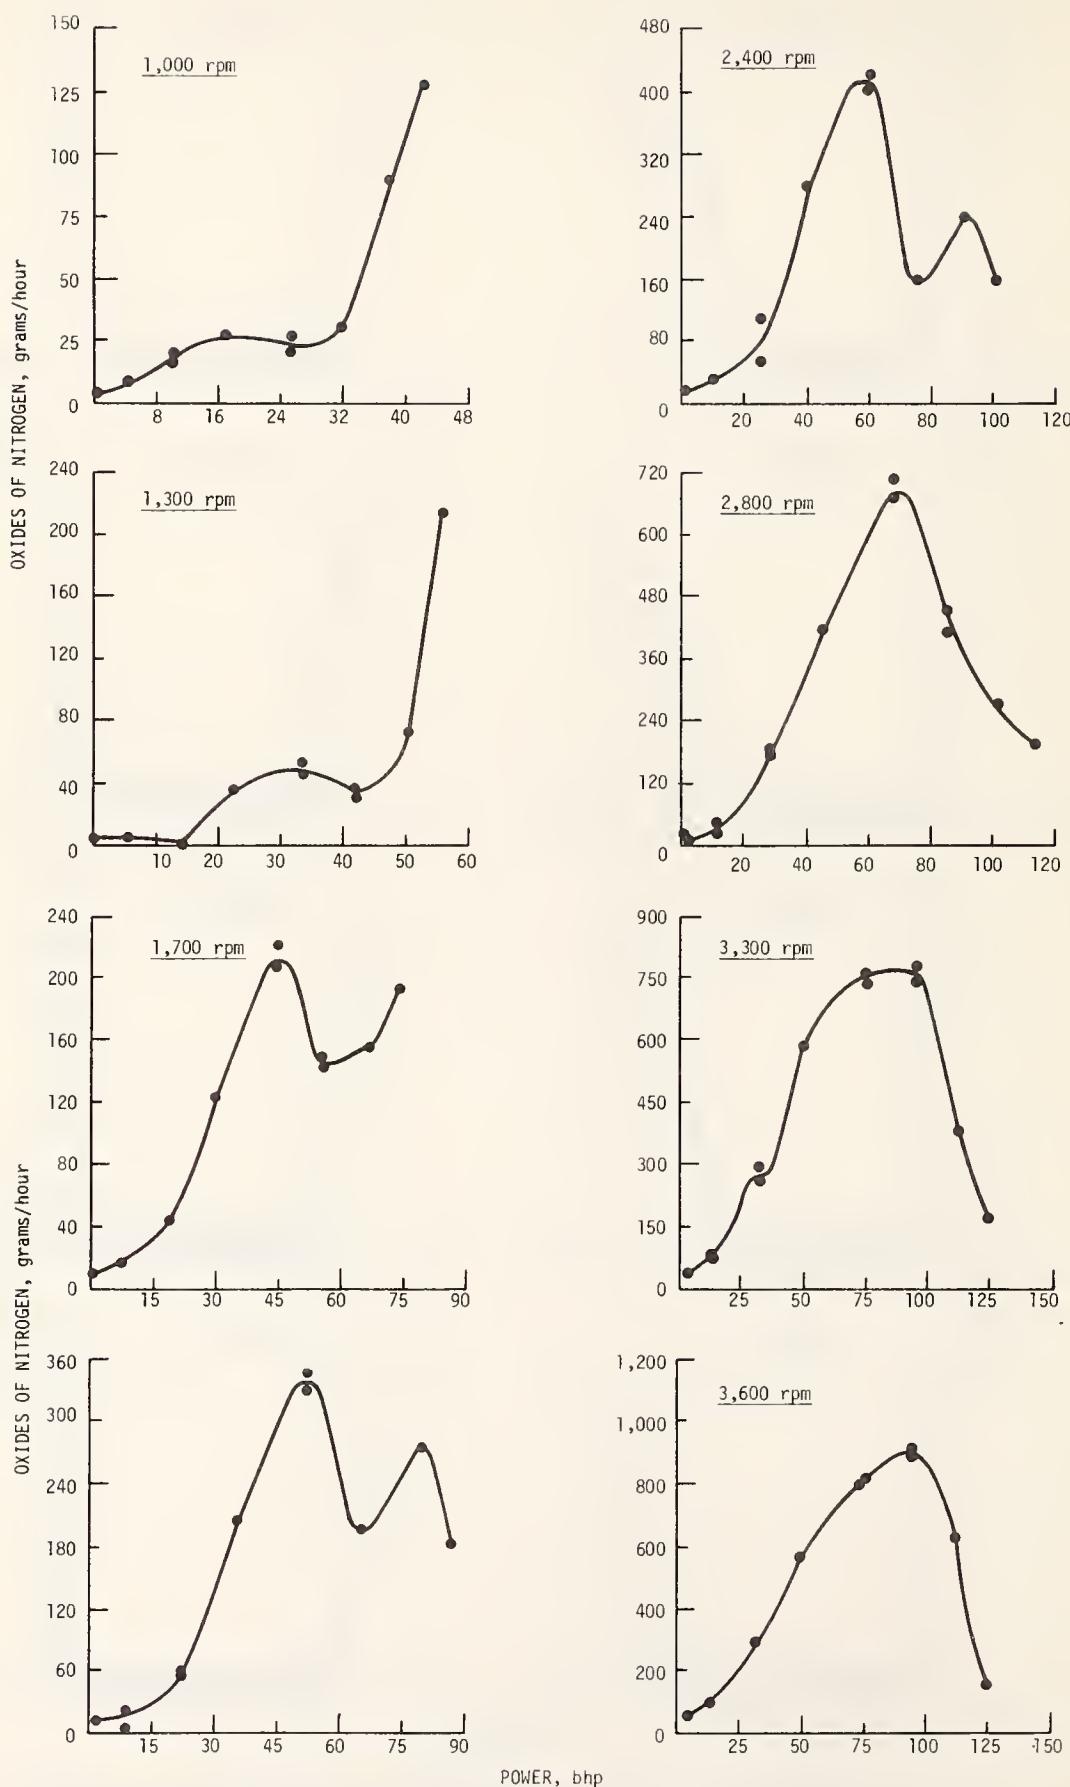


FIGURE 6. Oxides of Nitrogen Emissions Versus Power at Various Speed and Load Conditions--Pontiac 301 CID Engine.

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	1.01	1.02	2.01	2.02	3.01
TEST NUMBER	1	2	1	2	1	2
DATA SOURCE CODE	1	2	1	2	1	2
TEST DATE	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78
BAROMETER, MMHG	745.6	745.6	745.6	745.6	745.6	745.6
HUMIDITY, GRAINS/LB	43	43	43	43	43	43
TEMPERATURE, F	67	65	65	65	64	63
ENGINE SPEED, RPM	650	650	650	650	650	650
TORQUE, FT-LB	1.9	2.0	8.9	8.9	15.7	15.7
POWER, BHP*	.2	.2	1.1	1.1	1.9	1.9
FUEL RATE, LB/HR	2.9	2.9	3.2	3.2	3.5	3.5
IGNITION TIMING, DEG BTDC	29.0	29.0	29.0	29.0	28.5	28.5
MANIFOLD VACUUM, IN HG	19.5	19.5	19.0	19.1	18.7	18.7
THROTTLE ANGLE, DEG	2	2	2	2	1.0	1.0
INTAKE MAN. TEMP., F	133	123	111	110	111	111
CONCENTRATIONS, DRY BASIS						
CO, %	27.02	0138	2393	0269	2333	2111
CO2, %	12.93	14.38	13.57	14.48	13.90	13.93
O2, %	2.31	.51	.41	.38	.97	.98
HC, PPM	10957	528	6383	1012	4849	4174
NOX, PPM	44	65	71	61	99	94
AIR/FUEL RATIO	15.14	15.10	15.01	14.95	14.87	14.95
EMISSION RATES, G/HR						
CO	59.2	2.5	47.4	5.3	49.7	45.2
HC	102.3	4.8	63.5	10.0	51.9	44.9
NOX+	1.2	1.7	2.0	1.7	3.0	2.9
OIL TEMPERATURE, F	186	177	174	175	176	177
OIL PRESSURE, PSI	26	28	29	29	29	28
COOLANT TEMPERATURE, F	172	166	165	167	168	169
EXHAUST PRESSURE, IN. H2O	0	0	0	0	0	0
EXHAUST TEMPERATURE, F	430	612	451	568	458	470

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7716	TEST NUMBER	4.01	TEST DATE	1/16/78	DATA SOURCE CODE	1	4.02	1/16/78	5.01	1	5.02	1	6.01	1	6.02
BAROMETER, MMHG	745.6	HUMIDITY, GRAINS/LB	4.3	TEMPERATURE, F	63	ENGINE SPEED, RPM	550	TORQUE, FT-LB	14.1	POWER, BHP*	1.5	FUEL RATE, LB/HR	2.9	IGNITION TIMING, DEG BTDC	27.5	1/16/78
MANIFOLD VACUUM, IN HG	18.4	THROTTLE ANGLE, DEG	3	INTAKE MAN. TEMP., F	112	CONCENTRATIONS, DRY BASIS		CO, %	4147	CO2, %	13.87	O2, %	9.2	HC, PPMC	5705	1/16/78
NOX, PPM	77	AIR/FUEL RATIO	14.67	EMISSION RATES, G/HR		OIL CO	74.2	CO	71.0	HC	51.3	NOX+	2.0	OIL HC	176	1/16/78
							51.3	48.3	48.3	190.4				24	24	1/16/78
							2.0	1.8						175	175	1/16/78
														190.4	190.4	1/16/78
														127.5	127.5	1/16/78
														105.3	105.3	1/16/78
														214	214	1/16/78
														201	201	1/16/78
														32	32	1/16/78
														183	183	1/16/78
														19.0	19.0	1/16/78
														314	314	1/16/78
														952	952	1/16/78
														976	976	1/16/78
														931	931	1/16/78

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

TEST NUMBER

DATA SOURCE CODE

TEST DATE

BAROMETER, MMHG

HUMIDITY, GRAINS/LB

TEMPERATURE, F

ENGINE SPEED, RPM

TORQUE, FT-LB

POWER, BHP*

FUEL RATE, LB/HR

IGNITION TIMING, DEG BTDC

MANIFOLD VACUUM, IN HG

THROTTLE ANGLE, DEG

INTAKE MAN. TEMP., F

CONCENTRATIONS, DRY BASIS

CO, %

CO₂, %O₂, %

HC, PPM

NOX, PPM

AIR/FUEL RATIO

EMISSION RATES, G/HR

CO

HC

NOX+

OIL TEMPERATURE, F

OIL PRESSURE, PSI

COOLANT TEMPERATURE, F

EXHAUST PRESSURE, IN. H₂O

EXHAUST TEMPERATURE, F

7.01	7.02	8.01	8.02	9.01	9.02
1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78
746.9	746.9	746.9	746.9	746.9	746.9
36	36	36	36	36	36
62	62	62	61	60	59
1000	1000	1000	1000	1000	1000
170.3	170.4	135.1	136.4	91.0	91.0
31.9	32.0	25.3	25.6	17.1	17.1
18.1	18.1	14.0	14.2	10.2	10.1
15.0	15.0	16.0	16.0	31.0	31.0
3.3	3.3	4.7	4.5	9.2	9.3
19.8	19.8	16.0	16.0	10.3	10.3
115	130	151	170	189	188
4.3835	4.2989	85556	8664	1529	0044
12.26	12.37	14.22	14.34	13.90	14.28
.16	.06	.29	.04	1.33	.89
2980	2682	2249	990	2528	165
261	224	265	168	300	295
12.86	12.86	14.42	14.37	15.40	15.41

7.01	7.02	8.01	8.02	9.01	9.02
1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78
746.9	746.9	746.9	746.9	746.9	746.9
36	36	36	36	36	36
62	62	61	61	60	59
1000	1000	1000	1000	1000	1000
170.4	135.1	136.4	91.0	91.0	91.0
32.0	25.3	25.6	17.1	17.1	17.1
18.1	14.0	14.2	10.2	10.1	10.1
15.0	16.0	16.0	31.0	31.0	31.0
3.3	4.7	4.5	9.2	9.2	9.3
19.8	16.0	16.0	10.3	10.3	10.3
115	130	151	170	189	188
4.231.1	4.140.8	709.2	723.7	98.4	2.8
144.4	129.7	93.6	41.5	81.7	5.3
35.0	30.0	30.5	19.5	26.8	26.2
203	201	198	197	194	192
35	36	37	37	38	39
176	176	174	174	170	168
13.0	8.0	10.0	6.0	5.0	4.0
928	789	966	779	829	792

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	10.01	10.02	11.01	11.02	12.01	12.02
DATA SOURCE CODE	1	TEST DATE	1/16/78	1/16/78	1/16/78	1/16/78	1/23/78	1/23/78
SARDOMETER, MMHG	746.9	TEMPERATURE, F	746.9	746.9	746.9	746.9	746.0	746.0
HUMIDITY, GRAINS/LB	36	ENGINE SPEED, RPM	36	36	36	36	39	39
TORQUE, FT-LB	55.1	POWER, BHP*	55.1	54.5	54.5	54.5	57	57
FUEL RATE, LB/HR	10.3	IGNITION TIMING, DEG BTDC	7.3	7.3	7.3	7.3	83	81
MANIFOLD VACUUM, IN HG	39.0	MANIFOLD VACUUM, IN HG	39.0	39.0	39.0	39.0	1000	1000
THROTTLE ANGLE, DEG	14.6	INTAKE MAN. TEMP., F	14.7	14.7	14.7	14.7	1000	1000
CONGNTRATIONS, DRY BASIS	18.2	CO, %	20.61	20.61	20.61	20.61	24.38	24.38
		CO2, %	13.88	13.88	13.88	13.88	13.93	13.93
		O2, %	1.29	1.29	1.29	1.29	1.43	1.43
		HC, PPM	2781	2781	2781	2781	201	201
		NOX, PPM	252	252	243	243	177	177
AIR/FUEL RATIO	15.32	EMISSION RATES, G/HR	15.34	15.34	15.34	15.34	15.80	15.80
		CO	94.7	94.7	94.7	94.7	88.7	88.7
		HC	64.2	64.2	64.2	64.2	49.5	49.5
		NOX+	16.1	16.1	16.1	16.1	8.9	8.9
OIL TEMPERATURE, F	169	OIL PRESSURE, PSI	186	186	186	186	180	183
COOLANT TEMPERATURE, F	39	COOLANT PRESSURE, IN. H2O	40	40	40	40	41	41
EXHAUST TEMPERATURE, F	165	EXHAUST PRESSURE, IN. H2O	163	163	163	163	159	158
EXHAUST TEMPERATURE, F	2.0		2.0	2.0	2.0	2.0	1.0	1.0
			6.99	7.14	7.14	7.14	6.25	5.92

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7716	13.01	13.02	14.01	14.02	15.01
TEST NUMBER	DATA SOURCE CODE	1	2	1	2	1
TEST DATE	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78
BAROMETER, MMHG	746.9	746.9	746.9	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	43	43	38	38	38	38
TEMPERATURE, F	83	84	69	68	68	67
ENGINE SPEED, RPM	1300	1300	1300	1300	1300	1300
TORQUE, FT-LB	230.7	231.9	208.0	207.9	172.9	172.9
POWER, BHP*	56.3	56.5	50.8	50.8	42.2	42.2
FUEL RATE, LB/HR	30.2	30.4	27.3	27.3	22.6	22.7
IGNITION TIMING, DEG BTDC	18.0	18.0	17.5	17.5	18.5	18.5
MANIFOLD VACUUM, IN HG	.5	.5	.5	.5	3.6	3.5
THROTTLE ANGLE, DEG	82.6	82.6	28.1	28.1	22.7	22.7
INTAKE MAN. TEMP., F	88	89	121	114	138	162
CONCENTRATIONS, DRY BASIS						
CO, %	5.2900	5.2700	5.1707	5.1940	4.4475	4.3443
CO2, %	11.40	11.53	11.77	11.80	12.32	12.46
O2, %	.11	.01	.19	.08	.16	.06
HC, PPM	3118	2736	3185	1805	2458	1834
NOX, PPM	1026	935	422	368	233	214
AIR/FUEL RATIO	12.45	12.44	12.56	12.60	12.89	12.93
EMISSION RATES, G/HR						
CO	8498.4	8466.0	7391.0	7445.8	5341.7	5242.3
HC	251.6	220.7	228.6	129.9	148.2	111.1
NOX+	236.2	215.2	84.6	74.0	39.2	36.2
OIL TEMPERATURE, F	222	222	197	209	212	211
OIL PRESSURE, PSI	40	40	41	41	41	42
COLDANT TEMPERATURE, F	187	186	183	182	180	180
EXHAUST PRESSURE, IN. H2O	34.0	22.0	27.0	17.0	21.0	13.0
EXHAUST TEMPERATURE, F	1053	921	1024	847	1012	900

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	18.02	18.01	18.02	18.01
TEST NUMBER					
DATA SOURCE CODE	1	2	1	2	2
TEST DATE	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78
SAROMETER, MMHG	746.9	746.9	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	38	38	38	38	38
TEMPERATURE, F	66	68	66	65	63
ENGINE SPEED, RPM	1300	1300	1300	1300	1300
TORQUE, FT-LB	139.1	138.9	92.0	92.0	58.3
POWER, BHP*	34.0	33.9	22.5	22.5	14.2
FUEL RATE, LB/HR	17.2	17.3	12.8	12.8	9.9
IGNITION TIMING, DEG BTDC	24.0	24.0	37.0	37.0	43.0
MANIFOLD VACUUM, IN HG	6.0	6.0	10.1	10.1	14.4
THROTTLE ANGLE, DEG	17.6	17.6	12.3	12.3	8.5
INTAKE MAN. TEMP., F	167	199	212	213	203
CONCENTRATIONS, DRY BASIS					
CO, %	76.85	74.06	25.16	0.062	.4431
CO2, %	14.33	14.52	14.17	14.27	15.07
O2, %	31	31	9.9	.73	.04
HC, PPM	1902	627	2011	126	60
NOX, PPM	514	323	313	328	219
AIR/FUEL RATIO	14.51	14.47	15.17	15.14	14.82
EMISSION RATES, G/HR					
CO	782.4	754.6	198.3	4.9	262.1
HC	97.3	32.1	79.6	4.9	89.0
NOX+	73.5	46.2	34.6	36.1	18.2
OIL TEMPERATURE, F	209	208	204	203	201
OIL PRESSURE, PSI	42	42	42	42	42
COOLANT TEMPERATURE, F	179	179	177	176	174
EXHAUST PRESSURE, IN. H2O	15.0	10.0	8.0	6.0	4.0
EXHAUST TEMPERATURE, F	1012	896	901	870	819

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7716							
TEST NUMBER								
DATA SOURCE CODE	1	19.01	19.02	20.01	20.02	21.01	21.02	21.00
TEST DATE	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78	1 / 16 / 78
BAROMETER, MMHG	746.9	746.9	746.9	746.9	746.9	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	38	38	38	38	38	43	43	43
TEMPERATURE, F	63	62	60	60	60	80	80	80
ENGINE SPEED, RPM	1300	1300	1300	1300	1300	1700	1700	1700
TORQUE, FT-LB	22.1	22.2	22.2	22.2	22.2	237.5	237.5	235.9
POWER, BHP*	5.4	5.4	5.4	5.4	5.4	75.7	75.7	75.2
FUEL RATE, LB/HR	7.0	7.0	7.0	7.0	7.0	39.9	39.9	39.8
IGNITION TIMING, DEG BTDC	42.0	42.0	42.0	42.0	42.0	21.5	21.5	21.5
MANIFOLD VACUUM, IN HG	18.5	18.7	18.7	18.7	18.7	7	7	7
THROTTLE ANGLE, DEG	5.3	5.3	5.3	5.3	5.3	82.7	82.7	82.7
INTAKE MAN. TEMP., F	186	172	151	151	151	92	92	92
CONCENTRATIONS, DRY BASIS								
CO, %	40.90	40.90	40.90	40.90	40.90	6.0350	6.0350	5.9500
CO2, %	14.05	14.83	13.97	14.70	10.96	11.08	11.08	11.08
O2, %	1.02	1.02	1.02	1.01	1.01	.09	.09	.09
HC, PP/MC	3382	3382	2756	2756	2733	2478	2478	2478
NOX, PPM	139	85	101	101	86	710	652	652
AIR/FUEL RATIO	14.97	14.98	15.02	15.02	15.14	12.17	12.18	12.18
EMISSION RATES, G/HR								
CO	173.6	3.5	145.1	145.1	2.0	12592.4	12592.4	12368.6
HC	72.1	3.1	47.8	47.8	3.2	286.4	286.4	258.7
NOX+	8.3	5.0	4.9	4.9	4.2	212.2	212.2	194.2
OIL TEMPERATURE, F	196	193	190	190	189	228	228	233
OIL PRESSURE, PSI	41	39	37	37	34	41	41	37
COOLANT TEMPERATURE, F	171	170	168	168	167	189	189	189
EXHAUST PRESSURE, IN. H2O	2.0	2.0	1.0	1.0	1.0	57.0	57.0	32.0
EXHAUST TEMPERATURE, F	709	750	654	654	655	1120	1120	965

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

301-CIO ENGINEERING PONITIC 8261

EIEI EODEE 77100

TEST NUMBER SOURCE CODE

TESTS

BAROMETER, MMHG

HUMIDITY, GRAINS, TEMPERATURE, ETC.

ENGINE SPEED, RPM

TORQUE, FT-LB

FUEL RATE: L8/HR

IGNITION TIMING.

THROTTLE ANGLE

LIMNAIC HAN. TEMP CONCENTRATIONS

CO₂ %

CO₂, %

PAPMC

AIR/FUEL RATIO

EMISSION RATES

80

NO_x⁺ HCl

TEMPERATURE

**INTERNAL
DIL. PRESSURE, PSI**

COOLANT TEMPERATURE EXHAUST PRESSURE

EXHAUST TEMPERATURE

* CORRECTED S

ENGINE #: 1978 PONTIAC 301-CID

FUEL CODE:	7718
TEST NUMBER	25.01
DATA SOURCE CODE	1
TEST DATE	1 / 16 / 78
BAROMETER, MMHG	746.9
HUMIDITY, GRAINS/LB	34
TEMPERATURE, F	77
ENGINE SPEED, RPM	1700
TORQUE, FT-LB	95.0
POWER, BHP*	30.3
FUEL RATE, LB/HR	16.0
IGNITION TIMING, DEG BTDC	43.0
MANIFOLD VACUUM, IN HG	10.7
THROTTLE ANGLE, DEG	15.2
INTAKE MAN. TEMP., F	21.9
CONCENTRATIONS, DRY BASIS	
CO, %	10.99
CO2, %	13.63
O2, %	1.70
HC, PPM	1909
NOX, PPM	843
AIR/FUEL RATIO	15.78
EMISSION RATES, G/HR	15.86
CO	113.8
HC	99.2
NOX+	120.5
OIL TEMPERATURE, F	220
OIL PRESSURE, PSI	34
COOLANT TEMPERATURE, F	179
EXHAUST PRESSURE, IN. H2O	16.0
EXHAUST TEMPERATURE, F	101.9

25

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

TEST NUMBER

DATA SOURCE CODE	28.01	28.02	29.01	29.02	30.01	30.02
TEST DATE	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78	1/16/78
BAROMETER, MMHG	746.9	746.9	746.9	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	34	34	43	43	34	34
TEMPERATURE, F	68	67	81	81	72	75
ENGINE SPEED, RPM	1700	1700	2000	2000	2000	2000
TORQUE, FT-LB	3.4	3.4	234.0	234.7	211.0	214.4
POWER, BHP*	1.1	1.1	87.8	88.1	79.2	80.5
FUEL RATE, LB/HR	7.2	7.2	47.0	46.5	40.6	40.4
IGNITION TIMING, DEG BTDC	47.0	47.0	24.0	24.0	25.0	25.0
MANIFOLD VACUUM, IN HG	20.3	20.3	1.0	1.0	2.3	2.4
THROTTLE ANGLE, DEG	6.1	6.1	82.7	82.7	39.4	39.4
INTAKE MAN. TEMP., F	165	163	94	96	151	134
CONCENTRATIONS, DRY BASIS						
CO, %	2367	.0083	6.0900	6.1400	4.1386	4.1922
CO2, %	13.53	14.00	10.92	10.97	12.43	12.49
O2, %	1.89	1.45	.06	.00	.17	.06
HC, PPM	3336	179	2428	2137	2367	1933
NOX, PPM	108	126	608	525	1138	923
AIR/FUEL RATIO	15.67	15.81	12.15	12.13	13.03	12.99

EMISSION RATES, G/HR

CO	109.4	3.9	14997.8	14877.1	9020.9	9052.3
HC	77.4	4.2	300.3	260.1	259.1	209.6
NOX+	6.9	8.1	214.5	182.3	342.6	275.3
DIL TEMPERATURE, F	202	201	242	245	231	236
OIL PRESSURE, PSI	35	35	35	35	36	36
COOLANT TEMPERATURE, F	176	176	192	192	186	187
EXHAUST PRESSURE, IN. H2O	3.0	1.0	77.0	49.0	63.0	41.0
EXHAUST TEMPERATURE, F	810	722	1174	1039	1198	1083

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	31.01	31.02	32.01	32.02	33.01	33.02
TEST NUMBER	1	2	1	2	1	1	2
DATA SOURCE CODE	1	1	1	1	1	1	1
TEST DATE	1/16/78	1/16/78	1/23/78	1/23/78	1/16/78	1/16/78	1/16/78
SAROMETER, MMHG	746.9	746.9	747.0	747.0	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	34	34	39	39	34	34	34
TEMPERATURE, F	77	77	90	90	73	72	72
ENGINE SPEED, RPM	2000	2000	2000	2000	2000	2000	2000
TORQUE, FT-LB	176.2	176.0	141.0	141.0	93.8	93.7	93.7
POWER, BHP*	66.1	66.1	52.8	52.8	35.2	35.2	35.2
FUEL RATE, LB/HR	32.1	32.2	25.3	25.3	18.9	18.9	18.9
IGNITION TIMING, DEG BTDC	25.0	25.0	34.0	34.0	47.0	47.0	47.0
MANIFOLD VACUUM, IN HG	3.7	3.7	6.8	6.8	10.7	10.8	10.8
THROTTLE ANGLE, DEG	30.8	30.1	22.8	22.8	17.2	17.2	17.2
INTAKE MAN. TEMP., F	168	201	200	182	225	224	224
CONCENTRATIONS, DRY BASIS							
CO, %	1.3988	1.5420	3177	1084	.0063		
CO2, %	13.80	13.99	13.82	13.50	13.62		
O2, %	.46	.06	.90	.55	1.97	1.69	
HC, PPM	2034	530	1297	64	1642	92	
NOX, PPM	1245	758	1582	1551	1203	1170	
AIR/FUEL RATIO	14.34	14.16	15.20	15.23	16.03	16.06	
EMISSION RATES, G/HR							
CO	2634.4	2875.1	509.2	6.9	134.1	7.9	
HC	192.4	49.7	104.4	5.1	102.0	5.8	
NOX+	323.8	195.2	357.2	348.9	205.5	202.5	
OIL TEMPERATURE, F	235	234	232	231	226	224	
OIL PRESSURE, PSI	36	36	37	37	39	39	
COOLANT TEMPERATURE, F	185	186	188	188	180	180	
EXHAUST PRESSURE, IN. H2O	51.0	32.0	33.0	20.0	21.0	13.0	
EXHAUST TEMPERATURE, F	1227	825	1132	1093	956	1066	

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	34.01	TEST DATE	1/23/78	SOURCE CODE	1	AIR/FUEL RATIO	15.32	EMISSION RATES, G/HR	CO	OIL TEMPERATURE, F	222	209
BAROMETER, MMHG	747.0	HUMIDITY, GRAINS/LB	39	TEMPERATURE, F	747.0	ENGINE SPEED, RPM	2000	CO2, %	13.73	CO	87.4	OIL PRESSURE, PSI	3.9	4.0
THROTTLE ANGLE, DEG	87	INTAKE MAN. TEMP., F	176	MANIFOLD VACUUM, IN HG	49.5	CONCENTRATIONS, DRY BASIS	2230	CO2, %	14.18	HC	87.4	COOLANT TEMPERATURE, F	183	4.6
INTAKE MAN. TEMP., F	176	THROTTLE ANGLE, DEG	13.0	THROTTLE ANGLE, DEG	14.3	CO, %	13.73	O2, %	1.14	HC	57.0	EXHAUST PRESSURE, IN. H2O	11.0	4.6
INTAKE MAN. TEMP., F	176	INTAKE MAN. TEMP., F	17.3	INTAKE MAN. TEMP., F	14.4	NOX, PPM	423	NOX, PPM	4.23	NOX+	58.4	EXHAUST TEMPERATURE, F	976	10.0
CO, %	22.1	CO, %	1.14	NOX, PPM	1817	AIR/FUEL RATIO	15.33	EMISSION RATES, G/HR	213.5	OIL TEMPERATURE, F	220	213	209	3.3
CO2, %	15.0	NOX, PPM	11.2	O2, %	1.12	AIR/FUEL RATIO	15.08	CO	4.8	OIL PRESSURE, PSI	3.9	4.0	4.2	4.6
O2, %	49.5	NOX, PPM	4.35	NOX, PPM	4.35	EMISSION RATES, G/HR	15.13	HC	5.4	COOLANT TEMPERATURE, F	18.3	18.4	18.2	17.4
NOX, PPM	13.0	AIR/FUEL RATIO	15.68	NOX+	1.91	OIL TEMPERATURE, F	249.2	NOX+	18.3	EXHAUST PRESSURE, IN. H2O	11.0	6.0	6.0	5.0
			15.73	OIL TEMPERATURE, F	216	OIL TEMPERATURE, F	1.9	OIL TEMPERATURE, F	19.3	EXHAUST TEMPERATURE, F	9.31	9.10	8.56	8.20
				OIL PRESSURE, PSI	40	OIL PRESSURE, PSI	148.0	OIL PRESSURE, PSI	4.2	COOLANT TEMPERATURE, F	183	18.4	18.2	4.2
				COOLANT TEMPERATURE, F	120	COOLANT TEMPERATURE, F	89.2	COOLANT TEMPERATURE, F	4.2	EXHAUST PRESSURE, IN. H2O	11.0	17.5	18.1	17.4
				EXHAUST PRESSURE, IN. H2O	201	EXHAUST PRESSURE, IN. H2O	9.4	EXHAUST PRESSURE, IN. H2O	9.4	EXHAUST TEMPERATURE, F	91.0	5.0	5.0	3.0
				EXHAUST TEMPERATURE, F	118	EXHAUST TEMPERATURE, F	10.0	EXHAUST TEMPERATURE, F	10.0	EXHAUST TEMPERATURE, F	91.0	9.11	9.11	8.20

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	37.01	37.02	38.01	38.02	39.01
TEST NUMBER	1	2	1	2	1	2
DATA SOURCE CODE	1	1	1	1	1	1
TEST DATE	1/16/78	1/16/78	1/17/78	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	746.9	746.9	751.9	751.9	751.9	751.9
HUMIDITY, GRAINS/LB	43	43	35	35	35	35
TEMPERATURE, F	78	81	64	67	68	69
ENGINE SPEED, RPM	2400	2400	2400	2400	2400	2400
TORQUE, FT-LB	225.6	227.1	203.1	204.9	171.0	171.8
POWER, BHP*	101.6	102.2	90.8	91.6	76.5	76.8
FUEL RATE, LB/HR	54.2	54.1	46.7	46.6	37.5	37.4
IGNITION TIMING, DEG BTDC	27.0	27.0	27.0	27.0	27.5	27.5
MANIFOLD VACUUM, IN HG	1.3	1.3	2.8	2.8	4.0	4.0
THROTTLE ANGLE, DEG	82.7	82.7	41.0	41.0	33.5	33.5
INTAKE MAN. TEMP., F	134	117	178	173	199	225
CONCENTRATIONS, DRY BASIS						
CO, %	6.1300	6.1300	4.5792	4.5150	1.3272	1.0663
CO2, %	10.92	11.00	11.91	11.98	13.33	13.86
O2, %	.06	.00	.17	.05	.68	.71
HC, PPM	2238	1919	1932	1596	1094	83
NOX, PPM	486	389	843	678	1305	500
AIR/FUEL RATIO	12.15	12.15	12.86	12.83	14.60	14.81
EMISSION RATES, G/HR						
CO	17372.3	17288.3	11573.2	11418.2	3040.5	2415.0
HC	318.5	271.8	245.2	202.8	125.9	9.4
NOX+	197.4	157.0	295.7	237.9	414.8	157.2
OIL TEMPERATURE, F	251	253	242	246	245	244
OIL PRESSURE, PSI	42	42	42	42	43	43
COOLANT TEMPERATURE, F	192	189	189	190	188	188
EXHAUST PRESSURE, IN. H2O	107.0	68.0	84.0	55.0	74.0	48.0
EXHAUST TEMPERATURE, F	1233	1101	1254	1133	1304	1274

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	40.01	40.02	41.01	41.02	42.01	42.02
TEST NUMBER	DATA SOURCE CODE	1	2	1	2	1	2
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/23/78	1/23/78
BAROMETER, MMHG	751.9	751.9	751.9	752.0	747.0	747.0	747.0
HUMIDITY, GRAINS/LB	35	35	35	35	35	39	39
TEMPERATURE, F	69	69	67	66	85	86	86
ENGINE SPEED, RPM	2400	2400	2400	2400	2400	2400	2400
TORQUE, FT-LB	136.0	134.7	94.3	91.8	57.5	57.5	57.5
POWER, BHP*	60.8	60.2	42.2	41.0	25.9	25.9	25.9
FUEL RATE, LB/HR	29.7	29.8	22.3	22.2	17.8	17.7	17.7
IGNITION TIMING, DEG BTDC	35.0	35.0	50.0	50.0	51.0	51.0	51.0
MANIFOLD VACUUM, IN HG	6.6	6.6	10.9	11.0	14.9	14.9	14.9
THROTTLE ANGLE, DEG	26.7	26.7	19.8	19.8	15.0	15.0	15.0
INTAKE MAN. TEMP., F	227	224	216	210	162	167	167
CONCENTRATIONS, DRY BASIS							
CO, %	15.08	0.0111	11.24	.0095	.2246	.0048	
CO2, %	13.00	13.24	12.62	12.85	13.62	14.09	
O2, %	2.04	1.90	2.73	2.47	1.23	.83	
HC, PPM	777	38	1308	77	1545	87	
NOX, PPM	1477	1434	1346	1292	616	677	
AIR/FUEL RATIO	16.22	16.26	16.74	16.73	15.43	15.40	
EMISSION RATES, G/HR							
CO	365.9	22.6	176.5	14.6	257.3	5.4	
HC	79.2	3.8	103.1	6.1	88.9	4.9	
NOX+	415.7	403.5	293.2	279.8	99.4	108.1	
OIL TEMPERATURE, F	239	237	230	229	221	222	
OIL PRESSURE, PSI	44	45	45	45	47	46	
COOLANT TEMPERATURE, F	186	186	183	183	186	186	
EXHAUST PRESSURE, IN. H2O	53.0	33.0	31.0	18.0	15.0	9.0	
EXHAUST TEMPERATURE, F	1226	1089	1100	974	1018	968	

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718							
TEST NUMBER		43.01	43.02	43.01	44.02	44.01	45.01	45.02
DATA SOURCE CODE	1	2	1	2	1	1	2	2
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/16/78	1/16/78	1/16/78	1/16/78
BAROMETER, MMHG	752.0	752.0	752.0	752.0	746.9	746.9	746.9	746.9
HUMIDITY, GRAINS/LB	35	35	35	35	43	43	43	43
TEMPERATURE, F	65	64	63	63	84	84	84	84
ENGINE SPEED, RPM	2400	2400	2400	2400	2800	2800	2800	2800
TORQUE, FT-LB	23.9	23.2	22.9	22.9	219.8	219.8	219.8	219.7
POWER, BHP*	10.7	10.4	10.3	10.3	115.4	115.4	115.4	115.4
FUEL RATE, LB/HR	13.5	13.5	10.8	10.9	63.0	63.0	63.0	63.1
IGNITION TIMING, DEG BTDC	51.0	51.0	51.5	51.5	29.0	29.0	29.0	29.0
MANIFOLD VACUUM, IN HG	17.3	17.3	19.4	19.4	1.7	1.7	1.7	1.7
THRUSTLE ANGLE, DEG	11.8	11.8	9.3	9.3	82.7	82.7	82.7	82.7
INTAKE MAN. TEMP., F	210	212	198	197	110	110	110	109
CONCENTRATIONS, DRY BASIS								
CO, %	24.66	0120	2970	0099	6.9000	6.5000	6.5000	6.5000
CO2, %	13.17	13.58	13.31	13.80	10.54	10.80	10.80	10.80
O2, %	1.69	1.33	1.44	1.03	.06	.00	.00	.00
HC, PPM	1533	91	1839	100	2299	1835	1835	1835
NOX, PPM	222	233	130	148	443	410	410	410
AIR/FUEL RATIO	15.76	15.77	15.50	15.53	11.87	12.02	12.02	12.02
EMISSION RATES, G/HR								
CO	222.0	10.7	210.3	7.0	22232.4	21178.7	21178.7	21178.7
HC	69.3	4.1	65.4	3.6	372.1	300.3	300.3	300.3
NOX+	27.8	28.9	12.8	14.6	204.7	191.2	191.2	191.2
OIL TEMPERATURE, F	221	220	216	216	260	261	261	261
OIL PRESSURE, PSI	47	46	47	47	46	47	47	47
COOLANT TEMPERATURE, F	182	181	179	179	192	189	189	189
EXHAUST PRESSURE, IN. H2O	10.0	5.0	6.0	6.0	143.0	95.0	95.0	95.0
EXHAUST TEMPERATURE, F	1012	879	955	955	824	1146	1146	1146

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	46.01	46.02	47.01	47.02	48.01	48.02
DATA SOURCE CODE	1	TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/23/78	1/23/78
BAROMETER, MMHG	752.0	HUMIDITY, GRAINS/LB	35	35	35	35	39	39
TEMPERATURE, F	81	TEMPERATURE, F	86	88	90	93	95	95
ENGINE SPEED, RPM	2800	ENGINE SPEED, RPM	2800	2800	2800	2800	2800	2800
TORQUE, FT-LB	198.3	TORQUE, FT-LB	198.3	198.3	198.3	198.3	198.3	198.3
POWER, BHP*	103.4	POWER, BHP*	103.4	103.4	103.4	103.4	103.4	103.4
FUEL RATE, LB/HR	53.9	FUEL RATE, LB/HR	54.0	54.0	42.1	42.0	33.9	34.0
IGNITION TIMING, DEG BTDC	30.5	IGNITION TIMING, DEG BTDC	30.5	30.5	32.0	32.0	44.0	44.0
MANIFOLD VACUUM, IN HG	3.1	MANIFOLD VACUUM, IN HG	3.1	3.1	4.4	4.4	7.9	7.8
THROTTLE ANGLE, DEG	44.4	INTAKE MAN. TEMP., F	188	180	189	200	176	180
CONCENTRATIONS, DRY BASIS		CO, %	4.5996	4.7059	7955	0299	1886	0058
		CO2, %	11.77	11.79	13.34	14.24	13.67	14.05
		O2, %	.14	.04	.98	.36	1.17	.89
		HC, PPM	1941	1521	799	30	915	50
		NOX, PPM	886	669	1579	1235	2340	2304
AIR/FUEL RATIO	12.82		12.75	15.09	15.09	15.53	15.51	
EMISSION RATES, G/HR		CO	13511.8	13776.6	2126.8	79.6	414.2	248
		HC	286.4	223.6	107.3	4.0	100.9	47
		NOX+	361.2	271.6	585.8	455.5	723.8	5.5
OIL TEMPERATURE, F	245		253	252	256	245	41.0	
OIL PRESSURE, PSI	47		46	47	47	47	189	
COOLANT TEMPERATURE, F	189		192	189	191	191	1192	
EXHAUST PRESSURE, IN. H2O	110.0		73.0	99.0	64.0	63.0	1243	
EXHAUST TEMPERATURE, F	1277		1175	1347	1346	1346		

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	49.01	49.02	50.01	50.02	51.01
TEST NUMBER	1	2	1	2	1	2
DATA SOURCE CODE	1	2	1	2	1	2
TEST DATE	1/17/78	1/17/78	1/23/78	1/23/78	1/23/78	1/23/78
BAROMETER, MMHG	752.0	752.0	747.0	747.0	747.0	747.0
HUMIDITY, GRAINS/LB	35	35	39	39	39	39
TEMPERATURE, F	84	82	88	87	87	83
ENGINE SPEED, RPM	2800	2800	2800	2800	2800	2800
TORQUE, FT-LB	88.2	88.1	55.0	55.0	22.0	22.0
POWER, BHP*	46.0	45.9	28.9	28.9	11.5	11.5
FUEL RATE, LB/HR	25.6	25.7	20.1	19.8	15.0	15.3
IGNITION TIMING, DEG BTDC	55.5	55.5	56.0	56.0	55.0	55.0
MANIFOLD VACUUM, IN HG	11.5	11.6	15.5	15.5	18.1	18.0
THROTTLE ANGLE, DEG	21.9	21.9	16.8	16.8	13.0	13.0
INTAKE MAN. TEMP., F	183	178	171	168	162	141
CONCENTRATIONS, DRY BASIS						
CO, %	12.39	0.1113	2353	0052	3103	0043
CO2, %	12.45	12.65	13.58	13.95	13.67	14.03
O2, %	2.67	2.53	1.32	1.05	1.18	.91
HC, PPM	991	63	1248	64	1521	91
NOX, PPM	1713	1649	1017	1031	296	300
AIR/FUEL RATIO	16.76	16.82	15.53	15.58	15.34	15.45
EMISSION RATES, G/HR						
CO	226.3	20.7	307.0	6.7	296.5	4.2
HC	90.9	5.8	81.8	4.1	73.0	4.5
NOX+	434.1	419.6	186.9	186.1	39.8	41.4
OIL TEMPERATURE, F	244	241	240	237	234	225
OIL PRESSURE, PSI	48	48	48	48	49	49
COOLANT TEMPERATURE, F	186	186	185	186	184	184
EXHAUST PRESSURE, IN. H2O	41.0	25.0	22.0	12.0	12.0	6.0
EXHAUST TEMPERATURE, F	1162	1031	1104	1039	1052	928

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

CORRECTED SAE J816B
CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

TEST NUMBER

DATA SOURCE CODE

TEST DATE

BAROMETER, MMHG

HUMIDITY, GRAINS/LB

TEMPERATURE, F

ENGINE SPEED, RPM

TORQUE, FT-LB

POWER, BHP*

FUEL RATE, LB/HR

IGNITION TIMING, DEG BTDC

MANIFOLD VACUUM, IN HG

THROTTLE ANGLE, DEG

INTAKE MAN. TEMP., F

CONCENTRATIONS, DRY BASIS

CO, %

CO2, %

O2, %

HC, PPMC

NOX, PPM

AIR/FUEL RATIO

EMISSION RATES, G/HR

CO

HC

NOX+

OIL TEMPERATURE, F

OIL PRESSURE, PSI

COOLANT TEMPERATURE, F

EXHAUST PRESSURE, IN. H2O

EXHAUST TEMPERATURE, F

58.01	58.02	59.01	59.02	60.01	60.02
1 / 17 / 78	1 / 17 / 78	1 / 17 / 78	1 / 17 / 78	1 / 17 / 78	1 / 17 / 78
750.8	750.8	750.8	750.8	750.8	750.8
37	37	37	37	37	37
80	81	80	80	80	80
3300	3300	3300	3300	3300	3300
51.2	51.2	51.2	51.2	51.2	51.2
31.5	31.5	31.5	31.5	31.5	31.5
23.7	23.6	23.6	23.6	23.6	23.6
58.0	58.0	58.0	58.0	58.0	58.0
15.4	15.4	15.2	15.2	15.2	15.2
19.4	19.4	19.4	19.4	19.4	19.4
173	173	176	176	176	176
2214	2103	2355	2355	2865	2865
13.05	13.32	13.26	13.65	13.37	13.74
2.04	1.78	1.69	1.49	1.54	1.28
1010	1010	853	62	1114	68
1292	1293	438	479	250	263
16.13	16.16	15.84	15.89	15.66	15.72

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	61.01	DATA SOURCE CODE	1	61.02	62.01	62.02	63.01	63.02
TEST DATE	1/16/78		1/16/78		1	1/16/78	1	1/16/78	1	1/16/78
BAROMETER, MMHG	746.9		746.9		2	750.8	2	750.8	2	750.8
HUMIDITY, GRAINS/LB	36		36		36	37	37	37	37	37
TEMPERATURE, F	7.9		7.8		8.5	9.1	9.0	9.3	9.0	9.3
ENGINE SPEED, RPM	3600		3600		3600	3600	3600	3600	3600	3600
TORQUE, FT-LB	188.4		186.1		169.0	168.2	141.0	142.7	141.0	142.7
POWER, BHP*	127.2		125.7		113.5	112.9	94.7	95.8	94.7	95.8
FUEL RATE, LB/HR	75.1		75.2		59.7	59.8	49.0	48.7	49.0	48.7
IGNITION TIMING, DEG BTDC	33.0		33.0		33.5	33.5	33.5	38.0	33.5	38.0
MANIFOLD VACUUM, IN HG	2.4		2.4		3.9	3.9	3.9	5.5	3.9	5.5
THROTTLE ANGLE, DEG	82.8		82.8		47.3	47.3	39.1	39.1	47.3	39.1
INTAKE MAN. TEMP., F	198		209		209	213	198	204	213	204
CONCENTRATIONS, DRY BASIS										
CO, %	7.1100		7.0200		2.3837	2.6155	3601	3601	3601	3601
CO2, %	10.41		10.50		13.04	13.05	13.31	13.71	13.31	13.71
O2, %	11		11		22	22	0.1	1.44	0.1	1.20
HC, PPM	2245		1778		1535	1535	458	458	458	22
NOX, PPM	421		287		1619	1619	1303	1993	1303	1993
AIR/FUEL RATIO			11.82		11.84	13.82	13.67	15.73	13.67	15.69
EMISSION RATES, G/HR										
CO	27166.6		26947.7		8248.9	8975.0	1162.7	38.2	1162.7	38.2
HC	430.8		342.7		266.8	112.7	74.3	3.6	74.3	3.6
NOX+	223.8		153.4		782.7	624.9	865.6	892.1	865.6	892.1
OIL TEMPERATURE, F	273		274		257	266	256	264	266	264
OIL PRESSURE, PSI	49		49		49	49	49	49	49	49
COLANT TEMPERATURE, F	191		191		190	191	191	191	191	191
EXHAUST PRESSURE, IN. H2O	192.0		132.0		155.0	105.0	135.0	89.0	105.0	135.0
EXHAUST TEMPERATURE, F	1336		1216		1382	1317	1385	1324	1317	1324

* CORRECTED SAE J8168
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

TEST NUMBER

64.01

DATA SOURCE CODE

1

TEST DATE

1/17/78

BAROMETER, MMHG

750.8

HUMIDITY, GRAINS/LB

37

TEMPERATURE, F

92

ENGINE SPEED, RPM

3600

TORQUE, FT-LB

111.2

POWER, BHP*

74.7

FUEL RATE, LB/HR

40.4

IGNITION TIMING, DEG BTDC

47.0

MANIFOLD VACUUM, IN HG

8.3

THROTTLE ANGLE, DEG

31.9

INTAKE MAN. TEMP., F

197

CONCENTRATIONS, DRY BASIS
CO, %
CO2, %
O2, %
HC, PPM
NOX, PPM12.25
12.75
2.44
482
2045

AIR/FUEL RATIO

16.63

EMISSION RATES, G/HR
CO
HC
NOX+346.0
68.3
806.7

OIL TEMPERATURE, F

260

OIL PRESSURE, PSI

49

COOLANT TEMPERATURE, F

189

EXHAUST PRESSURE, IN. H2O

102.0

EXHAUST TEMPERATURE, F

1309

64.02	66.02	66.01	66.01
1/17/78	1/17/78	1/17/78	1/17/78
750.8	750.8	750.8	750.8
37	37	37	37
90	90	88	87
3600	3600	3600	3600
110.6	74.2	74.0	46.7
74.2	49.8	49.7	46.7
40.4	31.2	31.2	31.3
47.0	58.0	58.0	59.0
8.3	12.3	12.4	15.1
31.9	31.9	24.7	20.6
194	190	186	181

64.02	65.02	65.01	65.01
1/17/78	1/17/78	1/17/78	1/17/78
750.8	750.8	750.8	750.8
37	37	37	37
90	90	88	86
3600	3600	3600	3600
111.2	74.2	74.0	46.7
74.7	49.8	49.7	46.7
40.4	31.2	31.2	31.3
47.0	58.0	58.0	59.0
8.3	12.3	12.4	15.1
31.9	31.9	24.7	20.6
194	190	186	181

64.02	65.02	65.01	65.01
1/17/78	1/17/78	1/17/78	1/17/78
750.8	750.8	750.8	750.8
37	37	37	37
90	90	88	87
3600	3600	3600	3600
110.6	74.2	74.0	46.7
74.2	49.8	49.7	46.7
40.4	31.2	31.2	31.3
47.0	58.0	58.0	59.0
8.3	12.3	12.4	15.1
31.9	31.9	24.7	20.6
194	190	186	181

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	67.01	67.02	68.01	68.02	69.01	69.02
TEST NUMBER	DATA SOURCE CODE	1	2	1	2	1	2
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
SAROMETER, MMHG	750.8	750.8	750.8	750.8	750.8	749.9	749.9
HUMIDITY, GRAINS/LB	37	37	37	37	37	37	37
TEMPERATURE, F	86	84	84	84	84	79	74
ENGINE SPEED, RPM	3600	3600	3600	3600	3600	650	650
TORQUE, FT-LB	18.7	18.7	18.7	18.7	18.7	1.6	1.7
POWER, BHP*	12.6	12.6	12.6	12.6	12.6	.2	.2
FUEL RATE, LB/HR	19.3	19.4	19.4	19.4	17.1	2.7	3.0
IGNITION TIMING, DEG BTDC	58.0	58.0	58.0	58.0	59.0	29.0	29.0
MANIFOLD VACUUM, IN HG	18.1	18.1	18.1	18.1	19.0	19.0	19.1
THROTTLE ANGLE, DEG	16.8	16.8	16.8	16.8	14.9	5	5
INTAKE MAN. TEMP., F	173	174	174	174	175	161	135
CONCENTRATIONS, DRY BASIS							
CO, %	2147	2147	2147	2147	2431	.0078	.0078
CO2, %	12.99	12.99	12.99	12.99	13.11	13.09	13.09
O2, %	2.28	2.28	2.28	2.28	2.15	4.27	2.39
HC, PPM	652	652	652	652	823	11033	129
NOX, PPM	525	525	525	525	509	322	58
AIR/FUEL RATIO	16.34	16.43	16.43	16.43	16.18	16.26	16.55
EMISSION RATES, G/HR							
CO	282.0	8.3	279.7	6.9	44.3	1.6	1.6
HC	43.0	1.4	47.5	2.4	105.4	1.3	1.3
NOX+	96.4	93.9	48.5	51.7	1.2	1.7	1.7
OIL TEMPERATURE, F	250	248	247	246	221	192	192
OIL PRESSURE, PSI	50	50	50	50	20	26	26
COOLANT TEMPERATURE, F	183	183	182	182	168	155	155
EXHAUST PRESSURE, IN. H2O	23.0	13.0	18.0	9.0	1.0	0	0
EXHAUST TEMPERATURE, F	1139	975	1111	965	570	737	737

* CORRECTED SAE J8168
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	70.01	70.02	71.01	71.02	72.01	72.02
TEST NUMBER	1	2	1	2	1	2	2
DATA SOURCE CODE	1	1	1	2	1	1	2
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
SAROMETER, MMHG	749.9	749.9	749.9	749.9	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	37	37	37	37	37	37	37
TEMPERATURE, F	71	71	70	69	64	63	63
ENGINE SPEED, RPM	650	650	650	650	550	550	550
TORQUE, FT-LB	9.5	9.5	16.1	16.1	33.5	33.6	33.6
POWER, BHP*	1.1	1.1	1.1	1.1	2.0	3.4	3.4
FUEL RATE, LB/HR	3.3	3.3	3.7	3.7	3.6	3.7	3.7
IGNITION TIMING, DEG BTDC	28.0	28.0	28.5	28.5	28.0	28.0	28.0
MANIFOLD VACUUM, IN HG	18.5	18.5	18.0	17.9	16.2	16.5	16.5
THROTTLE ANGLE, DEG	.9	.9	1.4	1.4	1.4	1.4	1.4
INTAKE MAN. TEMP., F	111	105	98	92	86	81	81
CONCENTRATIONS, DRY BASIS							
CO, %	1669	0065	1507	0085	1004	0881	12.50
CO2, %	12.13	13.00	12.19	12.84	12.50	12.88	12.88
O2, %	3.80	2.52	3.75	2.74	3.19	2.64	2.64
HC, PPM	7482	352	6136	843	4617	4309	4309
NOX, PPM	50	53	55	51	105	136	136
AIR/FUEL RATIO	16.74	16.67	16.87	16.79	16.64	16.23	16.23
EMISSION RATES, G/HR							
CO	37.6	1.5	38.4	2.2	25.0	21.7	21.7
HC	84.7	4.1	78.5	10.8	57.8	53.4	53.4
NOX+	1.6	1.7	2.0	1.8	3.6	4.7	4.7
OIL TEMPERATURE, F	172	167	163	162	160	158	158
OIL PRESSURE, PSI	30	31	33	33	28	29	29
COOLANT TEMPERATURE, F	151	151	151	151	151	153	152
EXHAUST PRESSURE, IN. H2O	1.0	0	1.0	0	1.0	0	0
EXHAUST TEMPERATURE, F	429	429	424	424	507	394	305

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	74.01	74.02	75.01	75.02	76.01	76.02
TEST NUMBER		1	2	1	2	1	2
DATA SOURCE CODE							
TEST DATE	1/23/78	1/23/78	1/23/78	1/23/78	1/23/78	1/23/78	1/23/78
BAROMETER, MMHG	746.0	746.0	749.5	749.5	749.5	749.5	749.5
HUMIDITY, GRAINS/LB	39	39	39	39	39	39	39
TEMPERATURE, F	90	88	83	84	84	83	83
ENGINE SPEED, RPM	1000	1000	1000	1000	1000	1000	1000
TORQUE, FT-LB	137.0	137.0	57.0	57.0	23.0	23.0	23.0
POWER, BHP*	25.7	25.7	10.6	10.6	4.3	4.3	4.3
FUEL RATE, LB/HR	13.8	14.0	7.1	7.1	5.2	5.2	5.2
IGNITION TIMING, DEG BTDC	12.0	12.0	39.0	39.0	39.0	39.0	39.0
MANIFOLD VACUUM, IN HG	4.4	4.4	15.4	15.4	19.3	19.3	19.3
THROTTLE ANGLE, DEG	15.9	15.9	5.7	5.7	3.3	3.3	3.3
INTAKE MAN. TEMP., F	174	164	146	148	133	129	129
CONCENTRATIONS, DRY BASIS							
CO, %	1.0928	9659	1019	10000	1290	0060	
CO2, %	13.79	13.98	13.75	14.16	13.22	13.63	
O2, %	.25	.05	1.49	.99	1.65	1.67	
HC, PPM	1627	997	3065	256	2549	2222	
NOX, PPM	305	223	302	279	178	163	
AIR/FUEL RATIO	14.34	14.33	15.49	15.48	15.81	15.99	
EMISSION RATES, G/HR							
CO	905.3	813.1	46.5	.0	44.4	2.1	
HC	67.7	42.2	70.2	5.8	44.0	3.8	
NOX+	35.6	26.5	19.4	17.7	8.6	7.9	
OIL TEMPERATURE, F	218	207	195	196	194	193	
OIL PRESSURE, PSI	32	34	37	37	38	38	
COOLANT TEMPERATURE, F	168	171	171	180	176	176	
EXHAUST PRESSURE, IN. H2O	11.0	6.0	2.0	1.0	1.0	0	
EXHAUST TEMPERATURE, F	959	924	699	700	625	625	

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718	TEST NUMBER	DATA SOURCE CODE	78.01	78.02	79.01	79.02	83.01
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	749.9	749.9	749.9	749.9	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	33	33	33	33	33	33	33
TEMPERATURE, F	83	86	87	87	75	78	78
ENGINE SPEED, RPM	1300	1300	1300	1300	1700	1700	1700
TORQUE, FT-LB	175.0	175.1	139.2	139.1	178.2	178.2	178.2
POWER, BHP*	42.4	42.5	33.8	33.7	56.5	56.5	56.5
FUEL RATE, LB/HR	23.6	23.7	17.3	17.4	28.1	28.1	28.1
IGNITION TIMING, DEG BTDC	18.0	18.0	25.0	25.0	23.0	23.0	23.0
MANIFOLD VACUUM, IN HG	3.5	3.4	6.3	6.2	3.9	3.9	3.9
THROTTLE ANGLE, DEG	23.0	23.0	17.3	17.3	26.4	26.4	26.4
INTAKE MAN. TEMP., F	138	148	158	172	146	163	163
CONCENTRATIONS, DRY BASIS							
CO, %	4.6847	4.7380	.8676	.7603	1.9126	2.0028	
CO2, %	11.96	12.00	14.15	14.31	13.61	13.54	
O2, %	.06	.00	.18	.00	.12	.00	
HC, PPM	2160	1698	1848	906	1493	1195	
NOX, PPM	169	192	503	378	872	670	
AIR/FUEL RATIO	12.73	12.72	14.39	14.40	13.95	13.86	
EMISSION RATES, G/HR							
C ₆	5929.5	5987.2	893.5	786.7	3096.9	3246.9	
HC	137.3	107.8	95.6	47.1	121.4	97.3	
NOX+	29.5	33.4	71.3	53.8	194.1	149.3	
OIL TEMPERATURE, F	200	207	209	209	209	217	
OIL PRESSURE, PSI	41	41	42	42	34	35	
COOLANT TEMPERATURE, F	183	183	182	182	184	185	
EXHAUST PRESSURE, IN. H2O	21.0	13.0	14.0	9.0	32.0	21.0	
EXHAUST TEMPERATURE, F	994	855	985	985	1111	982	

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	84.01	84.02	86.01	86.02	87.01	87.02
TEST NUMBER		1	2	1	2	1	2
DATA SOURCE CODE		1 / 17 / 78	1 / 17 / 78	1 / 23 / 78	1 / 23 / 78	1 / 23 / 78	1 / 23 / 78
TEST DATE		749.9	749.9	749.5	749.5	746.0	746.0
BAROMETER, MMHG		33	33	39	39	39	39
HUMIDITY, GRAINS/LB		80	80	85	85	81	81
TEMPERATURE, F		1700	1700	1700	1700	1700	1700
ENGINE SPEED, RPM		143.0	142.9	24.0	24.0	2.9	2.9
TORQUE, FT-LB		45.4	45.3	7.6	7.6	.9	.9
POWER, BHP*		21.9	21.9	9.1	9.1	7.4	7.3
FUEL RATE, LB/HR		32.0	32.0	46.0	46.0	46.0	46.0
IGNITION TIMING, DEG BTDC		6.9	7.1	18.5	18.5	20.3	20.3
MANIFOLD VACUUM, IN HG		20.2	20.2	7.2	7.2	6.2	6.2
THROTTLE ANGLE, DEG		17.6	18.2	17.9	17.7	9.9	10.1
INTAKE MAN. TEMP., F							
CONCENTRATIONS, DRY BASIS							
CO, %		324.9	306.4	2988	2988	2211	2048
CO2, %		14.15	14.75	13.72	13.72	12.72	13.40
O2, %		.61	.14	1.14	1.14	.72	1.67
HC, PPM		1652	73	2577	2577	145	3968
NOX, PPM		1242	1131	164	164	177	115
AIR/FUEL RATIO		14.95	14.93	15.20	15.30	16.40	16.00
EMISSION RATES, G/HR							
CO		438.5	8.5	172.3	172.3	110.5	2.3
HC		111.9	4.9	74.6	74.6	99.6	7.7
NOX+		230.6	208.6	13.3	13.3	8.1	9.2
OIL TEMPERATURE, F		218	218	210	210	182	186
OIL PRESSURE, PSI		35	35	36	35	40	39
COOLANT TEMPERATURE, F		182	183	182	182	157	162
EXHAUST PRESSURE, IN. H2O		24.0	15.0	4.0	4.0	3.0	1.0
EXHAUST TEMPERATURE, F		1071	998	853	842	721	672

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718							
TEST NUMBER								
DATA SOURCE CODE	89.01	89.02	90.01	90.02	91.01	91.02	91.02	91.02
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
SAROMETER, MMHG	749.9	749.9	749.9	749.9	749.9	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	36	36	36	36	36	36	36	36
TEMPERATURE, F	81	83	82	80	78	77	77	77
ENGINE SPEED, RPM	2000	2000	2000	2000	2000	2000	2000	2000
TORQUE, FT-LB	140.7	140.6	140.6	140.6	140.6	140.6	140.6	140.6
POWER, BHP*	52.7	52.7	52.7	52.7	52.7	52.7	52.7	52.7
FUEL RATE, LB/HR	25.2	25.2	25.1	25.1	25.1	25.1	25.1	25.1
IGNITION TIMING, DEG BTDC	34.0	34.0	34.0	34.0	34.0	34.0	34.0	34.0
MANIFOLD VACUUM, IN HG	7.1	7.2	7.2	7.2	7.2	7.2	7.2	7.2
THROTTLE ANGLE, DEG	22.3	22.3	22.3	22.3	22.3	22.3	22.3	22.3
INTAKE MAN. TEMP., F	185	188	180	176	176	176	176	176
CONCENTRATIONS, DRY BASIS								
CO, %	2789	20077	3218	0039	5126	3084	3084	3084
CO2, %	14.18	14.70	14.19	14.73	14.22	14.82	14.82	14.82
O2, %	.77	.37	.77	.34	.58	.00	.00	.00
HC, PPM	1569	91	1992	121	2244	303	303	303
NOX, PPM	1593	1536	421	429	173	51	51	51
AIR/FUEL RATIO		15.10	15.10	15.00	15.04	14.75	14.65	14.65
EMISSION RATES, G/HR								
CO	433.8	11.8	291.3	3.6	337.9	261.6	261.6	261.6
HC	122.5	7.1	90.5	5.5	74.3	9.9	9.9	9.9
NOx+	345.2	330.0	53.1	54.2	15.9	4.6	4.6	4.6
OIL TEMPERATURE, F	228	227	222	216	212	210	210	210
OIL PRESSURE, PSI	37	38	38	39	41	42	42	42
COOLANT TEMPERATURE, F	185	185	180	180	177	177	177	177
EXHAUST PRESSURE, IN. H2O	33.0	20.0	12.0	6.0	3.0	3.0	3.0	3.0
EXHAUST TEMPERATURE, F	1141	1055	997	905	898	812	812	812

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

TEST NUMBER	96.01	96.02	97.01	97.02	98.01
DATA SOURCE CODE	1	2	1	2	1
TEST DATE	1/23/78	1/23/78	1/23/78	1/23/78	1/23/78
BAROMETER, MMHG	747.0	747.0	746.0	746.0	746.0
HUMIDITY, GRAINS/LB	39	39	39	39	39
TEMPERATURE, F	86	86	81	83	93
ENGINE SPEED, RPM	2400	2400	2400	2800	2800
TORQUE, FT-LB	22.9	22.9	3.7	3.6	165.1
POWER, BHP*	10.3	10.3	1.7	1.6	86.7
FUEL RATE, LB/HR	13.2	13.2	11.5	11.1	42.8
IGNITION TIMING, DEG BTDC	51.0	51.0	51.0	51.0	33.0
MANIFOLD VACUUM, IN HG	17.8	17.7	19.5	19.4	4.7
THROTTLE ANGLE, DEG	11.2	11.2	9.3	9.3	35.4
INTAKE MAN. TEMP., F	159	159	122	132	174
CONCENTRATIONS, DRY BASIS					
CO, %	3533	0036	3001	0043	9402
CO2, %	13.77	14.31	13.39	13.97	13.75
O2, %	1.00	.59	1.49	.91	.47
HC, PPM	1529	91	1740	134	1051
NOX, PPM	217	227	116	138	1742
AIR/FUEL RATIO	15.19	15.21	15.54	15.44	14.65
EMISSION RATES, G/HR					
CO	295.5	3.0	223.9	3.1	2456.3
HC	64.2	3.8	65.2	4.8	137.9
NOX+	25.6	26.7	12.2	14.0	641.2
OIL TEMPERATURE, F	225	223	205	211	246
OIL PRESSURE, PSI	47	47	49	48	47
COOLANT TEMPERATURE, F	185	184	174	176	191
EXHAUST PRESSURE, IN. H2O	9.0	4.0	6.0	3.0	92.0
EXHAUST TEMPERATURE, F	991	931	933	841	1327

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	99.01	99.02	100.01	100.02	101.01	101.02
TEST NUMBER	DATA SOURCE CODE	1	2	1	2	1	2
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	749.9	749.9	749.9	749.9	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	36	36	36	36	36	36	36
TEMPERATURE, F	86	86	83	80	80	79	79
ENGINE SPEED, RPM	2800	2800	2800	2800	2800	2800	2800
TORQUE, FT-LB	132.5	132.5	55.4	55.4	22.0	21.7	21.7
POWER, BHP*	69.5	69.4	29.0	29.0	11.5	11.4	11.4
FUEL RATE, LB/HR	34.1	34.0	20.1	20.1	15.1	15.2	15.2
IGNITION TIMING, DEG BTDC	42.0	42.0	56.0	56.0	56.0	56.0	56.0
MANIFOLD VACUUM, IN HG	8.0	8.0	15.7	15.7	18.4	18.4	18.4
THROTTLE ANGLE, DEG	27.3	27.3	16.2	16.2	12.8	12.8	12.8
INTAKE MAN. TEMP., F	188	185	173	169	161	161	163
CONCENTRATIONS, DRY BASIS							
CO, %	22.65	.0052	.2926	.0041	.5015	.0053	.0053
CO2, %	13.90	14.20	14.05	14.52	14.16	14.89	14.89
O2, %	1.44	1.25	1.19	.84	.90	.33	.33
HC, PPM	1090	48	1532	77	1748	75	75
NOX, PPM	2242	2244	979	1008	252	230	230
AIR/FUEL RATIO	15.66	15.75	15.36	15.40	15.02	15.03	15.03
EMISSION RATES, G/HR							
CO	490.3	11.2	366.6	5.1	462.0	4.8	4.8
HC	118.5	5.2	96.4	4.9	80.9	3.5	3.5
NOX+	675.9	170.9	175.9	175.9	32.3	29.5	29.5
OIL TEMPERATURE, F	246	246	236	234	229	227	227
OIL PRESSURE, PSI	47	47	48	49	49	49	49
COOLANT TEMPERATURE, F	186	187	187	183	180	180	180
EXHAUST PRESSURE, IN. H2O	66.0	42.0	22.0	13.0	12.0	7.0	7.0
EXHAUST TEMPERATURE, F	1258	1164	1164	1101	998	1035	941

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7718

7718

TEST NUMBER	102.01	102.02	103.01	103.02	104.01
DATA SOURCE CODE	1	2	1	2	1
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	749.9	749.9	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	36	36	36	36	36
TEMPERATURE, F	79	79	76	81	86
ENGINE SPEED, RPM	2800	2800	3300	3300	3300
TORQUE, FT-LB	5.1	5.5	152.8	121.0	121.0
POWER, BHP*	2.7	2.9	94.4	74.8	74.7
FUEL RATE, LB/HR	12.7	12.7	47.8	47.3	38.4
IGNITION TIMING, DEG BTDC	56.0	56.0	36.0	36.0	45.0
MANIFOLD VACUUM, IN HG	19.8	19.8	5.2	5.2	7.9
THROTTLE ANGLE, DEG	10.6	10.6	38.3	38.3	30.6
INTAKE MAN. TEMP., F	155	153	133	164	196
CONCENTRATIONS, DRY BASIS					
CO, %	.5900	.0089	.0073	.1355	.0070
CO2, %	14.12	14.95	13.59	13.21	13.36
O2, %	.84	.20	1.54	1.04	2.43
HC, PPM	1806	88	773	63	632
NOX, PPM	147	101	1736	1800	2125
AIR/FUEL RATIO	14.93	14.94	15.60	15.58	16.57
EMISSION RATES, G/HR					
CO	455.1	6.8	1632.3	21.6	350.9
HC	70.0	3.4	118.0	9.5	82.2
NOX+	15.8	10.7	734.4	747.5	766.3
OIL TEMPERATURE, F	225	217	234	247	250
OIL PRESSURE, PSI	49	51	50	49	49
COOLANT TEMPERATURE, F	179	180	184	188	188
EXHAUST PRESSURE, IN. H2O	9.0	5.0	120.0	81.0	93.0
EXHAUST TEMPERATURE, F	997	906	1333	1282	1301

* CORRECTED SAE J8168
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	105.01	105.02	106.01	106.02	107.01	107.02
DATA SOURCE CODE	1	TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	749.9	HUMIDITY, GRAINS/LB	36	36	36	36	36	36
TEMPERATURE, F	86	ENGINE SPEED, RPM	3300	3300	3300	3300	3300	3300
TORQUE, FT-LB	51.2	POWER, BHP*	31.6	31.6	31.6	31.6	31.6	31.6
FUEL RATE, LB/HR	23.3	FUEL RATE, DEG BTDC	23.4	23.4	18.1	18.0	15.3	15.4
IGNITION TIMING, DEG BTDC	58.0	MANIFOLD VACUUM, IN HG	58.0	58.0	58.0	58.0	58.0	58.0
THROTTLE ANGLE, DEG	15.1	INTAKE MAN. TEMP., F	15.2	15.2	18.0	17.8	19.2	19.3
INTAKE MAN. TEMP., F	19.3	CONCENTRATIONS, DRY BASIS	19.3	19.3	15.9	15.9	13.4	13.4
CO, %	2.260	CO, %	0.0065	0.0065	0.0072	0.0062	0.0062	0.0062
CO2, %	13.19	CO2, %	13.43	13.38	13.68	13.43	13.77	13.77
O2, %	2.47	O2, %	2.29	2.27	2.07	2.17	1.88	1.88
HC, PPM	916	HC, PPM	64	743	51	1064	76	76
NOX, PPM	1140	NOX, PPM	1169	431	467	237	250	250
AIR/FUEL RATIO	16.43	AIR/FUEL RATIO	16.51	16.27	16.31	16.13	16.15	16.15
EMISSION RATES, G/HR		CO	352.3	10.3	268.3	8.5	262.1	6.2
		HC	71.8	5.0	44.7	3.1	53.5	3.9
		NOX+	247.7	256.1	71.9	77.3	33.1	35.0
OIL TEMPERATURE, F	248	OIL PRESSURE, PSI	245	243	240	238	237	237
COOLANT TEMPERATURE, F	49	COOLANT TEMPERATURE, F	49	49	49	49	49	49
EXHAUST PRESSURE, IN. H2O	184	EXHAUST PRESSURE, IN. H2O	183	182	182	181	181	181
EXHAUST TEMPERATURE, F	35.0	EXHAUST TEMPERATURE, F	20.0	20.0	20.0	12.0	14.0	8.0
	1174		1064	1064	1119	992	1081	950

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	110.02	110.01
TEST NUMBER	108.01	108.02	109.01
DATA SOURCE CODE	1	2	1
TEST DATE	1/17/78	1/17/78	1/17/78
BAROMETER, MMHG	749.9	749.9	749.9
HUMIDITY, GRAINS/LB	36	36	36
TEMPERATURE, F	84	87	90
ENGINE SPEED, RPM	3600	3600	3600
TORQUE, FT-LB	140.8	141.0	112.8
POWER, BHP*	94.9	95.1	76.0
FUEL RATE, LB/HR	49.1	49.2	40.5
IGNITION TIMING, DEG BTDC	38.0	38.0	47.0
MANIFOLD VACUUM, IN HG	5.6	5.5	8.1
THROTTLE ANGLE, DEG	39.1	39.1	32.0
INTAKE MAN. TEMP., F	203	204	200
CONCENTRATIONS, DRY BASIS			
CO, %	3700	0055	1314
CO2, %	13.70	14.10	13.15
O2, %	1.61	1.32	2.57
HC, PPM	498	32	443
NOX, PPM	2102	2092	2169
AIR/FUEL RATIO	15.78	15.80	16.67
EMISSION RATES, G/HR			
CO	1163.2	17.4	360.9
HC	78.7	5.0	61.1
NOX+	920.6	917.5	830.2
OIL TEMPERATURE, F	253	259	261
OIL PRESSURE, PSI	49	49	49
COOLANT TEMPERATURE, F	189	190	188
EXHAUST PRESSURE, IN. H2O	133.0	90.0	106.0
EXHAUST TEMPERATURE, F	1375	1307	1327

* CORRECTED SAE J8168
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718	TEST NUMBER	111.01	111.02	112.01	112.02	151.01	152.01
DATA SOURCE CODE	1	1	2	1	2	1	1	1
TEST DATE	1/17/78	1/17/78	1/17/78	1/17/78	2/2/78	2/2/78	2/2/78	2/2/78
BAROMETER, MMHG	749.9	749.9	749.9	749.9	748.2	748.2	748.2	748.2
HUMIDITY, GRAINS/LB	36	36	36	36	33	33	33	33
TEMPERATURE, F	86	85	84	83	86	86	86	86
ENGINE SPEED, RPM	3600	3600	3600	3600	1000	1000	1500	1500
TORQUE, FT-LB	19.0	19.0	19.0	19.0	-31.4	-31.4	-43.8	-43.8
POWER, BHP*	12.8	12.8	12.8	12.8	3.7	3.7	5.9	12.3
FUEL RATE, LB/HR	19.4	19.5	19.5	19.5	17.1	17.1	3.1	2.9
IGNITION TIMING, DEG BTDC	59.0	59.0	59.0	59.0	30.0	30.0	36.0	36.0
MANIFOLD VACUUM, IN HG	18.0	18.0	18.0	18.0	22.4	22.4	24.0	24.0
THROTTLE ANGLE, DEG	16.9	16.9	16.9	16.9	14.9	14.9	0	0
INTAKE MAN. TEMP., F	176	176	176	176	174	174	152	128
CONCENTRATIONS, DRY BASIS								
CO, %	2310	2056	2395	0059	8192	4316		
CO2, %	13.26	13.49	13.32	13.64	9.82	5.73		
O2, %	2.41	2.27	2.32	2.10	5.86	12.22		
HC, PPM	594	36	962	46	11315	10862		
NOX, PPM	484	510	294	322	14	14		
AIR/FUEL RATIO	16.40	16.48	16.27	16.32	17.81	28.74		
EMISSION RATES, G/HR								
CO	298.7	7.3	272.5	6.6	197.7	154.1		
HC	38.5	2.4	55.0	2.6	137.2	194.8		
NOX+	87.2	92.4	46.6	50.8	.5	.7		
OIL TEMPERATURE, F	249	248	246	245	194	180		
OIL PRESSURE, PSI	50	50	50	50	39	36		
COOLANT TEMPERATURE, F	182	182	182	182	164	157		
EXHAUST PRESSURE, IN. H2O	23.0	14.0	18.0	10.0	1.0	1.0		
EXHAUST TEMPERATURE, F	1150	1018	1117	981	471	356		

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE:	7718								
TEST NUMBER		153.01	154.01	155.01	156.01	157.01	158.01		
DATA SOURCE CODE	1	1	1	1	1	1	1		
TEST DATE	2/ 2/78	2/ 2/78	2/ 2/78	2/ 2/78	2/ 2/78	2/ 2/78	2/ 2/78		
BAROMETER, MMHG	748.2	748.2	748.2	748.2	748.2	748.2	748.2		
HUMIDITY, GRAINS/LB	33	33	33	33	33	33	33		
TEMPERATURE, F	83	86	84	83	73	73	72		
ENGINE SPEED, RPM	2000	1000	1500	2000	1000	1500	1500		
TORQUE, FT-LB	-51.2	-45.8	-51.0	-52.8	-32.0	-38.2			
POWER, BHP*	19.1	8.6	14.3	19.7	6.0	10.7			
FUEL RATE, LB/HR	3.1	40.0	22.0	23.8	24.5	.3	.7		
IGNITION TIMING, DEG BTDC									
MANIFOLD VACUUM, IN HG	24.6								
THROTTLE ANGLE, DEG									
INTAKE MAN. TEMP., F	119	141	135	131	112	106			
CONCENTRATIONS, DRY BASIS									
CO, %	.5000								
CO2, %	5.19								
O2, %	12.91								
HC, PPM	10810								
NOX, PPM	15								
AIR/FUEL RATIO		30.68							
EMISSION RATES, G/HR									
CO	206.0								
HC	223.7								
NOX+	.8								
OIL TEMPERATURE, F	186	196	196	202	198	180			
OIL PRESSURE, PSI	45	38	39	43	35	33			
COOLANT TEMPERATURE, F	160	178	182	186	186	186			
EXHAUST PRESSURE, IN. H2O	1.0	.0	.0	0	8.0	18.0			
EXHAUST TEMPERATURE, F	356	384	305	283	169	155			

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

ENGINE: 1978 PONTIAC 301-CID

FUEL CODE: 7712
TEST NUMBER
DATA SOURCE CODE
TEST DATE
BAROMETER, MMHG
HUMIDITY, GRAINS/LB
TEMPERATURE, F
ENGINE SPEED, RPM
TORQUE, FT-LB
POWER, BHP*

FUEL RATE, LB/H2
IGNITION TIMING, DEG BTDC
MANIFOLD VACUUM, IN HG
THROTTLE ANGLE, DEG
INTAKE MAN. TEMP., F
CONCENTRATIONS, DRY BASIS

CO, %
CO2, %
O2, %
HC, PPM
NOX, PPM

AIR/FUEL RATIO

EMISSION RATES, G/HR
CO
HC
NOX+

OIL TEMPERATURE, F
OIL PRESSURE, PSI
COOLANT TEMPERATURE, F
EXHAUST PRESSURE, IN. H2O
EXHAUST TEMPERATURE, F

* CORRECTED SAE J816B
+ CORRECTED FOR HUMIDITY

159.01
1
2/ 2/78
748.2
33
72
2000
-44.8
16.8

1.2

100

%

%

PPMC
PPM

186
41
186
30.0
157

HE18-5-A34
no.DOT-TSC-
NHTSA-79-2

U.S.
H
Re

BORROWER

Form DOT F 1720.2 (8-70)
FORMERLY FORM DOT F 1700.11

U.S. DEPARTMENT OF TRANSPORTATION
RESEARCH AND SPECIAL PROGRAMS ADMINISTRATION

TRANSPORTATION SYSTEMS CENTER
KENDALL SQUARE, CAMBRIDGE, MA. 02142

00347499

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF TRANSPORTATION
613

