# EVALUATION OF OPEN-GRADED FRICTION COURSE MIXTURE

# LOUISIANA TRANSPORTATION RESEARCH CENTER Technical Assistance Report Number 04-1TA

State Project No. 009-02-0018 US 71 Friction Course (CM) Route US 71 Grant Parish

By

Samuel B. Cooper, Jr., P.E. Senior Asphalt Research Engineer

Chris Abadie, P.E. Materials Research Administrator

Louay N. Mohammad, Ph.D. Associate Professor Manager, EMCRF

Louisiana Transportation Research Center 4101 Gourrier Ave. Baton Rouge, LA 70808

The contents of this report reflect the views of the author/principal investigator who is responsible for the facts and accuracy of the data presented herein. The contents of this report do not necessarily reflect the views or policies of the Louisiana Department of Transportation and Development or the Louisiana Transportation Research Center. This report does not constitute a standard, specification, or regulation.

October 2004

Table of Co
-------------

Introduction
Project Description
Materials
Asphalt Cement
Aggregates
Fibers
Antistrip4
Tack Coat
Open-graded Friction Course Mixture Design
Profilograph
Cost
Comments
Recommendations
References
Appendix A: Hotmix Plant and Roadway Pictures
Appendix B: Contract Specifications
Appendix C: Job Mix Formula
Appendix D: Film Thickness Calculation
Appendix E: LADOTD & Contractor's Project Personnel Comments

# List of Figures

Figure 1 - Project Location	. 3
Figure 2 - Mixture Design 1, Rut Measurements (mm) vs Number of Passes	. 9
Figure 3 - Mixture Design 2, Rut Measurements (mm) vs Number of Passes	. 9

# List of Tables

Table 1 - Composition of Mix Design Blends	6
Table 2 - Composite Blends and Mixture Properties	7
Table 3 - Rut Measurements (mm)	8
Table 4 - CoreLok Vs. AASHTO T166 Air Voids       1	0
Table 5 - Coefficient of Permeability (Feet/Day)    1	0

### Introduction

Open-graded friction course (OGFC) is a porous, gap-graded, predominantly single size aggregate bituminous mixture that contains a high percentage of air voids. The high air void content and the open structure of this mix promote the effective drainage of rainwater, which also minimizes hydroplaning during wet weather. This characteristic also reduces splash and spray behind vehicles and improves wet weather skid resistance. Other purported benefits of this type mix are lower pavement noise and reduced roadway glare during wet weather, which improves the night visibility of pavement markings.

OGFCs have been used throughout the United States since 1950 [1, 2]. Some state departments of transportation have reported good performance, but many others have reported poor performance [1, 2]. Louisiana first developed an OGFC in the late 1960s and early 1970s to provide a skid resistant surface [3, 4]. The open texture of the friction course reduced water spray and increased critical hydroplaning speeds. Louisiana's OGFC was developed prior to the initiation of the Federal Highway Safety Program Management Guide, Highway Safety Program 12, and Instructional Memorandum 211-3-73 of 1973 dealing with the establishment of a Skid Accident Reduction Program. Louisiana had already placed several OGFCs prior to the Instruction Memorandum. After receiving the Instructional Memorandum, the Louisiana Department of Transportation and Development (LADOTD) issued an Engineering Directive to use Plant Mix Seal (PMS) (used interchangeably with OGFC and asphaltic concrete friction course (ACFC)) on all roads with an ADT greater than 4,000. In 1980, the ADT limit was revised to require the friction course on all roads with an ADT greater than 3,000.

In late 1980, problems with the OGFCs were encountered. Many of these surfacings had reached their end-of-life, having lasted much longer than the original life expectancy of five years, typically 10 - 12 years. The end-of-life was signaled by severe raveling in the wheel paths due to oxidized asphalt binders and subsequent decrease in serviceability. This, in conjunction with numerous OGFC failures during the construction phase or shortly thereafter, led to a moratorium on its use.

Inspection of the failed construction projects and project records indicated that the problems encountered with the OGFC were related to moisture and temperature. The temperature problems were related to both mix and weather; the moisture problems were generally associated with a particular aggregate type. To address these issues, changes were made to the specifications, including a maximum moisture content for the aggregate, institution of a

construction season from May to September, and an increased minimum ambient air temperature. Based on these changes, the moratorium was lifted.

It should also be noted the design asphalt content of OGFCs was significantly decreased in 1979. This decrease in asphalt content along with the use of asphalt cements composed of base asphalt that oxidized rapidly contributed to all of these construction problems although it was not recognized at the time. Typical deterioration consisted of raveling in the wheel path.

In the next 1 ½ years, 12 OGFCs were placed without incidence. However, because the winters of 1982 and 1983 were extremely severe, the previously placed friction courses were reaching their end-of-life at approximately 8 to 11 years of age. Additionally, because of several oil boycotts and increases in the cost of crude, asphalt cement contents were reduced. In the beginning of 1984, with hundreds of miles of OGFC at end-of-life and raveling, a public and political uproar forced the imposition of a second moratorium which is still in effect today.

In 1984, a final experimental polymer modifying OGFC was placed on LA 48, Poydras-Reggio ten mile construction project. Two experimental sections (4 lane miles each) were constructed using a latex modified asphalt (similar to the current PG 70-22m) and an elastomeric polymer modified asphalt (similar to the current PG 76-22m). These sections were placed with an asphalt content 0.7 percent higher (similar to the 1960/70 binder levels) than the control sections with AC-30 which used the 1979 binder content. It was polymer modified asphalt along with fibers that permit additional asphalt creating greater film thickness and reduced draindown. Within one year the control sections raveled in the crossovers and turn lanes; within two years the control sections had raveled in the inside and outside wheel paths. The polymer modified section was still performing without raveling when the entire project was rehabilitated circa 1999-2001. This 15-17 year lifespan is consistant with design models used today.

This paper documents Louisiana's first use of this type mix since the suspension of OGFC mixes in 1984.

# **Project Description**

Figure 1 illustrates the project location, which is on US 71 in Grant Parish and begins 4.041 miles (Log Mile 4.041) north of the beginning of the control section (Rapides Parish line, SE of Rock Hill) and commences northward for 0.157 miles to its project ending limits (Log

Mile 4.198). This highway is 24 feet wide (2 12-foot travel lanes) with 2 10-foot improved hot mix shoulders. The contract was bid under State Project No. 009-02-0018 and was awarded to the low bidder, Diamond B. Construction Co., LLC. The work order date for this project was June 7, 2003, and the final inspection date was June 26, 2003. The OGFC was placed on June 15, 2003 and was completed in one day. The OGFC was placed at approximately three-fourths of an inch compacted thickness, and the area covered was minimal at 2181.30 square yards. Approximately 94.0 tons of OGFC was placed during construction. This project site was selected because District 08 wanted to improve the existing surface characteristics at this location, and the placement of the OGFC was applicable in this area.



Figure 1 Project Location

## Materials

### Asphalt Cement

An elastomeric type of polymer modified asphalt cement was specified for this project, meeting the LADOTD specification for PG76-22m. The PG76-22m asphalt cement was listed on QPL #41 and was supplied by Marlin Asphalt, LTD. The polymer modified asphalt

cement content was 6.6 percent as designed by the contractor, Diamond B. Construction Co., LLC.

### Aggregates

The final aggregate blend, Design 2, was composed of 67.2 percent - #78 sandstone, Friction Rating I; 7.4 percent - #11 sandstone, Friction Rating I; and 18.7 percent - #89 siliceous limestone, Friction Rating III (see tables 1 and 2). The sandstone was supplied by Pine Bluff Sand & Gravel Co. (Source Code AB13). The limestone was supplied by Vulcan Material Company (Source Code AA50). The aggregates used complied with the requirements set forth in Subsection 1003.06(b) of the Standard Specifications.

### Fibers

A mineral fiber in pellet form was added to the mix at a mix percentage of 0.1 by weight to protect against drain down. The fiber was supplied by Interfibe. The contract specifications required that drain down testing be conducted in accordance with Section 508 of the 2000 Edition of the Louisiana Standard Specifications [5] on the loose mix at a temperature 60°F (15°C) higher than normal mixing temperatures. A maximum drain down of 0.3 percent is required. The approved Job Mix Formula (JMF) indicated that the maximum drain down for the OGFC mixture tested was 0.08 percent using the minimum dosage of fiber specified.

## Antistrip

The contractor was required to perform the Boil Test and modified Lottman test to evaluate the mixture's susceptibility to moisture damage. An Ad-Here LA 2 from Arr-Maz Products, Inc. was added at mix percentage of 0.6 by weight. The Lottman test was modified to require five freeze thaw cycles.

## Tack Coat

The contractor elected to use the unmodified SS-1 emulsion for tack coat as allowed by Section 504 of the Standard Specifications [5]. The SS-1 emulsion was listed on QPL #41 and supplied by Asphalt Products Unlimited. The tack coat rate to be applied was 0.07 gallons/square yards, as required by the Special Provisions of the contract. The tack coat rate was not measured; however, the tack coat coverage was uniform and covered 100 percent of the existing dense graded asphalt surface, which was approximately 3 years old.

## **Open-graded Friction Course Mixture Design**

The mix design procedures for this project were detailed in the Special Provisions of the contract. The specified OGFC design requirements followed the recommendations as outlined in the 2000 Edition of the Journal of the Association of Asphalt Paving Technologists (AAPT) [6]. The contractor was required to use approved PG76-22m asphalt cement complying with Section 1002 in the Standard Specifications and listed in QPL #41 [5]. It was further specified that the aggregates, coarse and fine, should be 100 percent crushed stone with a Friction Rating of I, thus complying with the requirements set forth in Subsection 1003.06(b) of the Standard Specifications [5]. A Cellulose fiber or mineral filler may also be used to ensure protection against drain down. Also, an anti-strip additive was required to prevent stripping. The OGFC Special Provisions of the contract and the approved JMF are in Appendix B and Appendix C, respectively.

During the mix design process, the contractor evaluated two designs. See tables 1 and 2. The first mixture design, Design 1, incorporated a blend of two sandstone gradations that subsequently failed during the Hamburg rut testing performed by LTRC. The samples obtained from the Design 1 mix disintegrated or fell apart during testing in the Hamburg. In the second mixture design, Design 2, the contractor was allowed to blend less than 25 percent of a #89 siliceous limestone meeting a Friction Rating III. The incorporation of the #89 stone was necessary to introduce some intermediate fine material into the design blend to ensure the stability of the mix during Hamburg rut testing. This particular aggregate was allowed because its availability facilitated the timely completion of the project. It should be noted that Design 2, which Diamond B. Construction Company selected as the JMF and submitted to LADOTD, was subsequently used to construct the OGFC layer.

The Design 1 and Design 2 mixtures were tested for rutting characteristics at LTRC utilizing the Precision Machine and Welding version of the Hamburg Type Wheel Tester. The designs were also tested for drainage characteristics using the Karol-Warner falling head permeability device. The Instrotek CoreLok device was also utilized for Bulk Specific Gravity of mix,  $G_{mb}$ , measurements for the compacted specimens.

Table 1 indicates the aggregates and additives used for each trial design of the OGFC mixture. The PG76-22m, fiber, and anti-strip rate remained constant in both mix designs. The only variations between both mix designs were the incorporation of the #89 siliceous limestone and the actual percentages of aggregate blended to achieve a composite blend.

	Perce	entage	
Material	Design 1	Design 2	Source
#78			
Sandstone,			
FR I	84.0	67.2	Pine Bluff Sand & Gravel
#11			
Sandstone,			
FR I	9.3	7.4	Pine Bluff Sand & Gravel
#89			
Limestone,			
FR III		18.7	Vulcan Materials
PG76-22m	6.6	6.6	Marlin Asphalt
Fibers	0.1	0.1	Interfibe
Ad-Here LA	0.6 by Wt. of	0.6 by Wt. of	
2	AC	AC	Arr-Maz

Table 1Composition of mix design blends

Table 2 indicates the composite blend and mixture properties for the contractors' Design 1 and Design 2 composite blends. This table also presents the quality assurance (QA) data from the actual plant-produced mix during construction.

The LTRC gradation data indicated in table 2 are based on samples taken from the second truck during production. This data does not match the JMF or the District's QA data. The Design AC and Maximum Theoretical Specific Gravity,  $G_{nm}$ , however, correspond with the QA data. It is suspected that because the samples were acquired from the second truck, the hot mix plant had not had sufficient time to stabilize production. One hypothesis is that a purging of the bag house fines resulted in the finer gradation. The District's QA samples were acquired at a later time during production.

			Percent Pas	sing	
Sieve Size	Design 1	Design 2	QA Data	LTRC 2 <sup>nd</sup> Truck	Required Gradation
3/4" (19mm)	100	100	100	100	100
1/2" (12.5mm)	90	92	93	91	85 - 100
3/8" (9.5mm)	58	64	68	66	55 - 75
No. 4					
(4.75mm)	14	16	21	26	10 - 25
No. 8					
(2.36mm)	9	8	11	18	5 - 10
No. 16					
(1.18mm)	7	6	9	16	
No. 30					
(.600mm)	6	5	8	15	
No. 50					
(.300mm)	5	4	7	14	
No. 100					
(.150mm)	3.8	3.4	6	10	
No. 200					
(.075mm)	2.8	2.3	3.9	6.1	2 - 4
G <sub>mb</sub>	1.916	2.173			
G <sub>mm</sub>	2.374	2.368	2.381	2.389	
VCA	33.0	23.0			18
%Air Voids, AASHTO					
T166	19.3	8.2			
G <sub>sb</sub>	2.558	2.604			
G <sub>se</sub>	2.619	2.612			
P <sub>ba</sub>	0.9	0.8			
P <sub>be</sub>	5.9	6			
Permeability,					
ft/day	276	453			246
Permeability, ft/day LTRC					
Results	235	278			
Drain Down	0.08	0.08			0.3
					*
Design AC	6.6	6.6	7.0	6.8	

Table 2Composite blends and mixture properties

Table 3 shows the rut measurements taken from the Precision Machine and Welding version of the Hamburg Type Wheel Tester (PMW Wheel Tracker). The PMW Wheel Tracker tests mixtures for rutting properties and moisture susceptibility. Samples pass if they attain no more than 6.0 mm of rutting after 20,000 passes of the PMW Wheel Tracker. Also, the PMW Wheel Tracker will stop the measurement process if the samples have attained more than 20.0 mm at 20,000 passes. Two samples each from mixture Design 1 and mixture Design 2 were subjected to these tests. The tests were conducted at 50 °C. Both sets of samples were tested at 56 passes per minute. Prior to testing, the samples were submerged under water for 90 minutes at the required testing temperature. The rut depths indicated in table 3 are an average of the center 5 of 11 measuring points taken from each sample. The distance between each measuring point is approximately 1.14 inches. As indicated in table 3, Design 1 did not pass the required criteria, nor did it perform as well as Design 2. Design 2 had an average rut measurement of 3.32 mm after 20,000 passes.

# Table 3

Number of	**De	sign 1	Desi	ign 2
Passes	Sample #1	Sample #2	Sample #1	Sample #2
14,981	21.98			
4591		23.38		
	apart during tes	ed. Samples fell sting or failed to 00 pass criteria.		
20,000			3.50	3.14
			Averag	e = 3.32

### Rut measurements (mm)

Figures 2 and 3 are the graphical illustrations of the deformation under loading vs. number of passes for mixture designs 1 and 2 as tested in the PMW Wheel Tracker.

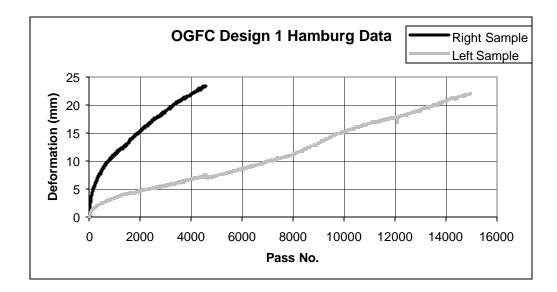


Figure 2 Mixture Design 1, rut measurements (mm) vs. number of passes

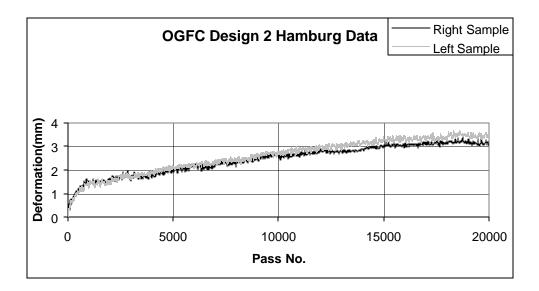


Figure 3 Mixture Design 2, rut measurements (mm) vs. number of passes

Table 4 is a comparison of the percent air voids of the contractor's mix Design 1, mix Design 2, and roadway cores as measured by the CoreLok device versus the contractor's results that were determined by AASHTO T166. It is noted that there is a considerable variance between

results. The percent air voids measured by the CoreLok device is significantly greater than the results determined by AASHTO T166.

			Percen	t Air Void	S	
	Desi	gn 1	Desi	ign 2	Roadwa	y Cores
Contractor's Results	19	0.3	8	.2		
	Sample 1	Sample 2	Sample 1	Sample 2	Core #1	Core #2
LTRC (CoreLok)	19.4	27.6	14.3	13.8	16.7	17.6
Average	23	3.5	14	1.0	17	7.1
LTRC (T166)					11.2	10.6
Average					1(	).9

Table 4CoreLok vs. AASHTO T166 air voids

Table 5 is a comparison of permeability results between the contractor's mix Design 1, mix Design 2, LTRC-prepared samples based on the contractor's mix design blends, and roadway cores. LTRC prepared two samples for each design and obtained the average coefficient of permeability. The falling head permeability (K-value) of the OGFC mixtures was calculated based on Darcy's Law. Each sample was tested twice and the average was reported. Design 2 resulted in a higher coefficient of permeability because of the decrease in material passing the No. 200 sieve.

# Table 5Coefficient of permeability (feet/day)

		Coeffic	cient of Per	rmeability	(feet/day)	
	Desi	ign 1	Design 2		<b>Roadway Cores</b>	
	Sample	Sample	Sample	Sample	Sample	
	1	2	1	2	1	Sample 2
LTRC Results	212.95	257.15	231.05	324.72	188.9	226.35
Average	2	35	2	78		208
<b>Contractor Results</b>	2'	76	4	53		

## Profilograph

A smoothness specification was not required on this section of roadway because of the small quantity of material placed. The total length of the project paved was approximately 800 feet.

### Cost

This project was estimated at \$50,000 for the construction of the OGFC layer on the 0.157mile stretch of a 2-lane, 12-feet wide roadway, (approximately 2,210 square yards). The low bid by Diamond B. Construction Co., LLC was \$54,508.02. This bid included all items for project completion, i.e. striping, signs and barricades, mobilization, etc. The pay item for the OGFC was Item S-001, and it was paid for by the square yard at a unit price of \$19.64/sq.yd. The quantity used to date was 2,181.30 square yards, which equates to a cost of \$42,841. When this square yard cost value is converted to a price per ton of mix placed at a lift thickness of ¾" (~ 94.0 tons), it equates to approximately \$455/ton. Therefore, this project does not have a sufficient quantity to do a proper evaluation of cost comparisons between hot mix and a specialty mix such as the OGFC. Based on a material square yard cost method, we would estimate a budget value of \$3.00 to \$3.50 per square yard for 10-mile-long projects.

# COMMENTS

The high air void content and the open structure of this mix promoted the effective drainage of rainwater as intended. Since roadway drainage is enhanced, splash and spray behind vehicles should be reduced and ponding of water should be minimized, thus minimizing hydroplaning during wet weather. Future performance evaluations of the roadway will be performed.

# Recommendations

OGFC's are recommended for immediate use to further enhance safety by improving roadway surface drainage, minimizing hydroplaning, reducing splash/spray and roadway glare, improving wet weather visibility and visibility of traffic markings.

Prior to full implementation use of OGFC's, it is recommended to construct at least one OGFC project in each District to familiarize LADOTD and industry with the OGFC specifications and mix design procedure.


# References

- 1. Kandhal, P., and Mallick, R., "Open Graded Asphalt Friction Course: State of the Practice," National Center for Asphalt Technology Report No. 98-7, May 1998.
- Mallick, R., Kandal, P., Cooley, Jr., L.A, and Watson, D., "Design, Construction, and Performance of New-Generation Open-Graded Friction Courses," National Center for Asphalt Technology Report No. 2000-01, April 2000.
- 3. Paul, H. R., "Louisiana Frictional Surfaces," Presentation at the Transportation Research Board, Washington, D.C., January 1989.
- 4. "Louisiana Standard Specification for Roads and Bridges," State of Louisiana, Department of Transportation and Development, Baton Rouge, 1977 Edition.
- 5. "Louisiana Standard Specification for Roads and Bridges," State of Louisiana, Department of Transportation and Development, Baton Rouge, 2000 Edition
- Mallick, R., Kandal, P., Cooley, Jr., L.A, and Watson, D., "Design, Construction, and Performance of New-Generation Open-Graded Friction Courses," Asphalt Paving Technology 2000, Journal of the Association of Asphalt Paving Technologists, vol. 69:pp. 391 – 423.


# Appendix A

**Hotmix Plant and Roadway Pictures** 

# OGFC

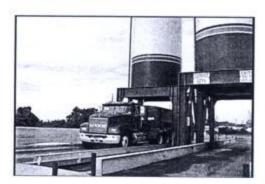



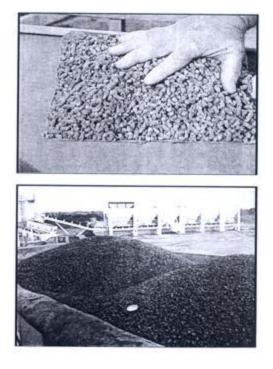

# OGFC









# Appendix B

**Contract Specifications** 

BYLAD DATE 4-24-03

# STATE OF LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT



# CONTRACT

FOR

# STATE PROJECT NO. 009-02-0018

US 71 OPEN GRADED FRICTION COURSE (CM)

**ROUTE US 71** 

**GRANT PARISH** 

**DISTRICT 08** 

Page 1 of 9

### LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT

#### CONTRACT

This agreement, is made and executed in TWO original copies, between the Louisiana Department of Transportation and Development acting through its Secretary, hereafter designated as the "Department", and Diamond B Construction Company, LLC, hereafter designated as the "Contractor."

The Department did advertise for, receive and accept a bid from the Contractor for work on a Department construction project identified as,

State Project No. 009-02-0018, US 71 OPEN GRADED FRICTION COURSE (CM), US 71, GRANT PARISH, consisting generally of OPEN GRADED FRICTION COURSE, PAINTED TRAFFIC STRIPING, REFLECTORIZED RAISED PAVEMENT MARKERS, AND RELATED WORK ON US 71 IN GRANT PARISH.

The Contractor's submission is evidenced by a copy of the "Construction Proposal Signature and Execution Form" incorporated herein as part of the Contract Documents defined hereafter.

In consideration of the agreements herein contained, to be performed by the parties hereto and of the payments hereafter agreed to be made, it is mutually agreed by both parties that:

### CONTRACT DOCUMENTS

The contract consists of the "Contract Documents" including but not limited to the following:

- a. Agreement (This Instrument)
- b. Construction Proposal Signature and Execution Form
- c. Louisiana Standard Specifications for Road and Bridges, 2000 Edition (hereafter referred to as "2000 Standard Specifications")
- d. Project Construction Proposal (Notice to Contractors, Special Provisions, Supplemental Specifications, Schedule of Items) Plans e.;
- f. Plan revisions g.
- ZERO (0) Addenda made or issued prior to receipt of bids
- h. Payment, Performance and Retainage Bonds or Retainage Agreement

For these purposes, all of the provisions contained in the listed Contract Documents are incorporated herein by reference with the same force and effect as though said Contract Documents were herein set out in full. The Contract Documents are kept in the official file at the Department together with the acknowledgment of receipt correspondence signed by the Contractor.

Page 2 of 9

### LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT

#### CONTRACT

#### INTENT OF CONTRACT

In accordance with the 2000 Standard Specifications and the Contract Documents, the Contractor agrees to the terms and requirements for the intent of the contract to provide all materials, equipment and labor and perform the work required to complete the project in a thorough and workmanlike manner, to the satisfaction of the appropriate official of the Department.

### CONTRACT AMOUNT

The Contractor did submit as advertised with his (her) bid, a dollar value amount for each of the items designated in the construction proposal on the "Schedule of Items" and that the "Schedule of Items," attached hereto and incorporated herein as part of the Contract Documents, submitted by the contractor, establish that the total contract amount for this project is FIFTY-FOUR THOUSAND, FIVE HUNDRED FIGHT AND 02/100 dollars (\$54,508.02), as obtained by a summation of the product of the unit bid price submitted by the contractor for each item multiplied by the item quantity as estimated by the Department. The Contractor agrees to accept and the Department agrees to pay for the work at the prices stipulated in this contract in lawful money of the United States in a timely manner as set forth in the 2000 Standard Specifications.

#### CONTRACT TIME

The entire contract shall be completed in all details and ready for final acceptance within FIFTEEN (15) WORKING days. Performance of work on this contract shall begin on the date stipulated in the "Notice to Proceed" and shall be completed within the time specified in the Contract Documents, subject to such extensions as may be authorized.

### ALTERATION OF CONTRACT

In accordance with the 2000 Standard Specifications and the Contract Documents, the Contractor agrees to the terms and requirements for alteration of the contract.

#### STIPULATED DAMAGES

Contractor agrees to the assessment of Stipulated Damages as provided in the Subsection 108.08 of the 2000 File Standard Specifications as amended by the Contract Documents.

### DAMAGE CLAIMS

Contractor acknowledges that he/she has reviewed and understands Subsection 107.17 of the 2000 Standard Specifications and specifically agrees to be bound by the terms and conditions thereof.

### JOINT EFFORT

This Agreement shall be deemed for all purposes prepared by the joint efforts of the parties hereto and shall not be construed against one party or the other as a result of the preparation, drafting, submittal or other event of negotiation, drafting or execution of the Agreement.

Page 3 of 9

۰. LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT CONTRACT This contract shall become effective on the date all parties hereto have signed the same. Diamond B Construction Company, LLC CONTRACTOR 72-0847970 (Federal Identification Number) au J. Su Sr. B Witness (Signature of Authorized Agent) 04-29-03 Witness (Date) BRYAN L BOSSIER SR., PRES11 (Typed or Printed Name and Title) LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT Sura Sauthan Witness By:// M Wayne Wm. Wyne Marchand, P.E. District Administrator, District 08 5-8-03 (Date) Page 4 of 9

<section-header><text><form><form><form><form><form><form><form></form></form></form></form></form></form></form></text></section-header>		32			
STATE PROJECT NO(S)     OP-02-0018     STATE PROJECT NO(S)     OP-02-0018     STATE PROJECT NO(S)     NA     STATE PROJECT NO(S)     STATE     STATE PROJECT     STATE     STATE PROJECT     STATE     STATE     STATE PROJECT     NA     STATE     STAT	· · · ·				
STATE PROJECT NO(S)     OP-02-0018     STATE PROJECT NO(S)     OP-02-0018     STATE PROJECT NO(S)     NA     STATE PROJECT NO(S)     STATE     STATE PROJECT NO(S)     STATE     STATE PROJECT     STATE     STATE PROJECT     STATE     STATE					
STATE PROJECT NO(S)     OP-92-0018     MA     OP-92-0018     MA     MAME OF PROJECT NO(S)     NA     OP-92-0018     MA     OP-92-0018     OP-92-0018	CC	INSTRUCTION	PROPOSAL S	IGNATURE A	ND EXECUTION FOR
		10 THE LOUISLANA	DEPARTMENT OF TRANSPORTA	TION AND DEVELOPMENT (DOT	RTED AS INDICATED AND SUBMITTED Dy TO CONSTITUTE A VALUE BUD
	· mar Sautaball	ROJECT NO(S).			
1 (WE) HEREBY CERTEFY TRAIT I (WE DATE CAREFULLY EXAMINED THE PROPOSAL PLANS AND SPECIFIC-CIDION, INLIEND AND WEIGHT AND THE STEP OF THE ADDY PROJECTS AND AMARE PLATE YOUR CONCLAINT OF ALL REPORTSAL DOCUMENT, THE MARK TO PROJECT AND TAKEN AND THE STEP OF THE ADDY PROJECTS AND AMARE PLATE YOUR CONCLAINT OF ALL REPORTSAL DOCUMENT, THE MARK TO PROJECT AND TAKEN AND THEY ALL NOESSANY MUNDED, L., AND ALL WORK, MATERIALS AND LANCE RESOLUTED TO THE MARK THE ADDY PROJECT AND THE YOUR CONTENT OF ALL REPORTSAL TO THE WAY. THE MARK THE ADDY PROJECT AND THE YOUR CONTENT OF ALL REPORTSAL TO THE WAY. THE MARK THE ADDY PROJECT AND THE YOUR CONTENT OF ALL REPORTSAL TO THE YOUR PROJECT AND THE YOUR CONTENT OF ALL REPORTSAL TO THE YOUR PROJECT AND THE YOUR CONTENT OF ALL REPORTSAL TO THE YOUR PROJECT AND THE YOUR CONTENT OF ALL REPORTS TO THE SCHEDULE OF THE SCHEDULE OF THE YOUR THE BASET TO ALL AND THE YOUR AND THE YOUR CONTENT OF ALL REPORTS AND THE ADDY PROJECT AND THE YOUR CONTENT OF ALL SCHEDULE OF THE SCHEDULE OF THE YOUR THERE AND THE ADDY PROJECT AND THE ADDY PROJECT AND THE YOUR AND THE YOUR AND ALL SPECTRAL TOWN OF AND ALL SPECTRAL TOWN OF AND THE ADDY PROJECT ADDY THE YOUR AND THE YO	* FEDERA	LAID PROJECT NO(S).	N/A	÷	
(WE) IBREENY CERTIFY TRAT I (WE) HATE CAREFULLY EXAMINED THE PROPOSAL PLANS AND SPECIFICATIONS, INCLUDING, ADDRESS, ADD STRUCT IN CONTINUES IN ADD CAREFY REVIEWS IN ADDRESS AND STRUCTURE SINGLAW ADDRESS AND STRUCTURES IN ADDRESS AND STRUCTURES AND STRUCTURE AND STRUCTURE AND STRUCTURE AND STRUCTURE AND STRUCTURE AND STRUCTURE AND STRUCTURES AND STRUCTURE AND STRUCTURE AND AND STRUCTURES AND AND STRUCTURES AND AND STRUCTURE AND AND STRUCTURES AND STRUCTURES AND STRUCTURE AND STRUCTURE AND AND STRUCTURES AND STRUCTURES AND STRUCTURE AN	NAME OF	PROJECT	US 71 FRICTION	COURSE (CMD	
	TO PERFORM ABOVE PROJ AND MADE A AS FULL AND ONLY FOR P ACCORDANCI SUPPLEMENT, UNDERSTAND QUANTITY OF TIME AND/OR CONTAIN UNT SUPPLED BY U	ALL WORK, AND SUPPLY ALL SCT AND TO ACCEPT THE SUM PART HEREOF MULTIPLIED B FINAL PAYMENT FOR ALL WO LAN CHANGES (CHANGE OR WITH THE GENERAL BIDD AL SPECIFICATIONS, AND T THAT THE SUMMATION OF TI THAT THE SUMMATION OF TO THAT THE SUMMATION OF TO LANE RENTAL SHALL BE THE I PRUCES WRITTEN OUT IN Y WOLD IN THE BID PROPOSAL N	IN HECESSARY MATERIALS , MATION OF THE PRODUCT Y THE ACTUAL QUANTITY Y THE ACTUAL QUANTITY DERS APPROVED BY THE DERS APPROVED BY THE DERG REQUIREMENTS IN T HE LOUISIANA STANDAR HE PRODUCTS OF THE UNIT HE LOUISIANA STANDAR HE PRODUCTS OF THE UNIT H ITEM, ALONG WITH ANY E BASIS FOR THE COMPAR WORDS AND THAT THE SC	AND ALL WORK, MATERIA NUD LABOR REQUIRED FOR 5 OF THE UNIT PRICES BID ( OF UNIT OF MEASURE PERI LOTID CHEFF ENGINEER ( DOTD CHEFF ENGINEER ( DOTD CHEFF ENGINEER ( DID SPECIFICATION PRO) D SPECIFICATIONS FOR 1 PRICES BID ON THE SCHEE OTHER FACTORS SPECIFIC SON OF BID. 1 (WE) UNDE HEDULE OF ITEMS SUBMI	LS AND LABOR REQUIRED THEREIN, AN SUCCESSFUL AND THELY COMPLETION SUCCESSFUL AND THELY COMPLETION NO THE SCHEDULE OF ITEMS ATTACHED FORMED FOR EACH ITEM, AS AUDITED B THE THE ABOVE PROJECT, SUBJECT TO IN SA HIS DESIGNEE. THE'S BUT IS SUBJECT DSAL AND ALL SPECIAL PROVISIONS, OADS AND BRIDGES (2000 EDITION). ULL OF ITEMS MULTIPLIED BY THE EST D TO BE APPLICABLE SUCH AS CONSTRU RESTAND THAT THE SCHEDULE OF ITEMS.
BUDDER'S DEE GOAL STATEMENT (APPLICABLE TO DRE GOAL PROJECTS)     FUES PROJECT IS DESIGNATED BY SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE DESIGNATED BY SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE DESIGNATED BY SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE DESIGNATED BY SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE AND SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE AND SPECIAL PROVISION AS A DIADAVATIAGED BUSINESS ENTERPRISE (DRE) GOAL PROJECT IN ACCORDANCE WITH THE     SPECIFIC TYPE AND SPECIAL PROGRAM MANUAL INCORPORATIO TERM THE DIBLE CONTACT GOAL IN THE BUDDER CONTACT SPECIFIC TYPE AND AND TAKES THE DIDAD CONFILMENT HE SPECIFICATION OF FIRE BUDDER CONSTRUCTION PROPOSAL SIGNATURE AND ATTAGENENTS IN A DIADAVATIAGED BY THE DIDAD CONSTRUCTION OF THIS SPECIFICATION OF THE SPECIFICATION OF THIS SPECIFICATION AND DIE PROGRAM MANUAL      CERTIFICATION OF CONFILME THE SPECIFICATION OF THIS SPECIFICATION PROPOSAL SIGNATURE AND ENDER     SPECIFIC TS DESIGNATED BY SPECIAL PROVISION AS A TRANSPORTATION IN PRASTRUCTURE MODEL FOR ECONOMIC DEVELOPMENT (THE) SPECIFICATION AND ATTAGED AND AT	100000	NONCOLL	USION DECLARATI	ON (APPLICABLE TO PEDER	ALAID PROFECTO
CERTIFICATION OF EMPLOYMENT OF LOUISIANA RESIDENTS     TRANSPORTATION INFRASTRUCTURE MODEL FOR ECONOMIC DEVELOPMENT     (TIME) PROJECTS (APPLICABLE TO THE ZROJECTS)      FIDE PROJECT IS DESIGNATED BY SPICIAL PROVISION AS A TRANSPORTATION NORASTRUCTURE MODEL FOR ECONOMIC DEVELOPMENT (TIME) PROJECT     HELDURIANA REVENUES TRAITAT LEAST 40 PERCENT OF THE EMPLOYED ON THE TIME OF THE LOUISIANA RESIDENTS IN ACCORDA     THE LOUISIANA REVENUES TRAITAT LEAST 40 PERCENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESIDENTS IN ACCORDA     THE NOTION OF REQUESTING AND PROVIDENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     THE STRUCTURE MODEL TO THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     THE STRUCTURE AND PROVIDENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     THE STRUCTURE THAT AT LEAST 40 PERCENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     THE STRUCTURE THAT AT LEAST 40 PERCENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     THE STRUCTURE THAT AND PERCENT OF THE EMPLOYED ON THE STATE STATEMENT     USED BEODER CERTIFIES THAT AT LEAST 40 PERCENT OF THE EMPLOYED ON THE TIME PROJECT WILL BE LOUISIANA RESEDENTS IN ACCORDA     NON PARTICIPATION IN PAYMENT ADJUSTMENT FOR AFFEALT COMENT AND/OR FUELS, THE BEDDER HERE     THE STRUCTURE RECENTION FROM SALE PROVIDENT AS BEEND STRUCT TO FAYMENT ADJUSTMENT FOR AFFEALT COMENT AND/OR FUELS, THE BEDDER HE     THE REDUCT TO DESIGNATED BY SPECIAL PROVIDENT AS A BEND STRUCT TO FAYMENT ADJUSTMENT FOR ASPEALT COMENT AND/OR FUELS, THE BEDDER HERE     THE REDUCTION OF REQUESTING EXCLUSION FROM SALE PROVIDENT TROVIDENT FOR ASPEAL PROVIDENT ELEMENTER BEDDER     THE REDUCTION OF REQUESTING EXCLUSION FROM SALE PROVIDENT ADJUSTMENT FROME	THE APPARENT I	THIS CONTRACT, THE BEDDER ASS DBE GOAL, DIE BEDDER ASSURSS EENT IN ACCORDANCE WITH THE CO LOW BEDEER SEALL COMPLETE A UMENIATION OF GOOD FAITH EN	VISION AS A DESADVANTAGES UNES DOTD THAT HE/SHE WILL DOTD THAT HE/SHE HAS MAD ONTRACT AND DES PROGRAM	BUSINESS ENTERFRISE (DRE) MEET OR EXCELID THE DRE CO E AND CAN DOCUMENT GOOD MANUAL INCORPORATED HERE BUPLIANCE PROGRAMS OFFICE	DOAL PROFECT IN ACCORDANCE WITH THE D NTRACT GOAL, OR IF THE BUDGER CANNOT ME FATHE INFORTS MADE TOWARDS MEETING T IN BY REFERENCE.
NON PARTICIPATION IN PAYMENT ADJUSTMENT (ASPHALT CEMENT AND FUELS) STATEMENT THE OFTION OF REQUESTING EXCLUSION FROM VALUES AS READ STRAIGHT ADJUSTMENT FOR ASPEALT COMENT AND/OR FUELS, THE BEDDER H IF THE REDUER DESIDES TO BE EXCLUDED FROM THESE FAYMENT ADJUSTMENT FROVISIONS THAT ARE ISTABLISHED BY SPECIAL PROVISION ELSEWHERE REFER THE REDUER IS REQUESTED TO MARE HERE	D' THIS PROJECT IS DEPENDED IN ACT NO THE LOUISLANA RE	CERTIFICATIO RANSPORTATION INF (TI DESIGNATED BY SPECIAL PROV 3. 36 OF THE 1949 PRIST EXTRAORD WEED STATUTES OF 1949. COMPRE	ON OF EMPLOYME TRASTRUCTURE MU ME) PROJECTS (APP SION AS A TRANSPORTATION I UNAXY SESSION OF THE LEGISL OF DO READ OF THE LEGISL	NT OF LOUISIANA ODEL FOR ECONON LICARLE TO TIME PROJECTS) NITRASTRUCTURE MODEL FOR ATTORE WRICE INACTED PART	RESIDENTS MIC DEVELOPMENT
J' THE PROJECT IS DESIGNATED BY SPECIAL PROVISION AS BEING SUBJECT TO PAYMENT ADJUSTMENT FOR ASPEALT CHMENT AND/OR PUBLS, THE BEIDER H     THE OFTION OF REQUESTING EXCLUSION FROM SAID PAYMENT ADJUSTMENT PROVISIONS TRAY ARE ESTABLISHED BY SPECIAL PROVISION ELSTWHERE REFER     THE REDUER TO BE EXCLUDED PROM THESE PAYMENT ADJUSTMENT PROVISIONS.					ACCORDANCE
FAILURE TO MARK THIS BOX PROR TO BED OPENING WELL CONSTITUTE FORFEITURE OF THE HIDDER'S OPTION TO REQUEST EXCLUSION.	THE REDDER IS REQUI	ESIGNATED BY SPECIAL PROVISIO RESTING EXCLUSION FROM SAID 7/ 25 TO BE EXCLUDED PROM THESE RED TO MARE REFE	A CENTERY AND I	FUELS) STATEMEN IDNT ADJUSTMENT FOR ASPEAL ONE THAT ARE ESTABLISHED B SHOMA	T LT CEMENT AND/OR FUELS, THE BUDGER HAS Y SPECIAL PROVIDION ELSEWHERE REFER.
- HAR DE RACLUSION.	3				SALLUSIUN.
CS-14A 04/01 Page 5 of 9					Page 5 of 0
04/01 Page 5 of 9 I-1					1 450 3 01 3

	0.A	(*1)
STATE PROJECT NO(S).	009-02-0018	
BIDDER	SIGNATURE REOI	UIREMENTS (APPLICABLE TO ALL PROJECTS)
and and and another start	THE T IS SUBMITTED BY:	APPLICABLE TO ALL PROJECTS)
Name of Principal (Individual, Firm, Corr	Tion Cometany, LLA	
come or standard (nervicus), Firm, Corp	poration, or Joint Vennure)	
If Joint Venture, Name of First Partner		If Joint Venture, Name of Second Partner
12487 Louisiana Commond Line		A read of second Partier
(Louistiana Contractor's License Number Venture)	of Hudder or First Partner to Joint	(Louisiana Contractor's Lipense Namber of Second Partner to Joint Ven
Basines Street Address	ALL PAILE	The second s
Acoxonania La	1 -7/2 - 2	(Business Street Address)
(Burgness Mailing Address, if different)	1. 71302	Oburness Matthewski and
1.0. Dex 7177		(Business Mailing Address, if different)
Acovernity LA	- 71306	
(Area Code and Telephone Number of Busine	6	
(318) 443-5686	- A	(Area Code and Telephone Number of Business)
(Telephone Number and Name of Contact Per	son)	(Telephone Number and Name of Connict Person)
(318) 4-93-464 (Telecopier Number, if any)	3	
ACTING ON DOTA A PORT	THIS IS TO ATTRET THAT THE TOP	(Telecopier Number, if any) DERSIGNED DULY AUTHORIZED REPRESENTATIVE OF THE AB BD, AGREES AND CERTIFIES THE TRUTH AND ACCURACY OF IMENTS, DECLARATIONS AND CENTER'S FORM ACCURACY OF
Duex James (	STITUTE AN IRREVOCABLE AND LEO	DESSINAED DULY AUTHORIZED REPRESENTATIVE OF THE AB BD, AGREES AND CERTIFIES THE TRUTH AND ACCURACY OF EMENTS, DECLARATIONS AND CERTIFICATIONS ABOVE AND IN TURE OF THIS FORM AND SUBMISSION OF THE SCHEDULE OF TO IALLY BINDING OFFER BY THE BIDDER.
(Single) Branch Boss	AND LEG	ALLY BINDING OFFER BY THE BIDDER.
(Signature) Bryg h. Boss (Frinted Name) Program H. Boss	100, SA.	(Signature)
(Signatule) Brygn h. Boss (Printed Name)	Ten, Sa.	ALLY BINDING OFFER BY THE BIDDER. (Signahore) (Printed Name)
(Signature) Bryg h. Boss (Frinted Name) Program H. Boss	Im, Sa.	ALLY BINDING OFFER BY THE BIDDER. (Signahure) (Printed Name) (Title)
(Signature) (Signature) (Printed Name) (Printed Name) (Table) (Table) (Table) (Table) (Table) (Table) (Date of Signature) (Date of Signature)	Im, Sa.	ALLY BINDING OFFER BY THE BIDDER. (Signahore) (Printed Name)
(Signature) (Signature) (Printed Name) (Printed Name) (Table) (Table) (Date of Signature) CONTRACTORS TOTAL BASE BID	54,508 02	ALLY BINDING OFFER BY THE BIDDER. (Signahore) (Printed Name) (Tide)
(Signafiate) Bryon A. Boss (Printed Name) A of 100 or 7 (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	57,506 02 MINED BY THE BIDDER IS FOR	ALLY BINDING OFFER BY THE BIDDER. (Signature) (Printed Name) (Tide) Date of Signature)
(Signafiate) Bryon A. Boss (Printed Name) A of 100 or 7 (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	57,506 02 MINED BY THE BIDDER IS FOR	ALLY BINDING OFFER BY THE BIDDER. (Signature) (Printed Name) (Tide) Date of Signature)
(Biggende) Bryng A. Boss (Prated Name) A of 100 cm 7 (Tale) Apart 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BID	57,506 02 MINED BY THE BIDDER IS FOR	ALLY BINDING OFFER BY THE BIDDER. (Signature) (Printed Name) (Tide) Date of Signature)
(Signafiate) Bryon A. Boss (Printed Name) A of 100 or 7 (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	57,506 02 MINED BY THE BIDDER IS FOR	ALLY BINDING OFFER BY THE BIDDER. (Signature) (Printed Name) (Ticle) Date of Signature) OR THIS 4D ITEMS BY DOTD.
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR MINED BY THE BIDDER, IS FOR MINED BY THE BIDDER, IS FOR HE EXTENSION AND THAT THE LOW BID F HE EXTENSION AND TOTAL OF THE B	(Signature) (Signature) (Tide) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	ALLY BINDING OFFER BY THE BIDDER. (Signature) (Printed Name) (Ticle) Date of Signature) OR THIS 4D ITEMS BY DOTD.
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Printed Name) (Title) Date of Signature) FOR THIS ND ITEMS BY DOYD. ISSUED FOR BID APR 1 7 2003
(Signafiate) Bryon A. Boss (Printed Name) A of 100 of (Table) April 17, 2003 (Date of Signature) CONTRACTORS TOTAL BASE BED IT IS AGREED THAT THIS TOTAL, DETER	MINED BY THE BIDDER, IS FOR ISS ONLY, AND THEAT THE LOW BID F HE EXTENSION AND TOTAL OF THEE CS-14AA	(Signature) (Signature) (Tride) Date of Signature) OR THIS ID ITEMS BY DOTD. ISSUED FOR BID

#### LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT PAYMENT, PERFORMANCE, AND RETAINAGE BONDS Be it known that Diamond B Construction Commons LLC

t known that \_\_\_\_\_\_ Diamond B Construction Company, LLC\_\_\_\_\_, as Principal, Hartford Accident and Indemnity Company

1. N. 19

pal, and . and

8

as Surety(ies), authorized to do business in other potential claimants, for all obligations incurred by the Principal under its contract for the construction of STATE PROJECT NO. 009-02-0018, US 71 OPEN GRADED FRICTION COURSE (CM), US 71, GRANT Parish, in the full contract amount of FIFTY-FOUR THOUSAND, FIVE HUNDRED EIGHT AND 02/100 DOLLARS (\$ 54,508.02). The obligations of the Principal and Surety under these payment, performance, and retainage bonds shall continue in full force and effect until all materials, equipment, and labor have been provided, AND all requirements contained in the contract, plans, and specifications have been completed in a timely, thorough, and workmanlike manner. The parties acknowledge that these bonds are given under the provisions and limitations contained in La. R.S. 48:250 et seq.

By this instrument(s), the Principal and Surety(ies) specifically bind themselves, their heirs, successors, and assigns, in solido, under the following bonds:

**PAYMENT BOND.** To the Louisiana Department of Transportation and Development and all "Claimants," as defined in La. R.S. 48:256.5 in the full contract amount of **FIFTY-FOUR THOUSAND**, **FIVE HUNDRED EIGHT AND 02/100 DOLLARS (\$54,508.02)**, in order to secure the full and timely claims under the project. The parties agree this bond is statutory in nature and governed by La. R.S. 48:256.3.


Claims pursuant to La. R.S. 48:256.5 shall be made to the Undersecretary, DOTD, Headquarters Administration Building, Rm 226, 1201 Capitol Access Road, Baton Rouge, LA 70802.

**PERFORMANCE BOND.** To the Louisiana Department of Transportation and Development in the full contract amount of **FIFTY-FOUR THOUSAND**, **FIVE HUNDRED EIGHT AND 02/100 DOLLARS** (\$54,508.02), in order to secure the full and faithful performance and timely completion of the project according to its plans and specifications, inclusive of overpayments to the contractor and stipulated damages as assessed.

**RETAINAGE BOND.** To the Louisiana Department of Transportation and Development in the full sum of **Ten percent (10%)** of the contract amount, in lieu of the sums required to be withheld from progress payments under the provisions of La. R.S. 48:256.1, inclusive of overpayments to the contractor and stipulated damages as assessed.

I, Principal, elect to	exercise my option to have ten percent retainage withheld from all payments in his
of the above retaina	ige bond.
	By
	Principal
L	Principal
	8/01
	8/01 Form CS-16A

· · · · ·	LO	UISIANA		
G	DEPARTMENT OF TRANSP PAYMENT, PERFORMAN	ORTATION AND DEVELO CE, AND RETAINAGE B	OPMENT ONDS	
1 -	In witness whereof w	e have signed this instrument	as dated.	
Alpha	Byld By A	pu V. Jun /	h. C	14-26
Lynn	Made BRYAN	L BOSSIER SR., F ped or Printed Name and Titl cident and Indemnity Con	RESIDENT /CEC	C
Litten 9	aller By	Dele Dault		1011
Hayl H		Attorney-in-Fact E GAULT, LIC. #96317 HAJNSURANCE: GONST	(Seal)	Date
	P. O. B BATON	ROUGE, LA 70896-6068		
	By	Surety		
Witness		Attorney-in-Fact	(Seal)	Date
Witness	1	yped or Printed Name		
A copy of the contract a	and subsequent correspondence/c	ommunication from LA DCVI	T)	
Anorrow 11	the contract bonds should be direct SURETY 1)	cted to:	D of the contracting	
(FOR			SURETY 2)	
(FOR Hartford Accident	and Indemnity Company	(FOR		
Hartford Accident	and Indemnity Company cy of Company Name	(FOR Bonding Agen	cy of Company Name	
Hartford Accident	and Indemnity Company acy of Company Name	(FOR Bonding Agen		
Hartford Accident : Borning Agen Local Agen J. DALE GAULT, HIBERNIA INSU P. O. BOX 66066	and Indemnity Company scy of Company Name Suitt at or Representative ALIC::: 96317 RANCE CONSTRUCTION 8	(FOR Bonding Agen Local Agen	cy of Company Name	
Hartford Accident : Hartford Accident : Bornting Agen Local Agen J. DALE GAULT, HIBERNIA INSU	and Indemnity Company scy of Company Name Suitt at or Representative ALIC::: 96317 RANCE CONSTRUCTION 8	(FOR Bonding Agen Local Agen	cy or Company Name	
Gentling Agen Hartford Accident : Bornting Agen Local Agen J. DALE GAULT, HIBERNIA INSU P. O. BOX 66060 BATON ROUGE,	and Indemnity Company scy of Company Name Suitt at or Representative ALIC::: 96317 RANCE CONSTRUCTION 8	(FOR Bonding Agen Local Agen	cy or Company Name	
J. DALE GAULT, HIBERNIA INSU P. O. BOX 66060 BATON ROUGE,	and Indemnity Company ty of Company Name Current it or Representative ALIC::: 96317 RANCE CONSTRUCTION 8 LA 70896-6068	(FOR Bonding Agen Local Agen /	cy or Company Name tor Representative address	

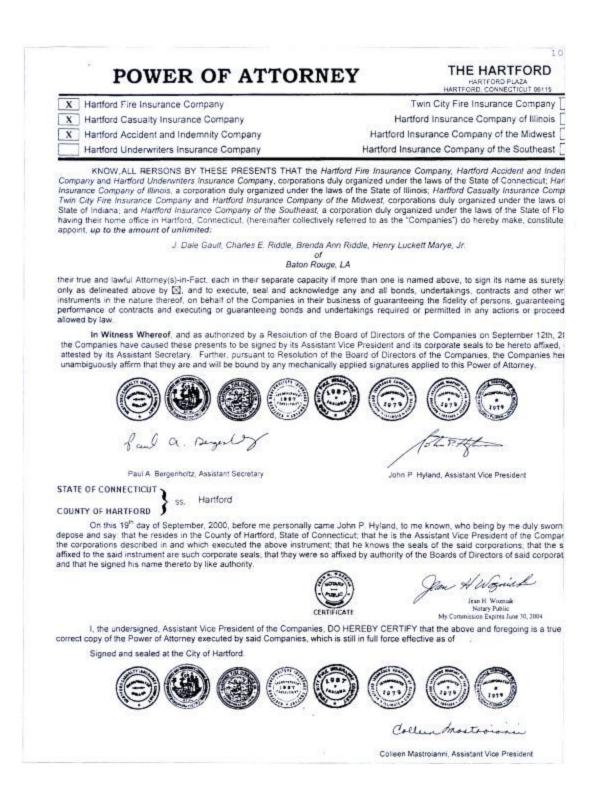

	13
	5.0
	<u>.</u>
	10
Coligee's/Insured's Name Diamond B Construction Co., L.L.C	
Obligee's/insured's Mailing Address P.O. Box 7618	193
P.O. Box 7618 Alexandria, LA 71306	1
3	
Band/Policy Number 43BCSCD1707	IMPORTANT NOTICE TO
	OBLIGEES/POLICYHOLDERS -
TERRORISM RIS	K INSURANCE ACT OF 2002
1.100	
26, 2002, we must make terrorism cov coverage provided by your bond/policy	Terrorism Risk Insurance Act of 2002, effective November erage available in your bond/policy. However, the acti for acts of terrorism, as is true for all coverages, is limit s, limits, other provisions of your bond/policy, a enerally applicable rules of law.
America under a formula established bi pay 90% of covered terrorism losses sureties/insurers until such time as insu	s bond/policy is partially reinsured by the United States y Federal Law. Under this formula, the United States exceeding a statutorily-established deductible paid ared losses under the program reach \$100 billion. If t cedures for, and the source of, any payments for losses
either shown on this form or elsewhere i	blished for terrorism coverage under this bond/policy is n the bond/policy. If there is no premium shown for e bond/policy, there is no premium for the coverage.
Terroris	m premium: S0
	Dana 10

ITEM S-001, OPEN GRADED FRICTION COURSE (03/03): This item consists of furnishing and constructing an Open Graded Friction Course in accordance with plan details, and these specifications.

General: This thin surface asphaltic concrete overlay material is intended to resist permanent deformation, reduce overspray by moving water freely through the layer and improve friction while providing a 10 year maintenance surface. This material shall be placed in thicknesses shown on the plans, otherwise the thickness shall be 3/4 inch (19 mm) minimum and 2.0 inch (50 mm) maximum.

Materials: Materials shall comply with the following:

(a) Asphalt Binder: The asphalt binder shall be PG 76-22m asphalt cement complying with Section 1002 and listed on QPL 41.

(b) Aggregate: Aggregates shall be 100% crushed stone, with a Friction Rating of I complying with the requirements of Subsection 1003.06(b), except that aggregate gradation shall be as follows:

Aggregate Gradation					
US Sieve (Metric)	Percent Passing				
3/4 inch (19 mm)	100				
1/2 inch (12.5 mm)	85-100				
3/8 inch (9.5 mm)	55-75				
No. 4 (4.75 mm)	10-25				
No. 8 (2.36 mm)	5-10				
No. 200 (75 um)	2-4				

(c) Fiber: Cellulose fiber or mineral fiber when required shall comply with Section 508 and will be required to assure protection against draindown.

(d) Anti-strip: Anti-strip shall comply with Subsection 1002.02 and be applied according to Section 502.

(e) Tack Coat: The tack coat shall conform to Section 504 and shall be applied at a minimum rate of 0.07 gallons per square yard (0.32 L/sq m).

Equipment: Equipment shall conform to Section 503.

Design Procedure: The contractor shall provide the required mixture using the following design procedures:

1. Select three trial blends of aggregate within the specification bands above.

 Determine dry-rodded voids in coarse aggregate, plus No. 4 (4.75 mm) sieve, of the coarse aggregate fraction (VCA<sub>DR</sub>)

 Add between 6 percent to 6.5 percent asphalt to each trial blend and compact to 50 gyrations of a Superpave gyratory compactor.

(Note: At this stage of design, fiber should be added at manufacturer's recommended rate. Fibers are required when draindown is observed, typical rates are 0.2 percent to 0.5 percent.)

4. Determine the voids in the coarse aggregate, VCA, for each compacted mix.

5. VCA must be equal to or less than the  $VCA_{DR}$  (this indicates stone on stone contact).

Select the trial gradation that produces stone on stone contact and a minimum 22 percent VCA.  Using selected design from Step 6, prepare two additional mixtures using 0.5 percent and 1.0 percent additional asphalt content and compact using 50 gyrations of the Superpave gyratory compactor.

 Conduct draindown test in accordance with Section 508 on the loose mix at a temperature 60°F (15°C) higher than normal mixing temperatures. (A maximum draindown of 0.3 percent is required.)

 Conduct laboratory permeability test described in ASTM PS 129, 246 feet/day (75 m/day) minimum is desired.

 Report each step of the procedure. The report must show that the selected design meets draindown, VCA of 18 percent minimum and a minimum of 246 feet/day (75 m/day) permeability.

11. Perform boil test and Lottman test. The Lottman moisture sensitivity test, in accordance with AASHTO T 283, is modified to require 5 freeze/thaw cycles and the retained tensile strength, TSR, shall be 80 percent. A minimum of 90 percent coating is required for the boil test.

12. District Lab Engineer shall review and approve the design, verifying the aggregate gravities.

<u>Plant Validation and Quality Assurance Test:</u> The validation lot is defined as the first four hours of production. Validation requires that the mixtures meet the minimum design criteria excluding Lottman and shall be based on the average of a minimum of two samples. Subsequent validation trials shall be limited to 500 tons (500 Mg) per day.

One set of plant Lottman tests shall be made during validation and reported within one week of production for verification.

A production lot is defined as the material produced in one day.

Two random acceptance samples shall be taken each day and the average shall be reported and shall meet the following:

Gmm, maximum specific gravity ±0.020 from validation target;

VCA, 18 percent minimum; after 50 gyrations of a Superpave gyratory compactor.

Draindown; 0.3 percent;

Boil Test; 90 percent coated

Percent AC, meter; (±0.2 percent from design target)

Permeability; Validation only or when requested by the engineer.

Acceptance pay will be based on the percent deviations from the job mix formula tolerances for the lowest of the pay sieves listed below.

US Sieve (Metric)	100% pay	95% pay	90% pay	or remove
No. 4 (4.75 mm)	±4%;	±4.1 to 6.0%	±6.1 to 8.0%	>8.0%
No. 8 (2.36 mm)	±3%	±3.1 to 5.0%	±5.1 to 7.0%	>7.0%

Weather Limitations: Weather limits shall comply with Section 502 except that the surface temperature shall be a minimum of 60°F (15°C) and air temperatures must be 60°F (15°C) and rising.  Using selected design from Step 6, prepare two additional mixtures using 0.5 percent and 1.0 percent additional asphalt content and compact using 50 gyrations of the Superpave gyratory compactor.

 Conduct draindown test in accordance with Section 508 on the loose mix at a temperature 60°F (15°C) higher than normal mixing temperatures. (A maximum draindown of 0.3 percent is required.)

 Conduct laboratory permeability test described in ASTM PS 129, 246 feet/day (75 m/day) minimum is desired.

 Report each step of the procedure. The report must show that the selected design meets draindown, VCA of 18 percent minimum and a minimum of 246 feet/day (75 m/day) permeability.

11. Perform boil test and Lottman test. The Lottman moisture sensitivity test, in accordance with AASHTO T 283, is modified to require 5 freeze/thaw cycles and the retained tensile strength, TSR, shall be 80 percent. A minimum of 90 percent coating is required for the boil test.

12. District Lab Engineer shall review and approve the design, verifying the aggregate gravities.

<u>Plant Validation and Quality Assurance Test:</u> The validation lot is defined as the first four hours of production. Validation requires that the mixtures meet the minimum design criteria excluding Lottman and shall be based on the average of a minimum of two samples. Subsequent validation trials shall be limited to 500 tons (500 Mg) per day.

One set of plant Lottman tests shall be made during validation and reported within one week of production for verification.

A production lot is defined as the material produced in one day.

Two random acceptance samples shall be taken each day and the average shall be reported and shall meet the following:

Gmm, maximum specific gravity ±0.020 from validation target;

VCA, 18 percent minimum; after 50 gyrations of a Superpave gyratory compactor.

Draindown; 0.3 percent;

Boil Test; 90 percent coated

Percent AC, meter; (±0.2 percent from design target)

Permeability; Validation only or when requested by the engineer.

Acceptance pay will be based on the percent deviations from the job mix formula tolerances for the lowest of the pay sieves listed below.

US Sieve (Metric)	100% pay	95% pay	90% pay	or remove
No. 4 (4.75 mm)	±4%;	±4.1 to 6.0%	±6.1 to 8.0%	>8.0%
No. 8 (2.36 mm)	±3%	±3.1 to 5.0%	±5.1 to 7.0%	>7.0%

Weather Limitations: Weather limits shall comply with Section 502 except that the surface temperature shall be a minimum of 60°F (15°C) and air temperatures must be 60°F (15°C) and rising. <u>Placement and Compaction</u>: Mixture shall be placed to plan thicknesses and compacted immediately after placement without excessive breakage of aggregate. Two or three passes of a vibratory roller is typical. Newly constructed sections shall be protected until it has cooled enough to develop sufficient strength to hold traffic.


Roadway Inspection and Smoothness Requirements: The inspector will record the average paver screed height settings every hour and will also report the yield hourly by adding the tons reported on the weigh tickets and dividing by the area placed. Smoothness will be measured before construction starts and again after each day of construction. The smoothness measurement after construction shall not exceed the measured smoothness before construction.

<u>Measurement:</u> Open Graded Friction Course will be measured per square yard (sq m). The quantities for payment will be the design quantities specified in the plans, based on horizontal dimensions, and adjustments thereto.

<u>Payment:</u> Payment for Open Graded Friction Course will be made on the accepted quantity at the contract unit price per square yard (sq m) subject to the acceptance payment adjustments contained herein.

Payment will be made under:

Item S-001, Open Graded Friction Course, per square yard (sq m).

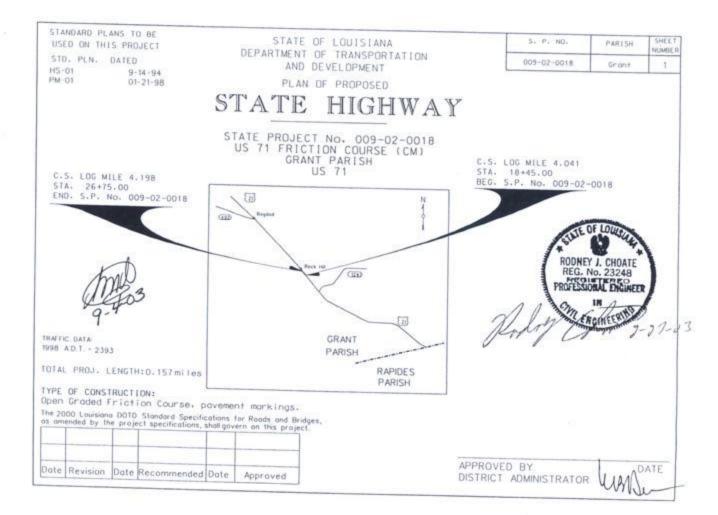

T

	State Project No.	Parish	Sheet No
	009-02-0018	Grant	2
DESIGN CONCEPT			
PROJECT LOCATION AND LIMITS This project is located on US 71 just south of Rock Hill. It begins at station 18+45, which is loc along US 71 for 0.157 mile. The project ends at station 26+75.	ated 615' north of mile marker 8	5. It proceeds nort	hward
EXISTING ROADWAY The existing roadway is a 24 ft. wide travelway with paved shoulders. The existing surfac Shoulders are 10' width asphaltic concrete over a soil cement base.	ring on the travelway is asphaltic	concrete over stab	ilized base.
PROPOSED ROADWAY Plan intent is to place an open graded friction course on the existing travelway.			
MISCELLANEOUS WORK Additional work will consist of replacing the existing roadway markings (painted) and refl	lectorized markers.		
			INSN


		State Project No.	Parish	Sheet N
		009-02-0018	Grant	3
1) GI	GENERAL NOTES			Sheet 1 of
211	The total funding for this contract is fixed, and cost cannot overrun. The Engin	eer may adjust an antisis of the		
2) IT	and or end of the Engin	eer may adjust quantities of work herein	to remain on budg	et.
0 11	EM 713-01, TEMPORARY SIGNS AND BARRICADES:			
- 57	The "Do Not Pass" and "Pass With Care" signs will be erected at the same time	as the advance warning signs for the pro-	viect.	
1.24		o porto in pro		
123				
-				
1				
00				
11				
10				
55				
11				
E.				
10				
194				
1				
172				
1452				
41.2				
240				
13				
11				
250				
124				
1224				
100				
			1	
			1	1.111
			1	INVIN


I


			State Project No.	Parish	Sheet
	0.22		009-02-0018	Grant	4
Surf	acin	g			
				ITEM S-001 Open Graded Course	Sheet 1 of Friction
STA. 18+45	STA. 26+75	DESCRIPTION Travelway	Length (ft.)	Width (ft.)	(Square yards)
		Traverway	830.0	24.0	2213
					-
				_	
					-
					-
					14
				-	
					+
					-
					*
				Sub Total	2212
				Column Total	2213
				Project Total	2213
				Jeer Lonar	Um


41

	Nº O	State Project No.	Parish	Sheet No.
	Jenax	009-02-0018	Grant	5
	Summary Of Estimated Quanti	ties	Is	sheet I of
ITEM NO.	ITEM NAME			10011
713-01	Temporary Signs and Barricades	UNIT	QUANTITY	
		Lump	Lump	
727-01	Mobilization	Luma		
731-02	P. 8	Lump	Lump	
/31-02	Reflectorized Raised Pavement Markers	Ea.	21	10.000
737-01-A	Painted Teaffin Section (B. 1991)			+ 47
737-02-A	Painted Traffic Striping (Solid Line)(4" Width) Painted Traffic Striping (Broken Line)(4" Width)	Mi.	0.519-	2.482
	same surprig (broken Line)(4 Width)	Mi,	0.104	0.157
S-001	Open Graded Friction Course			
		Sq. Yd.	2213	21-1-3
_				
			1	
			11.140	1
			UM	When

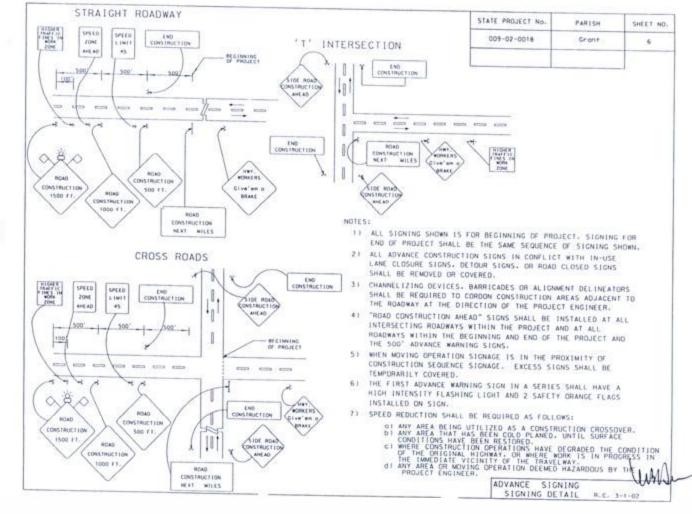

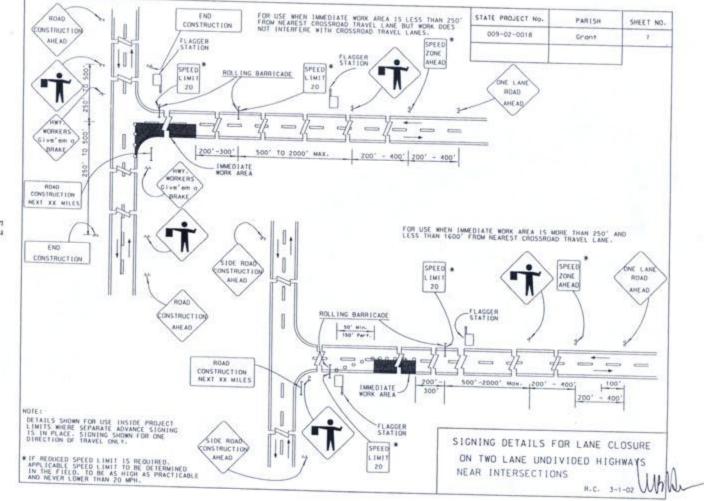

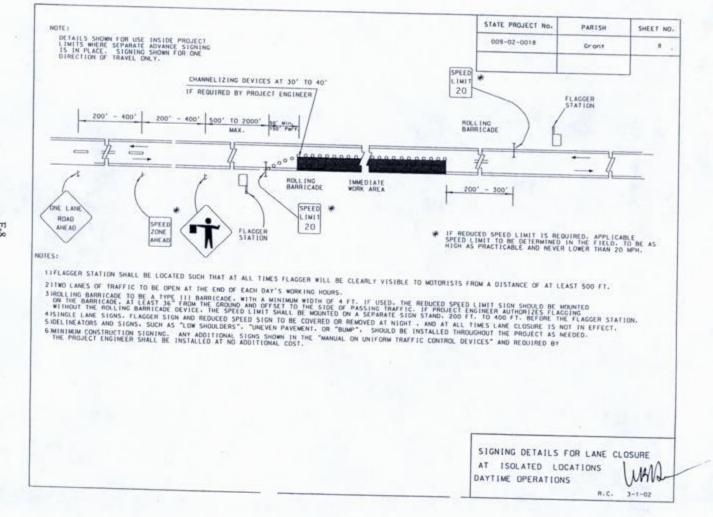


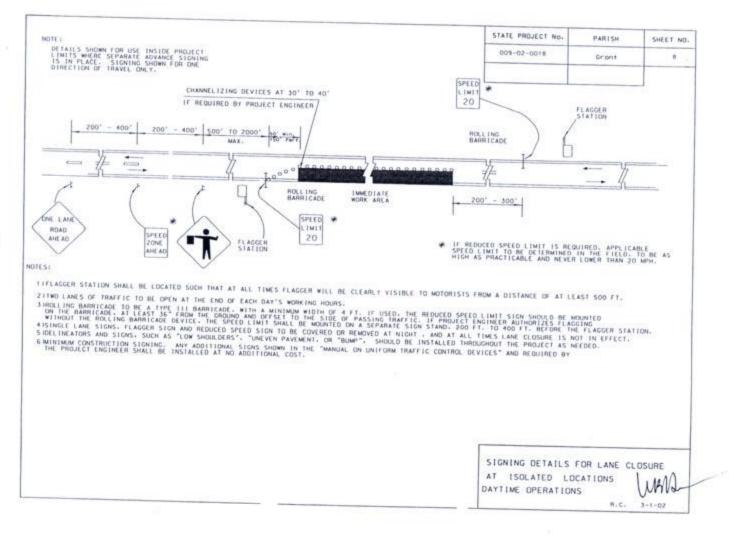

# Appendix C

## Job Mix Formula

87/15/200	3 14:19	3183910115		LUIL				
WATT MENU SELE	CTION-31	Louisiaha	Department of Tr	ansportation and Devel	lopment			10 03-22-0730 (5/97) TRIC / ENGLISH
	<u>E</u> (M /E)	ASPHALTIC	CONCRETE J	IOB MIX FORMUL	A	0	S	51
roj.No. 00	9-02-0018		lant Code	H826 Mix C			Seq. N	
arris append	1=Batch Screen/ess		DT/Lane		loong Time:		Mg/Hr (Tons/H	Wet
		Continuous Gse 2.612	Pbe E.0 Nom Agg.		93.3	Pba		Corr. Fact _0.02
AP	Geb 2.604	Proj. Cont.	Diamond B	The second se		- A	Bil Dean	-0.04
A.F		Contraction of the second	SOURCE			OT   Mix	SP.GRAV.	Fr.Rate
	CODE	0.0000000000000000000000000000000000000	SOURCE			F. + Percent		
Asphalt Cement(A	(C) 660	PG76-22M	41CW	Eagle/Marlin	CF% F		1.030	(1-4)
Crushed Appregate		*#78 SS	AB13	Pinebluff	72	72 67.2	2.592	_1
Crushed Aggregate	634	#89 LS	AA50	Vulcan	20	20 18.7	2.671	3
Screenings	643	#11 \$\$	AB13	Pinebluff	8	8 7.4	2.000	
Coarse Sand Fine Sand					+ +	_		
Other					1 1	-	-	10000
Other					and the second		1	
Lime								
Acti-Strip(AS)		Adhere La2	5730	ARRMAZ		0:6	Stiff Limits	0.5 - 0.7
ecialmed Materials					4			
Recisimed AC				Interfibe		0.1	Fiber AC	
Other	Fiber				<u></u>			
Co	intractor's Result		MALL TEST PR				vi Validation	JMF
010	Average 2 473	1 2	3	4		Ava	rage	Limits
GMB	2.173				-			
VCA	2.368				-			18 % Min
% Voids	8.2				-			
% VMA								- 68.5
% VFA								
Drain down	0.08							,3 max
New,0.1/mm(1/100)	n)				-			
RECOMMENDED	FORMULA	LOOSE MIX RESULT	rs	JMF		DEPAR	TMENT RESUL	LTS
nm/um In		1 2	AVG.	Limits		11.10140700000122781		
63 2 1/2					1	Adjustment Fact		
50 2	100			100		Tensile Str., Contr		
7.5 1 1/2	100			100		Tensile Str. Retir	0 (1 OK),76	
19 3/4	100			100		Ross Count,%(1	1951	100
2.5 1/2	92			88-96	1.0	%Ret. Asph. Coal		
9.5 3/8	64			60-68				
75 No.4	15		100	. 12-20		Effective AC,%		6.0
36 No.8	8			5-10		Absorbed AC.%		0.8
18 No.16	6							
00 No.30	5					%Natural Sands		· · · · · · · · · · · · · · · · · · ·
00 No.50	4		1.			Sand Equivalent		
50 No 100	3.4	-						
AC Extract.	2.3			2-4		Moisture Content	of Mar W	
Crushed	100			6.3 - 7.1		Opt. Mixing Temp		300
a Temp C (F)	300			275-325		Opt. Compaction 1		275
AC (Met/Sc)	6.6			6.5 . 6.7	10			
S (Meter)	0.6		10	0.5 - 0.7	100	Abson Recov.,Pa	S (Polses)	
and the local division of the local division			ma 1	0				
mitted for the Co	Stanctor by:	0075 200	uk Jal	asy a		Date:	061.10	2-1031
posal Approved	(Yes) NO )	Lab:	ATT:	54	<	Date:	06-1	1-03
raves ( No)		19804	ash 1ª	0		Date:	061-11	1/1-193
rised Specs.:			0	Dat	e First Use		12161-11	141-1013
marks D r a	1 n d o	WINI LAISITI	M] [D]6] :	319111	1	1111	1111	1111
						ILH	111	+ bl I
			TOUTO FOR TH	E DOD IE CT OV		1 1	A I	25-
		APP	NOVED FOR TH	E PROJECT BY:		Call	AN IC	-25-
						1		0

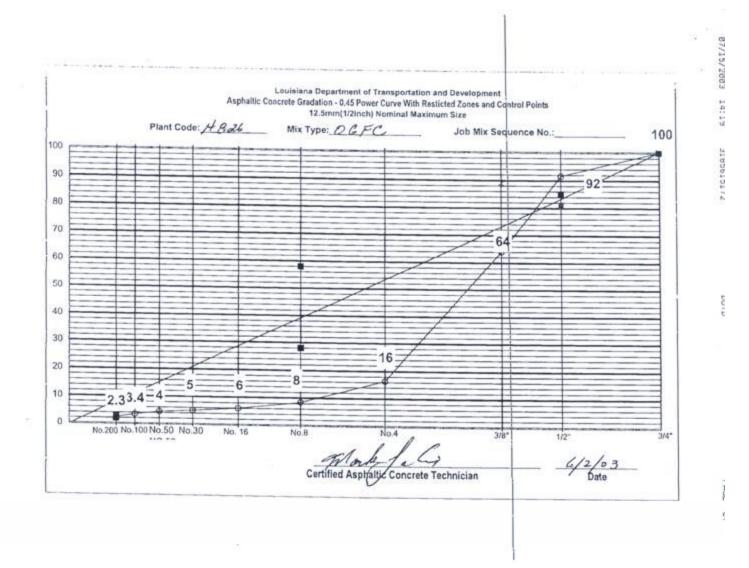

# Appendix D

Film Thickness Calculation

### OGFC Film Thickness Calculations Based on Surface Area

Sieve Size, mm (in)	Percent Passing	"Surface Area Factor (m <sup>2</sup> /kg)	Surface Area (m <sup>2</sup> /kg)
37.5 (1.5)	100	0.41	0.41000
25 (1)	100		
19 (3/4)	100		
12.5 (1/2)	92		
9.5 (3/8)	64		
4.75 (No. 4)	16	0.41	0.06560
2.36 (No. 8)	8	0.82	0.06560
1.18 (No. 16)	6	1.64	0.09840
0.6 (No. 30)	5	2.87	0.14350
0.3 (No. 50)	4	6.14	0.24560
0.15 (No. 100)	3.4	12.29	0.41786
0.075 (No. 200)	2.3	32.77	0.75371
Total S	Surface An	ea	2.20027

Ľ

% VMA = 22.1	G <sub>se</sub> = 2.612	G <sub>mb</sub> = 2.173
% VTM = 8.2	P <sub>b</sub> = 6.7%	G <sub>mm</sub> = 2.368
P., = 6.6%	Phy = 0.1%	G., = 2.604

Volume of Asphalt Binder	13.9	%
Weight of Asphalt Binder	143.17	kg
Weight of Aggregate	2026.072	kg
Weight of Asphalt per kilogram of aggregate	0.070664	1404

Actual Asphalt Film Thickness

31.2 microns

# Appendix E

LADOTD & Contractor's Project Personnel Comments

### LADOTD & Contractor's Project Personnel Comments

### Nicholas F. Verret, Jr., LADOTD District 08 Design, Water Res. & Dev. Engineer

"It is obvious that this material is functioning as intended, since you can see water bleeding through it onto the shoulder after a rain......"

### Cephas Bowie, Jr., LADOTD District 08 Laboratory Engineer

"The mix design and application at this particular site on US 71 has eliminated the potential for hydroplaning. The mix provided drainage from the travel lanes and has performed well under traffic. This site is in a curve on a hill which allows the water from the travel lanes to either flow to the shoulders or down the travel lane edges during a heavy rain, however, it would be better to lay the OGFC on the travel lanes and shoulders or provide alternate drainage through the shoulders (I realize that our project was a CM job and the monies were limited). This project is performing very well."

### Mark Lacroix, Quality Control Manager, Diamond B. Construction Co., LLC

"1) Allow skid 2 and 3 aggregate in the mix. Follow current HM specs which allow 30% skid 1 and 50% skid 2 by weight of total mix. This would allow contractors to utilize commonly inventoried materials while not impacting safety.

2) Eliminate Lottman sensitivity test and evaluate agg/AC compatibility by performing a boil test. The coarse aggregate structure of the mix makes it difficult for the sample to hold together during the thaw cycle. The current spec called for 5 cycles. On the project we did, this was waived.

3) Run plant production at least 150 tons before sampling to allow the plant bag house to purge. The small project that we did showed a finer gradation than was designed as a result of this. Even so the material is functioning as intended."