PHOTO RADAR SPEED ENFORCEMENT IN A STATE HIGHWAY WORK ZONE:

DEMONSTRATION PROJECT YEON AVENUE

Final Report

SR 500-390

PHOTO RADAR SPEED ENFORCEMENT IN A STATE HIGHWAY WORK ZONE:

DEMONSTRATION PROJECT YEON AVENUE

SR 500-390

by

Mark Joerger, Senior Research Analyst

for

Oregon Department of Transportation Research Section 200 Hawthorne Ave. SE, Suite B-240 Salem OR 97301-5192

April 2010

Technical Report Documentation Page							
1. Report No. OR-RD-10-17	2. Government Accessio	n No.	3. Recipient's Catalog	g No.			
4. Title and Subtitle		5. Report Date					
Photo Radar Speed Enforcement in a	Photo Radar Speed Enforcement in a State Highway Work Zon			April 2010			
Yeon Avenue Demonstration Project		6. Performing Organi	zation Code				
7. Author(s)			8. Performing Organi	zation Report No.			
Mark Joerger, Senior Research Analy							
9. Performing Organization Name and Add	10. Work Unit No. (TRAIS)						
Oregon Department of Transportation Research Section	n						
200 Hawthorne Ave. SE, Suite B-240	11. Contract or Grant No.						
Salem, OR 97301-5192)		SR 500-390				
Suloni, Olt 97501 5192			5112000 590				
12. Sponsoring Agency Name and Address			13. Type of Report and	Period Covered			
Oregon Department of Transportation	n						
Research Section			Final Report				
200 Hawthorne Ave. SE, Suite B-240)		1				
Salem, OR 97301-5192			14. Sponsoring Agenc	y Code			
			1 0 0	<i>.</i>			
15. Supplementary Notes							
16. Abstract							
The 2007 Oregon legislative accombly as	and House Dill 2466 all	uning the One set	Demontry and of Transman	utation to soo			
The 2007 Oregon legislative assembly pa photo radar in ODOT work zones on non-							
impacts of this enforcement action. This r							
speed through an active highway work zo							
that persisted following the photo radar enforcement periods. During photo radar enforcement periods, speeding was							
reduced by an average 27.3% at the traffic sensor site within the work zone. The observed speeding reduction was							
temporary and did not persist beyond the departure of the photo radar enforcement van.							
17. Key Words:		18. Distribution Statement					
WORK ZONE, DHOTO DADAD, TDAFELC SPEED.		Copies available from NTIS, and online at					
WORK ZONE; PHOTO RADAR; TRAFFIC SPEED; ENFORCEMENT; SAFETY; SPEED SENSOR.		http://www.oregon.gov/ODOT/TD/TP_RES/					
			-				
19. Security Classification (of this report)	20. Security Classification	(of this page)	21. No. of Pages	22. Price			
Unclassified	Unclassified	× 1	25				
Technical Report Form DOT F 1700.7 (8-72)	Reproduction of cor	nnleted nage authoriz		d on recycled paper			

SI* (MODERN METRIC) CONVERSION FACTORS										
A	APPROXIMATE	CONVERSI	ONS TO SI UNIT	'S	AF	PROXIMATE CO	ONVERSI	ONS FROM SI UN	ITS	
Symbol	When You Know	Multiply By	To Find	Symbol	Symbol	When You Know	Multiply By To Find		Symbol	
		<u>LENGTH</u>				LENGTH				
in	inches	25.4	millimeters	mm	mm	millimeters	0.039	inches	in	
ft	feet	0.305	meters	m	m	meters	3.28	feet	ft	
yd	yards	0.914	meters	m	m	meters	1.09	yards	yd	
mi	miles	1.61	kilometers	km	km	kilometers	0.621	miles	mi	
		AREA					<u>AREA</u>			
in ²	square inches	645.2	millimeters squared	mm ²	mm ²	millimeters squared	0.0016	square inches	in ²	
ft^2	square feet	0.093	meters squared	m^2	m ²	meters squared	10.764	square feet	ft^2	
yd^2	square yards	0.836	meters squared	m^2	m ²	meters squared	1.196	square yards	yd ²	
ac	acres	0.405	hectares	ha	ha	hectares	2.47	acres	ac	
mi ²	square miles	2.59	kilometers squared	km ²	km ²	kilometers squared	0.386	square miles	mi ²	
VOLUME				VOLUME						
fl oz	fluid ounces	29.57	milliliters	ml	ml	milliliters	0.034	fluid ounces	fl oz	
gal	gallons	3.785	liters	L	L	liters	0.264	gallons	gal	
ft ³	cubic feet	0.028	meters cubed	m ³	m ³	meters cubed	35.315	cubic feet	ft ³	
yd ³	cubic yards	0.765	meters cubed	m ³	m ³	meters cubed	1.308	cubic yards	yd ³	
NO	TE: Volumes greater th	nan 1000 L shal	l be shown in m^3 .							
		MASS					MASS			
oz	ounces	28.35	grams	g	g	grams	0.035	ounces	OZ	
lb	pounds	0.454	kilograms	kg	kg	kilograms	2.205	pounds	lb	
Т	short tons (2000 lb)	0.907	megagrams	Mg	Mg	megagrams	1.102	short tons (2000 lb)	Т	
<u>TEMPERATURE (exact)</u>			TEMPERATURE (exact)							
°F	Fahrenheit	(F-32)/1.8	Celsius	°C	°C	Celsius	1.8C+32	Fahrenheit	°F	
*SI is fl	he symbol for the I	nternational	System of Measure	ment	<u>II</u>					
51 15 1	it symbol for the h									

DISCLAIMER

This document is disseminated under the sponsorship of the Oregon Department of Transportation and the United States Department of Transportation in the interest of information exchange. The State of Oregon and the United States Government assume no liability of its contents or use thereof.

The contents of this report reflect the view of the authors who are solely responsible for the facts and accuracy of the material presented. The contents do not necessarily reflect the official views of the Oregon Department of Transportation or the United States Department of Transportation.

The State of Oregon and the United States Government do not endorse products of manufacturers. Trademarks or manufacturers' names appear herein only because they are considered essential to the object of this document.

This report does not constitute a standard, specification, or regulation.

PHOTO RADAR SPEED ENFORCEMENT IN A STATE HIGHWAY WORK ZONE: DEMONSTRATION PROJECT YEON AVENUE

TABLE OF CONTENTS

1.0	INTRODUCTION	1
	OVERVIEW	
	LITERATURE REVIEW	
3.0 1	METHODOLOGY	5
	SPEED AS A PROXY FOR SAFETY DATA ACQUISITION TECHNOLOGY	
3.3	PHOTO RADAR ENFORCEMENT	6
	DATA COLLECTION	
4.0	RESULTS	9
4.2	PRE-WORK ZONE DURING PROJECT POST-WORK ZONE	9
5.0	CONCLUSIONS	13
6.0	REFERENCES	15

LIST OF FIGURES

Figure 1.1: Aerial view of work zone site in northeast Portland, Oregon.	2
Figure 4.1: Speeding vehicles by hour of the day in the two months prior to start of work in the	
project work zone	9
Figure 4.2: Speeding vehicles by hour of the day during the active life of the work zone showing the	
effect of photo radar enforcement	10
Figure 4.3: Speeding vehicles by hour of the day in the fifteen days following completion of project	
work and closure of the work zone	11

1.0 INTRODUCTION

1.1 OVERVIEW

In June 2007 the State of Oregon amended ORS 810.438 and 810.439 authorizing the use of photo radar in work zones on Oregon highways. The Oregon Department of Transportation (ODOT) conducted an evaluation of an initial photo radar installation in a highway work zone and will report back to the legislature as part of the reporting requirements of the bill. Radar use on highways is restricted to state work zones and is valid until December 31, 2014.

Oregon has averaged more than 20.5 billion annual vehicle miles traveled (VMT) between 1998 and 2007. In 2007 there were 44,162 vehicle crashes on Oregon roads and highways resulting in 455 fatalities; 591 of these crashes took place in work zones, resulting in 11 fatalities.

Every day the State of Oregon operates within over 500 work zones across the state. These sites may be operational day or night with approximatly 80% of these sites seeing only day work (anytime between 7:00 a.m. and 7:00 p.m.) and 20% seeing only night work (anytime between 8:00 p.m. and 4:00 a.m.) (*Keller 2008*). In ODOT Region One, where the evaluation site was located, construction projects nearly all occur at night with most maintenance operations conducted during the day.

1.2 RESEARCH PROBLEM STATEMENT

The 2007 Oregon legislative assembly passed House Bill (HB) 2466, allowing the Oregon Department of Transportation to use photo radar in ODOT work zones on noninterstate state highways. The objective of this research was to evaluate the impact of photo radar on safety in a work zone and provide a quantitative answer to the question of whether photo radar speed enforcement causes speed reduction in work zones. It looked to determine if there was a measurable impact on the safety of the work zone as ev aluated by traffic speed, as well as create a benchmark for the biennial evaluations of photo radar in work zones required by HB 2466.

Given strict timeline and budget restrictions, the study focused on traffic speed as an indicator of general safety conditions. Evaluation of direct measures would require multiple work zone sites and extended observation periods. Therefore, the research recorded traffic speed impacts within a specific work zone.

The selected work zone was associated with the Yeon preservation project on US 30 – Lower Columbia River Highway in northeast Portland, Oregon. The project work zone stretched two miles through an industrial area. Traffic is heavy (Average Annual Daily Traffic: 27,900 vehicles in 4 lanes) with a large number of trucks. The roadway is four lanes plus a continuous left turn lane. The preservation project included curb work and a

grind/relay of the traffic lanes. Work began in March of 2009 and continued into mid-September of the same year.



Figure 1.1: Aerial view of work zone site in northeast Portland, Oregon.

2.0 LITERATURE REVIEW

Highway work zones may feature complex and transitory traffic patterns that can increase the level of risk for both passing motorists and work zone crews. This condition is made more hazardous on highways with a greater traffic speed. Voluntary compliance with reduced work zone speed limits is often low and automated enforcement may be especially helpful in reducing speeds due to its high visibility.

In a 1992 study by the Virginia Transportation Research Council, increasing difficulties in enforcing posted speed limits on the Capital Beltway around Washington, D.C. led local officials to propose that experiments be conducted with photo-radar to determine if it could help reduce the average speed and speed variance in drivers. The study concluded that is was operationally feasible to use photo-radar technology to detect and photograph speed violators on high-speed, high-volume roads (*Lynn et al. 1992*).

In a 1998 review, *Managing Speed: Review of Current Practices for Setting and Enforcing Speed Limits,* William Glauz examined the effects of handing the control of speed limits back to the states by the federal government. The review touches on aspects of what enforcement programs states have started to curb speed-related crashes, including the affects of photo-radar enforcement. Glauz concludes that automated enforcement has consistently shown to be an effective means of reducing crashes on sections of road where it is utilized consistently.

In a 1998 article by Steven A. Bloch entitled, *Comparative Study of Speed Reduction Effects of Photo-Radar and Speed Display Boards*, Bloch examined two forms of automated motor-vehicle speed control, speed display boards and photo-radar by attempting to answer three issues:

(a) which of these devices is more effective in lowering speeds;

(b) whether supplementing display boards with police enforcement makes them more effective; and

(c) which device is more cost-effective.

Bloch concludes that both speed display boards and photo radar can be effective traffic safety tools for reducing vehicle speeds. Both devices were found to reduce vehicle speeds while deployed, lowering speeds 7 to 8 km/h where the baseline speed averages 55 to 56 km/h. The devices appeared particularly effective at reducing the number of vehicles traveling 16 km/h (10 mph) or more over the speed limit. Cost-effectiveness estimates demonstrated consistently that the un-enforced speed display board was the most cost-effective, the enforced display board was second, and photo-radar was third. Results of the cost per deployment analysis showed that: (a) Un-enforced speed display

boards cost just one-ninth as much as enforced display boards, and (b) enforced display boards cost 40 percent less than photo-radar assuming that police use an outside vendor, and 60 percent less assuming that police purchase the equipment.

The National Highway Traffic Safety Administration released guidelines for automated speed enforcement (*NHTSA 2008*). These guidelines cover many aspects of program planning and operations, including the following:

- site selection;
- system procurement;
- resource and personnel management;
- revenue management;
- planning for program evaluation;
- marketing and media relations; and
- program rollout.

The NHTSA guidelines also feature an extensive reference section.

The only prior study of photo radar specifically in work zones was based on analysis of short (one-hour) video records of work zones on interstate highways in Illinois during off-peak hours. That study showed a speed reduction between 3.4 to 7.9 MPH during photo radar operation, with dramatic reductions in vehicles exceeding the speed limit. The study was unable to verify a consistent 'halo effect' wherein the speed reduction might have persisted beyond the removal of the photo radar equipment. (*Benekohal et al. 2009*)

The Yeon Avenue work zone study reported upon in herein built upon the Illinois study by gathering speed data over a much longer time period and examining a large number of transitions between periods of enforcement and non-enforcement. This study also compared photo radar enforcement periods to equivalent time of day periods without enforcement to assure fair comparison.

3.0 METHODOLOGY

Studying safety and speed enforcement within a short section of highway during the relatively short duration of a construction or maintenance project offers a number of challenges. Data must be collected without interfering with the work being done on the project, and be collected in a manner which is not compromised by the ongoing work. There must be flexible data collection coverage for periods when local law enforcement is able to provide speed enforcement and coverage for comparable periods speed enforcement.

3.1 SPEED AS A PROXY FOR SAFETY

Measuring a safety impact in a short length of highway over a short time period presents a research obstacle. Crashes can be considered random and rare events that would be expected to yield a low number of instances (possibly zero) over the length of any specific work zone project. Evaluating the statistical magnitude of a change in safety may be effectively impossible if crashes are the selected measurement.

There is, however, a clear and broadly recognized correlation between speeding and safety which allows the use of speeding as a proxy for crash safety. Given the constraints of evaluating safety within a short-lived work zone, the use of speeding as a measure of safety was a reasonable approach.

The posted speed limit throughout the project work zone was 40 miles per hour (MPH). Preliminary traffic monitoring revealed a mean vehicle speed very close to 45 MPH. Impacts on speed of work zone signage and photo radar enforcement were evaluated on the basis of the percentage of vehicles traveling faster than the mean speed of 45 MPH. Consideration was given to evaluating 'speeding' based on vehicles traveling faster than the 85th percentile speed (50 MPH in this case), but the mean speed was selected based on greater statistical sensitivity around the mean and on the assumption that all drivers traveling faster than the mean speed reduction measures.

3.2 DATA ACQUISITION TECHNOLOGY

There are a number of techniques available to collect traffic speed data, but the specific conditions of the selected work zone environment eliminated many of these options.

• Rubber 'road tubes' are often used for short-term traffic count and speed collection, but the high traffic volume, high heavy truck proportion, and multi-month length of the project are all contra-indicators for this technology.

• Embedding 'inductive loop' sensors into the pavement would solve the high traffic volume and heavy truck problems, but installation of the loops would have been expensive and the preservation project included grinding away the roadway and laying a new surface which would destroy the inductive loops at some point during the project.

A newer data collection technology in the form of radar traffic sensors eliminates the issues of wear and inclusion into the roadway surface. The radar unit selected for this study was the Wavetronix SmartSensor HD which can measure traffic volume and classification, average speed, individual vehicle speed, lane occupancy, and presence for up to ten lanes of traffic. The unit is small, inconspicuous, and mounts to an available lighting or utility pole along the roadway. It operates on a radio band which does not interfere with law enforcement radar.

3.3 PHOTO RADAR ENFORCEMENT

The Yeon preservation project lies within the jurisdiction of the Portland Police Bureau. The Traffic Division of the Portland Police Bureau has operated photo radar enforcement vans since 1996 and was willing to support this research with their equipment and officers. The contractor and police coordinated their schedules to best utilize police manpower and equipment availability. The Yeon preservation project work zone could only be enforced as a work zone with increased fines if at least one worker was present and actually performing work, and the great majority of the work was performed during evening hours.

The Portland Police Bureau provided a total 207 hours of photo radar enforcement. During that time they recorded 2069 speed violations and issued 1014 citations.

3.4 DATA COLLECTION

The radar traffic sensor was installed and data collection of average speed and traffic volume in 10-minute 'bins' was begun in November, 2008. This was done several months before the start of work on the preservation project in order to gather baseline data and to assure that the traffic sensor was a suitable tool for the job. The traffic sensor remained in continuous operation for weeks beyond the end of the preservation project and was removed in October, 2009. Key time periods for data collection were:

- prior to implementation of the work zone or photo radar enforcement (November, 2008 to March, 2009);
- with implementation of work zone signage but without photo radar enforcement (March, 2009 to September, 2009);
- with implementation of work zone signage and during periods of photo radar enforcement (March, 2009 to mid-September, 2009); and
- with the work zone and photo radar signs/equipment removed completely (late-September, 2009).

Comparison of these key periods isolated the effects of work zone signage, photo radar enforcement, and the extent to which photo radar enforcement impacts might carry over to periods of no enforcement.

3.5 DATA CLEANING

Initial data screening identified statistical differences in vehicle speeds during weekends and holidays compared to weekdays. The weekends had speeds averaging approximately two MPH higher than weekdays. Since all photo radar enforcement was being done during active weekday evening work periods, the weekend and holiday speed data was removed from the baseline comparison data.

Also removed from the baseline data were sections where construction activities or lane closures were taking place in the immediate vicinity of the data collection radar sensor, or where traffic at the sensor was otherwise identified as not 'free flowing'.

Data from November and December 2008 were not used. November was a partial month of data and December had a severe snow/ice period that severely impeded traffic patterns and flow. March data was also excluded from the analysis as the project had a phased start in that month that had various features of the work zone (signage, equipment positioning, cones and barricades) implemented at differing times during the month.

4.0 RESULTS

4.1 PRE-WORK ZONE

The posted speed throughout the project work zone on Yeon Avenue is 40 miles per hour. Mean vehicle speed and the number of speeding drivers varied throughout the day. Peak numbers of speeding vehicles in the early morning with a smaller peak in the early evening as shown in Figure 4.1 proved to be a standard pattern over the duration of the project. Mean speed was 44.3 MPH with an 85th percentile speed of 49.2 MPH. The weighted percentage of vehicles traveling at more than 45 MPH was 46.0%.

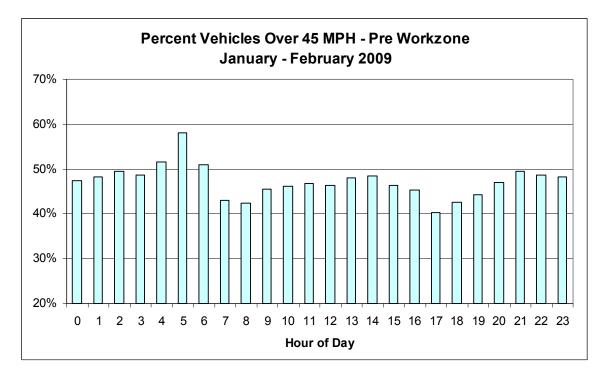


Figure 4.1: Speeding vehicles by hour of the day in the two months prior to start of work in the project work zone

4.2 DURING PROJECT

The early morning and early evening speeding peaks observed in pre-project speed monitoring continued and were more pronounced during the period in which the work zone was identified by signage and work was ongoing. Some of this change in speeding pattern may have been due to changes in weather and sunrise/sunset times as the calendar moved from winter into spring and summer. Liu and Chen (2009) reported such seasonal

and weather related factors in their analysis of speed related crashes. Mean speed during non-enforcement was 44.2 MPH with an 85th percentile speed of 49.5 MPH. The weighted percentage of vehicles traveling faster than 45 MPH during periods of non-enforcement was 48.7%.

The impact of photo radar enforcement on speeding is substantial (Figure 4.2). The average reduction in vehicles traveling faster than 45 MPH in same-hour comparison is 23.7%. These reductions were seen in same-hour comparisons in each of the individual months as well as in the aggregate. It should be noted that this pronounced speeding reduction is based on speed at the traffic monitoring radar where drivers approaching from one direction had not yet passed by the enforcement site and would have no visual warning of active radar enforcement. It may be assumed that the entire reduction in speeders at the traffic sensor came from one direction.

Persistence of speeding reduction following active photo radar enforcement was not evident. The hour following removal of the enforcement equipment showed no reduction in speeders compared to the same hour not following radar enforcement during the same month. Examining the hours during which photo radar enforcement was present on the next comparable day (non-weekend, non-holiday) also showed no detectable reduction in speeding vehicles.

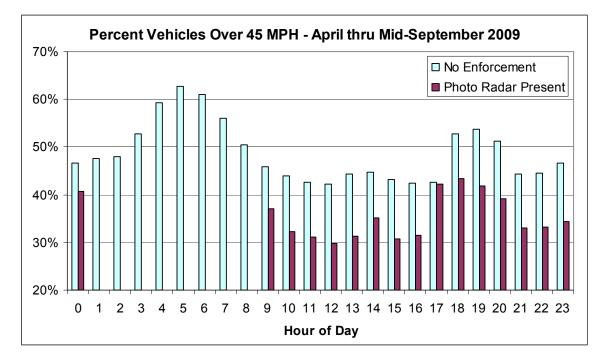


Figure 4.2: Speeding vehicles by hour of the day during the active life of the work zone showing the effect of photo radar enforcement.

4.3 POST-WORK ZONE

The pattern of early morning and early evening speeding peaks continued following the end of the project and the removal of all work zone signage. Mean speed during the last half of September was 44.8 MPH with an 85th percentile speed of 49.9 MPH. The weighted percentage of vehicles traveling at more than 45 MPH was 52.0%. These speeds are comparable to the speeds in the project area prior to the start of work. Improved pavement smoothness may have contributed to the overall increase in speeding seen in Figure 4.3 as compared to the period before the project start.

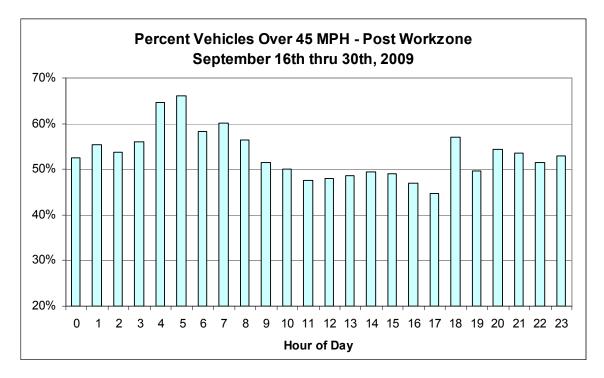


Figure 4.3: Speeding vehicles by hour of the day in the fifteen days following completion of project work and closure of the work zone.

5.0 CONCLUSIONS

Photo radar enforcement, as conducted by the Portland Police Bureau, has a substantial impact on reducing the number of speeding vehicles in a construction work zone. During photo radar enforcement periods, speeding was reduced by an average of 27.3% at the traffic sensor site within the work zone. This large reduction in speeding was observed even though vehicles passing the traffic sensor from one direction had not yet seen the enforcement activity. A greater reduction in speeding would be expected if photo radar enforcement covered both directions of travel. Overall mean and 85th percentile speeds during periods of non-enforcement remained quite stable throughout the study period, which emphasizes the impact of photo radar speed enforcement as a tool to reduce speeding in a work zone environment.

The observed speeding reduction was temporary and did not persist beyond the departure of the photo radar van. Other activities such as work zone signage and the presence of active work in the work zone did not produce an observable effect on speeding when compared to the pre-construction zone monitoring period.

6.0 **REFERENCES**

Benekohal et al. Speed Photo-Radar Enforcement and Its Effects on Speed in Work Zones. In *Transportation Research Record: Journal of the Transportation Research Board*, No, 2096, Transportation Research Board of the National Academies, Washington D.C., 2009: pp. 89-97.

Bloch, Steven A. Comparative Study of Speed Reduction Effects of Photo-Radar and Speed Display Boards. In *Transportation Research Record: Journal of the Transportation Research Board*, No. 1640, Transportation Research Board of the National Academies, Washington, D.C., 1998, pp. 27-36.

Glauz, William D. Managing Speed: Review of Current Practices for Setting and Enforcing Speed Limits. *Transportation Research Board Special Report*. No. 254. Transportation Research Board of the National Academies, Washington, D.C., 1998.

Liu, C. and Chen, C.L. *An Analysis of Speeding-Related Crashes: Definitions and the Effects of Road Environments*, NHTSA Technical Report DOT HS811 090, U.S. Department of Transportation, 2009.

Lynn et al. *Automated Speed Enforcement Pilot Project for the Capital Beltway: Feasibility of Photo Radar*. Charlottesville, VA, Virginia Transportation Research Council, 1992.

National Highway Traffic Safety Administration. *Speed Enforcement Camera Systems: Operational Guidelines*. Publication DOT HS 810 916, U.S. Department of Transportation, March 2008.