



MISSOURI
S&T

CENTER FOR TRANSPORTATION INFRASTRUCTURE AND SAFETY

ENGINEERING POLICY GUIDELINES FOR DESIGN OF EARTH SLOPES

By

J. Erik Loehr, Ph.D., P.E. –

Lead Investigator

*Civil and Environmental Engineering
University of Missouri*

John J. Bowders, Ph.D., P.E.

*Civil and Environmental Engineering
University of Missouri*

Louis Ge, Ph.D.

*Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology*

William J. Likos, Ph.D.

*Civil and Environmental Engineering
University of Missouri*

Ronaldo Luna, Ph.D., P.E.

*Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology*

Norbert Maerz, Ph.D., P.E.

*Geological Sciences and Engineering
Missouri University of Science and Technology*

Richard W. Stephenson, Ph.D., P.E.

*Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology*



NUTC
R242-4
R243-4
R244-4
R245-4
R246-4
R247-4

Disclaimer

The contents of this report reflect the views of the author(s), who are responsible for the facts and the accuracy of information presented herein. This document is disseminated under the sponsorship of the Department of Transportation, University Transportation Centers Program and the Center for Transportation Infrastructure and Safety NUTC program at the Missouri University of Science and Technology, in the interest of information exchange. The U.S. Government and Center for Transportation Infrastructure and Safety assumes no liability for the contents or use thereof.

Technical Report Documentation Page

1. Report No. NUTC R243-4 / R244-4 / R245-4 / R246-4 / R247-4	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Engineering Policy Guidelines For Design Of Earth Slopes		5. Report Date August 2011	
7. Author/s J. Erik Loehr		6. Performing Organization Code	
9. Performing Organization Name and Address Center for Transportation Infrastructure and Safety/NUTC program Missouri University of Science and Technology 220 Engineering Research Lab Rolla, MO 65409		8. Performing Organization Report No. Project # 00023992, 00023783, 00023786, 00023994, 00023785, 00023997	
12. Sponsoring Organization Name and Address U.S. Department of Transportation Research and Innovative Technology Administration 1200 New Jersey Avenue, SE Washington, DC 20590		10. Work Unit No. (TRAVIS) 11. Contract or Grant No. DTRT06-G-0014	
15. Supplementary Notes		13. Type of Report and Period Covered Final	
16. Abstract These guidelines were developed as part of a comprehensive research program undertaken by the Missouri Department of Transportation (MoDOT) to reduce costs associated with design and construction of bridge foundations while maintaining appropriate levels of safety for the traveling public. The guidelines were established from a combination of existing MoDOT Engineering Policy Guide (EPG) documents, from the 4 th Edition of the AASHTO LRFD Bridge Design Specifications with 2009 Interim Revisions, and from results of the research program. Some provisions of the guidelines represent substantial changes to current practice to reflect advancements made possible from results of the research program. Other provisions were left essentially unchanged, or were revised to reflect incremental changes in practice, because research was not performed to address those provisions. Some provisions reflect rational starting points based on judgment and past experience from which further improvements can be based. All of the provisions should be considered as "living documents" subject to further revision and refinement as additional knowledge and experience is gained with the respective provisions. A number of specific opportunities for improvement are provided in the commentary that accompanies the guidelines.		14. Sponsoring Agency Code	
17. Key Words Earth Slopes Load and Resistance Factor Design	18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.		
19. Security Classification (of this report) unclassified	20. Security Classification (of this page) unclassified	21. No. Of Pages 17	22. Price

Form DOT F 1700.7 (8-72)

ENGINEERING POLICY GUIDELINES FOR DESIGN OF EARTH SLOPES

prepared for

Missouri Department of Transportation

by

*University of Missouri
Department of Civil and Environmental Engineering*

and

*Missouri University of Science and Technology
Department of Civil, Architectural, and Environmental Engineering,
and
Department of Geological Sciences and Engineering*

August 2011

Preface

These guidelines were developed as part of a comprehensive research program undertaken by the Missouri Department of Transportation (MoDOT) to reduce costs associated with design and construction of bridge foundations and earth slopes while maintaining appropriate levels of safety for the traveling public. The research program included four broad tasks:

- Task 1 – evaluation of site characterization methods for use in Load and Resistance Factor Design (LRFD) and development of procedures to quantify variability and uncertainty in soil/rock properties,
- Task 2 – evaluation of foundation design methods and completion of a foundation load testing program to improve foundation design,
- Task 3 – evaluation of costs and risks for different LRFD limit states and establishment of appropriate target reliabilities for different classes of roadways/structures, and
- Task 4 – calibration of MoDOT specific resistance factors for design of bridge foundations and earth slopes and development of design guidelines to provide means for implementing the results of the research program.

The research program was conducted by faculty, students, and staff from the University of Missouri and Missouri University of Science and Technology in collaboration with MoDOT personnel and private industry. The research program was completed in Fall 2010. These guidelines, along with several others, serve as the principal deliverables from the research program.

The guidelines were established from a combination of existing MoDOT Engineering Policy Guide (EPG) documents, from the 4th Edition of the AASHTO LRFD Bridge Design Specifications with 2009 Interim Revisions, and from results of the research program. Some provisions of the guidelines represent substantial changes to current practice to reflect advancements made possible from results of the research program. Other provisions were left essentially unchanged, or were revised to reflect incremental changes in practice, because research was not performed to address those provisions. Some provisions reflect rational starting points based on judgment and past experience from which further improvements can be based. All of the provisions should be considered as “living documents” subject to further revision and refinement as additional knowledge and experience is gained with the respective provisions. A number of specific opportunities for improvement are provided in the commentary that accompanies the guidelines.

Disclaimer: The guidelines provided in this document have not been formally adopted by the Missouri Department of Transportation. The opinions, findings, and recommendations expressed in this publication are not necessarily those of the Department of Transportation, Federal Highway Administration. This document does not constitute a standard, specification or regulation.

Principal Investigators

J. Erik Loehr, Ph.D., P.E. – Lead Investigator
Civil and Environmental Engineering
University of Missouri

John J. Bowders, Ph.D., P.E.
Civil and Environmental Engineering
University of Missouri

William J. Likos, Ph.D.
Civil and Environmental Engineering
University of Missouri

Norbert Maerz, Ph.D., P.E.
Geological Sciences and Engineering
Missouri University of Science and Technology

Louis Ge, Ph.D.
Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology

Ronaldo Luna, Ph.D., P.E.
Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology

Brent L. Rosenblad, Ph.D.
Civil and Environmental Engineering
University of Missouri

Richard W. Stephenson, Ph.D., P.E.
Civil, Architectural, and Environmental Engineering
Missouri University of Science and Technology

MoDOT Research Administration

Mara K. Campbell
Director, Organizational Results
Missouri Department of Transportation

William A. Stone, P.E.
Organizational Performance Administrator
Missouri Department of Transportation

Jennifer L. Harper, P.E. – Program Technical Liaison
Organizational Performance Engineer
Missouri Department of Transportation

MoDOT Advisory Team

David D. Ahlvers, P.E.
State Construction and Materials Engineer

Mike A. Fritz, P.E.
Geotechnical Director

Michael D. Harms, P.E.
Assistant State Bridge Engineer

Dennis W. Heckman, P.E.
State Bridge Engineer

Travis D. Koestner, P.E.
Assistant State Construction & Materials Engineer

Suresh P. Patel, P.E.
Senior Structural Engineer

Thomas W. Fennessey, P.E.
Geotechnical Engineer

David J. Hagemeyer, P.E.
Senior Structural Designer

Brian A. Hartnagel, P.E.
Structural Resource Manager

Aaron C. Kemna, P.E.
Senior Structural Designer

Alan D. Miller, P.E.
Geotechnical Engineer

Gregory E. Sanders, P.E.
Structural Development and Support Engineer

Scott B. Stotlemeyer, P.E.
State Bridge Maintenance Engineer

Acknowledgements

Financial Support

Missouri Department of Transportation – Kevin L. Keith, Director
 The Center for Transportation Infrastructure and Safety at Missouri S&T– John J. Myers, Director
 University of Missouri – Robert V. Duncan, Vice Chancellor for Research

In-kind Support

ADSC: The International Association of Foundation Drilling – Michael D. Moore, CEO
 Loadtest, Inc. – John S. Hayes, Jr., Vice President
 Hayes Drilling, Inc. – M. Luke Schuler, Executive Vice President
 Drilling Service Company, Inc. – Mark G. Murphy, President
 Geokon, Inc. – Tony Simmonds, Director of Sales and Marketing
 Synchropile, Inc. – Phillip G. King, President
 Applied Foundation Testing, Inc. – Mike Muchard, Vice President
 Geoprobe Systems, Inc. – Tom Christy, Vice President

University Students, Faculty, and Staff

Brendan C. Abberton, MU	Dan D. Iffrig, MU	Hamilton Puangnak, MU
Gary L. Abbott, MS&T	Wyatt S. Jenkins, MU	Stephanie A. Rust, MS&T
Ahmed Abu El-Ela, MU	Xin Kang, MS&T	Seth D. Scheilz, MU
Dr. Neil L. Anderson, MS&T	Travis J. Kassebaum, MS&T	Justin J. Schmidt, MU
Matthew D. Becker, MU	Mulugeta A. Kebede, MS&T	David L. Schoen, MU
Omar A. Conte, MS&T	Kyle Kershaw, MS&T	Ryan Shaw, MU
Joseph R. Cravens, MS&T	Jennifer Keyzer-Andre, MU	Chen Song, MU
Taylor J. Day, MU	Paul Koenig, MU	Brian S. Swift, MS&T
Paul T. Denkler, MU	Kerry A. Magner, MS&T	Evgeniy V. Torgashov, MS&T
Dan Ding, MU	Kyle D. Murphy, MU	Keydan Turner, MU
Sarah A. Grant, MU	Zachary C. Nikin, MU	Hadleigh L. Tyler, MU
Bethlehem Hailemariam, MS&T	Richard L. Oberto, MU	Thuy T. Vu, MU
Daniel R. Huaco, MU	Site Onyejekwe, MS&T	Daniel W. Weingart, MS&T
Dandan Huang, MU	Mark D. Pierce, MU	

MoDOT Personnel

Perry J. Allen	Bruce A. Harvel	Macy J. Rodenbaugh
David R. Amos	Paul E. Hilchen	Phillip M. Ruffus
Kenneth E. Barnett	Zachary Q. Honse	Daniel J. Schaefer
Robert J. Brandt	Steven H. Jackson	Brent T. Schulte
Scott W. Breeding	Stowe K. Johnson	Nicole A. Scott
Lydia B. Brownell	Randy W. Jones	Dwayne C. Severs
Joseph F. Crader	Joe A. Lamberson	James W. Sharp
George H. Davis	Robert C. Lauer	James L. Shipley
Steven M. Dickson	Twila Lee	Thomas A. Skinner
David T. Dodds	James L. Lennox	Charles S. “Steve” Spiegel
Michael A. Donahoe	Robert S. Marshall	Sheri J. Stevens
Marisa L. Ellison	Robert J. Massman	Easaw Thomas
Rick K. Ellison	Kevin W. McLain	Ricardo N. Todd
Danny L. Everts	Raymond A. Murray	Brett S. Trautman
Rick D. Fredrick	Roy K. Niemeyer	Kenneth A. Tuttle
Jeffery L. Gander	Jerad R. Noland	Richard S. “Steve” Uptegrove
Charles L. Geiger	Steve D. Owens	Jon G. Voss
Aydogan L. Girgin	Keith E. Pigg	Leslie E. Willard
Dale W. Glenn	Treasa A. Porter	
Lucille F. Goff	Steven R. Reedy	

Others

Robert Henthorne - *Kansas Department of Transportation*
Kentucky Transportation Cabinet
 Robert B. Gilbert-*The University of Texas at Austin*
 Antonio Marinucci-*ADSC*
 Charles A. Skouby -*Drilling Service Company, Inc.*

Iowa Department of Transportation
 Brian Liebich-*California Department of Transportation*
 Alan J. Lutenege-*University of Massachusetts – Amherst*
 William Ryan-*Loadtest, Inc.*
 Bruce D. Murphy-*Drilling Service Company, Inc.*

321.1 Guidelines for Design of Earth Slopes

These guidelines provide requirements for design of earth slopes commonly encountered in transportation rights of way. Such slopes commonly include embankment slopes for fills and bridge approaches and excavated slopes in cut sections of roadway. Earth slopes should be designed to maintain stability for conditions and loads that can reasonably be expected to be encountered throughout the life of the slope based on available information regarding site conditions and anticipated loadings. Earth slopes should also be designed such that excessive deformations are not experienced throughout the life of the structure or so that deformations that do occur do not adversely affect the travel way.

321.1.1 General

In the context of these guidelines, “design” of earth slopes generally involves selection of some combination of the following to produce a final slope that will satisfy performance requirements:

1. Slope geometry to include slope inclination, slope width, and slope height;
2. Slope materials to include selection of fill materials for embankments;
3. Materials and methods to provide for appropriate drainage of surface and/or groundwater;
4. Materials and methods for reinforcing a slope to provide necessary stability; and
5. Loading conditions.

For any given slope, some of these parameters will be constrained to satisfy site or project specific requirements so the specific parameters that can be varied to produce acceptable performance will be case dependent.

The remainder of these guidelines is organized into three different articles. EPG 321.1.2 describes general requirements and limits for earth slopes that can be considered routine. The majority of slope designs will be established based on the provisions in this article. EPG 321.1.3 describes provisions that apply for special slope stability problems to include design of remedial measures for sites where slides have occurred, evaluation and design of relatively large embankments on soft soils, and other complex slope stability problems that generally involve considerable risk and potential expense.

321.1.2 Slope Inclination for Preliminary Geotechnical Report

The majority of soil and rock slopes designed for transportation right of way will be designed based on the provisions of this article. Complex slope stability cases (e.g. cases where there is uncertainty regarding likely loading or ground conditions), cases where the consequences of failure are great (e.g. slopes supporting foundations for bridges or retaining walls, unusually large fills, etc.), or cases where a slide has already occurred shall be designed according to EPG 321.1.3 and EPG 321.1.4.

321.1.2.1 Soil Slopes

For design of routine slopes without notable complications, the guidelines provided in Table 321.1.2.1 shall be used to select an appropriate maximum slope inclination based on the soil/rock types present at the specific site. These recommendations should be considered along with other factors that may influence the stability and performance of slopes in establishing final design recommendations. Factors such as presence or absence of structural foundations, adverse seepage conditions, susceptibility to inundation, or presence of notably poor soil/rock, etc. may dictate use of flatter slopes. MCHRP Report 71-9 (MCHRP, 1974) provides recommendations for handling of notoriously problematic soils including

gley, Cheltenham claystone, and Maquoketa clay shale. Soils classified as OH, OL & MH in the ASTM classification are rare and, if encountered, will require special design and/or handling.

Table 321.1.2.1 Guide for Selection of Slope Inclination for Routine Design

Geologic Origin	Glacial, Alluvial & Loessial Soils Rock-free Residual Soils Derived from Shale, Claystone & Siltstone					Residual Soil with Admixed Chert or Rock Fragments ⁴	Class C ⁵
	Sand ¹		Silt/Loess ²	Clay of Low Plasticity	Clay of High Plasticity ³		
General Description							
ASTM Classification	SP,SM	SW,SC	ML, ML-CL	CL	CH	CL,CH,GC	
Backslope	2.5:1	2.0:1	2.5:1	2.5:1	3.0:1	2.0:1	(Standard)
Fill Side Slope	2.5:1	2.0:1	2.5:1	2.5:1	3.0:1	2.0:1	2.0:1
Fill Spill Slope ⁶ :							
H≤20-ft	2.5:1	2.0:1	2.0:1	2.0:1	2.5:1	2.0:1	2.0:1
H>20-ft	2.5:1	2.0:1	2.5:1	2.5:1	3.0:1	2.0:1	2.0:1

¹ Soil caps to control erosion may be required for sandy soils other than SC soils.

² Essentially vertical cut slopes may be used in loess when indicated to be practical by criteria outlined in MCHRP Report 74-1.

³ Soils with extremely high PI (>50) should be used with extreme caution. Consideration should be given to wasting such materials or to use of even flatter slopes than those listed.

⁴ Consider flatter slopes where height of fill exceeds 40 feet and percentage of admixed granular material is less than 40 percent. Refer to MCHRP Report 75-1 (MCHRP, 1976) for additional information.

⁵ Locally steeper slopes for Class C fills are practical only with special handling in excavation and placement.

⁶ Steeper slopes for low spill slopes assume that some form of slope protection be used to control erosion and/or seasonal moisture changes

In most cases, a single value for slope inclination shall be selected for an entire project. See commentary for additional explanation and description.

Slope inclinations for excavated (cut) slopes shall be based on Table 321.1.2.1 and are to be carried uninterrupted beneath structures regardless of the height of cut. No steepening or warping of cut slopes shall be allowed, including cut slopes less than 20 feet in height.

321.1.2.2 Rock Slopes

Rock slopes in limestones, dolomites, and sandstones are normally cut vertically or with a slight batter. Benches shall be provided at a vertical spacing not to exceed 30 feet for cut slopes greater than 30 feet in height. Benches shall be a minimum of 10 feet in width. Benches may be provided at the contacts of different formations (not necessarily at 30 feet) and may vary in width.

Cut slopes in shale, siltstone, and other soft rocks shall be inclined at 2:1.

A flat bottom ditch with a minimum width of 10 feet is required for all rock cut slopes.

321.1.3 Slope Stability Analyses for Special Foundation Investigations

The provisions of this article shall be used for design and analysis of slopes for non-routine slope design. The most common instances for these “site specific” designs is for cases where slides have already occurred, cases with complex site and/or loading conditions, and cases with substantial consequences of failure (e.g. high fills, embankments of soft foundation soils, and slopes with bridge foundations). The provisions of this article shall also be followed for evaluation of overall stability for retaining walls and spread footings founded within slopes.

321.1.3.1 General Considerations

Embankment (fill) and excavated (cut) slopes shall be designed to remain stable throughout the anticipated life of the slope without excessive deformations. The provisions of this article address the issue of stability, or the strength limit state.

321.1.3.2 General Procedure for Slope Stability Analysis Using LRFD Approach

Design of earth slopes according to LRFD concepts can be confusing because current methods for stability analysis commonly produce a “factor of safety”, which is an artifact of traditional ASD methods. While potentially confusing, this fact does not preclude use of LRFD for design of earth slopes, but it does necessitate slight changes to current procedures used for analysis and design of earth slopes (Loehr et al., 2006).

The following procedure shall be utilized for design of earth slopes according to these provisions:

1. Establish site geometry and stratigraphy using available geologic information, boring logs, site surveys and plans, and other information available to the designer;
2. Estimate parameters for each respective stratum within the slope using available laboratory test results, empirical correlations, back-calculations, and other available information;
3. Estimate anticipated pore pressure conditions (required only for effective stress analyses) based on available historical records and judgment;
4. Evaluate the factor of safety for the conditions established using appropriate slope stability analysis methods with *factored parameters* as input; and
5. Compare the computed factor of safety to the limit factor of safety (= 1.0):
 - a. If the computed factor of safety is approximately equal to 1.0, the design is considered acceptable.
 - b. If the factor of safety is significantly greater than 1.0, changes to reduce the computed factor of safety may be considered if significant cost savings can be realized.
 - c. If the factor of safety is less than 1.0, the designer must consider alternative measures to increase the factor of safety and repeat the procedure until a factor of safety approximately equal to 1.0 is achieved.

Current procedures will factor the undrained shear strength, s_u , or the Mohr-Coulomb shear strength parameters, c and φ (or \bar{c} and $\bar{\varphi}$). Resistance factors for factoring of these parameters are provided in EPG 321.1.3.4.

321.1.3.3 Load Factors

Loads to be used for stability evaluations shall be factored according to the Service I limit state. Accordingly, a load factor of 1.0 shall be used for all applied loads, including “surcharge” loads associated with foundations or other surface loads. The soil unit weight shall also be factored using a load factor of 1.0.

321.1.3.4 Resistance factors for short-term, undrained conditions

Stability analyses for short-term, undrained conditions (generally associated with conditions during or shortly after construction) should be performed using factored shear strength parameters established in terms of total stresses without consideration of pore water pressures (i.e. total stress analyses). In

general, the resistance factor to be used is dependent on the slope stability parameter, $\lambda_{c\phi}$, which is determined as

$$\lambda_{c\phi} = \frac{\gamma H \tan \phi}{c} \quad (\text{dimensionless}) \quad (321.1.3-1)$$

where γ is the total unit weight for the soil, H is the slope height, and c and $\tan \phi$ are respectively the intercept and slope of the Mohr-Coulomb failure envelope for the soil in question.

For conditions and strata that can be considered as $\phi = 0$ conditions (saturated soil, undrained loading), the undrained shear strength(s) should be factored as

$$s_u^* = \varphi_{ss} \cdot s_u \quad (\text{consistent units of stress}) \quad (321.1.3-2)$$

where s_u^* is the factored undrained shear strength, s_u is the nominal value of shear strength, and φ_{ss} is the resistance factor determined from Figure 321.1.3.1 for $\lambda_{c\phi} = 0$. For conditions that can be represented by Mohr-Coulomb shear strength parameters c and ϕ , in terms of total stresses, the Mohr-Coulomb shear strength parameters should be factored as

$$c^* = \varphi_{ss} \cdot c \quad (\text{consistent units of stress}) \quad (321.1.3-3)$$

$$\tan \phi^* = \varphi_{ss} \cdot \tan \phi \quad (\text{dimensionless}) \quad (321.1.3-4)$$

where c^* and $\tan \phi^*$ are respectively the factored intercept and slope of the Mohr-Coulomb failure envelope, c and $\tan \phi$ are respectively the nominal intercept and slope of the Mohr-Coulomb failure envelope, and φ_{ss} is the resistance factor determined from Figure 321.1.3.1 for the appropriate value of $\lambda_{c\phi}$. *Note that it is the tangent of the friction angle that is factored rather than the friction angle itself.*

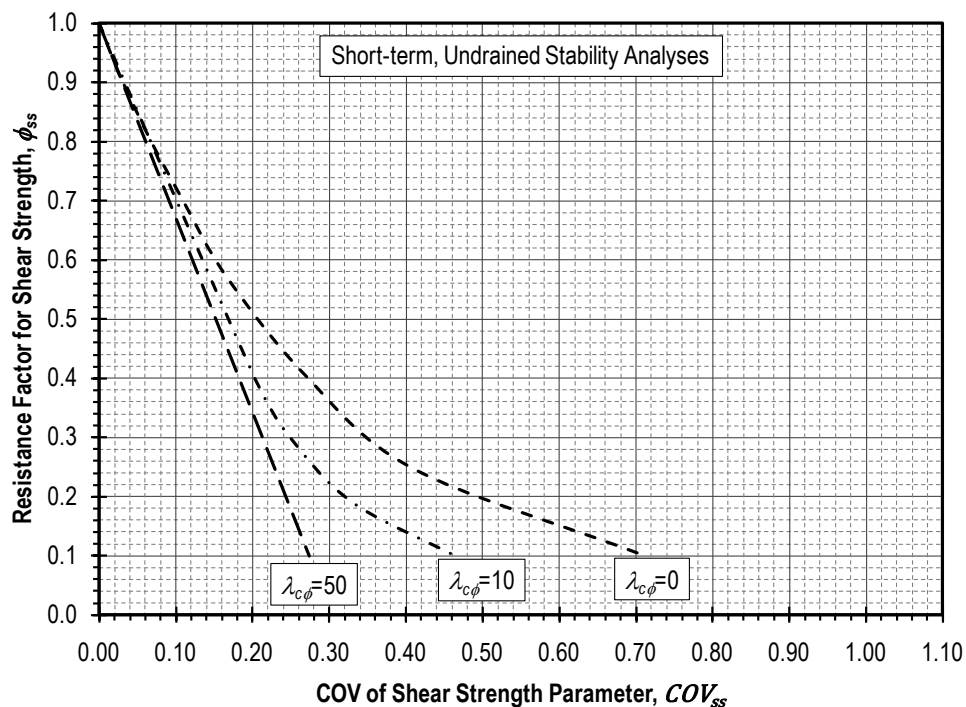


Figure 321.1.3.1 Resistance factors for shear strength parameters for stability analysis of short-term, undrained conditions.

321.1.3.5 Resistance factors for long-term, fully drained conditions

Stability analyses for long-term, drained conditions (generally associated with conditions long after construction) should be performed using factored shear strength parameters in terms of effective stresses

(i.e. effective stress analyses). In general, the resistance factor to be used is dependent on the slope stability parameter, $\lambda_{c\phi}$, which is determined as

$$\lambda_{c\phi} = \frac{\gamma H \tan \bar{\phi}}{\bar{c}} \quad (\text{dimensionless}) \quad (321.1.3-5)$$

where γ is the total unit weight for the soil, H is the slope height, and \bar{c} and $\tan \bar{\phi}$ are respectively the intercept and slope of the Mohr-Coulomb failure envelope for the soil in terms of effective stresses.

The Mohr-Coulomb shear strength parameters established in terms of effective stresses should be factored as

$$\bar{c}^* = \phi_{ss} \cdot \bar{c} \quad (\text{consistent units of stress}) \quad (321.1.3-6)$$

$$\tan \bar{\phi}^* = \phi_{ss} \cdot \tan \bar{\phi} \quad (\text{dimensionless}) \quad (321.1.3-7)$$

where \bar{c}^* and $\tan \bar{\phi}^*$ are respectively the factored intercept and slope of the Mohr-Coulomb failure envelope, \bar{c} and $\tan \bar{\phi}$ are respectively the nominal intercept and slope of the Mohr-Coulomb failure envelope established in terms of effective stresses, and ϕ_{ss} is the resistance factor determined from Figure 321.1.3.1 for the appropriate value of $\lambda_{c\phi}$. *Note that it is the tangent of the friction angle that is factored rather than the friction angle itself.*

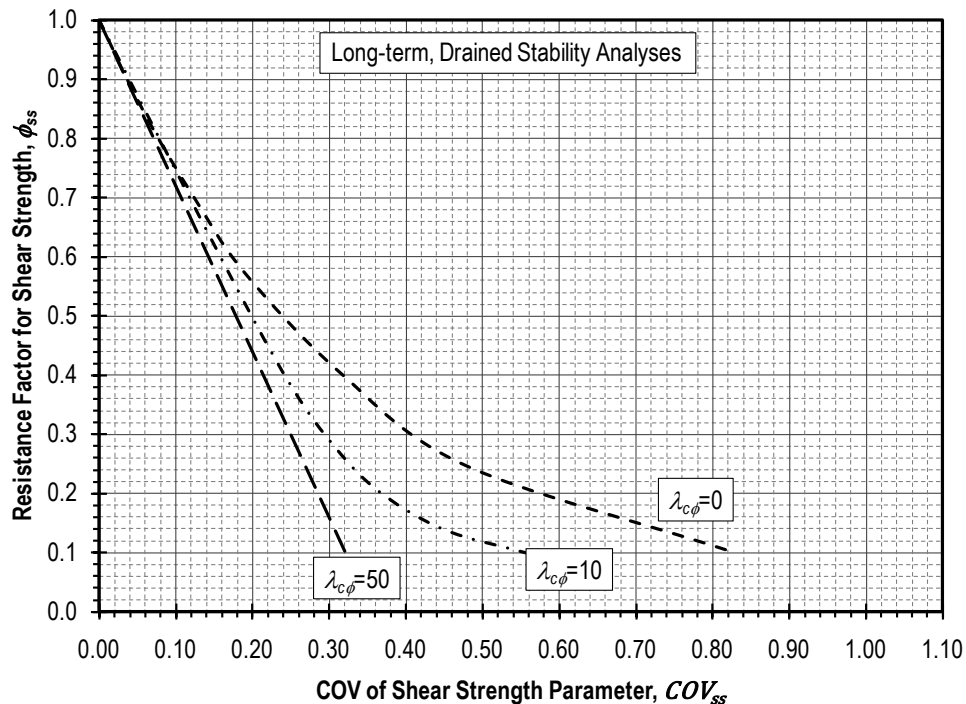


Figure 321.1.3.1 Resistance factors for shear strength parameters for stability analysis of short-term, undrained conditions.

Pore pressure conditions, which may be represented in a number of different ways for stability analyses (e.g. piezometric lines, pore pressure ratio, etc.), should be selected using all available information as well as sound judgment, just as it would be following traditional ASD analysis methods. It is important that the pore pressure conditions used reflect the worst-case pore pressure conditions anticipated over the life of the slope.

321.1.4 Serviceability

The serviceability limit state requirements of this article are intended to provide for evaluation of the potential for excessive settlement of embankments. The primary application of this article is expected to be for predicting settlement of bridge approach embankments to establish whether bridge approach slabs are justified. The provisions of this article may also be utilized to establish whether the remaining settlement of an embankment is sufficiently low to proceed with final paving for projects where final paving is postponed to allow embankment settlement to occur.

321.1.4.1 General Considerations

In general, settlement at the surface of an embankment can arise from compression of the foundation soils due to the weight of the overlying embankment fill soils and compression of the embankment fill soils (e.g. due to wetting induced compression, etc.). This article includes provisions for prediction of settlement from both sources. Factored settlements are determined using factor consolidation parameters to reflect the uncertainty and variability present at the specific site in question. The total factored settlement is computed as the sum of the factored compression of the foundation soils and the factored compression of the embankment

$$S_{tot}^* = S_{found}^* + S_{emb}^* \quad (\text{consistent units of length}) \quad (321.1.4-1)$$

Where S_{tot}^* is the total factored settlement, S_{found}^* is the factored compression of the foundation soils due to the weight of the overlying fill, and S_{emb}^* is the factored compression of the embankment soils. Provisions for estimation of S_{found}^* and S_{emb}^* are provided in the following articles.

321.1.4.2 Settlement Due to Compression of Foundation Soils

The factored settlement for embankments on cohesive soils shall be computed following classical consolidation theory (e.g. Reese et al., 2006), modified to include resistance factors to be applied to the compression and recompression indices, c_c and c_r , and to the maximum past vertical effective stress, σ'_p (also referred to as the pre-consolidation stress). Application of this method within the LRFD framework requires comparison of a factored value for σ'_p , with the initial and final vertical effective stresses, σ'_o and σ'_f , within the foundation soils.

If $\sigma'_o < \varphi_p \sigma'_p < \sigma'_f$, the factored total settlement shall be computed as:

$$\delta_R = \frac{H_o}{1+e_o} \left[\frac{c_r}{\varphi_r} \log \left(\frac{\varphi_p \sigma'_p}{\sigma'_o} \right) + \frac{c_c}{\varphi_c} \log \left(\frac{\sigma'_f}{\varphi_p \sigma'_p} \right) \right] \quad (\text{consistent units of length}) \quad (321.1.4-2)$$

where

- σ'_o = initial vertical effective stress (consistent units of stress),
- φ_p = resistance factor to be applied to pre-consolidation stress (dimensionless),
- σ'_p = maximum past vertical effective stress (consistent units of stress),
- σ'_f = final vertical effective stress (consistent units of stress),
- δ_R = factored settlement (consistent units of length),
- H_o = thickness of compressible layer (consistent units of length),
- e_o = initial void ratio (dimensionless),
- c_c = compression index (dimensionless),
- φ_c = resistance factor to be applied to compression index term (dimensionless),
- c_r = recompression index (dimensionless), and

ϕ_r = resistance factor to be applied to recompression index term (dimensionless).

If $\phi_p \sigma'_p \geq \sigma'_f$, the factored settlement shall be computed as:

$$\delta_R = \frac{H_o}{1+e_o} \left[\frac{c_r}{\phi_r} \log \left(\frac{\sigma'_f}{\sigma'_o} \right) \right] \quad (\text{consistent units of length}) \quad (321.1.4-3)$$

Similarly, if $\phi_p \sigma'_p \leq \sigma'_o$, the factored settlement shall be computed as:

$$\delta_R = \frac{H_o}{1+e_o} \left[\frac{c_c}{\phi_c} \log \left(\frac{\sigma'_f}{\sigma'_o} \right) \right] \quad (\text{consistent units of length}) \quad (321.1.4-4)$$

Values for ϕ_c and ϕ_r shall be established from Figure 321.1.4.1 based on the coefficient of variation of the mean compression index (COV_{c_c}) and mean recompression index (COV_{c_r}), respectively. Similarly, values for ϕ_p shall be established from 321.1.4.2 based on the coefficient of variation of the mean maximum past vertical effective stress ($COV_{\sigma'_p}$). Coefficients of variation for each of these parameters shall be determined in accordance with methods described in EPG 321.3 – *Procedures for Estimation of Geotechnical Parameter Values and Coefficients of Variation*.

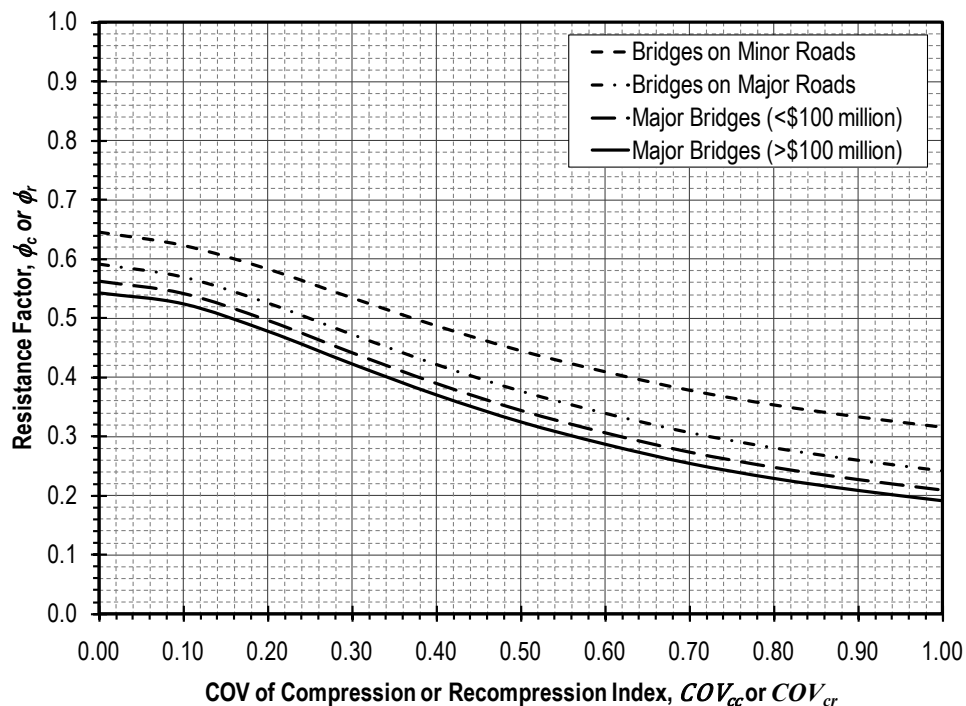


Figure 321.1.4.1 Resistance factors for compression index and recompression index in calculation of compression of embankment foundation soils.

Where embankments are underlain by compressible soils of substantial thickness, the soil beneath the embankment shall be subdivided into several sublayers to account for potential changes in consolidation parameters and stress distribution beneath the embankment. Compression of each of these sublayers shall be computed using Equation 321.1.4-2, 321.1.4-3, or 321.1.4-4, as appropriate, and the resulting values should be summed to arrive at the total settlement. For each sublayer, values for c_c , c_r , and e_o shall be taken as the mean values of these parameters over the thickness of the sublayer. Values for H_o shall be taken as the thickness of the respective sublayer. Values for σ'_o , σ'_f , and σ'_p for each sublayer shall also be taken as the mean values over each sublayer, although this is often approximated by using

values calculated for the center of the sublayer. Values used for $COV_{\bar{c}}$, $COV_{\bar{c}_r}$, and $COV_{\bar{\sigma}_p}$ shall be representative of the variability and uncertainty of the mean values for the respective parameters within each sublayer.

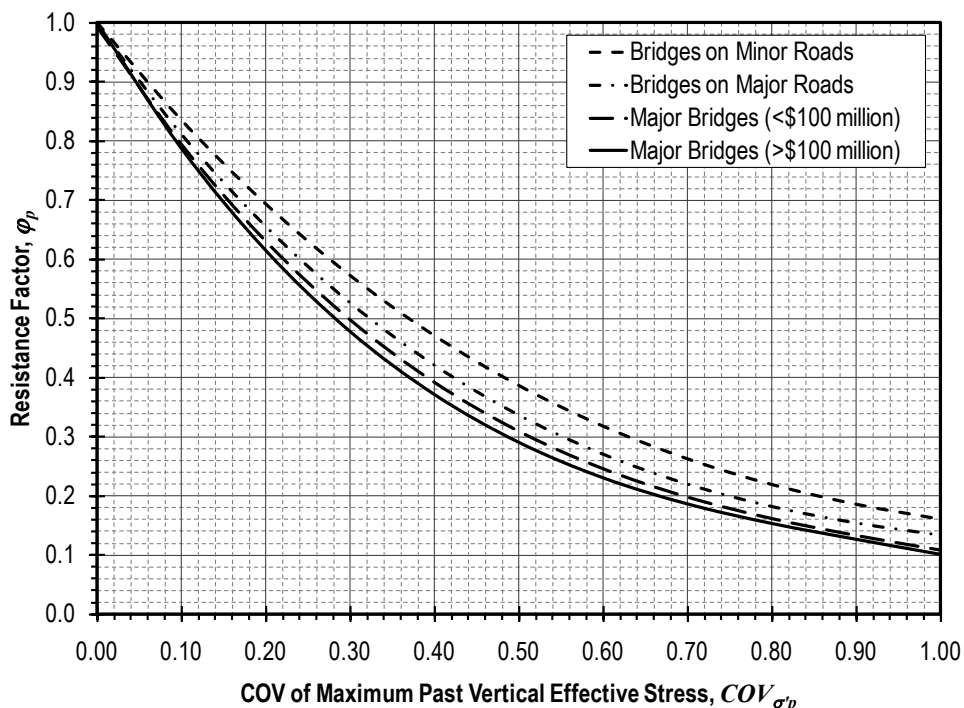


Figure 321.1.4.2 Resistance factors for pre-consolidation stress in calculation of compression of embankment foundation soils.

Where conditions warrant, settlement contributions due secondary compression shall be added to those computed from Equations 321.1.4-2, 321.1.4-3, or 321.1.4-4.

321.1.4.3 Settlement Due to Compression of Fill

The factored compression of the embankment soils shall be computed as

$$S_{emb}^* = \frac{0.02 \cdot H_{fill}}{\varphi_{fill}} \quad (\text{consistent units of stress}) \quad (321.1.4-5)$$

Where H_{fill} is the total fill thickness and φ_{fill} is the resistance factor for embankment compression. The value of φ_{fill} shall be taken as 0.62.

321.1.4.4 Settlement Limits

For deciding whether bridge approach slabs should be utilized at bridge abutments, the total factored settlement shall be compared to a limit settlement of 3 inches. If the total factored settlement exceeds this value, bridge approach slabs are likely to prove cost effective.

321.1.5 References

- Loehr, J.E., C.A. Finley, and D. Huaco (2006), *Procedures for Design of Earth Slopes Using LRFD*, Final Report to Missouri Department of Transportation, Research Investigation RI03-030.
- MCHRP (1974), *Moisture, Density and Slope Requirements for High Fills*, Missouri Cooperative Highway Research Program Final Report, Study No. 71-9, Missouri State Highway Department and Federal Highway Administration, 38 pp.
- MCHRP (1976), *Strength and Drainage Properties of a Rocky Residual Soil*, Missouri Cooperative Highway Research Program Final Report, Study No. 75-1, Missouri State Highway Department and Federal Highway Administration, 55 pp.
- Reese, L.C., W.M. Isenhower, and S-T Wang (2006), *Analysis and Design of Shallow and Deep Foundations*, John Wiley and Sons, 574 pp.

C-321.1 Guidelines for Design of Earth Slopes - Commentary

This commentary document provides supplemental information to support the provisions of EPG 321.1. This information includes supplemental guidance on application of specific provisions, supporting documentation for the provisions, or explanations for how the provisions should be applied.

C-321.1.1 General

The provisions of EPG 321.1.5 are intended for design of routine slopes. The provisions of EPG 321.1.3 and EPG 321.1.4 shall be followed for site/location specific stability analyses and for overall stability evaluations for retaining walls and spread footings.

C-321.1.2 Slope Inclination for Preliminary Geotechnical Report

It is not intended that a slope's inclination be varied with different soil horizons or for each soil type encountered. Rather, the slope inclination selected for a project shall be determined from an overall evaluation of the predominant soils encountered on a project. In the event of uncertainty, a conservative selection of inclination should be made, or site specific analyses according to EPG 321.1.3 shall be required. For example, A and B horizons will normally be relatively thin and less plastic compared to the C horizon. In such cases, the slope selection would logically be based on the C horizon as both the worst and predominant material to be encountered.

In most cases, a constant slope inclination shall be used throughout a given project. Slope inclinations should only be varied horizontally within a project if the alignment traverses two or more distinct soil types and only if it is known where material from any cut in the transition zone will be placed in fill. In the event of uncertainty, the more conservative slope should be extended to the point where the uncertainty is minimal.

A somewhat common source of confusion with EPG Table 321.1.2.1 has been in selecting slopes for some CH residual soils. Note that the top column of the chart deals with geologic origin and this is the first division before looking at ASTM classification. A CH soil residual from rock with admixed chert or other rock fragments may be constructed with an inclination of 2:1. However, a slope inclination of 3:1 is required for a CH residual soil derived from shale and claystone - and without admixed granular material.

A soil series that has been especially confusing is the Union. The lower part of the profile is typically a cherty, residual clay and the upper part is of wind-blow origin, usually CL. Soil survey recommendations have ranged from 2:1 through 3:1. The 3:1 has been based on the CH classification, which is a misinterpretation since it is a CH residual from carbonates and is cherty. The slope selected should be based on the predominant phase. If it is mostly CL loess with only a few feet of residual soil, the 2.5:1 should probably be used. If it is almost all residual soil with only a few feet of windblown soil then 2:1 should be adequate.

It should be emphasized that this chart is a guide. It is based on some theory and it is tempered by experience. It fits most situations, but there are exceptions. Some of the exceptions have been addressed in research reports. For the most part, this chart is based on stability considerations, but in one area it is shaded a bit for erosion control purposes. This is for the ML loesses. When dealing with a very tight right-of-way situation, it may be practical to steepen slopes in this material to 2:1 at the expense of some increased erosion problems or erosion control measures. If in doubt, shear tests can be done. To repeat, this chart is a guide - it is not carved in stone.

For grade separations, consideration should be given to selective grading of fill materials such that better materials are placed in fill spill slopes (i.e. beneath bridge abutments) so that the spill slopes can be steepened. While such handling will likely increase costs for fill placement, some additional handling can be justified if it results in reducing bridge length. Selective fill placement is not generally practical on stream crossings -- only on grade separations.

Table 321.1.2.1 permits spill slopes to be 0.5:1 steeper than side slopes for several soil types, but no steeper than 2:1, where the elevation differential between the toe of slope and grade at the bridge end is less than 20 feet. This recognizes the fact that the effective height of the spill slope will be reduced by at least 6 to 8 feet because of the abutment headwall. This concept becomes more complicated at stream channel crossings where it is necessary to consider the depth and condition of the stream channel and their effect on bridge end location. For example, one might have CL glacial soils and a height differential between grade and toe of slope of some 15 feet. Table 321.1.2.1 requires 2.5:1 side slopes and 2:1 spill slopes for CL fill soils. However, if the stream channel is entrenched in CL soil another 15 feet deep such that the total height differential is greater than 20 feet, the bridge ends should be stepped back to or beyond a point determined by projecting a 2.5:1 upward from the toe of the channel slope to intersection with grade. For typically steep channel banks, this will generally leave a substantial bench at natural ground level, which provides some room for bank sloughing without affecting the integrity of the spill slope. The spill slope would remain at 2:1 but the bridge end would be located as if it were at least 2.5:1.

Now things get even more complicated. To this point, we have not really considered some of the possible complications to the stability of stream and channel slopes. There is a caution in the text beneath the slope selection chart that, "Factors such as foundations, seepage, susceptibility to inundation, etc. may dictate flatter slopes." Even ignoring foundations, which call for a special investigation, there is no simple way of considering the effects of water that will fit every case. Determining proper slopes in such circumstances involves consideration of a complex intermingling of factors such as flooding rate, height and duration, rate of recession, water velocity, scour potential, soil strength, weight, permeability, swell potential, and seepage rates, all further complicated by considerations of costs and the risks and consequences of failure.

The following general comments and guidelines are offered, however, to supplement the Guide for Slope Recommendations. First, use the chart to determine the slope (spill or side) you would use if water were not a factor. This is the slope to which you will make adjustments based on the following considerations.

For moderate stream flows of average flood duration, about 0.5:1 flatter may suffice. For prolonged flooding followed by drawdown, 1:1 flatter may be appropriate. For intermittent or low-flow streams subject only to flash flooding, no flattening may be needed. Always inspect stream slopes for evidence of slides and sloughs and inspect the condition of adjacent structures over the same stream. Consider the width of the embankment; a 4-lane roadway is more likely to fail into a stream channel than a narrow county road or railroad fill. Consider also the consequences of failure; be more conservative for heavily traveled arterial roadways than for minor or rural supplemental roads for example.

Keep in mind that many stream channel slopes are stable only because of mature tree growth along the banks and the reinforcement provided the banks by the root structure. Remember that trees will be destroyed by construction, the roots will rot, and maintenance will prevent their regrowth. The net result will be less inherent stability where most needed.

Channelization has led to much stream bank instability, particularly in the northwest part of the state. It is especially prevalent in Lafayette, Atchison, and Holt Counties. The invariable result is channel deepening, sometimes severe deepening. Careful examination of banks will often reveal massive slides, sometimes so massive as to resemble natural terraces. Always look at your county map; if the stream follows a

straight line it has been channelized, the streambed will have deepened and the banks, if not already failed, will be in precarious condition.

C-321.1.3 Slope Stability Analyses for Special Foundation Investigations

C-321.1.3.1 General Considerations

No commentary.

C-321.1.3.2 General Procedure for Slope Stability Analyses Using LRFD Approach

The procedure for design of earth slopes following LRFD is quite similar to procedures for conventional ASD analysis, with two important differences. The first difference occurs in Step 4, where factored parameters are used as input for the slope stability analyses for LRFD analyses whereas unfactored parameters are used for the traditional ASD analyses. The second difference occurs in Step 5, where instead of comparing the computed factor of safety to some required or target factor of safety as is done in ASD, the computed factor of safety is compared to a limit value (= 1.0) indicating stability or instability. In this respect, the LRFD procedure is indeed more straightforward than current procedures in that the analysis target or limit is consistent for all stability cases for the LRFD procedure whereas the analysis target for conventional ASD procedures varies from one application to another. The result of these differences is simply that, for LRFD procedures, uncertainties in the analyses are accounted for through factoring of the input parameters whereas for ASD procedures the uncertainty is accounted for through a single factor of safety. By factoring individual input parameters, it is possible to more appropriately apply conservatism to the individual parameters involved in the analysis, and therefore to effect more consistent levels of safety across a broad range of cases. Both load and resistance factors in LRFD and factors of safety in ASD are intended to account for uncertainties involved in the respective analyses. They are simply different methods for accounting for these uncertainties.

Five common parameters are used for slope stability analyses including the soil (total) unit weight, γ , undrained shear strength, s_u , Mohr-Coulomb shear strength parameters, c and ϕ (or \bar{c} and $\bar{\phi}$ in the case of effective stress analyses), and the pore water pressure, u . For the current implementation, neither soil unit weight nor pore water pressures are factored. Soil unit weight is not factored because it generally contributes little towards the reliability of an earth slope so that appropriate values for the load factor would only be slightly greater than 1.0 (generally less than 1.03). The variability and uncertainty in the unit weight is thus accounted for in the resistance factors for soil shear strength. In contrast, pore water pressures, and the variability/uncertainty in pore pressure, has a dramatic influence on the reliability of a given slope. Unfortunately procedures for rationally estimating and factoring pore pressures for LRFD analyses have not yet been established so procedures for handling pore water pressures, or piezometric lines and other constructs used to model pore water pressures, remain unchanged and should be estimated following procedures identical to those used for traditional ASD procedures.

C-321.1.3.3 Load Factors

Despite the fact that stability is really a strength limit state, load factors associated with the Service I limit state are used for all loads by convention with current AASHTO LRFD procedures. This position makes some sense when considering earth loads that often have little variability and uncertainty, but may not make sense when stability is dominated by loading from bridge or other structures.

C-321.1.3.4 Stability Analyses for short-term, undrained conditions

Resistance factors for short-term stability analyses were calibrated probabilistically to produce a target probability of failure of approximately 1 in 2000. This target probability of failure reflects the fact that most short-term stability failures are relatively deep and massive (and thus costly) so that a relatively low target probability of failure is desired.

C-321.1.3.5 Stability Analyses for long-term, fully drained conditions

Resistance factors for long-term stability analyses were calibrated probabilistically to produce a target probability of failure of approximately 1 in 400. This target probability of failure reflects the fact that most long-term stability failures are relatively shallow (and thus less costly) so that a relatively greater target probability of failure is desired.

C-321.1.4 Serviceability

Serviceability of other slopes, and lateral deformations are controlled by use of appropriate conservatism in the resistance factors from EPG 321.1.3. The serviceability check for settlement of embankments is primarily intended for use as a criterion for deciding whether bridge approach slabs are necessary and justified, and potentially for establishing when settlement has occurred to a sufficient extent to complete construction in cases where staged construction is planned, or when final paving of a project is being postponed until embankment settlements will be less than established tolerable limits.

C-321.1.4.1 General Considerations

No commentary.

C-321.1.4.2 Settlement Due to Compression of Foundation Soils

The factored compression of the foundation soil is computed in a manner very similar to that use for estimating the factored settlement of spread footings on soil. However, the resistance factors that are used for estimating these two settlements are different. The differences arise from the fact that the change in stress due to loading from a spread footing is more uncertain and variable than is loading from embankment soils. The resistance factors presented reflect this difference.

C-321.1.4.3 Settlement Due to Compression of Fill

The estimate provided is based on observational data suggesting that the compression of embankments constructed following common compaction specifications is between 1 and 3 percent of the embankment height.

The resistance factor for compression of the embankment soils will produce a value of settlement that has an approximately 1 in 150 chance of settlements exceeding that value.

C-321.1.4.4 Settlement Limits

No commentary.