



MD-12- SB009B4U

Martin O'Malley, *Governor*
Anthony G. Brown, *Lt. Governor*

Beverly K. Swaim-Staley, *Secretary*
Melinda B. Peters, *Administrator*

STATE HIGHWAY ADMINISTRATION

RESEARCH REPORT

REVIEW AND ENHANCEMENT OF CHART OPERATIONS TO MAXIMIZE THE BENEFITS OF INCIDENT RESPONSE AND MANAGEMENT

WOON KIM AND GANG-LEN CHANG

**DEPARTMENT OF CIVIL AND ENVIRONMENTAL ENGINEERING
UNIVERSITY OF MARYLAND
COLLEGE PARK, MD 20742**

**SB009B4U
FINAL REPORT**

JULY 2012

The contents of this report reflect the views of the author who is responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Maryland State Highway Administration. This report does not constitute a standard, specification, or regulation.

Technical Report Documentation Page

1. Report No. MD-12- SB009B4U	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Review and Enhancement of CHART Operations to Maximize the Benefit of Incident Response and Management	5. Report Date July 2012		6. Performing Organization Code
	8. Performing Organization Report No.		
7. Author/s Woon Kim and Gang-Len Chang	9. Performing Organization Name and Address University of Maryland, Department of Civil and Environmental Engineering, Maryland, College Park, MD 20742		
12. Sponsoring Organization Name and Address Maryland State Highway Administration Office of Policy & Research 707 North Calvert Street Baltimore, MD 21202		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. SP009B4U	
15. Supplementary Notes		13. Type of Report and Period Covered Final Report	
		14. Sponsoring Agency Code (7120) STMD - MDOT/SHA	
16. Abstract <p>This project was focused on identifying potential areas for Maryland's Coordinated Highway Action Response Team (CHART) to enhance its incident management efficiency and to maximize the resulting benefits under existing resource constraints. Using the information from CHART and the Maryland Accident Analysis Reporting System (MAARS), this research has identified critical factors affecting CHART's efficiency in incident response and clearance, and produced several reliable models to improve its performance. This research has also produced an optimal allocation model that will enable each operational center to best deploy available patrol vehicles along its responsible highway networks and to select the most cost-benefit fleet size under the resource constraints.</p> <p>CHART can also apply the set of prediction models developed in this project to estimate the required clearance duration of a detected incident, thereby minimizing the resulting congestion within the impact boundaries via some real-time traffic control and information strategies. Incorporating any of those developed models into current practice will undoubtedly enhance CHART's operational quality and significantly increase its effectiveness in minimizing non-recurrent congestion in this region.</p>			
17. Key Words Incident, CHART, benefits, clearance time	18. Distribution Statement: No restrictions This document is available from the Research Division upon request.		
19. Security Classification (of this report) None	20. Security Classification (of this page) None	21. No. Of Pages 75	22. Price

Form DOT F 1700.7 (8-72) Reproduction of form and completed page is authorized.

Table of Contents

CHAPTER 1: Introduction	1
1.1 Research Background	1
1.2 Research Objective and Work Plan	2
1.3 Report Organization.....	2
CHAPTER 2: Exploring Accident Data Integration between CHART and MARRS	5
2.1 Introduction.....	5
2.2 Data Items for Integrating Accident Information	5
2.3 Matching Results and Recommendations.....	9
CHAPTER 3: Review of Incident Response Efficiency.....	11
3.1 Introduction.....	11
3.2 Distribution of Incident Response Times by Key Factors	12
3.3 Performance between Different Operations Centers	15
3.4 Summary of Key Research Findings	18
CHAPTER 4: Analysis of Incident Clearance Efficiency	20
4.1 Introduction.....	20
4.2 Distribution of Incident Clearance Times by Critical Factors	20
4.3 Analysis of Incident Clearance Efficiency by Operations Center	23
4.4 Research Findings and Conclusions	27
CHAPTER 5: A Real-Time Model for Predicting Incident Clearance Duration	29
5.1 Introduction.....	29
5.2 Literature Review.....	29
5.3 Analysis of Prediction Algorithms.....	31
5.4 Model Development and Estimation Results.....	35

5.5 Conclusion	46
CHAPTER 6: Optimal Strategies for Deploying Freeway Incident Response Units.....	48
6.1 Introduction.....	48
6.2 Review of available models.....	48
6.3 Model Formulation	51
6.4 Numerical results	55
CHAPTER 7: Conclusions	67
7.1 Conclusions.....	67
7.2 Recommendations.....	69
References.....	72

CHAPTER 1: Introduction

1.1 Research Background

Although the contribution of the emergency response operations of Maryland's Coordinated Highway Action Response Team (CHART) has been well recognized by the general public, much remains to be done to effectively contend with increasingly congested traffic conditions and the accompanying incidents. In fact, to meet the expectation of policymakers and residents on minimizing the impact of non-recurrent congestion, CHART operations inevitably face the following challenges:

- How to increase its detection coverage and rate?
- Can the incident response time be further reduced?
- How can the incident clearance operations be performed more efficiently?
- How can the overall performance of CHART be maximized under the current resource constraints?

The performance evaluations of CHART, conducted by The University of Maryland research team annually over the past 10 years, indicate that even a small percentage of improvement on any of the above challenging areas could increase benefits significantly. One potentially effective way to contend with such challenges is to take advantage of valuable information embedded in the CHART operational record over the past several years. For example, an in-depth comparison of CHART incident data and MAARS reports (i.e., Maryland Automated Accident Report System) can shed some light on why some incidents were not recorded by CHART. Such information can then be used to design some reliable ways to expand CHART's detection coverage.

A rigorous investigation of the relations between the incident clearance time and all contributing factors from the past data may explain why some types of incidents often result in longer durations, thus degrading the performance of CHART's response operations. From the spatial distribution of incidents over different times of day in each target highway network over the past several years, CHART can also better allocate its highway patrol units to minimize incident response times. In addition, the analysis of CHART's performance as a function of its available budget may also assist responsible staff to justify the needed resources.

Considering the ever-increased statewide congestion and the demanding expectation of motorists, CHART will inevitably face the challenge of sustaining its impressive performance with diminishing resources. Thus, it is essential that CHART can maximize its effectiveness and efficiency by learning from the past operational experiences.

1.2 Research Objective and Work Plan

The primary project objective is to develop some effective strategies that can assist CHART staff in improving the efficiency of its operations and maximizing the resulting benefits under the existing resource constraints. Strategy development due to data constraints has focused on the following critical aspects:

- Understanding critical factors that contribute to an increase in incident response and clearance times;
- Allocating available highway patrol units based on the temporal and spatial distributions of incidents to minimize the potential incident response times; and
- Developing reliable models to predict the required duration of a detected incident and to identify critical contributing factors.

Based on the above research objective, the project work was divided into two parts: Part-I was concentrated on the analysis of CHART's performance data from 2007-2009 to identify potential improvement areas and Part-II was devoted to developing operational models to minimize incident response and clearance times. The study also includes recommendations for CHART's enhancement of incident response and traffic management.

1.3 Report Organization

This research report comprises six chapters. A brief description of core research results in each chapter is presented below.

Chapter 2 presents the exploratory results of integrating accident records reported independently to CHART and MAARS. Section 2-1 first illustrates key variables and data items used by CHART to characterize a responded accident, followed by identification of similar data in MAARS recorded by the State Police Department for the same response operations. Section 2-2 describes a data fusion process to select key variables from these two databases for integrating

critical information associated with the same accidents. This section also details the criteria and sequential search process used to match accident records between these two databases. Section 2-3 reports the data integration results and recommendations for best using information from these two databases.

Chapter 3 documents the analysis results of CHART's incident response efficiency between 2007 and 2009, focusing on the interrelationships between incident response time and all contributing factors. Section 3-1 presents the distribution of incident response times classified by the number of blocked lanes and incident nature, finding that CHART patrol units tend to respond more quickly to more severe incidents. Section 3-2 compares the performance of each operational center in response to different types of incidents, times of day, and environmental conditions. The comparison also includes the performance discrepancies among five CHART operational centers during peak and off-peak periods on different highways, highlighting the impacts of traffic congestion on the efficiency of incident response. Section 3-3 summarizes research findings and recommendations for improving the efficiency of incident response.

Chapter 4 details critical factors affecting each traffic control center's efficiency in recovering traffic from incidents, highlighting the complex compound impacts of the incident's nature, lane blockage, and environmental conditions on the resulting incident clearance time. Section 4-1 presents the distribution of average clearance times by blocked lanes, incident severity, and heavy vehicle involvement. This section also illustrates the correlations between incidents of excessively long duration (i.e., over two hours) and the number of fatalities and injuries. Section 4-2 evaluates the performance of five CHART operation centers, focusing on their efficiency in clearing various types of lane-blockage incidents at different times of day and in severe weather conditions. Section 4-3 summarizes the research findings and identifies critical variables for developing a prediction model for incident clearance time.

Chapter 5 reports on the efforts to develop a set of reliable models for predicting duration of incident clearance, based on the dataset integrated from CHART and MAARS. Section 5-2 offers a concise review of related literature, including a selection of explanatory variables and a discussion of critical issues associated with model development. Section 5-3 illustrates the core logic of various Bayesian-based estimation models, highlighting their strengths in modeling the unique characteristics of incident clearance time. Section 5-4 reports the estimation results from various incident clearance models calibrated with the merged dataset from the CHART and

MAARS databases. Section 5-5 includes research findings and recommendations for developing a comprehensive model to predict incident duration in the future.

Chapter 6 discusses various optimization strategies for SHA to effectively distribute incident response units along freeway segments plagued by frequent incidents, including a comparison between the models developed from this research and other state-of-the practice deployment strategies, using the incident data from 2006 to 2011 on the I-495 Capital Beltway.

Section 6-2 reviews the available strategies for deploying emergency response units and relevant studies in the literature. Section 6-3 analyzes the formulations of several promising deployment models, including the one developed from this project. Section 6-4 illustrates a comprehensive benefit/cost analysis with different response fleet sizes. Research findings produced from extensive analyses of the developed model are summarized in the last section, providing a basis for traffic managers to design a benefit-cost incident management system.

Chapter 7 summarizes the research findings of this project and recommends some areas essential for CHART's performance improvement, especially for incidents resulting in injuries and fatalities. Some critical issues associated with field data collection and management of the incident database are also discussed in this chapter.

CHAPTER 2: Exploring Accident Data Integration between CHART and MARRS

2.1 Introduction

Both CHART and the Maryland State Police (MSP) record related information for their respective analyses. However, due to the differences in responsibility, each agency records mainly those data related to its potential applications, making the identification of contributing factors to accidents and their relations with the surrounding traffic conditions a very difficult task. This chapter presents comparisons of accident information recorded in CHART's database and MARRS (Maryland Automated Accident Record System), focusing on inconsistencies between these two databases and potential methods for their future integration.

This chapter is organized as follows: section 2.2 describes the format used by each database for recording accident-related information, and the list of key variables to characterize a recorded accident. Section 2.3 illustrates the data fusion process between these two databases and the matching results based on accident records from 2006 to 2008. Section 2.4 summarizes the suggestions for CHART and MAARS to form a complete accident information system for various operations and safety analyses.

2.2 Data Items for Integrating Accident Information

The exploratory analysis was intended to find an effective way to match the recorded accidents between CHART and MAARS, as the injury and fatality information available only in the latter is critical to the development of prediction models for incident duration. The experimental analysis started with the MAARS data from 2006 to 2008, where 103,510 accident records were identified for integration. Over the same period, CHART's database contained 6,053 incident records involving either injuries or fatalities. Table 2-1 shows the list of data fields from CHART for use to match with the same accidents in MAARS.

Table 2-1: Data fields from CHART for use to match with MAARS

Field Name	Example Datum
<i>event_id</i>	8d00488a2c5900e10047832e33235daa
<i>county_code</i>	11
<i>direction_code</i>	2
<i>event_open_date</i>	3/19/2008 14:20
<i>event_closed_date</i>	3/19/2008 16:24
<i>location_text</i>	US 15 NORTH AT OLD FREDERICK RD
<i>cpi</i>	1
<i>cf</i>	1
<i>total_num_veh</i>	2
<i>route_number</i>	15
<i>route_prefix</i>	US

Note that the fields of “route_number” and “route_prefix” were not originally present in the database, so they had to be generated by searching “location_text”. More than 40 fields in CHART’s database were excluded from the table for accident matching, since they have no corresponding analogues in MAARS. The field “cpi” stands for “collision and personal injury,” while “cf” stands for “collision and fatality.” The field “direction_code” represents the direction of the traffic on the side of the road where the incident occurred, which is not always the road’s official cardinal direction, and mostly tends to be the approximate tangential direction of the road at that location.

Table 2-2 presents the related data fields in MAARS used to match those in Table 2-1 from CHART’s database. Different from the information contained in MAARS’s original field, the “Acc_date” field shown in the table has been aggregated with a special program to include both the accident date and time. The field of “total_num_veh” from CHART (see Table 2-1) corresponds to the “NO_veh”, as they represent the number of vehicles involved in the incident. The “Route_NO” and “Route_Type” correspond to “route_number” and “route_prefix” in CHART, respectively, and represent the road where the incident occurred.

The criteria used to match accidents in these two databases include:

1. The logging date and time of the incident;
2. Information on the location of the incident;
3. The number of vehicles involved in the incident; and

4. Whether the incident resulted in injury only, fatality, or both.

Note that the first two matching criteria would be sufficient to identify the same accidents for data integration if relevant information has been recorded properly in both databases. However, due to the discrepancy in the accident logging time between these two databases, criteria 3 and 4 were further used to ensure a better match. For logging date and time, the *event_open_date* table column from CHART’s database was chosen, because that particular column represents the earliest logging timestamp of the recorded incident. The columns titled *Acc_Date* and *Acc_Time*, from MAARS were combined to form a similar earliest-logging-timestamp column. Criterion 3 was proposed because both databases contained a similar column to denote the number of vehicles involved.

Table 2-2: Data fields from MAARS for use to match with CHART

Field Name	Example Datum
<i>Report_NO</i>	809878892
<i>County</i>	10
<i>Route_NO</i>	15
<i>Route_Type</i>	US
<i>Final_log_mile</i>	35.02
<i>Acc_date</i>	3/19/2008 14:05
<i>Inter_NO</i>	
<i>NO_ped_injured</i>	0
<i>NO_ped_killed</i>	0
<i>NO_doc_injured</i>	2
<i>NO_doc_killed</i>	1
<i>NO_veh</i>	2
<i>Chart_county_code</i>	11

To compile the information on the location of the incident, several columns were used from each database. For example, the original CHART database represents the county name of the accident location as a numeric code and uses a direction code to indicate the blocked traffic direction, (i.e., Southward or Northward), and a text-based location column that in many cases follows the format of “<route prefix and number or street name> AT/PRIOR/AFTER <identifying feature or intersection>”. Some examples of variations in location format from CHART’s database are shown in Table 2-3.

Table 2-3: Examples of accident location information recorded in CHART’s database

Location_text	Event_id
US 15 @ SUNDAYS LANE	0000bc0a5298006d0046b48c33235daa
~I-495 / I-95 AT MD 214 CENTRAL AVE	1800116c0ebd00ed0046b48c33235daa
md 424 at bell branch	28ff35b03f85009d0045b48c33235daa

Because of these inconsistencies, this study has produced a computer program to parse the route prefixes and route numbers from 6,024 of the 6,053 CHART records. The resulting accuracy has been verified by the research team members with a manual matching method.

In contrast, the location information in MAARS was already split into the fields of *Route_Type*, *Route_No*, *Final_Log_Mile*, *Inter_No*, which are, respectively route prefix, route number, mile along the route from the beginning of the route in each *county*, and the intersection number. Unfortunately, the intersection number was left blank in most sample records and, therefore, cannot be used to pinpoint the location of the incident along the route.

The attempt to use the field of *Final_Log_Mile* was not successful because of the inconsistency in data recording. For example, some event records used one location in a county as “beginning of the route” and the other point as the “end,” but other records used the same pair of locations in a reverse order, thus making the information unusable to identify the accident location. Hence, the data matching with the accident location was based mainly on county codes, route prefixes, and route numbers. Note that ideally the matching process between these two databases can still yield acceptable results using the information from these fields, especially if the logging of the accident times was accurately recorded.

The procedures used to perform the accident data matching are summarized below:

- Step-1: For each record in the CHART record set, a matching record was searched in MAARS with the information fields of county, route prefix, and route number, as well as injury- or fatality-related data and vehicle number.
- Step-2: For those matched accident records produced by Step-1, the logging timestamp of each CHART incident record with a time window of 30 minutes (± 15 minutes) was used subsequently to filter those identified records.
- Step-3: After *excluding all records* that were already matched, the same procedures were reapplied to the remaining data records in MAARS but with a wider time window (i.e., ± 1 minute per increment).
- Step-4: Repeat Step-1 to Step-3 until the time window reaches 60 minutes (± 30 minutes).

Note that filtering the accident records with a small time-bound increment was to ensure the best possible match based on the available criteria. After the time window reached 60 minutes (i.e., the preset limit), the matching criteria were revised to include those records where their accident-involved vehicles recorded by two databases differ by one. This decision was based on the assumption that either the CHART's response unit or the highway police could arrive at the accident scene later than the other party and was not notified that a vehicle had already been towed.

To increase the matched samples, the filtering process was further loosened to include those accident records in the two databases that meet all matching criteria except the injury/fatality information. This approach was proposed to account for some scenarios when victims could die in the hospital and either of these two parties failed to receive an update and thus recorded a different number of injuries and fatalities.

Note that double-matching was not an issue with this procedure. Every round of search produced only a few (less than 50) new records, and every record in the MAARS's database yielded either one or no match with accident records in the CHART's database. The data search procedures were stopped at the time window of 60 minutes, because it was difficult to verify that those accidents recorded in these two databases beyond the 60-minute (± 30 minutes) window were indeed the same accidents.

2.3 Matching Results and Recommendations

Using the above procedures, the final matched data set between these two accident databases included only 1,930 of the 6,024 possible records, or about 32 percent. This result is disappointing and highlights the need to address this vital data integration issue.

Some recommendations on how to address this imperative task are summarized below.

- For the CHART's database, the *location_text* field should be separated into a *route_prefix*, *route_number*, and *intersecting_route_prefix*, *intersecting_route_number*. The route number and intersecting route number should be strictly number-based.
- MAARS's database has the information on county roads and their route numbers, so the same data should be shared with CHART to log those incidents that occurred on county roads.

- The *route_prefix* and *intersecting_route_prefix* should be either code-based, (i.e., 0 = IS, 1 = US, 2 = MD, 3 = CO), or should be restricted to an enumerated data type that allows the user to select only IS, US, MD, or CO. If the accident does not occur at an intersection, the *intersecting_route_number* and *intersecting_route_prefix* should be left blank.
- Both CHART and MAARS should use a precise geographical coordinate obtained via GPS to pinpoint the exact location of every reported incident. By doing so, both databases can produce more reliable information than with a text-based reference to any special landmark or feature, such as “Howard County Border” or “Fort McHenry Toll Plaza.”

Note that the use of GPS location information will be operationally more convenient than logging the mile marker along the road that may not exist, especially for smaller roads. GPS information can also prevent the confusion of logging the miles along the road from the beginning of a county, because it is often not clear how to measure or which point to use as the “beginning.” Recording the accident location with such information would also allow potential users to match the incidents by location between the two databases by placing a certain radial constraint on the coordinates.

Recognizing the practical difficulties in changing the data recording procedures and formats for CHART and MAARS, the above minor modifications if properly implemented, however, can significantly increase the matching results between these two systems, even with the remaining recording discrepancies. The information integrated from these two databases systems will be very useful for enhancing CHART’s operational performance and developing safety improvement programs for highway networks in this region.

CHAPTER 3: Review of Incident Response Efficiency

3.1 Introduction

This chapter presents the analysis results of CHART’s response efficiency to different types of incidents, focusing on identifying key factors that often cause excessively long response times. It is expected that an in-depth analysis of the interrelationships between incident patterns and the performance of each local operational center under various environmental and traffic conditions can reveal some critical areas for SHA to further improve its operational strategies in contending with non-recurrent traffic congestion.

The rest of this chapter is organized as follow: Section 3-2 illustrates the distribution of incident response duration by critical factors such as the number of blocked lanes and fatalities, using the CHART incident data from 2007 to 2009. Section 3-3 compares the efficiency of CHART’s five local response centers in response to various types of incidents, highlighting their performance discrepancies under the resource constraints and the responsible network coverage. Research findings and suggestions constitute the last section. Figure 3-1 illustrates the definition of each technical term and its corresponding timeline in the entire incident response and clearance process.

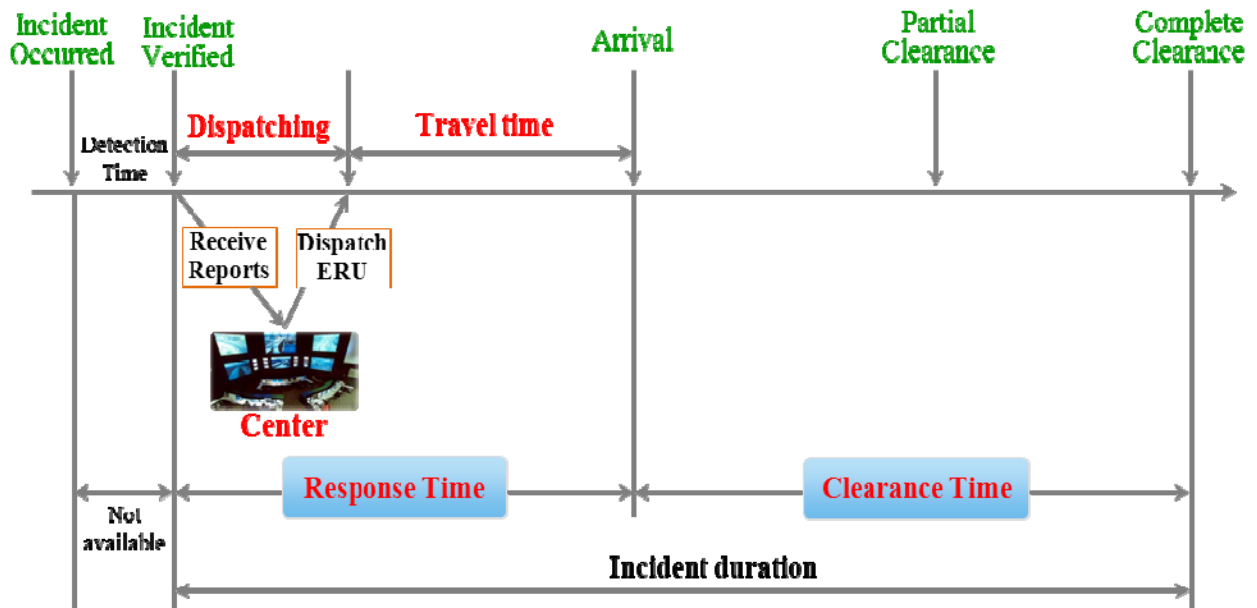


Figure 3-1: Graphical illustration of the entire incident response and clearance process

3.2 Distribution of Incident Response Times by Key Factors

Figure 3-2 presents the distribution of CHART’s average incident response times by whether or not incidents resulted in lane blockage and fatalities. During this 3-year period (2007-2009), CHART’s average response times to incidents involving lane blockage were quicker than those causing only shoulder-lane rubbernecking impact. Similar discrepancy patterns also exist between incidents involving fatalities and those causing only injuries or property damage. The exact factors contributing to such performance discrepancies are to be identified by CHART, but the resource limitations and/or personnel constraints may naturally make incident response units to give a higher priority to those incidents potentially causing greater traffic impacts.

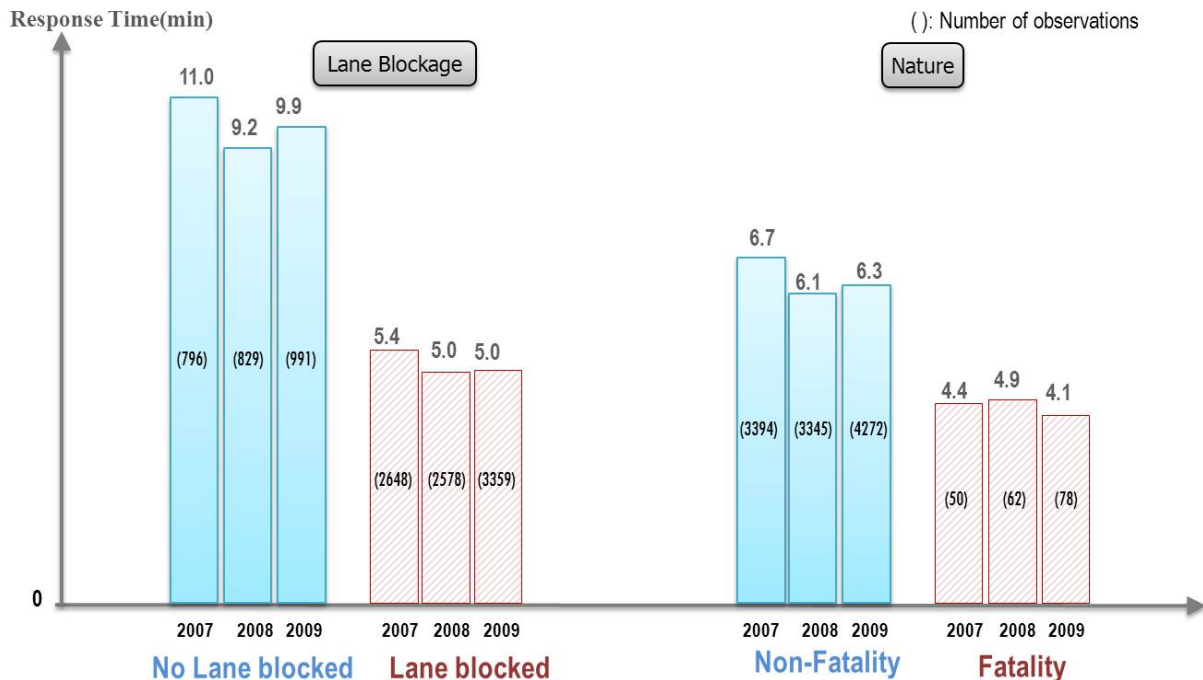


Figure 3-2: Comparisons of incident response times between with and without causing lane blockage, and with and without resulting in fatalities.

Figure 3-3 further compares the response time discrepancy under the following classifications:

- On five major commuting freeway corridors: I-270, I-495, I-70, I-695, I-95.
- On incidents of different severity levels: disabled vehicles, property damage, injury, and fatality.

- On different pavement conditions: snowy, wet, and dry, during peak and off-peak periods.
- By different response centers.

As shown in the graphical patterns, the finding that incidents involving lane blockage have shorter response times than those with no lane blockage holds across different roads, injury severities, pavement conditions, and times of the day.

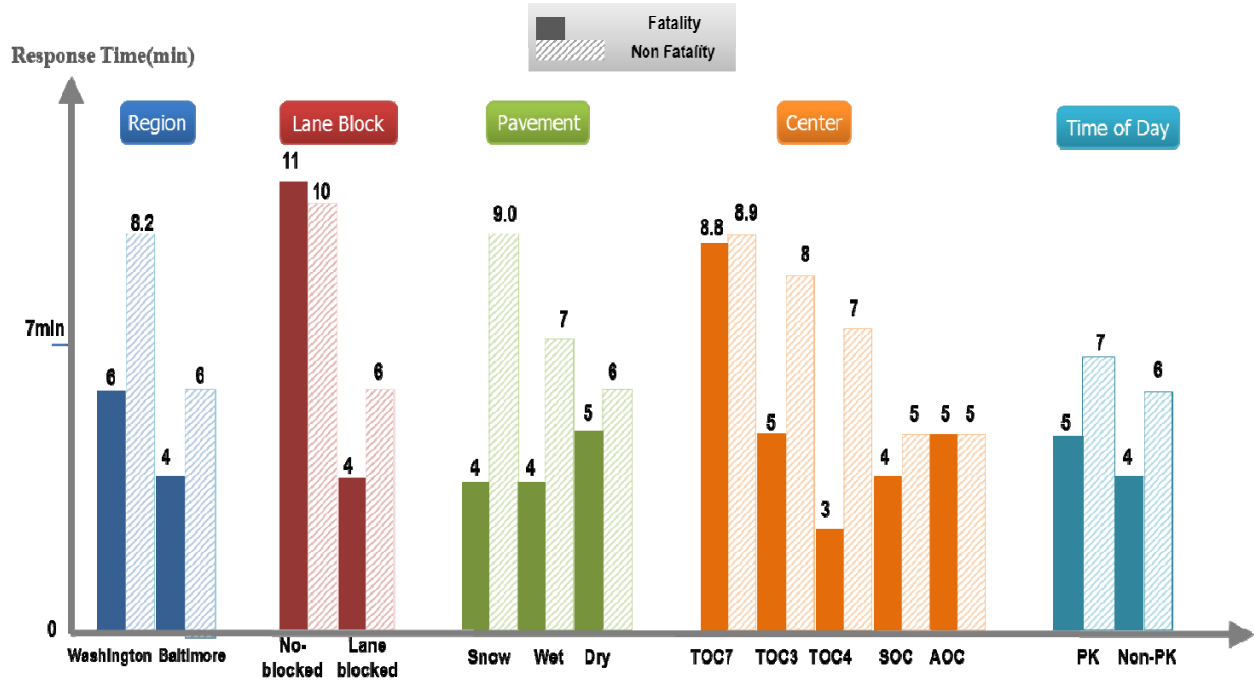


Figure 3-3: Comparisons of incident response times between with and without causing lane blockage across different classifications

Figure 3-4 shows the comparison of average response times between incidents under different pavement conditions. As expected, severe weather conditions such as snow and ice indeed increased the average response time, reflecting the need to have special preparations to respond to incidents occurring on such days.

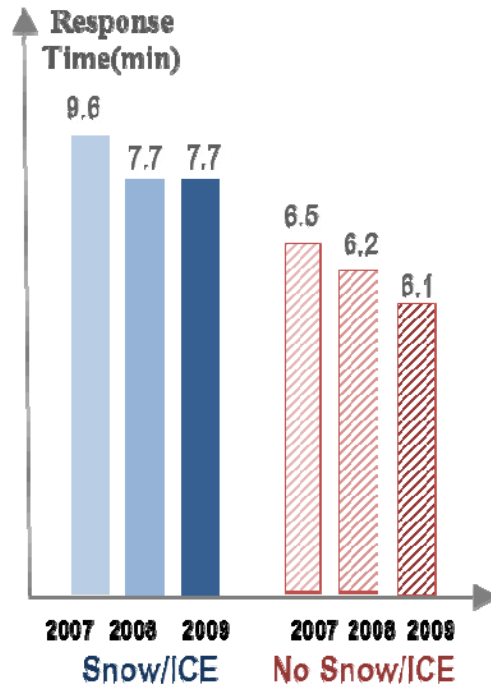


Figure 3-4: Comparison of incident response times with and without snow/ice conditions

Figure 3-5 further illustrates the impacts of traffic congestion on the average incident response time, reflecting the need to prevent the response team from being impeded by slow traffic during peak hours. For example, it took CHART’s response units in the Washington region an average of 10.5 minutes to reach an incident scene if no lane blockage occurred during peak periods, but only 7.4 minutes for the same type of incidents during off-peak periods. Similarly, it took the response team in the Baltimore region an average of 10 minutes and 7.5 minutes, respectively, for the same incident type during peak and off-peak periods. This finding also holds for incidents of different severities across all CHART’s service regions. It, however, is noticeable that CHART’s response efficiency varies with incident severity and its resulting traffic impact (i.e. number of blocked lanes) regardless of the roadway congestion. This finding is evidenced in the consistent pattern shown in Figure 3-5.

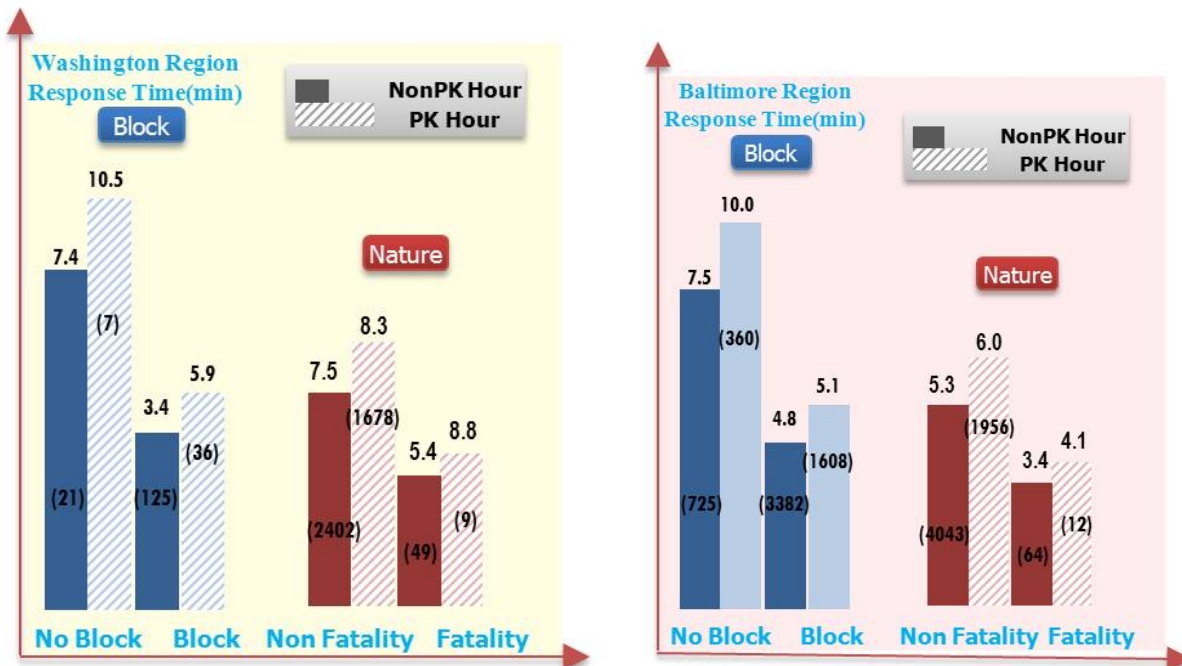


Figure 3-5: Average response time by region during peak and non-peak periods

3.3 Performance between Different Operations Centers

Due in part to the available resources, the response efficiency of CHART’s five operations centers varies significantly, where AOC generally outperforms all other centers and TOC7 tends to take the longest response time for the same type of incidents. A graphical comparison of the average response times among these five centers to incidents with and without resulting lane blockage is shown in Figure 3-6. Table 3-1 further shows the performance discrepancy among those centers even responding to incidents on the same route. For example, TOC7 took an average of 9.8 minutes to respond to incidents on I-70, longer than 6.5 minutes by SOC and 7.3 minutes by TOC3. Similarly, the average response time for AOC to reach incident scenes on I-95 was 4.5 minutes, about 40 percent less than TOC3 (i.e., 8.4 minutes). Understandably, various factors could contribute to these performance discrepancies. However, ensuring the consistency of incident response efficiency across different service regions is an important issue for CHART.

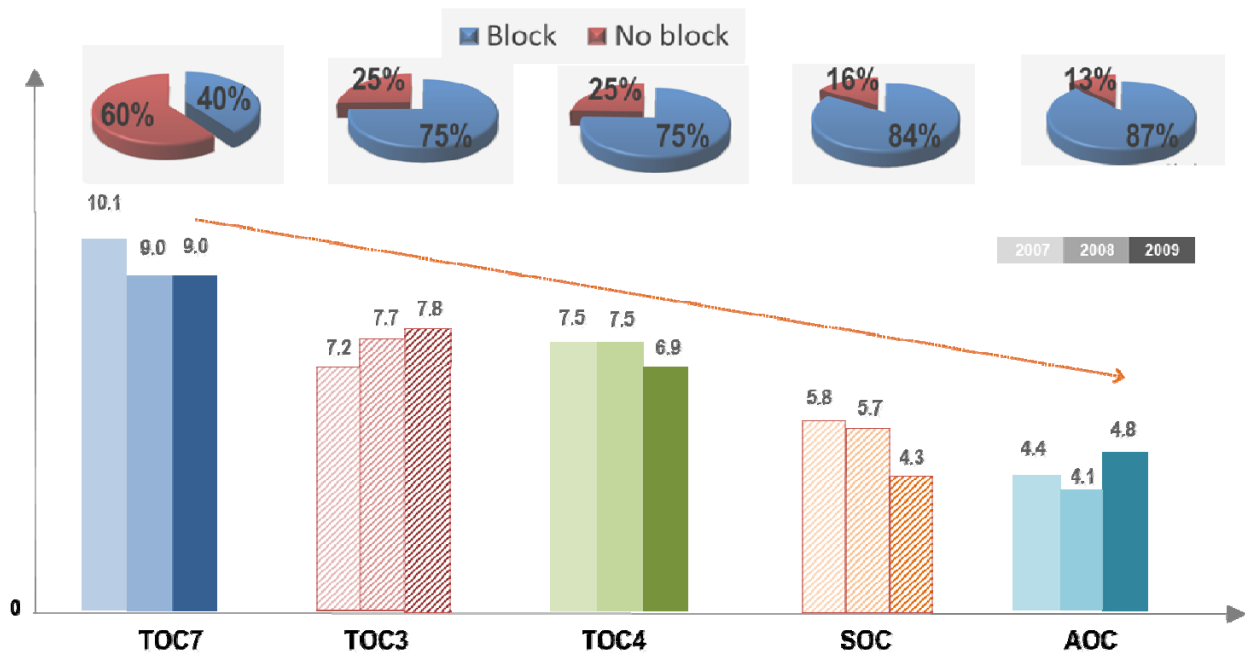


Figure 3-6: Comparison of average response times among five operations centers

Table 3-1: Comparison of incident response times between response centers on different roads

Center	I-70			I-270			I-95		
	Mean	St. D*	N**	Mean	St. D	N	Mean	St. D	N
TOC7	9.8	6.6	198	9.0	5.6	362			
TOC3	7.3	6.4	290				8.4	6.8	166
TOC4				6.8	5.4	290	7.6	5.4	212
SOC	6.5	7.3	63	4.7	5.3	34	6.1	7.4	113
AOC							4.5	5.2	2249

*standard deviation; ** sample size

Table 3-2 further compares the performance of those five response centers in response to incidents causing no fatality during the off-peak period. As reflected in the statistics, TOC7, on average, took 16.4 minutes on a snowy day to respond to an incident causing no lane blockage and fatality. This is much longer than the average 11 minutes to respond under the same conditions but without snow. In contrast, AOC's response times to the same type of incidents under snowy and non-snow days were 4.9 and 6.7 minutes, respectively. The statistics in Table 3-2 also reveal the following interesting patterns:

- Snow/ice roadway conditions always cause excessive delay to the response effort of every operational center;
- AOC and SOC were consistently more efficient in responding to incidents regardless of snow;
- TOC7’s average response time to all types of incidents was consistently longer than that of all other centers; and
- All five incident response centers exhibit the same pattern of more promptly responding to incidents resulting in more traffic impacts.

Table 3-2: Comparison of response times between response centers under different incident types and weather conditions

Lane block	Nature	Time	Centers	Snow			No snow		
				Mean	S. D*	N**	Mean	S. D	N
No block	Non-fatality	Off-Peak	TOC7	<u>16.4</u>	11.7	31	<u>11.1</u>	7.4	381
			TOC3	13.3	11.1	13	12.0	8.9	191
			TOC4	13.2	7.8	15	10.7	7.4	223
			SOC	8.8	10.4	8	6.9	8.0	110
			AOC	4.9	3.8	7	5.4	6.7	285
Block	Non-fatality	Off-Peak	TOC3	<u>7.9</u>	8.2	26	<u>5.7</u>	4.8	552
			TOC7	7.6	9.5	6	5.5	3.6	244
			TOC4	6.6	8.2	38	6.2	4.5	717
			SOC	5.9	10.8	33	5.0	7.5	503
			AOC	3.5	3.2	45	4.3	4.6	1891

*standard deviation; ** sample size

Table 3-2 summarizes the response time differences among those five operations centers under various conditions, including whether there was lane blockage, weather, whether or not the incident resulted in a fatality, and time of day. The statistics shown in the Table are consistent with previous analysis results. TOC7 and TOC3 generally took longer to respond than the other three centers. The comparison results also confirm the previous finding that all operation centers consistently responded to incidents resulting in a greater number of blocked lanes more quickly, given the same incident nature, weather condition, and different times of day. This result seems to indicate that CHART has the potential to improve its overall incident response performance even under the current resource constraints.

Table 3-3: Comparison of response times between response centers under the compound impacts of key factors

Nature	Pavement	Time	Centers	Block			No Block		
				Mean	S. D.*	N**	Mean	S. D.	N
Fatal	Snow & No snow	Peak & Off-Peak	TOC3	5.2	4.5	21			
			SOC	3.5	5.4	125	10.0	7.7	7
			TOC4	3.2	2.8	9			
			AOC	2.5	1.9	5	7.6	8.3	5
			TOC7	2.3	1.0	4	13.3	8.7	6
No Fatal	Snow	Off-Peak	TOC7	7.6	9.5	6	16.4	11.7	31
			TOC3	7.9	8.2	26	13.3	11.1	13
			TOC4	6.6	8.2	38	13.2	7.8	15
			SOC	5.9	10.8	33	8.8	10.4	8
			AOC	3.5	3.2	45	4.9	3.8	7
	No snow	Peak	TOC7	5.5	3.5	235	12.3	8.3	306
			TOC3	6.4	5.4	440	12.2	8.8	112
			TOC4	5.9	4.4	631	11.6	8.1	215
			SOC	4.3	3.9	186	9.8	8.9	30
			AOC	4.4	4.5	668	5.0	5.3	67
		Off-Peak	TOC3	5.7	4.8	552	12.0	8.9	191
			TOC7	5.5	3.6	244	11.1	7.4	381
			TOC4	6.2	4.5	717	10.7	7.4	223
			SOC	5.0	7.5	503	6.9	8.0	110
		AOC	4.3	4.6	1891	5.4	6.7	285	

*standard deviation; ** sample size

3.4 Summary of Key Research Findings

This chapter presents the analysis results of CHART’s efficiency in responding to various types of incidents under different traffic and environmental conditions. It also compares the performance of five regional response centers, based on the distribution of incident frequency, severity, and impacts on traffic conditions. Some informative findings that could be used by CHART to enhance its incident response operations are summarized below:

- CHART’s response efficiency is not consistent, varying with such factors as incident severity, traffic congestion, weather conditions, fatalities, and pavement conditions. For

example, the average response time for property-damage only incidents is longer than those having injuries and/or fatalities.

- All CHART's response centers under identical conditions consistently took shorter times to respond to incidents resulting in more traffic impacts such as causing multiple lane blockage or fatalities.
- The average response times among CHART's five operations centers differ significantly: TOC7 exhibited the longest average of around 9.5 minutes and AOC had the shortest time of 4.5 minutes over the period of 2007-2009.
- The distribution of available resources (e.g., tow trucks and staff size) among CHART's five operations centers may be one of the key factors significantly affecting their response efficiency.

CHAPTER 4: Analysis of Incident Clearance Efficiency

4.1 Introduction

As has been documented, the resulting clearance time of a detected incident depends on a variety of factors, including: its nature and severity, the need and availability of any special equipment, the coordination between different agencies (e.g., police, fire department, and medical emergency services), the location and its congestion level, time of day, as well as weather conditions. This chapter presents the analysis results of CHART's incident clearance efficiency, focusing on identifying critical factors that cause an excessively long time for traffic recovery. The identified relations between incident clearance time and various contributing factors further serve as the basis to compare the performance between CHART's five incident response centers.

The rest of this chapter is organized as follows: Section 4-2 presents the distribution of average incident clearance time by critical factors, such as the number of blocked lanes and fatalities, using the CHART incident data from 2007 to 2009. Section 4-3 compares the efficiency of CHART's five local response centers in clearing various types of incidents, highlighting their performance discrepancies under the resource constraints and the responsible network coverage. Research findings and suggestions for improving CHART's effectiveness on recovering incident-plagued traffic conditions constitute the last section.

4.2 Distribution of Incident Clearance Times by Critical Factors

Figure 4-1 presents the distribution of average incident clearance times by blocked lanes, by fatality, and heavy vehicle involvement. The statistics in the table clearly reflect the following patterns:

- Incidents causing multi-lane blockage, on average, resulted in longer clearance durations than single-lane-blockage incidents, based on the data from 2007-2009;
- Truck-involved incidents generally took the responsible operations center much longer time to clear the incident scenes; and
- The average clearance time of incidents resulting in fatalities was much longer than those causing only property damage and/or injury.

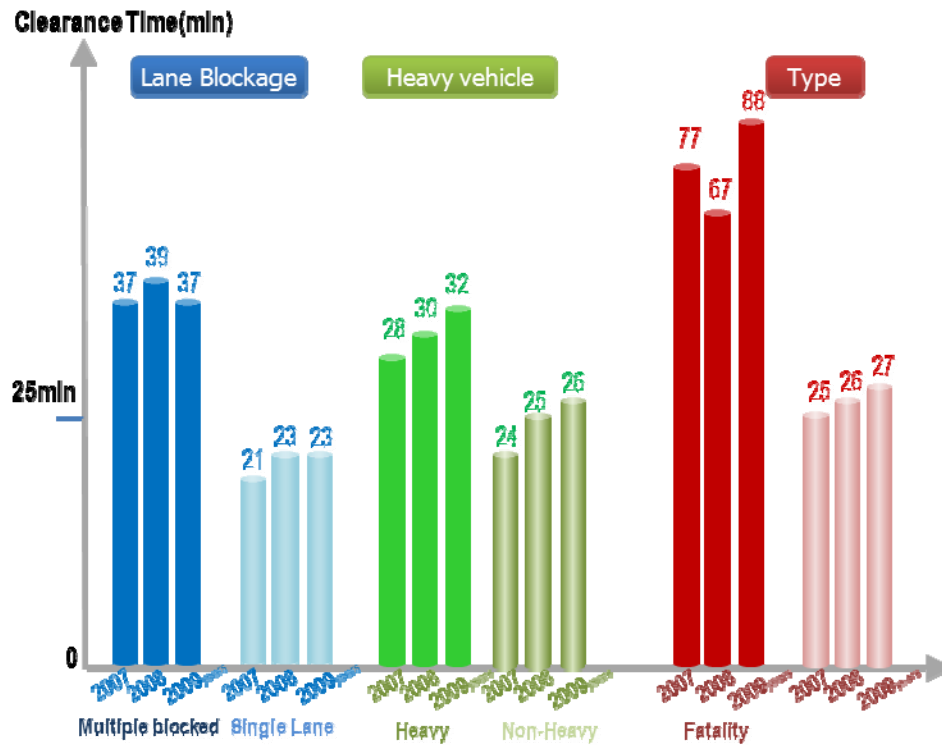


Figure 4-1: Average clearance time by lane blockage, injury nature, and heavy vehicle involvement

Table 4-1 further classifies the distribution of those incidents in Figure 4-1 by the threshold of two hours. It is noticeable that about 83 percent of fatal incidents lasted longer than 2 hours, compared with only 5.8 percent of non-fatality incidents; about 18.5 percent of incidents requiring multiple lane closures had clearance times greater than 2 hours, while only 3.5 percent of single-lane closures lasted more than 2 hours. The same pattern also exists in incidents involving heavy vehicles, where about 12 percent of such incidents affected the roadway traffic for over two hours.

Table 4-1: Classifying the distribution of incident clearance times by the threshold of two hours.

Factors	lane block		Incident Nature		Heavy vehicle involvement	
	Multiple	Single	CF*	Non-CF	Heavy**	Non-heavy
Shorter than 2 hours	81.5% (3020)	96.5% (10307)	17% (49)	94.2% (13278)	88.2% (4226)	94.8% (9101)
Longer than 2 hours	18.5%(685)	3.5%(377)	83.0%(239)	5.8%(823)	11.8%(564)	5.2%(498)
Total	100%(3705)	100%(10684)	100%(288)	100%(14101)	100%(4790)	100%(9599)

*Collision-fatality; ** heavy-vehicle involvement.

The performance analysis also included the impacts of weather and environmental conditions on incident clearance time. Figure 4-2 further presents the distribution of incident clearance times by pavement conditions and time of day. As expected, incidents occurring at night generally experienced longer clearance durations and snow/ice pavement conditions caused difficulty in clearance operations and thus required longer times.

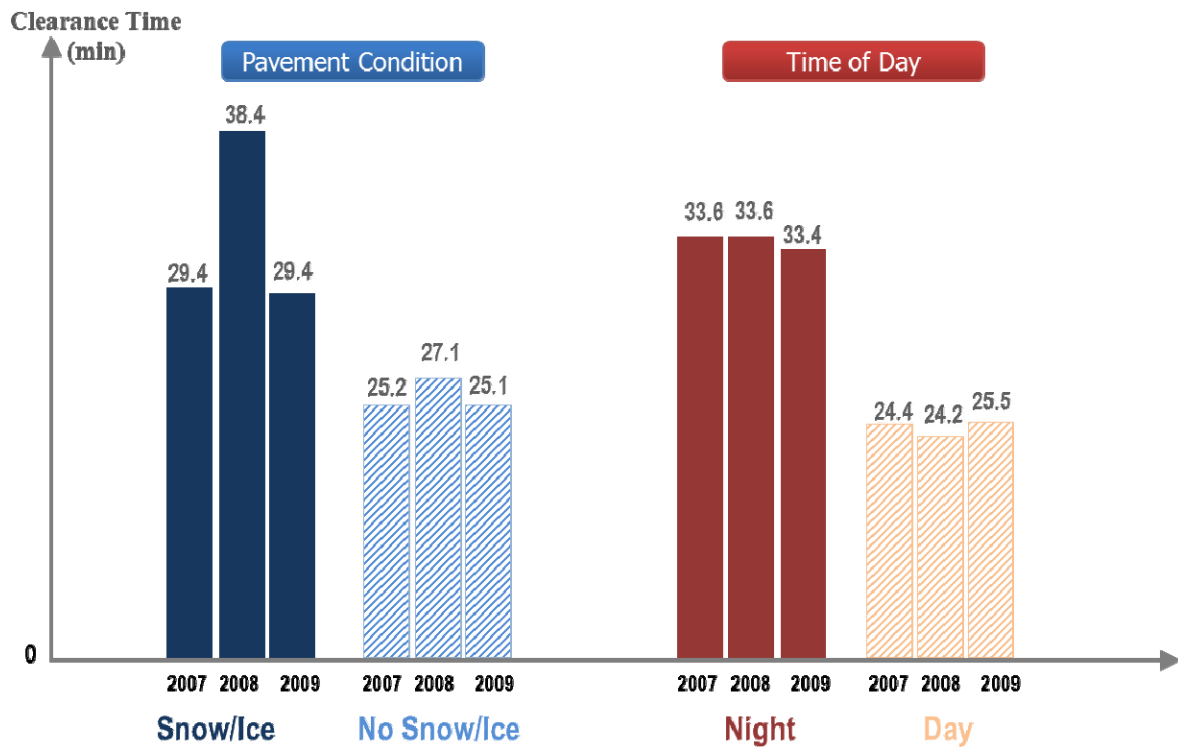


Figure 4-2: Average clearance time by environmental conditions

Figure 4-3 shows the distribution of incident clearance time by weekday and weekend. It is noticeable that incidents occurring during weekends had consistently longer clearance times than during weekdays for all three years. One plausible explanation is that fewer response teams are available during weekends than during weekdays, thus contributing to longer times to clear incidents.

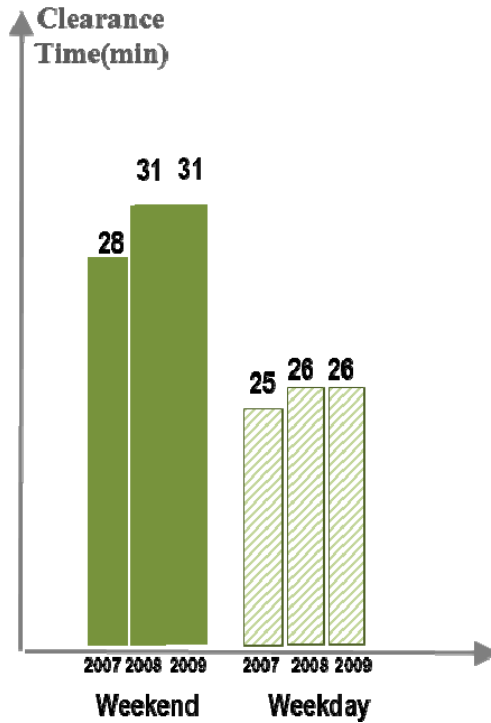


Figure 4-3: Distribution of average clearance times by weekend and weekday.

Despite the discrepancies in incident clearance efficiency under various conditions, CHART’s involvement in traffic management significantly reduced the average time for roadway conditions to recover. This is evident in the statistics shown in Figure 4-4 based on the incident data between 2007 and 2009.

4.3 Analysis of Incident Clearance Efficiency by Operations Center

Comparison of incident clearance efficiency between CHART’s operations centers is not a straightforward task because the resulting clearance time depends on the collective impacts of various factors such as incident nature, severity, truck involvement, weather conditions, and coordination among all responsible agencies. Figure 4-4 shows the preliminary statistics of incident clearance efficiency by those five CHART operations centers, where TOC3 and SOC had the shortest and longest clearance times, respectively. Note that SOC is responsible for managing the most severe incidents, causing it to have the longest average clearance time.

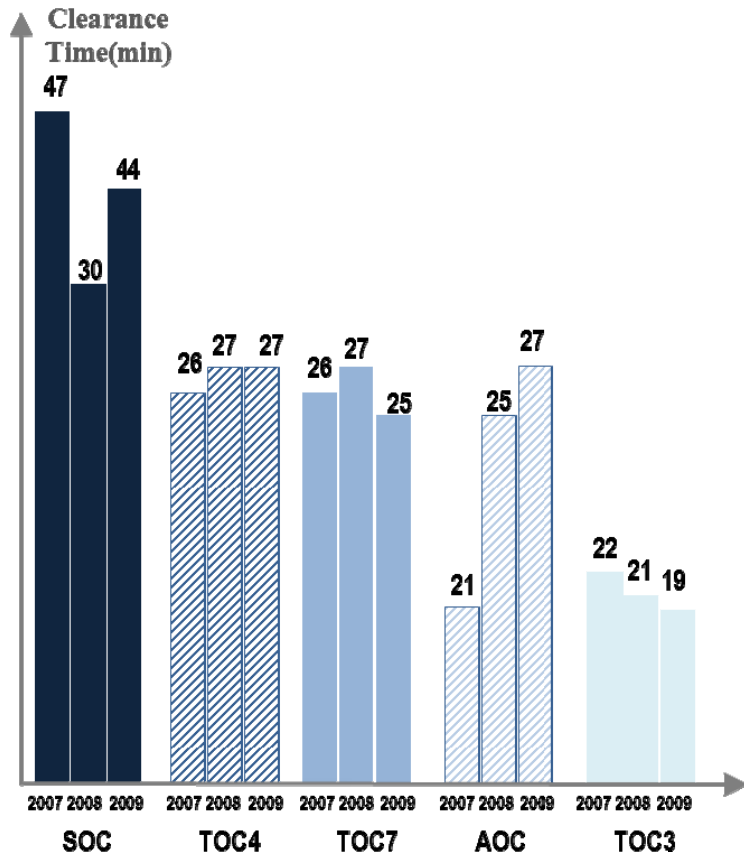


Figure 4-4: Clearance time distributions by each operation center

Table 4-2 shows the incident clearance efficiency of CHART’s operations centers under the collective impacts of several critical factors, including fatality, lane blockage, pavement condition, heavy vehicle involvement, and time of day. The analysis results in the table reveal the following patterns:

- Truck-involvement incidents, regardless of whether the incidents resulted in single- or multi-lane blockage, generally had longer clearance times for all operations centers, even if the incidents occurred during the day and under non-snow and no-fatality conditions.
- SOC consistently took the longest time among all operations centers to clear incidents regardless of lane-blockage or truck-involvement conditions.
- TOC3 seems to clearly outperform all other centers with respect to clearance time in all incident scenarios.

Table 4-2: Average clearance time of incidents involving Heavy/Non-heavy vehicles under different conditions

Lane block	Nature	Time	Pavement	Centers	Heavy			No Heavy		
					Mean	S. D	N**	Mean	S. D	N
Multi lane	Non-fatality	Day hour	No Snow	SOC	<u>43.8</u>	29.1	157	<u>40.9</u>	25.2	336
				TOC7	45.1	28.3	93	35.4	22.7	157
				TOC4	40.8	26.6	250	33.2	21.7	333
				AOC	36.5	30.0	150	29.1	23.2	446
				TOC3	32.7	24.5	185	27.7	18.9	303
Single lane	Non-fatality	Day hour	No Snow	SOC	<u>30.0</u>	28.0	232	<u>26.9</u>	21.9	430
				TOC7	26.9	24.6	404	23.1	18.7	1676
				TOC4	25.6	21.8	822	22.5	19.5	817
				AOC	23.6	21.6	723	20.8	18.4	2112
				TOC3	20.5	19.8	575	17.4	15.5	938

*TOC6 and TOC5 are not included due to insufficient samples. **N: sample size; S.D.: standard deviation

Table 4-3 compares the clearance efficiency of CHART’s five centers in response to incidents causing single- and multi-lane blockage under various conditions. The statistics in the table show the same observed trend that increasing the number of blocked lanes for a given incident tends to increase its clearance time. For example, considering non-fatal events occurring under non-snow conditions, at night, and involving no heavy vehicle, SOC took an average of 51.6 minutes to clear a multi-lane-blockage incident, compared with 42.5 minutes for single-lane-blockage incidents. This trend is evident across all response centers. Additional implications revealed in the table statistics include:

- With all conditions being identical, all operations centers generally took longer times to clear incidents occurring at night than in the day time.
- TOC3 had the best operations efficiency to manage non-fatal incidents involving heavy vehicles and causing either single-lane or multi-lane blockage.
- AOC generally took longer time to respond to incidents involving heavy vehicles and lane blockage on snow days. AOC needed an average of 52 minutes on snow days to clear an incident causing multi-lane blockage, much longer than the average of 29.9 minutes by TOC3 under the similar conditions.

Table 4-3: Comparison of incident clearance efficiency among different operations centers

Nature	Time	Pavement	Heavy	Centers	Multi-lane			Single lane		
					Mean	S. D	N	Mean	S. D	N
Non-fatality	Nigh hour	No Snow	Non-Heavy	SOC	<u>51.6</u>	29.5	110	<u>42.5</u>	27.7	100
				TOC4	43.5	29.2	27	28.8	22.3	109
				AOC	38.8	28.8	125	25.6	22.3	466
				TOC7	38.6	27.0	10	25.0	19.9	58
				TOC3	36.2	23.8	25	20.3	18.4	78
Non-fatality	Day hour	No Snow	Non-Heavy	SOC	<u>40.9</u>	25.2	336	<u>26.9</u>	21.9	430
				TOC7	35.4	22.7	157	23.1	18.7	1676
				TOC4	33.2	21.7	333	22.5	19.5	817
				AOC	29.1	23.2	446	20.8	18.4	2112
				TOC3	27.7	18.9	303	17.4	15.5	938
Non-fatality	Day hour	Snow	Heavy	AOC	<u>52.0</u>	25.8	6	<u>31.5</u>	22.5	14
				SOC	45.9	30.2	8	36.0	36.4	6
				TOC4	38.4	27.7	10	29.0	20.7	17
				TOC3	29.9	13.8	8	19.9	24.1	22

*TOC6 and TOC5 are not included due to insufficient samples. **N: sample size; S.D.: standard deviation

Table 4-4 presents the impact of snow and time of day on each operations center’s clearance efficiency. Notably, SOC consistently took the longest time among all five centers to clear the impacts of any incident, regardless of having snow or not or during the day time or not. For example, SOC’s average clearance time for incidents occurring during typical daytime was about 35 minutes, but increased to 40 minutes with snow. The same incident scenarios occurring at night time took SOC 51 minutes and 58 minutes, respectively, to clear the incident impacts. In contrast, TOC3 had an average of 26 and 31 minutes, respectively, for the same incident scenarios. Overall, TOC3 seems to outperform all other operations centers under various incident scenarios.

Table 4-4: Comparison of incident clearance efficiency between centers under different times of day and weather conditions

Time	Night hours						Day hours					
	Snow/Ice			No Snow/Ice			Snow/Ice			No Snow/Ice		
Center	Mean	S. D	N	Mean	S. D	N	Mean	S. D	N	Mean	S. D	N
SOC	<u>57.8</u>	32.8	25	51.2	30.4	336	40.1	33.2	47	34.7	26.9	1173
TOC4	<u>40.7</u>	28.4	44	33.8	24.4	194	25.1	23.8	75	26.3	21.3	3085
AOC	34.2	28.8	33	28.1	24.6	768	35.2	24.3	79	23.2	20.8	3432
TOC3	<u>31.0</u>	26.5	29	26.4	22.3	157	24.4	21.9	70	21.5	19.3	2009
TOC7	23.3	29.3	19	28.7	23.1	101	26.4	18.4	46	26.5	22.8	1473

*N: sample size; S.D.: standard deviation

4.4 Research Findings and Conclusions

This chapter presents the analysis results of CHART’s incident clearance efficiency under different traffic and environmental conditions. It also compares the performance of five regional response centers, based on the distribution of incident frequency, severity, weather conditions, and impacts on traffic conditions. Some informative findings that could be used by CHART to enhance its incident response operations are summarized below:

- The resulting clearance time of a detected incident depends on various factors, including: incident nature and severity, the need and availability of any special equipment, the coordination between all responsible agencies (e.g., police, fire department, medical team), and incident location.
- Heavy-vehicle involvement, multi-lane closure, and night time are the key factors contributing to the longest incident clearance durations.
- Truck involvement, multi-lane closure, and fatalities are three critical factors contributing to most excessively long incident clearance times.
- Most incidents (83 percent) involving fatalities took more than two hours for roadway conditions to recover, revealing the need for better coordination with emergency responders.
- The efficiency of incident clearance of CHART’s five response centers varies with the weather and environmental conditions; i.e., the average clearance duration at night time

and/or under a snow condition is substantially longer than the duration under day time and normal weather environments.

- The discrepancies in the average incident clearance time among CHART's five response centers reflect not only the difference in each center's responded incident types and frequency, but also in the distribution of the required equipment/vehicles and staff to accomplish the mission.

CHAPTER 5: A Real-Time Model for Predicting Incident Clearance Duration

5.1 Introduction

Predicting the required clearance duration for a detected incident is an essential task for estimating the traffic impacts and for designing management strategies. The complex interactions among various factors affecting the performance of an incident response team, however, make such predictions very challenging. Researchers in the traffic community have devoted considerable effort to this issue with limited progress. This chapter presents exploratory results on this vital subject, based on the incident data recorded by CHART and MAARS.

This chapter is organized into five different sections. Section 5.2 offers a concise review of related literature on the prediction of incident clearance duration, including a discussion of critical issues associated with model development. Section 5.3 illustrates the core logic of various Bayesian-based estimation models, highlighting their potential for developing incident clearance models. Section 5.4 reports the estimation results from various incident clearance models calibrated with the merged dataset from the CHART and MAARS databases. Recommendations for developing a comprehensive model for incident duration prediction in the future constitute the last section.

5.2 Literature Review

The impact of traffic incidents on roadway congestion has long been recognized by transportation professionals (DeRose, 1964; Wilshire and Keese, 1963), but not much progress has been made on how to predict the duration of a detected incident. In recent years, some researchers attempted to identify critical factors affecting incident duration. For example, Khattak et al. (1995) used a sample of 109 incidents to model incident duration using regression and survival techniques. The authors concluded that most incidents tended to have longer durations if injuries, heavy vehicles, heavy loading, non-solid loading, facility damage, and adverse weather were involved. Garib et al. (1997) developed regression models for predicting incident duration and its resulting delay, based on factors such as the number of blocked lanes, the number of involved vehicles, truck involvement, time of day, police response time, and weather conditions.

For the same research objective, Chung et al. (2010) developed a survival analysis model to predict the clearance duration of 2,940 accidents on Korean freeways. Their study found that each fatality increased the incident duration by about 19.5 percent, while incidents within a work zone generally increased their durations by about 18.6 percent. Their report also indicated that the required clearance duration for incidents involving large trucks was about 45 percent longer than the average. Another study by Nam and Mannering (2000) used 681 observations to construct a hazard-based duration model and concluded that traffic congestion was the most critical factor influencing response time and the clearance duration increased with an incident's severity level. Their finding that more severe incidents generally result in longer durations was also confirmed by Golob et al. (1987) and Jones et al. (1991). In analyzing urban freeway incidents, Giuliano (1989) also concluded that factors such as high traffic volume, fatalities, or truck involvement, tend to prolong the incident duration.

Similarly, Khattak et al. (1995) developed a truncated regression with time sequential information to predict incident duration, and Garib et al. (1997) used the same model to show that 81 percent of variation in incident duration could be attributed to the following six factors: the number of lanes blocked, the number of vehicles involved, truck involvement, time of day, police response time, and weather conditions. Sullivan (1997), using incident data from six U.S. cities to estimate their incident durations and associated delays, also reached similar conclusions.

Focusing on freeways, Smith and Smith (2001) compared the performance of three prediction models for incident clearance time: stochastic model, non-parametric estimation, and classification-tree methodology. They concluded that none of those models could produce a sufficient level of accuracy for traffic managers to make reliable traffic management decisions.

Different from the classical methods, Boyles et al. (2007) employed a naïve Bayesian classifier (NBC) to predict incident duration with various levels of information. They indicated that the performance of an NBC model was comparable with the classical regression-based prediction model. Along the same research line, Li and Cheng (2011) developed a tree-augmented naïve (TAN) Bayesian classifier and a latent-Gaussian naïve Bayesian (LGNB) classifier to address the limitations of naïve Bayesian (NB) and unrestricted Bayesian networks (UBN). The authors concluded that the TAN model generally outperforms the NB and UBN models, but the LGNB and the NB classifier models perform similarly. More recently, Demirogluk and Ozbay (2011) applied the Bayesian Information Criterion (BIC) to compare the

performance of three methods to predict incident duration: naïve-Bayesian model, tree-augmented naïve Bayesian model, and a K2-learned Bayesian network. With extensive empirical analyses, they reported that the K2-learned Bayesian network produces the best results, and its accuracy level increases with the amount of available information.

5.3 Analysis of Prediction Algorithms

Data description

Incident data from CHART's data base was used for model development. It includes a total of 11659 incidents from year 2007 to year 2010, where 75 percent of the data was randomly selected for parameter calibration and the remaining samples were for performance evaluation. A standard quality control method was also applied to remove faulty data. The set of variables (see Table 5-1) associated with each incident record includes: incident nature, pavement condition, time of day, the number of vehicles involved, the number of heavy vehicles involved, lane closure, response center, and location.

Bayesian Network and Inference

Based on the results of the literature review and exploratory analysis, this study applied a Bayesian Network (BN) method to develop the incident clearance duration model. A BN typically contains a set of variables (modeled as nodes), parent-child dependency of the nodes, and conditional probability distribution (CPD). For any nodes in a BN, their joint probability distribution can be calculated as follow (5):

$$P(x_1, x_2 \dots x_n) = \prod_{i=1}^n P(X_i = x_i | X_j = x_j), \text{ where } X_j \text{ is a set of parents of } X_i \quad (5-1)$$

Figure 5-1 is a Bayesian network and its conditional probability distribution at every node, where X4 is a parent node of X2 and X5; X5 is a child node of X4 and parent node of X2; X2 is a child node of both X4 and X5.

Table 5-1: Description of Incident variables

Variable	Description
Clearance Time	1 to 918 minutes
Incident Nature	(1) Collision and Fatality, (2) Collision and Injury, (3) Collision and Property Damage, (4) Disabled Vehicle
Pavement Condition	Snow, Dry, Wet, and Chemical Wet
Time	(1) Weekday Off-peak, (2) Weekday Peak, (3) Weekday Night, (4) Weekend Day, (5) Weekend Night
Number of Vehicles Involved	One, Two, Three and Four or More
Number of Heavy Vehicles Involved	Zero, One and Two or More
Lane Closure	(1) No Block, (2) Shoulder Block, (3) One Lane Block, (4) Two Lanes Block, (5) Three Lanes Block, (6) Four or More Lanes Block
Operation Center	AOC, SOC, TOC3, TOC4 and TOC7
Road	I-70, I-95, I-270, I-495, I-695 and US-50
County	Baltimore, Eastern, Southern, Western, Virginia and Washington

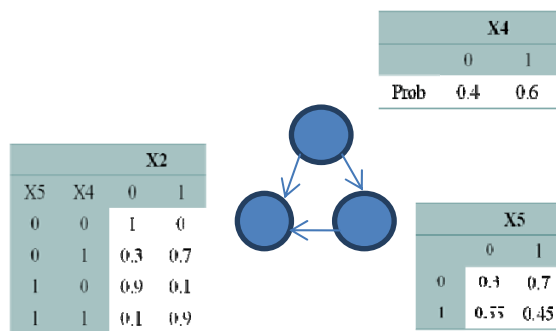


Figure 5-1: Example of a Bayesian Network

The primary function of a BN is to calculate the probabilistic inference, which is the joint probability distribution of the node. For example, the probability of $X_4=0$ while $X_2=0$ is computed as follows:

$$P(X_4=0|X_2=0) = \frac{P(X_4 = 0, X_2 = 0)}{P(X_2 = 0)} \cong 38.6\%$$

K2-Structure Learning Model

The interdependent relationships among variables are not always known while building a BN. Structure learning is designed for building the BN structure by progressively learning the relationships from the dataset. The K2-algorithm is an efficient search process that produces a BN by maximizing the joint probability between variables in the order. A variable in a higher order generally has a higher probability to be a parent node. However, no universally agreed method or algorithm exists for determining the variable order, which is usually decided with expert knowledge. For example, Ozbay (2006) used a logical parent-child relation to specify the ordering among key variables, and Demirolok (2011) applied a special algorithm for the same purpose.

Note that the K2-algorithm is mainly used to maximize the following Bayesian score function:

$$P(D|G) = \prod_{i=1}^n \prod_{j=1}^{q_i} \frac{\Gamma(\alpha_{ij})}{\Gamma(\alpha_{ij} + N_{ij})} \prod_{k=1}^{r_i} \frac{\Gamma(\alpha_{ijk} + N_{ijk})}{\Gamma(\alpha_{ijk})} \quad (5-2)$$

where: D is the database; G is the directed acyclic graph; n is the number of nodes; q_i is the number of configurations of parents for node x_i ; α is the prior distribution; and N is the number of times each score is calculated. The search procedure for the above optimization process includes three steps:

Step-1: Calculate the Bayesian Score for node i that is assumed to have no parent node.

Step-2: Add a parent to node i , if the resulting Bayesian Score is greater than the no-parent condition; and then add the connection between the parent node and node i .

Step-3: Search the space to add a parent node on node i until the Bayesian Score has been maximized.

Scoring Function

As stated previously, Bayesian Information Criterion (BIC) is the most popular method to select different Bayesian structures constructed from the available data. The BIC scoring function, designed to maximize the likelihood but penalize the unnecessary model complexity, has the following form:

$$\mathbf{BIC} = \log P(\mathbf{D}|\mathbf{G}, \theta_{\mathbf{G}}) - \frac{\mathbf{G}}{2} \log N \quad (5-3)$$

where: N is the number of samples; G is the dimension of the model; and $P(D|G, \theta_G)$ is the likelihood of the structure.

In performing the Bayesian network inference, one defines a prediction as accurate if the category with the highest joint probability matches the actual category. For example, the “Four Duration” box in Figure 5-2 shows that the category of more than thirty minutes is the most probable one because it has the highest probability of 28.3 percent. Note that the category of 15-30 minutes has the second highest probability of 26.5 percent, slightly less than the highest category of 28.3 percent. Hence, the prediction would be defined as inaccurate if the actual case fell between fifteen to thirty minutes.

Note that using this criterion alone in model evaluation often underestimates the performance of some calibrated models that may produce many close but not exact predictions of clearance times. Such prediction results, though not perfectly matching the actual clearance durations, remain useful for traffic agencies to estimate the traffic impacts incurred by incidents. As a result, this study used three evaluation functions for model selection: Logarithmic Loss, Quadratic Loss and Spherical Payoff selection parameters.

$$\text{Quadratic Loss : MOAC} \left[1 - 2P_c + \sum_{j=1}^n (P_j^2) \right] \quad (5-4)$$

$$\text{Spherical Payoff : MOAC} \left[\frac{P_c}{\sqrt{\sum_{j=1}^n \sum_{j=1}^n (P_j^2)}} \right] \quad (5-5)$$

where: MOAC stands for the mean value of all cases; Logarithmic Loss ranges from the best performance of zero to the worst of infinity; Quadratic Loss ranges from zero to two with the value of zero denoting the best score; and Spherical Payoff ranges from zero to the best result of one.


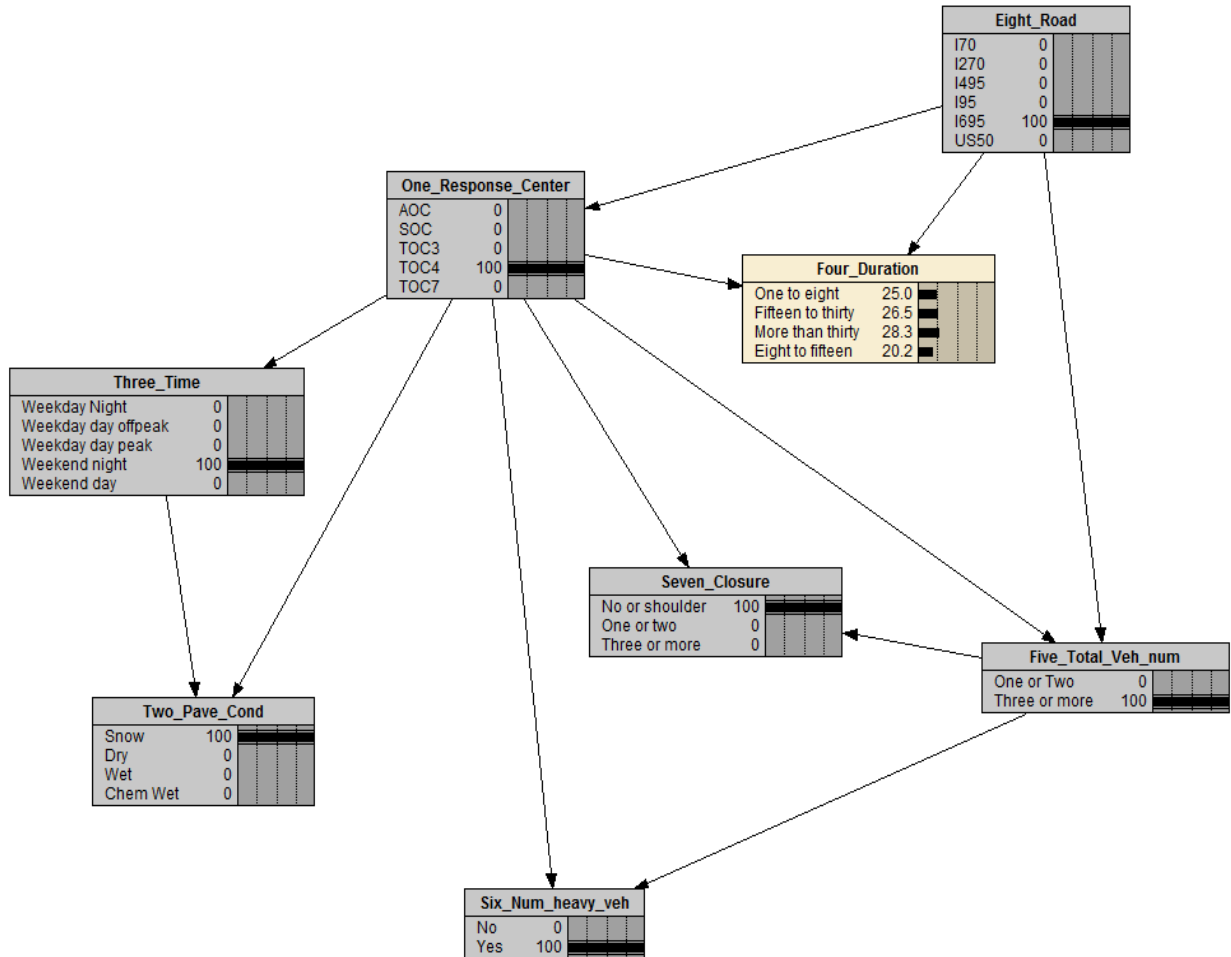


Figure 5-2: A BN for Predicting Incident Clearance Duration

5.4 Model Development and Estimation Results

This study has calibrated two types of incident clearance prediction models: a full model using all available incident related data, and a partial model calibrated with only partial information available in real time operations. The latter was developed to assist control centers in best estimating the traffic impacts even though some detailed information (e.g., the number of blocked lanes, fatality or injury, etc.) may not be available at the decision time. Figure 5-3 shows the classification of the partial-information models, based on whether or not the detected incident

resulted in serious injuries. In all groups of models presented hereafter, 75 percent of the total sample data was used for parameter calibration and the rest was used for performance assessment.

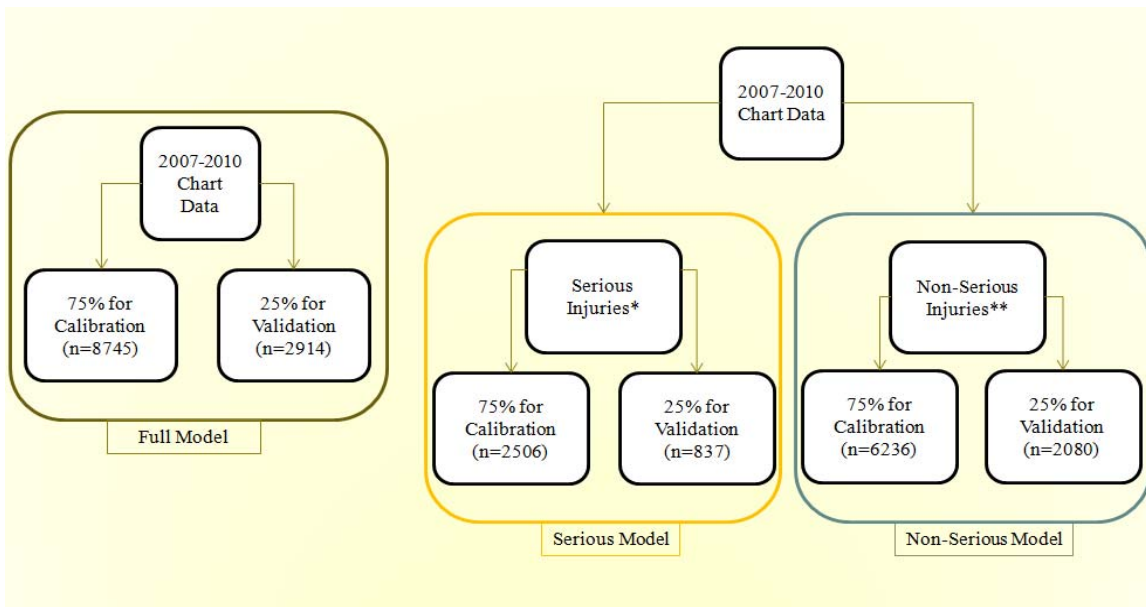

Note: *Serious Injuries = CPI + CF **Non-Serious Injuries = CPD + Disabled Vehicles

Figure 5-3: Graphical illustration of the available Data and the Model Structure

Recognizing the data deficiency and the difficulty in using one model to fit different types of incidents, this study also explored a sequential method to develop various incident clearance duration models. The core idea of this approach is to divide all sample data into several groups by using incident nature and the number of blocked lanes as the two sequential classifiers. One can then apply the BN method to calibrate the best-fit model for each group of incident data.

Figure 5-4 (a) illustrates the classification results of the dataset, which includes three main categories: collision/fatality (CF), collision/property damage/injury (CPI), and collision/property damage (CPD) and disabled vehicles. Figure 4-4(b) shows similar results but comprises two categories: CF&CPI and CPD& disabled vehicles. Figure 4-4(c) presents the resulting samples classified as CF&CPI, CPD, and disabled vehicles.

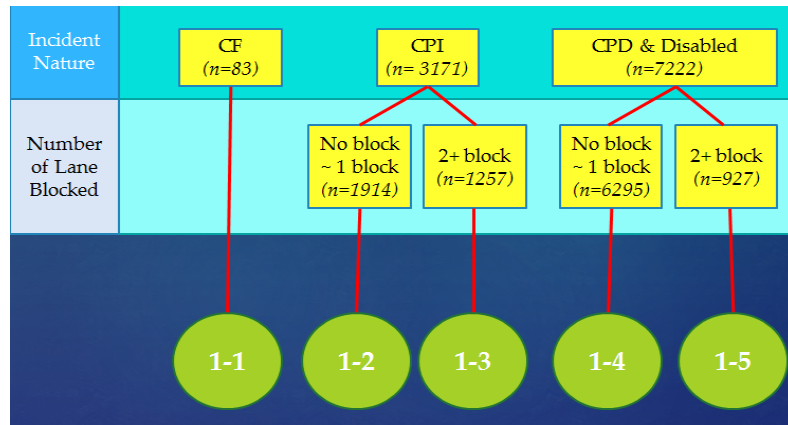


Figure 5-4(a): Data Classification and Model Structure -1

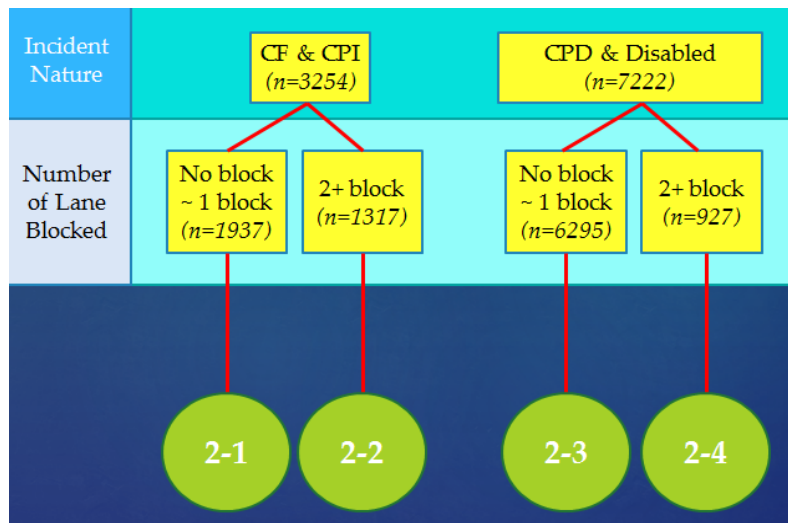


Figure 5-4(b): Data Classification and Model Structure -2

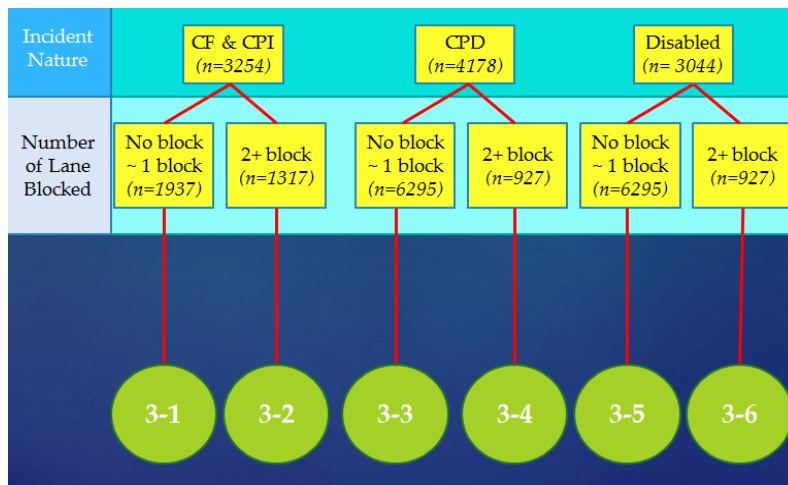


Figure 5-4(c): Data Classification and Model Structure-3

Estimation results

Note that two different ordering sequences for variables were used to calibrate the BN model parameters. The first one (Ordering -1) is: *Road > Operation Center > Time > Pavement Condition > Total Number of Vehicles > Lane Closure > Incident Nature > Heavy Vehicles > Duration*. In this ordering sequence, *Duration* has the lowest rank to be a parent of all other variables.

The second ordering sequence (Ordering-2) was based on the knowledge of field operators, as follows: *Incident Nature > Total Number of Vehicles > Lane Closure > Pavement Condition > Time > Road > Operation Center > Heavy Vehicles > Duration*. The estimation results of each data group using the K2-algorithm under these two order sequences and their BIC scores are presented in the remaining section.

Table 5-2: BIC Scores of Different Models

Model	BIC Scores
Full Model – Ordering 1	-1809.832
Full Model – Ordering 2	-2403.019
Serious Model – Ordering 1	-680.9486
Serious Model – Ordering 2	-564.1333
Non-Serious Model – Ordering 1	-953.27023
Non-Serious Model – Ordering 2	-752.94533

Table 5-2 shows the BIS score for each model, where the full model under Ordering-1 yields a better performance than under Ordering-2. However, the partial-information models, comprising Serious/Non-Serious injury categories, achieve a better accuracy under the Ordering-2 sequence. Hence, Ordering-1 was used to build the Full model and Ordering-2 was applied to construct the partial-information models.

Table 5-3 lists all variables used for developing both the full and the partial-information models (i.e., incidents resulting in serious and non-serious injuries). The Non-Serious submodel in the latter was developed with incident data of disabled vehicles and collision/property damage, while the Serious model used injury and fatality incident data for parameter calibration.

The prediction result with the full model is shown in Table 5-4, where most predicted clearance durations fall into two categories: the 1-15 minutes and 30-more minutes. The accuracy rate of the 15-30 minutes category is much lower than other two categories. Overall, it reflects the fact that the data quality cannot support the models to perform the prediction of incident clearance duration at the precision level of 15 minutes. The overall accuracy rate of the full model is 54 percent if one divides all incident clearance durations at the range of 15-minutes intervals. However, by classifying incident clearance durations into two categories of either less or over 30 minutes, the full model yields an acceptable level of prediction results, as shown in Table 5-5, where the model can correctly predict the duration for about 90 percent of less-severe incidents.

Table 5-3: List of Variables used in the Full Models and Serious/Non-Serious Models

Variable	Full Models	Serious/Non-Serious Models
Clearance Time	1-918 minutes	Same
Incident Nature	(1) Collision and Fatality, (2) Collision and Injury, (3) Collision and Property Damage, (4) Disabled Vehicle	N/A
Pavement Condition	Snow, Dry, Wet, and Chemical Wet	Same
Time	(1) Weekday Off-peak, (2) Weekday Peak, (3) Weekday Night, (4) Weekend Day, (5) Weekend Night	Same
No. Vehicles	One, Two, Three and Four or More	One or Two and Three or more
No. Heavy Vehicles	Zero, One and Two or More	Yes/No
Lane Closure	(1) No Block, (2) Shoulder Block, (3) One-Lane Block, (4) Two-Lane Block, (5) Three-Lane Block, (6) Four or More Lane Block	No or shoulder, One or two and More than three
Operation Center	AOC, SOC, TOC3, TOC4 and TOC7	Same
Road	I-70, I-95, I-270, I-495, I-695 and US-50	Same

The prediction results with the Serious/Non-Serious injury model are shown in Table 5-6 and Table 5-7. Note that the Serious-injury model was designed to explore the potential of predicting the clearance duration of serious-injury incidents at the precision level of 20 minutes. It, however, yields only an accuracy rate of 44 percent. A more ambitious attempt with the Non-Serious model was to predict the clearance duration of an incident at the precision level of eight minutes, but the estimation results in Table 5-7 indicate that both the data quality and model performance cannot support traffic managers' expectation of having such information at this high precision level.

In addition to using the correctly predicted percentage for evaluation, Table 5-7 also shows the comparison results with three performance indicators, where the full-information model with the interval of 30 minutes outperforms all other prediction models.

Table 5-4: Full model prediction results with three categories of incident clearance durations

	Category	Predicted			
Actual		1-15 minutes	15-30 minutes	30+ minutes	Accuracy
	1-15 minutes	921	51	202	78%
	15-30 minutes	397	131	260	17%
	30+ minutes	278	75	601	63%

Table 5-5: Full model prediction results with two categories of incident duration

	Category	Predicted		
Actual		1-30 minutes	More than 30 minutes	Accuracy
	1-30 minutes	1722	250	87%
	More than 30 minutes	606	337	36%

Table 5-6: Serious-injury model prediction results

		Predicted			
Actual		1-20 minutes	20-40 minutes	40+ minutes	Accuracy
	1-20 minutes	115	35	107	45%
	20-40 minutes	105	57	107	21%
	40+ minutes	71	46	194	62%

Table 5-7: Non-serious model prediction results

		Predicted				
		1-8 minutes	8-15 minutes	15-30 minutes	30+ minutes	Accuracy
Actual	1-8 minutes	285	139	124	2	52%
	8-15 minutes	193	210	124	5	39%
	15-30 minutes	138	205	158	6	31%
	30+ minutes	236	147	99	9	2%

Table 5-8: Non-serious model prediction results

	Full Model	Serious Model	Non-Serious Model
Logarithmic loss	1.002	1.055	1.348
Quadratic loss	0.597	0.6377	0.7318
Spherical payoff	0.633	0.6015	0.5175

Note that the above models' undesirable performance can be attributed partly to the incomplete collision information collected by CHART, which only classifies all collision-incidents into five categories: disabled vehicles, collision and property damage, collision and injury, and collision and fatality. Some critical data, such as the number of injuries or fatalities, are not recorded in the CHART's database. In contrast, the database in MAARS contains more detailed information on each collision-incident, which includes: disabled vehicle, fatality, property damage, incapacitating injuries, possible incapacitating injuries, and non-incapacitating injuries. However, MAARS does not record traffic condition and lane-blockage data during incident clearance operations. Hence, to cope with the data deficiencies, one alternative is to merge the CHART and MAARS database into a new synthesized database that contains mutually supplemental information for better model calibration.

Table 5-9 shows the incident classification in the CHART and MAARS databases. Because these two databases use different formats to record their own concerned data, it is difficult to identify the same incident and to merge all associated data from these two systems. Table 5-10 presents two sets of criteria used in matching those incidents recorded by both databases: the incident reported date, time, located county, route name, incident nature, or number of involved vehicles. Note that due to both the data recording quality and the format

discrepancy, the number of correctly matched cases decreases with the number of criteria used for identifying incidents.

Table 5-9: Incident Classification in the CHART and MAARS Databases

	CHART	MAARS
Categories	(1) Collision and Fatality (2) Collision and Injury (3) Collision and Property Damage (4) Disabled Vehicle	(1) Collision and Fatality (2) Collision and Incapacitating Injury (3) Collision and Possible Incapacitating Injury (4) Collision and Non Incapacitating Injury (5) Collision and Property Damage (6) Disabled Vehicle

Table 5-10: Criteria used in merging incident data from the CHART and MAARS Databases

Criteria	Description
Level-1	1. Time difference within twenty minutes on the same day 2. Same county 3. Same Route 4. Difference in the number of vehicles involved does not exceed one vehicle
Level-2	1. Time difference within twenty minutes on the same day 2. Same county 3. Same Route 4. Same Incident Nature as classified in Table 4-9.

Using the correctly merged dataset to recalibrate the full model at an interval of 15 minutes and 30 minutes, the prediction results, as expected, are better than those based only on the collision information from CHART. For example, the full model calibrated with the merged dataset can improve its prediction accuracy for incidents between 1-15 minutes from 78 percent to 84 percent, and for those over 30 minutes from 36 percent to 46 percent (see Table 5-11) if viewing the interval of 15 minutes as an acceptable variance range. Similarly, if the main

concern on a detected incident is whether or not its clearance duration will exceed 30 minutes, the full model calibrated with the merged dataset can improve its prediction accuracy for short-duration incidents (i.e., less than 30 minutes) from 87 percent to 97 percent.

Table 5-11: Prediction results by the full model based on the merged dataset

		Predicted			
		1-15 minutes	15-30 minutes	30+ minutes	Accuracy
Actual	1-15 minutes	858	7	154	84%
	15-30 minutes	364	21	191	4%
	30+ minutes	333	16	292	46%

Table 5-12: Full model prediction results based on the interval of 30 minutes

		Predicted		
		1-30 minutes	More than 30 minutes	Accuracy
Actual	1-30 minutes	1562	53	97%
	More than 30 minutes	549	73	12%

Note that the above prediction results reflect the common deficiency of all developed models in predicting the clearance duration of more severe incidents lasting more than 30 minutes. This is likely due to two reasons: (1) the clearance durations of more than 65 percent of incidents recorded in both the CHART and MAARS databases are less than 30 minutes, naturally causing a bias in model calibration and prediction; and (2) incidents lasting longer time periods generally attribute to many complex factors that are not all recorded in these two databases.

Classified by incident nature and lane-blockage information

To contend with the difficulty of predicting the clearance duration of severe incidents, the research team also explored the alternative of developing a model for each incident group classified sequentially by incident nature and the number of blocked lanes. The performance of each prediction model under different incident intervals is shown in Figure 5-5.

The first set of prediction results presented in Figure 5-5(a) includes the following incident clearance models: *collision/fatality(CF)*, *collision/property damage/injury (CPI)-one or no blocked lane*, *collision/property damage/injury(CPI)-two or more blocked lanes*, *collision/property damage/disabled vehicle (CPI-disabled)-one or no blocked lane*, and *collision/property damage/disabled vehicle (CPI-disabled)-two or more blocked lanes*. The prediction results reveal a consistent pattern across all models, that is, those short-duration but high frequency incidents are likely to be predicted correctly. For those incidents lasting over 40 minutes, only the model for the category of *collision/property damage/disabled vehicle(CPD-disabled)-two or more blocked lanes* produces an acceptable accuracy (72 percent) even at the precision of 20 minutes.

The second set of performance results, shown in Figure 5-5(b), includes the combined CF&CPI models and the CPD-disabled models under two types of lane-blockage conditions. The former set of models calibrated with severe incident data yields somewhat promising results, where the one for incidents causing no or one blocked lane can achieve 94 percent and 82 percent accuracy for those under 20 minutes and between 20-60 minutes, respectively. In contrast, for incidents in the same duration categories but blocking multiple lanes, the model for *CF&CPI- two or more blocked lanes* can correctly predict only 71 percent and 57 percent, respectively, out of all sample cases. Both sets of models cannot yield acceptable prediction results for those incidents lasting over 60 minutes, reflecting that some additional factors that complicate the clearance operations may not be recorded in the database.

The last step of this model analysis is to first separate those incidents classified as *CPD and disabled-vehicles* into two groups, and then further divide them into two subgroups based on the resulting number of blocked lanes. The performance results are shown in Table 5-5(c), where both CPD models show sufficiently reliable capability for predicting all incidents lasting less than 60 minutes. The models for *disabled-vehicles*, due apparently to its sample distribution, yield perfect prediction for those lasting less than 15 minutes, but not for the remaining incidents in the same category.

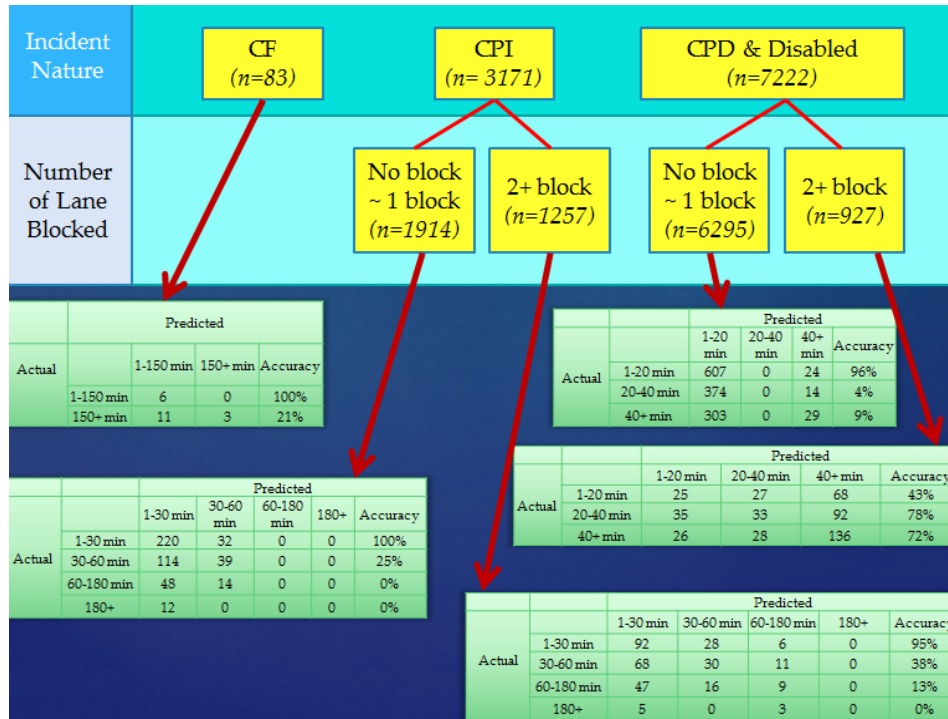


Figure 5-5(a) Estimation results of clearance time prediction models

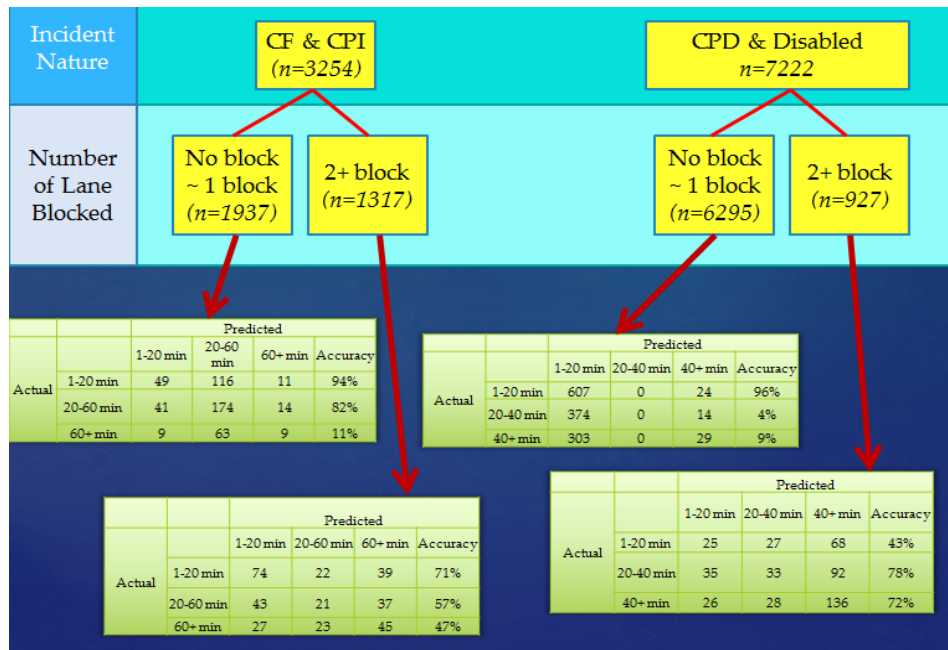


Figure 5-5(b) Estimation results of clearance time prediction models

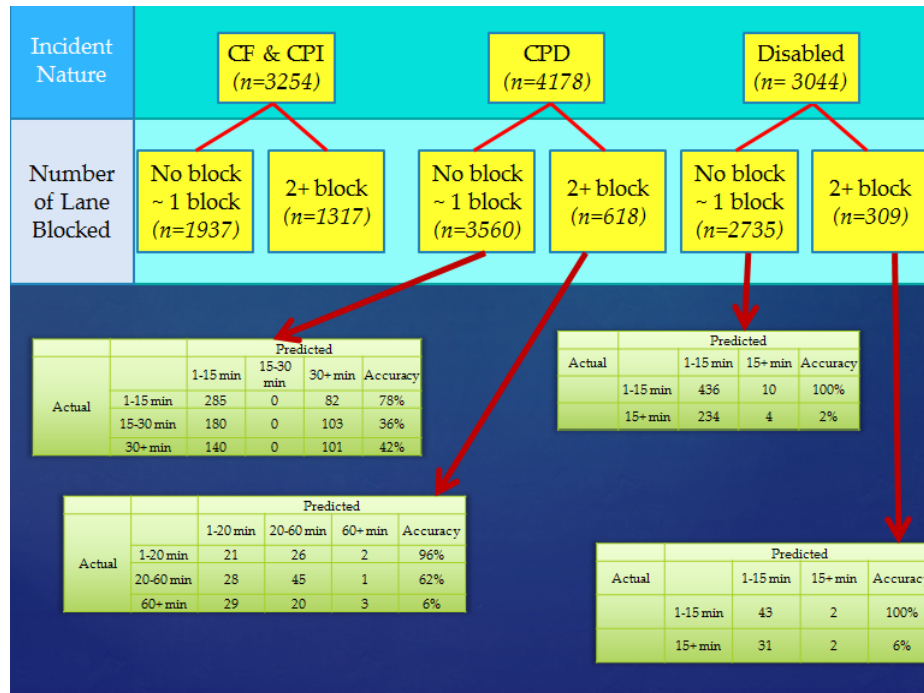


Figure 5-5(c) Estimation results of clearance time prediction models

5.5 Conclusion

Recognizing the critical role of incident clearance duration in design of traffic management strategies, this chapter presents an advanced Bayesian network method for model development using both the CHART and MAARS datasets. Due to the complex impacts of various factors on incident clearance operations and the quality of the available data, some developed models are not capable of producing a desirable level of accuracy. While much remains to be learned about critical factors influencing incident clearance operations, some suggestions for future development are listed below:

- All factors affecting incident clearance duration need to be precisely collected and recorded in the database.
- Neither CHART nor MAARS records all critical factors affecting the incident clearance operations, so some efforts to merge these two mutually supplemental data systems will be an essential task.

- Both datasets should have a reliable quality control mechanism to filter faulty data and identify the data precision level (e.g., 5 minutes). The large number of short duration data (e.g., less than 2 minutes) that heavily bias the sample distribution makes model development an extremely difficult task.
- Data recording efforts should be improved as both datasets contain a large percentage of missing data (e.g., number of blocked lanes) for each recorded incident.
- One model for all types of incidents is unlikely to be effective due to the variety of factors that may affect the progress of an incident management team.
- Classifying incident data by the severity level and the resulting blocked lanes seems to be a promising way to develop a comprehensive set of prediction models for incident clearance duration.

CHAPTER 6: Optimal Strategies for Deploying Freeway Incident Response Units

6.1 Introduction

This chapter presents an optimization strategy for SHA to effectively distribute incident response units along freeway segments plagued by frequent incidents. The proposed method, based on the p-median model, convincingly outperforms three state-of-practice deployment strategies, using the incident data from 2006 to 2011 on the I-495 Capital Beltway. Section 6.2 reviews the available strategies for deploying emergency response units and relative studies in the literature. Section 6-3 analyzes the formulations of several promising deployment models, including the one developed from this project. Section 5-4 illustrates a comprehensive benefit/cost analysis with different response fleet sizes. Research findings produced from extensive analyses of the developed model are summarized in the last section, providing a basis for traffic managers to design a benefit-cost incident management system.

6.2 Review of available models

Traffic incident is a major cause of roadway congestion and the related adverse environmental impacts. For example, Skabardonis *et al.* (2003) found that incident-related delay contributed from 13 to 30 percent of the total congestion delay during peak periods, based on an analysis of two freeway corridors in California. In a more comprehensive study, FHWA (2005) found that about 25 percent of congestion in the US is incident-related, indicating the need to have an effective incident management system that includes detection, response, and traffic management to contend with non-recurrent congestion. For instance, prompt responses by CHART have reduced the incident durations by about 25 percent for the last seven years (Chang, 2009), yielding significant benefits to both motorists and the entire travel environment.

Since efficient response is critical to minimization of incident impacts, many traffic management agencies are exploring various strategies to best use their limited emergency response units. For example, some (Skabardonis, 1998; Lou, 2010) introduced a freeway service patrols (FSP) program to assign tow trucks to patrol freeway segments and clear incidents. In highway networks where traffic surveillance and incident detection are available, some researchers (Larson and Odoni, 1981; Pal and Bose, 2009) argued that it is more efficient to

deploy response units strategically and dispatch them after detecting an incident. The key question for designing such strategies is how to deploy available response units to minimize the response time.

In practice, most traffic managers tend to use experience-based methods such as allocating available response units near high-frequency incident locations, distributing them evenly over the entire coverage area, or positioning standing-by units at the Traffic Operation Center (TOC). Such experience-based methods, however, may not best use available resources, especially when the incident frequency or coverage area is not at the desirable level. This study has produced an effective method for deploying emergency response units, taking advantage of state-of-the-art developments in the literature.

Most existing studies related to this subject can be categorized into two categories: *median* and *coverage* models. The former, first introduced by Hakimi (1964) in the context of deciding facility locations, seeks to position emergency units to minimize the average response distance or time. Following the same modeling paradigm, Daskin (1987) constructed a mixed-integer programming (MIP) model to solve the location, dispatching, and routing problems for incident response vehicles. Pal and Sinha (1997) introduced a similar model to determine the optimal locations for incident response units to minimize the total operating cost.

In contrast, coverage models focus on minimizing the number of response units required to cover the target area with a predefined level of service (Toregas, 1971), or maximizing the demand that can be covered by the available emergency units, known as the Maximal Coverage Location Problem (MCLP) introduced by Church and Reville (1974). As an extension to MCLP, Daskin and Stern (1981) proposed the Backup Coverage Problem to maximize the demand areas to be covered multiple times, while Gendreau *et al.* (1997) considered two different service standards for coverage. Kepaptsoglou *et al.* (2011) applied Genetic Algorithm to solve a DSM of emergency response services considering historical frequency and severity as the primary standards. It does not, however, account for variation in travel time.

A main criticism of these models is their common assumption that the closest response unit is always available. Mirchandani and Odoni (1979) observed that the policy of dispatching the closest response unit is not always optimal when the response units have a high probability of being occupied. The Hypercube Queuing Model (HQM) developed by Larson (1974) proves to be a very useful tool to evaluate the performance of emergency response systems while

considering the stochastic nature of incidents. However, HQM requires the locations of response units to be input and cannot determine the optimal configuration of the system (2009).

To address the same stochastic issue in such a system, Daskin and Haghani (1984) proposed a heuristic approach to minimize the expected arrival time. Sherali and Subramanian (1999) introduced an opportunity-cost-based model to consider the loss of coverage when one unit becomes occupied. Geroliminis *et al.* (2009) extended HQM to build a normative model that can generate optimal strategies, while considering spatial and temporal patterns of the demand and the availability of a response unit. Their paper presented two key findings: (1) the MCLP model does not perform well when considering the stochastic nature and availability of the response units; and (2) the traditional p-median model can provide an “adequate approximation” to the results by the more complex models, adding only 4 percent of average response time for the modest demand (i.e., one incident/hour on a 72 mile freeway segment).

Another concern associated with existing models is their deficiencies in modeling the impact of future demand uncertainty. Since incident patterns may evolve significantly over time, an emergency response system designed with the historical data may not always perform well under the changing traffic environments. This critical issue of adapting to the temporal and spatial changes in incident patterns with a robust deployment strategy has not been adequately addressed yet in the literature.

One critical issue in designing a deployment strategy is to maximize the resulting social benefits and minimize operating costs, because most traffic management agencies are operated under resource constraints. Hence, the challenge is how to deploy the available EMS units to maximize the total social benefits, or to identify the optimal number of EMS under the projected incident distribution pattern. A comprehensive cost/benefit analysis of various location/allocation strategies under a projected incident pattern could help traffic agencies to optimize their fleet size.

To address the above concerns, this study presents a two-stage process to model the task of deploying emergency response units. It first compares the performance of the optimal incident response strategy based on the p-median model with three experience-based methods. The comparison was based on the incident data from 2006 to 2011 on the I-495 Capital Beltway, using different fleet sizes and their resulting costs as well as benefits.

6.3 Model Formulation

This section investigates three experience-based methods for allocating emergence response units, including 1) allocating available response units near high-frequency incident locations, 2) distributing them evenly over the entire coverage area, and 3) positioning standing-by units at the Traffic Operation Center (TOC).

Consider I regions to be served by no more than P emergency response units over J potential sites; M ($M \subseteq J$) is the set of location sites to house the response units. In general, given the following inputs:

- t_{ij} , travel cost from location j to region i ; and
- $\Pr(\tau_i = 1)$, the probability that an accident occurs in service region i during a given time period,

The allocation model to minimize the total response time should yield the following output:

- a response strategy Y as follows:

$$y_j = \begin{cases} 1, & \text{if } j \in M \\ 0, & \text{otherwise} \end{cases} \quad (6-1)$$

- an allocation strategy, denoted by X , where each member x_{ij} equals 1, if accidents at region i are to be managed by the response units located at location j , and 0 otherwise.

The spatial distribution of accidents is represented by $\Pr(\tau_i = 1)$. Traffic management agencies can formulate their strategies, X and Y , based on the historical data.

After classifying the accident pattern, traffic agencies can then evaluate the selected candidate strategies based on the following annual total response time:

$$Z = \sum_n \sum_i \sum_j \tau_{ni} x_{ij} t_{ij} \quad (6-2)$$

where for the n -th incident of the year,

$$\tau_{ni} = \begin{cases} 1, & \text{if it happens at site } i \\ 0, & \text{otherwise} \end{cases} \quad (6-3)$$

In addition, given the selected allocation strategy, it may also be desirable for the traffic agencies to further decide the most cost-benefit number of response units, P . This issue will be addressed in the next section.

Experience-based strategies

Strategy-I

Under this strategy all emergency response units will be stationed at the P sites that exhibit high incident rates, and the strategies Y and all X can then be decided as follows:

Step1: Choose the P sites with the highest incident rates to form the location site M . If several sites have the same incident rates, then randomly choose P sites from them. Assign proper values to Y according to Equation 1.

Step2: For each site i , find the closest site j^* among all candidate locations that satisfy $y_{j^*} = 1$ and assign response unit at j^* for any incident at i by:

$$x_{ij} = \begin{cases} 1, & \text{if } j = j^* \\ 0, & \text{otherwise} \end{cases} \quad (6-4)$$

Although previous studies suggested that dispatching the closest response unit to a detected incident does not necessarily guarantee the best result, such a strategy is simple and thus widely practiced. Assuming that only one incident may occur within a small segment over a sliced time interval, the response strategy can then be uniquely determined by following steps 1 and 2. The annual response time, based on the historical data, can be calculated with Equation 2 for comparison with other strategies. This strategy can generally reduce the response time at the historical “hot spots” in the service area. However, if these locations are overly concentrated at one corner of the service area, the strategy may not perform well, especially when those “hot spots” may vary over time.

Strategy-II

The second experience-based strategy seeks to distribute emergency response units evenly over the entire coverage area so that no location would suffer excessively long incident response time. This problem can be formulated as:

$$\min Z = \sum_i \sum_j x_{ij} d_{ij} \quad (6-5)$$

$$s. t. \sum_{j \in J} x_{ij} = 1 \text{ for all } i \in I \quad (6-6)$$

where d_{ij} represents the travel distance between the response unit j and the service request location i . Equation 6 guarantees that one and only one response unit will be assigned to each site. This problem has been proved as NP-hard in the literature. Moreover, it does not consider the differences of accident frequency and travel time at different locations. Therefore, this study will not further discuss its algorithm for an exact solution. Instead, the numerical example provided in this study will take advantage of the unique structure of the Beltway and solve the problem heuristically by the following steps:

- Step 1: Divide the Beltway into P segments with equal length $S(s_1, s_2, \dots, s_p)$.
- Step 2: Choose the site closest to the center of each segment to form the location site M .
- Step 3: Assign response units to these locations and decide Y according to Equation 1.
- Step 4: For each site l , find the segment s it belongs and the center location l^* for this segment, then assign response unit at j^* for site l by following Equation 4.

Strategy-III

In practice, traffic management agencies could also position standing-by units at their traffic operation center (TOC). One can illustrate their response strategy as follows:

Step1:

$$y_j = \begin{cases} 1, & \text{if and only if } j \in \text{TOC} \\ 0, & \text{otherwise} \end{cases} \quad (6-7)$$

Step2: If the response agency has one TOC (as in the numerical example), then

$$x_{ij} = \begin{cases} 1, & \text{if } j \in \text{TOC} \\ 0, & \text{otherwise} \end{cases} \quad (6-8)$$

If multiple TOC are available, then one needs to find the closest one for each site. The response time can then be uniquely determined from all regions I to the region where the TOC locates.

Strategies based on the proposed p-median model

Following the same arguments by Geroliminis et al. (2009), this study developed an optimal incident response strategy based on the traditional p-median model, which is both effective and convenient for implementation. The underlying assumption for this method is that

the occurrence of incidents on a given freeway segment follows a Poisson distribution, and the probability for more than two accidents occurring during the same sliced time period on the same segment is negligible (i.e., an average of 0.2 on I-495 Capital Beltway). Following previous studies in the literature, the objective function of a traffic management agency can be formulated as follows:

$$\text{Min } Z = \sum_i \sum_j \text{Pr}(\tau_i = 1) x_{ij} t_{ij} \quad (6-9)$$

where: t_{ij} represents the travel cost from location j to freeway segment i . For convenience of illustration, this model does not consider intra-zonal times (assume $t_{ii} = 0$), and uses the average travel time based on field data. The model can be further extended to consider speed variation and uncertainties in the future work.

Note that both the demand and the supply sides are subjected to the following constraints: 1) every freeway segment i must be served; 2) a response unit can only be dispatched from location j if it is available ($y_j = 1$); and 3) the total number of available response units is limited by available resources (P). Constraint 1 can be expressed as:

$$\sum_j x_{ij} = 1 \text{ for all } i \quad (6-10)$$

Constraint 2 is formulated as:

$$y_j = \begin{cases} 1, & \exists x_{ij} = 1 \\ 0, & \text{otherwise} \end{cases} \quad (6-11)$$

By introducing a large number L (which should be equal to or larger than I), constraint 2 can be re-formulated as:

$$\sum_i x_{ij} \leq L y_j \text{ for all } j \quad (6-12)$$

Similarly, constraint 3 can simply be expressed as:

$$\sum_j y_j \leq P \quad (6-13)$$

Given the formulations, the allocation task for incident response units becomes a p-

median problem with the following two binary sets of decision variables:

$$x_{ij} \in \{0,1\}, \forall i,j$$
$$y_j \in \{0,1\}, \forall j$$

One can then apply the model to decide the optimal locations for available incident response vehicles, given the empirical distribution of accidents on each freeway segment and the corresponding travel cost matrix.

6.4 Numerical results

Note that the numerical results for I-495 Capital Beltway presented hereafter were produced with GAMS, a commercial optimization software package. The annual response time and the associated costs and benefits were also computed for comparison with other experience-based strategies.

Study Site

The study site is the Capital Beltway (I-495/I-95) in Maryland, ranging from the DC-VA state Line at the Woodrow Wilson Bridge to the VA Line at the American Legion Bridge (see Figure 5-1). The Beltway has 30 exits distributed over 42 miles, one of the major corridors managed by CHART.

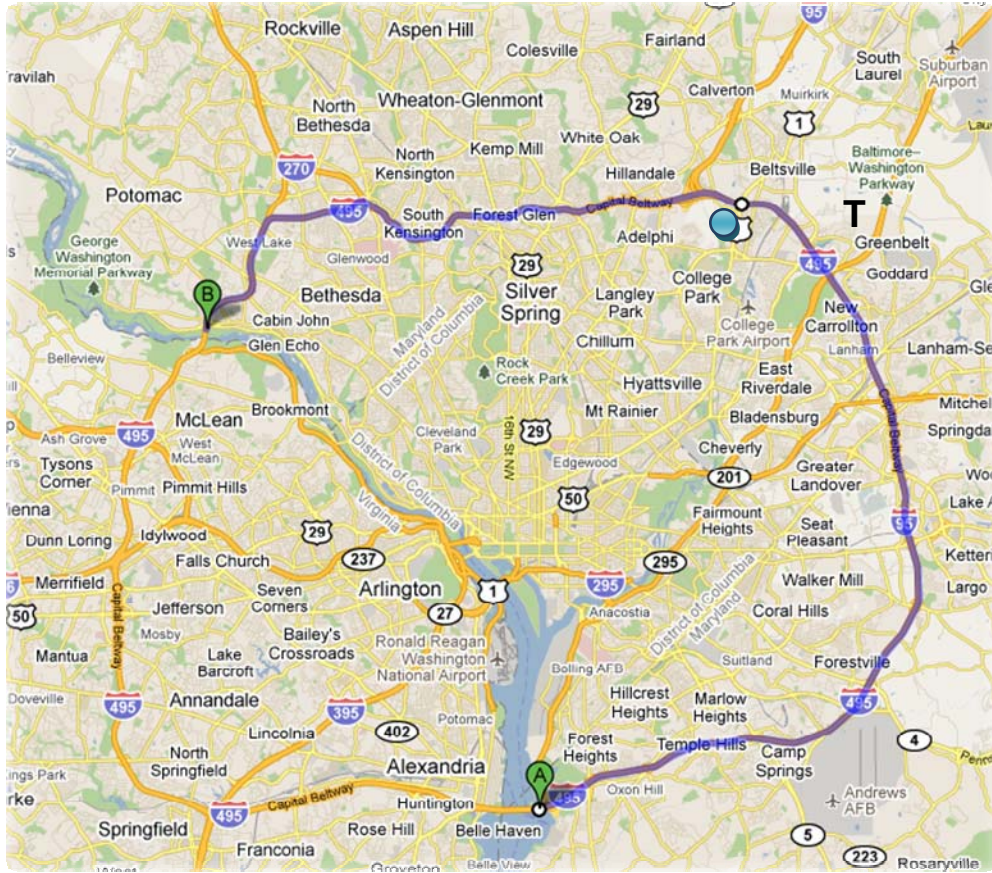


Figure 6-1: Study Links in the Capital Beltway (I-495/I-95) in Maryland

TOC-3 (Traffic Operation Center-3) of CHART, currently located at exit 25, has 11 field operations units to manage incidents on I-95, I-270, US-50, MD-295 as well as the Capital Beltway in Prince George’s and Montgomery Counties. They operate over 16 hours/day (5 AM – 9 PM) on weekdays.

The proposed model was applied to determine the optimized locations for their EMS units over the Capital Beltway to minimize the total and average incidents response times during AM peak hours (7:00 – 9:30) on weekdays. Travel speeds on each freeway segment were collected from the freeway detectors documented by CATT (the Center for Advanced Transportation Technology) laboratory at the University of Maryland.

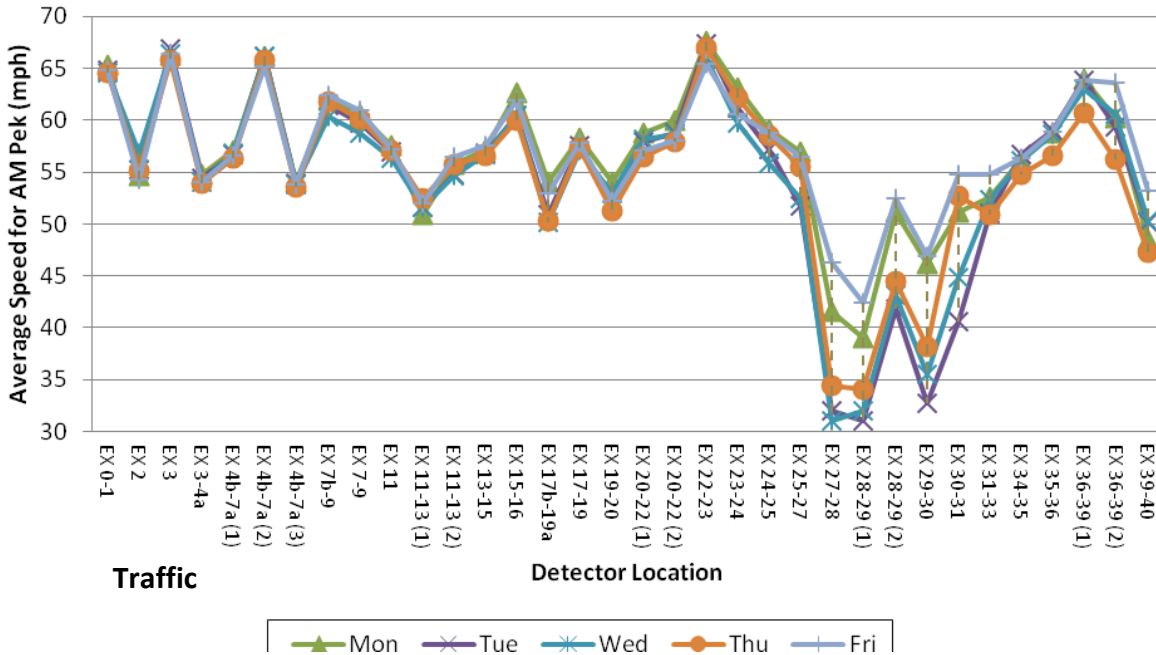


Figure 6-2: Average Traffic Speed Patterns for the AM Peak Hours by Day of Week (I-495 Outer Loop)

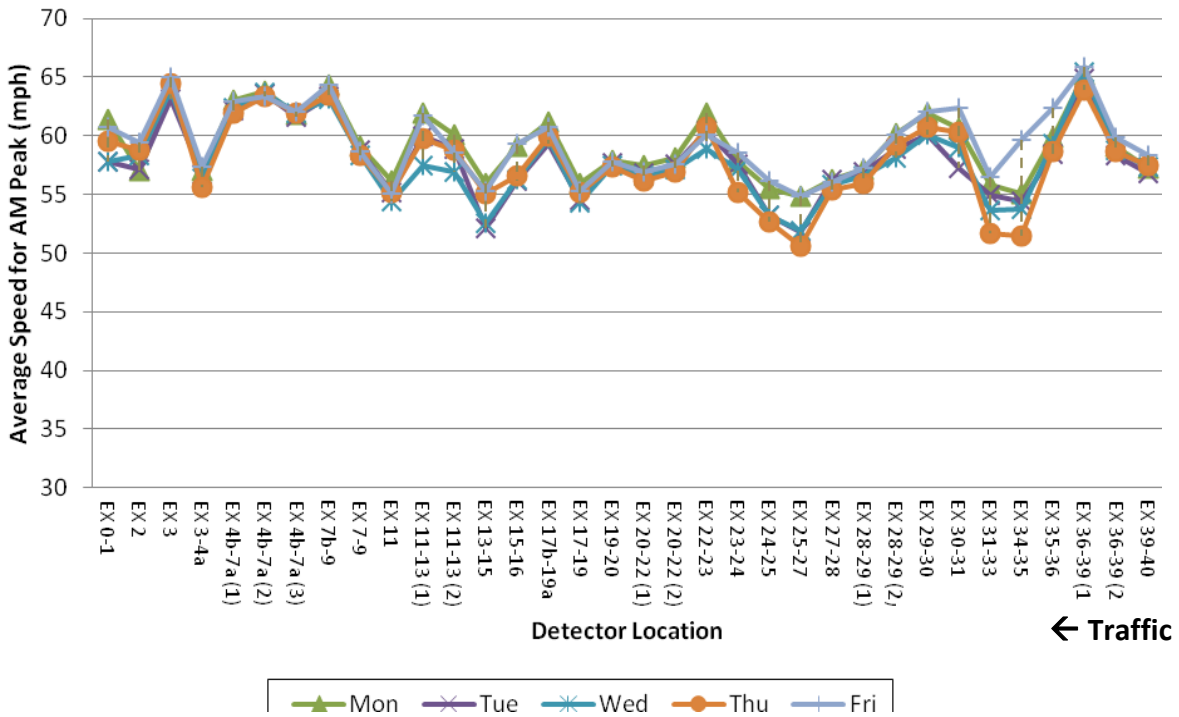


Figure 6-3: Average Traffic Speed Patterns for the AM Peak Hours by Day of Week (I-495 Inner Loop)

Figures 6-2 and 6-3 summarize the average speed during the morning peak period for different days of the week in 2009. The figures indicate that the average traffic speeds on most segments exhibited very similar patterns over different weekdays and for both directions. Only segments from exit 27 to exit 31 (about 5 miles) in the Outer Loop exhibited a significant fluctuation. Since it is a small portion of the entire network, this study will not consider travel time variation as one of the model variables.

The results in Figures 6-2 and 6-3 show very different traffic conditions in the opposite directions. Therefore, travel times (response times) for response units would vary significantly, depending on the travel direction. Thus, travel time data used in this study are asymmetric. The average morning peak travel time on each highway segment in 2010 was used in the numerical analysis.

Data

This study used the incident data from CHART II Database to evaluate the performance of different strategies. CHART database includes eight incident types:

1. Debris in Roadway
2. Collision, Personal Injury
3. Collision, Property Damage
4. Collision, Fatality
5. Disabled on Road
6. Emergency Roadwork
7. Police Activity
8. Off Road Activity

Notably, incidents with a different nature and severity could result in different traffic impacts. Prior to having the incident severity information from field observations, CHART views all detected incidents equally and responds to them sequentially. However, if incident severity has been verified, CHART will give the response priority to more severe incidents. Since the focus of this model is to minimize the response time but not the clearance time, the numerical results, presented below with the response allocation models, were based only on the spatial distribution of incident frequency.

For convenience of analysis, both the demand (incidents) and supply (response units) are assumed to be located at the nodes (i.e., freeway exits) of each link, and the travel times between nodes were calculated based on the procedure described previously. Incident data from 2006 to

2010 were used to evaluate the performance with different measures of effectiveness (MOE), where the data from 2006 to 2008 were for model calibration, and 2009 and 2010 data were for evaluation.

The incident probability on freeway segment i , $\Pr(\tau_i = 1)$, is estimated based on the three-year (2006-2008) data during AM peak hours (7:00 – 9:30). Figure 6-4 shows incident frequencies on different freeway segments, which fluctuate significantly across the study area. The location exhibiting the highest frequency was at exit 27, followed by exit 4. Given the travel time matrix and the incident frequency data, Table 6-1 presents the optimal set of locations produced with the four models discussed previously, assuming that the available response units vary from one to 11.

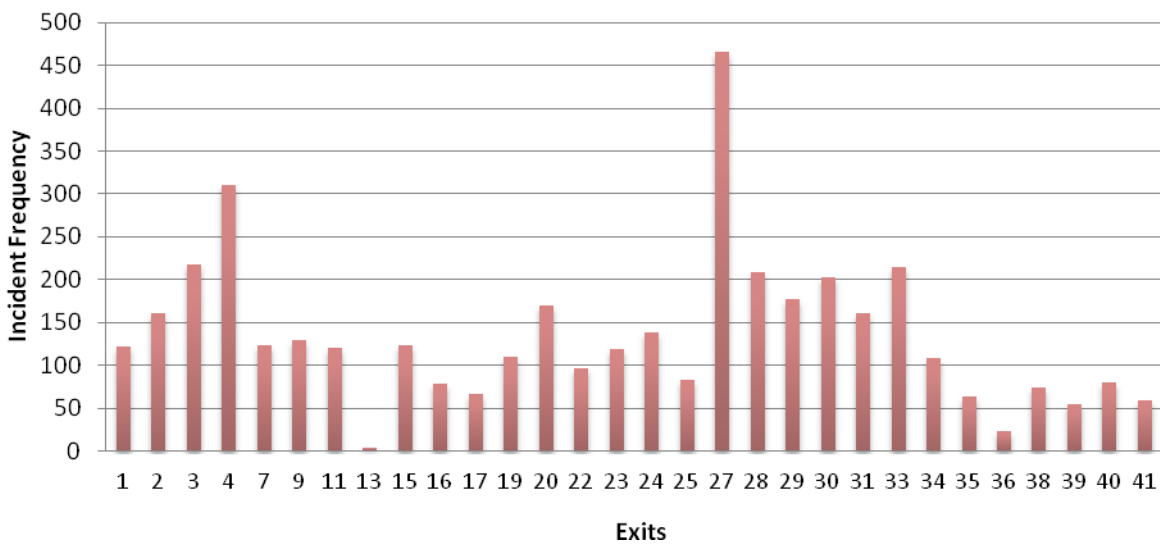





Figure 6-4: Average Annual Incident Frequency during AM Peak Hours by Location

The set of locations for SHA to deploy the response units under all candidate strategies is shown in Table 6-1. TOC’s current strategy is to allocate all available units at the TOC (at exit 25). Traffic managers may also choose to assign one response unit to each exit experiencing high accident frequency by starting from the highest one (HF), or evenly distribute all available response units over the target network (ED). CHART had 11 incident response vehicles in 2010 for TOC to serve its coverage area. These four candidate strategies were applied to the 2008 to 2010 incident data to compare their response efficiency. The total incidents over the target network were 1102, 1167, and 790 for AM peak hours in 2008, 2009, and 2010, respectively.

Table 6-1: Assigned Locations for Available Response Units by Strategy

No. of Units Available	Assigned Exit(s) by			
	OPT*	TOC	HF	ED
1	23	25	27	22
2	7, 30	N/A	4, 27	11, 31
3	4, 22, 33	N/A	3, 4, 27	7, 22, 34
4	4, 20, 29, 35	N/A	3, 4, 27, 33	4, 16, 27, 36
5	4, 17, 25, 30, 35	N/A	3, 4, 27, 28, 33	4, 13, 22, 29, 38
6	3, 9, 19, 25, 30, 35	N/A	3, 4, 27, 28, 30, 33	4, 11, 19, 24, 31, 38
7	3, 9, 19, 25, 30, 34, 40	N/A	3, 4, 27, 28, 29, 30, 33	3, 9, 15, 22, 27, 33, 38
8	3, 9, 16, 20, 25, 30, 34, 40	N/A	3, 4, 20, 27, 28, 29, 30, 33	3, 9, 13, 19, 24, 28, 33, 39
9	3, 9, 16, 20, 23, 27, 30, 34, 40	N/A	2, 3, 4, 20, 27, 28, 29, 30, 33	3, 7, 11, 17, 22, 25, 30, 34, 39
10	2, 4, 9, 16, 20, 23, 27, 30, 34, 40	N/A	2, 3, 4, 20, 27, 28, 29, 30, 31, 33	3, 7, 11, 15, 19, 23, 28, 31, 34, 39
11	2, 4, 9, 16, 20, 23, 27, 28, 30, 34, 40	N/A	2, 3, 4, 20, 24, 27, 28, 29, 30, 31, 33	3, 7, 9, 13, 17, 22, 25, 28, 31, 35, 39

*OPT: the proposed model; HF: to the top N (= available units) high incident-frequency locations; TOC: stationed all vehicles at the traffic operations center; ED: evenly distributed.

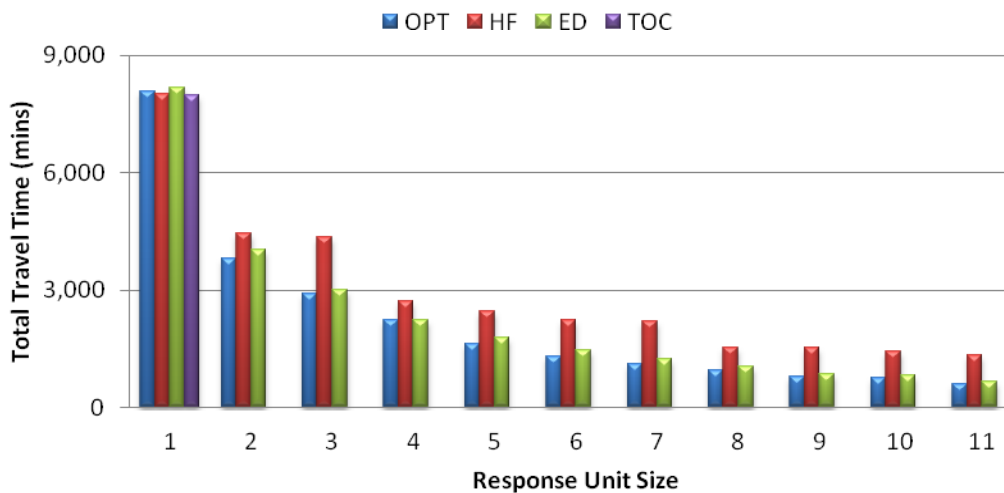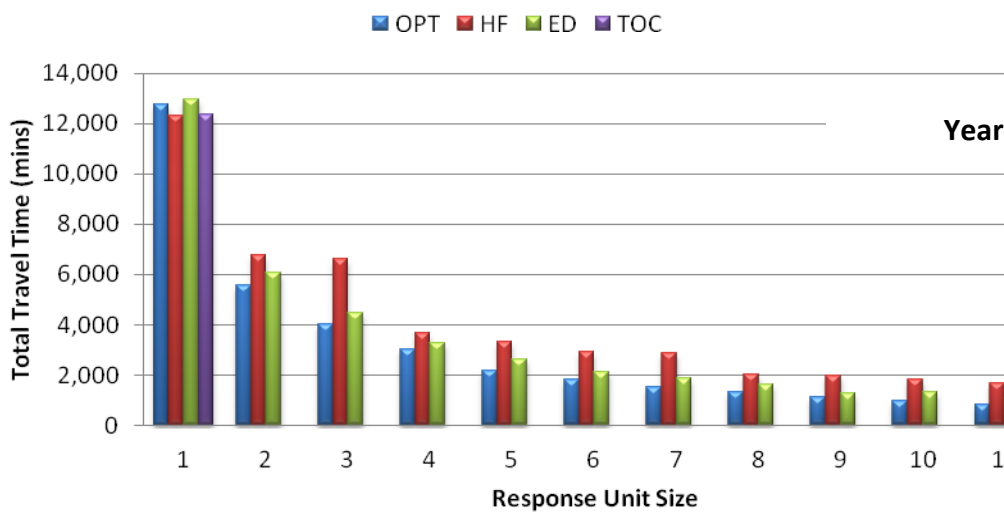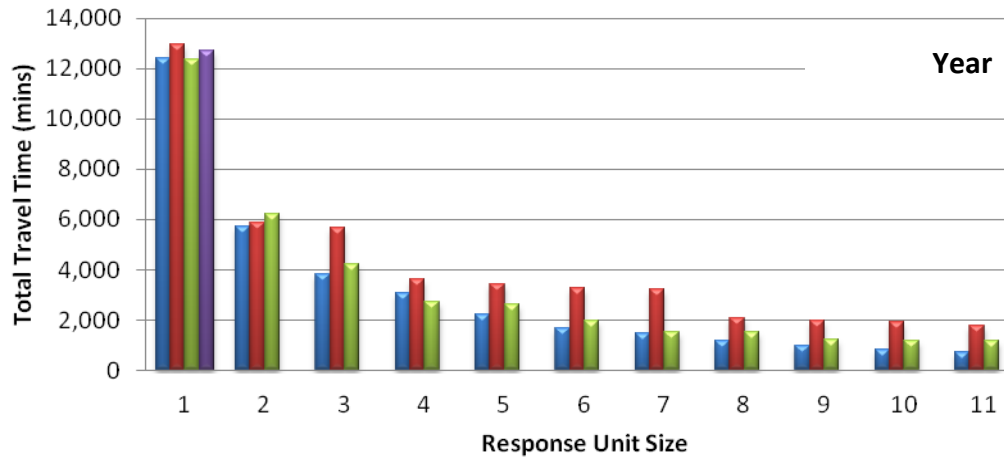

* Note that the total travel time under the TOC strategy was constant irrespective of the available fleet size

Figure 6-5: Total Travel Times (in minutes) by Incident Response Strategy

Figure 6-5 illustrates the estimated total travel time (response times) by allocating response units according to each strategy. Note that the total travel time under the TOC strategy was constant irrespective of the available fleet size, and hence only its results from the first scenario were shown in the figure.

As shown in the graphical results, the proposed model consistently outperforms other strategies in most cases across all three years. The only exception is for the single unit case where the system randomness can dictate the performance. For instance, for the response unit size of five, the estimated total travel times by OPT, HF, and ED are 2194, 3302, 2630 minutes, respectively, for year 2009. These differences imply that the total travel time with the OPT strategy would be reduced by about 34 percent and 17 percent compared with HF and ED, respectively. The response time savings are also significant for 2008 and 2010. Overall, the percentage improvement increases with the number of available response units and the incident frequency.

Note that given the small chance of concurrently detecting several incidents on the same subsegment of the I495 Capital Beltway, SHA can maintain a small size of response teams by positioning all standing-by units at the TOC center. The trade-off to the cost savings, however, could be a long response time if an incident happens at a remote location. Given the huge cost of having an extended delay on congested freeways such as the I-495 Capital Beltway, this strategy is unlikely to outperform any other strategies.

The optimal fleet size from the Cost-Benefit Perspective

Note that the above analysis provides the optimal deployment strategy for the available EMS units. However, in view of the societal cost and the diminishing resources for traffic management, one shall further explore the optimal number of EMS under the projected distribution of incidents and traffic patterns. The total societal cost reduction due to an efficient incident response strategy includes the savings on incident-induced delay, fuel consumption, and emissions.

Various formulas have been proposed in the literature to estimate delays and the associated benefits. To be consistent with the practice of SHA and take advantage of the locally calibrated parameters, this research adopts the following procedure for total delay and direct benefit estimation (Chang, 2009):

$$D = \sum_i e^{\mu} * f^{\varphi} * \left(\frac{b}{n}\right)^{\theta} * d^{\gamma} * N \quad (6-14)$$

where:

D is total excessive delay incurred by the incidents on top of the recurrent congestion;

f is traffic volume (vplph) at the segment i ;

b and n are the number of lanes blocked and the total number of lanes, respectively;

d is the average incident duration (hours) at the segment i ;

N is the total number of incidents at the segment i ; and

μ , φ , θ , and γ are parameters. This study used -10.19, 2.8, 1.4, and 1.78, respectively, as recommended by CHART.

Table 6-2 shows the additional information required to estimate total delay caused by incidents occurring during the morning peak hours in 2008 through 2010. Due to the lack of traffic volume during each incident period this study used the adjusted Average Annual Daily Traffic (AADT) volume as a proxy factor. The incident duration is defined as the sum of response time and clearance time, where the latter was obtained directly from the CHART database and the former was computed with the proposed optimal model.

Table 6-2: Traffic and Incident Information Used to Estimate Incident-Induced Delays

Variables	2008	2009	2010
AADT on I-495	189,383	195,238	195,171
PHF	0.95	0.95	0.95
Adjusted AADT for Peak Hours	199,350	205,513	205,443
Number of Lanes (one direction)	4	4	4
Average Clearance Time with CHART Response (minutes)	26.30	23.85	16.74
Average Lane Blockage due to Incidents	1	1	1

Using Equation 6-13 and information in Table 6-2, the total delays caused by incidents, assumed to be responded to by each candidate strategy, are summarized in Figure 6-6. Similar to the results in Figure 6-5, the developed strategy (OPT) clearly outperforms other strategies in most scenarios. For example, with a unit size of 10, the total delays estimated for year 2009 are

403587, 436149, and 416252 vehicle-hours for OPT, HF, and ED, respectively. The proposed strategy, OPT, reduces the total delay by about 55 percent and 13 percent compared with HF and ED, respectively.

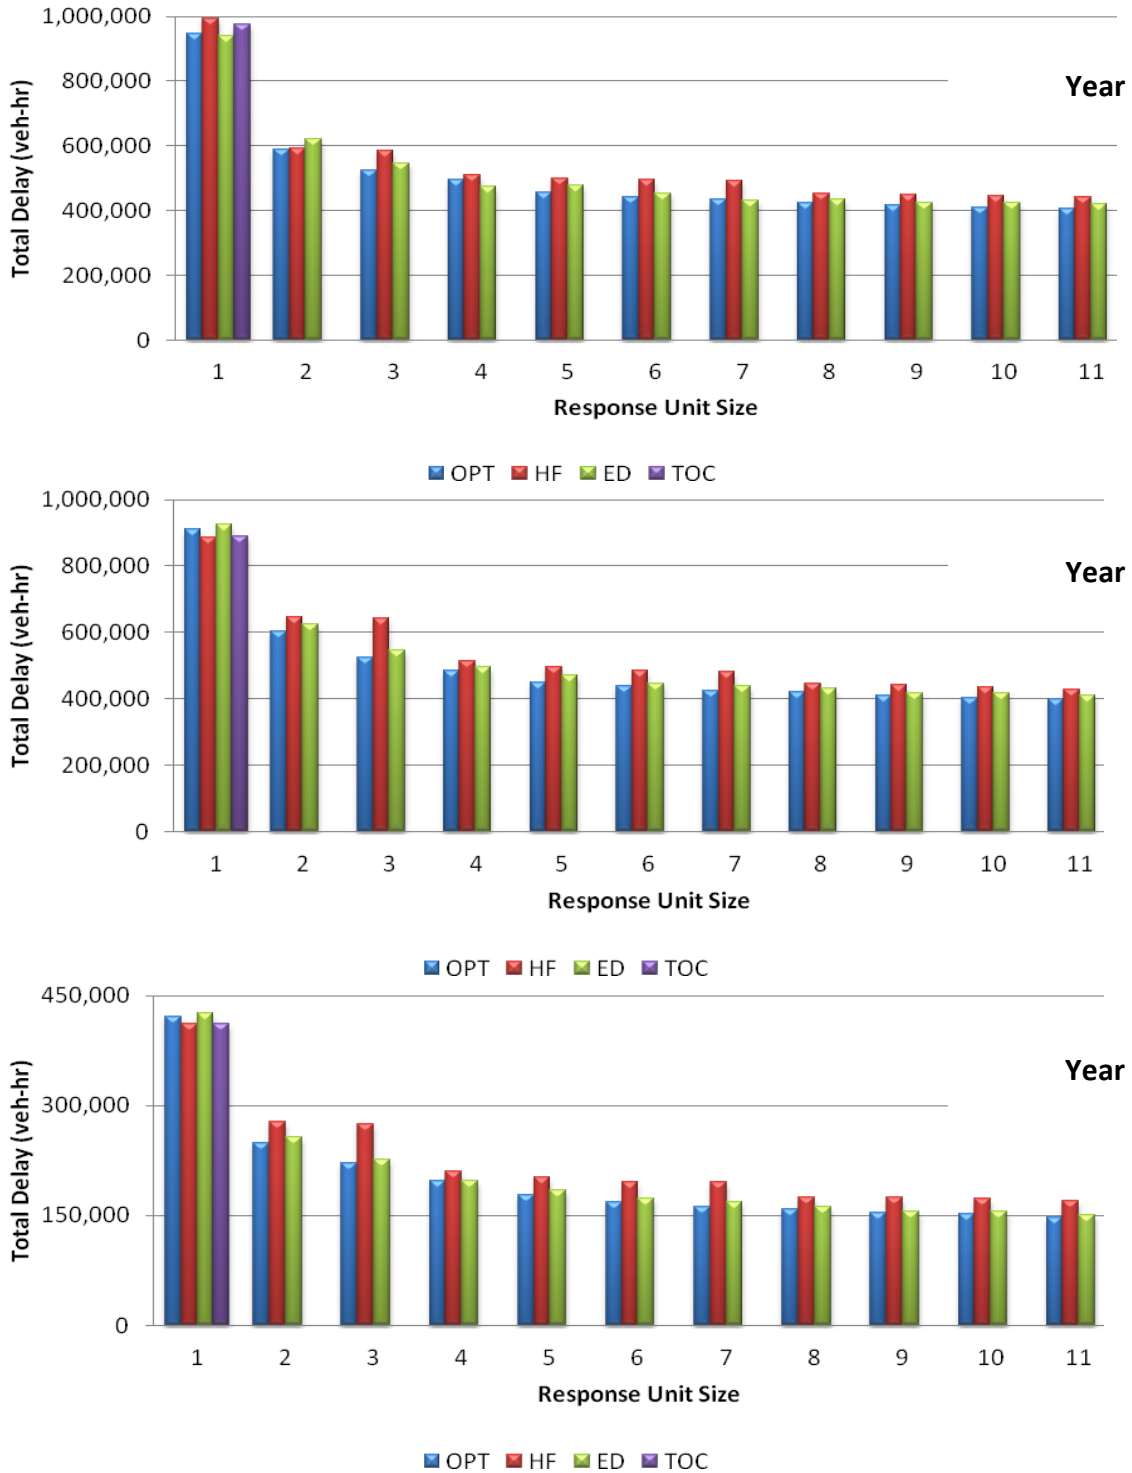


Figure 6-6: Total Delays (in vehicle-hour) for Incident Responses by Strategy

Based on the computed total delay, one can estimate the resulting cost savings with the following procedures:

Step 1: Compute the total delay reduction with each candidate strategy.

Step 2: Estimate the fuel consumption and emissions from the delay reduction using the following information.

- Fuel consumption for passenger cars: 0.156 gallons of gasoline / hour of delay (Ohio Air Quality Development Authority)
- HC: 13.073 grams / hour of delay (provided by MDOT in 2000)
- CO: 146.831 grams / hour of delay (provided by MDOT in 2000)
- NO: 6.261 grams / hour of delay (provided by MDOT in 2000)
- CO₂: 19.56 lbs CO₂/ gallon of gasoline (Energy Information Administration)

Step 3: Convert the saved delay, fuel, and emissions to the monetary value

Similar to *Step 3*, these following conversion factors were used to estimate the reduced delay and associated by-products in the total monetary value:

- Delay: \$26.58/ hour (U.S. Census Bureau in 2006)
- Fuel: \$3.85/gallon (Apr.- Sep.) , 2.72/gallon(Energy Information Administration in 2008)
\$2.32/gallon (Energy Information Administration in 2009)
- HC: \$6,700/ton (DeCorla-Souza, 1998)
- CO: \$6,360/ton (DeCorla-Souza, 1998)
- NO: \$12,875/ton (DeCorla-Souza, 1998)
- CO₂: \$23 / metric ton (CBO (Congressional Budget Office)'s cost estimate for S. 2191, America's Climate Security Act of 2007)

To analyze how the additional response units would contribute to the system's efficiency, this study has evaluated the marginal benefit/cost for adding another unit to the EMS team, ranging from 1 to 11 units, given the estimated marginal cost by SHA. Based on the results shown in Figure 6-7, the marginal benefit/cost first decreases as the number of response units increase, but the pattern becomes relatively flat if deploying more than 7 units. Therefore, the benefits of adding additional response units become insignificant when the size of the response fleet is larger than 7, although the B/C ratio could still be greater than 1. The pattern is consistent over the three-year period, although the magnitude of B/C ratio fluctuates from year to year. The

information produced by this analysis can serve as the basis for CHART to decide the most cost-beneficial fleet size.

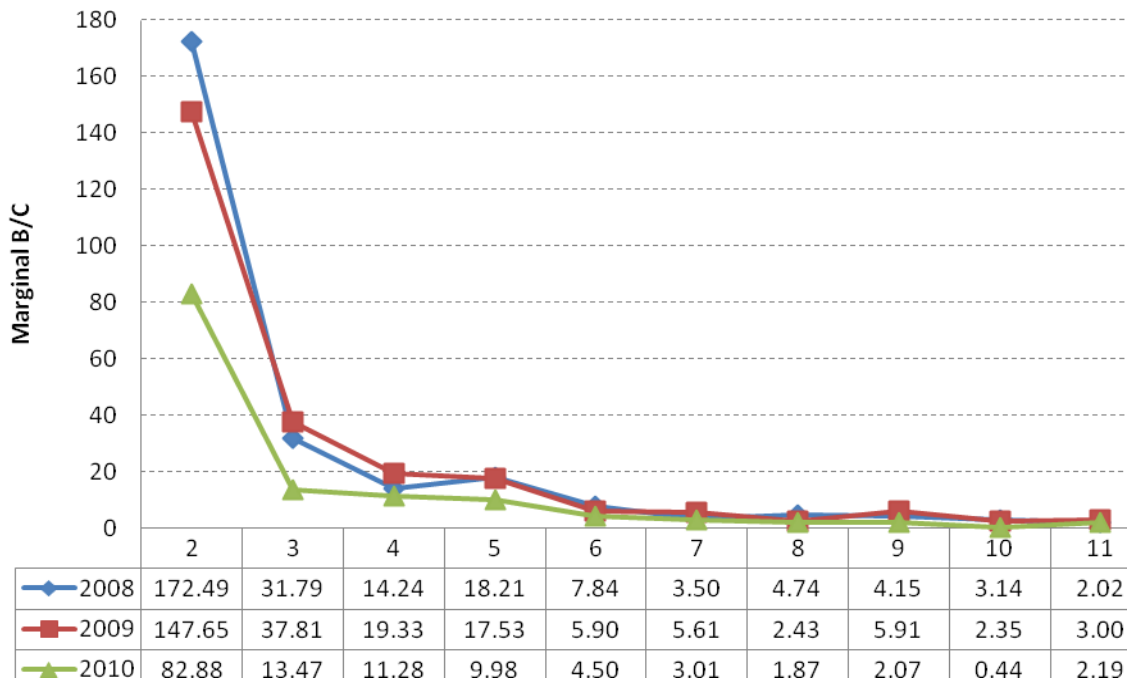


Figure 6-7: Marginal Benefit-Cost Ratios for adding an Additional Response Unit

CHAPTER 7: Conclusions

7.1 Conclusions

This study was focused on identifying potential areas for CHART to enhance its operations efficiency and to maximize the resulting benefits under existing resource constraints. Its core tasks cover three imperative issues: (1) understanding critical factors contributing to an increase in incident response and clearance times; (2) designing a deployment strategy to optimally assign available highway patrol units to minimize incident response times based on the temporal and spatial distributions of historical incidents; and (3) developing reliable models to predict the required duration of a detected incident and to identify critical contributing factors. Some critical research findings summarized below could be informative for CHART to effectively redesign and improve its incident response strategies:

- Using the incident data from 2006 to 2011 on the I-495 Capital Beltway, this research has shown the potential for CHART to significantly reduce its response efficiency and to determine the optimal fleet size by using an optimal vehicle assignment model.
- The incident data collected by CHART can be integrated with information in MAARS to develop a reliable model to predict the required clearance duration of a detected incident. Such vital data can serve as the basis for estimating the range of incident impact and designing responsive traveler information systems.
- CHART's response efficiency is not consistent, varying with factors such as incident severity, traffic congestion, weather conditions, fatalities, and pavement conditions. For example, the average response time for property-damage only incidents is longer than for those with injuries and/or fatalities.
- All CHART's response centers consistently took shorter times to respond to incidents resulting in more traffic impacts such as causing multiple lane blockage or fatalities.
- The average response times among CHART's five operations centers differ significantly: TOC7 exhibited the longest average of around 9.5 minutes and AOC had the shortest time of 4.5 minutes from 2007-2009.
- The distribution of available resources (e.g., tow trucks and staff size) among CHART's five operations centers significantly affects the efficiency of their response.

- The resulting clearance time of a detected incident depends on various factors, including: incident nature and severity, the need and availability of any special equipment, the coordination between all responsible agencies (e.g., police, fire department, medical team), and incident location.
- Truck involvement, multi-lane closure, and fatalities are three critical factors contributing to most excessively long incident clearance times.
- Most incidents (83 percent) involving fatalities took more than two hours to recover the roadway traffic condition, revealing the need for better coordination with responsible medical agencies.
- The efficiency of incident clearance of CHART's five response centers varies with the weather and environmental conditions; i.e., the average clearance duration at night time and/or a snow condition is substantially longer than the duration under day time and normal weather environments.
- The discrepancies in the average incident clearance time among CHART's five response centers reflect not only the difference in each center's responded incident types and frequency, but also in the distribution of the required equipment/vehicles and staff to accomplish the mission.

In summary, using the information from CHART and MAARS, this research has identified critical factors affecting the CHART's efficiency in incident response and clearance and produced reliable models to improve its performance in incident traffic management. The optimal allocation model will enable each operational center to best deploy available patrol vehicles along its responsible highway networks and to select the most cost-benefit fleet size under the resource constraints. CHART can also apply the set of prediction models developed in this research to estimate the required clearance duration of a detected incident, thereby minimizing the resulting congestion within the impact boundaries via some real-time traffic control strategies. Incorporating any of those developed models into current practice will undoubtedly enhance CHART's operational quality and significantly increase its effectiveness in minimizing non-recurrent congestion in this region.

7.2 Recommendations

Despite the progress made in this research on improving incident response and clearance operations, much remains to be done to contend with the ever-increasing congestion in this region. Hence, based on the analysis results reported in this project, CHART may consider adopting the following recommendations, especially in view of the diminishing resources for expanding its operations:

Incident data collection and recording

- All factors affecting incident response time and clearance duration need to be precisely collected and recorded in the database.
- Neither CHART nor MAARS records all critical factors affecting the incident clearance operations, so some efforts will be needed to merge these two mutually supplemental data systems.
- Both datasets should have a reliable quality control mechanism to filter faulty data and identify the data precision level (e.g., 5 minutes). The large number of short duration data (e.g., less than 2 minutes) that heavily bias the sample distribution makes model development an extremely difficult task.
- Data recording efforts should be improved as both datasets contain a large percentage of missing data (e.g., number of blocked lanes) for each recorded incident.
- Classifying incident data by the severity level and the resulting blocked lanes seems a promising way to develop a comprehensive set of prediction models for incident clearance duration.
- Both CHART and MAARS should use a precise geographical coordinate obtained via GPS to pinpoint the exact location of every reported incident. By doing so, both databases can produce more reliable information than with a text-based reference to any special landmark or feature, such as “Howard County Border” or “Fort McHenry Toll Plaza.”
- In CHART’s database, the *location_text* field should be separated into a *route_prefix*, *route_number*, and *intersecting_route_prefix*, *intersecting_route_number*. The *route number* and *intersecting route number* should be strictly number-based.

- The *route_prefix* and *intersecting_route_prefix* in CHART's database should be either code-based, (i.e., 0 = IS, 1 = US, 2 = MD, 3 = CO) or restricted to an enumerated data type, allowing users to select only IS, US, MD, or CO. If the accident does not occur at an intersection, the *intersecting_route_number* and *intersecting_route_prefix* should be left blank.

Incident response and traffic management

- Due to the performance discrepancies among five local response centers, CHART should consider allocating available resources and personnel to each operational center, based on the distribution of incident frequency and severity within their responsible region.
- From the spatial distribution of incidents over different times of day in each target highway network over the past several years, CHART can deploy its highway patrol units with an optimized strategy to minimize the resulting incident response times.
- To improve performance efficiency, CHART should enhance its collaboration with other responsible agencies (e.g., police, fire, and medical units) during severe incidents that block multiple lanes or cause injuries or fatalities.
- Existing guidelines for coordination between CHART and all responsible agencies should be enhanced to reduce excessively long response and clearance times for severe incidents occurring at night and involving heavy vehicles.
- CHART should consider conducting an annual review of each operations center's efficiency, available resources, and the frequency and nature of each encountered incident. The review results could serve as the basis for CHART to determine the optimal fleet size and personnel level for each operations center to maximize the cost-benefit ratio of its incident response performance.
- CHART should consider developing a set of on-line models to predict the clearance time of various types of incidents based on its rich databases and information in MAARS, and assist each operations center to use such information to estimate the resulting traffic impact during the incident management period.
- The estimated clearance duration predicted by a reliable model can be used by CHART's traveler information systems to inform en-route motorists of traffic conditions, offering a

basis for the decision makers to determine whether or not a detour plan should be implemented during the incident response period.

References

1. Bertini, R.L., El-Geneidy, A.M., Rose, M.W., 2004. Using archived data to measure operational benefits of ITS Investments: Region 1 Incident Response Program. Research Report
2. Boyles, S., Fajardo, D., Waller, S.T., 2007. A naïve Bayesian classifier for incident duration prediction”. CD-ROM of Proceedings of the 86rd TRB Annual Meeting, Washington, D.C.
3. CHART Input and Analysis, 2011. <http://chartinput.umd.edu/index.html>
4. Chin, S.M., Franzese, O., Greene, D.L., Hwang, H.L., Gibson, R.C., 2004. Temporary loss of highway capacity and impacts on performance: Phase 2. Oak Ridge National Laboratory, Oak Ridge, Tenn.
5. Chou, C., Miller-Hooks E., 2009. Benefit-cost analysis of freeway service patrol programs: Methodology and Case Study. *Advances in Transportation Studies*.
6. Chung, Y., Walubita, L., Choi, K., 2010. Modeling accident duration and its mitigation strategies on south korean freeway systems. *Transportation Research Record* 2178, 49-57.
7. Church, R., ReVelle, C., 1974. The maximal covering location problem. *Regional Science Association* 32, 101-118.
8. Cooper, G.F., Herskovits, E., 1992. A bayesian method for the induction of probabilistic networks form data. *Machine Learning* 9, 309-347
9. Nam, D., Mannering, F., 2000. An exploratory hazard-based analysis of highway incident duration, *Transportation Research Part A* 34 (2), 85-102.
10. Daskin, M. S., 1987. Location, dispatching, and routing models for emergency services with stochastic travel times. *Spatial analysis and location-allocation models*, A. Ghosh and G. Rushton, eds., Van Nostrand, New York, 224-265.
11. Daskin, M.S., Haghani, A., 1984. Multiple vehicle routing and dispatching on an emergency scene. *Environment and Planning* 16, 1349-1359.
12. Daskin, M.S., Stern, E.H., 1981. A hierarchical objective set covering model for emergency medical service vehicle deployment. *Transportation Science* 15, 137-152.

13. DeCorla-Souza, P., Cohen, H., Haling, D., Hunt, J., 1998. Using STEAM for benefit-cost analysis of transportation alternatives. *Transportation Research Record* 1649, 63-71.
14. Demiroglu, M., Ozbay K., 2011. Structure learning for the estimation of non-parametric incident duration prediction models. Presented at the 90th Meeting of Transportation Research Board, Washington, D.C.
15. De Rose, Jr. F., 1964. An analysis of random freeway traffic accidents and vehicle disabilities. *Highway Research Record* 59, 53-65.
16. FHWA White Paper., 2005. An initial assessment of freight bottlenecks on highways. Federal Highway Administration, <http://www.fhwa.dot.gov/policy/otps/bottlenecks/bottlenecks.pdf>
17. Garib, A., Radwan, A., Al-Deek, H., 1997. Estimating magnitude and duration of incident delays. *Journal of Transportation Engineering* 123 (6), 459-466.
18. Gendreau, M., Laporte, G., Semet, F., 1997. Solving an ambulance location model by tabu search. *Location Science* 5, 75-88.
19. Geroliminis, N., Karlaftis, M.G., Skabardonis, A., 2009. A spatial queuing model for the emergency vehicle districting and location problem. *Transportation Research Part B* 43, 798-811.
20. Giuliano, G., 1989. Incident characteristics, frequency and duration on a high volume urban freeway. *Transportation Research Part A* 23 (5), 387-396.
21. Chang, G.L. Rochon, S., 2009. Performance evaluation and benefit analysis for CHART. Technical Report. Maryland State Highway Administration
22. Golob, T.F., Recker, W.W., Leonard, J.D., 1987. An analysis of the severity and incident duration of truck-involved freeway accidents. *Accident Analysis and Prevention* 19 (5), 375-395.
23. Guin, A., Porter, C., Smith B., Holmes, C., 2007. Benefits analysis for incident management program integrated with Intelligent Transportation Systems Operations-Case Study. *Transportation Research Record: Journal of the Transportation Research Board* 2000, 78-87.

24. Haghani, A., Iliescu, D., Hamedi, M., Yang, S., 2006. Methodology for quantifying the cost effectiveness of freeway service patrols programs - Case Study: H.E.L.P. Program. Technical Report.
25. Hakimi, S.L., 1964. Optimal locations of switching centers and the absolute centers and medians of a graph. *Operations Research* 12, 450-459.
26. Jones, B., Janssen, L., Mannering, F., 1991. Analysis of the frequency and duration of freeway accidents in Seattle. *Accident Analysis and Prevention* 23 (4), 239-255.
27. Khattak, A., Schofer J., Wang, M., 1995. A Simple time-sequential procedure for predicting freeway incident duration. *IVHS Journal* 2, 113-138.
28. Kepaptsoglou, K., Karlaftis, M.G. Mintsis, G., 2011. A model for planning emergency response services in road safety. *Journal of Urban Planning and Development*, in press.
29. Larson, R.C., 1974. A hypercube queuing model for facility location and redistricting in urban emergency services. *Comp. and Operations Research*, 1, 67-95.
30. Larson, R.C., Odoni, A.R., 1981. *Urban operations research*. Prentice-Hall Inc. Englewood Cliffs, New Jersey
31. Latoski, S.P., Pal, R., Sinha, K.C., 1998. An evaluation of the cost effectiveness of the Hoosier Helper Program and framework for the design of ITS optimal system configuration, Phase 1. Paper 346. FHWA/IN/JTRP-97/09, Joint Transportation Research Program, <http://docs.lib.purdue.edu/jtrp/346>.
32. Li, D., Cheng, L., 2011. Bayesian network classifiers for incident duration Prediction. Presented at the 90th Meeting of Transportation Research Board, Transportation Research Board of the National Academies, Washington, D.C.
33. Lindley, J., 1987. Urban freeway congestion: Quantification of the problem and effectiveness of potential solutions. *ITE Journal* 57, 27-32.
34. Lou, Y., Yin, Y., Lawphongpanich, S., 2010. Freeway service patrol deployment planning for incident management and congestion mitigation. *Transportation Research Part C* 19, 283-295.

35. Mirchandani, P.B., Odoni, A.R., 1979. Locations of medians on stochastic networks. *Transportation Science* 13, 85-97.
36. National Conference on Traffic Incident Management., 2002 : A Road Map to the Future, 2-4.
37. Pal, R., Bose, I., 2009. An optimization based approach for deployment of roadway incident response vehicles with reliability constraints. *European Journal of Operational Research* 198, 452-463.
38. Pal, R., Sinha, K., 1997. A framework for locating highway incident response vehicles in urban areas. *INFORMS National Meeting*, San Diego, California
39. Sherali, H.D., Subramanian, S., 1999. Opportunity Cost-based Models for Traffic Incident Response Problems. *Journal of Transportation Engineering* 125, 176-185.
40. Skabardonis A., Petty, K., Varaiya, P. Bertini, R., 1998. Evaluation of the freeway service patrol (FSP) in Los Angeles. *California PATH Research Report*, Report UCB-ITS-PRR-98-13, University of California, Berkeley
41. Skabardonis, A., Varaiya, P., Petty, K., 2003. Measuring recurrent and non-recurrent traffic congestion. In *Transportation Research Record: Journal of the Transportation Research Board* 1856, 118-124.
42. Smith, K., Smith, B., 2002. Forecasting the clearance time of freeway accidents. Publication STL-2001-012. Center for Transportation Studies, University of Virginia.
43. Sullivan, E.C., 1997. New model for predicting incidents and incident delay. *ASCE Journal of Transportation Engineering* 123, 267-275.
44. Toregas, C., Swain, R., ReVelle, C., Bergman L., 1971. The location of emergency service facilities. *Operations Research* 19 (6), 1363-1373.
45. Wilshire, R., Keese, C., 1963. Effect of traffic accidents on freeway operations, Research report, Texas Transportation Institute, A & M College of Texas, College Station, Bulletin 22, 21-63.