



Center of Excellence for Aerospace Particulate Emissions Reduction Research

Final Report

# The Development of Exhaust Speciation Profiles for Commercial Jet Engines

Prepared by

Prem Lobo, Philip D. Whitefield and Donald E. Hagen  
*Center of Excellence for Aerospace Particulate Emissions Reduction Research*  
*G-7 Norwood Hall, University of Missouri – Rolla, Rolla, MO 65409*  
Contact: [plobo@umr.edu](mailto:plobo@umr.edu) or [pwhite@umr.edu](mailto:pwhite@umr.edu)

Scott C. Herndon, John T. Jayne, Ezra C. Wood, W. Berk Knighton, Megan J. Northway  
and Richard C. Miake-Lye  
*Aerodyne Research Inc.,*  
*45 Manning Road, Billerica, MA 01821*  
Contact: [herndon@aerodyne.com](mailto:herndon@aerodyne.com) or [rick@aerodyne.com](mailto:rick@aerodyne.com)

David Cocker, Aniket Sawant, Harshit Agrawal and J. Wayne Miller  
*University of California - Riverside*  
*Room 105, Administrative Bldg., 1084 Columbia Ave., Riverside, CA 92507*  
Contact: [wayne.miller@ucr.edu](mailto:wayne.miller@ucr.edu) or [dcocker@engr.ucr.edu](mailto:dcocker@engr.ucr.edu)

**Contract number: 04-344**

**Principal Investigator: Philip D. Whitefield**

**Contractor Organization: University of Missouri - Rolla**

**Date: October 31, 2007**

*Prepared for the California Air Resources Board and  
the California Environmental Protection Agency*

## **Disclaimer**

The statements and conclusions in this Report are those of the contractor and not necessarily those of the California Air Resources Board. The mention of commercial products, their source, or their use in connection with material reported herein is not to be construed as actual or implied endorsement of such products.

## **Acknowledgments**

The JETS APEX2 research team would like to acknowledge the following organizations and individuals for substantial contributions to the successful execution of this study.

Renee Dowlin, Wayne Bryant and staff at The Port of Oakland; Barry Brown, Mark Babb, Kevin Wiecek at Southwest Airlines; Chowen Wey, Changlie Wey, and Bruce Anderson at NASA; Robert Howard at AEDC; John Kinsey at EPA; Will Dodds at GEAE; Gregg Fleming at VOLPE; Lourdes Maurice and Carl Ma at FAA; Roger Wayson at UCF; Steve Baughcum at Boeing; Gary Kendall, Jim Hesson and staff at Bay Area Air Quality Management District; Judy Chow and Steve Kohl at Desert Research Institute; Dan Vickers at Frontier Analytical Laboratories; Steve Church, Steve Francis, and staff at ARB; and the UMRCOE.

This Report was submitted in fulfillment of ARB contract number 04-344: The Development of Exhaust Speciation Profiles for Commercial Jet Engines by the University of Missouri - Rolla under the partial sponsorship of the California Air Resources Board.

## Table of Contents

Section	Title	Page
<b>Disclaimer</b>		ii
<b>Acknowledgments</b>		iii
<b>Abstract</b>		xii
<b>Executive Summary</b>		xiii
<b>1.0 Background</b>		1
<b>1.1 Introduction</b>		1
1.1.1 Regulated Emissions from Commercial Jet Engines		1
1.1.2 Non-Regulated Emissions from Jet Engines		2
1.1.3 Effects of Unburned Jet Fuel		5
<b>1.2 Recent NASA Missions</b>		5
1.2.1 Experiment to Characterize Aircraft Volatile Aerosol and Trace Species Emissions (EXCAVATE- 1999)		5
1.2.2 Aircraft Particle Emissions eXperiment (APEX1-2004)		6
<b>1.3 JETS APEX2</b>		8
<b>2.0 Materials and Methods</b>		11
<b>2.1 Aircraft Engines</b>		11
<b>2.2 Location for On-wing Sampling</b>		12
<b>2.3 Equipment for On-wing Sampling</b>		15
<b>2.4 Test Cycle</b>		18
<b>2.5 Fuel</b>		19
<b>2.6 ARI Methodology</b>		19
2.6.1 Gas Phase Instrumentation		21
2.6.1.1 Tunable Infrared Laser Differential Absorption spectrometers (TILDAS)		21
2.6.1.2 Chemiluminescent NO sensor		21
2.6.1.3 Proton transfer reaction - mass spectrometer (PTR-MS)		21
2.6.2 Particle measurements		23
2.6.2.1 Aerosol Mass Spectrometer		23
2.6.2.2 Multi-Angle Aerosol Photometer		23
2.6.2.3 Particle Counting Instrument		24
2.6.3 Emission Indices		24
<b>2.7 UMR Methodology</b>		25
2.7.1 DMS500		27
2.7.2 PM parameters		28
2.7.3 Line loss characterization		29
2.7.4 Soluble Mass Fraction		30
<b>2.8 UCR Methodology</b>		30
2.8.1 UCR Design and Fabrication of Sampler for JETS APEX2		31
2.8.2 Measurement of Mass, Metals and Ions		34
2.8.3 Measurement of Elemental and Organic Carbon (EC-OC)		34
2.8.4 Speciation of C <sub>1</sub> to C <sub>30</sub> Hydrocarbons		35

2.8.5 Speciation of C <sub>1</sub> to C <sub>12</sub> Hydrocarbons, including BTEX & Carbonyls .....	35
2.8.6 Speciation C <sub>10</sub> to C <sub>30</sub> Hydrocarbons, including Naphthalene and PAHs .....	36
2.8.7 Detection Limits for the Organic Compounds .....	36
2.8.7.1 Calculating the Emissions Index .....	36
2.8.7.2 Lower Detection Limits .....	36
2.8.8 Exploratory Measurements for hexavalent chromium and dioxin .....	38
<b>3.0 Results .....</b>	<b>40</b>
<b>3.1 Real-time Chemical Speciation (ARI) .....</b>	<b>40</b>
3.1.1 Gas Phase Speciation .....	40
3.1.2 Particle Speciation .....	47
<b>3.2 Physical characterization (UMR) .....</b>	<b>50</b>
3.2.1 PM Emission (Total Aerosol) Parameters at 1m Downstream of Exhaust Nozzle .....	51
3.2.2 PM Emission (Total Aerosol) Parameters at 50m Downstream of Exhaust Nozzle .....	55
3.2.3 PM Emission (Non-volatile Aerosol) Parameters at 1m Downstream of Exhaust Nozzle .....	59
3.2.4 Deliquescence Results .....	62
<b>3.3 Total organic gases and aerosol chemical speciation (UCR) .....</b>	<b>63</b>
3.3.1 UCR Results for Mass Flow .....	63
3.3.2 Internal Consistency Checks .....	64
3.3.3 Particulate matter .....	67
3.3.4 Elemental and organic carbon .....	69
3.3.5 Polycyclic Aromatic Hydrocarbons (PAHs) and n-alkanes (C <sub>12</sub> +)	70
3.3.6 Chromium Analysis .....	82
3.3.7 Dioxin Analysis .....	83
3.3.8 Metals .....	84
3.3.9 Ions .....	94
3.3.10 Mass Concentration Data .....	94
3.3.10.1 Gas-phase Carbonyls .....	94
3.3.10.2 Light Hydrocarbons from Thermal Desorption Tubes .....	97
3.3.10.3 C <sub>1</sub> -C <sub>8</sub> SUMMA Canister Analyses .....	97
3.3.11 Estimation of EIs for VOCs .....	114
3.3.11.1 Post Analysis of the Sampler .....	114
3.3.11.2 Implications for Carbonyl Analysis .....	116
3.3.11.3 Implications for Light Hydrocarbon Analysis .....	117
3.3.12 UCR QA/QC Protocol .....	119
<b>4.0 Discussion .....</b>	<b>122</b>
<b>4.1 Gaseous Emissions .....</b>	<b>122</b>
<b>4.2 Particulate Emissions .....</b>	<b>122</b>
<b>4.3 PM Physical characterization .....</b>	<b>123</b>
4.3.1 Engine Warm-up Effect .....	127
4.3.2 Discussion of aerosol volatility at 1m .....	128
4.3.3 Comparison of 1m Total and Non-volatile Aerosol Data .....	132
4.3.4 Effect of plume processing (difference between 1m and 50m) .....	134
<b>4.4 Organic gases and aerosol chemical speciation .....</b>	<b>135</b>

<b>5.0 Summary and Conclusions .....</b>	<b>136</b>
<b>6.0 Recommendations .....</b>	<b>138</b>
<b>References.....</b>	<b>139</b>
<b>Glossary of terms, abbreviations and symbols.....</b>	<b>146</b>
<b>APPENDIX A Oakland International Airport Diagram .....</b>	<b>148</b>
<b>APPENDIX B Wind Roses (all times in Pacific Standard Time) .....</b>	<b>149</b>
<b>APPENDIX C Ambient DNPH cartridge sample results.....</b>	<b>152</b>
<b>APPENDIX D Ambient canister sample results .....</b>	<b>153</b>
<b>APPENDIX E Spatial arrangement of sampling probes.....</b>	<b>154</b>
<b>APPENDIX F Willard Dodds' (GEAE) Reports on Representativeness of Engine Performance and Emissions.....</b>	<b>155</b>
<b>APPENDIX G Fuel Aromatic and Sulfur Content Analysis Results .....</b>	<b>162</b>
<b>APPENDIX H Fuel Carbon-Hydrogen Content Analysis Results .....</b>	<b>163</b>
<b>APPENDIX I Summary Tables .....</b>	<b>164</b>

## List of Figures

Figure 1a: Aerodynamic Size Distributions (nm) for Organic and Sulfate Particles in Aircraft Exhaust at 25 Meters. Figure 1b: Particulate Emission Indices Measured as a Function of Distance Behind the Engine. ....	6
Figure 2: Picture of NASA Aircraft and Multiple Test Labs with Supporting Equipment	7
Figure 3: View of the GRE .....	13
Figure 4: Wind-rose diagram giving prevailing wind orientation with respect to Runway and GRE facility .....	13
Figure 5: Layout within the GRE.....	14
Figure 6a: Starboard sampling probe stand (left). Figure 6b: Probe rake with different probes (right).....	15
Figure 7: Particulate Sampling Probe .....	16
Figure 8: Aerosol sample manifold.....	16
Figure 9: Aerosol probe plumbing.....	17
Figure 10: Schematic diagram of the Landing and Take-Off cycle.....	18
Figure 11: Test Matrix used at JETS APEX2.....	19
Figure 12: Schematic of the Aerodyne Mobile Laboratory .....	20
Figure 13: Schematic of the UMR Mobile Diagnostic Facility .....	25
Figure 14: Modified EPA Landing Take-Off (LTO) Sequence Used for Testing.....	31
Figure 15: Schematic of UCR's Sampling System for APEX1 .....	31
Figure 16: Schematic of sampling setup. "S" setup represents DNPH, TDS, quartz, PUF/quartz, and PTFE (see below for details). Solid lines represent physical flow; dotted lines represent logical control. ....	33
Figure 17: Figure Showing UCR Sampler Constructed for JETS APEX2.....	34
Figure 18: The logarithm of carbon monoxide (CO) emission index (EI) is plotted against the nominal thrust setting for the seven engines measured. The ICAO data points for the three engine types are plotted as diamond symbols.....	41
Figure 19: NO <sub>x</sub> EIs in g NO <sub>2</sub> /kg fuel, plotted versus nominal engine trust setting for the three engine types (seven engines total) that were tested. ....	42
Figure 20: Formaldehyde (HCHO) is plotted versus the logarithm of the nominal engine thrust setting for all engines tested. The engine variability due to fluctuations in ambient conditions is greater than the engine-to-engine differences or to variations due to the downstream measurement locations. ....	43
Figure 21: Acetaldehyde (CH <sub>3</sub> CHO, lower panel) EI is plotted versus the logarithm of engine power, displaying the same trend as HCHO (upper panel).....	44
Figure 22: Ethylene (C <sub>2</sub> H <sub>2</sub> , upper panel) and Propene (C <sub>3</sub> H <sub>6</sub> , lower panel) are plotted versus the logarithm of engine power, displaying the same trend as HCHO. ....	44
Figure 23: Formic acid (HCOOH, upper panel) and acetic acid (CH <sub>3</sub> COOH, lower panel) are plotted versus the logarithm of engine power setting. ....	46
Figure 24: Black Carbon mass EIs measured with the Multi-Angle Absorption Photometer. The mass EIs are reported in mg/ kg fuel (versus g/kg fuel for the gaseous species measurements).....	48

Figure 25: The condensed mass of sulfate (upper panel) and organic (lower panel) are plotted versus engine power setting. APEX1 data is also included with the bowtie symbol.....	49
Figure 26: Number-based geometric mean diameter for total aerosol at 1m as a function of power.....	51
Figure 27: Geometric standard deviation for total aerosol at 1m as a function of power.....	52
Figure 28: Mass-based geometric mean diameter for total aerosol at 1m as a function of power.....	52
Figure 29: Number-based emission index for total aerosol at 1m as a function of power.....	53
Figure 30: Mass-based emission index for total aerosol at 1m as a function of power....	54
Figure 31: Number-based geometric mean diameter for total aerosol at 50m as a function of power.....	55
Figure 32: Geometric standard deviation for total aerosol at 50m as a function of power.....	56
Figure 33: Mass-based geometric mean diameter for total aerosol at 50m as a function of power.....	56
Figure 34: Number-based emission index for total aerosol at 50m as a function of power.....	57
Figure 35: Mass-based emission index for total aerosol at 50m as a function of power.....	58
Figure 36: Dgeom for the non-volatile aerosol at 1m as a function of power.....	59
Figure 37: Sigma for the non-volatile aerosol at 1m as a function of power.....	60
Figure 38: DgeomM for the non-volatile aerosol at 1m as a function of power.....	60
Figure 39: EIn for the non-volatile aerosol at 1m as a function of power.....	61
Figure 40: EIm for the non-volatile aerosol at 1m as a function of power.....	62
Figure 41: Results of the deliquescence experiment.....	62
Figure 42: Correlation of total carbon concentration measured between parallel sample trains. One train was designed for high flow through the quartz to ensure sufficient sample for EC-OC analyses while the other train is the quartz-PUF combination for semi-volatile analysis.....	65
Figure 43: Comparison of PM mass concentration (measured on Teflo) vs. TC mass concentration measured on high flow quartz.....	66
Figure 44: Comparison of sulfur concentration (measured sulfate as sulfur by IC) to sulfur mass concentration measured by XRF.....	67
Figure 45: PM emission indices.....	68
Figure 46: PM mass concentrations.....	68
Figure 47: Relative EC and OC emission rates for each aircraft as a function of mode ..	70
Figure 48: Comparison of the relative contribution of naphthalenic compounds .....	71
Figure 49: Comparison of relative contributions of non-naphthalenic PAH compounds .....	71
Figure 50: Comparison of n-alkane distribution (C <sub>12</sub> -C <sub>30</sub> ).....	72
Figure 51: Emission Indices for significant Poly Aromatic Hydrocarbons as a function of different modes for different aircraft .....	81
Figure 52: Distribution of Metals .....	84
Figure 53: Relative Carbonyl Emission Indices (mg/kg-fuel).....	95
Figure 54: Schematic of Flow Patterns in the Sampling System.....	115
Figure 55: Comparison of Light Hydrocarbons Measured with TDS in APEX1 and JETS APEX2.....	118



Figure 56a: Dgeom as a function of power for -300 and -700 series. Figure 56b: Comparison with APEX1 data.....	124
Figure 57a: Sigma as a function of power for -300 and -700 series. Figure 57b: Comparison with APEX1 data.....	125
Figure 58a: DgeomM as a function of power for -300 and -700 series. Figure 58b: Comparison with APEX1 data.....	125
Figure 59a: EIn as a function of power for -300 and -700 series. Figure 59b: Comparison with APEX1 data.....	126
Figure 60a: EIm as a function of power for -300 and -700 series. Figure 60b: Comparison with APEX1 data.....	127
Figure 61: Example of the warm up effect observed on a -700 series engine when the exhaust was sampled at 50m.....	128
Figure 62: Comparison of Dgeom for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series .....	129
Figure 63: Comparison of Sigma for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series .....	130
Figure 64: Comparison of DgeomM for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series .....	130
Figure 65: Comparison of EIn for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series .....	131
Figure 66: Comparison of EIm for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series .....	132
Figure 67: Comparison of total and non-volatile aerosol parameters – Dgeom, Sigma and DgeomM for the -300 and -700 series .....	133
Figure 68: Comparison of total and non-volatile number and mass-based emission indices for the -300 and -700 series .....	134

## List of Tables

Table 1: Example of Volatile Organic Compounds in Jet Engine and Diesel Engine Emissions—Aromatic Hydrocarbons (see references in Tesseraux).....	4
Table 2: Roles of Various Team Members.....	9
Table 3: List of Instruments/Media to be Deployed for the Chemical and Physical Characterization of the Non-regulated Emissions in the Engine Exhaust.....	10
Table 4: CFM56 Fleet Statistics (through October 2006).....	11
Table 5: List of engines tested and associated airframes.....	12
Table 6: EPA’s LTO Thrust Settings & Time-in-Mode.....	18
Table 7: Design of the Modal Cycles for the UCR Sampler for JETS APEX2.....	32
Table 8: Hydrocarbon Speciation: Sampling and Analyses Methods.....	35
Table 9: Lower Detection limits for Organic Compounds analyzed.....	37
Table 10 : Lower Detection Limit for PM, EC, OC and Naphthalene.....	37
Table 11: HCHO Ratios.....	45
Table 12: Flow rate in LPM for Different Lines & Plane as a Function of Mode.....	64
Table 13: mass concentrations of PM, EC, OC and TC.....	69
Table 14: EI (g kg <sup>-1</sup> fuel).....	69
Table 15: Mass concentration of PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N435WN.....	73
Table 16: Mass concentration of PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N353SW.....	74
Table 17: Mass concentration of PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N695SW.....	75
Table 18: Mass concentration of PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N429WN.....	76
Table 19: Emission Indices for PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N435WN.....	77
Table 20: Emission Indices for PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N353SW.....	78
Table 21: Emission Indices for PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N695SW.....	79
Table 22: Emission Indices for PAH and n-alkanes (C <sub>12</sub> -C <sub>30</sub> ) – N429WN.....	80
Table 23: Chromium (VI) analyses.....	82
Table 24: Detection Limits for Dioxin.....	83
Table 25: Metal mass concentrations – N435WN.....	85
Table 26: Metal mass concentrations – N353SW.....	86
Table 27: Metal mass concentrations – N695SW.....	87
Table 28: Metal mass concentrations – N429WN.....	88
Table 29: Metal Emission Indices – N435WN.....	89
Table 30: Metal Emission Indices – N353SW.....	90
Table 31: Metal Emission Indices – N695SW.....	91
Table 32: Metal Emission Indices – N429WN.....	92
Table 33: Limits of Detection for Metals by X-ray Fluorescence.....	93
Table 34: Lower Detection Limit for Sulfur.....	93
Table 35: Sulfate mass concentration (µg/m <sup>3</sup> ).....	94
Table 36: Sulfate (as Sulfur) Emission Indices.....	94
Table 37: Mass concentration of carbonyl species measured in sampler.....	96
Table 38: Alkene mass concentrations – N435WN.....	98
Table 39: Alkene mass concentrations – N353SW.....	100
Table 40: Alkene mass concentrations – N695SW.....	102
Table 41: Alkene mass concentrations – N429WN.....	104

Table 42: Alkane mass concentrations – N435WN.....	106
Table 43: Alkane mass concentrations – N353SW.....	107
Table 44: Alkane mass concentrations – N695SW.....	108
Table 45: Alkane mass concentrations – N429WN.....	109
Table 46: Aromatic mass concentrations – N435WN.....	110
Table 47: Aromatic mass concentrations – N353SW.....	111
Table 48: Aromatic mass concentrations – N695SW.....	112
Table 49: Aromatic mass concentrations - N429WN.....	113
Table 50: Comparison of UCR and ARI Data for Carbonyls.....	116
Table 51: Benzene and Toluene concentration data from JETS APEX2.....	117
Table 52: Species measured by UCR and ARI.....	120

## Abstract

This study reports the emissions of CO, CO<sub>2</sub>, NO<sub>x</sub>, Particulate Matter (PM) mass, speciated PM and speciated hydrocarbons at six thrust settings: 4%, 7%, 30%, 40%, 65% and 85%, measured from both engines on four parked 737 aircraft at the Oakland International Airport. The engine types were selected to represent both old and new technologies. Tests were performed to determine whether or not all engines studied were operating in a representative manner. Of the 8 engines studied, only one was found to have performance deterioration and it was excluded from the engine average results. Size distributions from 5nm to 1µm were measured for all test points and associated aerosol shape parameters, and mass and number-based emission indices were evaluated along with real-time chemical speciation for some hydrocarbons. This work was conducted by the University of Missouri-Rolla and Aerodyne Research Inc. The bulk of the Total Organic Gases (TOG) speciation was pursued using off-line filter sampling approaches conducted by the University of California - Riverside. **After the field campaign was completed it became apparent that a leak had occurred in the sampling system for the sub-set of filters designated for light hydrocarbons (C<sub>1</sub>-C<sub>12</sub>) and carbonyls, and the Summa canister data was lost for unknown reasons. The emission indices for these species are not quantifiable.** Despite this loss of data this study has resulted in the first quantitative values obtained using state of the art techniques of engine emission factors for PM and some TOG for the most common classes of gas turbine engines currently operating in the US domestic fleet. The data from this test will serve to improve air quality prediction models used in Environmental Impact Statements and Reports for airport expansion projects, and for developing effective State Implementation Plans.

## Executive Summary

This report represents the specific CARB funded deliverable for ARB contract number 04-344: The Development of Exhaust Speciation Profiles for Commercial Jet Engines.

Airport traffic is expanding and yet information is scarce on the exhaust speciation profiles of both total organic gases (TOG) and particulate matter (PM) from modern commercial jet aircraft using current fuels. The lack of chemical source profiles makes it almost impossible to produce accurate statewide inventories and Environmental Impact Report (EIR) efforts in regions heavily impacted by commercial jet aircraft. The objective of this project was to develop TOG and PM speciation profiles for engines used in newer Boeing 737-type commercial aircraft burning Jet A/A-1 turbine fuel using the latest analytical equipment. These aircraft were specifically chosen since they represent >70% of the aircraft currently in operation in the domestic commercial fleet. Furthermore, the primary engine type employed (CFM-56 series) has such a strong presence in global aviation that CFM claims an aircraft with their engines takes off every four seconds, every day. These facts being considered, the B737/CFM-56 combination is an excellent starting point for the development of a database that accurately represents commercial aircraft emissions. The successful completion of this project will facilitate informed decision-making and accurate modeling of B737 type commercial jet engine exhaust emissions for inventories and ozone estimation as well as detailed chemical speciation/source apportionment to assist in health risk assessments during the EIR process for airport expansion projects. It should be noted that the data presented in this study are engine/airframe specific and do not necessarily represent gas turbine engine emissions in general and should not be applied to other engine/airframe types.

The primary objective of project JETS APEX2 was to collect and develop exhaust speciation profiles from modern commercial jet engines. To achieve this objective, CARB had initiated discussions with Oakland International Airport (OAK) and Southwest Airlines (SWA) to provide access to in-service commercial B737 aircraft for such measurements since SWA operates exclusively with B737s and is the major airline operating out of OAK. With the appropriate coordination of expertise and resources, this CARB project, with significant expansion, provided a measurement venue required to meet the critical National PM Road Map milestones that followed Project APEX (APEX1 - April 2004) and Project Delta-Atlanta Hartsfield (UNA UNA - September 2004). In the spring of 2005, Project JETS APEX2 emerged as a multi-agency (CARB, NASA, FAA, EPA, UMR, UCR, UCF, AEDC, GE, Boeing, SWA, OAK and ARI) funded study with the following objectives:

1. Produce the first measurements with state-of-art analytical equipment of speciated total organic gases (TOG) and particulate matter (PM) from engines on typical in-use Boeing 737-type commercial aircraft [ARB contract number 04-344 deliverable].
2. Provide data to address critical science questions/issues arising from the 2004 APEX1 and UNA UNA studies [an objective of the broader multi-agency project not reported here].

These data will also be used, where possible, to develop chemical source profiles needed to make informed decisions during the Environmental Impact Report (EIR) process for airport expansions.

Custom-designed probes and extensive support equipment were used to sample jet exhaust in the on-wing position and were analyzed with state-of-the-art instrumentation. Emissions of CO, CO<sub>2</sub>, NO<sub>x</sub>, PM mass, speciated PM and speciated hydrocarbons at six thrust settings: 4%, 7%, 30%, 40%, 65% and 85% were measured from both engines on four parked 737 aircraft.

Particle-laden exhaust was extracted directly from the combustor/engine exhaust flow through the probe, transported through a sophisticated sample train, distributed to the different research groups, and analyzed in each group's suite of instrumentation. Sampling probes were located at different positions downstream of the engine exit plane: 1m, 30m and 50m on the starboard side and at 1m on the port side of the aircraft. In this report the 1 and 50m data are presented. These aircraft engine emissions measurements were performed at the Ground Runup Enclosure (GRE) at OAK during August 2005. The engine types were selected to represent both old (-300 series) and new (-700 series) technologies. Realtime PM physical characterization was conducted by UMR. Size distributions from 5nm to 1µm were measured for all test points and associated aerosol parameters e.g. geometric mean diameter, geometric standard deviation, total concentration, and mass and number-based emission indices were evaluated are presented below.

Realtime measurements of gaseous emissions were made by ARI using 1) Tunable Infrared Laser Differential Absorption Spectroscopy (TILDAS) based on both lead-salt diode and quantum cascade laser sources for several important trace species emissions and 2) Proton-Transfer Reaction Mass Spectroscopy (PTR-MS) for hydrocarbons, and 3) chemiluminescence measurement (NO). These measurements were converted to Emission Indices using CO<sub>2</sub> measured with a non-dispersive infrared absorption of that major combustion product. Chemical composition of the particle emissions was quantified using an Aerosol Mass Spectrometer (AMS) in concert with a Multi-Angle Absorption Photometer (MAAP, for Black Carbon mass) and particle size and number measurements.

Measurement of TOG, PM mass, metals and ion concentrations were conducted on the exhaust products collected on filter membranes by the University of California - Riverside Center for Environmental Research and Technology. The analytical methods employed are considered standard methods for such measurements and are described in detail in the methodology sections to follow. After the field campaign was completed, analysis of the DNPH cartridges and SUMMA canisters revealed anomalous CO<sub>2</sub> concentrations which were attributed to a leak in a sub-system of the sampler. Also, C<sub>4</sub>-C<sub>12</sub> hydrocarbon values based on the concentrations measured from the Thermal Desorption Tubes (TDS) were much lower than expected from APEX1 and other research. Since this leak introduced an unquantifiable dilution in these sub-systems, the emission factors for the light hydrocarbons and carbonyls could not be calculated.

The results of these measurements represent the heart of this final report and are presented in the results section as a series of speciation profiles by mode for each of the eight engines studied. Details of experimental methods and limits of detection are also provided in the tables.

The major conclusions from this study are as follows. Size distributions for engine exit plane were generally lognormal. Strong and sometimes non-linear dependencies were observed on engine power settings. The onset of gas-to-particle conversion was apparent at 50m for low to medium powers. In this data non-lognormal size distributions were often observed, where the mean sizes decreased and EIn increased relative to the 1m size distributions. Consistently, the aerosol Soluble Mass Fraction was found to increase with distance from the engine exit plane implying that as a result of processes such as gas to particle conversion soluble material present in the gas phase at the engine exhaust exit is being taken up by non-volatile soot as the exhaust plume expands. Its value was negligible at the engine exit plane and was ~10% at 50m. It should be noted that the aerosol properties in this study were calculated for the entire aerosol size distribution and not individual modes.

Measurement of NO<sub>x</sub> indicated that the general emissions performance of the engines was in keeping with certification measurements for the subject engine models. Measurements of individual hydrocarbon species suggest that most of the major species decrease with increasing engine power in proportion to each other and, in specific, with formaldehyde, which is one of the most plentiful emitted hydrocarbons and can be measured accurately. The particle composition includes both sulfate and organic volatile fractions at downstream distances, adding to the carbonaceous aerosol that is present already at the engine exit plane. The sulfate contribution has little dependence on engine power, while the organic contribution is greatest at low engine powers.

With respect to the TOG for which samples were obtained and analyzed, the relative distributions of the substituted naphthalenes to non-substituted naphthalenes for the idle modes are in general agreement with previous work. Chromium (VI) results for all but one of the engines studied were as expected. From DNPH analysis, the major three contributors to the carbonyl emissions are formaldehyde, acetaldehyde, and acetone. Formaldehyde and acetaldehyde are most dominant carbonyl species in the aircraft exhaust emissions.

At this time, the implications of this work for the CARBs relevant regulatory programs are limited. The State of California has no authority to regulate aircraft engine emissions or ground operations, so this project has few direct implications in those areas. However, the resulting improvements in inventory accuracy and detail will carry into other areas. Included would be improvements in air quality prediction used in Environmental Impact Statements and Reports (EIS and EIR) for airport expansion projects, and for developing effective State Implementation Plans (SIP). Of course, health effects impacts, such as those on airport neighbors, will need health risk factors to be developed. But climate change work would benefit from the improved quantification of such greenhouse emissions as NO<sub>x</sub>, CO<sub>2</sub>, and particulate matter.

Upon the completion of this study, the Principal Investigators make the following recommendations for future work concerning aircraft emission characterization:

- The results of this study proved that accurate emission factors can be acquired in a cost effective manner. Since the data is clearly engine/airframe specific, studies of this nature should now be performed on other important engine/airframe combinations e.g. B747/CF6-80.
- The ideal testing conditions afforded by the GRE at Oakland leads to the recommendation that it should be considered a high priority venue for any future engine tests.
- Since the mix of transports routinely operating in and out of Oakland will limit the range of engines/airframes that can be studied, for future studies where B747, B757, B767, and B777 and the larger Airbus transports A320, A340 etc. are anticipated test vehicles, it will be necessary to consider attracting other aircraft to the Oakland test site or using GREs located at other airports, provided appropriate weather conditions prevail.
- In future tests it is recommended that high frequency data acquisition be employed for engine operating conditions such N1, N2, EGT and Fuel flow rate. This may be difficult for older airframes but straight forward for newer additions to the commercial fleet that digitally record engine operating conditions.
- Much of the data was gathered and initially analyzed in real-time. However, this was not the case for the UCR VOC samples that were analyzed off-site post test. For future studies efforts should be expended to assure that the analysis could be undertaken for these samples on-site. This would provide quasi-real-time feedback on the integrity of such samples.
- Engine to engine variability is difficult to estimate when the engine sample size is small (in this study  $\leq 4$  engines per model). The value of accurately estimating this parameter warrants the consideration of a longer period of study.
- Valid measurements for TOG and multiple significant speciated VOCs were not obtained because of sampling and laboratory issues for the light hydrocarbon and carbonyl analyses. These measurements should be repeated at a future engine test, when the opportunity arises, to get better estimates of TOG and speciated VOCs.

The objectives of the JETS APEX2 study were to produce a comprehensive data set of emission factors for total organic gases and PM for old and new technology CFM56 class engines operating out of a medium size hub airport in the State of California (i.e. Port of Oakland). This study was successful in producing the first state of the art measurements for PM physical characterization of in-service CFM56 type engines. Unfortunately, as a



result of the failure of some of the off-line sampling systems the TOG analysis was limited and from that perspective not all of the objectives set out in the proposed effort were accomplished. **However, even with the limited TOG data this study represents the first extensive physico-chemical analysis of a series of in-service commercial engines and as such is an extremely valuable dataset.** This study is part of a greater multi-agency effort that includes emissions measurements downwind of an active runway at Oakland during normal airport operations, and the results presented here are essential for the interpretation of the downwind measurements. The downwind studies were publicly released at the APEX Conference held in Cleveland, OH, November 29-December 01, 2006.

## **1.0 Background**

### **1.1 Introduction**

The growth of commercial air traffic over the last decade has led to an increased contribution to the local inventory of gaseous and particle emissions from the operations associated with airports, e.g. ground support equipment (GSEs) and aircraft engines. Recent studies have shown an increasing number of environmental effects from aviation related activities such as impact on climate (Penner et al., 1999) and local air quality (Waitz et al., 2004). An additional concern, primarily in the vicinity of airports, is the contribution of aircraft emissions to the formation of photochemical smog and the delivery (through inhalation) of highly concentrated irritants into human beings (Samet et al., 2000; Dutton, 2002).

The lack of EPA aircraft engine standards for PM and speciated hydrocarbons and the scarcity of information about the emissions associated with airport operations have heightened the concerns of communities living around airports. Furthermore, Federal statutory and regulatory framework prohibit states, like California, from setting emission standards for aircraft engines, regulating the number of takeoffs or landings at airports, limiting flight procedures or controlling types of planes used at airports. As a consequence, airports find it increasingly difficult to evaluate the potential contribution and health effects of all airport-related emissions during the environmental review process.

#### **1.1.1 Regulated Emissions from Commercial Jet Engines**

Lister (2003) published a comprehensive review of the background, history and development of the current aircraft engine emissions certification regime, up to the publication of Annex 16, Volume II, 1st Edition in 1981 and a brief overview of the main developments. His review is based on historic archive records of the development of the current certification methodology, which were available to the NEPAIR partnership (New Emissions Parameter covering all flight phases of AIRcraft operation).

In the United States, the United States Environmental Protection Agency (US EPA) is required by Section 231 of the Clean Air Act Amendments of 1990 to regulate aircraft engine emissions and has adopted aircraft engine emission standards recommended by the International Civil Aviation Organization (ICAO) as the applicable federal standards. The ICAO and its Committee on Aviation and Environmental Protection (CAEP) continue to coordinate development of consistent international standards for aircraft engines worldwide that “encourage the development of less polluting, more efficient aircraft engines and more aerodynamic aircraft bodies will result in aircraft that pollute substantially less, operate more quietly, and consume less fuel than today’s airplanes.”

The US EPA issued its current rule in 1997 on the control of aircraft air pollution, including standards for exhaust emissions for carbon monoxide (CO), nitric oxides

(NO<sub>x</sub>), and smoke number (SN). The EPA regulation also incorporated the emission test and measurement procedures from the U.N. International Civil Aviation Organization (ICAO), bringing the U.S. aircraft standards into alignment with international standards. Quantification of the regulated emissions - carbon monoxide (CO), oxides of nitrogen (NO<sub>x</sub>), total hydrocarbons (THC) and smoke number (SN) - can be found in the ICAO database (ICAO 2006). It should be noted that usually only one engine is tested in triplicate in order to represent an engine family and that very few multiple engines from the same family are tested.

While most investigators use the standard SAE methods to measure the emissions, several researchers have explored other methods, especially applied to in-use emissions from aircraft operating on the ground. For example, Popp (1999) tested remote sensing at London's Heathrow Airport and in two days made 122 measurements of 90 different aircraft in a mix of idle, taxi-out, and takeoff modes. The work found aircraft at idle exhibited little nitric oxide emissions and at higher thrust levels were somewhat consistent with values from the ICAO Databank. Heland (1998) applied FTIR spectroscopy to the determination of major combustion products such as CO<sub>2</sub>, H<sub>2</sub>O, CO, NO, and N<sub>2</sub>O in aircraft exhausts and compared them with values published in the literature. He reported the measured CO emission index at idle power of a CFM56-3 engine was about 27% lower than the value given by Spicer and about 27–48% higher than the ICAO data for the whole span of CFM56-3 engines. The CO emission index (EI) measured at idle power of a CFM56-5C2 engine of an Airbus A340 was about 30% less than the ICAO value. One observation from Heland's work is the magnitude of the variation found when different investigators make the measurements.

Herndon (2004) measured the NO and NO<sub>2</sub> emission ratios from 30 individual in-use commercial aircraft during taxi and takeoff at JFK Airport in New York City. NO and NO<sub>2</sub> concentrations were measured with one-second time resolution using a dual tunable infrared laser differential absorption spectroscopy instrument. The authors reported that the field-measured emission ratio to the ICAO EIs for three aircraft engines agreed within the expected engine-to-engine variability, aging effects, and experimental uncertainty for three somewhat different engine types.

### **1.1.2 Non-Regulated Emissions from Jet Engines**

As previously discussed, the people living near airports are concerned about their exposure to the combustion products from jet engines and a number of groups are interested in learning more about how much aircraft emissions contribute to the inventory of a basin. Combustion of jet fuel results in CO<sub>2</sub>, H<sub>2</sub>O, CO, SO<sub>x</sub>, NO<sub>x</sub>, particulate matter (PM) and hundreds of organic compounds. Most data are on the regulated emissions and information is lacking on the speciation of the hundreds of hydrocarbon compounds and PM necessary to inventory the contribution of aircraft operations to the total area loading. In order to inventory aircraft operations emissions, a detailed emissions database with speciation is required, and historically, tests to obtain speciated engine emissions data are very expensive and involve many hours of engine operation. These tests are quite rare

and almost non-existent. Current efforts to model commercial jet exhaust, as well as EIR's, are relying on results from testing of military aircraft performed in the 1980's or earlier. Data, which are available, such as in EPA's AP-42 Emission Factor report, come from measurements made around 1980.

Spicer (1992) is usually credited with being the first person to have developed comprehensive speciation profiles of the hydrocarbons in jet exhaust. His first paper reported on emissions for the F-101 and F-110 military engines using JP-4 while operating from idle to intermediate power. His primary focus was the detailed organic speciation and his methodology for sampling and analysis of the hydrocarbon species is similar to that carried out in the work reported here. However, current analytical equipment is far more sensitive and allows lower detection limits. In a second paper, Spicer (1994) reported on the chemical composition and photochemical reactivity of exhaust from two engines. One was an older TF-39 engine that was not designed with emissions in mind, and the other was the newer technology, low-emission CFM56-3 engine. Both engines were tested at three power settings using fuels meeting the JP-4, JP-5 and JP-8 specifications. Results with kerosene-based JP-5 showed the hydrocarbon emission index of the CFM56 engine was about half that of the TF-39 engine. Spicer points out that the core engine of the CFM56 is essentially the same as the F-101 used and reported on in his earlier tests.

Petzold (1999) reported a comparison of the characteristic parameters of black carbon aerosol (BC) emitted from jet engine during ground tests and in-flight behind the same aircraft. They found that the total BC number concentration at the engine exit was in good agreement with the in-flight measured number concentrations of non-volatile particles. A comparison between total number concentration of BC particles and the non-volatile fraction of the total aerosol at the exit plane suggested that the non-volatile fraction of jet engine exhaust aerosol consists almost completely of BC. BC size distribution features included a primary modal diameter at  $D \sim 0.045 \mu\text{m}$  and an agglomeration mode at  $D < 0.2 \mu\text{m}$ .

In 2000, Dewers described AERONET, "*Identification of aircraft Emissions relevant for Reduction Technologies, as a cooperative network set up within the European Communities 4<sup>th</sup> Framework Programme of Research.*" AERONET Thematic Network was created as a platform where stakeholders meet and exchange information, views and experiences gathered in different European projects. The complexity of the issues can be witnessed by the size of the stakeholder group: including aircraft and engine manufacturers, operators, fuel suppliers, airports, and air navigation providers. Each stakeholder has a keen interest to ensure that its products, aircraft and air transport, are environmentally acceptable.

As part of the AERONET effort, Petzold (2001) provided a comparison of the various analytical measurement methods for monitoring various emissions from aircraft engines either airborne or on the ground. The measurement of particulates is the most interesting section of his review. He points out that the smoke number method is not able to accurately reflect the presence of emitted particles in terms of their size. He concludes: "there is an urgent necessity to establish standard methods for engine exhaust aerosol

characterization which correspond better to present knowledge on the atmospheric impact of aircraft emitted particles.”

Wilson (2004) presented an overview of the goals and achievements of another AERONET effort: the European PartEmis project (Measurement and prediction of emissions of aerosols and gaseous precursors from gas turbine engines). PartEmis focused on the characterization and quantification of exhaust emissions from a gas turbine engine. His summary table reviews current knowledge about measurement techniques and gaseous and aerosol parameters. Of interest is their quest to measure non-methane hydrocarbons (NMVOCs -C<sub>2</sub>-C<sub>10</sub>) and partially oxidized hydrocarbons, specifically carbonyl compounds and organic acids. More than 100 NMVOCs (aliphatic and aromatic hydrocarbons, carbonyls and acids) were found and quantified but not yet published. For example, they report the emission indices of organic acids were about 10 times higher than for carbonyl compounds. Review of the aerosol phase revealed that the formation of volatile particles in jet engine emissions was the result of cooling and dilution of exhaust gases.

Tesseraux (2004) reported on the risk factors of jet fuel combustion products. Her research was motivated by the increase in air travel and the scarcity of information known about exposure to the vast number of organic compounds, including carcinogenic substances, to the people living in the vicinity of airports. Her review indicates that no hydrocarbon (HC) compound was found to be a characteristic indicator for jet engines. A key aspect of her review is the comparison of research comparing organic compounds in the emissions of jet engines with emissions from diesel vehicle engines as partially shown below in Table 1.

**Table 1: Example of Volatile Organic Compounds in Jet Engine and Diesel Engine Emissions—Aromatic Hydrocarbons (see references in Tesseraux)**

	Jet Engine					Diesel engine (mg/m <sup>3</sup> ) (Eickhoff) (running)
	CFM-56-3 (ppm) (Spicer)			Averaged test run (mg/m <sup>3</sup> ) (Eickhoff)		
	Idle	30%	80%	CF6 50C2/E2	CFM56-3B1	
Benzene	4.13	0.02	0.02	0.69	0.06	2.12
Toluene	1.56	0.01	BDL	0.26	0.07	0.53
Ethylbenzene	0.42	BDL	BDL	0.18	0.01	0.64
m-p-Xylene	0.68	BDL	BDL	0.45	0.02	-
Styrene	0.76	0.01	BDL	0.09	0.01	-
o-Xylene	0.40	BDL	0.01	0.35	0.01	-
Phenol	0.40	BDL	BDL	0.66	0.04	1.12
C <sub>4</sub> -benzene	0.52	BDL	BDL	0.23	0.01	
C <sub>5</sub> -benzene	0.50	BDL	BDL			
Naphthalene	1.35	BDL	BDL	0.42	0.01	1.98
2-Methylnaphthalene	0.51	BDL	BDL	0.38	0.01	2.26
1-Methylnaphthalene	0.61	BDL	BDL	0.24	0.01	1.29

*BDL – below detection limit*

Recently, Gerstle (2002) published a series of internal reports as the product of a 5-year series of emissions testing of seventeen military aircraft engines, two helicopter engines and two auxiliary power units (APUs), all burning military fuel, JP-8. Testing included regulated emissions and selected non-regulated emissions, such as the carbonyls and Volatile Organic Compounds (VOCs). Their data for the carbonyls and VOCs might be useful references.

### **1.1.3 Effects of Unburned Jet Fuel**

A growing body of information is available about the physical properties and chemical composition of unburned jet fuel. These references are germane given the interest of some staff at ARB on the speciation and health effects of unburned jet fuel and its fumes. An excellent reference is the 2003 report of the National Research Council entitled: "*Toxicological Assessment of Jet-Propulsion Fuel 8.*" The NRC report and numerous references within dealt with the health effects of fuel vapors and liquid fuel.


## **1.2 Recent NASA Missions**

### **1.2.1 Experiment to Characterize Aircraft Volatile Aerosol and Trace Species Emissions (EXCAVATE- 1999)**

Most of the recent measurement data on aircraft emissions is from the National Aeronautics and Space Administration (NASA) but is unpublished. The EXCAVATE mission sampled aircraft emissions at 1 and 35 meters behind the NASA Langley 757 parked on the tarmac. The project used the NASA Langley sampling system and laboratory for measurement of regulated gaseous emissions and PM particle diameter and number distributions. Aerodyne Research Incorporated (ARI) data showed that organic carbon (OC) and sulfate emission factors both increased with distance behind the plane, likely reflecting increasing condensation with increasing plume age and cooling. The ARI Aerosol Mass Spectrometer (AMS) results agreed well with concurrent DMA number distribution measurements, which indicated that the small particles disappeared when the aerosol inlet was heated to 150°C, consistent with observed particulate sulfate composition. Both AMS and DMA results showed increasing aerosol loading with increasing distance behind the plane and lower emission factors with increasing engine power. In contrast, the AMS, the only particle sampling system with a time resolution of seconds, resolved transients of particulate matter (PM), OC with loadings up to 1000 times higher than at high power operation during shifts between idle and high power.

The AMS spectrometer provides chemically resolved size distributions. Figure 1 shows the observed external mixture of sulfate and organic particles in the Boeing 757 aircraft exhaust as a function of downstream aging. Chemically-resolved aerodynamic size distribution data, in combination with the electrical mobility diameter size distributions obtained by NASA Langley, greatly enhanced their understanding of the aircraft exhaust

PM formation mechanisms and chemistry. The ARI mobile laboratory was a cost-effective and time-efficient technique for characterizing EPA-required emission factors for aircraft, while simultaneously providing chemically resolved particle size distributions and the ability to observe and identify potentially large transient emissions events.

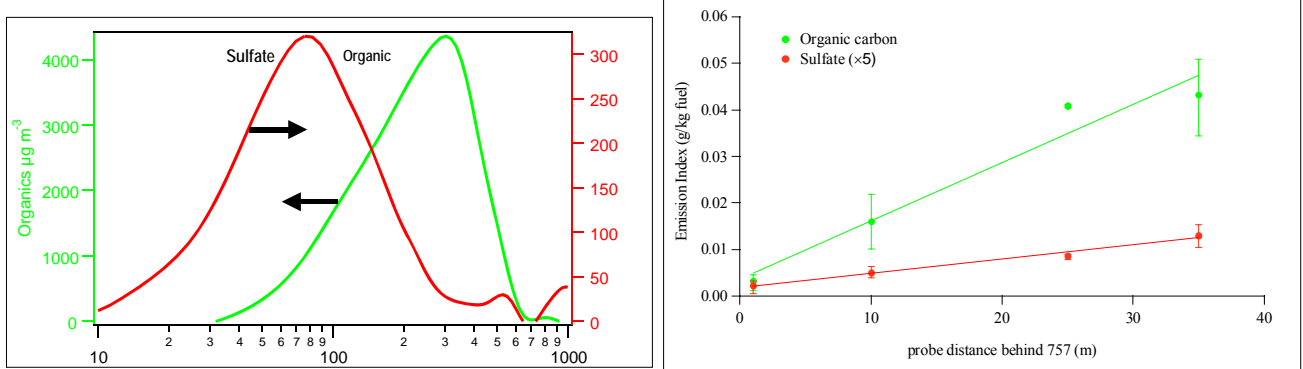

**Figure 1a: Aerodynamic Size Distributions (nm) for Organic and Sulfate Particles in Aircraft Exhaust at 25 Meters. Figure 1b: Particulate Emission Indices Measured as a Function of Distance Behind the Engine.**

ARI used their Tunable Infrared Laser Differential Absorption Spectrometer (TILDAS) for real-time analyses of some regulated and non-regulated gaseous emissions. By selecting appropriate laser sources for the instruments, the spectral range measured important exhaust species such as NO, NO<sub>2</sub>, HONO, SO<sub>2</sub>, CO<sub>2</sub>, and H<sub>2</sub>O. Other species have been measured in diesel engine exhaust and/or in atmospheric measurement, including HCHO (formaldehyde) and HNO<sub>3</sub> (nitric acid). Like the AMS for particles, their TILDAS has a rapid response, limited only by the flow times in the sampling system. The combined measurement of gaseous species in concert with the particle parameters proved critical for understanding the total emissions performance of the engine, including transient phenomena and mixing and dilution at downstream probe locations.

### 1.2.2 Aircraft Particle Emissions eXperiment (APEX1-2004)

APEX1 was the second NASA test of aircraft emissions and involved a multi-agency commercial aircraft mission characterization and technology demonstration with a goal of characterizing particle and trace gas precursor species from the NASA aircraft DC-8 with CFM56-2C1 engines at the engine exit plane as well as at 10 and 30 meters downstream of the engine. The goal of APEX1 was to advance the understanding of particle emissions and their evolution in the atmosphere from a current in-service turbofan engine. NASA wanted to define the physical and chemical properties of particle emissions (including transient due to throttle change and start-up) from the engine at the exit plane as a function of engine operating parameters and fuel properties and to further probe the physical and chemical properties of particle emissions from the aircraft at selected

downstream locations to advance the knowledge of particle transformations in the atmosphere during operations in and around airports. Others involved in the testing included University of Missouri-Rolla (UMR), University of California-Riverside (UCR), Aerodyne Research Inc. (ARI), Environmental Protection Agency (EPA), several Department of Defense (DoD) entities and the Federal Aviation Administration (FAA). Detailed analysis of the APEX1 data set has been completed and can be found elsewhere (Wey et al. 2006; Lobo et al. 2007; Yelvington et al. 2007; Knighton et al. 2007; Onasch et al. 2007).



**Figure 2: Picture of NASA Aircraft and Multiple Test Labs with Supporting Equipment**

The APEX1 data set includes information on speciated hydrocarbons and PM. Specific information was collected on the following gas phase species:

- Regulated emissions- continuous:  $\text{NO}_x$ , CO, total hydrocarbons (THC),
- Additional gases-continuous:  $\text{SO}_2$ , NO,  $\text{NO}_2$ , HONO, CO,  $\text{N}_2\text{O}$ ,  $\text{CO}_2$ ,  $\text{H}_2\text{O}$
- Additional gases-non-continuous: from VVOCs like methane ( $\text{C}_1$ ) to VOCs, including carbonyls, to semi-volatile organic compounds (SVOCs), including naphthalene and PAHs

The testing also gathered specific information on particulate matter:

- Total number concentration, size distribution, hydration properties, morphology
- Non-refractory aerosol size, selected number density, and composition
- Smoke Number
- Non-volatile mass
- PM mass/number concentration, particle size distribution, and total non- volatile PM
- PM elemental/organic carbon and semi-volatile organic compounds
- PM water-soluble ions and elemental composition

Knowledge gained from APEX1 will clearly advance the scientific understanding of speciated compounds and particulate matter and the new instruments that were used for the first time to characterize PM size distribution in real time. However, these data



recorded were for one engine, and much more research is needed in areas related to modern engines as found on the Boeing 737 aircraft. Such data is reported here.

### **1.3 JETS APEX2**

Put in perspective, past and recent work, including the latest NASA missions, have directed most effort towards advancing the understanding and expanding the database related to regulated emissions and some new scientific approaches for measuring PM. None of these data are included in the current ARB profiles. Instead, ARB's current profiles were developed using older fuels and engine technology, mainly based on older military use fuels and engines from the 1980's. Accordingly, significant uncertainties exist in ARB's projects when quantifying speciated hydrocarbons and speciated PM emissions from current airport sources. ARB's uncertainties exist because:

- The currently employed emissions data were collected for limited and outdated military aircraft engines with military fuels and other operations from the 1980s,
- The measured compounds, overall methodologies, and test equipment used, limit the usefulness when applied to current commercial jet engine speciation profiles, and
- Very few emissions tests have been conducted since the 1980s for speciated hydrocarbons and PM on actual commercial aircraft engines, so there was no opportunity to update the ARB database.

Obtaining data on aircraft emissions is complicated and no single entity has all the resources and expertise needed to meet ARB's multiple goals. Accordingly, the approach was to use multiple teams, consisting of executive and technical members. The executive team consisted of the ARB, Federal Aviation Administration (FAA), the UMRCOE, Southwest Airlines (SWA) and the Port of Oakland (OAK).

The technical team consisted of researchers from the University of Missouri-Rolla (UMR), the University of California-Riverside (UCR), and Aerodyne Research Inc. (ARI). This team had the resources necessary to carry out a complex project of this nature in order to deliver the desired information to ARB. The field-ready, proven equipment included instrumentation for sampling and measuring CO, CO<sub>2</sub>, NO<sub>x</sub>, PM, and detailed chemical species emissions data from engines on modern commercial aircraft. Additionally, the South Coast Air Quality Management District analyzed the very volatile organic carbon gases (VVOCs, like methane) and the metals with their ICP-MS. As on past projects, representatives from Boeing and GE participated as advisors in the project. Roles of the various team members are shown below in Table 2 and the list of instrumentation and data acquired are reported in Table 3.

**Table 2: Roles of Various Team Members**

---

<b>Project sponsor: ARB</b>	<i>Manage contract, coordinate with FAA, airline, airport and principal investigator, verify deliverables are met</i>
<b>Executive Team</b>	
FAA	Aircraft contracts, operation & fuel costs
SWA	Provide aircraft
OAK	Space & security issues
UMRCOE	Principal Investigator, coordinate tech team members
<b>Technical Team</b>	
UMR	Sampling setup/probes
UMR/ARI	Measure real-time (RT) regulated gases
UMR	Measure RT PM size, number, penetration
UCR	Measure speciated hydrocarbons
UCR	Measure PM mass, EC/OC, metals, ions
ARI	Measure RT PM size/composition, selected gas species
South Coast AQMD	Analyses of light hydrocarbons & metals
Air Toxics Ltd.	Analyses of DNPH samples (upwind and downwind of test location)
Alta Analytical Laboratory, Inc.	Analysis of dioxin
Bay Area AQMD	Analysis of VOC samples (upwind and downwind of test location)
Desert Research Institute	Analysis of ambient PM samples (upwind of test location)
Frontier Analytical Laboratories	Analysis of dioxin
Boeing/GE	Technical advisors

---

**Table 3: List of Instruments/Media to be Deployed for the Chemical and Physical Characterization of the Non-regulated Emissions in the Engine Exhaust**

<b>Analyzer/Sample Media (Lead)</b>	<b>Information collected</b>
Mass Aerosol Sampling System (UMR)	Number and size distribution of PM
Cambustion DMS500 (UMR)	Real-time (RT) PM number & size distribution
Aerosol Mass Spectrometer (ARI) TILDAS (ARI)	RT PM chemical composition Up to four species: NO, NO <sub>2</sub> , CO, SO <sub>2</sub> , & trace species: HONO, HNO <sub>3</sub> , & formaldehyde in real-time
Quartz substrates (UCR)	EC, OC, speciation of PM organics
Teflon substrates (UCR)	PM mass, ions, metals, Cr(VI)
SUMMA canister (SCAQMD)	C <sub>1</sub> -C <sub>8</sub> organic HC speciation
Multi-bed traps (UCR)	C <sub>4</sub> -C <sub>12</sub> organic speciation
PUF/XAD cartridges (UCR)	C <sub>10</sub> -C <sub>30</sub> organic speciation
DNPB cartridges (UCR)	Carbonyl analysis

## 2.0 Materials and Methods

### 2.1 Aircraft Engines

Aircraft emissions vary with the engine type, the engine load/test cycle, ambient conditions, and the fuel used. Aircraft engines tested in JETS APEX2 were those attached to the Boeing 737 series of aircraft as these engines are used extensively for commuter service within California and neighboring states. The goal was to measure the emissions from B737-300 and B737-700 aircraft, from the commercial fleet of SWA, with engines made by CFM International. CFM International is a 50/50 partnership formed over 30 years ago between General Electric and French engine-maker Snecma Moteurs. Considerable detail on engine performance and market share can be learned from the CFM web page<sup>1</sup>. The CFM engines are the market leaders in every category in which they compete with 390 global customers and more than 14,200 engines in service. CFM claims an aircraft with their engines takes off every four seconds, every day. Table 4 lists the aircraft and number of CFM engines being used today.

**Table 4: CFM56 Fleet Statistics (through October 2006)<sup>1</sup>**

<b>Aircraft</b>	<b>Engine</b>	<b>In-Service</b>
E-3/KE-3/E-6	CFM56-2A	193
KC-135/RC-135	CFM56-2B	1,962
DC8-70	CFM56-2C	524
B737-300/-400/-500	CFM56-3	4,498
A319/A320	CFM56-5A	1,183
A318/A319/A320/A321	CFM56-5B	2,384
A340	CFM56-5C	1,090
B737NG	CFM56-7B	4,403
	<b>Total</b>	<b>16,237</b>

In APEX1, a DC-8 aircraft with CFM56-2C1 engines was tested. At JETS APEX2, engines that were newer and more representative of those in current commercial service were studied. Put in perspective, the CFM56-3 engine followed the CFM56-2 and was last manufactured in 1999. The newest engine, CFM56-7 was certified in 1994 and is being used because of its higher thrust, improved efficiency, and lower maintenance costs. It is the newest engine and the sole engine being installed on the newest 737's. Both the -3 and the -7 are much newer and more representative of current aircraft engines as the in-use numbers in Table 4 indicate.

A list of engines tested in the current study and associated airframes are listed in Table 5. Each aircraft had two engines that were tested giving a total of 8 engines sampled. This was the first test campaign involving simultaneous sampling from multiple engines on the same airframe. The measurement activities were performed during the late night hours of 9pm – 5am, since this was the time period for aircraft availability.

<sup>1</sup> <http://www.cfm56.com/index.php?level2=engines&level3=1037>

**Table 5: List of engines tested and associated airframes**


<b>Date</b>	<b>Aircraft Tail No</b>	<b>Airframe</b>	<b>Engine</b>
August 23, 2005	N435WN	B737-700	CFM56-7B22
August 24, 2005	N353SW	B737-300	CFM56-3B1
August 24, 2005	N695SW	B737-300	CFM56-3B1
August 25, 2005	N429WN	B737-700	CFM56-7B22

## **2.2 Location for On-wing Sampling**

The location selected for carrying out testing of these aircraft engine emissions was the Ground Runup Enclosure (GRE) at Oakland International Airport (see Appendix A). The GRE shown in Figure 3, completed in 2002, is a \$4.5M, three-sided facility that dramatically reduces the effects and propagation of jet engine run-up noise that occurs during engine maintenance work. This location proved to be an ideal setting in which to carry out the measurement activities without hindering normal airport operations. This venue offered other features that proved useful for emissions measurement. The side walls of the GRE reduced cross-wind plume deflection away from the downstream sampling probes. A typical problem with engine emission sampling is the variation of ambient conditions (temperature, pressure, humidity, wind, etc.) on engine performance, since these tests usually require long periods of testing (e.g. 8 hours). If variations in the emissions associated with changing ambient conditions are large, they will interfere with observations of emissions for predefined test matrix engine condition changes (fuel, power setting, engine type, engine on-time, etc.). This problem was greatly relieved for JETS APEX2 project since ambient conditions were very stable for Oakland Bay Area in August 2005. In particular, the prevailing wind direction was ideally situated with respect to the open face of the GRE facility as shown in Figure 4. Detailed wind roses generated from data collected by ARB during the test are included in Appendix B. The prevailing winds ensured a continuous exchange of air through the GRE and no evidence of engine exhaust recirculation was observed throughout the entire testing period. Also, Appendix C lists the DNPH cartridge sample results for various carbonyls. These samples were acquired at three locations – Upwind of the GRE, Downwind of the GRE and at the ARB trailer and values were less than 5ppb at all locations. Appendix D lists the results of the ambient canister sample analysis for Hydrocarbons. It is evident from the DNPH cartridge and HC canister analyses that the ambient levels of VOCs were negligible.




**Figure 3: View of the GRE**

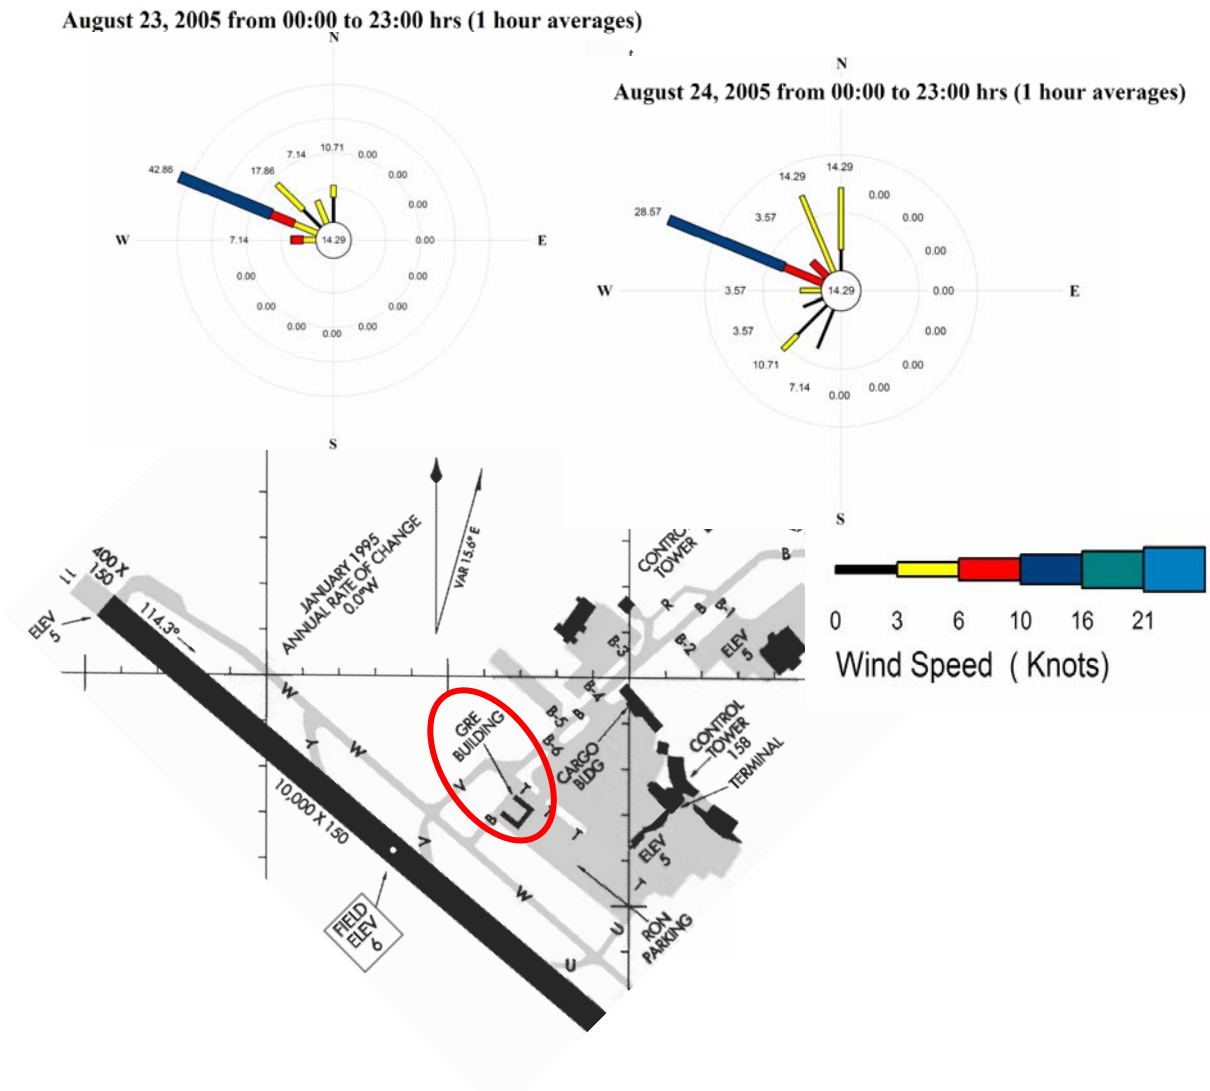

**Figure 4: Wind-rose diagram giving prevailing wind orientation with respect to Runway and GRE facility**

The orientation of the aircraft, sampling probes and mobile laboratories within the GRE are shown in Figure 5.

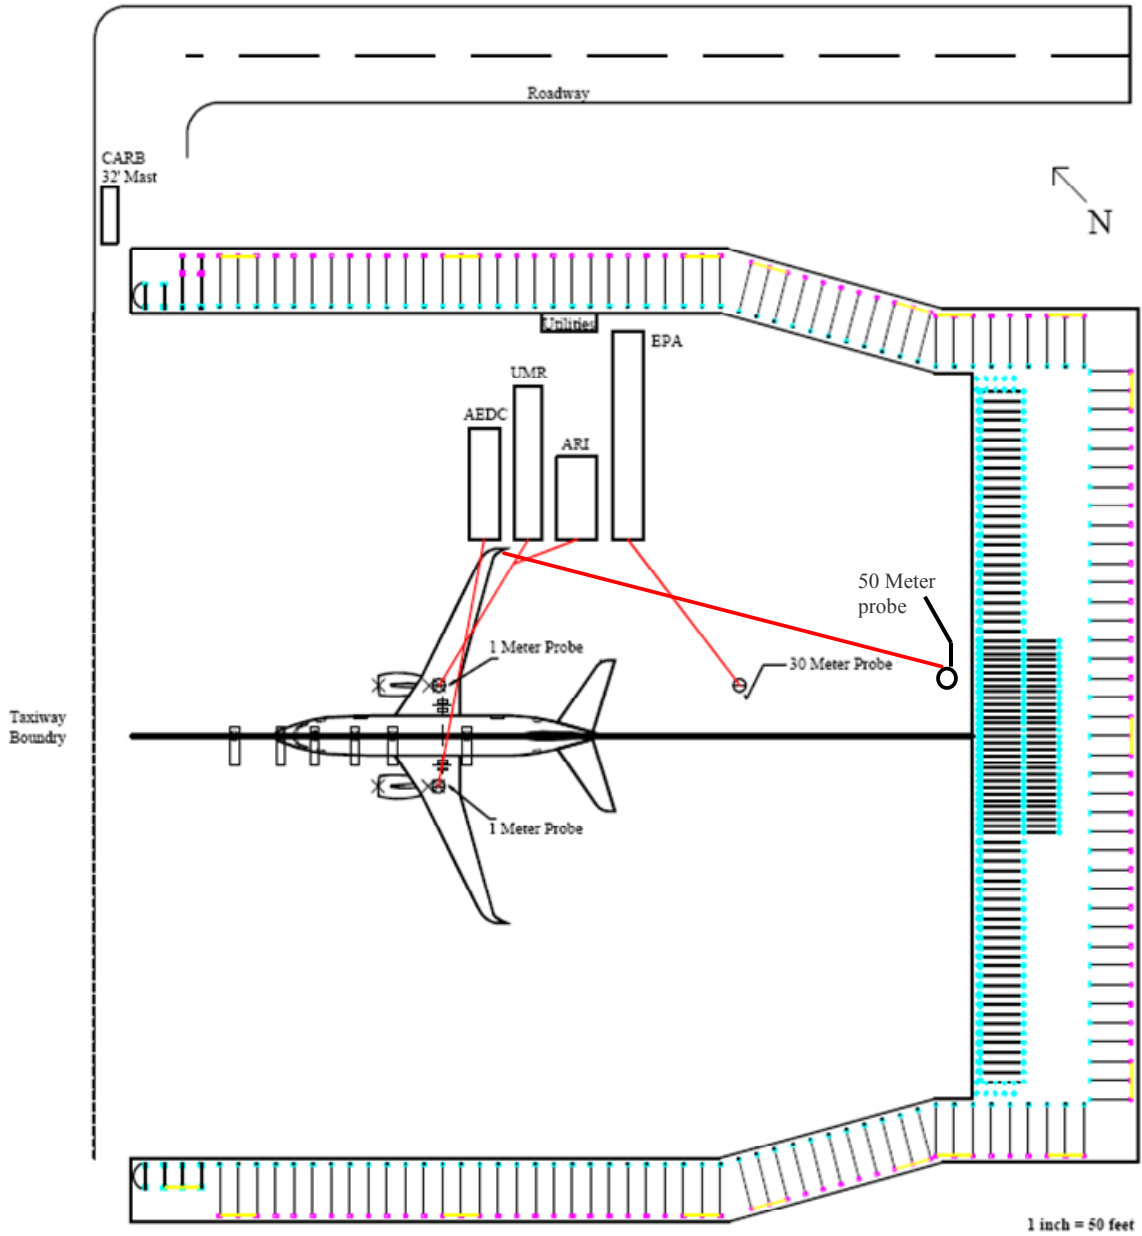

**Figure 5: Layout within the GRE**

### 2.3 Equipment for On-wing Sampling


Sampling jet engine exhaust for a parked aircraft is not a trivial exercise. Custom-designed probes and extensive support equipment were used to sample jet exhaust in the on-wing position. Particle-laden exhaust was extracted directly from the combustor/engine exhaust flow through probes and supplied to the measurement devices. The primary probe for collecting samples and data was positioned within 1 meter of the exhaust nozzle exit plane, as this position is representative of the engine signature and the certification data in the ICAO database. At this test, two primary sampling probes, one on the starboard side and the other on the port side of the aircraft, were used. Figure 6a shows an example of the starboard sampling rake system and Figure 6b gives a close-up view of the rake itself with the protective sample line shielding removed. More sampling rake details are given in Appendix E.



**Figure 6a: Starboard sampling probe stand (left). Figure 6b: Probe rake with different probes (right)**

The PM probes (see Figure 7) are designed to provide both probe tip and downstream (0.09 meters from tip) dilution flows, thereby reducing and/or eliminating probe effects. The rake quadrant and probes are water cooled to protect them from thermal degradation during testing. The dilution flows are drawn from particle-free, dry air sources located in the mobile laboratories and conducted to the probes through 0.006-meter (inside diameter) flexible gas lines. The sample for PM measurements are conducted to the mobile laboratories through a  $\frac{3}{4}$ " SS sample line for which line losses have been calibrated.




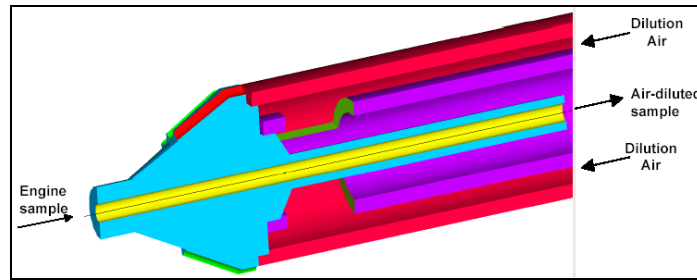

**Figure 7: Particulate Sampling Probe**


The gas samples are conducted to the mobile laboratories through heated sample lines which are designed in accordance with Aerospace Recommended Practice (ARP) 1256. The mobile laboratories are typically located near the aircraft wing tips (Figure 5). Even on the largest transport aircraft, the sample lines between probes and laboratories are typically  $\leq 30$  meters long. A sophisticated sample probe and sample train was needed to collect the exhaust sample and deliver it to each experimental group's suite of instruments. Figures 8 and 9 both present the probe and sample train systems, with Figure 8 emphasizing the sample train and Figure 9 the probes.

**APEX-2 Aerosol Sample Manifold**

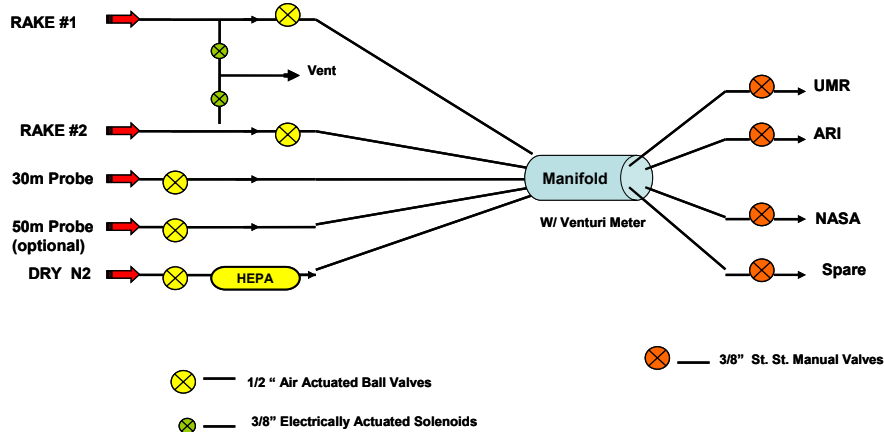

**Figure 8: Aerosol sample manifold**

### APEX-2 Aerosol Probe Plumbing

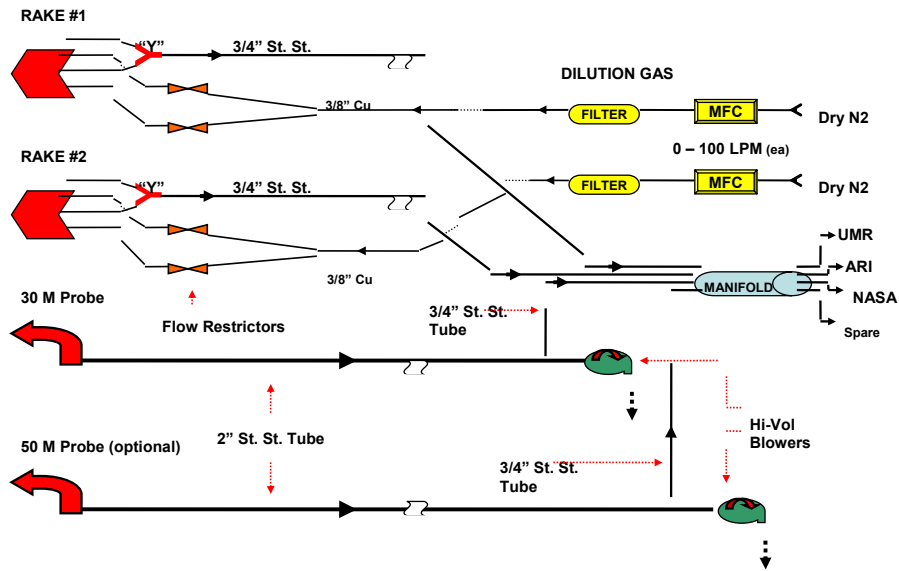


**Figure 9: Aerosol probe plumbing**

Four probe rakes were employed, with one probe rake located 1m behind the starboard engine, one 30m and another 50m downstream of this engine, plus one 1m behind the port engine. In this report, data from the 1m and 50m locations are presented. The PM physical characterization of the 30m aerosol was not possible since the line loss function was not available. In order to collect sufficient sample flow from the 1m rakes, two probes were always coupled. Dry nitrogen for dilution was introduced into the flow at the probe tips on the 1m rakes. The dilution was used to suppress particle-particle interactions and gas-to-particle conversion. The amount of dilution gas was controlled by observing the CO<sub>2</sub> concentration in the sample line and keeping it at a desired level. Typical dilution ratios were in the range 10-40. Both aerosol and gas samples received the same dilution. No diluent was provided at the 50m location since sufficient dilution with ambient air was found to have occurred naturally in the plume. In order to maximize the amount of data acquired per unit of engine run time, it was necessary to avoid spending time to flush stale air from the 1m sample lines that aged during times when that line was not being used. This was accomplished by always running fresh sample through the lines and dumping sample when it was not being analyzed. The lines and valves leading to the vent shown in Figure 8 were used for this purpose. No line switching was done on the 50m sample train, so this was not an issue at that location. As shown in Figures 8 and 9 the sample was first delivered to a manifold, located in the UMR trailer. From there it was delivered in separate sample lines to each instrumentation group (UMR, ARI, and NASA).

## 2.4 Test Cycle

The test cycle for the EPA procedure is specified in 40CFR Part 87, Control of Air Pollution from Aircraft and Aircraft Engines, and was derived from traffic surveys at major U.S. commercial and general aviation airports: Los Angeles International, Chicago O. Hare, New York John F Kennedy, Washington National (now Regan National), Van Nuys, CA and Tamiami, FL. As is evident in Figure 10, the test procedure represents the four modes in the landing and takeoff (LTO) cycle: approach, taxi/idle-in, taxi/idle-out, takeoff and climb-out.

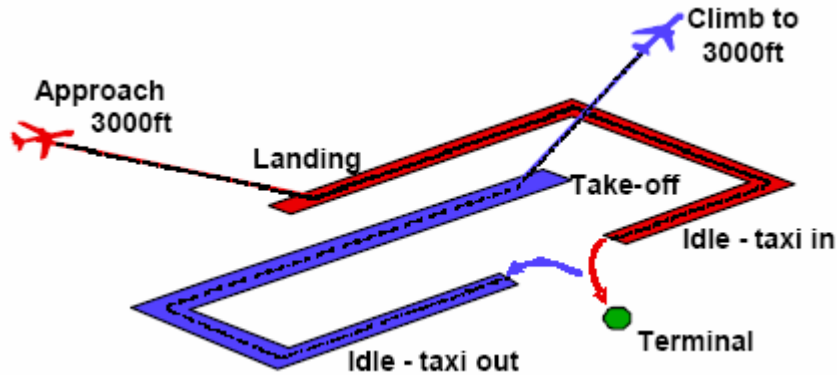

**Figure 10: Schematic diagram of the Landing and Take-Off cycle**

EPA considered operations below 3000 feet altitude to be a reasonable approximation of the atmospheric mixing height over major U.S. metropolitan areas. The actual thrust setting (percentage of rated thrust) and weighting factors (times) for the LTO cycle are shown in Table 6 below.

**Table 6: EPA's LTO Thrust Settings & Time-in-Mode**


Operating Phase	Thrust setting (% of rated thrust)	EPA Time in Mode, minutes
Taxi/idle	7%	26
Takeoff	100%	0.7
Climb-out	85%	2.2
Descent*	NA	NA
Approach	30%	4

\*Descent not used in EPA cycle

For this test, the EPA protocol was used as a guide and testing at six thrust settings: 4%, 7%, 30%, 40%, 65%, and 85%, was performed. The intermediate points were added to allow a careful definition of the point at which the Emission Index for the PM rapidly increases more than 10-fold. Rather than collecting one sample over all modes in the LTO cycle, UCR measured PM and other species at each thrust setting and determined

individual modal mass emission rates. This approach will allow ARB and FAA to calculate the emissions appropriate for any airport of interest. Data for the operating aircraft and the atmospheric conditions were recorded during the test.

Figure 11 illustrates the test matrix used in this campaign. The test matrix was designed for 10 minutes of stable engine operation at each test point with the exception of the 85% test point which was limited to 2 minutes due to engine operations constraints recommended by Boeing and required by SWA.

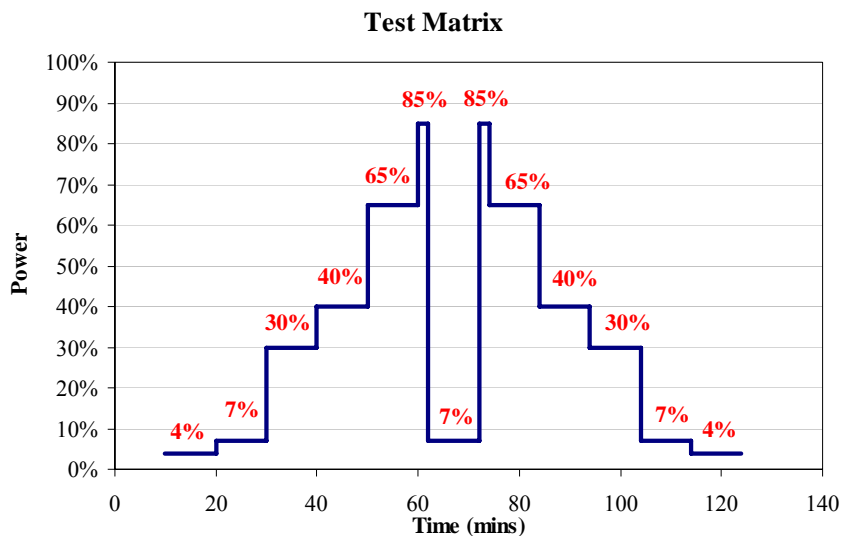

**Figure 11: Test Matrix used at JETS APEX2**


## 2.5 Fuel

Fuel for the test was that generally used in the aircraft (Jet A) and samples were taken for subsequent analysis by ARB for aromatics and sulfur content (see Appendix G). The hydrogen/carbon ratio was obtained since this ratio is needed to interpret the combustion data (see Appendix H). A sample of the lubricant was also taken by EPA, but these have yet to be analyzed.

## 2.6 ARI Methodology

The measurement instrumentation and sampling scheme used during JETS APEX2 were similar in concept, though different in many details, to those which were used in the NASA/Qinetiq (Whitefield et al. 2002), EXCAVATE (Anderson et al. 2005), and APEX1 (Wey et al. 2006) test programs. A suite of particle and trace gas measurement instruments was housed in the Aerodyne Mobile Laboratory, a panel truck specially modified for this purpose (Figure 12). A single probe tip from the port or starboard 1 m rake or one of the downstream (30 or 50 m) probes was selected for measurement. A sample line entered the truck, and the sample flow was split isokinetically into two halves: one directed to the suite of particulate characterization instruments (AMS,

MAAP, CPC), and one to the trace gas instruments including the TILDAS, chemiluminescence, and PTR-MS instruments. Carbon dioxide (CO<sub>2</sub>) was measured in both flows using separate NDIR CO<sub>2</sub> measurement instruments. The particle instruments were located on the left-hand-side of the truck and isokinetically sampled aerosol behind a PM2.5 cyclone. All instruments in the mobile lab sampled from the same inlet line.

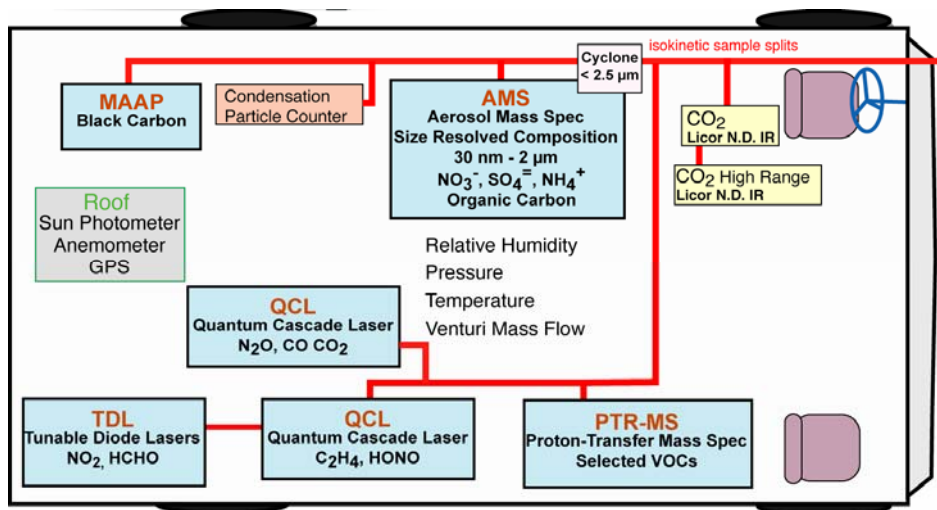

**Figure 12: Schematic of the Aerodyne Mobile Laboratory**

The sampling lines from the Aerodyne mobile laboratory were connected to a distribution manifold, which distributed sample flow pulled from the several probes located downstream in the aircraft engine exhaust to the various particle-based research groups participating in JETS APEX2. The manifold was operated at sub-ambient pressures and was setup to provide ready access to any particular particle probe for a given engine condition. The manifold pressure was constant at 650 Torr when sampling from the 30 or 50 meter probes, under all engine power settings. The probe dilution flows were monitored and controlled when necessary.

In JETS APEX2, both particle and gas phase chemical species compositions were determined. The primary gas phase emissions, which are also regulated for engine certification, are NO<sub>x</sub>, CO, and unburned or partially combusted hydrocarbons. These gaseous species were quantified using chemiluminescence (CL, for NO), tunable infrared laser differential absorption spectroscopy (TILDAS, for NO<sub>2</sub>, CO, HCHO, and C<sub>2</sub>H<sub>4</sub>), and proton transfer reaction mass spectrometric (PTR-MS, for hydrocarbons) techniques. These chosen techniques are different from the regulatory requirements, but allow more detailed exhaust speciation to be determined.

For particle phase speciation, an Aerosol Mass Spectrometer was used (AMS, for size resolved sulfate and organic condensed mass), in conjunction with a Multi-Angle Absorption Photometer (MAAP, for black carbon particle mass) and a Condensation

Particle Counter (CPC, for particle number count). These measurements provided the concentration and size resolved composition of particles ranging from about 30 nm to 1000 nm vacuum aerodynamic diameter.

## **2.6.1 Gas Phase Instrumentation**

### **2.6.1.1 Tunable Infrared Laser Differential Absorption spectrometers (TILDAS)**

Two different types of lasers were used in the TILDAS instruments: tunable lead-salt diode lasers, which operate in a continuous mode and at near liquid nitrogen temperatures, and quantum cascade lasers, which operate in a pulsed mode and at temperatures allowing thermoelectric cooling rather than cryogenic cooling (Nelson et al. 2004). Quantum Cascade -TILDAS systems were used to measure NO<sub>2</sub> in the spectral region of 1606 cm<sup>-1</sup>, C<sub>2</sub>H<sub>4</sub> in the spectral region of 968 cm<sup>-1</sup>, CO in the spectral region of 2183 cm<sup>-1</sup>, and acrolein in the spectral region of 959 cm<sup>-1</sup>. A lead-salt TILDAS system was used to measure HCHO in the spectral region of 1725 cm<sup>-1</sup>.

### **2.6.1.2 Chemiluminescent NO sensor**

A Thermo-Electron model 42c chemiluminescent detector was used for the NO measurements. The detection method is based on the detection of chemiluminescence stemming from electronically excited NO<sub>2</sub> molecules produced by the reaction of NO with a small flow of ozone added to the sample flow (Heard, 2006).

### **2.6.1.3 Proton transfer reaction - mass spectrometer (PTR-MS)**

Hydrocarbons were measured using a PTR-MS operated by Berk Knighton, Montana State University. The PTR-MS (Ionicon Analytic GMBH) is a chemical ionization based mass spectrometry method that utilizes H<sub>3</sub>O<sup>+</sup> as a reagent ion. This instrument has been described elsewhere (de Gouw et al. 2003), so that only a brief description of the relevant details is provided here. The instrument consists of an ion source, a drift tube reaction region and a quadrupole mass spectrometer. H<sub>3</sub>O<sup>+</sup> reagent ions formed in the hollow cathode discharge ion source are electrostatically injected into the drift tube through which the sampled air stream is continuously passed at reduced pressure, 1.9 mbar. These H<sub>3</sub>O<sup>+</sup> reagent ions are pulled through the air sample by an electric field where they can react via proton transfer reactions with those components in the sample having proton affinities greater than that of water. The reagent ions and the resulting proton transfer reaction products are mass selected and detected using the mass spectrometer.

The PTR-MS sampled the exhaust stream from the main sample inlet through a short length of 1/8" O.D. Teflon tubing. A fraction of the sampled exhaust enters the drift tube reaction region where those components of the sample having proton affinities greater than that of water undergo proton transfer reactions with H<sub>3</sub>O<sup>+</sup> reagent ions. The mass spectrometer monitored a selected set of 32 ions at 0.2 seconds per mass, along with the drift tube pressure and temperature, which yielded a cycle measurement time of approximately 8 seconds. The ions monitored included the reagent ions H<sub>3</sub>O<sup>+</sup> (m/z 21 O-

18 isotope) and  $\text{H}_3\text{O}^+(\text{H}_2\text{O})$  ( $m/z$  39 O-18 isotope), the diagnostic ions  $\text{NO}^+$  ( $m/z$  31) and  $\text{O}_2^+$  ( $m/z$  32) and the sample ions as presented below.

The sampled exhaust flow stream was periodically diverted through a heated Pt catalyst ( $400^\circ\text{C}$ ) to provide a VOC free gas stream for determining the instrumental background. In many cases the Pt catalyst did not efficiently remove the VOCs from the exhaust sample stream, and this reduced efficiency has been attributed to poisoning of the catalyst due to the sulfur content of the fuel. Under circumstances where the catalyst appeared to be compromised, instrumental background measurements were determined when the main inlet was purged with  $\text{N}_2$  blow off from a liquid  $\text{N}_2$  dewar. The instrumental background is non-zero for most masses and the reported concentrations reflect the difference between the sample and background signals. The concentration of a HC emission component (R) can be deduced from the measured ion signals using relationships derived either from simple reaction kinetics or from calibrated response factors (Knighton et al., 2007). For compounds where calibration gas standards were not available, the concentrations were calculated by assuming that simple reaction kinetics were applicable (Knighton et al., 2007).

Trace gas levels are reported as emission indices, expressed in units of grams of trace gas emitted per kg of fuel consumed. The fuel consumption and  $\text{CO}_2$  emission are proportional, so trace gas emission indices can be derived from the trace gas concentration and  $\text{CO}_2$  concentration observed in the exhaust sample. The  $\text{CO}_2$  concentration used must have the contribution due to ambient  $\text{CO}_2$  subtracted out, and if the sample has been diluted, that dilution factor must be known before the subtraction of the ambient  $\text{CO}_2$  can be carried out. The formula used to convert trace gas concentrations in parts per million by volume (ppmv) is

$$\text{EI (trace gas)} = \frac{3160 \text{ MW}_t (\text{trace gas concentration, ppm})}{44.01 ((\text{CO}_2 \text{ concentration, ppm}_v) - (\text{ambient CO}_2, \text{ppm}_v)/\text{dilution})} \quad (\text{Eq. 1})$$

where 3160 is the  $\text{CO}_2$  emission index, g  $\text{CO}_2$  per kg of fuel, MW is the molecular weight (g/mole) of the trace gas, and 44.01 is the molecular weight of  $\text{CO}_2$ . For the emission index of nitrogen oxides, NO and  $\text{NO}_2$ , MW is taken to be 46.01, that is, the NO emission indices are reported as equivalent g  $\text{NO}_2$  per kg of fuel. In cases where the sample was not diluted we subtracted an ambient  $\text{CO}_2$  concentration of 380 ppmv, while for samples that were diluted by a factor of 2 we subtracted 190 ppmv, and so on. For the 30 m and 50 m sampling data, where fluctuations in observed concentrations were large, a different procedure was used, in which a regression of trace gas concentration against  $\text{CO}_2$  concentration was used to simultaneously derive the emission index (from the slope) and the term “(ambient  $\text{CO}_2$ , ppmv)/dilution” (from the intercept). For time histories in which the relative variance of the trace gas concentration is large this is the preferred method, while when the relative variance is small it is preferable to average the records of trace gas and  $\text{CO}_2$  concentrations over the time for a given engine condition and use the averages in the above formula.

## 2.6.2 Particle measurements

The particle measurements were conducted using the Aerodyne Aerosol Mass Spectrometer (AMS) to characterize the volatile chemical compositions and chemically-specified size distributions, a Condensation Particle Counter to measure the total particle concentration, and a modified Multiangle Aerosol Photometer (MAAP; Thermo Electron) to measure the aerosol absorption and derive black carbon mass concentrations. The particle instruments were operated downstream of a PM<sub>2.5</sub> (UGI) cyclone to remove large particles.

### 2.6.2.1 Aerosol Mass Spectrometer

The Aerodyne Aerosol Mass Spectrometer (AMS) has been described in detail in the literature (Jayne et al. 2000). The AMS sampled aerosols into a high vacuum and focused the particles into a tight beam using an aerodynamic lens. The focused particle beam exiting the lens was directed through a particle-sizing chamber and impacted on a 3.8 mm circular vaporizer held at 600°C. By mechanically modulating the particle beam with a chopper and using the time-of-flight (TOF) of particles between the chopper and the detector, the particle velocity and the vacuum aerodynamic diameter were obtained. The particle detection scheme consisted of a vaporizer that was coupled into the ionizing cage of a time-of-flight mass spectrometer (MS). When the particles struck the vaporizer surface, the nonrefractory (volatile and semi-volatile) components of particles flash vaporized. The vaporization plume was ionized using standard 70 eV electron impact ionization techniques and extracted into the mass spectrometer, spanning a range of 1-300 atomic mass units. The AMS was operated during this study with a time-resolution of 30 seconds, alternating every 15 seconds between a TOF mode (particle mass distributions as a function of size) and a MS mode (particle chemical speciation and quantitative mass loadings) (Jimenez et al. 2003).

Quantitative mass calibration of the instrument was performed by using a pure ammonium nitrate aerosol source. Particles were generated with an atomizer (TSI, model 3076, USA), dried using silica gel, size-selected using a differential mobility analyzer (TSI, model DMA 3071) and sampled simultaneously by the AMS and a CPC (TSI, model 3022a). Multiply charged particles were eliminated using an impactor upstream of the DMA and the AMS isokinetically sampled from the CPC aerosol flow to ensure identical size distributions. The well-characterized aerosol sample calibrated the electron multiplier signals at  $m/z$  30 and 46 for nitrate ( $\text{NO}_3^+$ ) and 15, 16, and 17 for ammonium ( $\text{NH}_4^+$ ). The AMS analysis uses relative ionization efficiencies measured in previous laboratory studies to calibrate for the chemical species present in aircraft exhaust (sulfates and organics). During this experiment, the AMS had a nitrate ionization efficiency of  $6.9 \times 10^{-6}$  ions/molecule and detection limits (three times the standard deviation) of 0.024 and 0.26  $\mu\text{g}/\text{m}^3$ , respectively for sulfates and organics.

### 2.6.2.2 Multi-Angle Aerosol Photometer

Aerosol black carbon concentrations were derived with a Thermo Electron Multi-Angle Aerosol Photometer (MAAP). A detailed description is provided in the literature



(Petzold et al. 2002; Petzold and Schonlinner 2004). The MAAP is a filter-based photometer that deposits aerosol onto a 2 cm<sup>2</sup> spot on a quartz fiber filter tape. A 630 nm wavelength LED shines on the spot and multiple photodetectors measure the transmission and scattering/reflection of the light from the depositing aerosol layer and the underlying filter. A two stream radiation transfer calculation is used to separate the absorption of the light by the aerosol layer from the scattering of light by the particles and filter matrix (Petzold and Schonlinner 2004). A narrow range of values of  $\sigma_{abs}$  (~6.4-6.6 m<sup>2</sup> g<sup>-1</sup>) is reported to provide a decent fit for commercially-produced black carbon particles and urban particles containing black carbon collected at several sites (Petzold and Schonlinner 2004). A value of  $\sigma_{abs} = 6.6$  m<sup>2</sup> g<sup>-1</sup> is currently used to calculate the instantaneous black carbon mass loading on the filter at a rate of 1 Hz. The MAAP was operated with a flow rate of 8 lpm using custom plumbing. The precision of the MAAP for deriving black carbon mass loadings under these operating conditions is  $\pm 2.4$   $\mu\text{g}/\text{m}^3$ .

### 2.6.2.3 Particle Counting Instrument

The total aerosol concentration was measured with several Condensation Particle Counters (CPC; TSI model 3022a and 7061). The CPC supersaturates a sample flow with butanol vapor, causing submicron particles to grow in size into the supermicron size range where the particles are detected via individual light scattering pulses at low concentrations and via ensemble particle scattering at high concentrations. The 3022a CPC has a 50% cut size of 7 nm at atmospheric pressure, a response time of < 10 seconds for 90% step change, and can sample particle concentrations up to 10<sup>7</sup> cm<sup>-3</sup>.

### 2.6.3 Emission Indices


LiCor infrared absorption instruments were used to measure the gas phase CO<sub>2</sub> concentration in the sampled plume. The gas phase CO<sub>2</sub> concentration was used to relate the measured particulate mass loading to fuel-based particulate mass emission indices (EI's), with units of milligrams of PM per kilogram of fuel burned (mg per kg fuel). Following the methodology described in Herndon et al. (Herndon et al. 2005), for a given exhaust component concentration, X, the EI(X) is calculated by

$$\text{EI}(x) = (\Delta X / \Delta \text{CO}_2) \times \text{EI}(\text{CO}_2) \times M_{\text{air}} / M_{\text{CO}_2} \times (1 / \rho_{\text{air}}) \quad (\text{Eq. 2})$$

where  $\Delta X / \Delta \text{CO}_2$  is the emission ratio for the exhaust component,  $M_{\text{air}}$  is the molar mass of air,  $M_{\text{CO}_2}$  is the molar mass of CO<sub>2</sub>, and  $\rho_{\text{air}}$  is the density of air at ambient conditions. This expression is based on 100% conversion of the carbon in the fuel to CO<sub>2</sub>. Corrections for incomplete combustion can be made, based on measurements of CO and hydrocarbon emissions, but these corrections are within experimental uncertainties for the measurements reported here. EI (CO<sub>2</sub>) equals 3160 g CO<sub>2</sub> (kg fuel)<sup>-1</sup> for most available Jet A fuel, within a few percent. This value can be replaced with that appropriate for a given fuel where the mass fraction of hydrogen in the fuel is known (or equivalently if the C/H ratio is known). EI's are also calculated for particle number concentrations (number per kg fuel) using a slightly modified version of this formula.

## 2.7 UMR Methodology

UMR has developed a mobile diagnostic facility and a sampling methodology which are optimized for jet engine exhaust characterization using extractive sampling techniques. These have been developed and refined over the last 26 years. Our earliest ground based engine tests were conducted during NASA's project FIRE (Hagen et al., 1994; Hagen et al., 1995; Sassen et al., 1995 ; Podzimek et al., 1995) using a hand held sampling probe behind gas turbine engines at low power with aerosol characterization instrumentation mounted in one of NCAR's (National Center for Atmospheric Research) aircraft for airborne work. This ground sampling was done as an opportunistic addition to project FIRE, which was an airborne sampling program. In subsequent work, (Hagen et al., 1997; Hagen et al., 2003; Hagen et al., 2005; Whitefield et al., 1995; Whitefield et al., 1997; Whitefield et al., 2001; Lilenfeld et al., 1995) ground based sampling became a dominant issue, and the aerosol instrumentation was installed in mobile trailers, which increased in size as time progressed, and the sampling probes and stands became evermore sophisticated. Over this time the mobile sampling facilities have been used in numerous test campaigns at airports with parked aircraft, NASA and industrial facilities having combustor and engine test stands, and at venues having altitude chambers. An overall review of the UMR facility and methodology has been reported elsewhere (Schmid et al., 2004). A schematic of the UMR mobile diagnostic facility is presented in Figure 13.

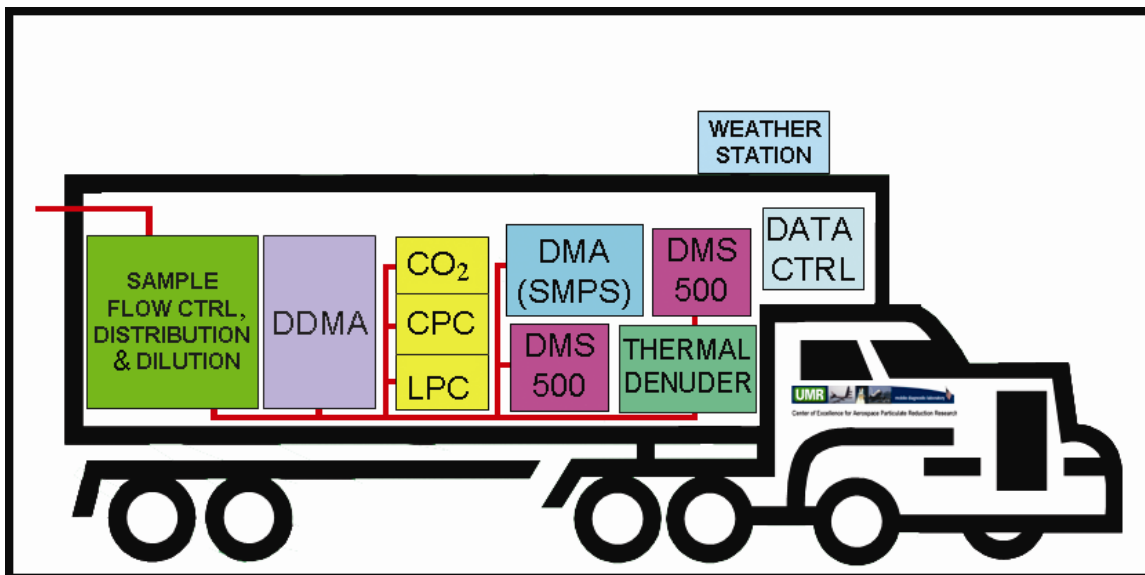

**Figure 13: Schematic of the UMR Mobile Diagnostic Facility**

Extractive sampling is employed, i.e. the exhaust sample is pulled into a probe, near isokinetically if possible, and diluted with a clean and dry gas, e.g. air or nitrogen. The diluent sheaths the sample near probe tip to minimize thermophoresis, turbulence, diffusion, and impaction. It is then transported to the instrument trailer(s) in a sampling train that is well calibrated for line loss. The UMR system includes flow control systems to support diluent to two active probes simultaneously.

The instrumentation suite in the UMR trailer is flexible and varies from test to test. The following instrumentation is usually included in most test campaigns. A pressure reduction system consisting of a selection of calibrated orifices is available to reduce the sample line pressure to near ambient where most of instrumentation needs to work. This is designed to handle only the small ram pressures associated with sampling at high power conditions, not those expected from sampling directly from combustors. Normally the sample line flow is allowed to increase so that the pressure can be dropped across the probe tip orifice. In cases where this is not practical, our pressure reduction system can be employed.

Condensation Particle Counters (CPC) (TSI 3022 and 3025) are used to measure total particle concentration. Particle size distributions are measured with Differential Mobility Spectrometers (DMS) (Cambustion DMS500) and Differential Mobility Analyzers (DMA) (TSI 3071). The DMA uses a single channel which is swept through different sizes over time, and the newer multi-channel electrometer-based instrument, DMS500, measures a full set of sizes simultaneously. We employ two of the new and fast instruments which run in parallel, one being downstream of a thermal denuder. This allows both the total and non-volatile components of the aerosol to be measured simultaneously. This combination of information can be used to characterize the aerosol's volatility, assess the sampling train for anomalous particle generation and to characterize plume processing of the emission aerosol size distribution. The new fast response instruments allow for much shorter engine run times in order to complete the measurements, and the characterization of transients in the emissions, e.g. those during throttle changes. The older, slower sizing instrument is normally run in parallel with the faster ones in order to accomplish a quality check on the data, and to allow measurements to be made in the case of very clean engines where the signal (particle concentration) is insufficient for the newer instruments. These fast mobility instruments also yield total particle concentration measurements which complements those from the CPC. The DMS500 instruments cover a broad size range, from 5 nm up to 1  $\mu\text{m}$ . A laser particle counter (LPC) is used for size distribution measurements in the large size regime, diameter > 0.5  $\mu\text{m}$ . Hence there is a region of overlap between the DMS500 and LPC. Typically gas turbine engines produce little emissions in the LPC's size range.

The exhaust aerosol's hydration behavior is characterized using the deliquescence technique with a Deliquescence DMA (DDMA). The aerosol is subjected to a high relative humidity, below but near 100%, and its size distribution is re-measured using the DMA technique. Their change in size due to humidity change can be used to determine their critical supersaturation and their soluble mass fraction, i.e. their response to water vapor. This is an important parameter which strongly influences their behavior in the atmosphere. Normally if their soluble mass fraction is zero at engine exit, it is too hot for soluble material to form. However at only 30 to 50m of plume processing, soluble material can be detected. An electrostatic precipitator is used to collect aerosol samples on an electron microscope grid for subsequent off-line single particle analysis. This can be used for morphological information using TEM (Transmission Electronic Microscopy).  $\text{CO}_2$  concentration is measured in an undiluted sample line and also in the

diluted sample line, which is used for particle characterization. CO<sub>2</sub> is chemically inert and its emission index for jet fuel is well known. The CO<sub>2</sub> measurement allows an accurate measure of the dilution of the sample, which is necessary for corrections of the data to probe tip concentration values, and can be used to evaluate emission index values for the particle data. A weather station is used to get ambient wind, temperature, and pressure data near the test site. These parameters can influence engine performance and the probability that the exhaust plume reaches downstream sampling probes.

Two other features of the UMR mobile laboratory greatly facilitate successfully accomplishing emissions testing at the diverse range of available venues. A diesel powered electrical generator (60 kW) is available to provide electricity for instruments, lights, air conditioning, etc. In many situations ground supplied electric power is not available, or would be prohibitively expensive. An elaborate communications system is available to handle voice communications between instrument operators within our trailer, test directors in our trailer or external, and colleagues in other instrumented trailers and vans from other institutions. Data acquisition and running the test engine must be coordinated, and this is actually a complicated problem requiring a sophisticated communications system. The trailers and instrumentation need to be relatively close to the engine under test, and engines are very noisy. The communications system must handle both voice communications and noise suppression. Hardware was acquired and software developed to allow digital communications between the large number of computers involved the test campaign. This includes UMR computers and those of colleagues and test managers collaborating in a test campaign. In many cases a few real-time plots can communicate more than many minutes of voice information.

### **2.7.1 DMS500**

The DMS500 instrument is a new device which depends on electrical mobility for particle sizing (Biskos et al. 2005), and has been used primarily for investigation of fast changing spectra such as diesel engine emissions, drug delivery systems such as inhalers, and roadside ambient aerosol sampling. In this instrument the aerosol sample is passed through a cyclone separator to remove particles larger than 1  $\mu\text{m}$ . It is then given a known charge distribution using a corona charger. The aerosol is then charged, inserted into a clean laminar flow air stream, and subjected to an electric field which deflects (in a size dependent manner) the particles' trajectories toward electrometer rings. The currents resulting from the charge transported to the electrometer rings by the particles are measured and the current-electrometer data matrix is converted into particle number and size classification. Since the various electrometer currents are measured simultaneously rather than sequentially, the measurement is fast, up to 10 Hz.

## 2.7.2 PM parameters

The characterization of the exhaust aerosol is accomplished using the following parameter set.

(1) The size distribution is described by a differential concentration function  $N(D_p)$ , dependent on particle diameter ( $D_p$ ), which specifies the concentration of particles,  $dn$ , having the logarithm of their diameters between  $\log D_p$  and  $\log D_p + d \log D_p$  to be  $N * d \log D_p$ . The logarithmic scale is used since aerosol diameter covers such a large size range.

$$dn = N * d \log D_p \quad (\text{Eq. 3})$$

(2) Number-based geometric mean diameter ( $D_{geom}$ ), defined by the equation

$$\log D_{geom} = \frac{1}{n_0} \int_0^{\infty} \log D_p * dn = \frac{1}{n_0} \int_0^{\infty} \log D_p * N * d \log D_p \quad (\text{Eq. 4})$$

where  $n_0$  denotes the total particle concentration,

$$n_0 = \int_0^{\infty} N * d \log D_p \quad (\text{Eq. 5})$$

(3) Geometric standard deviation ( $\sigma_g$ ), defined by

$$\log \sigma_g = \left( \frac{\int_0^{\infty} \left( \log \left( \frac{D_p}{D_{geom}} \right) \right)^2 N d \log D_p}{n_0 - 1} \right)^{1/2} \quad (\text{Eq. 6})$$

(4) Mass-based geometric mean diameter ( $D_{geomM}$ ), defined by

$$\log D_{geomM} = \frac{1}{\int_0^{\infty} D_p^3 * N * d \log D_p} \int_0^{\infty} \log D_p * D_p^3 * N * d \log D_p \quad (\text{Eq. 7})$$

(5) Number based emission index ( $EIn$ ), the number of particles per kilogram fuel burned can be calculated by

$$EIn = EI_{CO_2} \frac{N_0}{M(CO_2)} \quad (\text{Eq. 8})$$

where  $EI_{CO_2}$  denotes the mass emission index of  $CO_2$  (for aircraft engines  $EI_{CO_2} = 3160$  g/kg; (Schulte and Schlager (1996)).  $M(CO_2)$ , the mass of  $CO_2$  per volume exhaust sample, is calculated by multiplying measured  $CO_2$  mixing ratios with  $(44/29)\rho_{air}$ , where  $\rho_{air}$  is the air density and 44/29 is the molar mass ratio of  $CO_2$  and air. Strictly speaking, in Eq. 8 both  $N_0$  and  $M(CO_2)$  have to be values above ambient, i.e. enhancements over the background signal. However, for measurements close to the engine exit plane of gas turbine engines, the background signals are negligibly small.

(6) Mass-based emission index (EIm) is the mass of particles per kilogram fuel burned and its calculation is analogous to that for EIn and is given by

$$EIm = EI_{CO_2} \frac{M(N_0)}{M(CO_2)} \quad (\text{Eq. 9})$$

where  $M(N_0)$  is the mass of aerosol per unit volume of exhaust sample.

### 2.7.3 Line loss characterization

Modification of the aerosol size spectrum due to line loss is an artifact associated with extractive sampling which must be accounted for with calibration experiments. Inertial, thermophoretic, and diffusional effects contribute to the loss of particles in the sampling train. The penetration of particles through a sampling system is size dependent. While it is harder to experimentally quantify losses due to thermophoretic effects, inertial and diffusional losses can be handled by calibration and accounted for in the data reduction. The source aerosol used in line calibration studies must be stable and free of any volatile compounds and moisture as these have a tendency to induce nucleation and interact with soot particles hence altering the size distribution within the sample lines. It is preferable for it to be a combustion source since the sampling train is used to transport combustion aerosols. The source aerosol must also have a sufficient population in the size regime of interest for gas turbine emissions ( $\sim 8\text{-}200\text{nm}$ ). The sampling system design should minimize line length and aerosol transit time. Bends, flow meters, and valves in the sampling train should be avoided where possible, as these typically involve substantial loss.

UMR has performed a number of such line loss calibration experiments to characterize the loss of particles in the sampling train for previous field campaigns. In these experiments, a poly-dispersed combustion aerosol generated from diesel truck exhaust – a surrogate for a gas turbine engine is used as the calibration source. Lack of availability of a gas turbine engine and the costs associated with running such an engine make it impractical to use in this type of calibration experiment. The DMS500 is used to obtain the penetration as a function of size. It provided distinct advantages for such calibration measurements. With the DMS500, a poly-dispersed source could be employed to provide fast simultaneous size dependent losses for particle diameters ranging from 5 to 1000 nm.

The concentration of the poly-dispersed aerosol is measured with the DMS500 at two locations for the sampling train: the probe tip and the end of the sampling train. The ratio of the concentration of aerosol at the end of the sampling train to the concentration at the probe tip provided the penetration factor (Pen) for the selected aerosol size. This experiment is repeated a number of times for different aerosol sizes (20-300nm). A function is fitted to the experimentally obtained data and this function is then used to correct all particulate data for line loss.

#### **2.7.4 Soluble Mass Fraction**


The evolution of combustion particles in the atmosphere is strongly influenced by their ability to interact with water vapor. This characteristic was investigated with a deliquescence technique (Alofs, 1978; Alofs and Trueblood, 1981; Li et al., 1992), where a tandem DMA with an intermediate saturator was used to measure the particles' dry and wet diameters.

The UMR Deliquescence apparatus (DDMA) is designed to determine the fraction of soluble mass in the average aerosol particle of a given, predetermined dry size. It utilizes two differential mobility analyzers (DMA) with a humidifier in between them. The first DMA selects a narrow band of diameters and passes these particles on to a region of precisely controlled, high relative humidity or water saturation ratio (typically SR=0.93). If these aerosol particles contain any soluble mass, then they will take on liquid water, i.e., they will deliquesce or grow to some new equilibrium diameter. This new equilibrium diameter is a function of the dry diameter, the saturation ratio in the humidifier, and the fraction of soluble mass in the particle. The deliquesced aerosol then passes through the second DMA (the sheath air for this DMA is also brought to SR = 0.93). Here a computer controlled size sweep is performed and the wet diameter is obtained. As stated earlier, knowledge of the dry diameter, the saturation ratio, and the wet diameter is sufficient to determine the Soluble Mass Fraction (SMF) for that aerosol.

SMF increases with distance from engine exit plane as the time allowed for the aerosol particle to scavenge soluble species like  $H_2SO_4$  increases. The average aerosol particle contains essentially no soluble material if captured by the probe at the engine exit plane, since the sample is diluted while it is still very hot, i.e., chemical reactions are quenched.

#### **2.8 UCR Methodology**


UCR's role in the JETS APEX2 project was to sample and dissect the jet exhaust, measuring all hydrocarbon species from  $C_1$  to  $C_{30+}$  and speciating the particulate matter (PM) into important constituents like elemental and organic carbon, ions, elements, etc. A further requirement was that UCR had to make these measurements for each of the modes while the aircraft engine followed the modified EPA LTO sequence that was used for the testing in JETS APEX2 (Figure 14). UMR and ARI had successfully used this test sequence in earlier tests.

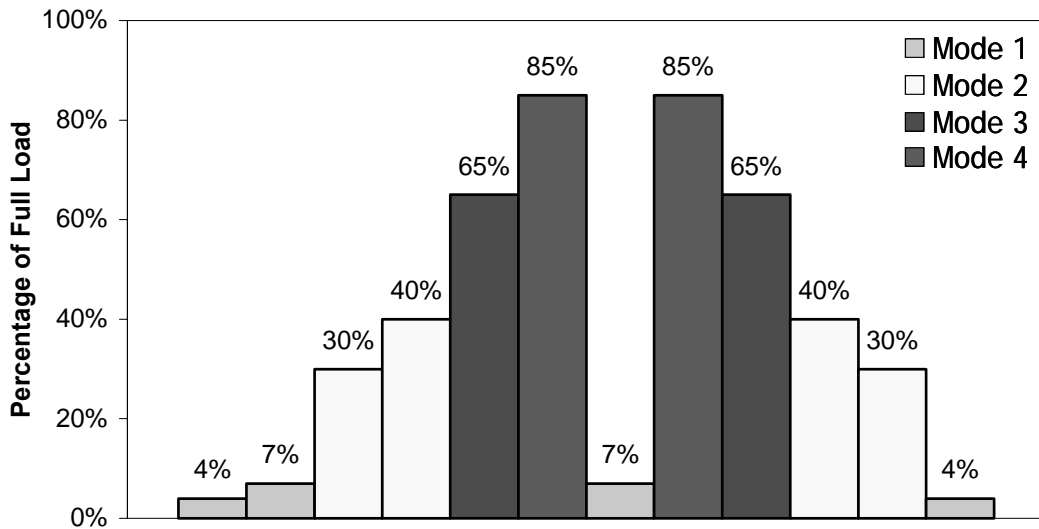

**Figure 14: Modified EPA Landing Take-Off (LTO) Sequence Used for Testing.**

### 2.8.1 UCR Design and Fabrication of Sampler for JETS APEX2

UCR participated in APEX1 with the goal of learning about the sampling requirements for measuring speciated emissions in jet exhaust. The schematic of the UCR sampler is shown in Figure 15 and the design basically followed the principles used to measure speciated hydrocarbon and PM emissions in diesel exhaust (Cocker, 2004). UCR was limited to a total flow of 20 liters per minute and to capture the maximum molecules we opted for an undiluted stream.

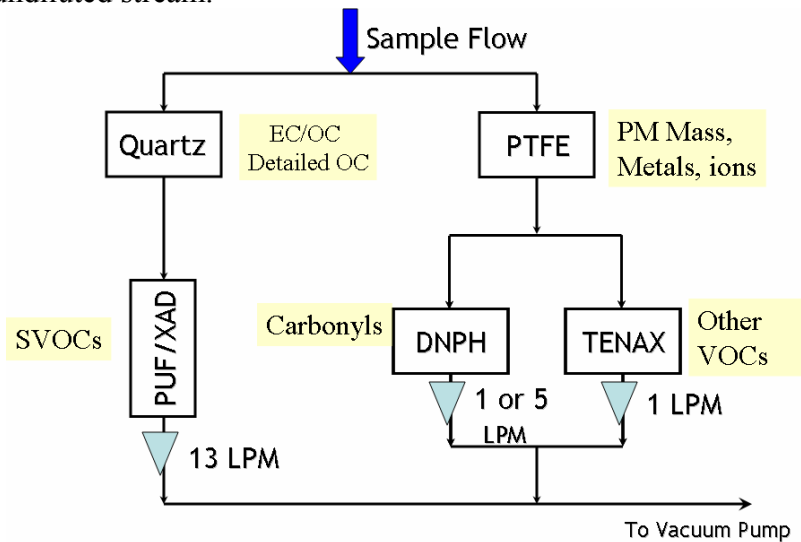

**Figure 15: Schematic of UCR's Sampling System for APEX1**



Based on UCR participation in APEX1, a number of lessons were learned that were germane to the sampler which UCR needed for JETS APEX2. Specifically:

- Sampling/analysis methods worked but were too slow for the modal switching required in JETS APEX2
- Need many more molecules than were collected in APEX1 for analyses to stay above the analytical minimum detection limit
  - Sample volume should be increased by 10-200 times
  - Need undiluted lines
  - Need sample classifier to keep debris from reaching filters
- Needed accurate flow measurements

UCR's sampler in APEX1 worked well but clearly was not suited for the JETS APEX2 project. The first challenge for UCR was to design, build and verify a sampler that would extract sufficient number of molecules to allow analysis above the instrument analytical limits while following the modal operating cycle specified for JETS APEX2 (Figure 14). UCR decided the highest probability of collecting enough molecules, especially at the lowest power, was if the sampler design combined the samples from the 4% and 7% power and the 30% and 40% power. Modes 3 and 4 were at a single power, 65% and 85% respectively where the PM loading was expected to be the highest. In addition to these changes, UCR wanted to avoid the transitions between loads so sampling commenced 15 seconds at each engine mode after stable operation was announced and stopped 15 seconds prior to switching to the next load. Sampling was not conducted during transitions between modes. Other than the 2 minutes at the 85% load, each mode lasted about 10 minutes with the exact time being recorded in the log books as well as electronically. Thus the UCR sampler design was designed for four modes of operation.


**Table 7: Design of the Modal Cycles for the UCR Sampler for JETS APEX2**

Mode 1	Roughly 40 minutes at the 4 and 7% power levels
Mode 2	Roughly 40 minutes at the 30 and 40% power levels
Mode 3	Roughly 20 minutes at the 65% power level
Mode 4	Roughly 4 minutes at the 85% power level

In addition to collecting samples at four modes, UCR's sampler needed to be a high volume extractive system with rapid and automatic switching between the specified engine operating modes and the flow rates needed to be monitored, an improvement over the APEX1 sampler. The final design called for critical flow orifices to control flow rates through all systems. Thermocouples and absolute pressure gauges were added so flow rates could be corrected. With the exception of the Summa Canisters, all flows were operated under choked conditions (outlet pressure  $\ll 0.52 * \text{inlet pressure}$ ). On the C<sub>4</sub>-C<sub>12</sub> line (TDS tube line) and DNPH line, flows were also metered as differential pressure through a laminar flow element. Summa canisters were filled through a small orifice to lower the sampling rate, but absolute flow was not controlled since concentrations were measured on a volume concentration basis.


The final design followed the schematic shown in Figure 16, included numerous mechanical elements and a computer system to operate the switching valves, monitor the

temperature and pressure of the critical flow elements and log the real time flow data. Flow from the sampling probes at the aircraft engine was carried by four 3/8-inch heated lines so the raw exhaust flow could be as high as 200 liters per minute. The final flow determination depended on the diameter, length and geometry of the setup in the field.

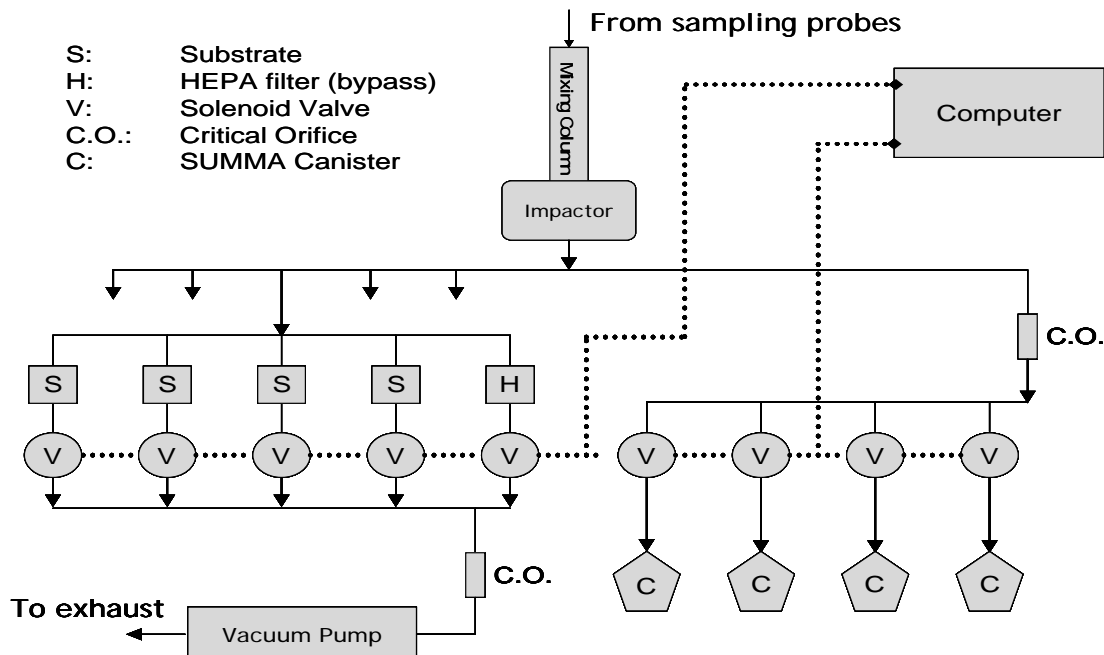

**Figure 16: Schematic of sampling setup. “S” setup represents DNPH, TDS, quartz, PUF/quartz, and PTFE (see below for details). Solid lines represent physical flow; dotted lines represent logical control.**

Further quality assurance was built into the flow design as each critical flow element (CFO) had both temperature and pressure continuously monitored and displayed on the computer screen to indicate if any CFO failed to meet the desired specifications during the field testing. In addition, the design included laminar flow elements on the low flow lines that continuously monitored flow rates into the sampling manifolds of the carbonyls and thermal desorption tubes. Taken in total, we believed adequate redundancies were designed into the system to ensure accurate flow rates were maintained during the sampling.

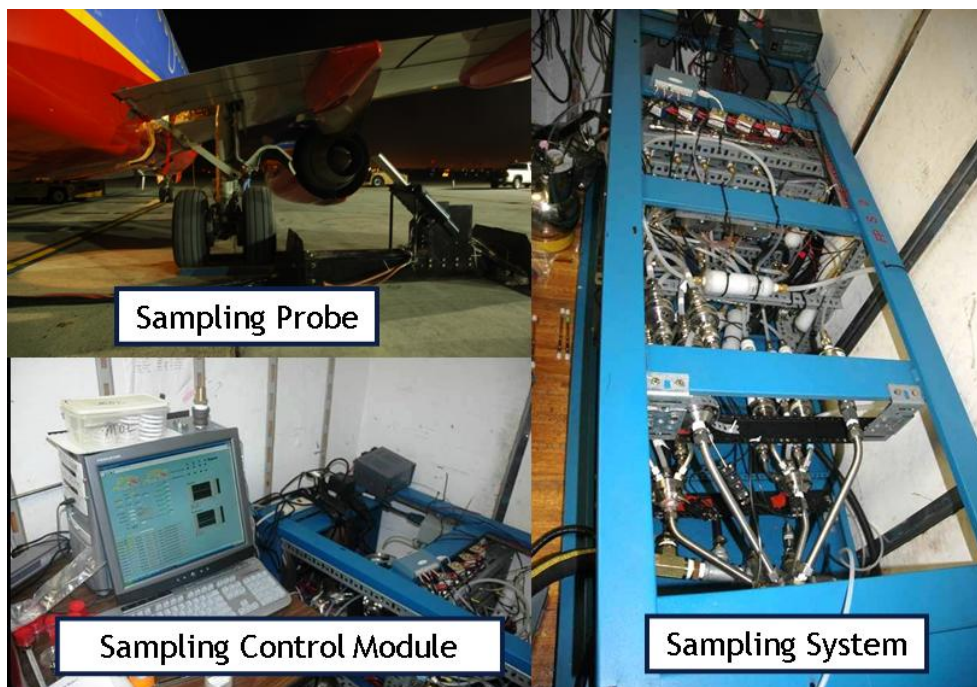

**Figure 17: Figure Showing UCR Sampler Constructed for JETS APEX2**

### **2.8.2 Measurement of Mass, Metals and Ions**

Teflo filters were used to acquire PM mass, metals and ions concentrations. The filter weighting procedure follows the guidelines of the Code of Federal Regulations (CFR) (40 CFR 86). Briefly, total PM were collected on Pall Gelman (Ann Arbor, MI) 47 mm Teflo filters and weighed using a Cahn (Madison, WI) C-35 microbalance. Before and after collection, the filters were conditioned for 24 hours in an environmentally controlled room (RH = 40%,  $T = 25^{\circ}\text{C}$ ) and weighed daily until two consecutive weight measurements were within  $3\ \mu\text{g}$ . The Teflo filters were subsequently analyzed for metals using XRF method as per EPA IO-3 at the SCAQMD. Finally, the filters were extracted with HPLC water and alcohol and analyzed for ions (ammonium, sulfate, chloride and nitrate) using a Dionex DX-120 ion chromatograph.

### **2.8.3 Measurement of Elemental and Organic Carbon (EC-OC)**

PM samples were collected on 2500 QAT-UP Tissuquartz Pall (Ann Arbor, MI) 47 mm filters that were preconditioned at  $600^{\circ}\text{C}$  for 5 h. A  $1.5\ \text{cm}^2$  punch is cut out from the quartz filter and analyzed with a Sunset Laboratory (Forest Grove, OR) Thermal/Optical Carbon Aerosol Analyzer according to the NIOSH 5040 reference method (NIOSH 1996).

## 2.8.4 Speciation of C<sub>1</sub> to C<sub>30</sub> Hydrocarbons

Because a comprehensive speciation of hydrocarbons was required for this project and there are hundreds of organic species in jet engine exhaust, the sampling system was tailored to match the desired deliverables. Table 8 lists details of the analysis method used. Note an important design feature was the redundancy in measurements. For example, the C<sub>4</sub> to C<sub>6</sub> hydrocarbons were sampled in both the SUMMA canister and the thermal desorption tubes. Further heavier molecules like naphthalene were measured in the thermal desorption tubes and the quartz/PUF/XAD channels.

**Table 8: Hydrocarbon Speciation: Sampling and Analyses Methods**

Chemical Group	Sampling Media	Instrument	Method
C <sub>1</sub> -C <sub>8</sub>	SUMMA Canister	GC-MS	SCAQMD
C <sub>4</sub> -C <sub>12</sub>	Thermal desorption tubes	GC-FID	SAE 930142HP
Aldehydes and Ketones	DNPH	HPLC/UV-VIS	SAE 930142HP
C <sub>10</sub> -C <sub>30</sub> , inc PAHs	Quartz/PUF	GC-MS	EPA TO-13A
Polynuclear Aromatic Hydrocarbons	Quartz	GC-MS	EPA TO-13A

## 2.8.5 Speciation of C<sub>1</sub> to C<sub>12</sub> Hydrocarbons, including BTEX & Carbonyls

Traditional air monitoring methods for very-volatile and volatile organic compounds (VVOC/VOC) are not sufficiently sensitive enough to measure the low levels of most compounds found in an exhaust from a lean burn engine, like a turbine. Accordingly, most of the sampling in this work made use of selective adsorbents for concentrating the molecules of interest after the exhaust gas was passed through the Teflon filter. After collection, the columns were returned to the laboratory where the adsorbed molecules were flashed into a concentrator/reservoir at low temperature and then controllably vaporized into a gas chromatograph with either a field ionization detector (GC/FID) or a mass spectrometer detector (GC/MS).

Molecules starting about C<sub>4</sub> (butadiene) through C<sub>12</sub> were collected and concentrated on an adsorbent column composed with a multi-bed carbon bed including molecular sieve, activated charcoal, and carbotrap resin, each adsorbent with a specific selectivity towards certain boiling ranges or polarity. The adsorbent material first contacted in the column adsorbs the most volatile compounds and the remaining compounds will adsorb sequentially in relation to their volatility. The GC sample injection, column, and operating condition are set up according to the specifications of SAE 930142HP Method-2 for C<sub>4</sub>-C<sub>12</sub> hydrocarbons.

Carbonyls were collected on 2,4-dinitrophenylhydrazine (DNPH) coated silica cartridges (Waters Corp., Milford, MA) after the Teflon filter. A critical flow orifice was used to

control the 1.0 LPM flow through the cartridge at the JETS APEX2 site to ensure the volume of exhaust sampled through the DNPH cartridge for formaldehyde was within the mass recommended by Waters. Sampled cartridges are extracted using 5 mL of acetonitrile and injected into an Agilent high performance liquid chromatograph (HPLC) equipped with an SPD-10AV UV-vis detector. The HPLC sample injection, column, and operating conditions are set up according to the specifications of the SAE 930142HP protocol (Siegel et al. 1993).

### **2.8.6 Speciation C<sub>10</sub> to C<sub>30</sub> Hydrocarbons, including Naphthalene and PAHs**

Jet exhaust flows through a quartz filter and into a column packed with polyurethane foam (PUF)/XAD-4 resin. A portion of the quartz filter was used to analyze for the elemental and organic carbon. Both the PUF/XAD-4 cartridge and the remainder of quartz filter was extracted with methylene chloride and analyzed using a modified method EPA TO13A protocol (GC-MS analysis) to determine total emission rates for naphthalene, PAHs, etc. Details on the analysis method are found elsewhere (Shah et al. 2004).

### **2.8.7 Detection Limits for the Organic Compounds**

#### **2.8.7.1 Calculating the Emissions Index**

Typically, aircraft exhaust characterization is reported as Emission Index. The calculation of Emission Index from the mass sampled of a compound is given by:

$$EI (g/kg) = EI(g / kg) = \frac{Mass\_X(\mu g)}{Mass\_CO_2(kg)} * 3160(g\_CO_2 / kg\_fuel) * 10^{-6} \quad (\text{Eq. 10})$$

where, EI = Emission Index, and X = Compound being analyzed

#### **2.8.7.2 Lower Detection Limits**

Each of the analytical methods has lower detection limits specific to the method and equipment used. For this work, the lower detection limits per sample are listed in Table 9 below.

**Table 9: Lower Detection limits for Organic Compounds analyzed**

<b>Organic Compounds</b>	<b>Instrument</b>	<b>Method</b>	<b>Lower Detection Limit</b>
PAH and Alkanes	Agilent 6890N GC-5973N MS	EPA TO-13A	0.01 ng
C4 – C12	Agilent 5890 GC - FID	SAE 930142HP	2 pico moles C
Carbonyls	Agilent HPLC	SAE 930142HP	0.02 µg
EC OC	Sunset Labs Thermo/Optical Carbon Analyzer	NIOSH Method 5040	20 µgC
PM	Cahn Microbalance	40 CFR 86	20 µg

The Lower Detection Limits (LDL) in terms of EI units, (g/kg), would be different for each compound and each mode of each plane. For example, the lower detection limit for particulate matter or elemental carbon and naphthalene for each mode in terms of EI is presented in following table.

**Table 10 : Lower Detection Limit for PM, EC, OC and Naphthalene**

<b>Aircraft</b>	<b>Mode</b>	<b>LDL (g/kg fuel)</b>	
		<b>PM/EC</b>	<b>Naphthalene</b>
N435WN	Mode1	0.00223	3.68E-08
	Mode2	0.00151	2.69E-08
	Mode3	0.00206	3.26E-08
	Mode4	0.00849	1.44E-08
N353SW	Mode1	0.00070	1.39E-08
	Mode2	0.00070	1.49E-08
	Mode3	0.00127	2.27E-08
	Mode4	0.00476	9.09E-08
N695SW	Mode1	0.00108	2.17E-08
	Mode2	0.00118	2.39E-08
	Mode3	0.00209	3.52E-08
	Mode4	0.00613	1.21E-07
N429WN	Mode1	0.00051	1.05E-08
	Mode2	0.00072	1.55E-08
	Mode3	0.00114	2.02E-08
	Mode4	0.00406	8.30E-08

### 2.8.8 Exploratory Measurements for hexavalent chromium and dioxin

As a last minute inclusion in the final test matrix, we added the sampling of exhaust onto appropriate media for the measurement of hexavalent chromium and dioxin. The rationale was there were no known measurements reported in the literature. Further, the alloys used for the combustor section in the turbine often have high amounts of nickel and chromium contents. For example, GE reported that some of the materials used for the combustor section in the turbine might include: HastelloyX, MAR-M-509, HS188 and Rene' N5.

- HastelloyX is about 47% Ni, 22% Cr, 19% Fe, 9% Mo and ~1% Co, C, Mn, Si, and W.
- HS188 is about 22% Ni, 22% Cr, and 39% Co and 3% Fe.
- MarM509 is mostly Co with about 20% Cr, and N5 is mostly Ni with about 7% Cr

As noted above, these alloys are high in chromium and nickel. In any case, these measurements were regarded as exploratory in nature and designed to provide insight as to whether further investigations were warranted for these compounds.

A sample of raw exhaust was extracted from the portside of the subject aircraft and conveyed through a 75 foot by 3/8-inch stainless line to the filter heated to 300°F. Once the extracted sample reached the measurement bench, it was divided into two streams with a “tee.” The sample portion that flowed directly through the “tee” was dedicated for the analysis of the hexavalent chromium and the sample portion at right angles to this flow was for the dioxin analysis. Each leg had a vacuum pump and critical flow orifice rated at 30 liters per minute. In addition, we included a condensing section before the pump so condensing water would not reach the operating pump.

The measurement for hexavalent chromium in the jet exhaust followed a method in which exhaust gases flowed through a pretreated cellulose fiber filter that was subsequently analyzed using an ion chromatography method of the South Coast Air Quality Management District Method for chrome-VI.

The 47mm treated filters were mounted in Gelman holders and the times recorded for the period of sampling at the 30 liters per minute. A number of preliminary trials were undertaken of the hexavalent chromium system in addition to the sampling of the aircraft exhaust. The test matrix included collecting two samples of ambient air drawn through the sampling system for one and eight hours. These samples served as verification that the system could measure values normally found for ambient air. Collection of samples with jet engine exhaust were started before the aircraft was in place and continued until the engines were shut down and we could go outside and turn the power off the pumps. The filter was removed and returned to the Petri dish, sealed with Teflon tape and stored with the quartz filters in a refrigerator until sent for analysis.

Dioxin sampling followed a modified EPA Method 23. This method is applicable to the determination of emissions of polychlorinated dibenzo-p-dioxins (PCDD's) and polychlorinated dibenzofurans (PCDF's) from stationary sources. In principle, a sample is

withdrawn from the gas stream, transferred in a heated line, cooled and collected on a packed column of adsorbent material. The sample cannot be separated into a particle and vapor fraction. The PCDD's and PCDF's are extracted from the sample, separated by high resolution gas chromatography (HRGC), and measured by high resolution mass spectrometry (HRMS).

Glassware with the spiked XAD resin was prepared and analyzed by Frontier Analytical Laboratory and Alta Analytical Laboratory, Inc. (Sacramento). Each firm provided two sample trains in appropriate sealed and chilled containers for a total of four sampling trains. Since the plan called for two different aircraft engines to be tested twice, the sample trains were split so that each firm tested one different engine rather than run duplicate samples. With only four sample trains, we decided to check each engine rather than be concerned with the repeatability of the measurements.



### **3.0 Results**

It is a basic premise of this study and other similar studies to argue that if the engine gas phase combustion emissions and performance parameters were representative, then it would be assumed that likewise, the PM emissions were also representative. To address this issue, the engine manufacturer, GEAE, provided on-site and post-test analyses of the gas phase combustion emissions and performance parameters for all engines studied. The details of these analyses are summarized in Appendix F. Based on the results presented in Appendix F, the following conclusion pertaining to representativeness was provided by GEAE: “Trends in engine core speed, EGT and fuel flow data are generally consistent with expectations. The only apparent indication of performance deterioration was on the left engine of N695SW.”

### **3.1 Real-time Chemical Speciation (ARI)**


#### **3.1.1 Gas Phase Speciation**

The gas phase pollutant species produced by aircraft gas turbine engines fall into two classes: oxides of nitrogen and products of incomplete combustion. The oxides of nitrogen are produced, not by reactions central to fuel hydrocarbon combustion, but primarily through interaction of combustion radical species with nitrogen in the combustion air. These nitrogen oxides are dominated by NO and NO<sub>2</sub>, although small amounts of HONO have been quantified and bounds determined in previous aviation emission campaigns (Wormhoudt et al., 2007).

The products of incomplete combustion include carbon monoxide (CO) and unburned/partially combusted hydrocarbons (UHCs). While the regulatory requirement specifies that a flame ionization detector (FID) be used to quantify the total UHCs in sum, a more detailed measurement approach was taken in JETS APEX2. Based on prior measurements of hydrocarbon speciation of aviation gas turbine exhausts (Spicer et al. 1994), individual hydrocarbon species were selected for measurement with the TILDAS and PTR-MS instruments. This allowed for a more detailed determination of the emitted hydrocarbons, but direct comparison to the regulatory FID is complicated by both 1) potentially significant contributions from individual species omitted from the selected TILDAS and PTR-MS species and 2) for the non-uniform response of the FID to individual hydrocarbon species. However, based on previous measurements and intercomparisons (Yelvington et al. 2007), a majority of the gaseous hydrocarbons emitted are accounted for by the combination of TILDAS and PTR-MS measurements reported here.

Carbon monoxide emissions are presented in Figure 18. The emissions data are presented as emission index (EI) in grams of CO emitted per kilogram of fuel burned. As discussed above, the analysis procedure uses the measured CO<sub>2</sub> and the known fuel composition to calculate the CO EI. The CO EIs are highest at the lowest power settings, and decrease


rapidly as the power is increased above idle and taxi powers. The EIs decrease to a lower limit at the highest powers, which is a few percent of the high levels seen at idle (note that the abscissa is plotted logarithmically in this figure). All seven engines tested follow the same trend. The regulatory data for the three engine types are also included in the figure (diamond symbols, ICAO database). The -3B1 and -7B22 the JETS APEX2 data fall below the regulatory data.

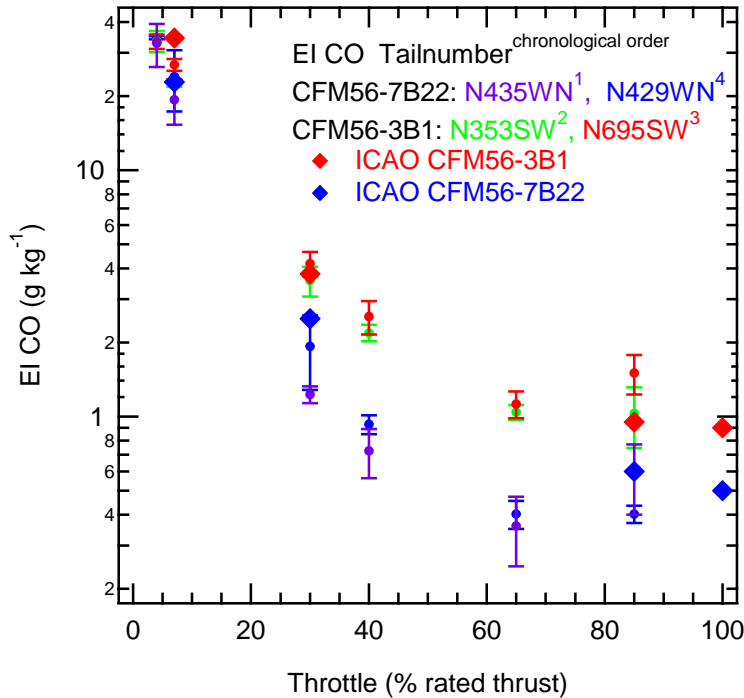

**Figure 18: The logarithm of carbon monoxide (CO) emission index (EI) is plotted against the nominal thrust setting for the seven engines measured. The ICAO data points for the three engine types are plotted as diamond symbols.**

While there is significant variability in the CO data when plotting against nominal engine power condition, much of that variability can be reduced by accounting for changing ambient conditions and plotting versus engine fuel flow rate (Wey et al. 2006; Yelvington et al. 2007). Even if fuel flow data and ambient temperatures were available to collapse this scatter, it is clear that the -3B1 and, especially, the -7B22 JETS APEX2 data fall significantly below the ICAO data points for CO emissions.


Nitrogen oxide emissions data are presented in Figure 19. Here the sum of NO and NO<sub>2</sub> EIs are plotted, both using a mass basis of NO<sub>2</sub> for calculating the EI so that these two emissions can be summed directly. NO<sub>x</sub> has the opposite trend as CO, increasing with increasing powers from low numbers at idle to high EIs at take-off thrust.

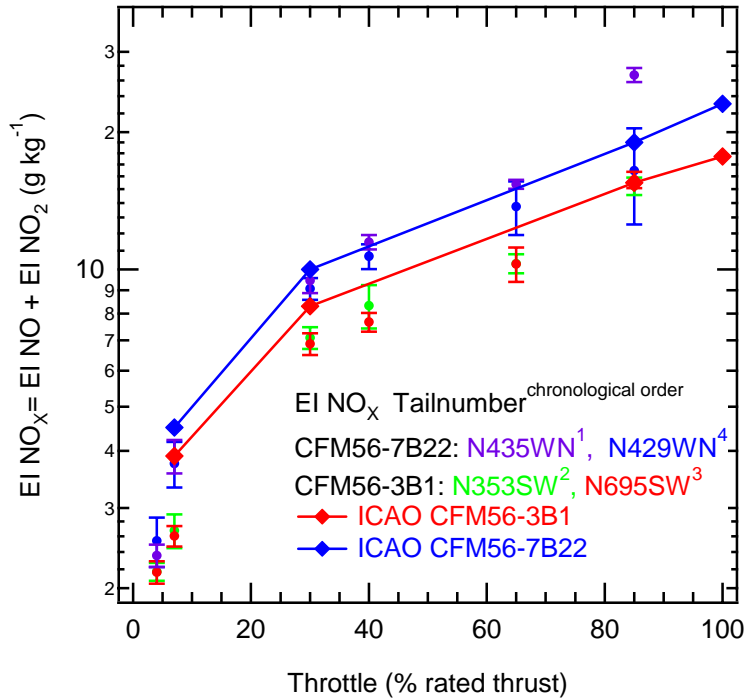

**Figure 19: NO<sub>x</sub> EIs in g NO<sub>2</sub>/kg fuel, plotted versus nominal engine thrust setting for the three engine types (seven engines total) that were tested.**


Also plotted in the figure are the ICAO NO<sub>x</sub> EI data points. Like the CO data, there is good agreement between the ICAO and JETS APEX2 NO<sub>x</sub> measurements. In contradistinction to the CO data, the NO<sub>x</sub> emissions are greatest for the -7B22, and lowest for the 3B1. This order is replicated in both the ICAO data and in the JETS APEX2 measured data. As for the CO data, some reduction in scatter might be achieved if the engine fuel flow data were used, in combination with the ambient temperature, to collapse those variations.

Formaldehyde (HCHO) EIs are plotted versus the logarithm of engine power setting in Figure 20. The panel on the left is labeled according to engine type, while the right panel is labeled by measurement location. For both plotting schemes, the decreasing trend in HCHO emissions with increasing engine power dominates the emissions behavior. The significant scatter in the data, especially at idle engine powers (< 10% of rated thrust) is understood to be dependent on variations in engine operating condition due to changes in ambient conditions (Wey et al. 2006; Yelvington et al. 2007), and may be collapsed using fuel flow data. The differences between the engine types are modest, and even agree well with the CFM56-2C1 measured in the APEX1 mission (Yelvington et al. 2007).

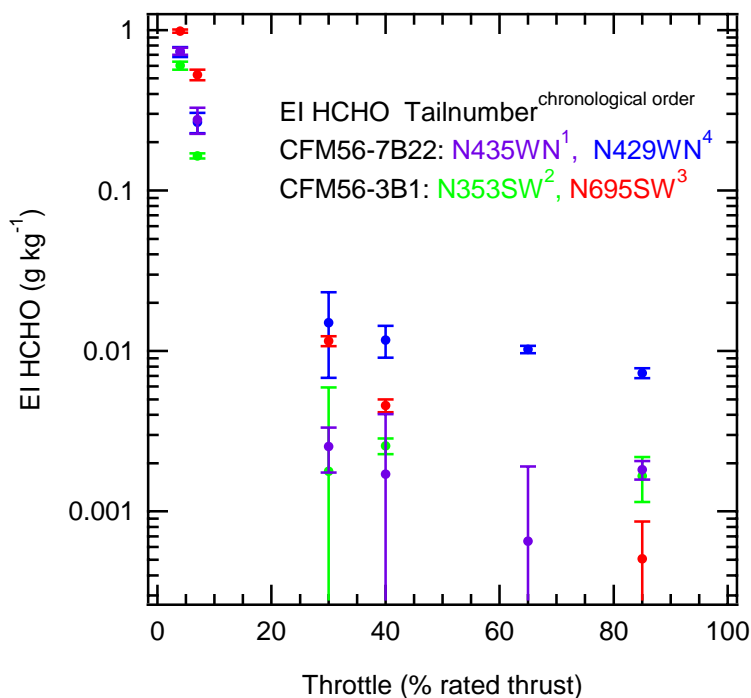


**Figure 20: Formaldehyde (HCHO) is plotted versus the logarithm of the nominal engine thrust setting for all engines tested. The engine variability due to fluctuations in ambient conditions is greater than the engine-to-engine differences or to variations due to the downstream measurement locations.**

Formaldehyde is one of the highest concentration hydrocarbons in the exhaust and can be measured quite accurately with good time response with the TILDAS system deployed in JETS APEX2. As seen in APEX1 (Knighton et al. 2007; Yelvington et al. 2007), HCHO may be a good indicator for UHC emissions more generally, and this will be further explored with the current set of data. Additional hydrocarbon measurements are presented in the next series of figures, all of which demonstrate the same decreasing trend with increasing engine power. In Table 11, the ratio of HC to HCHO is presented for a number of HC measurements. These ratios were derived from the slope of the graphs of individual hydrocarbons plotted vs. HCHO. This ratio is an appropriate quantity since all of the HC species exhibit the same trend vs. engine power. The PTR-MS technique uses a mass spectrometric analysis of the HC species, and as such species of identical masses may not be individually resolved. Thus, butanes and acrolein are both measured at the mass-to-charge ratio ( $m/z$ ) of 57, and acetone, propanal, and glyoxal are measured as  $m/z$ 59 as presented in Table 11. The C-5 substituted benzenes are measured at  $m/z$ 149.

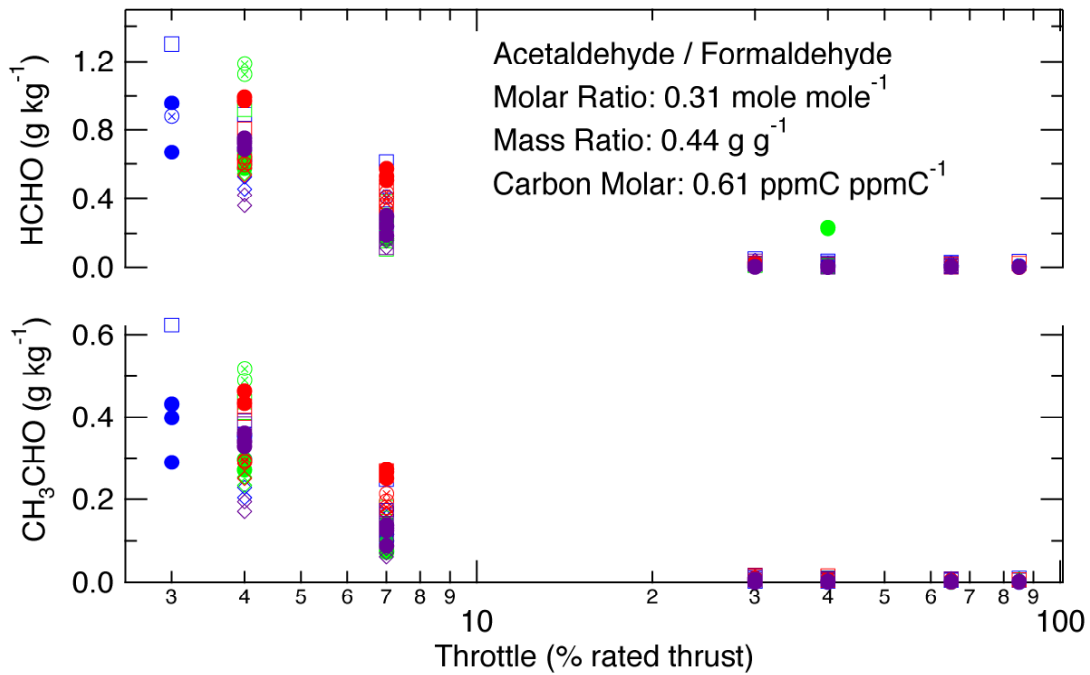

**Figure 21: Acetaldehyde (CH<sub>3</sub>CHO, lower panel) EI is plotted versus the logarithm of engine power, displaying the same trend as HCHO (upper panel).**

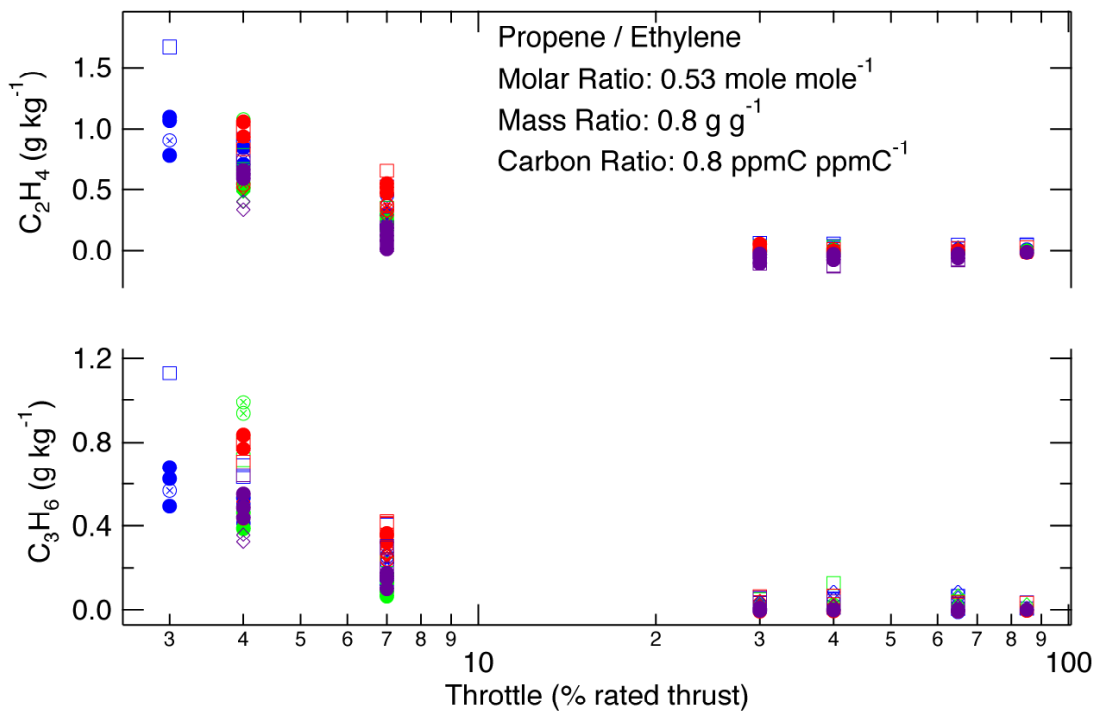

**Figure 22: Ethylene (C<sub>2</sub>H<sub>2</sub>, upper panel) and Propene (C<sub>3</sub>H<sub>6</sub>, lower panel) are plotted versus the logarithm of engine power, displaying the same trend as HCHO.**


**Table 11: HCHO Ratios**

	Ratio of HC "X" to HCHO					
	N435WN	N353SW	N695SW	N429WN	APEX-1	Spicer et al.
methanol	0.12	0.15	0.13	0.12	0.16	NA
acetic acid	0.020	0.018	0.023	0.038	0.040	NA
mz57	0.88	1.25	0.78	0.83	0.16	0.19
mz59	0.09	0.08	0.08	0.08	0.09	0.13
alkenes						
propylene	0.41	0.47	0.43	0.43	0.38	0.27
pentene	0.27	0.28	0.26	0.26	0.23	0.058
hexene	0.12	0.12	0.11	0.12	0.14	0.022
aromatics						
benzene	0.078	0.080	0.060	0.058	0.058	0.055
toluene	0.033	0.033	0.025	0.023	0.023	0.018
C2-Benzenes	0.043	0.044	0.039	0.037	0.030	0.025
C3-Benzenes	0.032	0.032	0.031	0.031	0.025	NA
C4-Benzenes	0.019	0.018	0.017	0.019	0.013	0.005
Phenol	0.025	0.024	0.022	0.018	0.028	0.005
Styrene	0.011	0.012	0.010	0.009	0.008	0.008
mz149	0.010	0.008	0.008	0.009	0.005	0.005
Naphthalenes						
normal-	0.008	0.008	0.008	0.009	0.006	0.011
methyl-	0.005	0.005	0.005	0.006	0.003	0.008
dimethyl-	0.002	0.002	0.002	0.003	0.001	NA

In addition to the ratios of the individual hydrocarbons to HCHO, the corresponding ratios are presented for the related APEX1 (Knighton et al. 2007) and similar data taken using different measurement techniques by Spicer et al. (Spicer et al. 1994). Generally very good agreement is observed across all of the data sets. Some of the comparisons with the Spicer data are less close (higher alkenes, C4-benzenes, phenols) and the differences in measurement approach may aid in interpreting the differences. Most importantly, the PTR-MS and TILDAS instruments operate in a continuous flow, few-second-residence-time measurement system, which avoids sample capture and storage prior to measurement that was used in the GC-MS system employed by Spicer et al. These measurement discrepancies with the single idle power condition under which most of Spicer et al. measurements were non-zero should be resolved and may result in a better understanding of chemistry that may occur during sample handling or storage. Most notable, however, is that with the multiple power measurements of the APEX1 studies, a very good correlation of most HCs with formaldehyde provides a useful means of better understanding HC emissions performance of aircraft gas turbine engines. Whether the coefficients in Table 11 depend on engine type (beyond the range of CFM56 models

measured here) or on fuel composition (beyond the range explored in APEX1) remains an important open question to be resolved by further measurement programs.

The HC results presented above provide a useful simplifying framework for understanding HC emissions, suggesting that referencing most HCs to a few primary emissions may be a helpful means of representing the wide range of species that are emitted. However, a contrasting perspective is raised both by some of the discrepancies with the Spicer data, as well as the measurements of formic and acetic acid presented in Figure 23. Neither formic acid nor acetic acid are present at the engine exit plane in significant concentrations (small filled circle symbols), yet are present at the downstream measurement locations with significant scatter, more or less independent of engine power setting. The scatter is most significant at the further downstream location (50 m).

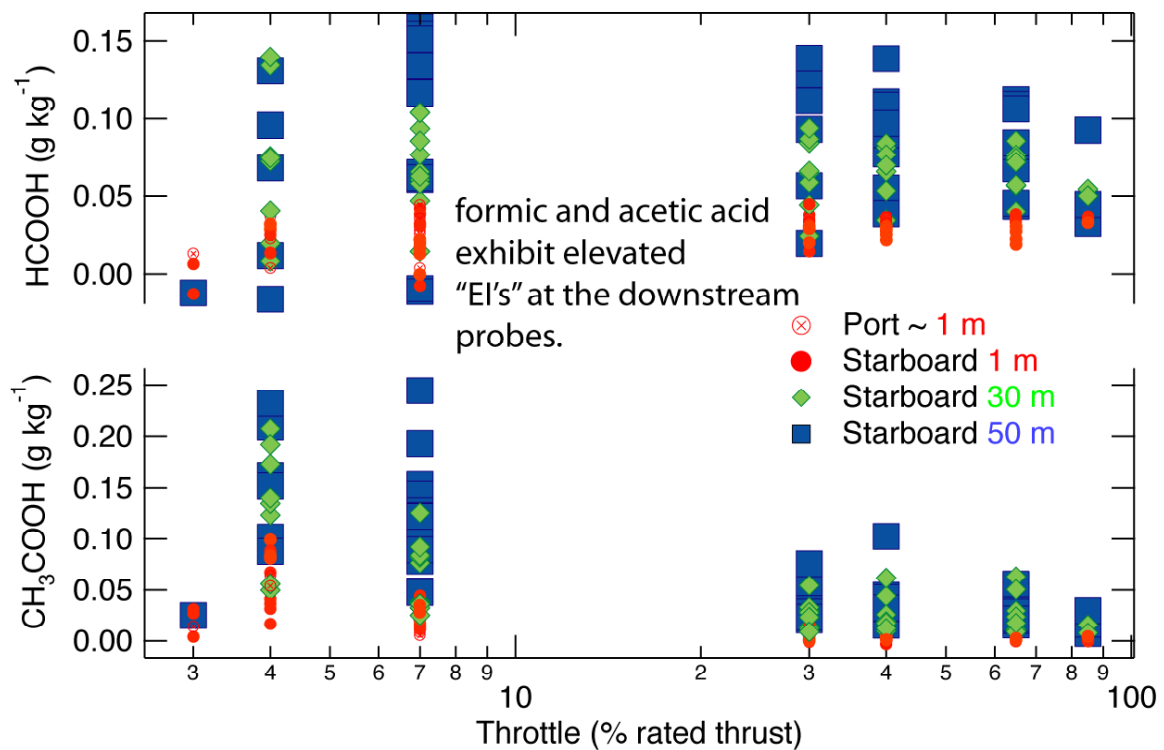

**Figure 23: Formic acid (HCOOH, upper panel) and acetic acid (CH<sub>3</sub>COOH, lower panel) are plotted versus the logarithm of engine power setting.**

Given that the transit time between the engine and the downstream probes is very short (several tenths of seconds), the likelihood is large that these acids are formed in the sampling system. As the measured values are not correlated with engine power, the sampling line history may be determining the measured amount (how long the system had been flowing, temperature of walls, etc.) and contributing to the scatter in the data. These acid data and the discrepancies with the earlier Spicer data for some of the HCs reinforce the concern that sampling and sample handling of reactive HCs must be considered carefully when quantifying the emissions of such species.

### 3.1.2 Particle Speciation

The composition of the particles emitted by aviation gas turbine engines is a complex issue that involves difficult measurement and data interpretation issues. In fact, the nature and composition of the emitted particles are continually evolving and there is not a single physical situation that can be used to uniquely characterize them. There are several states at which the particles are evolving less quickly that can be used as nominal reference points, but even those depend on the precise definition of those conditions and the measurement of those states requires careful sampling and sample handling so that the physical state of the particles is accurately captured.

The initial particle formation occurs in the engine combustor as a byproduct of the combustion process. The carbonaceous soot particles formed in the high temperatures of the combustor are subject to little change themselves after they leave the combustor, pass out of the engine, and mix with the atmosphere. However, condensable gases also are emitted with the soot particles, and these condensable gases contribute both to condensed material on the soot surfaces and to the formation of new volatile particles composed of the condensed species.


The measurement approach taken in JETS APEX2 was to quantify the composition of the particles centers around the Aerosol Mass Spectrometer (AMS), which measures the size resolved composition of volatile species measured by heating the particles to 600° C on a filament. For aviation gas turbine engines, the volatile components consist of sulfate (sulfuric acid) and organics, as will be discussed and quantified below. Notably, no significant nitrate volatile component is evident, even though this is typically a constituent of background aerosol and nitrogen oxides are emitted in the exhaust. Apparently there is insufficient time or oxidative potential for nitrate to condense into the particle phase under the conditions at JETS APEX2.

The AMS only measures the volatile (600°C) components of the particles, so the AMS is complemented by a MAAP instrument to measure the refractory black carbon mass. While the AMS is size resolved, the MAAP is not, so that coordination with particle size distribution measurements is useful for fully characterizing the non-volatile mass contributions. To aid in making comparisons with the other particle measurements, a CPC is also operated in parallel with the AMS and MAAP instruments in the Aerodyne mobile laboratory. All of these data are presented in the following figures.

The black carbon mass measurement quantified by the MAAP is presented in Figure 24. For all the engine types, the black carbon begins at a low value at low powers and increases at higher powers. While generally increasing with power, there is a modest increase in black carbon at the very lowest idle settings for all engines. After the modest decrease from idle, the black carbon continually increases with engine power, with the most rapid increase between 60 and 80% power. This matches the power dependence of the APEX1 data as well. There is some variation among the various engine types, with the -3B1 > -7B22 even though all engines have the same qualitative trends with engine




power, including the small increase at the lowest powers, and the rapid increase between 60 and 80% power.

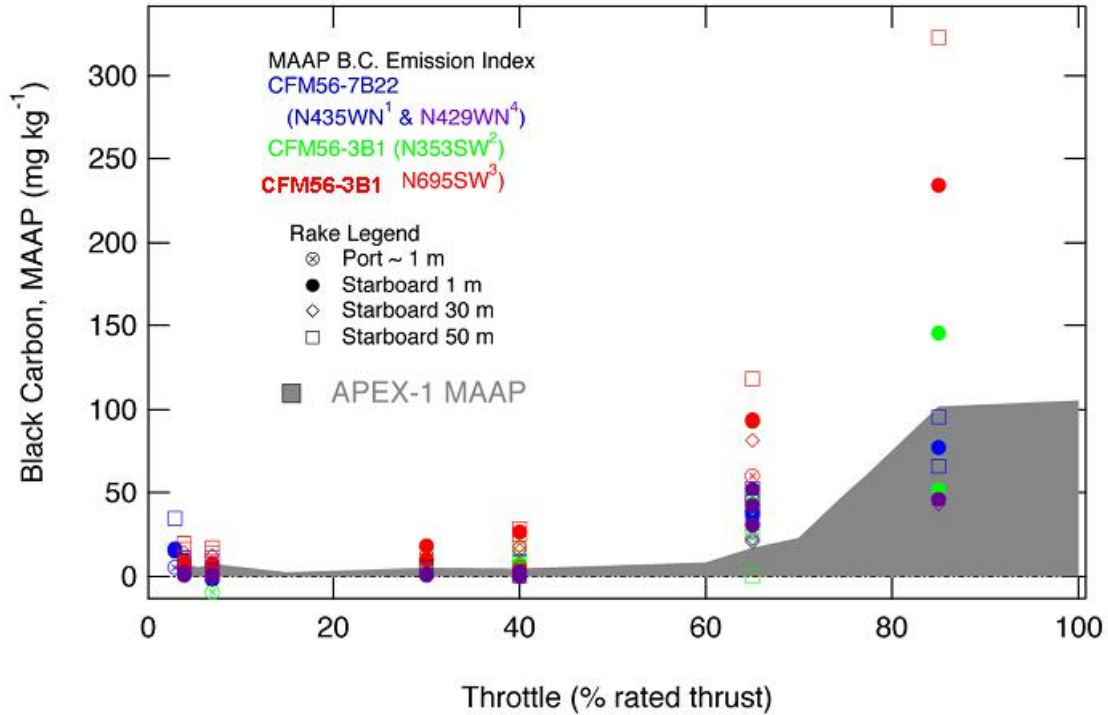

**Figure 24: Black Carbon mass EIs measured with the Multi-Angle Absorption Photometer. The mass EIs are reported in mg/ kg fuel (versus g/kg fuel for the gaseous species measurements).**

The MAAP black carbon measurements are reported as [mg black carbon]/[kg fuel burned], and emission levels range from a few mg/kg fuel at ~30% rated thrust to several hundred at the highest power conditions for the -3B1. Note that this represents a combustion inefficiency of about 0.0005% to 0.002%, and is thus a modest fraction of even the quite small amounts of incomplete combustion emitted from the highly efficient aviation gas turbine engines. It is worth keeping these small levels in mind when considering the even smaller amounts of volatile condensed mass that is measured by the AMS.

The AMS sulfate and organic measurements are presented in Figure 25. The top panel plots the condensed sulfate as mg/kg fuel for all of the engines as measured at the downstream probe locations versus the engine power setting. These data are compared to the APEX1 sulfate measurements. Note that the variations in fuel sulfur level are reflected directly in the corresponding condensed sulfur amounts since more sulfur is available as condensable sulfate as the fuel sulfur rises (Onasch et al., 2007).

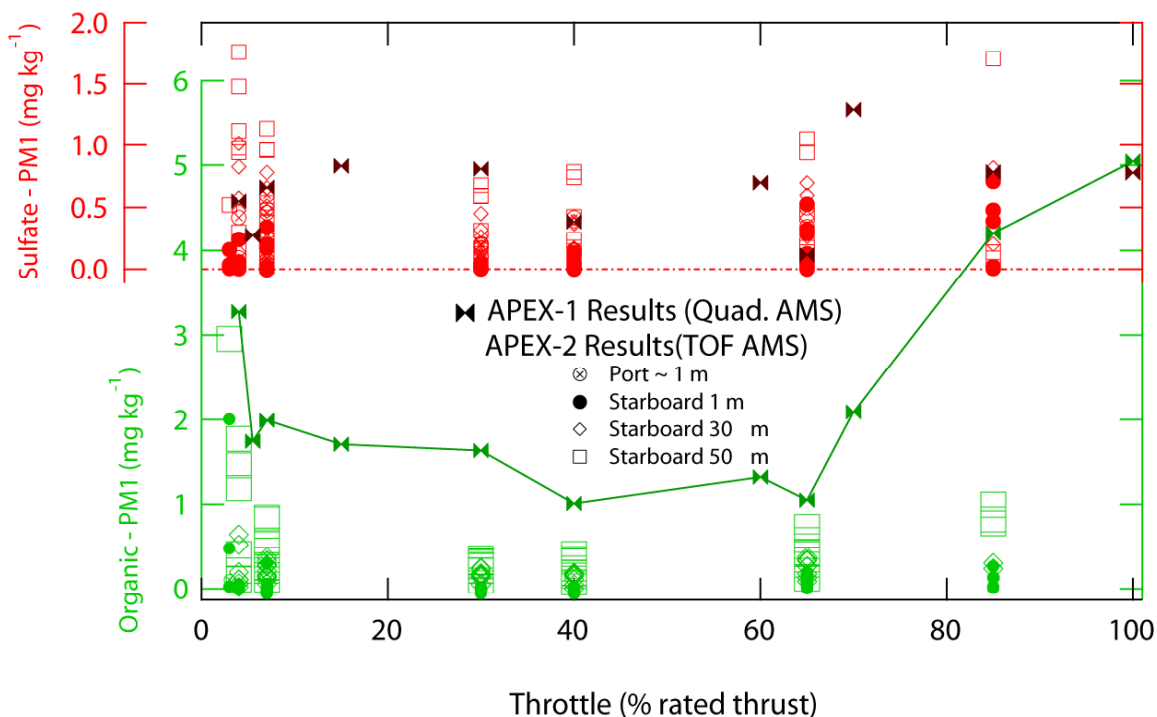

**Figure 25: The condensed mass of sulfate (upper panel) and organic (lower panel) are plotted versus engine power setting. APEX1 data is also included with the bowtie symbol.**

The sulfate measured in JETS APEX2 is broadly independent of engine power, and varies for the different measurement locations, increasing with down stream distance. The furthest downstream distances agree well with the APEX1 (bowtie symbol) 30 m data, indicating that similar levels of condensed sulfate are observed for all of the CFM56 measurements that have been analyzed to date.

The organic data has a maximum at the lowest power conditions, with perhaps a slight increase as the power increases. In the APEX1 data, there was a significant increase at high powers, which is not observed in the JETS APEX2 data. This will require further analysis, and perhaps a reinvestigation of APEX1 data to determine whether the increase in the organic signal at the highest power may have been artifactual in that case.

The mass loadings for both the sulfate and the organic are small compared to that of black carbon, especially at the high engine power conditions. At idle, the locally maximal volatile contributions may approach the black carbon numbers, but otherwise the black carbon dominates the particle mass emitted.


### 3.2 Physical characterization (UMR)

It is clear from the real-time chemical speciation data (see Figures 18, 19) that the engines in this study were generally operating in a representative manner. The variation in emission characteristics from engine to engine is evident. It is possible these variations could be attributed to the time and number of cycles on the engines at the time of testing. However, no conclusive determination can be made based on the data collected since in this study the sample size per engine technology type was extremely small (3 engines per type). The port engine on aircraft tail number: N695SW did exhibit some non-representative behavior. Analysis by GE indicated performance deterioration on this engine especially at high powers and this was reflected in the PM emissions data recorded for this engine. Data on this engine is included in the engine specific plots presented below, but is excluded in the engine type averages presented in the subsequent discussion. It should also be noted that the sample extracted for real-time chemical speciation was also the sample studied for PM characterization. In other words, all PM measurements were made simultaneously on the same sample flows as those gathered for real-time chemical speciation and thus these results are directly comparable. It is important to note that discussions with Southwest Airlines revealed that both engines on N353SW were modified with a Time on Wing upgrade modification that improves the efficiency of the compressor, combustion and turbine sections of the engine and that N695SW did not have this modification on either engine at the time of testing.

PM parameters are presented in the plots below, for both the -3 and -7 engine types as a function of engine power setting at a stable engine test point that for all data points was no less than 90 seconds. The minimum time needed for a size distribution measurement was dictated by (1) the time smear associated with the difference in streamlines created as the sample was transported from probe to instrumentation and by (2) the need to collect a statistically meaningful sample, i.e. sufficient concentration in each size bin. In the JETS APEX2 study, this time was 3.5 seconds. Therefore, a 90 second stable engine test point allowed for at least 25 size distribution samples. These distributions were then averaged and analyzed for each PM parameter. The error bars in each plot represent the uncertainty in the measurement to 1 standard deviation.

### 3.2.1 PM Emission (Total Aerosol) Parameters at 1m Downstream of Exhaust Nozzle


Number-based geometric mean diameter

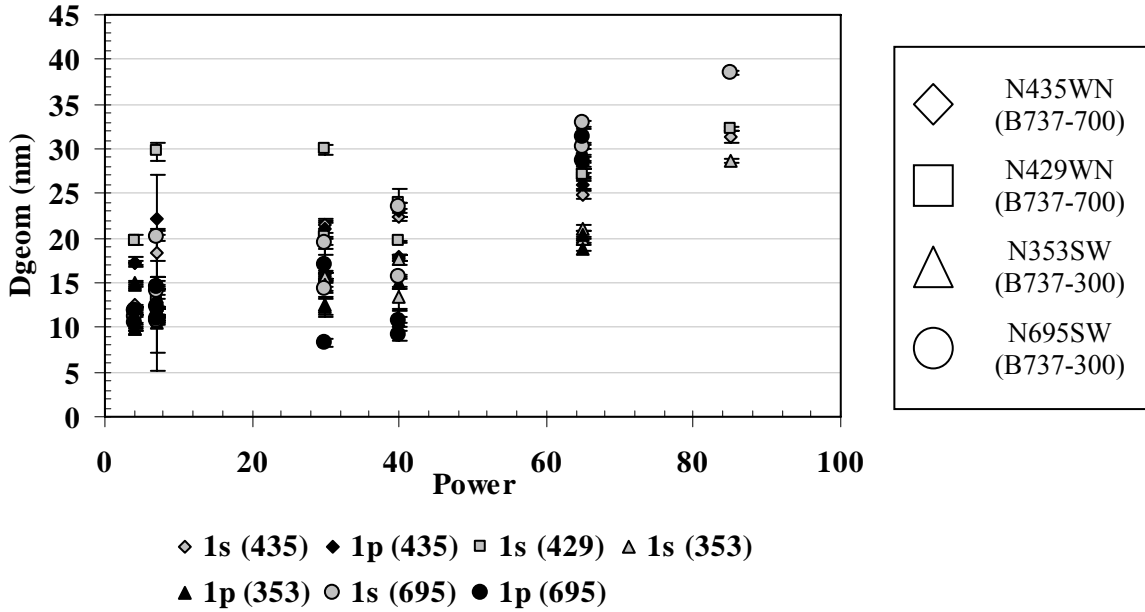

**Figure 26: Number-based geometric mean diameter for total aerosol at 1m as a function of power**

Number-based geometric mean diameter exhibited a trend to increase with power. This trend was independent of engine type. The scatter amongst engine samples was found to be 20-40% with more scatter at low powers. The relatively large deviation associated with the N429WN at low power conditions can be attributed to engine warmup which will be addressed in the Discussion section.


Geometric standard deviation

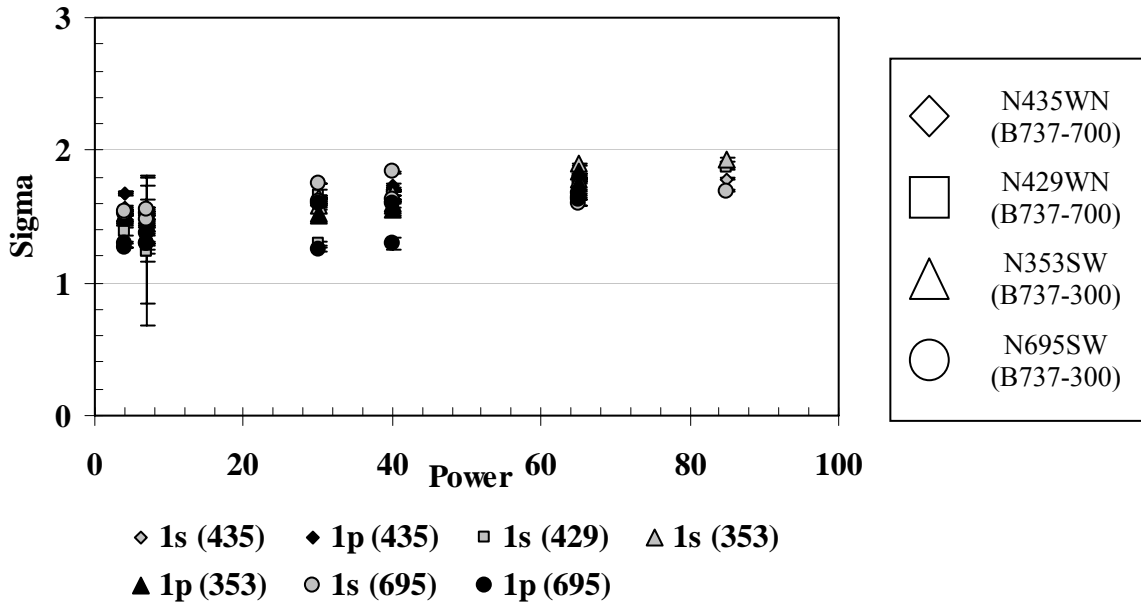

**Figure 27: Geometric standard deviation for total aerosol at 1m as a function of power**

Geometric standard deviation exhibited a weak positive trend with power. This trend was independent of engine type. The scatter amongst engine samples was found to be 1-10% with more scatter at low powers.


Mass-based geometric mean diameter

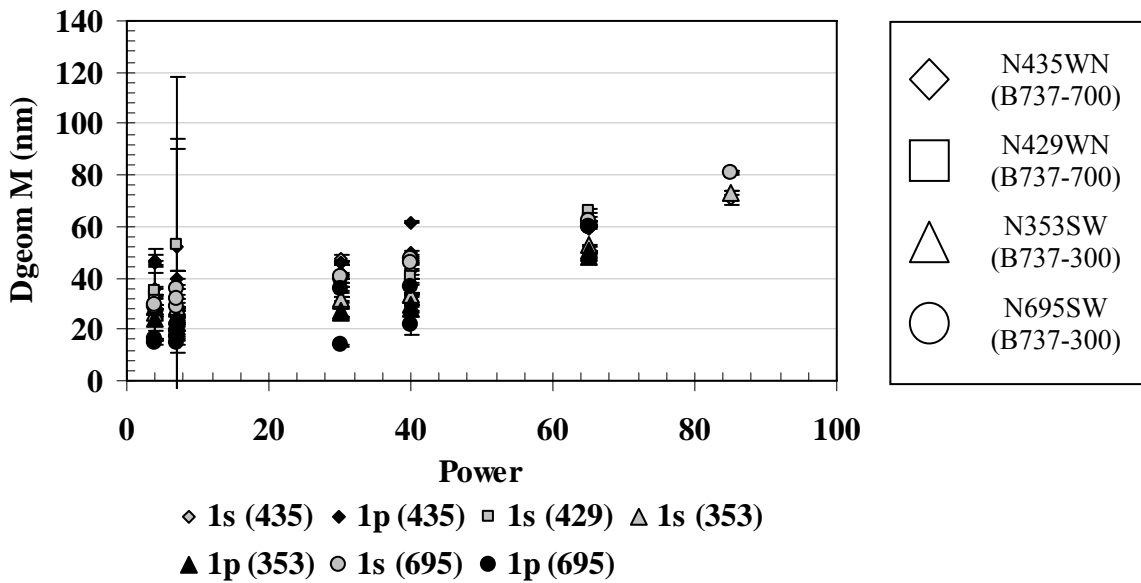

**Figure 28: Mass-based geometric mean diameter for total aerosol at 1m as a function of power**

Mass-based geometric mean diameter exhibited a trend to increase with power as was the case for the number-based geometric mean diameter. This trend was independent of engine type. The scatter amongst engine samples was found to be 5-30% with more scatter at low powers.


Number-based emission index

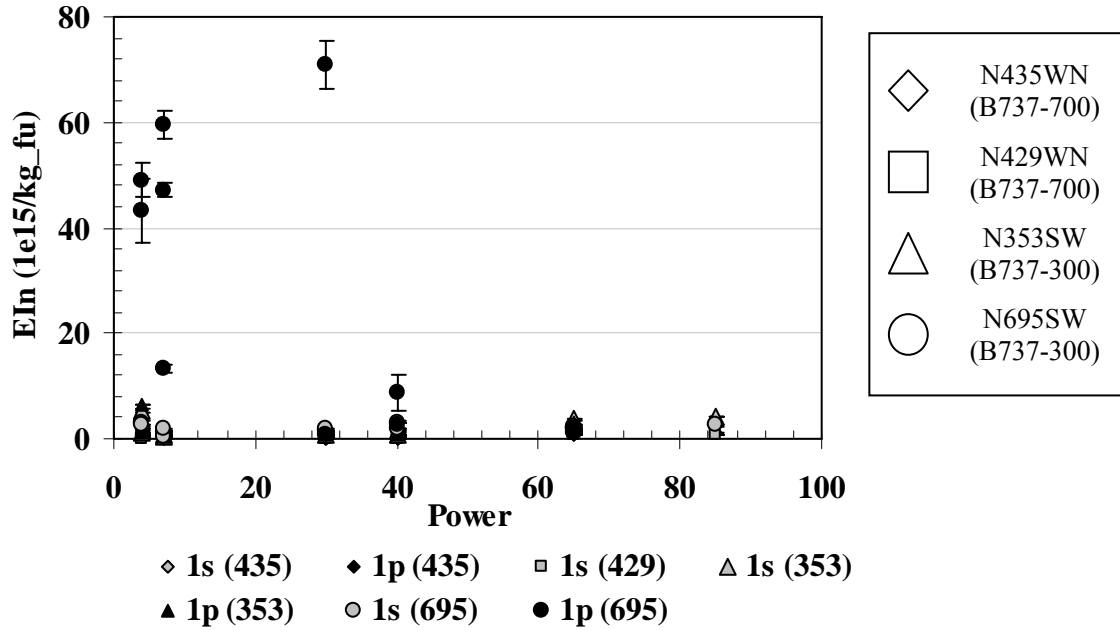

**Figure 29: Number-based emission index for total aerosol at 1m as a function of power**

For each engine a minimum in number-based emission index was observed in the 30-40% power range. Engine to engine variance exceeded that associated with power change for a given engine.

Mass-based emission index

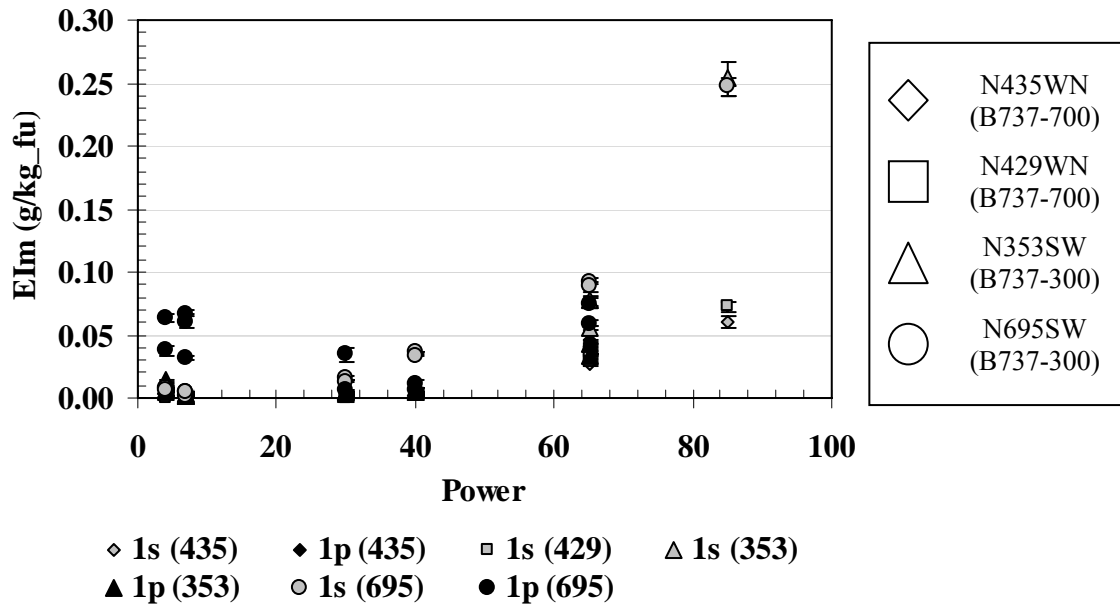


**Figure 30: Mass-based emission index for total aerosol at 1m as a function of power**

Mass-based emission index exhibited a trend to increase with power. The trend is stronger for the older engine technology (-300 series).

### 3.2.2 PM Emission (Total Aerosol) Parameters at 50m Downstream of Exhaust Nozzle

Number-based geometric mean diameter

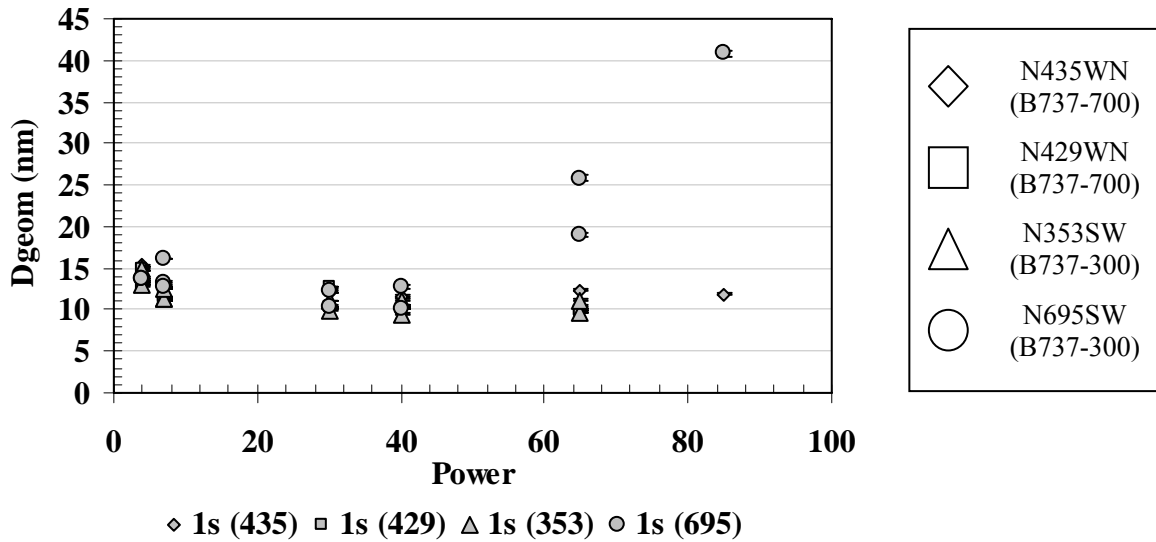


**Figure 31: Number-based geometric mean diameter for total aerosol at 50m as a function of power**

Number-based geometric mean diameter was found to be independent of power for all but one of the engines studied with a mean value of 12.5nm. In the case of N695SW, a positive trend with power was observed, similar to the trend seen at the 1m sampling location. These Dgeom values are significantly lower than those reported for 1m. This difference can be attributed to gas-to-particle conversion creating a large number of small particles in the 50m sample resulting in a shift to smaller Dgeom.




Geometric standard deviation

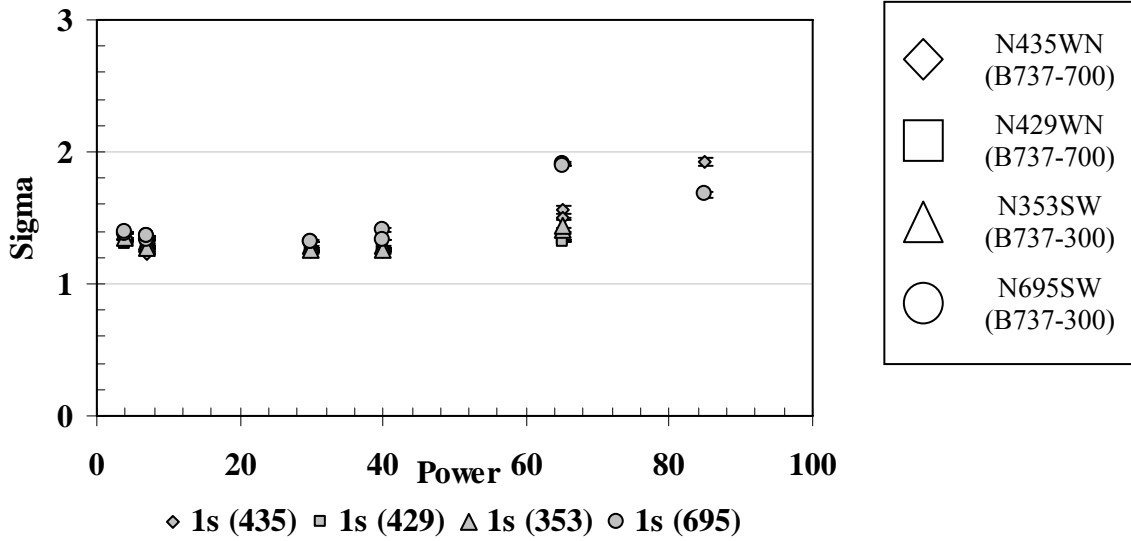

**Figure 32: Geometric standard deviation for total aerosol at 50m as a function of power**

Geometric standard deviation exhibited a weak positive trend with power as was seen at 1m. This trend was also independent of engine type.


Mass-based geometric mean diameter

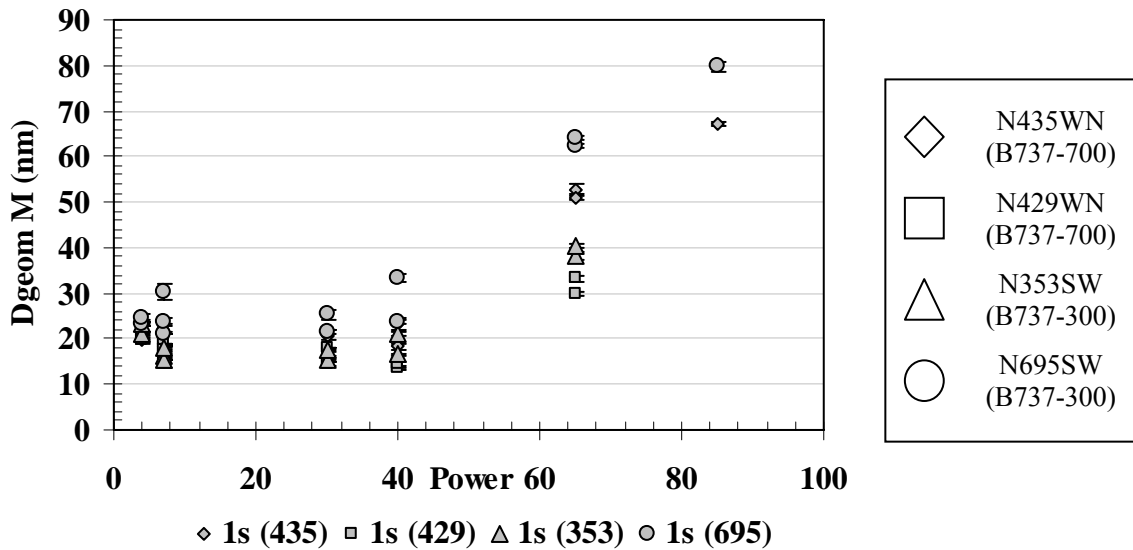

**Figure 33: Mass-based geometric mean diameter for total aerosol at 50m as a function of power**

Mass-based geometric mean diameter exhibited a trend to increase with power. This trend was independent of engine type. Comparison with the 1m data yields no significant differences.


Number-based emission index

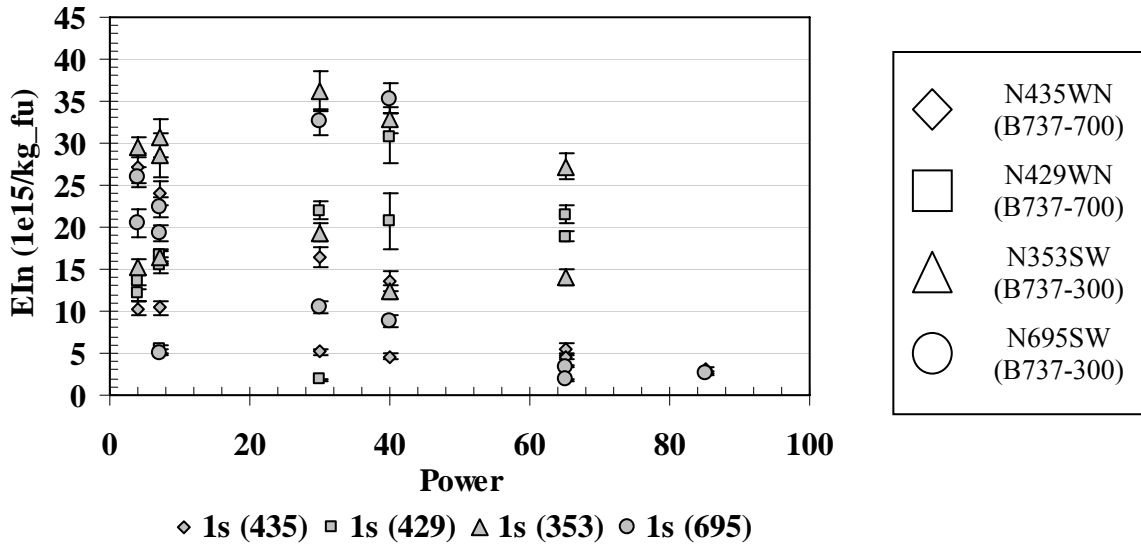

**Figure 34: Number-based emission index for total aerosol at 50m as a function of power**

No apparent trend with power was observed. It is important to note that this average EIn is an order of magnitude larger at 50m than the equivalent average value at 1m.

Mass-based emission index

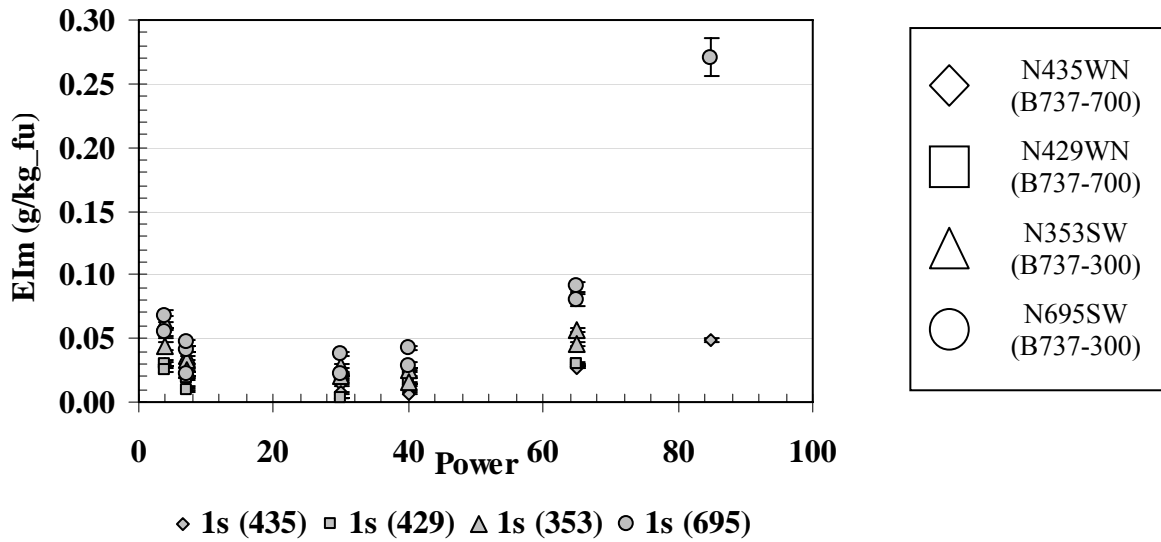


**Figure 35: Mass-based emission index for total aerosol at 50m as a function of power**

Mass-based emission index exhibited a trend to increase with power passing through a minimum in the 30-40% power range. The trend is stronger for the older engine technology (-300 series). As would be anticipated, no statistically significant difference is observed with respect to the 1m Elm data.

### 3.2.3 PM Emission (Non-volatile Aerosol) Parameters at 1m Downstream of Exhaust Nozzle


Number-based geometric mean diameter

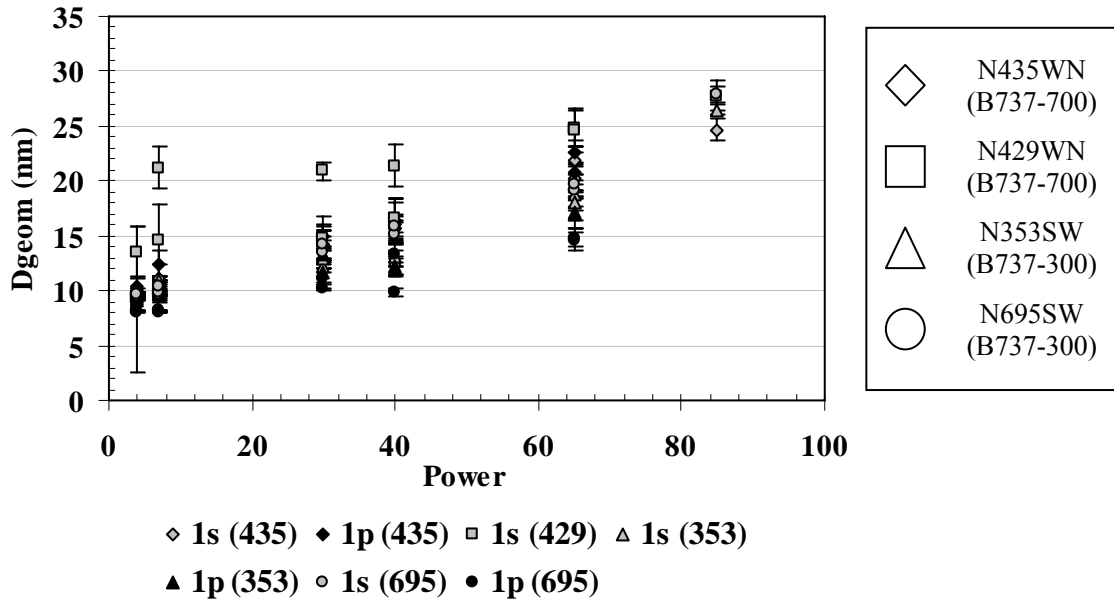

**Figure 36: Dgeom for the non-volatile aerosol at 1m as a function of power**

Number-based geometric mean diameter exhibited a trend to increase with power. This trend was independent of engine type. The relatively large deviation associated with N429WN at low power conditions can be attributed to engine warmup which will be addressed in the Discussion section.


Geometric standard deviation

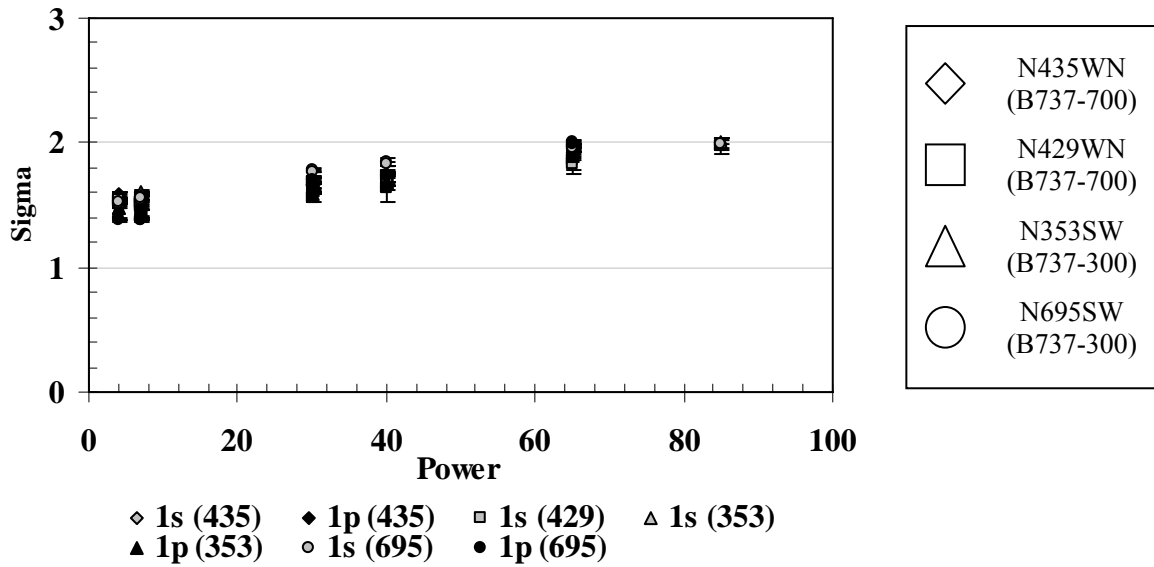

**Figure 37: Sigma for the non-volatile aerosol at 1m as a function of power**

Geometric standard deviation exhibited a weak positive trend with power. This trend was independent of engine type.


Mass-based geometric mean diameter

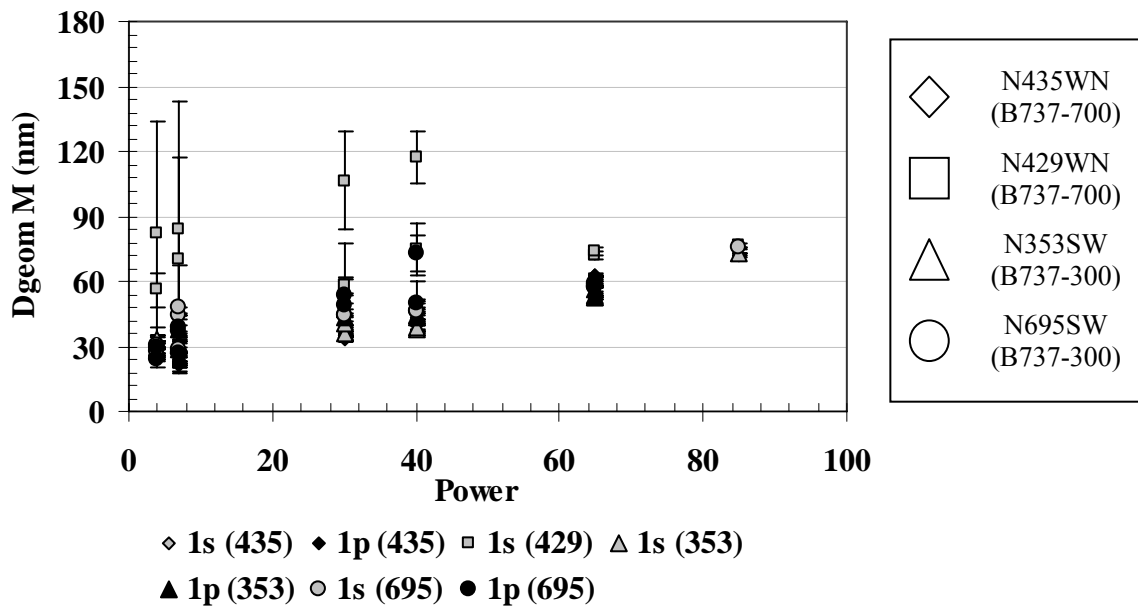

**Figure 38: DgeomM for the non-volatile aerosol at 1m as a function of power**

Mass-based geometric mean diameter exhibited a trend to increase with power as was the case for the number-based geometric mean diameter. This trend was independent of engine type with the exception of N429WN. The relatively large deviation associated with the N429WN at low power conditions can be attributed to engine warmup which will be addressed in the Discussion section.


Number-based emission index

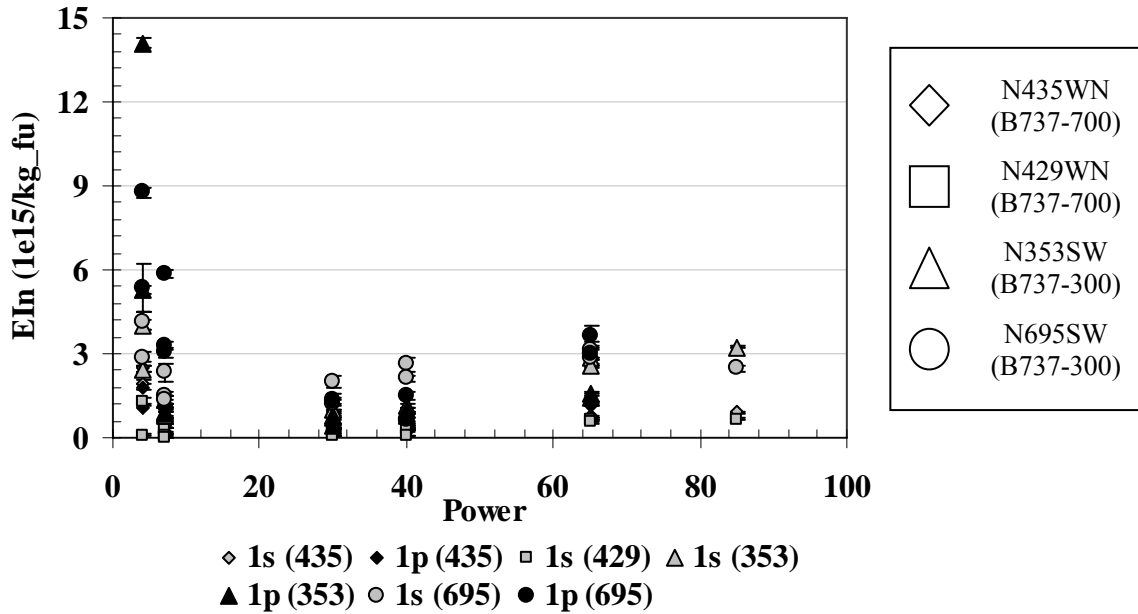

**Figure 39: EIn for the non-volatile aerosol at 1m as a function of power**

For each engine a minimum in number-based emission index was observed in the 30-40% power range. Engine to engine variance exceeded that associated with power change for a given engine.


Mass-based emission index

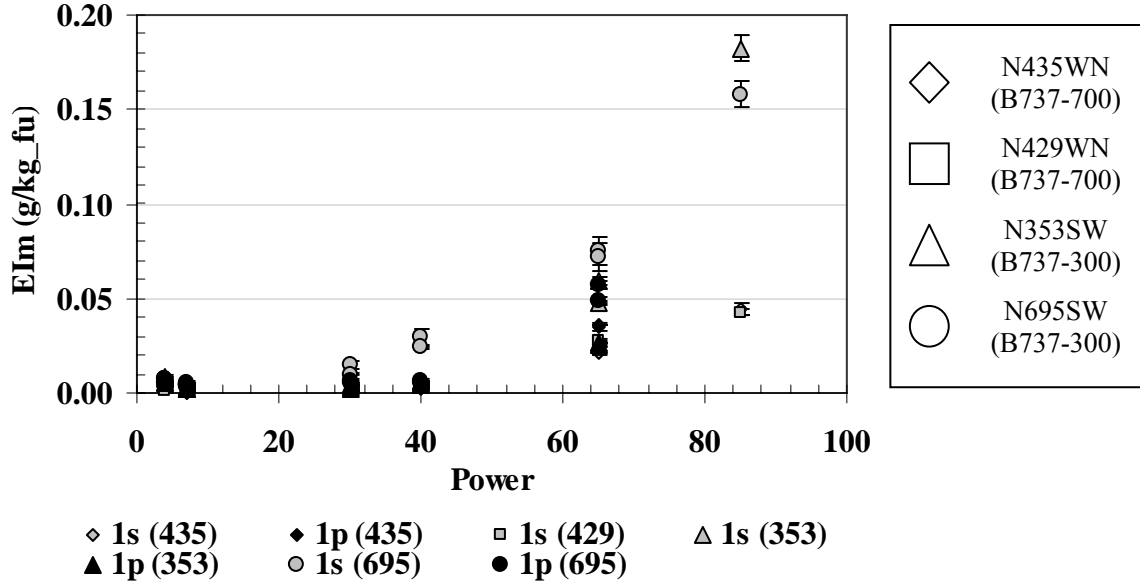

**Figure 40: EIm for the non-volatile aerosol at 1m as a function of power**

Mass-based emission index exhibited a trend to increase with power. The trend is stronger for the older engine technology (-3 series).

3.2.4 Deliquescence Results

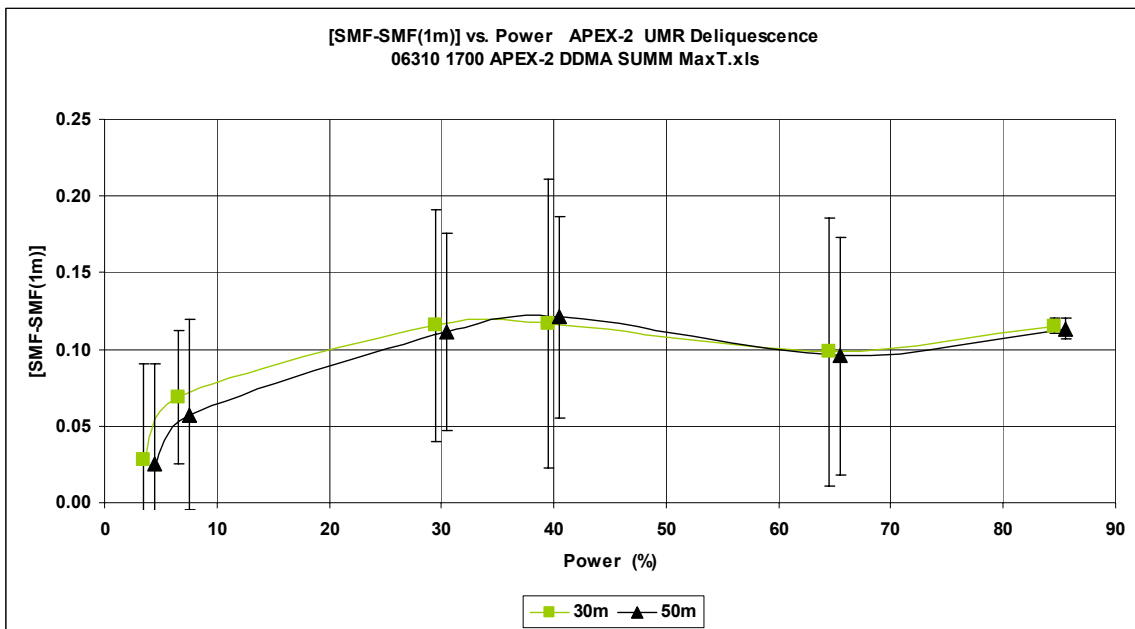

**Figure 41: Results of the deliquescence experiment**

At the 1m location, the Soluble Mass Fraction (SMF) of the aerosol sample was found to be negligible. This result is expected since the exit plane temperature (at 1m) greatly exceeds that of any anticipated soluble material e.g. sulfuric acid. The SMF was found to increase with distance from the engine exit plane reaching ~10% at 50m. No statistically significant variation is observed with engine power.

### **3.3 Total organic gases and aerosol chemical speciation (UCR)**

#### **3.3.1 UCR Results for Mass Flow**

As discussed in the methodology section, UCR's role was to deliver a special sampler and the measurement of speciated hydrocarbons and particulate matter for jet exhaust at each mode. A new sampler was needed for the JETS APEX 2 project since the sampler from APEX1 was not suitable for the test cycle designed for the JETS APEX2 project. Therefore UCR designed, constructed and planned to verify the performance of a custom high volume sampler before the tests at the Oakland Airport. However, ARB funding for the Oakland test was approved on August 9<sup>th</sup> and because the deployment to the field took place on August 20<sup>th</sup>, the approximate two week period after funding was spent purchasing parts, assembly, packaging, troubleshooting, and deploying the instrument. As a consequence of the late contracting and a policy of no pre-awards, neither the flow measurements nor the planned verification of the JETS APEX2 sampling unit against another sampling system, as is usually carried out for a new sampler before a field campaign, were carried out.

Much of the programming for the electronic controls and final leak checks and repairs to the sampler were made at the Oakland airport the day before testing started. As discussed earlier, UCR used a number of methods to ensure that the flows rates in the final sampler matched the planned values. The process started in the field by extensive leak checking of the system under pressure. Identifiable leaks were repaired. For example, the large pipe threads near the impactor required epoxy to seal the leak with subsequent vacuum checks indicating the system was leak tight. Finally, flow in the low flow channels (thermal desorption tube and carbonyl trap line) was verified with a primary flow calibration unit. The high flow rates were only verified when the unit was returned to UCR as there was no standard gauge available in the field.

Table 12 summarizes the calibrated flow rates through the sampling media and for the system. Each flow rate was pressure and temperature corrected for sampling conditions encountered for each engine. Critical flow orifices were used to control flow rates through all systems. With the exception of the Summa Canisters, all flows were operated under choked conditions (outlet pressure  $\ll 0.52 \cdot$  inlet pressure). Thermocouples and absolute pressure gauges were used to correct for pressure and temperature fluctuations in the system. On the C<sub>4</sub>-C<sub>12</sub> line (TDS tube line) and DNPH line, flows were also metered as differential pressure through a laminar flow element. Summa canisters were filled



through a small orifice to lower the sampling rate, but absolute flow was not controlled since measurements are made on a volume concentration basis.

**Table 12: Flow rate in LPM for Different Lines & Plane as a Function of Mode**


Aircraft		Quartz	Teflon	PUF	DNPH*	TDS*	Summa
N435WN	Mode1	69.5	30.2	21.9	0.97	0.17	*
	Mode2	79.2	34.5	23.2	1.16	0.19	*
	Mode3	83.5	36.8	27.9	0.92	0.20	*
	Mode4	92.6	40.9	28.9	1.30	0.20	*
N353SW	Mode1	53.9	36.6	22.0	0.85	0.18	*
	Mode2	59.9	41.2	23.0	0.89	0.19	*
	Mode3	76.0	37.8	25.4	0.98	0.17	*
	Mode4	71.7	47.1	29.6	1.32	0.22	*
N695SW	Mode1	54.7	37.9	22.6	0.98	0.16	*
	Mode2	62.0	41.4	24.4	1.06	0.18	*
	Mode3	67.3	41.3	29.5	1.32	0.21	*
	Mode4	77.4	50.9	30.8	1.48	0.22	*
N429WN	Mode1	53.0	37.5	21.8	0.94	0.17	*
	Mode2	59.5	41.6	23.1	1.15	0.18	*
	Mode3	64.2	40.6	27.5	0.91	0.19	*
	Mode4	76.4	50.9	29.9	1.34	0.19	*

\*Flow directly measured through laminar flow element at inlet to sample manifold.

### 3.3.2 Internal Consistency Checks


The system design included a number of internal consistency checks to verify the integrity of the system and the data set. These included: redundant filter collection for carbon analysis (elemental and organic carbon), redundant flow measurement and sensing devices, and redundant internally measured CO<sub>2</sub> concentrations. Additional redundancy in compound analyses was made in the overlap region between Summa canisters and thermal desorption tube sampling (TDS). All flows were verified at the point of sample collection to be consistent with manufacturer specifications for orifices and pressure drops. The sample was designed to provide mass concentrations in the sample stream so that EI calculations could be performed with CO<sub>2</sub> data provided by others on the research team.

A comparison was therefore made between the total carbon collected on the two branches of the sampling system, which is displayed ( $\mu\text{g m}^{-3}$  basis) in Figure 42 below. Note the outstanding agreement between the parallel samples with a slope (0.98) and regression value obtained ( $r^2=0.994$ ) for this test.

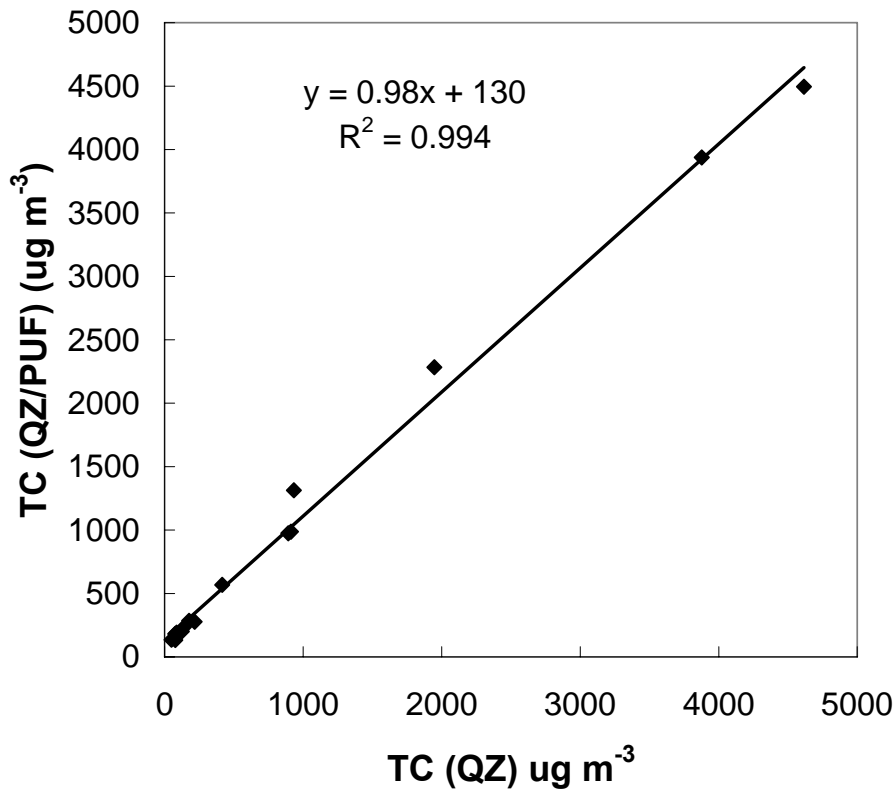

**Figure 42: Correlation of total carbon concentration measured between parallel sample trains. One train was designed for high flow through the quartz to ensure sufficient sample for EC-OC analyses while the other train is the quartz-PUF combination for semi-volatile analysis.**


Next, the total PM mass concentration measured on the Teflo filters are compared with the total carbon concentration obtained on the high flow quartz leg. This comparison provides another consistency check between measurements of particulate matter. Excellent agreement was noted between these legs (Figure 43) with a slope of 1.02 and an R2 of 0.997 noted for the test. This provided confidence in the measured values on these three legs.

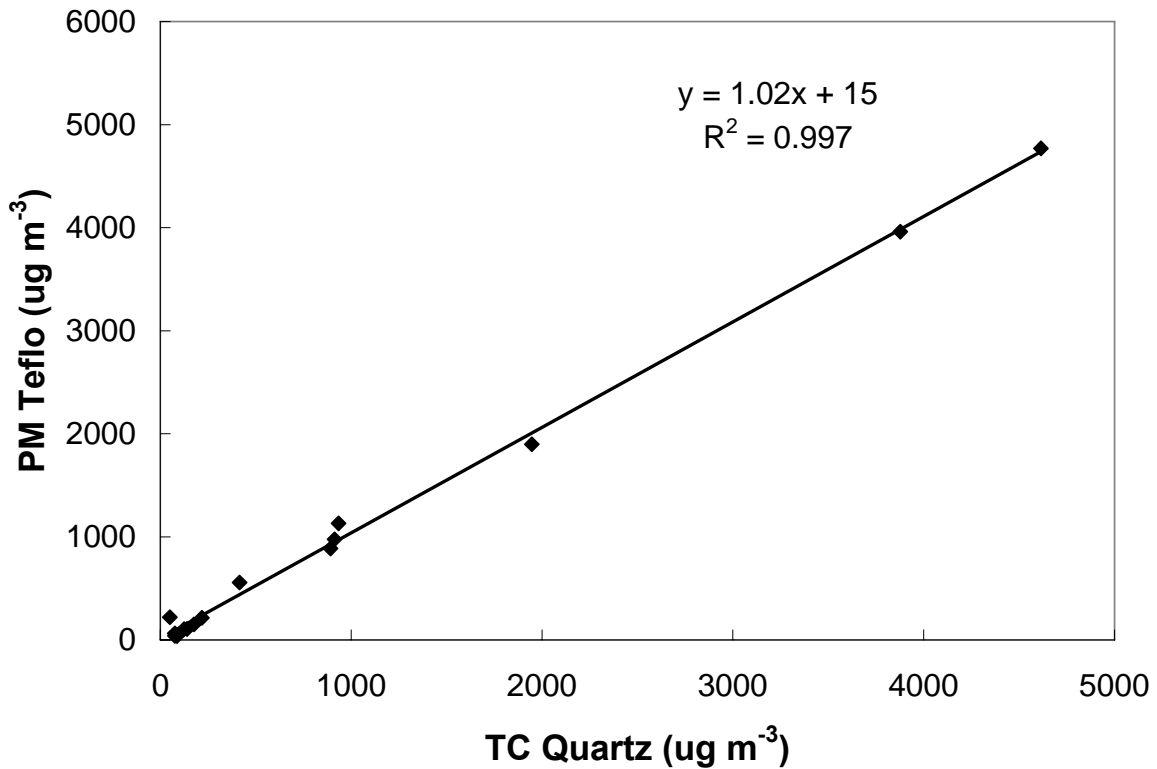

**Figure 43: Comparison of PM mass concentration (measured on Teflo) vs. TC mass concentration measured on high flow quartz.**

Additional redundancy was built into the system for the gas-phase hydrocarbons to ensure the integrity of the gas-phase speciation. The Summa canisters were intended to provide the C<sub>1</sub> to C<sub>8</sub> speciation with direct comparisons available for the overlap region (C<sub>4</sub>-C<sub>8</sub>) with the thermal desorption tube system. It was expected that the major species could be directly compared in this range. However, the Summa canisters, as will be discussed below, failed to yield any compounds. The Summa canisters were also intended to verify the dilution ratio (if an ambient air penetrated the sampling system) at the carbonyl sampling point.

Finally, a check of the metals data was available by comparison of the sulfate ion analysis to the sulfur obtained by XRF. Here, the assumption is that all sulfurous species were present as sulfate on the filters. This comparison is limited by the extremely small concentrations of sulfur present on the filter which pushed the sulfate analyses using IC near minimum detection limits. A comparison of the measurements is seen in Figure 44 below.

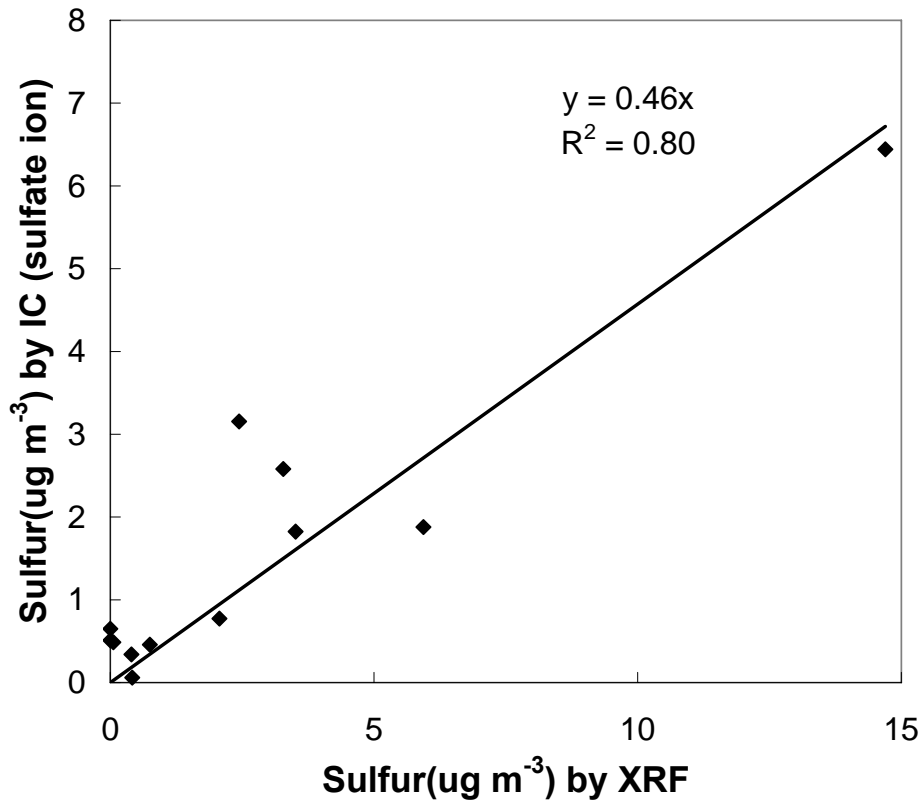

**Figure 44: Comparison of sulfur concentration (measured sulfate as sulfur by IC) to sulfur mass concentration measured by XRF.**

### 3.3.3 Particulate matter

Particulate matter mass concentrations were measured on Teflo filters. Dramatic increases in the PM concentrations are noted as the power increased to 85%. Figures 45 and 46 provide the EI and mass concentration measured for the PM for each mode, respectively. It should be noted that N353SW Mode 3 failed internal QA/QC and is not reported.

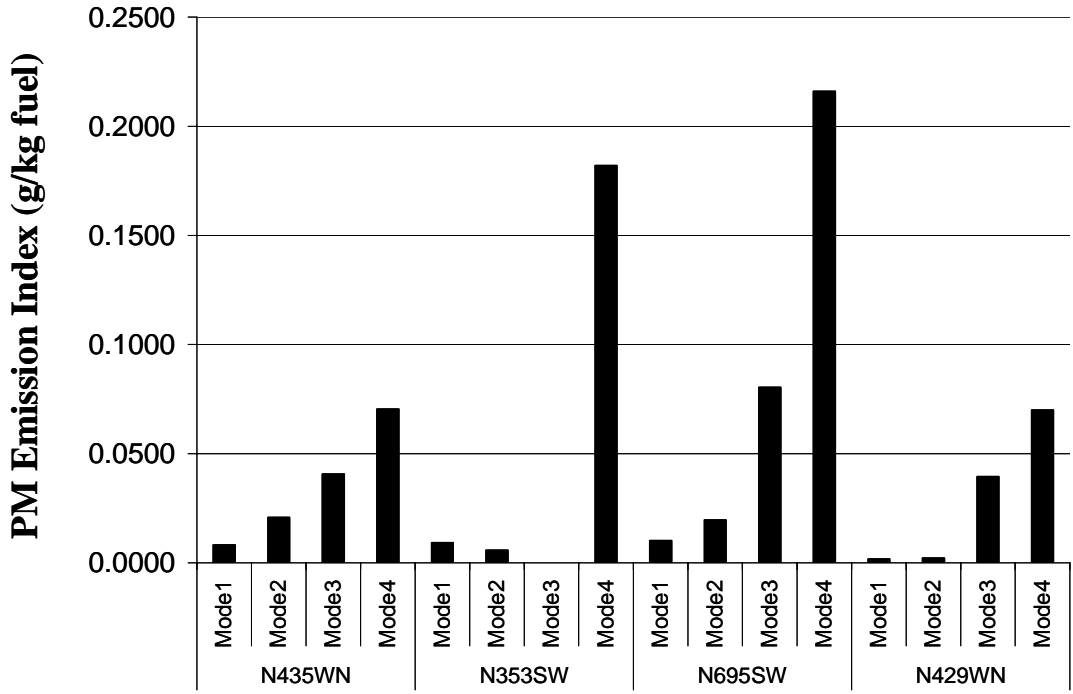


Figure 45: PM emission indices

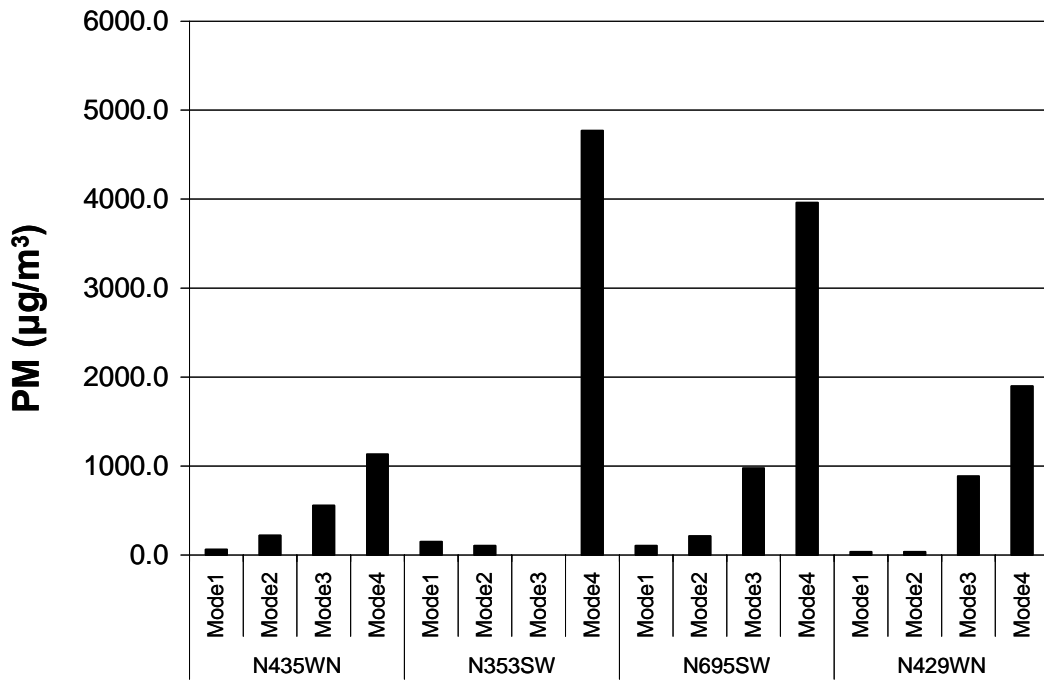


Figure 46: PM mass concentrations

### 3.3.4 Elemental and organic carbon


As explained in the earlier sections, pre-weighed Teflon and fired quartz filter media were inserted into the Gelman holders prior to the beginning of the aircraft test cycle. At the completion of the test cycle, the media were removed, sealed in Petri dishes and stored cool before their return to the laboratory for measurement of the mass, elemental and organic carbon using the methods described earlier. Tables 13 and 14 summarize the mass concentrations and EIs measured for PM, EC and OC. The relative concentrations of EC to OC are shown in Figure 47. Media for Mode3 for N353SW failed the QC testing and are not reported (the Teflon and quartz masses did not agree).

**Table 13: mass concentrations of PM, EC, OC and TC**

			Mode1	Mode2	Mode3	Mode4
N435WN	EC	(ug/m3)	19.3	18.0	326	664
	OC	(ug/m3)	56.8	32.1	89.6	270
	TC	(ug/m3)	76.1	50.0	416	934
	PM	(ug/m3)	62.5	220	557	1131
N353SW	EC	(ug/m3)	71.7	62.6	N/A	4036
	OC	(ug/m3)	105	62.6	N/A	579
	TC	(ug/m3)	176	125	N/A	4615
	PM	(ug/m3)	150	104	N/A	4770
N695SW	EC	(ug/m3)	57.4	148	722	3133
	OC	(ug/m3)	82.5	70.1	190	745
	TC	(ug/m3)	140	218	913	3877
	PM	(ug/m3)	105	214	976	3961
N429WN	EC	(ug/m3)	17.3	27.8	759	1288
	OC	(ug/m3)	70.1	49.0	133	659
	TC	(ug/m3)	87.4	76.9	892	1947
	PM	(ug/m3)	37.1	38.5	887	1898

**Table 14: EI (g kg<sup>-1</sup> fuel)**


			Mode1	Mode2	Mode3	Mode4
N435WN	PM		0.0082	0.0209	0.041	0.070
	EC		0.0025	0.0017	0.024	0.041
	OC		0.0075	0.0030	0.0065	0.017
N353SW	PM		0.0092	0.0058	N/A	0.182
	EC		0.0044	0.0035	N/A	0.154
	OC		0.0065	0.0035	N/A	0.022
N695SW	PM		0.0102	0.0196	0.080	0.216
	EC		0.0056	0.0135	0.060	0.171
	OC		0.0080	0.0064	0.016	0.041
N429WN	PM		0.0017	0.0022	0.039	0.070
	EC		0.00080	0.0016	0.034	0.047
	OC		0.0032	0.0028	0.0059	0.024

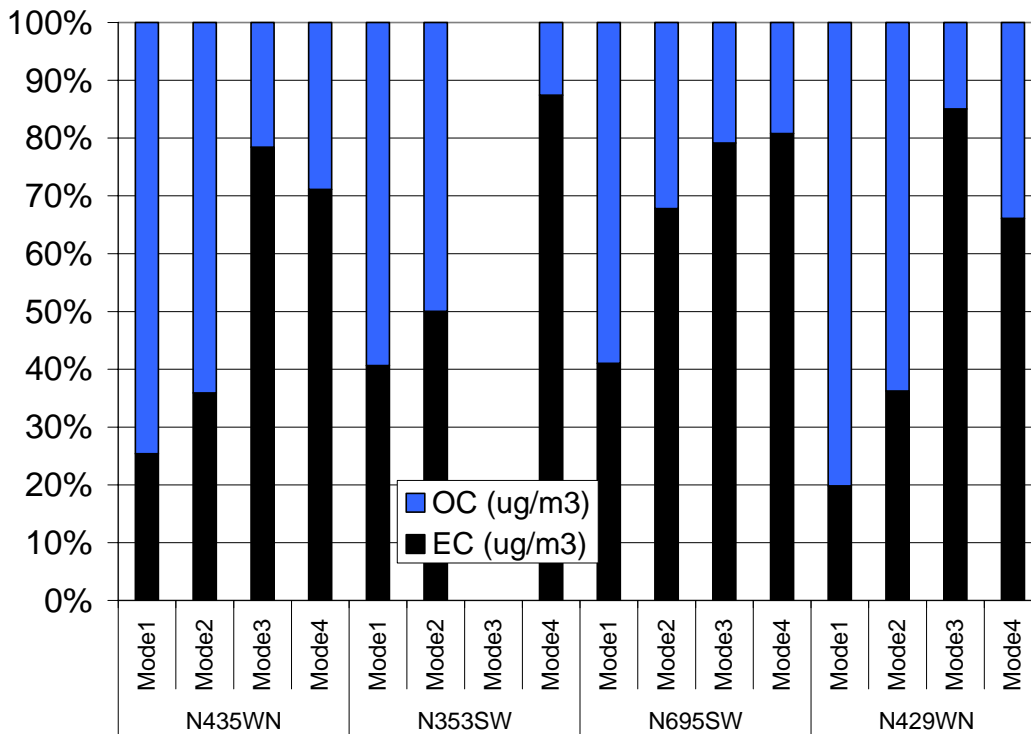


**Figure 47: Relative EC and OC emission rates for each aircraft as a function of mode**

### 3.3.5 Polycyclic Aromatic Hydrocarbons (PAHs) and n-alkanes (C<sub>12+</sub>)

PAHs and n-alkanes (C<sub>12+</sub>) were collected on quartz followed by a PUF-XAD-PUF sandwich. This sample line was verified by total carbon catch on the quartz filter against both the particle sample line and the high flow quartz line (see consistency check section above). In this work, “naphthalenic” PAHs include naphthalene and its 1-methyl and 2-methyl derivatives; while “non-naphthalenic” PAHs range from acenaphthylene to dibenz[a,h]anthracene in increasing molecular weight. The naphthalenic PAHs are the overwhelmingly dominant PAH species measured. Figures 48 and 49 provide the relative distribution of naphthalenic and non-naphthalenic compounds. Note that the relative distributions of the substituted naphthalenes to non-substituted naphthalenes for the idle modes are in general agreement with the work from Spicer (Spicer et al.1992, 1994). It was also noted that there was a sharp decrease in the relative contribution of substituted naphthalenes at the higher load points. Trends in the non-naphthalenic compounds are also noted with acenaphthylene present significantly only in the idle mode and fluoranthene decreasing with increasing power.

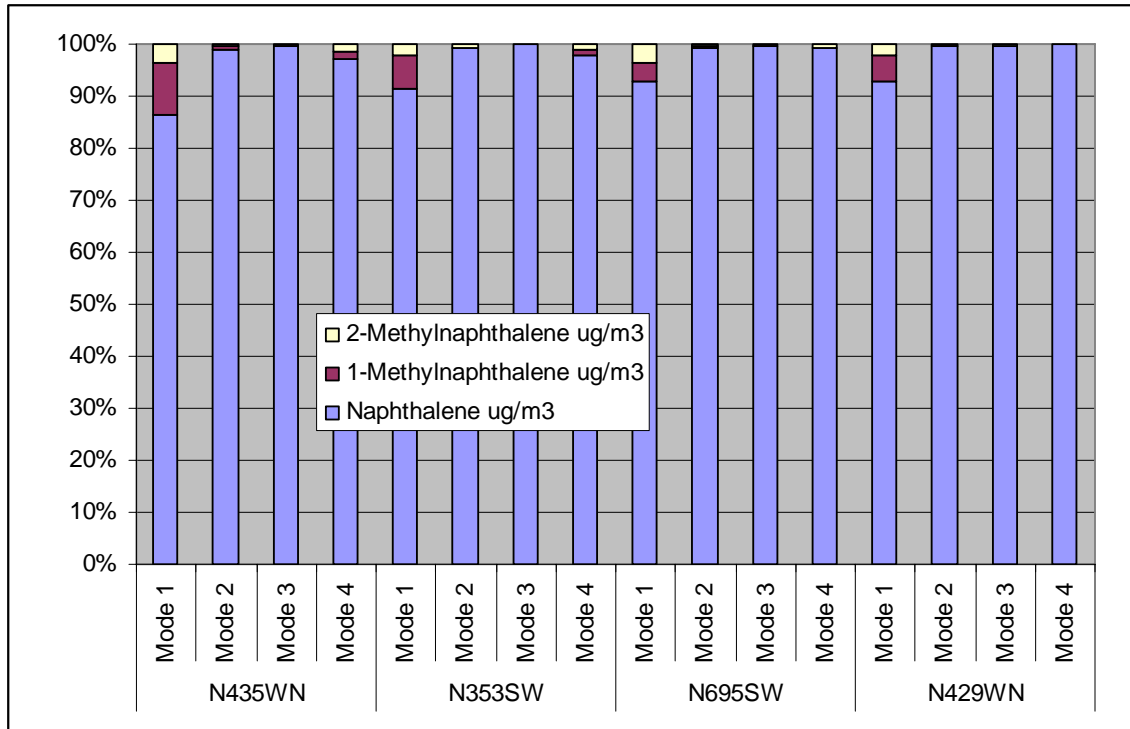


**Figure 48: Comparison of the relative contribution of naphthalenic compounds**

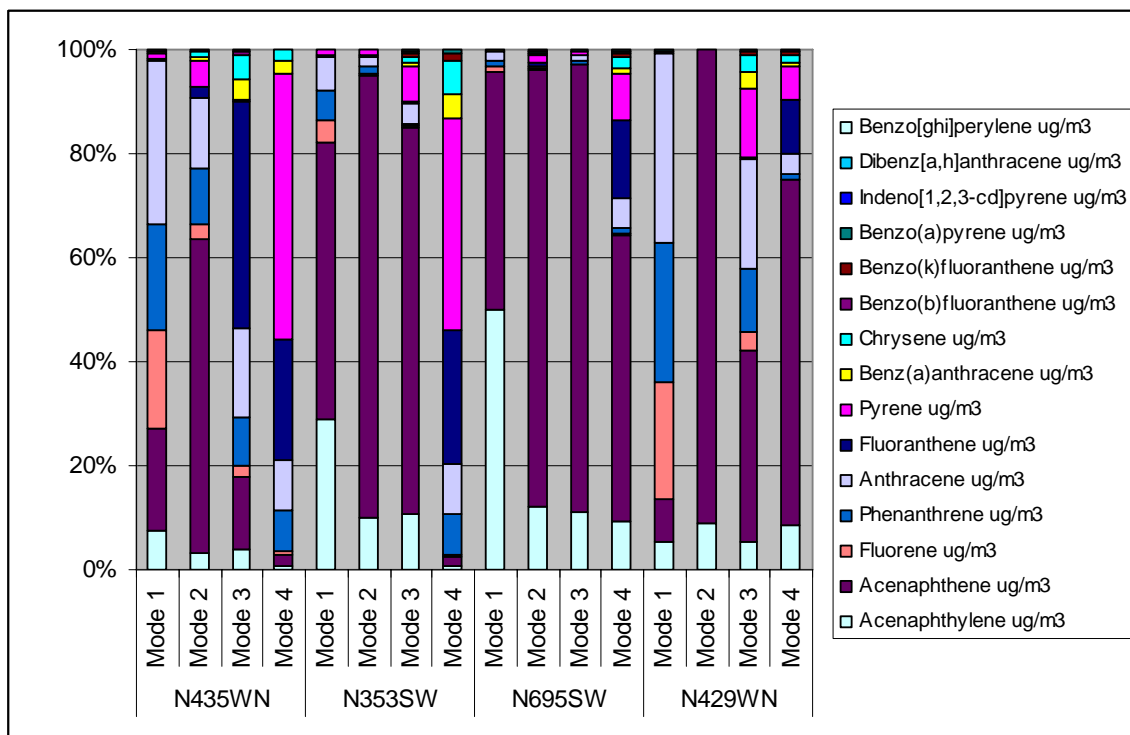

**Figure 49: Comparison of relative contributions of non-naphthalenic PAH compounds**



The relative distribution of n-alkanes are also charted below (Figure 50).

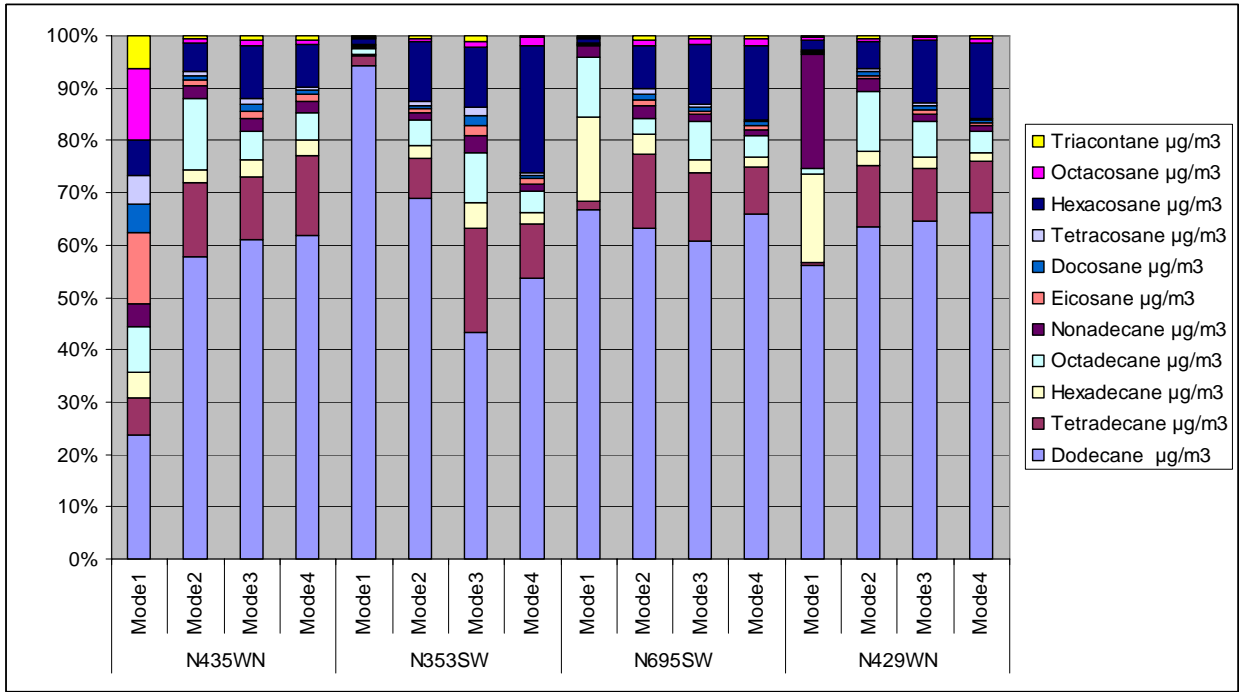

**Figure 50: Comparison of n-alkane distribution (C<sub>12</sub>-C<sub>30</sub>)**

Tables 15-17 and 18-22 summarize the mass concentrations and EIs for the PAH and n-alkane compounds, respectively:

**Table 15: Mass concentration of PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N435WN**

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	(ug/m3)	8.18E+01	4.93E+03	4.75E+03	8.15E+02
1-Methylnaphthalene	(ug/m3)	9.69E+00	3.63E+01	1.11E+01	1.32E+01
2-Methylnaphthalene	(ug/m3)	3.25E+00	1.00E+01	4.28E+00	1.15E+01
Acenaphthylene	(ug/m3)	1.10E+01	9.73E-01	5.70E-01	2.98E-01
Acenaphthene	(ug/m3)	2.82E+01	1.89E+01	2.05E+00	1.21E+00
Fluorene	(ug/m3)	2.68E+01	9.06E-01	3.14E-01	4.44E-01
Phenanthrene	(ug/m3)	2.95E+01	3.30E+00	1.34E+00	4.34E+00
Anthracene	(ug/m3)	4.50E+01	4.28E+00	2.52E+00	5.16E+00
Fluoranthene	(ug/m3)	7.86E-01	6.68E-01	6.33E+00	1.26E+01
Pyrene	(ug/m3)	1.50E+00	1.58E+00	8.74E-02	2.76E+01
Benz(a)anthracene	(ug/m3)	3.15E-01	2.65E-01	5.46E-01	1.24E+00
Chrysene	(ug/m3)	3.20E-01	2.68E-01	7.09E-01	1.26E+00
Benzo(b)fluoranthene	(ug/m3)	6.77E-02	4.37E-02	7.56E-02	BDL
Benzo(k)fluoranthene	(ug/m3)	1.87E-01	9.46E-02	6.49E-02	BDL
Benzo(a)pyrene	(ug/m3)	4.94E-02	BDL	BDL	BDL
Indeno[1,2,3-cd]pyrene	(ug/m3)	BDL	BDL	BDL	BDL
Dibenz[a,h]anthracene	(ug/m3)	BDL	BDL	BDL	BDL
Benzo[ghi]perylene	(ug/m3)	BDL	BDL	BDL	BDL
n-Alkanes					
Dodecane	(ug/m3)	1.26E+00	5.63E+00	7.18E+00	3.88E+1
Tetradecane	(ug/m3)	3.77E-01	1.38E+00	1.41E+00	9.66E+00
Hexadecane	(ug/m3)	2.54E-01	2.40E-01	3.85E-01	1.76E+00
Octadecane	(ug/m3)	4.58E-01	1.23E+00	6.59E-01	3.39E+00
Nonadecane	(ug/m3)	2.34E-01	2.52E-01	2.67E-01	1.29E+00
Eicosane	(ug/m3)	7.18E-01	9.96E-02	1.58E-01	7.98E-01
Docosane	(ug/m3)	2.86E-01	8.66E-02	1.75E-01	5.91E-01
Tetracosane	(ug/m3)	3.01E-01	7.81E-02	1.22E-01	3.91E-01
Hexacosane	(ug/m3)	3.57E-01	5.30E-01	1.17E+00	5.09E+00
Octacosane	(ug/m3)	7.16E-01	6.90E-02	1.40E-01	4.84E-01
triacontane	(ug/m3)	3.34E-01	5.72E-02	9.98E-02	5.51E-01

**Table 16: Mass concentration of PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N353SW**

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	(ug/m3)	1.03E+02	1.49E+04	8.01E+04	1.15E+03
1-Methylnaphthalene	(ug/m3)	7.18E+00	2.71E+01	1.12E+02	1.33E+01
2-Methylnaphthalene	(ug/m3)	2.33E+00	8.08E+01	3.14E+01	1.35E+01
Acenaphthylene	(ug/m3)	2.27E+02	2.27E+01	9.72E+00	4.69E-01
Acenaphthene	(ug/m3)	4.15E+02	1.91E+02	6.85E+01	1.45E+00
Fluorene	(ug/m3)	3.44E+01	6.58E-01	3.26E-01	2.29E-01
Phenanthrene	(ug/m3)	4.32E+01	3.13E+00	4.43E-01	6.15E+00
Anthracene	(ug/m3)	4.98E+01	3.92E+00	3.74E+00	7.32E+00
Fluoranthene	(ug/m3)	3.35E+00	1.21E+00	4.31E-02	1.95E+01
Pyrene	(ug/m3)	8.00E+00	2.15E+00	6.35E+00	3.13E+01
Benz(a)anthracene	(ug/m3)	2.92E-01	1.19E-01	7.57E-01	3.53E+00
Chrysene	(ug/m3)	2.96E-01	1.21E-01	7.97E-01	4.99E+00
Benzo(b)fluoranthene	(ug/m3)	BDL	BDL	2.45E-01	BDL
Benzo(k)fluoranthene	(ug/m3)	BDL	BDL	5.41E-01	1.09E+00
Benzo(a)pyrene	(ug/m3)	BDL	BDL	2.10E-01	4.10E-01
Indeno[1,2,3-cd]pyrene	(ug/m3)	BDL	BDL	1.68E-01	BDL
Dibenz[a,h]anthracene	(ug/m3)	BDL	BDL	2.80E-01	BDL
Benzo[ghi]perylene	(ug/m3)	BDL	BDL	BDL	BDL
n-Alkanes					
Dodecane	(ug/m3)	4.20E+01	8.41E+00	4.33E+00	5.18E+01
Tetradecane	(ug/m3)	7.77E-01	9.32E-01	2.00E+00	9.78E+00
Hexadecane	(ug/m3)	1.71E-01	3.10E-01	5.08E-01	2.21E+00
Octadecane	(ug/m3)	4.95E-01	5.85E-01	9.40E-01	3.89E+00
Nonadecane	(ug/m3)	1.43E-01	1.84E-01	3.29E-01	1.32E+00
Eicosane	(ug/m3)	7.58E-02	9.80E-02	1.93E-01	9.42E-01
Docosane	(ug/m3)	6.82E-02	7.82E-02	1.93E-01	6.39E-01
Tetracosane	(ug/m3)	1.15E-01	9.37E-02	1.57E-01	4.81E-01
Hexacosane	(ug/m3)	4.42E-01	1.40E+00	1.14E+00	2.34E+01
Octacosane	(ug/m3)	1.83E-01	6.92E-02	1.06E-01	1.43E+00
Triacontane	(ug/m3)	6.17E-02	5.66E-02	1.21E-01	3.81E-01

**Table 17: Mass concentration of PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N695SW**

<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	(ug/m3)	1.46E+02	1.56E+03	1.79E+04	1.27E+04
1-Methylnaphthalene	(ug/m3)	6.07E+00	5.76E+00	5.24E+01	1.60E+01
2-Methylnaphthalene	(ug/m3)	5.42E+00	4.67E+00	1.27E+01	7.88E+01
Acenaphthylene	(ug/m3)	2.78E+02	8.93E+00	2.06E+01	9.24E+00
Acenaphthene	(ug/m3)	2.52E+02	6.18E+01	1.61E+02	5.42E+01
Fluorene	(ug/m3)	7.46E+00	5.80E-02	3.77E-01	3.86E-01
Phenanthrene	(ug/m3)	5.78E+00	3.99E-01	1.15E+00	1.15E+00
Anthracene	(ug/m3)	8.25E+00	6.51E-02	1.82E+00	5.69E+00
Fluoranthene	(ug/m3)	8.79E-01	5.22E-01	4.06E-02	1.48E+01
Pyrene	(ug/m3)	1.02E+00	1.24E+00	1.30E+00	8.84E+00
Benz(a)anthracene	(ug/m3)	4.16E-02	2.67E-01	3.11E-01	1.12E+00
Chrysene	(ug/m3)	5.31E-01	2.70E-01	3.15E-01	1.96E+00
Benzo(b)fluoranthene	(ug/m3)	6.63E-02	6.19E-02	BDL	BDL
Benzo(k)fluoranthene	(ug/m3)	1.38E-01	1.02E-01	7.84E-02	7.01E-01
Benzo(a)pyrene	(ug/m3)	1.52E-01	2.40E-02	4.25E-02	2.92E-01
Indeno[1,2,3-cd]pyrene	(ug/m3)	3.36E-02	BDL	BDL	2.36E-01
Dibenz[a,h]anthracene	(ug/m3)	BDL	BDL	BDL	1.99E-01
Benzo[ghi]perylene	(ug/m3)	3.53E-02	BDL	BDL	BDL
n-Alkanes					
Dodecane	(ug/m3)	2.58E+01	5.04E+00	1.06E+01	5.41E+01
Tetradecane	(ug/m3)	6.46E-01	1.13E+00	2.25E+00	7.39E+00
Hexadecane	(ug/m3)	6.24E+00	2.85E-01	4.25E-01	1.66E+00
Octadecane	(ug/m3)	4.47E+00	2.48E-01	1.31E+00	3.27E+00
Nonadecane	(ug/m3)	7.71E-01	1.98E-01	2.23E-01	9.43E-01
Eicosane	(ug/m3)	9.32E-02	9.03E-02	1.12E-01	6.61E-01
Docosane	(ug/m3)	6.34E-02	8.56E-02	1.34E-01	5.79E-01
Tetracosane	(ug/m3)	5.14E-02	7.56E-02	7.98E-02	2.91E-01
Hexacosane	(ug/m3)	3.46E-01	6.60E-01	1.99E+00	1.16E+01
Octacosane	(ug/m3)	1.32E-01	7.83E-02	2.25E-01	1.21E+00
Triacontane	(ug/m3)	8.12E-02	7.07E-02	9.09E-02	4.60E-01

**Table 18: Mass concentration of PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N429WN**

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	(ug/m3)	1.07E+02	2.20E+04	9.23E+03	1.22E+04
1-Methylnaphthalene	(ug/m3)	5.71E+00	3.73E+01	1.75E+01	1.17E+01
2-Methylnaphthalene	(ug/m3)	2.33E+00	7.52E+00	1.85E+01	6.30E+00
Acenaphthylene	(ug/m3)	2.22E+01	4.42E+02	5.49E-01	1.23E+01
Acenaphthene	(ug/m3)	3.39E+01	4.46E+03	3.89E+00	9.43E+01
Fluorene	(ug/m3)	9.53E+01	7.56E-01	4.09E-01	3.61E-01
Phenanthrene	(ug/m3)	1.11E+02	2.67E+00	1.28E+00	1.13E+00
Anthracene	(ug/m3)	1.53E+02	2.56E+00	2.22E+00	5.72E+00
Fluoranthene	(ug/m3)	9.04E-01	5.42E-01	4.30E-02	1.50E+01
Pyrene	(ug/m3)	1.05E+00	1.29E+00	1.38E+00	8.95E+00
Benz(a)anthracene	(ug/m3)	4.27E-02	2.77E-01	3.30E-01	1.14E+00
Chrysene	(ug/m3)	5.45E-01	2.81E-01	3.34E-01	1.99E+00
Benzo(b)fluoranthene	(ug/m3)	6.82E-02	6.43E-02	BDL	BDL
Benzo(k)fluoranthene	(ug/m3)	1.42E-01	1.06E-01	8.31E-02	7.10E-01
Benzo(a)pyrene	(ug/m3)	1.57E-01	2.50E-02	4.50E-02	2.95E-01
Indeno[1,2,3-cd]pyrene	(ug/m3)	3.45E-02	BDL	BDL	2.39E-01
Dibenz[a,h]anthracene	(ug/m3)	BDL	BDL	BDL	2.01E-01
Benzo[ghi]perylene	(ug/m3)	3.63E-02	BDL	BDL	BDL
n-Alkanes					
Dodecane	(ug/m3)	1.39E+01	5.50E+00	1.17E+01	5.54E+01
Tetradecane	(ug/m3)	1.11E-01	1.03E+00	1.85E+00	8.26E+00
Hexadecane	(ug/m3)	4.19E+00	2.23E-01	3.81E-01	1.40E+00
Octadecane	(ug/m3)	2.54E-01	9.98E-01	1.23E+00	3.54E+00
Nonadecane	(ug/m3)	5.39E+00	2.07E-01	2.73E-01	8.22E-01
Eicosane	(ug/m3)	8.29E-02	5.79E-02	1.52E-01	5.16E-01
Docosane	(ug/m3)	5.35E-02	6.25E-02	1.47E-01	3.41E-01
Tetracosane	(ug/m3)	6.50E-02	5.63E-02	9.31E-02	2.76E-01
Hexacosane	(ug/m3)	4.62E-01	4.39E-01	2.15E+00	1.22E+01
Octacosane	(ug/m3)	1.55E-01	4.80E-02	8.93E-02	4.93E-01
Triacontane	(ug/m3)	7.96E-02	4.44E-02	7.38E-02	5.60E-01

**Table 19: Emission Indices for PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N435WN**

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	g/kgfuel	1.64E-02	7.15E-01	5.30E-01	7.74E-02
1-Methylnaphthalene	g/kgfuel	1.94E-03	5.25E-03	1.23E-03	1.25E-03
2-Methylnaphthalene	g/kgfuel	6.50E-04	1.45E-03	4.77E-04	1.10E-03
Acenaphthylene	g/kgfuel	2.20E-03	1.41E-04	6.35E-05	2.83E-05
Acenaphthene	g/kgfuel	5.64E-03	2.74E-03	2.28E-04	1.15E-04
Fluorene	g/kgfuel	5.35E-03	1.31E-04	3.50E-05	4.22E-05
Phenanthrene	g/kgfuel	5.91E-03	4.78E-04	1.49E-04	4.12E-04
Anthracene	g/kgfuel	8.99E-03	6.20E-04	2.80E-04	4.90E-04
Fluoranthene	g/kgfuel	1.57E-04	9.68E-05	7.06E-04	1.20E-03
Pyrene	g/kgfuel	3.01E-04	2.29E-04	9.74E-06	2.63E-03
Benz(a)anthracene	g/kgfuel	6.31E-05	3.83E-05	6.08E-05	1.18E-04
Chrysene	g/kgfuel	6.39E-05	3.88E-05	7.89E-05	1.20E-04
Benzo(b)fluoranthene	g/kgfuel	1.35E-05	6.32E-06	8.42E-06	0.00E+00
Benzo(k)fluoranthene	g/kgfuel	3.75E-05	1.37E-05	7.23E-06	0.00E+00
Benzo(a)pyrene	g/kgfuel	9.88E-06	BDL	BDL	BDL
Indeno[1,2,3-cd]pyrene	g/kgfuel	BDL	BDL	BDL	BDL
Dibenz[a,h]anthracene	g/kgfuel	BDL	BDL	BDL	BDL
Benzo[ghi]perylene	g/kgfuel	BDL	BDL	BDL	BDL
<b>n-Alkanes</b>					
Dodecane	g/kgfuel	7.80E-05	2.35E-04	2.63E-04	1.13E-03
Tetradecane	g/kgfuel	2.34E-05	5.76E-05	5.16E-05	2.82E-04
Hexadecane	g/kgfuel	1.58E-05	1.00E-05	1.41E-05	5.12E-05
Octadecane	g/kgfuel	2.84E-05	5.50E-05	2.42E-05	9.89E-05
Nonadecane	g/kgfuel	1.45E-05	1.05E-05	9.79E-06	3.76E-05
Eicosane	g/kgfuel	4.46E-05	4.41E-06	5.78E-06	2.33E-05
Docosane	g/kgfuel	1.77E-05	3.62E-06	6.43E-06	1.72E-05
Tetracosane	g/kgfuel	1.87E-05	3.26E-06	4.46E-06	1.14E-05
Hexacosane	g/kgfuel	2.22E-05	2.21E-05	4.30E-05	1.48E-04
Octacosane	g/kgfuel	4.44E-05	2.89E-06	5.13E-06	1.41E-05
triacontane	g/kgfuel	2.07E-05	2.39E-06	3.66E-06	1.61E-05

**Table 20: Emission Indices for PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N353SW**

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	g/kgfuel	9.69E-03	1.26E+00	5.52E+00	6.68E-02
1-Methylnaphthalene	g/kgfuel	6.75E-04	2.28E-03	7.69E-03	7.72E-04
2-Methylnaphthalene	g/kgfuel	2.19E-04	6.80E-03	2.17E-03	7.88E-04
Acenaphthylene	g/kgfuel	2.14E-02	1.91E-03	6.70E-04	2.73E-05
Acenaphthene	g/kgfuel	3.90E-02	1.61E-02	4.72E-03	8.41E-05
Fluorene	g/kgfuel	3.24E-03	5.54E-05	2.25E-05	1.33E-05
Phenanthrene	g/kgfuel	4.06E-03	2.63E-04	3.05E-05	3.58E-04
Anthracene	g/kgfuel	4.68E-03	3.31E-04	2.58E-04	4.26E-04
Fluoranthene	g/kgfuel	3.15E-04	1.02E-04	2.97E-06	1.13E-03
Pyrene	g/kgfuel	7.52E-04	1.81E-04	4.38E-04	1.82E-03
Benz(a)anthracene	g/kgfuel	2.75E-05	1.00E-05	5.22E-05	2.05E-04
Chrysene	g/kgfuel	2.78E-05	1.02E-05	5.49E-05	2.91E-04
Benzo(b)fluoranthene	g/kgfuel	BDL	BDL	1.69E-05	0.00E+00
Benzo(k)fluoranthene	g/kgfuel	BDL	BDL	3.73E-05	6.35E-05
Benzo(a)pyrene	g/kgfuel	BDL	BDL	1.45E-05	2.39E-05
Indeno[1,2,3-cd]pyrene	g/kgfuel	BDL	BDL	1.16E-05	BDL
Dibenz[a,h]anthracene	g/kgfuel	BDL	BDL	1.93E-05	BDL
Benzo[ghi]perylene	g/kgfuel	BDL	BDL	BDL	BDL
n-Alkanes					
Dodecane	g/kgfuel	1.59E-03	2.68E-04	9.81E-05	1.23E-03
Tetradecane	g/kgfuel	2.94E-05	2.97E-05	4.52E-05	2.32E-04
Hexadecane	g/kgfuel	6.46E-06	9.87E-06	1.15E-05	5.23E-05
Octadecane	g/kgfuel	1.87E-05	1.86E-05	2.13E-05	9.21E-05
Nonadecane	g/kgfuel	5.39E-06	5.85E-06	7.45E-06	3.13E-05
Eicosane	g/kgfuel	2.87E-06	3.12E-06	4.38E-06	2.23E-05
Docosane	g/kgfuel	2.58E-06	2.49E-06	4.38E-06	1.51E-05
Tetracosane	g/kgfuel	4.34E-06	2.99E-06	3.55E-06	1.14E-05
Hexacosane	g/kgfuel	1.67E-05	4.46E-05	2.59E-05	5.53E-04
Octacosane	g/kgfuel	6.93E-06	2.20E-06	2.39E-06	3.39E-05
triacontane	g/kgfuel	2.33E-06	1.80E-06	2.73E-06	9.02E-06

**Table 21: Emission Indices for PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N695SW**


<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	g/kgfuel	2.16E-02	2.18E-01	2.25E+00	1.06E+00
1-Methylnaphthalene	g/kgfuel	9.01E-04	8.03E-04	6.58E-03	1.33E-03
2-Methylnaphthalene	g/kgfuel	8.04E-04	6.50E-04	1.59E-03	6.55E-03
Acenaphthylene	g/kgfuel	4.12E-02	1.24E-03	2.59E-03	7.68E-04
Acenaphthene	g/kgfuel	3.74E-02	8.60E-03	2.02E-02	4.51E-03
Fluorene	g/kgfuel	1.11E-03	8.07E-06	4.74E-05	3.21E-05
Phenanthrene	g/kgfuel	8.58E-04	5.56E-05	1.44E-04	9.57E-05
Anthracene	g/kgfuel	1.22E-03	9.07E-06	2.29E-04	4.73E-04
Fluoranthene	g/kgfuel	1.31E-04	7.27E-05	5.10E-06	1.23E-03
Pyrene	g/kgfuel	1.52E-04	1.73E-04	1.64E-04	7.35E-04
Benz(a)anthracene	g/kgfuel	6.17E-06	3.71E-05	3.91E-05	9.35E-05
Chrysene	g/kgfuel	7.88E-05	3.76E-05	3.96E-05	1.63E-04
Benzo(b)fluoranthene	g/kgfuel	9.85E-06	8.62E-06	BDL	BDL
Benzo(k)fluoranthene	g/kgfuel	2.05E-05	1.42E-05	9.85E-06	5.83E-05
Benzo(a)pyrene	g/kgfuel	2.26E-05	3.35E-06	5.34E-06	2.43E-05
Indeno[1,2,3-cd]pyrene	g/kgfuel	4.99E-06	BDL	BDL	1.96E-05
Dibenz[a,h]anthracene	g/kgfuel	BDL	BDL	BDL	1.65E-05
Benzo[ghi]perylene	g/kgfuel	5.24E-06	BDL	BDL	BDL
n-Alkanes					
Dodecane	g/kgfuel	1.55E-03	2.71E-04	5.71E-04	1.76E-03
Tetradecane	g/kgfuel	3.89E-05	6.07E-05	1.22E-04	2341E-04
Hexadecane	g/kgfuel	3.75E-04	1.54E-05	2.30E-05	5.43E-05
Octadecane	g/kgfuel	2.69E-04	1.34E-05	7.09E-05	1.06E-04
Nonadecane	g/kgfuel	4.64E-05	1.07E-05	1.21E-05	3.07E-05
Eicosane	g/kgfuel	5.61E-06	4.86E-06	6.08E-06	2.16E-05
Docosane	g/kgfuel	3.81E-06	4.60E-06	7.23E-06	1.89E-05
Tetracosane	g/kgfuel	3.09E-06	4.07E-06	4.32E-06	9.49E-06
Hexacosane	g/kgfuel	2.08E-05	3.55E-05	1.07E-04	3.77E-04
Octacosane	g/kgfuel	7.96E-06	4.21E-06	1.11E-05	3.94E-05
triacontane	g/kgfuel	4.89E-06	3.80E-06	4.92E-06	1.50E-05



**Table 22: Emission Indices for PAH and n-alkanes (C<sub>12</sub>-C<sub>30</sub>) – N429WN**

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Naphthalene	g/kgfuel	7.53E-03	1.90E+00	6.26E-01	6.85E-01
1-Methylnaphthalene	g/kgfuel	4.01E-04	3.23E-03	1.19E-03	6.56E-04
2-Methylnaphthalene	g/kgfuel	1.63E-04	6.52E-04	1.25E-03	3.54E-04
Acenaphthylene	g/kgfuel	1.56E-03	3.83E-02	3.73E-05	6.90E-04
Acenaphthene	g/kgfuel	2.38E-03	3.87E-01	2.64E-04	5.30E-03
Fluorene	g/kgfuel	6.68E-03	6.55E-05	2.78E-05	2.03E-05
Phenanthrene	g/kgfuel	7.80E-03	2.31E-04	8.68E-05	6.38E-05
Anthracene	g/kgfuel	1.07E-02	2.21E-04	1.51E-04	3.22E-04
Fluoranthene	g/kgfuel	6.34E-05	4.70E-05	2.92E-06	8.43E-04
Pyrene	g/kgfuel	7.37E-05	1.12E-04	9.38E-05	5.03E-04
Benz(a)anthracene	g/kgfuel	3.00E-06	2.40E-05	2.24E-05	6.40E-05
Chrysene	g/kgfuel	3.83E-05	2.43E-05	2.27E-05	1.12E-04
Benzo(b)fluoranthene	g/kgfuel	4.78E-06	5.57E-06	BDL	BDL
Benzo(k)fluoranthene	g/kgfuel	9.97E-06	9.15E-06	5.64E-06	3.99E-05
Benzo(a)pyrene	g/kgfuel	1.10E-05	2.16E-06	3.06E-06	1.66E-05
	g/kgfuel	2.42E-06	BDL	BDL	1.34E-05
Indeno[1,2,3-cd]pyrene					
Dibenz[a,h]anthracene	g/kgfuel	BDL	BDL	BDL	1.13E-05
Benzo[ghi]perylene	g/kgfuel	2.55E-06	BDL	BDL	BDL
n-Alkanes					
Dodecane	g/kgfuel	3.95E-04	1.82E-04	3.34E-04	1.20E-04
Tetradecane	g/kgfuel	3.14E-06	3.41E-05	5.27E-05	1.78E-04
Hexadecane	g/kgfuel	1.19E-04	7.40E-06	1.09E-05	3.02E-05
Octadecane	g/kgfuel	7.21E-06	3.31E-05	3.50E-05	7.65E-05
Nonadecane	g/kgfuel	1.53E-04	6.87E-06	7.79E-06	1.78E-05
Eicosane	g/kgfuel	2.35E-06	1.92E-06	4.34E-06	1.12E-05
Docosane	g/kgfuel	1.52E-06	2.07E-06	4.20E-06	7.36E-06
Tetracosane	g/kgfuel	1.84E-06	1.86E-06	2.66E-06	5.96E-06
Hexacosane	g/kgfuel	1.31E-05	1.45E-05	6.14E-05	2.64E-04
Octacosane	g/kgfuel	4.36E-06	1.59E-06	2.55E-06	1.07E-05
triacontane	g/kgfuel	2.26E-06	1.47E-06	2.11E-06	1.21E-05

Figure 51 illustrates the emission indices for significant PAHs as a function of different modes for different aircraft tested.

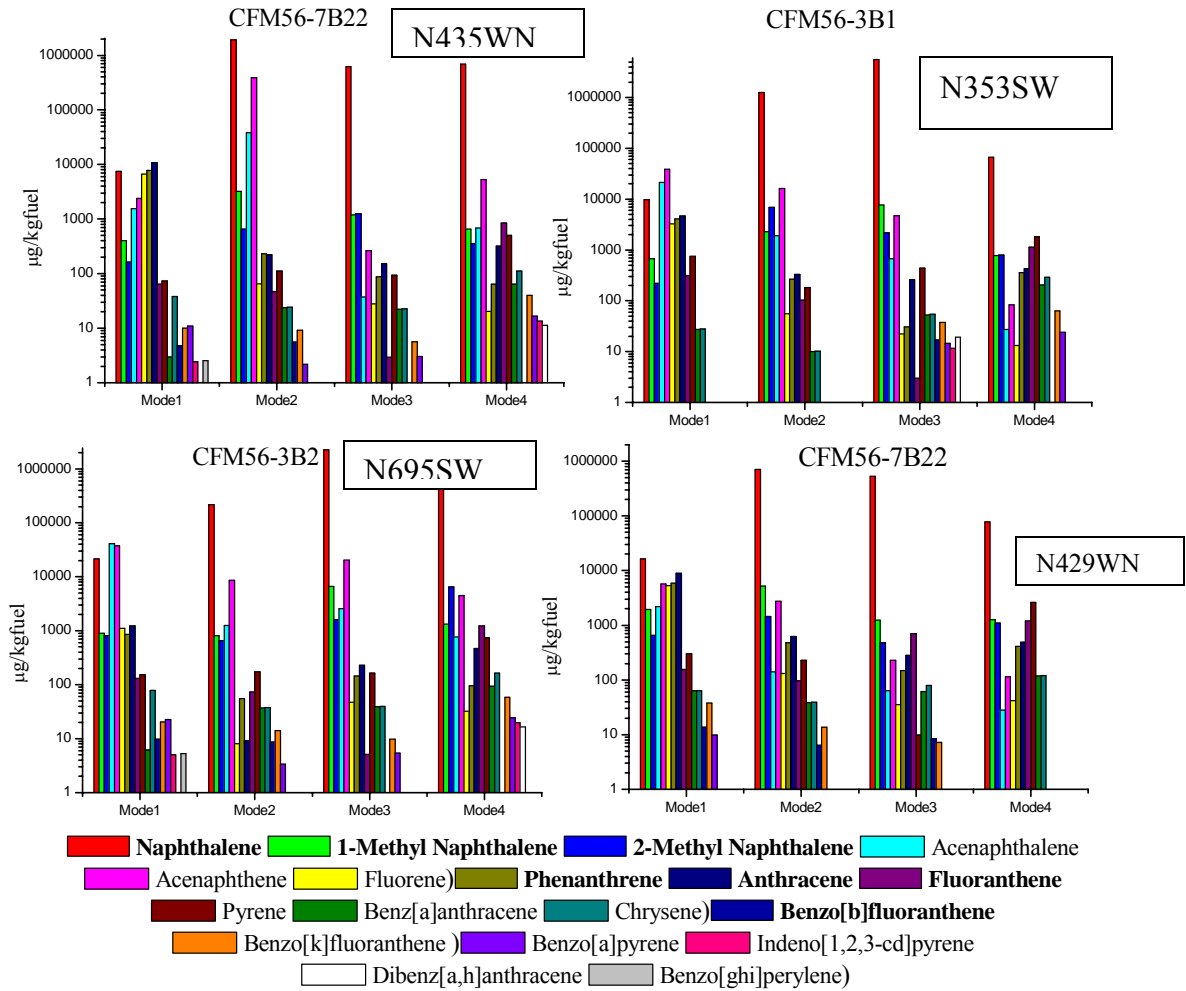

**Figure 51: Emission Indices for significant Poly Aromatic Hydrocarbons as a function of different modes for different aircraft**

### 3.3.6 Chromium Analysis

Results of the chromium analysis are shown in Table 23. The values for the ambient air at one hour showed that a measurement below the lower detection limit was possible with the sampling system and the value at eight hours was close to that normally measured for ambient air.

**Table 23: Chromium (VI) analyses**

Sample ID	sample	time (hrs)	Mean (ppt)	ng/filter	Conc (ng/filter)	LOD (ng/filter)
AE-13	air	1	43	0.65	ND	1.2
AE-14	air	8	81	1.22	1.2	1.2
AE-15	N435WN	4	118	1.77	1.8	1.2
AE-16	N353SW	4	47	0.71	ND	1.2
AE-17	N695SW	4	56	0.84	ND	1.2
AE-18	N429WN	4	7504	112.56	113	1.2
<b>Total Chromium</b>					(n/filter)	
AE 18					829.6	

Samples were obtained from the port engine of each aircraft tested over the whole test cycle and analyzed for Chromium (VI). The results of the analysis were as expected, except for the sample AE-18 (N429WN) which showed a large response for Chromium (VI). It is important to note that AE-18 was the only one of the 6 samples collected by UCR that had high Chromium (VI). In addition to the samples reported here, the EPA also took 6 ambient samples during the testing and their results did not show Chromium VI.

As a result, SCAQMD dissolved filter AE18 and analyzed it for total chromium with ICP-MS. Total chromium for AE-18 is shown in the table and the ratio of Chromium (VI) to total Chromium was about 15% as normally seen for samples collected next to a plating plant. Although AE-18 results appear an outlier, the total chromium amount on the filter by x-ray is similar to the amount measured in this test so the result can not be eliminated based on the chromium test alone. More corroborative results will be needed such as the Cr/Ni ratio or the like.

### 3.3.7 Dioxin Analysis

One sample was taken from the port engine over the entire test cycle of each aircraft and analyzed for dioxin at either the Alta or Frontier laboratories. Results for all four samples, one from each aircraft, showed the dioxin and congeners levels were below the detection limits of both laboratories. Both laboratories showed excellent recovery of the spiked congeners and no dioxin or additional congeners were found. A question might be asked whether dioxin was lost to the heated sample lines as we did not rinse those out before the analysis. However, given the combustor conditions and lack of chlorine, we did not expect to find measurable levels of dioxin. Further studies might examine losses in the sampling system; however, measurements from this study indicate that the recovered dioxin levels are likely to be less than the values listed in Table 24 below.


**Table 24: Detection Limits for Dioxin**

<b>Analyte</b>	<b>Alta Lab DL*</b>	<b>Frontier Lab DL*</b>
2,3,7,8-TCDD	2.34	2.35
1,2,3,7,8-PeCDD	3.18	3.85
1,2,3,4,7,8-HxCDD	5.04	4.45
1,2,3,6,7,8-HxCDD	4.44	3.92
1,2,3,7,8,9-HxCDD	4.76	4.2
1,2,3,4,6,7,8-HpCDD	3.13	2.69
OCDD	7.3	15.7
2,3,7,8-TCDF	2.34	2.36
1,2,3,7,8-PeCDF	3.49	3.85
2,3,4,7,8-PeCDF	3.28	3.62
1,2,3,4,7,8-HxCDF	1.15	1.07
1,2,3,6,7,8-HxCDF	0.9578	0.89
2,3,4,6,7,8-HxCDF	1.07	0.992
1,2,3,7,8,9-HxCDF	1.35	1.25
1,2,3,4,6,7,8-HpCDF	2.09	1.84
1,2,3,4,7,8,9-HpCDF	2.71	2.38
OCDF	5.84	9.83

\*Detection Limit for Alta and Frontier labs in picograms per sample

### 3.3.8 Metals

Metals were collected on the Teflon filter and analyzed by XRF. The distributions of metals are provided in Figure 52.

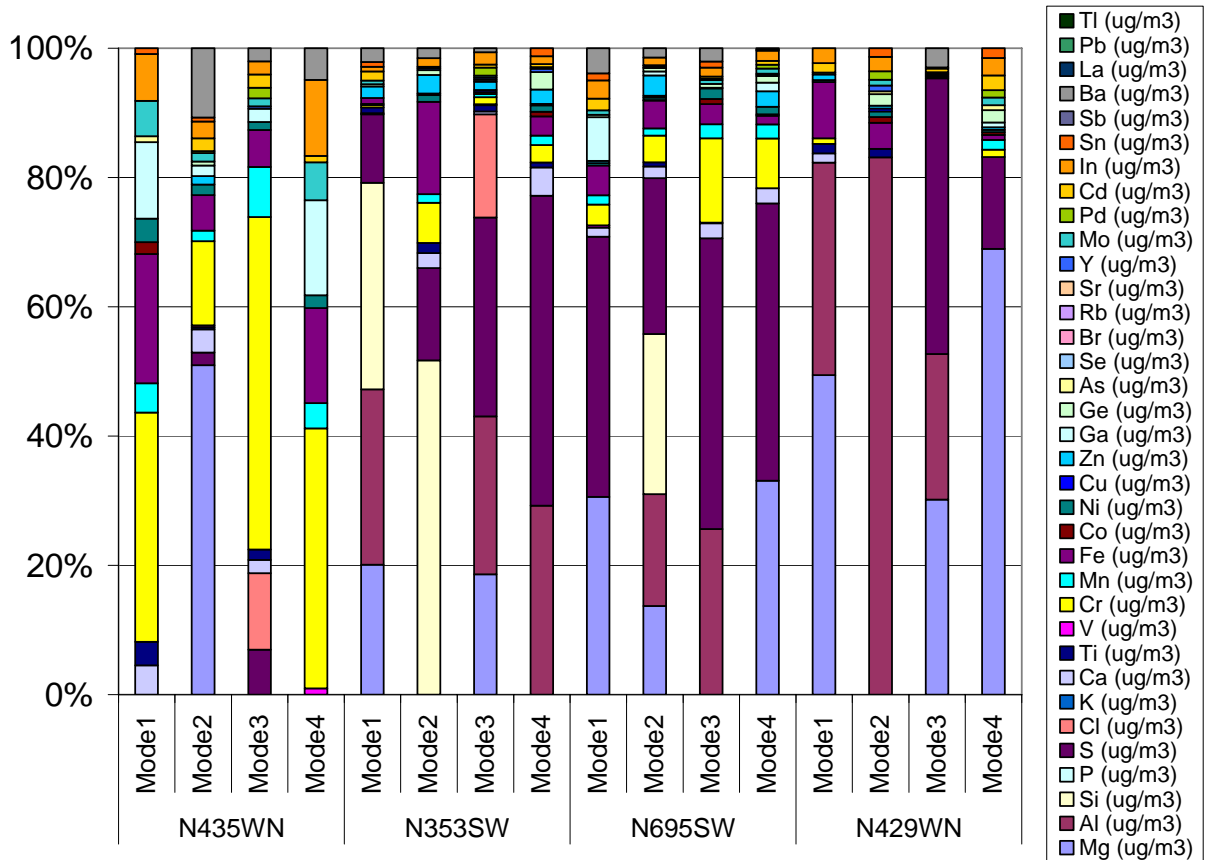

**Figure 52: Distribution of Metals**

It should be noted that the starboard engine on N435WN had a significantly higher total Cr levels than other engines, including the N429WN engine. The latter port engine was the filter with significant Cr+6 so it adds further question to the Cr+6 finding. In general, the variability in the metal distribution was greater between engines than between engine loads. Mass concentrations and EIs for the metals are summarized in Tables 25-28 and 29-32, respectively.

**Table 25: Metal mass concentrations – N435WN**

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	(ug/m3)	BDL	1.50	BDL	BDL
Al	(ug/m3)	BDL	BDL	BDL	BDL
Si	(ug/m3)	BDL	BDL	BDL	BDL
P	(ug/m3)	BDL	BDL	BDL	BDL
S	(ug/m3)	BDL	0.057	0.288	BDL
Cl	(ug/m3)	BDL	BDL	0.490	BDL
K	(ug/m3)	BDL	BDL	BDL	BDL
Ca	(ug/m3)	0.051	0.105	0.085	BDL
Ti	(ug/m3)	0.041	0.010	0.068	BDL
V	(ug/m3)	BDL	0.010	BDL	0.082
Cr	(ug/m3)	0.398	0.381	2.13	3.35
Mn	(ug/m3)	0.051	0.048	0.321	0.327
Fe	(ug/m3)	0.224	0.162	0.237	1.23
Co	(ug/m3)	0.020	BDL	BDL	BDL
Ni	(ug/m3)	0.041	0.048	0.051	0.163
Cu	(ug/m3)	BDL	BDL	BDL	BDL
Zn	(ug/m3)	BDL	0.038	BDL	BDL
Ga	(ug/m3)	0.133	0.048	0.085	1.23
Ge	(ug/m3)	BDL	0.019	BDL	BDL
As	(ug/m3)	0.010	BDL	BDL	BDL
Se	(ug/m3)	BDL	BDL	BDL	BDL
Br	(ug/m3)	BDL	BDL	BDL	BDL
Rb	(ug/m3)	BDL	BDL	BDL	BDL
Sr	(ug/m3)	BDL	BDL	BDL	BDL
Y	(ug/m3)	BDL	BDL	0.017	BDL
Mo	(ug/m3)	0.061	0.038	0.051	0.490
Pd	(ug/m3)	BDL	0.010	0.068	BDL
Cd	(ug/m3)	BDL	0.057	0.085	0.082
In	(ug/m3)	0.082	0.076	0.085	0.981
Sn	(ug/m3)	0.010	0.019	BDL	BDL
Sb	(ug/m3)	BDL	BDL	BDL	BDL
Ba	(ug/m3)	BDL	0.314	0.085	0.409
La	(ug/m3)	BDL	BDL	BDL	BDL
Pb	(ug/m3)	BDL	BDL	BDL	BDL
Tl	(ug/m3)	BDL	BDL	BDL	BDL

**Table 26: Metal mass concentrations – N353SW**

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	(ug/m3)	0.760	BDL	1.99	BDL
Al	(ug/m3)	1.03	BDL	2.608	8.92
Si	(ug/m3)	1.21	1.50	BDL	BDL
P	(ug/m3)	BDL	BDL	BDL	BDL
S	(ug/m3)	0.401	0.415	3.28	14.6
Cl	(ug/m3)	BDL	BDL	1.70	BDL
K	(ug/m3)	BDL	BDL	BDL	BDL
Ca	(ug/m3)	0.006789	0.068	0.050	1.35
Ti	(ug/m3)	0.034	0.045	0.101	0.225
V	(ug/m3)	BDL	BDL	0.017	BDL
Cr	(ug/m3)	0.014	0.181	0.118	0.824
Mn	(ug/m3)	0.006789	0.038	0.050	0.450
Fe	(ug/m3)	0.034	0.415	BDL	0.899
Co	(ug/m3)	BDL	BDL	0.034	0.225
Ni	(ug/m3)	BDL	0.030	BDL	0.300
Cu	(ug/m3)	BDL	0.008	0.034	0.075
Zn	(ug/m3)	0.068	0.083	0.135	0.674
Ga	(ug/m3)	BDL	BDL	0.034	BDL
Ge	(ug/m3)	0.014	0.023	BDL	0.824
As	(ug/m3)	BDL	BDL	BDL	BDL
Se	(ug/m3)	BDL	BDL	BDL	BDL
Br	(ug/m3)	BDL	BDL	BDL	BDL
Rb	(ug/m3)	BDL	BDL	BDL	BDL
Sr	(ug/m3)	BDL	BDL	BDL	BDL
Y	(ug/m3)	BDL	0.008	0.034	0.150
Mo	(ug/m3)	0.020	0.008	0.034	0.075
Pd	(ug/m3)	BDL	BDL	0.135	BDL
Cd	(ug/m3)	0.054	BDL	0.050	0.150
In	(ug/m3)	0.027	0.038	0.202	0.375
Sn	(ug/m3)	0.027	BDL	BDL	0.375
Sb	(ug/m3)	BDL	BDL	BDL	BDL
Ba	(ug/m3)	0.081	0.045	0.067	BDL
La	(ug/m3)	BDL	BDL	BDL	BDL
Pb	(ug/m3)	BDL	BDL	BDL	BDL
Tl	(ug/m3)	BDL	BDL	BDL	BDL

**Table 27: Metal mass concentrations – N695SW**

<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	(ug/m3)	0.571	1.17	BDL	11.3
Al	(ug/m3)	BDL	1.48	3.38	BDL
Si	(ug/m3)	BDL	2.12	BDL	BDL
P	(ug/m3)	BDL	BDL	BDL	BDL
S	(ug/m3)	0.750	2.07	5.94	14.7
Cl	(ug/m3)	BDL	BDL	BDL	BDL
K	(ug/m3)	BDL	BDL	BDL	BDL
Ca	(ug/m3)	0.027	0.154	0.305	0.809
Ti	(ug/m3)	BDL	0.054	BDL	BDL
V	(ug/m3)	0.007	BDL	0.015	BDL
Cr	(ug/m3)	0.060	0.355	1.72	2.63
Mn	(ug/m3)	0.027	0.093	0.289	0.742
Fe	(ug/m3)	0.086	0.371	0.411	0.472
Co	(ug/m3)	BDL	0.008	0.107	0.067
Ni	(ug/m3)	0.007	0.031	0.213	0.405
Cu	(ug/m3)	BDL	0.023	BDL	BDL
Zn	(ug/m3)	0.007	0.270	0.015	0.809
Ga	(ug/m3)	0.126	0.054	BDL	0.472
Ge	(ug/m3)	0.007	0.046	0.076	0.337
As	(ug/m3)	BDL	BDL	BDL	0.067
Se	(ug/m3)	BDL	BDL	BDL	BDL
Br	(ug/m3)	BDL	BDL	BDL	BDL
Rb	(ug/m3)	BDL	0.008	BDL	BDL
Sr	(ug/m3)	BDL	BDL	BDL	BDL
Y	(ug/m3)	BDL	BDL	BDL	0.067
Mo	(ug/m3)	0.013	0.023	0.076	0.270
Pd	(ug/m3)	BDL	0.008	0.030	0.202
Cd	(ug/m3)	0.033	BDL	0.046	0.202
In	(ug/m3)	0.053	0.100	0.183	0.539
Sn	(ug/m3)	0.020	BDL	0.122	0.067
Sb	(ug/m3)	BDL	BDL	BDL	BDL
Ba	(ug/m3)	0.073	0.124	0.274	0.067
La	(ug/m3)	BDL	BDL	BDL	BDL
Pb	(ug/m3)	BDL	BDL	BDL	BDL
Tl	(ug/m3)	BDL	BDL	BDL	BDL



**Table 28: Metal mass concentrations – N429WN**

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	(ug/m3)	1.13	BDL	2.49	11.9
Al	(ug/m3)	0.751	1.42	1.86	BDL
Si	(ug/m3)	BDL	BDL	BDL	BDL
P	(ug/m3)	BDL	BDL	BDL	BDL
S	(ug/m3)	BDL	BDL	3.51	2.44
Cl	(ug/m3)	BDL	BDL	BDL	BDL
K	(ug/m3)	BDL	BDL	BDL	BDL
Ca	(ug/m3)	0.033	BDL	BDL	BDL
Ti	(ug/m3)	0.033	0.023	BDL	BDL
V	(ug/m3)	BDL	BDL	BDL	BDL
Cr	(ug/m3)	0.020	BDL	BDL	0.198
Mn	(ug/m3)	BDL	BDL	BDL	0.264
Fe	(ug/m3)	0.199	0.068	BDL	0.132
Co	(ug/m3)	BDL	0.015	0.015	0.066
Ni	(ug/m3)	0.007	0.015	BDL	0.066
Cu	(ug/m3)	BDL	0.008	BDL	BDL
Zn	(ug/m3)	0.020	0.008	0.015	0.066
Ga	(ug/m3)	BDL	BDL	BDL	0.132
Ge	(ug/m3)	BDL	0.030	BDL	0.330
As	(ug/m3)	BDL	0.008	0.015	0.132
Se	(ug/m3)	BDL	BDL	BDL	BDL
Br	(ug/m3)	BDL	BDL	BDL	BDL
Rb	(ug/m3)	BDL	BDL	BDL	BDL
Sr	(ug/m3)	BDL	BDL	BDL	BDL
Y	(ug/m3)	BDL	0.015	0.015	BDL
Mo	(ug/m3)	BDL	0.015	0.015	0.198
Pd	(ug/m3)	0.007	0.023	BDL	0.198
Cd	(ug/m3)	0.033	BDL	0.046	0.396
In	(ug/m3)	0.053	0.038	0.015	0.462
Sn	(ug/m3)	BDL	0.023	BDL	0.264
Sb	(ug/m3)	BDL	BDL	BDL	BDL
Ba	(ug/m3)	BDL	BDL	0.245	BDL
La	(ug/m3)	BDL	BDL	BDL	BDL
Pb	(ug/m3)	BDL	BDL	BDL	BDL
Tl	(ug/m3)	BDL	BDL	BDL	BDL

**Table 29: Metal Emission Indices – N435WN**

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	g/kgfuel	BDL	1.42E-04	BDL	BDL
Al	g/kgfuel	BDL	BDL	BDL	BDL
Si	g/kgfuel	BDL	BDL	BDL	BDL
P	g/kgfuel	BDL	BDL	BDL	BDL
S	g/kgfuel	BDL	5.43E-06	2.10E-05	BDL
Cl	g/kgfuel	BDL	BDL	3.58E-05	BDL
K	g/kgfuel	BDL	BDL	BDL	BDL
Ca	g/kgfuel	6.69E-06	9.96E-06	6.18E-06	BDL
Ti	g/kgfuel	5.35E-06	9.05E-07	4.94E-06	BDL
V	g/kgfuel	BDL	9.05E-07	BDL	5.09E-06
Cr	g/kgfuel	5.22E-05	3.62E-05	1.56E-04	2.09E-04
Mn	g/kgfuel	6.69E-06	4.53E-06	2.35E-05	2.04E-05
Fe	g/kgfuel	2.94E-05	1.54E-05	1.73E-05	7.64E-05
Co	g/kgfuel	2.68E-06	BDL	BDL	BDL
Ni	g/kgfuel	5.35E-06	4.53E-06	3.71E-06	1.02E-05
Cu	g/kgfuel	BDL	BDL	BDL	BDL
Zn	g/kgfuel	BDL	3.62E-06	BDL	BDL
Ga	g/kgfuel	1.74E-05	4.53E-06	6.18E-06	7.64E-05
Ge	g/kgfuel	BDL	1.81E-06	BDL	BDL
As	g/kgfuel	1.34E-06	BDL	BDL	BDL
Se	g/kgfuel	BDL	BDL	BDL	BDL
Br	g/kgfuel	BDL	BDL	BDL	BDL
Rb	g/kgfuel	BDL	BDL	BDL	BDL
Sr	g/kgfuel	BDL	BDL	BDL	BDL
Y	g/kgfuel	BDL	BDL	1.24E-06	BDL
Mo	g/kgfuel	8.03E-06	3.62E-06	3.71E-06	3.05E-05
Pd	g/kgfuel	BDL	9.05E-07	4.94E-06	BDL
Cd	g/kgfuel	BDL	5.43E-06	6.18E-06	5.09E-06
In	g/kgfuel	1.07E-05	7.24E-06	6.18E-06	6.11E-05
Sn	g/kgfuel	1.34E-06	1.81E-06	BDL	BDL
Sb	g/kgfuel	BDL	BDL	BDL	BDL
Ba	g/kgfuel	BDL	2.99E-05	6.18E-06	2.55E-05
La	g/kgfuel	BDL	BDL	BDL	BDL
Pb	g/kgfuel	BDL	BDL	BDL	BDL
Tl	g/kgfuel	BDL	BDL	BDL	BDL

**Table 30: Metal Emission Indices – N353SW**

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	g/kgfuel	4.69E-05	BDL	8.97E-05	BDL
Al	g/kgfuel	6.32E-05	BDL	1.18E-04	3.40E-04
Si	g/kgfuel	7.45E-05	8.30E-05	BDL	BDL
P	g/kgfuel	BDL	BDL	BDL	BDL
S	g/kgfuel	2.47E-05	2.29E-05	1.48E-04	5.58E-04
Cl	g/kgfuel	BDL	BDL	7.68E-05	BDL
K	g/kgfuel	BDL	BDL	BDL	BDL
Ca	g/kgfuel	4.19E-07	3.75E-06	2.28E-06	5.15E-05
Ti	g/kgfuel	2.09E-06	2.50E-06	4.56E-06	8.58E-06
V	g/kgfuel	BDL	BDL	7.61E-07	BDL
Cr	g/kgfuel	8.37E-07	1.00E-05	5.32E-06	3.14E-05
Mn	g/kgfuel	4.19E-07	2.09E-06	2.28E-06	1.72E-05
Fe	g/kgfuel	2.09E-06	2.29E-05	BDL	3.43E-05
Co	g/kgfuel	BDL	BDL	1.52E-06	8.58E-06
Ni	g/kgfuel	BDL	1.67E-06	BDL	1.14E-05
Cu	g/kgfuel	BDL	4.17E-07	1.52E-06	2.86E-06
Zn	g/kgfuel	4.19E-06	4.59E-06	6.08E-06	2.57E-05
Ga	g/kgfuel	BDL	0.00E+00	1.52E-06	0.00E+00
Ge	g/kgfuel	8.37E-07	1.25E-06	0.00E+00	3.14E-05
As	g/kgfuel	BDL	BDL	BDL	BDL
Se	g/kgfuel	BDL	BDL	BDL	BDL
Br	g/kgfuel	BDL	BDL	BDL	BDL
Rb	g/kgfuel	BDL	BDL	BDL	BDL
Sr	g/kgfuel	BDL	BDL	BDL	BDL
Y	g/kgfuel	BDL	4.17E-07	1.52E-06	5.72E-06
Mo	g/kgfuel	1.26E-06	4.17E-07	1.52E-06	2.86E-06
Pd	g/kgfuel	BDL	BDL	6.08E-06	BDL
Cd	g/kgfuel	3.35E-06	BDL	2.28E-06	5.72E-06
In	g/kgfuel	1.67E-06	2.09E-06	9.13E-06	1.43E-05
Sn	g/kgfuel	1.67E-06	BDL	BDL	1.43E-05
Sb	g/kgfuel	BDL	BDL	BDL	BDL
Ba	g/kgfuel	5.02E-06	2.50E-06	3.04E-06	BDL
La	g/kgfuel	BDL	BDL	BDL	BDL
Pb	g/kgfuel	BDL	BDL	BDL	BDL
Tl	g/kgfuel	BDL	BDL	BDL	BDL

**Table 31: Metal Emission Indices – N695SW**

<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
Mg	g/kgfuel	5.56E-05	1.07E-04	BDL	6.18E-04
Al	g/kgfuel	BDL	1.35E-04	2.79E-04	BDL
Si	g/kgfuel	BDL	1.94E-04	BDL	BDL
P	g/kgfuel	BDL	BDL	BDL	BDL
S	g/kgfuel	7.30E-05	1.89E-04	4.89E-04	8.01E-04
Cl	g/kgfuel	BDL	BDL	BDL	BDL
K	g/kgfuel	BDL	BDL	BDL	BDL
Ca	g/kgfuel	2.58E-06	1.41E-05	2.51E-05	4.41E-05
Ti	g/kgfuel	BDL	4.94E-06	BDL	BDL
V	g/kgfuel	6.46E-07	BDL	1.25E-06	BDL
Cr	g/kgfuel	5.81E-06	3.24E-05	1.42E-04	1.43E-04
Mn	g/kgfuel	2.58E-06	8.46E-06	2.38E-05	4.04E-05
Fe	g/kgfuel	8.40E-06	3.39E-05	3.39E-05	2.57E-05
Co	g/kgfuel	BDL	7.05E-07	8.78E-06	3.68E-06
Ni	g/kgfuel	6.46E-07	2.82E-06	1.76E-05	2.21E-05
Cu	g/kgfuel	BDL	2.12E-06	BDL	BDL
Zn	g/kgfuel	6.46E-07	2.47E-05	1.25E-06	4.41E-05
Ga	g/kgfuel	1.23E-05	4.94E-06	0.00E+00	2.57E-05
Ge	g/kgfuel	6.46E-07	4.23E-06	6.27E-06	1.84E-05
As	g/kgfuel	BDL	BDL	BDL	3.68E-06
Se	g/kgfuel	BDL	BDL	BDL	BDL
Br	g/kgfuel	BDL	BDL	BDL	BDL
Rb	g/kgfuel	BDL	7.05E-07	BDL	BDL
Sr	g/kgfuel	BDL	BDL	BDL	BDL
Y	g/kgfuel	BDL	BDL	BDL	3.68E-06
Mo	g/kgfuel	1.29E-06	2.12E-06	6.27E-06	1.47E-05
Pd	g/kgfuel	BDL	7.05E-07	2.51E-06	1.10E-05
Cd	g/kgfuel	3.23E-06	BDL	3.76E-06	1.10E-05
In	g/kgfuel	5.17E-06	9.17E-06	1.51E-05	2.94E-05
Sn	g/kgfuel	1.94E-06	BDL	1.00E-05	3.68E-06
Sb	g/kgfuel	BDL	BDL	BDL	BDL
Ba	g/kgfuel	7.11E-06	1.13E-05	2.26E-05	3.68E-06
La	g/kgfuel	BDL	BDL	BDL	BDL
Pb	g/kgfuel	BDL	BDL	BDL	BDL
Tl	g/kgfuel	BDL	BDL	BDL	BDL

**Table 32: Metal Emission Indices – N429WN**

<b>N429WN</b>		<b>Mode 1</b>	<b>Mode 2</b>	<b>Mode 3</b>	<b>Mode 4</b>
Mg	g/kgfuel	5.20E-05	BDL	1.11E-04	4.38E-04
Al	g/kgfuel	3.45E-05	8.05E-05	8.26E-05	BDL
Si	g/kgfuel	BDL	BDL	BDL	BDL
P	g/kgfuel	BDL	BDL	BDL	BDL
S	g/kgfuel	BDL	BDL	1.56E-04	9.01E-05
Cl	g/kgfuel	BDL	BDL	BDL	BDL
K	g/kgfuel	BDL	BDL	BDL	BDL
Ca	g/kgfuel	1.53E-06	BDL	BDL	BDL
Ti	g/kgfuel	1.53E-06	1.29E-06	BDL	BDL
V	g/kgfuel	BDL	BDL	BDL	BDL
Cr	g/kgfuel	9.17E-07	BDL	BDL	7.30E-06
Mn	g/kgfuel	BDL	BDL	BDL	9.74E-06
Fe	g/kgfuel	9.17E-06	3.87E-06	BDL	4.87E-06
Co	g/kgfuel	BDL	8.61E-07	6.83E-07	2.43E-06
Ni	g/kgfuel	3.06E-07	8.61E-07	BDL	2.43E-06
Cu	g/kgfuel	BDL	4.31E-07	BDL	BDL
Zn	g/kgfuel	9.17E-07	4.31E-07	6.83E-07	2.43E-06
Ga	g/kgfuel	BDL	BDL	BDL	4.87E-06
Ge	g/kgfuel	BDL	1.72E-06	BDL	1.22E-05
As	g/kgfuel	BDL	4.31E-07	6.83E-07	4.87E-06
Se	g/kgfuel	BDL	BDL	BDL	BDL
Br	g/kgfuel	BDL	BDL	BDL	BDL
Rb	g/kgfuel	BDL	BDL	BDL	BDL
Sr	g/kgfuel	BDL	BDL	BDL	BDL
Y	g/kgfuel	BDL	8.61E-07	6.83E-07	BDL
Mo	g/kgfuel	BDL	8.61E-07	6.83E-07	7.30E-06
Pd	g/kgfuel	3.06E-07	1.29E-06	BDL	7.30E-06
Cd	g/kgfuel	1.53E-06	BDL	2.05E-06	1.46E-05
In	g/kgfuel	2.44E-06	2.15E-06	6.83E-07	1.70E-05
Sn	g/kgfuel	BDL	1.29E-06	BDL	9.74E-06
Sb	g/kgfuel	BDL	BDL	BDL	BDL
Ba	g/kgfuel	BDL	BDL	1.09E-05	BDL
La	g/kgfuel	BDL	BDL	BDL	BDL
Pb	g/kgfuel	BDL	BDL	BDL	BDL
Tl	g/kgfuel	BDL	BDL	BDL	BDL

The metals were determined by the South Coast AQMD who provided the following detection limits for their analysis.

**Table 33: Limits of Detection for Metals by X-ray Fluorescence**

Element ( $\mu\text{g}/\text{filter}$ )			
<b>Mg</b>	1.200	<b>Ga</b>	0.425
<b>Al</b>	1.000	<b>Ge</b>	0.017
<b>Si</b>	1.200	<b>As</b>	0.003
<b>P</b>	0.204	<b>Se</b>	0.017
<b>S</b>	0.204	<b>Rb</b>	0.007
<b>Cl</b>	0.068	<b>Sr</b>	0.017
<b>K</b>	0.017	<b>Y</b>	0.003
<b>Ca</b>	0.017	<b>Mo</b>	0.017
<b>Ti</b>	0.051	<b>Pd</b>	0.026
<b>V</b>	0.020	<b>Cd</b>	0.017
<b>Cr</b>	0.017	<b>In</b>	0.017
<b>Mn</b>	0.009	<b>Sn</b>	0.026
<b>Fe</b>	0.007	<b>Sb</b>	0.024
<b>Co</b>	0.007	<b>Ba</b>	0.170
<b>Ni</b>	0.003	<b>La</b>	0.425
<b>Cu</b>	0.003	<b>Pb</b>	0.051
<b>Zn</b>	0.003	<b>Tl</b>	0.850

The lower detection limit for sulfur in terms of EI units (g/kg) is given in the Table 34.

**Table 34: Lower Detection Limit for Sulfur**

Aircraft	LDL Units	Mode1	Mode2	Mode3	Mode4
N435WN	(g/kg fuel)	2.27E-05	1.54E-05	2.10E-05	8.66E-05
N353SW	(g/kg fuel)	7.12E-06	7.09E-06	1.29E-05	4.86E-05
N695SW	(g/kg fuel)	1.10E-05	1.20E-05	2.13E-05	6.25E-05
N429WN	(g/kg fuel)	5.20E-06	7.32E-06	1.16E-05	4.14E-05

### 3.3.9 Ions

The Teflo filter samples from the starboard engine were analyzed for elements by x-ray and ions by ion chromatography. Using the x-ray values, we calculated that the water used for extraction needed to a minimum to obtain measurable values. It is noted that only sulfate ions were above the detection limits of the instrument and the extracted ions (<1 ppm in water) were very close to the lower detection limit of the instrument. Tables 35 and 36 summarize the sulfate (as Sulfur) mass concentrations and EIs measured, respectively.

**Table 35: Sulfate mass concentration ( $\mu\text{g}/\text{m}^3$ )**

Aircraft	Units	Mode1	Mode2	Mode3	Mode4
N435WN	$\mu\text{g}/\text{m}^3$	3.104133	2.399801	3.869629	15.44179
N353SW	$\mu\text{g}/\text{m}^3$	1.140132	1.506883	5.723966	28.61581
N695SW	$\mu\text{g}/\text{m}^3$	1.544406	2.640123	5.346368	22.32409
N429WN	$\mu\text{g}/\text{m}^3$	1.3945	1.216621	2.25667	42.22484


**Table 36: Sulfate (as Sulfur) Emission Indices**

Aircraft	Units	Mode 1	Mode 2	Mode 3	Mode 4
N435WN	EI(g/kg)	0.000346	0.000181	0.000398	0.006552
N353SW	EI(g/kg)	3.98E-05	5.24E-05	0.000363	0.006818
N695SW	EI(g/kg)	8.31E-05	0.000155	0.000559	0.006839
N429WN	EI(g/kg)	3.55E-05	4.36E-05	0.000128	0.008566

### 3.3.10 Mass Concentration Data

#### 3.3.10.1 Gas-phase Carbonyls

Based on APEX1, the formaldehyde concentration would be within a range of 5 to 15% of the total hydrocarbon concentrations at the lowest engine power conditions. Formaldehyde emissions were as expected and EI values were calculated using the  $\text{CO}_2$  values from adjacent probes. The relative carbonyl EI values are shown in Figure 53.

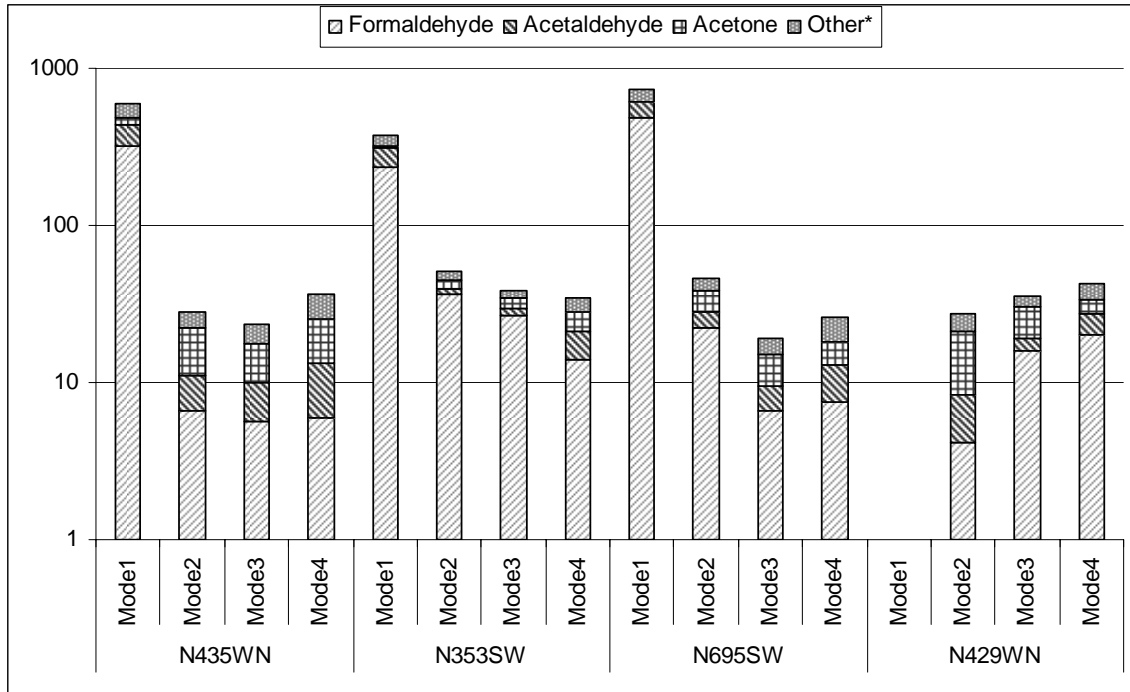

**Figure 53: Relative Carbonyl Emission Indices (mg/kg-fuel)**

*other\** refers to the sum of the EI's of Propionaldehyde, Crotonaldehyde, MethylAcrolein, Methyl Ethyl Ketone, Butyraldehyde, Benzaldehyde, Valeraldehyde, Tolualdehyde and Hexanaldehyde

The major three contributors to the carbonyl emissions are formaldehyde, acetaldehyde, and acetone. The analytical chromatogram showed an unknown compound co-eluding with acrolein, which bottlenecked the quantification of acrolein for the present study. The compound disappeared on refrigeration for extended periods of time. Formaldehyde and acetaldehyde are most dominant carbonyl species in the aircraft exhaust emissions.

Table 37 summarizes the mass concentration of carbonyls measured at the DNPH. The values are not corrected for ambient dilution.



**Table 37: Mass concentration of carbonyl species measured in sampler**

			Mode 1	Mode 2	Mode 3	Mode 4
N435WN	Formaldehyde	(ug/m3)	603	18.1	21.5	30.7
	Acetaldehyde	(ug/m3)	207	12.4	16.8	38.2
	Acetone	(ug/m3)	89.5	30.5	28.8	62.8
	Acrolein	(ug/m3)	N/A	N/A	N/A	N/A
	Propionaldehyde	(ug/m3)	55.6	BDL	BDL	BDL
	Crotonaldehyde	(ug/m3)	27.6	1.42	2.94	9.52
	Methylacrolein	(ug/m3)	12.7	6.27	6.21	14.2
	Methyl Ethyl Ketone	(ug/m3)	10.4	0.369	BDL	0.446
	Butyraldehyde	(ug/m3)	31.4	2.34	2.96	2.47
	Benzaldehyde	(ug/m3)	31.0	1.15	3.80	10.4
	Valeraldehyde	(ug/m3)	6.87	0.895	2.09	4.73
	Tolualdehyde	(ug/m3)	14.0	0.376	BDL	4.32
	Hexanaldehyde	(ug/m3)	24.2	3.39	4.17	12.4
N353SW	Formaldehyde	(ug/m3)	798	144	156	128
	Acetaldehyde	(ug/m3)	276	10.7	16.8	65.9
	Acetone	(ug/m3)	24.7	23.1	29.9	59.8
	Acrolein	(ug/m3)	N/A	N/A	N/A	N/A
	Propionaldehyde	(ug/m3)	5.53	1.74	BDL	BDL
	Crotonaldehyde	(ug/m3)	36.0	1.41	3.01	8.78
	Methylacrolein	(ug/m3)	0.947	3.88	5.44	16.7
	Methyl Ethyl Ketone	(ug/m3)	0.683	BDL	BDL	BDL
	Butyraldehyde	(ug/m3)	18.6	1.63	2.96	5.20
	Benzaldehyde	(ug/m3)	84.2	3.82	1.41	11.8
	Valeraldehyde	(ug/m3)	11.3	1.58	2.26	5.49
	Tolualdehyde	(ug/m3)	11.7	1.73	BDL	BDL
	Hexanaldehyde	(ug/m3)	14.6	7.39	7.00	13.4
N695SW	Formaldehyde	(ug/m3)	1171	60.6	28.3	50.3
	Acetaldehyde	(ug/m3)	312	16.9	12.0	36.7
	Acetone	(ug/m3)	16.2	27.5	24.9	35.6
	Acrolein	(ug/m3)	N/A	N/A	N/A	N/A
	Propionaldehyde	(ug/m3)	65.5	1.89	BDL	BDL
	Crotonaldehyde	(ug/m3)	42.0	0.985	1.74	7.53
	Methylacrolein	(ug/m3)	1.40	3.95	3.12	11.0
	Methyl Ethyl Ketone	(ug/m3)	15.3	0.202	BDL	BDL
	Butyraldehyde	(ug/m3)	26.9	1.12	1.26	6.97
	Benzaldehyde	(ug/m3)	49.3	0.459	2.48	12.1
	Valeraldehyde	(ug/m3)	14.0	0.787	0.975	3.32
	Tolualdehyde	(ug/m3)	24.4	0.942	0.697	BDL
	Hexanaldehyde	(ug/m3)	29.0	10.8	5.94	10.8
N429WN	Formaldehyde	(ug/m3)	16.8	17.6	99.7	185
	Acetaldehyde	(ug/m3)	17.5	17.0	20.4	65.4
	Acetone	(ug/m3)	56.5	53.4	71.7	59.4
	Acrolein	(ug/m3)	N/A	N/A	N/A	N/A
	Propionaldehyde	(ug/m3)	2.42	2.24	6.11	30.9
	Crotonaldehyde	(ug/m3)	1.54	1.11	2.84	8.93
	Methylacrolein	(ug/m3)	12.4	10.3	9.89	11.6
	Methyl Ethyl Ketone	(ug/m3)	1.42	0.991	0.186	BDL
	Butyraldehyde	(ug/m3)	3.49	1.68	2.27	3.88
	Benzaldehyde	(ug/m3)	3.11	2.98	3.00	11.1
	Valeraldehyde	(ug/m3)	1.19	1.13	2.76	7.40
	Tolualdehyde	(ug/m3)	3.58	2.35	2.47	BDL
	Hexanaldehyde	(ug/m3)	3.23	3.31	5.42	10.1

### **3.3.10.2 Light Hydrocarbons from Thermal Desorption Tubes**

C<sub>4</sub>-C<sub>12</sub> hydrocarbon values were explored based on the concentrations measured from the Thermal Desorption Tubes (TDS) but the values were much lower than expected from APEX1 and other research. Tables 38-41, 42-45, and 46-49, summarize the mass concentration of alkenes, alkanes and aromatics, respectively, in the C<sub>4</sub>-C<sub>12</sub> range measured from the thermal desorption tubes. The mass concentrations in these tables were not corrected for ambient dilution since we could not determine the dilution ratio. Based on the measured concentrations being near typical ambient values, there is no appropriate method to scale these values to develop suitable emission factors.

C<sub>4</sub>-C<sub>12</sub> hydrocarbon mass concentrations were measured using TDS (Tables 38 – 49) which were located on the low flow side of the sampling system. The data presented are not reliable as the mass concentrations do not significantly exceed ambient levels. In the absence of a leak these concentrations would be expected to be higher and may have significantly exceeded ambient levels thereby enhancing their reliability.

### **3.3.10.3 C<sub>1</sub>-C<sub>8</sub> SUMMA Canister Analyses**

SUMMA canisters were collected at the light hydrocarbon manifold to provide the sole measurement of the C<sub>1</sub>-C<sub>4</sub> analyses, redundancy for measuring the C<sub>4</sub>-C<sub>8</sub> analyses including 1, 3-Butadiene and BTEX, and provide CO<sub>2</sub> concentrations to provide a confirming measurement of the values used in the dilution calculation. As with other samples, four samples were extracted for each aircraft test for a total of sixteen canister samples. These samples were forwarded to the outside laboratory for analysis of CO<sub>2</sub> and light hydrocarbon species. The plan was to determine the concentration of CO<sub>2</sub> in a first test and hydrocarbon species in a second test. The external laboratory measured CO<sub>2</sub> concentrations in eleven of the sixteen canisters at about the same value as used in the dilution calculations, and CO<sub>2</sub> less than detection limit for the remaining five analyses. For example, the CO<sub>2</sub> levels were below detection for the samples collected at the idle modes and for Mode 2 for N435WN and N353SW. For the second test of the hydrocarbons species in the SUMMA canisters, the laboratory reported that all hydrocarbon species were below detection limits. It is unclear as to what happened on the second test of the SUMMA canisters.

**Table 38: Alkene mass concentrations – N435WN**

*(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)*

N435WN		Mode 1	Mode 2	Mode 3	Mode 4
2-methylpropene	(ug/m3)	1.28	BDL	BDL	0.220
1-butene	(ug/m3)	1.30	0.250	0.107	4.38
t-2-butene	(ug/m3)	2.11	0.093	BDL	0.231
c-2-butene	(ug/m3)	1.21	BDL	BDL	3.08
1,3-butadiene	(ug/m3)	0.193	0.003	0.022	0.294
3-methyl-1-butene	(ug/m3)	0.097	BDL	0.508	0.254
1-pentene	(ug/m3)	BDL	BDL	0.015	BDL
2-methyl-1-butene	(ug/m3)	0.123	0.103	0.238	BDL
2-methyl-1,3-butadiene	(ug/m3)	BDL	0.045	0.037	0.693
t-2-pentene	(ug/m3)	0.301	0.004	BDL	BDL
3,3-dimethyl-1-butene	(ug/m3)	5.53	BDL	BDL	0.229
c-2-pentene	(ug/m3)	0.054	BDL	BDL	0.661
cyclopentene	(ug/m3)	0.133	0.248	BDL	BDL
4-methyl-1-pentene	(ug/m3)	0.259	0.041	0.086	N/A
3-methyl-1-pentene	(ug/m3)	0.365	BDL	0.051	5.65
2-methyl-2-butene	(ug/m3)	BDL	BDL	BDL	1.21
cyclopentadiene	(ug/m3)	BDL	BDL	BDL	0.412
4-methyl-c-2-pentene	(ug/m3)	0.059	BDL	0.031	0.072
4-methyl-t-2-pentene	(ug/m3)	0.021	BDL	BDL	0.304
2-methyl-1-pentene	(ug/m3)	0.990	BDL	BDL	0.072
1-hexene	(ug/m3)	0.147	0.082	5.64	0.237
t-3-hexene	(ug/m3)	0.093	BDL	BDL	BDL
c-3-hexene	(ug/m3)	0.055	BDL	BDL	0.057
t-2-hexene	(ug/m3)	BDL	BDL	BDL	0.351
3-methyl-t-2-pentene	(ug/m3)	0.309	BDL	0.039	BDL
2M-2-pentene	(ug/m3)	0.117	BDL	BDL	0.756
3-methylcyclopentene	(ug/m3)	BDL	BDL	BDL	BDL
c-2-hexene	(ug/m3)	0.100	BDL	0.028	0.275
3-methyl-c-2-pentene	(ug/m3)	0.043	BDL	BDL	2.21
3,4-dimethyl-1-pentene	(ug/m3)	0.029	BDL	0.023	0.709
3-M-1-hexene	(ug/m3)	BDL	BDL	BDL	N/A
cyclohexene	(ug/m3)	BDL	BDL	BDL	BDL
1-heptene	(ug/m3)	0.019	BDL	0.053	0.279
t-3-heptene	(ug/m3)	0.015	BDL	0.026	2.00
3-methyl-t-3-hexene	(ug/m3)	0.056	0.271	0.022	0.094
t-2-heptene	(ug/m3)	0.042	BDL	0.021	0.475
2-methyl-2-hexene	(ug/m3)	0.124	0.007	0.717	5.61
3-ethyl-c-2-pentene	(ug/m3)	0.022	BDL	0.101	0.200
2,4,4-trimethyl-1-pentene	(ug/m3)	0.091	0.036	0.028	0.145
2,3-dimethyl-2-pentene	(ug/m3)	0.111	BDL	0.036	0.181
c-2-heptene	(ug/m3)	0.031	BDL	0.008	0.075
1-octene	(ug/m3)	0.692	BDL	0.114	BDL
t-4-octene	(ug/m3)	BDL	BDL	0.067	BDL
t-2-octene	(ug/m3)	0.087	BDL	BDL	0.283

c-2-octene	(ug/m3)	0.134	BDL	BDL	0.058
1-nonene	(ug/m3)	0.159	BDL	0.042	5.09
1-butyne	(ug/m3)	1.94	BDL	BDL	BDL
2-butyne	(ug/m3)	BDL	0.085	0.012	BDL

**Table 39: Alkene mass concentrations – N353SW**

*(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)*

N353SW		Mode 1	Mode 2	Mode 3	Mode 4
2-methylpropene	(ug/m3)	1.03	BDL	BDL	7.10
1-butene	(ug/m3)	1.84	0.156	0.015	1.03
t-2-butene	(ug/m3)	0.829	0.010	BDL	0.116
c-2-butene	(ug/m3)	0.329	0.006	BDL	0.166
1,3-butadiene	(ug/m3)	0.307	0.026	0.088	0.119
3-methyl-1-butene	(ug/m3)	BDL	0.004	BDL	BDL
1-pentene	(ug/m3)	1.46	BDL	BDL	BDL
2-methyl-1-butene	(ug/m3)	1.41	BDL	BDL	N/A
2-methyl-1,3-butadiene	(ug/m3)	0.195	BDL	0.072	BDL
t-2-pentene	(ug/m3)	0.021	0.058	0.405	0.160
3,3-dimethyl-1-butene	(ug/m3)	0.257	BDL	0.040	0.187
c-2-pentene	(ug/m3)	0.025	0.018	0.099	N/A
cyclopentene	(ug/m3)	0.080	0.264	BDL	BDL
4-methyl-1-pentene	(ug/m3)	0.168	BDL	0.015	BDL
3-methyl-1-pentene	(ug/m3)	0.233	0.123	0.055	BDL
2-methyl-2-butene	(ug/m3)	0.029	1.24	0.021	0.825
cyclopentadiene	(ug/m3)	0.011	BDL	BDL	0.347
4-methyl-c-2-pentene	(ug/m3)	0.022	0.491	BDL	0.136
4-methyl-t-2-pentene	(ug/m3)	0.018	BDL	0.034	BDL
2-methyl-1-pentene	(ug/m3)	0.418	0.027	BDL	BDL
1-hexene	(ug/m3)	0.098	BDL	BDL	BDL
t-3-hexene	(ug/m3)	BDL	BDL	BDL	BDL
c-3-hexene	(ug/m3)	0.078	BDL	BDL	BDL
t-2-hexene	(ug/m3)	0.108	0.175	0.040	BDL
3-methyl-t-2-pentene	(ug/m3)	0.024	BDL	BDL	BDL
2M-2-pentene	(ug/m3)	0.079	0.017	BDL	BDL
3-methylcyclopentene	(ug/m3)	0.032	0.018	BDL	0.073
c-2-hexene	(ug/m3)	0.038	BDL	BDL	BDL
3-methyl-c-2-pentene	(ug/m3)	BDL	BDL	BDL	BDL
3,4-dimethyl-1-pentene	(ug/m3)	0.023	BDL	0.035	0.146
3-M-1-hexene	(ug/m3)	BDL	BDL	BDL	0.078
cyclohexene	(ug/m3)	BDL	BDL	BDL	BDL
1-heptene	(ug/m3)	0.105	BDL	0.022	BDL
t-3-heptene	(ug/m3)	0.030	0.021	BDL	BDL
3-methyl-t-3-hexene	(ug/m3)	BDL	0.022	BDL	BDL
t-2-heptene	(ug/m3)	BDL	0.055	BDL	BDL
2-methyl-2-hexene	(ug/m3)	BDL	BDL	0.025	BDL
3-ethyl-c-2-pentene	(ug/m3)	BDL	BDL	BDL	BDL
2,4,4-trimethyl-1-pentene	(ug/m3)	BDL	0.041	BDL	0.280
2,3-dimethyl-2-pentene	(ug/m3)	0.056	BDL	BDL	BDL
c-2-heptene	(ug/m3)	BDL	BDL	BDL	BDL
1-octene	(ug/m3)	0.642	0.007	BDL	0.076
t-4-octene	(ug/m3)	0.209	0.048	BDL	0.278
t-2-octene	(ug/m3)	BDL	0.014	0.086	BDL

c-2-octene	(ug/m3)	BDL	0.277	0.037	BDL
1-nonene	(ug/m3)	0.129	0.149	BDL	0.201
1-butyne	(ug/m3)	0.067	BDL	BDL	BDL
2-butyne	(ug/m3)	0.121	BDL	0.081	BDL

**Table 40: Alkene mass concentrations – N695SW**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

N695SW		Mode 1	Mode 2	Mode 3	Mode 4
2-methylpropene	(ug/m3)	14.0	BDL	BDL	BDL
1-butene	(ug/m3)	11.1	0.953	BDL	3.35
t-2-butene	(ug/m3)	3.93	0.156	BDL	0.225
c-2-butene	(ug/m3)	2.40	0.031	BDL	BDL
1,3-butadiene	(ug/m3)	0.168	0.297	BDL	0.246
3-methyl-1-butene	(ug/m3)	0.037	0.032	BDL	0.239
1-pentene	(ug/m3)	1.01	1.01	BDL	BDL
2-methyl-1-butene	(ug/m3)	0.226	0.639	BDL	BDL
2-methyl-1,3-butadiene	(ug/m3)	6.21	0.016	BDL	BDL
t-2-pentene	(ug/m3)	0.501	0.189	BDL	BDL
3,3-dimethyl-1-butene	(ug/m3)	0.559	0.073	BDL	BDL
c-2-pentene	(ug/m3)	0.059	0.063	BDL	BDL
cyclopentene	(ug/m3)	0.078	0.061	0.131	BDL
4-methyl-1-pentene	(ug/m3)	0.223	0.316	0.004	BDL
3-methyl-1-pentene	(ug/m3)	0.061	0.028	0.020	BDL
2-methyl-2-butene	(ug/m3)	0.764	0.058	BDL	BDL
cyclopentadiene	(ug/m3)	0.971	0.036	BDL	BDL
4-methyl-c-2-pentene	(ug/m3)	0.510	0.015	0.436	BDL
4-methyl-t-2-pentene	(ug/m3)	0.043	0.091	0.659	BDL
2-methyl-1-pentene	(ug/m3)	1.65	0.082	0.047	0.056
1-hexene	(ug/m3)	1.93	0.083	1.54	BDL
t-3-hexene	(ug/m3)	BDL	0.123	0.059	0.046
c-3-hexene	(ug/m3)	0.650	BDL	BDL	BDL
t-2-hexene	(ug/m3)	BDL	0.077	BDL	0.039
3-methyl-t-2-pentene	(ug/m3)	0.904	BDL	BDL	0.023
2M-2-pentene	(ug/m3)	0.037	BDL	BDL	0.037
3-methylcyclopentene	(ug/m3)	0.859	BDL	0.006	BDL
c-2-hexene	(ug/m3)	0.664	BDL	0.049	0.302
3-methyl-c-2-pentene	(ug/m3)	0.158	BDL	BDL	BDL
3,4-dimethyl-1-pentene	(ug/m3)	0.096	BDL	0.083	0.052
3-M-1-hexene	(ug/m3)	0.049	BDL	0.088	0.370
cyclohexene	(ug/m3)	BDL	BDL	BDL	BDL
1-heptene	(ug/m3)	0.239	0.083	0.156	0.220
t-3-heptene	(ug/m3)	0.208	0.096	0.021	BDL
3-methyl-t-3-hexene	(ug/m3)	0.026	0.113	0.046	0.362
t-2-heptene	(ug/m3)	0.369	BDL	0.070	0.094
2-methyl-2-hexene	(ug/m3)	0.101	0.282	0.023	0.131
3-ethyl-c-2-pentene	(ug/m3)	0.021	BDL	0.006	BDL
2,4,4-trimethyl-1-pentene	(ug/m3)	0.038	BDL	BDL	0.042
2,3-dimethyl-2-pentene	(ug/m3)	0.108	0.012	BDL	0.037
c-2-heptene	(ug/m3)	0.029	BDL	BDL	0.064
1-octene	(ug/m3)	6.85	0.017	0.115	BDL
t-4-octene	(ug/m3)	1.44	0.038	BDL	BDL
t-2-octene	(ug/m3)	0.104	BDL	BDL	10.17172

c-2-octene	(ug/m3)	1.07	BDL	BDL	0.035
1-nonene	(ug/m3)	2.67	0.015	BDL	0.322
1-butyne	(ug/m3)	0.633	0.141	N/A	1.660732
2-butyne	(ug/m3)	BDL	0.315	BDL	BDL



**Table 41: Alkene mass concentrations – N429WN**

*(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)*

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
2-methylpropene	(ug/m3)	8.30	BDL	0.076	BDL
1-butene	(ug/m3)	1.50	0.133	2.09	0.477
t-2-butene	(ug/m3)	BDL	0.025	0.161	1.23
c-2-butene	(ug/m3)	BDL	0.230	BDL	BDL
1,3-butadiene	(ug/m3)	BDL	0.026	0.311	0.047
3-methyl-1-butene	(ug/m3)	BDL	BDL	BDL	BDL
1-pentene	(ug/m3)	BDL	0.009	0.047	BDL
2-methyl-1-butene	(ug/m3)	BDL	0.044	0.070	0.067
2-methyl-1,3-butadiene	(ug/m3)	BDL	0.098	0.135	0.055
t-2-pentene	(ug/m3)	BDL	0.012	0.064	0.274
3,3-dimethyl-1-butene	(ug/m3)	BDL	0.010	0.031	0.030
c-2-pentene	(ug/m3)	BDL	0.014	0.020	0.186
cyclopentene	(ug/m3)	BDL	0.039	0.022	BDL
4-methyl-1-pentene	(ug/m3)	BDL	0.007	BDL	BDL
3-methyl-1-pentene	(ug/m3)	BDL	BDL	BDL	BDL
2-methyl-2-butene	(ug/m3)	BDL	1.85	0.016	0.056
cyclopentadiene	(ug/m3)	BDL	BDL	0.013	BDL
4-methyl-c-2-pentene	(ug/m3)	BDL	BDL	0.010	BDL
4-methyl-t-2-pentene	(ug/m3)	0.077	BDL	0.103	BDL
2-methyl-1-pentene	(ug/m3)	0.010	0.167	0.096	BDL
1-hexene	(ug/m3)	0.006	0.038	0.028	0.120
t-3-hexene	(ug/m3)	BDL	0.029	BDL	BDL
c-3-hexene	(ug/m3)	BDL	BDL	BDL	BDL
t-2-hexene	(ug/m3)	BDL	BDL	1.65	0.889
3-methyl-t-2-pentene	(ug/m3)	0.020	BDL	BDL	BDL
2M-2-pentene	(ug/m3)	BDL	0.010	BDL	BDL
3-methylcyclopentene	(ug/m3)	BDL	BDL	0.006	BDL
c-2-hexene	(ug/m3)	0.020	BDL	BDL	BDL
3-methyl-c-2-pentene	(ug/m3)	0.004	BDL	BDL	BDL
3,4-dimethyl-1-pentene	(ug/m3)	0.020	0.021	0.114	BDL
3-M-1-hexene	(ug/m3)	BDL	BDL	BDL	BDL
cyclohexene	(ug/m3)	BDL	BDL	BDL	BDL
1-heptene	(ug/m3)	N/A	BDL	0.015	BDL
t-3-heptene	(ug/m3)	0.504	BDL	0.016	BDL
3-methyl-t-3-hexene	(ug/m3)	0.031	0.016	0.031	0.270
t-2-heptene	(ug/m3)	0.138	BDL	BDL	BDL
2-methyl-2-hexene	(ug/m3)	N/A	BDL	0.018	BDL
3-ethyl-c-2-pentene	(ug/m3)	N/A	BDL	BDL	BDL
2,4,4-trimethyl-1-pentene	(ug/m3)	N/A	0.027	BDL	BDL
2,3-dimethyl-2-pentene	(ug/m3)	0.048	BDL	0.009	BDL
c-2-heptene	(ug/m3)	0.018	BDL	BDL	0.084
1-octene	(ug/m3)	0.054	BDL	0.026	BDL
t-4-octene	(ug/m3)	0.031	0.015	BDL	BDL
t-2-octene	(ug/m3)	N/A	BDL	BDL	BDL

c-2-octene	(ug/m3)	0.086	BDL	0.044	0.444
1-nonene	(ug/m3)	0.127	BDL	BDL	BDL
1-butyne	(ug/m3)	BDL	0.023	BDL	BDL
2-butyne	(ug/m3)	BDL	0.019	BDL	BDL

**Table 42: Alkane mass concentrations – N435WN**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
octane	(ug/m3)	0.057	BDL	BDL	0.081
2-methylpropane	(ug/m3)	2.28	BDL	BDL	BDL
butane	(ug/m3)	0.162	0.026	0.039	0.405
2,2-dimethylpropane	(ug/m3)	0.075	0.105	0.043	0.669
2-methylbutane	(ug/m3)	0.031	0.116	0.045	BDL
pentane	(ug/m3)	0.411	0.030	0.140	BDL
2,2-dimethylbutane	(ug/m3)	0.074	0.524	BDL	0.223
cyclopentane	(ug/m3)	1.79	BDL	0.085	BDL
2,3-dimethylbutane	(ug/m3)	0.204	0.027	0.076	BDL
2-methylpentane	(ug/m3)	0.026	BDL	0.021	0.076
3-methylpentane	(ug/m3)	0.088	0.044	BDL	0.920
hexane	(ug/m3)	0.241	BDL	BDL	0.489
methylcyclopentane	(ug/m3)	BDL	0.009	BDL	BDL
2,2-dimethylpentane	(ug/m3)	0.028	BDL	BDL	0.111
2,4-dimethylpentane	(ug/m3)	BDL	BDL	0.054	0.116
2,2,3-trimethylbutane	(ug/m3)	BDL	BDL	BDL	0.063
3,3-dimethylpentane	(ug/m3)	0.101	BDL	BDL	0.113
cyclohexane	(ug/m3)	BDL	BDL	BDL	0.248
2-methylhexane	(ug/m3)	BDL	0.051	0.043	0.679
2,3-dimethylpentane	(ug/m3)	0.025	0.005	0.038	0.246
3-methylhexane	(ug/m3)	BDL	0.007	0.097	N/A
c-1,3-dimethylcyclopentane	(ug/m3)	0.187	BDL	0.141	0.082
3-ethylpentane	(ug/m3)	BDL	0.004	0.019	0.553
t-1,2-dimethylcyclopentane	(ug/m3)	BDL	0.004	0.012	0.191
2,2,4-trimethylpentane (i-octane)	(ug/m3)	0.497	0.020	0.040	0.085
heptane	(ug/m3)	0.018	BDL	0.074	0.125
methylcyclohexane	(ug/m3)	0.038	BDL	0.013	N/A
2,4,4-trimethyl-2-pentene	(ug/m3)	0.035	0.006	0.028	BDL
2,2-dimethylhexane	(ug/m3)	0.078	BDL	0.069	BDL
2,5-dimethylhexane	(ug/m3)	0.128	BDL	0.164	BDL
2,4-dimethylhexane	(ug/m3)	0.137	BDL	BDL	0.078
3,3-dimethylhexane	(ug/m3)	0.303	BDL	0.022	0.134
2,3,4-trimethylpentane	(ug/m3)	0.348	BDL	0.026	0.228
2,3-dimethylhexane	(ug/m3)	0.138	BDL	0.020	BDL
2-methylheptane	(ug/m3)	0.083	BDL	BDL	0.280
4-methylheptane	(ug/m3)	BDL	BDL	0.010	0.233
3-methylheptane	(ug/m3)	0.039	BDL	0.018	1.22
1c,2t,3-trimethylcyclopentane	(ug/m3)	0.437	BDL	0.012	0.110
c-1,3-dimethylcyclohexane	(ug/m3)	0.044	BDL	BDL	0.129
t-1,4-dimethylcyclohexane	(ug/m3)	0.035	0.014	0.033	0.115
2,2,5-TM-hexane	(ug/m3)	BDL	BDL	BDL	0.330
t-1,3-dimethylcyclohexane	(ug/m3)	0.066	0.019	BDL	N/A
2,3,5-trimethylhexane	(ug/m3)	0.014	BDL	0.294	0.123
2,4-dimethylheptane	(ug/m3)	0.079	BDL	BDL	0.177
NN-DM-	(ug/m3)	0.007	BDL	BDL	0.027
c-1,2-dimethylcyclohexane	(ug/m3)	0.247	BDL	BDL	0.644
ethylcyclohexane	(ug/m3)	0.169	BDL	0.026	0.114
3,5-dimethylheptane	(ug/m3)	0.632	BDL	0.063	0.148
2,3-dimethylheptane	(ug/m3)	1.27	BDL	0.027	0.177
2-methyloctane	(ug/m3)	1.78	BDL	0.027	BDL
3-methyloctane	(ug/m3)	0.118	BDL	0.036	0.291
nonane	(ug/m3)	0.099	BDL	0.073	0.204
2,2-dimethyloctane	(ug/m3)	0.010	BDL	0.031	0.268
2,4-dimethyloctane	(ug/m3)	0.011	BDL	0.023	0.393
decane	(ug/m3)	0.385	0.024	0.435	0.971
undecane	(ug/m3)	0.234	BDL	0.079	N/A

**Table 43: Alkane mass concentrations – N353SW**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
octane	(ug/m3)	BDL	BDL	BDL	BDL
2-methylpropane	(ug/m3)	0.863	BDL	BDL	BDL
butane	(ug/m3)	0.311	0.023	0.011	0.157
2,2-dimethylpropane	(ug/m3)	0.013	0.018	BDL	0.089
2-methylbutane	(ug/m3)	1.00	BDL	0.050	BDL
pentane	(ug/m3)	0.204	BDL	BDL	4.02
2,2-dimethylbutane	(ug/m3)	0.023	0.731	BDL	BDL
cyclopentane	(ug/m3)	0.052	BDL	BDL	BDL
2,3-dimethylbutane	(ug/m3)	0.016	BDL	BDL	BDL
2-methylpentane	(ug/m3)	0.073	BDL	BDL	BDL
3-methylpentane	(ug/m3)	0.122	BDL	BDL	BDL
hexane	(ug/m3)	BDL	BDL	BDL	BDL
methylcyclopentane	(ug/m3)	BDL	BDL	BDL	BDL
2,2-dimethylpentane	(ug/m3)	BDL	BDL	0.069	BDL
2,4-dimethylpentane	(ug/m3)	BDL	0.545	BDL	BDL
2,2,3-trimethylbutane	(ug/m3)	BDL	0.014	BDL	0.786
3,3-dimethylpentane	(ug/m3)	0.042	0.018	BDL	BDL
cyclohexane	(ug/m3)	BDL	BDL	BDL	BDL
2-methylhexane	(ug/m3)	BDL	BDL	BDL	BDL
2,3-dimethylpentane	(ug/m3)	0.029	BDL	BDL	BDL
3-methylhexane	(ug/m3)	0.045	0.327	BDL	BDL
c-1,3-dimethylcyclopentane	(ug/m3)	0.094	0.020	BDL	BDL
3-ethylpentane	(ug/m3)	0.327	BDL	BDL	BDL
t-1,2-dimethylcyclopentane	(ug/m3)	BDL	BDL	BDL	BDL
2,2,4-trimethylpentane (i-octane)	(ug/m3)	BDL	BDL	0.022	BDL
heptane	(ug/m3)	0.094	BDL	0.023	0.082
methylcyclohexane	(ug/m3)	BDL	BDL	BDL	BDL
2,4,4-trimethyl-2-pentene	(ug/m3)	BDL	BDL	BDL	BDL
2,2-dimethylhexane	(ug/m3)	BDL	BDL	BDL	BDL
2,5-dimethylhexane	(ug/m3)	0.072	BDL	BDL	BDL
2,4-dimethylhexane	(ug/m3)	1.52	BDL	BDL	BDL
3,3-dimethylhexane	(ug/m3)	0.030	BDL	0.056	BDL
2,3,4-trimethylpentane	(ug/m3)	0.100	BDL	BDL	BDL
2,3-dimethylhexane	(ug/m3)	0.063	BDL	BDL	BDL
2-methylheptane	(ug/m3)	0.143	0.017	BDL	BDL
4-methylheptane	(ug/m3)	0.038	0.009	BDL	BDL
3-methylheptane	(ug/m3)	0.155	BDL	BDL	BDL
1c,2t,3-trimethylcyclopentane	(ug/m3)	0.290	BDL	0.217	BDL
c-1,3-dimethylcyclohexane	(ug/m3)	BDL	BDL	BDL	BDL
t-1,4-dimethylcyclohexane	(ug/m3)	BDL	0.049	BDL	BDL
2,2,5-TM-hexane	(ug/m3)	0.007	0.000	BDL	BDL
t-1,3-dimethylcyclohexane	(ug/m3)	0.125	0.129	BDL	BDL
2,3,5-trimethylhexane	(ug/m3)	0.025	0.014	0.014	BDL
2,4-dimethylheptane	(ug/m3)	0.121	BDL	0.014	BDL
NN-DM-	(ug/m3)	0.003	BDL	0.002	0.008
c-1,2-dimethylcyclohexane	(ug/m3)	0.045	0.006	BDL	BDL
ethylcyclohexane	(ug/m3)	0.078	0.014	BDL	0.243
3,5-dimethylheptane	(ug/m3)	0.223	0.010	BDL	0.137
2,3-dimethylheptane	(ug/m3)	1.14	BDL	BDL	0.194
2-methyloctane	(ug/m3)	0.025	BDL	BDL	BDL
3-methyloctane	(ug/m3)	0.128	BDL	BDL	0.398
nonane	(ug/m3)	0.058	BDL	BDL	0.178
2,2-dimethyloctane	(ug/m3)	0.100	0.012	BDL	BDL
2,4-dimethyloctane	(ug/m3)	0.050	0.008	BDL	BDL
decane	(ug/m3)	0.274	0.190	0.015	BDL
undecane	(ug/m3)	0.084	0.023	BDL	BDL

**Table 44: Alkane mass concentrations – N695SW**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
octane	(ug/m3)	0.135	0.037	BDL	BDL
2-methylpropane	(ug/m3)	0.630	BDL	BDL	BDL
butane	(ug/m3)	0.301	0.165	BDL	0.205
2,2-dimethylpropane	(ug/m3)	0.125	0.264	#N/A	1.58
2-methylbutane	(ug/m3)	0.137	0.755	BDL	BDL
pentane	(ug/m3)	1.50	0.040	BDL	BDL
2,2-dimethylbutane	(ug/m3)	0.010	0.037	0.109	BDL
cyclopentane	(ug/m3)	0.678	0.020	0.035	BDL
2,3-dimethylbutane	(ug/m3)	BDL	0.258	0.302	BDL
2-methylpentane	(ug/m3)	N/A	0.038	0.066	BDL
3-methylpentane	(ug/m3)	0.524	0.146	0.075	BDL
hexane	(ug/m3)	4.46	0.125	0.030	0.417
methylcyclopentane	(ug/m3)	0.108	0.135	0.063	0.068
2,2-dimethylpentane	(ug/m3)	0.455	BDL	0.115	0.233
2,4-dimethylpentane	(ug/m3)	0.061	BDL	BDL	0.117
2,2,3-trimethylbutane	(ug/m3)	0.012	0.108	0.021	0.026
3,3-dimethylpentane	(ug/m3)	0.022	BDL	0.261	BDL
cyclohexane	(ug/m3)	0.389	BDL	0.010	BDL
2-methylhexane	(ug/m3)	0.041	N/A	0.013	N/A
2,3-dimethylpentane	(ug/m3)	0.123	0.261	0.009	0.103
3-methylhexane	(ug/m3)	0.069	0.083	0.254	0.144
c-1,3-dimethylcyclopentane	(ug/m3)	0.145	BDL	0.143	0.106
3-ethylpentane	(ug/m3)	N/A	BDL	0.008	BDL
t-1,2-dimethylcyclopentane	(ug/m3)	0.280	BDL	0.040	0.215
2,2,4-trimethylpentane (i-octane)	(ug/m3)	0.021	0.089	0.268	N/A
heptane	(ug/m3)	0.012	0.113	0.082	0.022
methylcyclohexane	(ug/m3)	0.161	0.026	0.026	BDL
2,4,4-trimethyl-2-pentene	(ug/m3)	0.250	0.023	BDL	0.056
2,2-dimethylhexane	(ug/m3)	0.029	0.007	BDL	0.049
2,5-dimethylhexane	(ug/m3)	0.131	BDL	0.006	N/A
2,4-dimethylhexane	(ug/m3)	6.92	BDL	0.024	0.071
3,3-dimethylhexane	(ug/m3)	0.091	0.053	0.010	0.113
2,3,4-trimethylpentane	(ug/m3)	1.19	0.012	0.013	0.040
2,3-dimethylhexane	(ug/m3)	BDL	0.038	0.015	BDL
2-methylheptane	(ug/m3)	0.189	0.007	BDL	BDL
4-methylheptane	(ug/m3)	0.375	0.007	BDL	0.034
3-methylheptane	(ug/m3)	0.166	0.057	BDL	BDL
1c,2t,3-trimethylcyclopentane	(ug/m3)	0.189	0.035	BDL	BDL
c-1,3-dimethylcyclohexane	(ug/m3)	0.327	0.022	BDL	0.158
t-1,4-dimethylcyclohexane	(ug/m3)	N/A	0.010	0.032	BDL
2,2,5-TM-hexane	(ug/m3)	0.030	0.006	BDL	BDL
t-1,3-dimethylcyclohexane	(ug/m3)	0.156	BDL	BDL	BDL
2,3,5-trimethylhexane	(ug/m3)	0.127	0.309	0.077	0.519
2,4-dimethylheptane	(ug/m3)	0.456	0.011	BDL	0.076
NN-DM-	(ug/m3)	0.046	0.002	BDL	BDL
c-1,2-dimethylcyclohexane	(ug/m3)	0.055	0.015	BDL	BDL
ethylcyclohexane	(ug/m3)	1.03	0.024	BDL	BDL
3,5-dimethylheptane	(ug/m3)	1.46	BDL	0.037	BDL
2,3-dimethylheptane	(ug/m3)	0.347	BDL	BDL	BDL
2-methyloctane	(ug/m3)	1.42	BDL	BDL	BDL
3-methyloctane	(ug/m3)	BDL	0.040	BDL	BDL
nonane	(ug/m3)	0.180	0.177	BDL	BDL
2,2-dimethyloctane	(ug/m3)	0.060	0.055	BDL	0.046
2,4-dimethyloctane	(ug/m3)	0.251	0.044	BDL	BDL
decane	(ug/m3)	0.223	0.267	BDL	0.438
undecane	(ug/m3)	0.109	0.394	BDL	BDL

**Table 45: Alkane mass concentrations – N429WN**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
octane	(ug/m3)	0.179	BDL	BDL	BDL
2-methylpropane	(ug/m3)	3.95	BDL	BDL	0.237
butane	(ug/m3)	BDL	0.010	0.043	0.051
2,2-dimethylpropane	(ug/m3)	BDL	BDL	0.049	BDL
2-methylbutane	(ug/m3)	BDL	0.030	BDL	BDL
pentane	(ug/m3)	BDL	0.011	0.042	0.168
2,2-dimethylbutane	(ug/m3)	BDL	0.009	0.010	N
cyclopentane	(ug/m3)	BDL	0.053	0.022	0.161
2,3-dimethylbutane	(ug/m3)	BDL	BDL	BDL	0.048
2-methylpentane	(ug/m3)	0.101	BDL	BDL	BDL
3-methylpentane	(ug/m3)	0.006	0.026	0.035	BDL
hexane	(ug/m3)	0.280	0.040	0.024	BDL
methylcyclopentane	(ug/m3)	#N/A	BDL	BDL	BDL
2,2-dimethylpentane	(ug/m3)	0.010	BDL	BDL	BDL
2,4-dimethylpentane	(ug/m3)	0.021	0.047	BDL	BDL
2,2,3-trimethylbutane	(ug/m3)	BDL	BDL	0.020	BDL
3,3-dimethylpentane	(ug/m3)	BDL	BDL	0.157	BDL
cyclohexane	(ug/m3)	BDL	BDL	BDL	BDL
2-methylhexane	(ug/m3)	BDL	BDL	0.036	BDL
2,3-dimethylpentane	(ug/m3)	BDL	BDL	0.247	0.369
3-methylhexane	(ug/m3)	0.014	BDL	BDL	BDL
c-1,3-dimethylcyclopentane	(ug/m3)	#N/A	BDL	BDL	BDL
3-ethylpentane	(ug/m3)	#N/A	0.039	BDL	BDL
t-1,2-dimethylcyclopentane	(ug/m3)	#N/A	0.015	BDL	BDL
2,2,4-trimethylpentane (i-octane)	(ug/m3)	#N/A	0.010	BDL	BDL
heptane	(ug/m3)	#N/A	0.010	0.021	0.078
methylcyclohexane	(ug/m3)	0.010	0.191	0.009	BDL
2,4,4-trimethyl-2-pentene	(ug/m3)	0.109	BDL	BDL	BDL
2,2-dimethylhexane	(ug/m3)	#N/A	BDL	BDL	BDL
2,5-dimethylhexane	(ug/m3)	0.066	BDL	BDL	BDL
2,4-dimethylhexane	(ug/m3)	0.052	BDL	BDL	BDL
3,3-dimethylhexane	(ug/m3)	0.077	BDL	BDL	BDL
2,3,4-trimethylpentane	(ug/m3)	0.024	BDL	BDL	0.026
2,3-dimethylhexane	(ug/m3)	#N/A	BDL	BDL	BDL
2-methylheptane	(ug/m3)	0.207	BDL	BDL	BDL
4-methylheptane	(ug/m3)	0.079	BDL	BDL	BDL
3-methylheptane	(ug/m3)	0.018	BDL	BDL	BDL
1c,2t,3-trimethylcyclopentane	(ug/m3)	0.479	BDL	BDL	BDL
c-1,3-dimethylcyclohexane	(ug/m3)	0.018	BDL	BDL	BDL
t-1,4-dimethylcyclohexane	(ug/m3)	0.023	0.161	BDL	0.043
2,2,5-TM-hexane	(ug/m3)	0.065	BDL	0.002	0.005
t-1,3-dimethylcyclohexane	(ug/m3)	0.165	BDL	BDL	BDL
2,3,5-trimethylhexane	(ug/m3)	0.016	0.108	0.249	BDL
2,4-dimethylheptane	(ug/m3)	0.019	BDL	BDL	BDL
NN-DM-	(ug/m3)	0.003	BDL	BDL	BDL
c-1,2-dimethylcyclohexane	(ug/m3)	0.275	BDL	BDL	BDL
ethylcyclohexane	(ug/m3)	0.203	BDL	BDL	BDL
3,5-dimethylheptane	(ug/m3)	0.068	0.019	BDL	BDL
2,3-dimethylheptane	(ug/m3)	0.076	BDL	BDL	BDL
2-methyloctane	(ug/m3)	0.047	BDL	BDL	BDL
3-methyloctane	(ug/m3)	0.019	BDL	BDL	BDL
nonane	(ug/m3)	0.032	BDL	BDL	BDL
2,2-dimethyloctane	(ug/m3)	0.011	0.055	BDL	BDL
2,4-dimethyloctane	(ug/m3)	0.014	0.069	BDL	BDL
decane	(ug/m3)	0.022	BDL	0.086	BDL
undecane	(ug/m3)	0.315	0.027	BDL	BDL

**Table 46: Aromatic mass concentrations – N435WN**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N435WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
benzene	(ug/m3)	0.640	0.015	0.056	8.19
toluene	(ug/m3)	0.480	0.030	0.054	7.31
ethylbenzene	(ug/m3)	0.065	BDL	0.021	0.277
1,2-DM-benzene	(ug/m3)	0.135	0.025	0.018	2.44
1,3-DM-benzene	(ug/m3)	0.003	BDL	0.003	0.195
styrene	(ug/m3)	0.015	BDL	0.049	4.69
i-propylbenzene	(ug/m3)	0.068	BDL	0.021	0.276
benzaldehyde	(ug/m3)	0.197	BDL	0.094	0.098
n-propylbenzene	(ug/m3)	0.676	BDL	0.060	0.528
1-ethyl-3-methylbenzene	(ug/m3)	0.110	BDL	0.040	0.343
1E-4M-benzene	(ug/m3)	0.182	BDL	0.035	14.85
1,3,5-trimethyl benzene	(ug/m3)	0.060	BDL	0.022	0.281
1E-2M-benzene	(ug/m3)	0.114	BDL	0.035	0.135
1,2,4-TMB	(ug/m3)	0.182	0.030	0.031	1.01
2M-propylbenzene	(ug/m3)	0.072	BDL	0.079	1.43
s-butylbenzene	(ug/m3)	0.113	BDL	0.007	0.691
1M-3-(1-methylethyl)-benzene	(ug/m3)	0.115	0.011	0.021	0.802
1,2,3-trimethylbenzene	(ug/m3)	0.134	BDL	0.021	2.71
1M-4-(1-methylethyl)-benzene	(ug/m3)	0.226	BDL	0.025	BDL
2,3-dihydro-1H-indene	(ug/m3)	0.977	BDL	0.058	0.794
1M-2-(1-methylethyl)-benzene	(ug/m3)	0.310	0.027	0.025	4.36
1,3-diethylbenzene	(ug/m3)	0.180	BDL	0.012	0.532
1,4-DE-benzene	(ug/m3)	0.211	BDL	0.036	2.09
1-methyl-3-n-propylbenzene	(ug/m3)	0.207	0.011	0.206	13.2
1-methyl-4-n-propylbenzene	(ug/m3)	0.204	0.022	#N/A	2.13
1,2-diethylbenzene	(ug/m3)	0.256	0.031	#N/A	5.84
1M-2P-benzene	(ug/m3)	0.147	BDL	0.079	15.4
1,4-dimethyl-2-ethylbenzene	(ug/m3)	0.476	0.015	0.052	7.48
1,3-dimethyl-4-ethylbenzene	(ug/m3)	0.168	BDL	0.032	0.913
1,2-dimethyl-4-ethylbenzene	(ug/m3)	0.183	BDL	0.066	1.16
1,3-dimethyl-2-ethylbenzene	(ug/m3)	0.223	0.033	0.024	73.8
1,2-dimethyl-3-ethylbenzene	(ug/m3)	0.561	BDL	0.025	4.11
1,2,4,5-tetM-benzene	(ug/m3)	0.143	0.013	0.016	#N/A
2-methyl-butylbenzene	(ug/m3)	0.272	0.032	0.038	2.96
1,2,3,5-tetM-benzene	(ug/m3)	0.476	0.014	0.062	17.2
tert-1-butyl-2-methyl-benzene	(ug/m3)	0.041	0.016	0.028	1.50
1,2,3,4-tetM-benzene	(ug/m3)	0.039	BDL	0.009	1.50
n-pent-benzene	(ug/m3)	0.454	0.048	0.010	2.43
tert-1-butyl-3,5-dimethyl-benzene	(ug/m3)	0.111	0.010	0.055	5.86

**Table 47: Aromatic mass concentrations – N353SW**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N353SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
benzene	(ug/m3)	0.053	0.155	0.027	BDL
toluene	(ug/m3)	0.065	0.154	0.025	BDL
ethylbenzene	(ug/m3)	BDL	BDL	BDL	BDL
1,2-DM-benzene	(ug/m3)	1.85	0.019	0.477	BDL
1,3-DM-benzene	(ug/m3)	0.216	0.004	0.002	BDL
styrene	(ug/m3)	0.062	0.236	BDL	BDL
i-propylbenzene	(ug/m3)	0.018	0.023	BDL	0.074
benzaldehyde	(ug/m3)	0.158	0.016	BDL	BDL
n-propylbenzene	(ug/m3)	0.382	0.018	BDL	BDL
1-ethyl-3-methylbenzene	(ug/m3)	0.043	0.009	BDL	BDL
1E-4M-benzene	(ug/m3)	0.174	0.012	BDL	BDL
1,3,5-trimethyl benzene	(ug/m3)	0.031	0.007	BDL	BDL
1E-2M-benzene	(ug/m3)	0.126	0.017	0.264	BDL
1,2,4-TMB	(ug/m3)	0.314	0.016	0.221	BDL
2M-propylbenzene	(ug/m3)	0.162	0.045	BDL	BDL
s-butylbenzene	(ug/m3)	0.056	0.092	BDL	BDL
1M-3-(1-methylethyl)-benzene	(ug/m3)	0.078	BDL	BDL	BDL
1,2,3-trimethylbenzene	(ug/m3)	0.090	BDL	BDL	BDL
1M-4-(1-methylethyl)-benzene	(ug/m3)	0.120	0.016	BDL	BDL
2,3-dihydro-1H-indene	(ug/m3)	0.493	BDL	BDL	BDL
1M-2-(1-methylethyl)-benzene	(ug/m3)	0.108	0.080	BDL	BDL
1,3-diethylbenzene	(ug/m3)	0.108	0.008	BDL	BDL
1,4-DE-benzene	(ug/m3)	0.090	0.012	BDL	BDL
1-methyl-3-n-propylbenzene	(ug/m3)	0.079	0.032	BDL	BDL
1-methyl-4-n-propylbenzene	(ug/m3)	0.115	0.013	BDL	BDL
1,2-diethylbenzene	(ug/m3)	#N/A	0.043	BDL	BDL
1M-2P-benzene	(ug/m3)	#N/A	0.058	BDL	BDL
1,4-dimethyl-2-ethylbenzene	(ug/m3)	0.300	0.008	BDL	BDL
1,3-dimethyl-4-ethylbenzene	(ug/m3)	0.068	0.040	BDL	BDL
1,2-dimethyl-4-ethylbenzene	(ug/m3)	0.135	0.038	0.084	BDL
1,3-dimethyl-2-ethylbenzene	(ug/m3)	0.037	0.050	BDL	BDL
1,2-dimethyl-3-ethylbenzene	(ug/m3)	0.162	0.181	BDL	BDL
1,2,4,5-tetM-benzene	(ug/m3)	0.045	0.017	BDL	BDL
2-methyl-butylbenzene	(ug/m3)	0.055	0.029	BDL	BDL
1,2,3,5-tetM-benzene	(ug/m3)	0.143	0.050	0.135	BDL
tert-1-butyl-2-methyl-benzene	(ug/m3)	0.013	0.025	BDL	BDL
1,2,3,4-tetM-benzene	(ug/m3)	0.037	0.052	BDL	BDL
n-pent-benzene	(ug/m3)	0.107	0.076	BDL	BDL
tert-1-butyl-3,5-dimethyl-benzene	(ug/m3)	0.056	0.091	0.092	BDL



**Table 48: Aromatic mass concentrations – N695SW**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N695SW</b>		Mode 1	Mode 2	Mode 3	Mode 4
benzene	(ug/m3)	1.52	0.325	0.044	0.151
toluene	(ug/m3)	0.732	0.407	0.056	0.108
ethylbenzene	(ug/m3)	0.222	0.170	BDL	BDL
1,2-DM-benzene	(ug/m3)	8.44	0.575	BDL	BDL
1,3-DM-benzene	(ug/m3)	0.153	0.054	0.001	0.004
styrene	(ug/m3)	0.230	0.022	0.014	0.149
i-propylbenzene	(ug/m3)	0.304	0.050	BDL	BDL
benzaldehyde	(ug/m3)	0.055	0.046	BDL	BDL
n-propylbenzene	(ug/m3)	0.357	0.081	BDL	0.110
1-ethyl-3-methylbenzene	(ug/m3)	0.072	0.097	BDL	0.119
1E-4M-benzene	(ug/m3)	0.064	0.159	BDL	0.187
1,3,5-trimethyl benzene	(ug/m3)	0.124	0.136	BDL	0.088
1E-2M-benzene	(ug/m3)	0.212	0.128	0.015	0.078
1,2,4-TMB	(ug/m3)	0.240	0.080	0.032	N/A
2M-propylbenzene	(ug/m3)	0.545	0.319	BDL	0.089
s-butylbenzene	(ug/m3)	0.015	0.400	BDL	BDL
1M-3-(1-methylethyl)-benzene	(ug/m3)	0.046	0.092	BDL	BDL
1,2,3-trimethylbenzene	(ug/m3)	0.025	0.158	BDL	BDL
1M-4-(1-methylethyl)-benzene	(ug/m3)	0.121	BDL	BDL	0.228
2,3-dihydro-1H-indene	(ug/m3)	0.306	BDL	BDL	BDL
1M-2-(1-methylethyl)-benzene	(ug/m3)	0.069	BDL	BDL	0.087
1,3-diethylbenzene	(ug/m3)	0.151	0.066	BDL	0.057
1,4-DE-benzene	(ug/m3)	0.091	0.229	BDL	0.112
1-methyl-3-n-propylbenzene	(ug/m3)	0.093	0.246	BDL	0.164
1-methyl-4-n-propylbenzene	(ug/m3)	0.281	0.065	BDL	0.074
1,2-diethylbenzene	(ug/m3)	0.152	0.018	BDL	BDL
1M-2P-benzene	(ug/m3)	0.098	0.168	BDL	BDL
1,4-dimethyl-2-ethylbenzene	(ug/m3)	0.218	0.014	BDL	BDL
1,3-dimethyl-4-ethylbenzene	(ug/m3)	0.063	0.026	BDL	BDL
1,2-dimethyl-4-ethylbenzene	(ug/m3)	0.109	0.089	BDL	0.202
1,3-dimethyl-2-ethylbenzene	(ug/m3)	0.159	0.451	BDL	BDL
1,2-dimethyl-3-ethylbenzene	(ug/m3)	0.320	0.059	BDL	BDL
1,2,4,5-tetM-benzene	(ug/m3)	0.047	0.243	BDL	0.076
2-methyl-butylbenzene	(ug/m3)	0.062	0.429	BDL	BDL
1,2,3,5-tetM-benzene	(ug/m3)	0.119	0.467	BDL	0.572
tert-1-butyl-2-methyl-benzene	(ug/m3)	0.020	0.575	0.028	0.043
1,2,3,4-tetM-benzene	(ug/m3)	0.038	0.660	BDL	0.153
n-pent-benzene	(ug/m3)	0.200	0.610	BDL	0.047
tert-1-butyl-3,5-dimethyl-benzene	(ug/m3)	0.208	0.926	BDL	0.100

**Table 49: Aromatic mass concentrations - N429WN**

(\*\* Note: data in this table may not be useful since they were measured using TDS on the low flow side of the sampling system where a leak occurred\*\*)

<b>N429WN</b>		Mode 1	Mode 2	Mode 3	Mode 4
benzene	(ug/m3)	3.456	0.172	0.009	0.066
toluene	(ug/m3)	3.631	0.232	BDL	0.036
ethylbenzene	(ug/m3)	0.076	BDL	BDL	BDL
1,2-DM-benzene	(ug/m3)	0.056	BDL	BDL	BDL
1,3-DM-benzene	(ug/m3)	0.019	0.002	BDL	BDL
styrene	(ug/m3)	0.037	BDL	BDL	BDL
i-propylbenzene	(ug/m3)	0.043	BDL	BDL	BDL
benzaldehyde	(ug/m3)	0.057	BDL	BDL	BDL
n-propylbenzene	(ug/m3)	0.055	BDL	BDL	BDL
1-ethyl-3-methylbenzene	(ug/m3)	0.005	0.067	BDL	BDL
1E-4M-benzene	(ug/m3)	0.019	BDL	BDL	BDL
1,3,5-trimethyl benzene	(ug/m3)	0.017	BDL	0.006	BDL
1E-2M-benzene	(ug/m3)	0.079	BDL	0.006	BDL
1,2,4-TMB	(ug/m3)	0.018	BDL	0.016	0.351
2M-propylbenzene	(ug/m3)	0.288	BDL	BDL	BDL
s-butylbenzene	(ug/m3)	0.059	BDL	BDL	BDL
1M-3-(1-methylethyl)-benzene	(ug/m3)	0.023	BDL	BDL	BDL
1,2,3-trimethylbenzene	(ug/m3)	0.049	BDL	BDL	BDL
1M-4-(1-methylethyl)-benzene	(ug/m3)	0.041	0.033	BDL	BDL
2,3-dihydro-1H-indene	(ug/m3)	0.078	BDL	BDL	BDL
1M-2-(1-methylethyl)-benzene	(ug/m3)	0.020	BDL	BDL	BDL
1,3-diethylbenzene	(ug/m3)	0.046	BDL	BDL	BDL
1,4-DE-benzene	(ug/m3)	0.038	BDL	BDL	BDL
1-methyl-3-n-propylbenzene	(ug/m3)	0.043	0.014	BDL	BDL
1-methyl-4-n-propylbenzene	(ug/m3)	0.067	0.038	BDL	BDL
1,2-diethylbenzene	(ug/m3)	0.052	BDL	BDL	BDL
1M-2P-benzene	(ug/m3)	0.013	BDL	BDL	BDL
1,4-dimethyl-2-ethylbenzene	(ug/m3)	0.147	BDL	BDL	BDL
1,3-dimethyl-4-ethylbenzene	(ug/m3)	0.085	BDL	BDL	BDL
1,2-dimethyl-4-ethylbenzene	(ug/m3)	0.029	0.032	0.010	BDL
1,3-dimethyl-2-ethylbenzene	(ug/m3)	0.124	BDL	BDL	BDL
1,2-dimethyl-3-ethylbenzene	(ug/m3)	0.064	BDL	0.010	BDL
1,2,4,5-tetM-benzene	(ug/m3)	0.008	BDL	BDL	BDL
2-methyl-butylbenzene	(ug/m3)	0.049	0.035	BDL	BDL
1,2,3,5-tetM-benzene	(ug/m3)	0.013	BDL	BDL	BDL
tert-1-butyl-2-methyl-benzene	(ug/m3)	0.012	BDL	BDL	0.139
1,2,3,4-tetM-benzene	(ug/m3)	0.063	0.036	0.034	BDL
n-pent-benzene	(ug/m3)	#N/A	BDL	BDL	BDL
tert-1-butyl-3,5-dimethyl-benzene	(ug/m3)	0.014	BDL	0.012	BDL


### 3.3.11 Estimation of EIs for VOCs

After the field campaign was completed and analysis of the DNPH cartridges, thermal desorption tubes and SUMMA canisters was undertaken, the EIs were calculated using the earlier described protocol. However, calculated EIs were much lower when compared with other investigators in this project or literature. It appeared that a leak had occurred in the subsystem designated for light hydrocarbon and carbonyl analysis. The sampling system, under vacuum, had allowed ambient air to enter at a leak and dilute the samples by an unknown amount.

#### 3.3.11.1 Post Analysis of the Sampler

C<sub>4</sub>-C<sub>12</sub> hydrocarbon values were explored based on the concentrations measured from the Thermal Desorption Tubes (TDS) tubes but the values were much lower than expected from APEX1 and other research. This finding led to an extensive evaluation of the UCR sampling system, especially given that in-field and post test calibrations indicated accurate flow through the sample media. Given that the samples collected on Teflon and quartz media matched expected values and that the carbonyl was close to the expected EI value than the sorption tubes, it was presumed that a small leak must have occurred near the split point for the thermal desorption system. The leak would have resulted in significant dilution with ambient air without affecting the PM, quartz, and quartz-PUF sample trains. This conclusion is easily reached by looking at the design flows in Figure 54. Note that the approximate flows in the quartz (qz) line was 80 liter per minute (LPM), for PTFE about 35LPM, for (QZ+PUF) about 25LPM, for DNPH about 1LPM and for thermal desorption tubes about 0.2LPM. Thus since the system was pressure and vacuum checked for leaks, it became clear that a small leak in the vicinity of the TDS collection tube would be consistent with the findings for the TDS tubes.

The design included a redundancy on the emission rates for the trace hydrocarbon gases; namely collection of gas phase samples in SUMMA canisters for subsequent analyses. The SUMMA canisters also allowed an internal check of the dilution ratio since CO<sub>2</sub> was also measured. Unfortunately, all Summa canisters analyzed by the external lab reported no measurable hydrocarbons but the CO<sub>2</sub> values matched the value measured from sampling ports adjacent to UCR's ports. With no trace hydrocarbons reported from the TDS tubes or the SUMMA canisters, meant that the data collected for C<sub>1</sub>-C<sub>8</sub> analyses are not available for this study. All data on C<sub>1</sub>-C<sub>12</sub> speciated hydrocarbons provided in the report is thus given as measured  $\mu\text{g m}^{-3}$  as opposed to EI data.

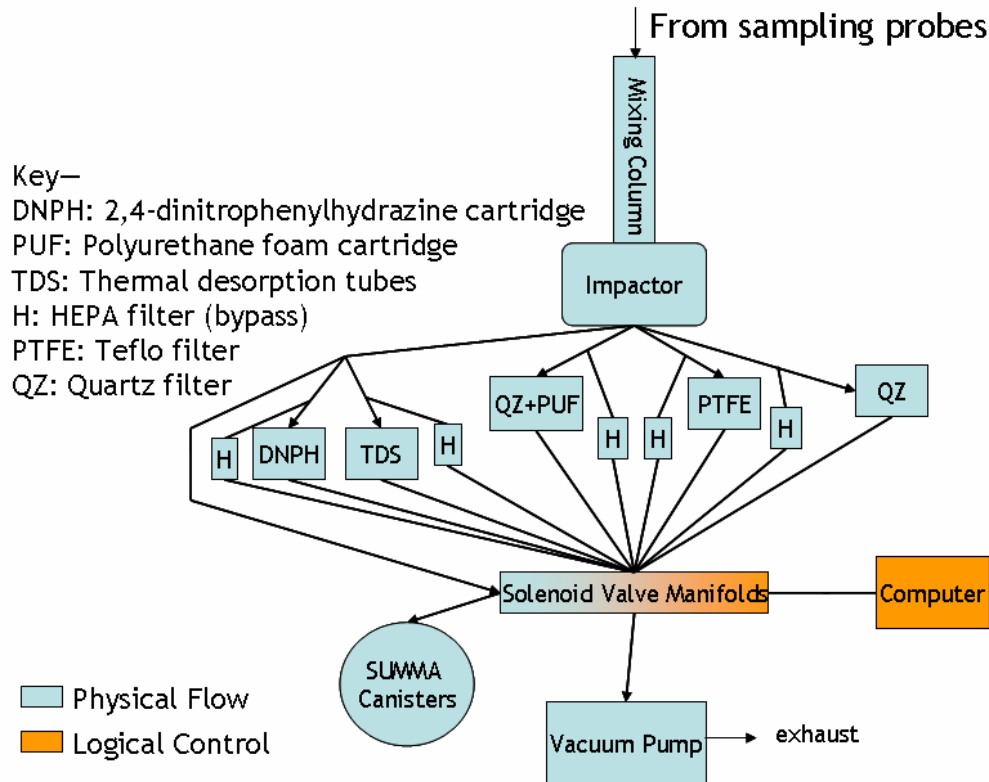

**Figure 54: Schematic of Flow Patterns in the Sampling System**

The observations during the testing were:

- In-field and post test calibrations indicated design flow through the sample lines.
- Recorded data of continuous  $\Delta P$  logs across the critical flow orifices show critical flow during the test.
- Continuous temperature logs indicated the quartz and Teflon sections near the inlet were hot and remained hot during the testing.
- $\text{CO}_2$  values in the recorded SUMMA canisters that showed any  $\text{CO}_2$  were the same as measured by the adjacent NASA probes.

Based on the calculated EIs, for the light hydrocarbon and carbonyl VOCs, we believe there was a leak in the low-flow section of the sampler. Since the critical flow devices and the laminar flow element showed the flow matched design, we presume a leak occurred upstream of the laminar flow element. This conclusion is consistent with the observation that the carbonyl EI values were closer to the expected values than values for the desorption tubes. However, we were not able to determine the size of the leak and subsequent dilution so as to adjust the data set.

A small leak in the low-flow side would not affect the other data and there are a number of confirming measurements that indicate the samples collected on the Teflon and quartz pathways were correct. First, PM mass matched values from the quartz filters and second,

UCR values were similar to those reported by UMR, especially if the UCR values are increased by the 30% correction factor used by UMR. This is not surprising since a small leak in the low-flow side would not affect the EIs calculated in the high-flow side. Thus EI values for PM mass, EC, OC, ions, or the semi-volatile hydrocarbons should be accurate and unaffected by a small leak near the TDS.

Given the field checks, how could a leak go undetected? The overall system was checked in the field for leaks and the leak rate. The resultant value was within 0.5% of the maximum flow (or 1LPM) as specified by the International Standards Organization (ISO). However, the whole system was checked and the field procedure only assured that the major flow lines were leak-free, rather than applying the 0.5% to the flow in the TDS tubes. In any case, note that a small leak found in a 0.2 LPM line is unlikely to show up in this procedure. Further it will not affect a line flowing over 50LPM. Thus a small leak in the vicinity of the TDS collection tube would be consistent with the flow and analytical results.

### 3.3.11.2 Implications for Carbonyl Analysis

For JETS APEX2, UCR's and ARI's EIs for formaldehyde, acetaldehyde and the ratio are shown in Table 50. The goal of presenting this table was to look for opportunities to scale the UCR data. Several results are evident from the table. One is that a single scaling factor did not exist between the ARI and UCR data set, in fact the scaling factor varied in an unpredictable manner. The other observation was that most of the data for N429WN were suspect due to the very low carbonyl recovery. However, the UCR ratios of acetaldehyde to formaldehyde at idle agreed with the published value of Spicer and we believe the remaining carbonyl values for those samples are accurate.

**Table 50: Comparison of UCR and ARI Data for Carbonyls**

Aircraft	Mode	Formaldehyde EI (g/kg fuel)		Acetaldehyde EI (g/kg fuel)		Acetaldehyde EI/ Formaldehyde EI ratio	
		UCR	ARI	UCR	ARI	UCR	ARI
N435WN	Mode 1	0.0791	0.4802	0.0272	0.2215	0.34	0.46
	Mode 2	0.0017	0.0019	0.0012	0.0036	0.69	1.91
	Mode 3	0.0016	0.0013	0.0012	0.0027	0.78	2.07
	Mode 4	0.0019	0.0020	0.0024	0.0032	1.24	1.56
N353SW	Mode 1	0.0492	0.4491	0.0170	0.2092	0.35	0.47
	Mode 2	0.0080	0.0020	0.0006	0.0030	0.07	1.49
	Mode 3	0.0070	0.0012	0.0008	0.0030	0.11	2.41
	Mode 4	0.0049	0.0018	0.0025	0.0036	0.51	1.95
N695SW	Mode 1	0.1140	0.4991	0.0304	0.2328	0.27	0.47
	Mode 2	0.0055	0.0134	0.0015	0.0029	0.28	0.22
	Mode 3	0.0023	0.0103	0.0010	0.0029	0.42	0.29
	Mode 4	0.0027	0.0073	0.0020	0.0024	0.73	0.33

N429WN	Mode 1	0.0008	0.7098	0.0008	0.3341	1.04	0.47
	Mode 2	0.0010	0.0069	0.0010	0.0065	0.97	0.94
	Mode 3	0.0044	0.0015	0.0009	0.0035	0.20	2.32
	Mode 4	0.0068	0.0005	0.0024	0.0036	0.35	7.11


### 3.3.11.3 Implications for Light Hydrocarbon Analysis

Data from the thermal desorption tubes were analyzed for light hydrocarbons from butadiene to naphthalene (C<sub>4</sub> to C<sub>10</sub>). The amount of light hydrocarbons collected was found to be above the minimum detection level but much less than that observed in APEX1. By way of example, Figure 55 shows chromatograms for similar volume samples from APEX1 and JETS APEX2. For benzene, the measured level at JETS APEX2 was found to be about 30 times less than that at APEX1.

Ambient benzene levels at JETS APEX2 ranged from 0.1 to 0.2 ppbv based on the canister readings. Values measured in the TDS ranged from 0.02 to 1.10 ppbv. As for the carbonyl data, the jet exhaust sampled with the TDS tubes was diluted by an unknown amount of ambient air. As the scaling factor determined from APEX1 would be about 30, it did not seem prudent to adjust the raw data. Some example numbers are presented in the Table 51.

**Table 51: Benzene and Toluene concentration data from JETS APEX2**

Aircraft	Mode	benzene	toluene
		(µg/m <sup>3</sup> )	(µg/m <sup>3</sup> )
N435WN	Mode1	0.64	0.48
	Mode2	0.015	0.03
	Mode3	0.056	0.054
	Mode4	8.19	7.31
N353SW	Mode1	0.053	0.065
	Mode2	0.155	0.154
	Mode3	0.027	0.025
	Mode4	BDL	BDL
N695SW	Mode1	1.52	0.732
	Mode2	0.325	0.407
	Mode3	0.044	0.056
	Mode4	0.151	0.108
N429WN	Mode1	3.456	3.631
	Mode2	0.172	0.232
	Mode3	0.009	BDL
	Mode4	0.066	0.036

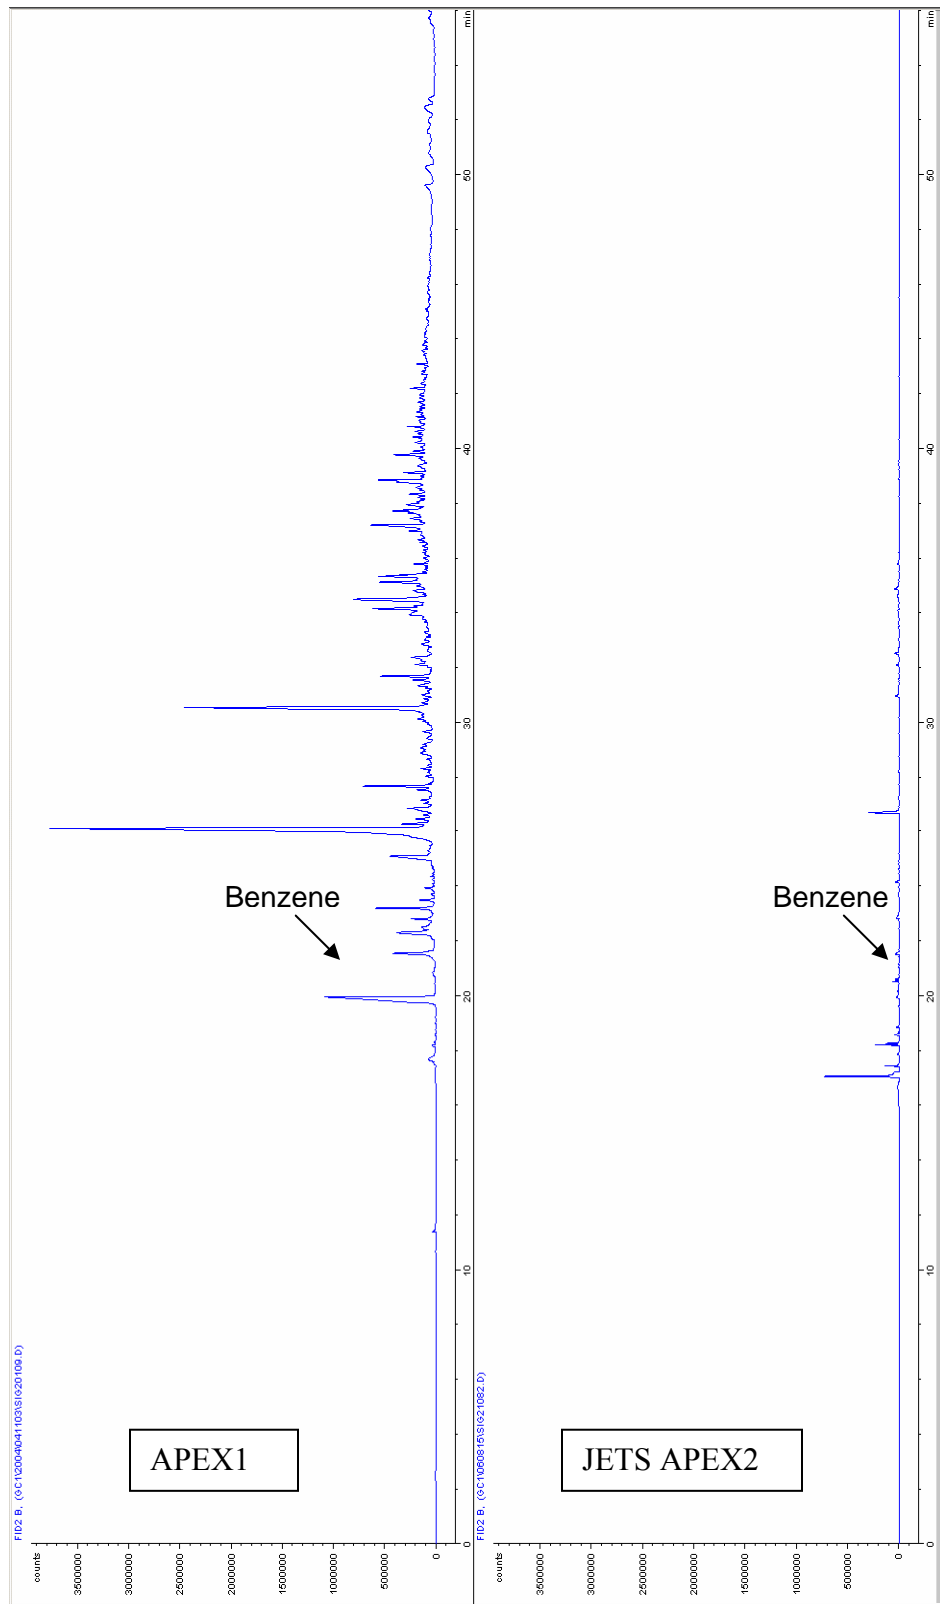

**Figure 55: Comparison of Light Hydrocarbons Measured with TDS in APEX1 and JETS APEX2.**

### **3.3.12 UCR QA/QC Protocol**

The contributions of UCR were focused in two areas. One was the development of the sampling system to match the engine test cycle (see Figure 11) and the other contribution was the sampling and off-line analysis of the speciated hydrocarbons and speciated PM. Both areas were given considerable thought on the QA/QC.

#### **Sampling System**

The original plan for the quality control and quality assurance of the sampling system was designed at two levels, since the sampler was a complex assembly of mechanical and electronic equipment with a computer precisely controlling all the equipment to fit within the sampling window allowed by the selected test cycle. Because this sampler was quite complex and the first-of-a-kind design, quality control runs at UCR were planned to compare the measured values with those measured in UCR's recognized mobile emissions laboratory. Quality assurance in the field was to follow the protocol outlined in ISO 8178-1 Chapter 8-4 "Leakage Test". This planned quality check could not be implemented because construction of the complex sampling system was completed at the Oakland airport the day before testing began.

However, once the sampling equipment was assembled, UCR did perform the second level of quality assurance testing as specified in ISO: "The maximum allowable leakage rate on the vacuum side shall be 0.5 % of the in-use flow rate for the portion of the system being checked." Early trials indicated the leakage rate exceeded the allowed value and the sampling system was made leak tight by sealing leaks on the pipe threads with epoxy resins. Other components in the sampling system were leak tight. The system easily passed the ISO leakage rate specification after the repairs. The leakage rate was checked against the whole system flow of 200 LPM and not against the smallest flow component of 0.25 LPM where the Thermal Desorption Tubes were located. Other reports in the literature with similar sampling systems apply the QA test in the same manner as UCR did but the test should have been applied to the lowest flow element in the system.

#### **Chemical Collection and Analysis**

A key element in the quality plan was to build a number of redundancies in the collection and analyses of the exhaust since the samples were quite difficult to collect and so few data existed in the literature. Some of the redundancies are illustrated in the Table 52 below. ARI was collecting selected hydrocarbons from the mixtures collected and analyzed by UCR.

All data, except for the VOCs, was successfully collected and collaborated against the redundant measurement. For example, Teflon mass was matched with the combination of EC plus OC from the quartz filter and also by the values calculated from the UMR instruments. However, for the VOCs, both the SUMMA canisters and the thermal desorption tubes failed to provide the expected results.



**Table 52: Species measured by UCR and ARI**

<b>Species</b>	<b>UCR1</b>	<b>UCR2</b>	<b>ARI</b>
VOCs (C1-C6)	SUMMA (C1-C6)	TDS (C3-C8)	Some with TDL (C2)
Carbonyls	DNPH		TDL (formaldehyde) PTR-MS
SVOCs	Quartz 1	Quartz 2	
PM mass	Teflon	Quartz 1&2	UMR mass
PM EC/OC	Quartz 1	Quartz 2	
Ions	X-ray	Ion chromatography	

**Quality control in the laboratory**

Samples collected in the field were analyzed in the laboratory. From an overview perspective, there are numerous quality control and quality assurance procedures built into the operation of UCR’s analytical lab. Documentation of the analytical methods and results include Standard Operating Procedure (SOPs) or each method, Checklists, Log Books, Data Files, Reports to Management, and Reports to Clients.

The quality control program involves the use of standards and quality assurance is achieved by monitoring the repeatability of the standards and whether the standards are within the expected range or showing a bias; other corrective actions are carried out to bring the analysis back into statistical control.

As an example for the balance measuring the mass on a Teflon filter, checklists are maintained for

- Start-up
- Calibration
- Shutdown
- Test operations
- Test QC

Other very detailed information is documented for the operation of the balance used for Teflon mass. Selected excerpts follow:

**Special Training Requirements for Balance Room Technicians**

Balance room technicians are generally students or other part time workers. The technicians must be able to weigh substrates with quantifiable accuracy and precision. To accomplish this, balance operations are conducted following very specific protocols that produce substantial amounts of QC data. It takes practice and experience to follow these procedures correctly. New technicians are given practice sets of substrates for weighing, and practice following the balance protocols. The technicians report results for the practice sets to the Project Manager. The Project Manager evaluates the practice results and identifies any problems. Problems are corrected and the new technicians try again with a new practice set, until Project Manager is satisfied that they are able to follow the protocols correctly.

### **Sample Handling and Custody of PM samples**

Particle samples are collected on Teflon filters. The use of particle filters requires numerous sample handling and custody issues to prevent contamination, to ensure proper sample identification, and to ensure equilibration requirements of the CFR. Throughout the procedures, filters are handled only using forceps. The filters never leave the custody of CE-CERT. The steps involved are as follows:

- unused filter numbers are assigned to new plastic Petri dishes
- new filters are placed into the numbered plastic Petri dishes
- the Petri dishes with unexposed filters are placed into a temperature and humidity controlled equilibration chamber
- after 12 hours the filters are weighed
- filters are reweighed daily until two filter weights within 3 µg of each other
- filters with consistent weights are transported for testing
- prior to the test, filters are transferred from Petri dishes to filter holders at the test site, the filter ID numbers are recorded on the particle Filter Data log sheet
- at the end of the test filters are returned to their original Petri dishes
- the Petri dishes of the exposed filters are marked with an X
- the filters are returned to the balance room and placed in the equilibration chamber and equilibrated 12 to 72 hours
- the exposed filters are weighed once daily until two weights with 3 µg are obtained

The procedures for weighing the filters are detailed in Balance Protocol A1 R1.1 Appendix C. These procedures define specific detailed sequences for checking and recording the equilibration chamber conditions, zero and spanning the balance, weighing reference objects, weighing filters, performing zero and span checks, performing replicates. In summary, filter weights are only considered valid if environmental chamber conditions are within tolerance, and the filter weight was preceded and followed by a valid zero and valid span.

### **For future projects**

For future efforts to measure organic compounds under similar field conditions, the following should be considered:

- Begin and complete the design, fabrication and checkout testing of the sampling system well before the field campaign begins; this will allow time to correct any problems before the system is required for use
- Analyze a statistically significant subset of samples as soon as possible after collection, and before completion of the field campaign; this will allow detection of invalid samples while time remains during the campaign to correct any problems and to obtain valid samples
- Wherever possible, replace batch sampling techniques with more advanced instrumentation that provides real-time measurement capabilities; this will allow evaluation of sampling system performance during test operation.

The leak in the sampling system would have been detected and corrected if this protocol had been followed, and the desired organic compound data would have been obtained.

## **4.0 Discussion**

### **4.1 Gaseous Emissions**

NO<sub>x</sub>, CO, and specific hydrocarbon species were measured for seven different engines representing three engine models.

NO<sub>x</sub> and CO were generally consistent with both ICAO data for the CFM56 engine models and with the corresponding NO<sub>x</sub> and CO data acquired on a different CFM56 engine model measured in the APEX1 campaign. CO data had significant variability due to variation in ambient conditions affecting the engine performance, but APEX1 data analysis has suggested that this variation can be reduced significantly when fuel flow variations are properly accounted for. Fuel flow data was not available from these tests, so these corrections have not been made for the data presented here. While generally consistent with ICAO data in trends (decreasing with increasing engine power) and magnitude, the CO emissions for two engine models are below the regulatory values.

NO<sub>x</sub> emissions also agree well with the trends in ICAO data (increasing with increasing engine power) and agree well in magnitude for each engine model. Some decreases in NO<sub>x</sub> EIs at the downstream measurements locations were observed and this warrants further analysis.

Selected hydrocarbon species were measured in real-time for all of the engines studied. Formaldehyde (HCHO) is one of the most prevalent and it demonstrates a decreasing trend with increasing engine power as does the Unburned Hydrocarbon (UHC) data in the ICAO data. As was observed in APEX1, the measured emission indices for individual HC species decrease in proportion with HCHO as the engine power increases, suggesting that HCHO (or other major HC emissions like ethylene, C<sub>2</sub>H<sub>4</sub>) is a good indicator for HC emission levels. In addition, the ratio of the individual HCs to HCHO all agree reasonably well with the landmark data of Spicer et al., (1994) on speciated HCs in the CFM56 engine. The major deviation from excellent agreement with Spicer is that several species (notably the higher alkenes, as well as C<sub>4</sub> benzenes, and phenols), where the present measurement are significantly higher than Spicer et al. The question of potential loss mechanisms in the Spicer approach may need to be considered. Either chemical transformation (oxidation) or incomplete desorption from the concentration devices used in those measurements could potentially result in reducing the reported levels for the higher alkanes in those earlier studies, but the actual causes for these discrepancies are currently unknown.

### **4.2 Particulate Emissions**

Black Carbon (BC) measurements were made using a Multi-Angle Absorption Photometer (MAAP) for all seven engines. All demonstrated a similar trend, increasing with increasing engine power, especially above 60% rated thrust (although there is also a minor increase in BC when the power decreases to the very lowest idle powers). The

newer engine designs (-7B22) had lower emissions than that of the APEX1 engine (-2C1).

The volatile contributions to the particulate emissions were measured with an Aerosol Mass Spectrometer (AMS). Sulfate and organic contributions were identified and quantified. The sulfate contribution was largely independent of engine power, and was similar to levels observed in APEX1 when compared at 30 or 50 m downstream locations. Sulfate in the particle phase is dependent on the level of sulfur in the fuel, and the overall sulfate levels are expected to correspond to the fuel sulfur levels. The organic contributions were generally significantly lower than APEX1, which requires further analysis but, like APEX1, the contributions have a local maximum at the lowest power conditions when HC emissions are highest. Another increase occurs at the highest power and, although the increase is more dramatic in APEX1 than in the current tests, this increase is most evident at the furthest downstream location.


### **4.3 PM Physical characterization**

One objective of the JETS APEX2 study was to perform a PM emission comparison between old (-300) and new (-700) technology engines currently powering the B737 commercial fleets. A first step in doing this is to examine the variance in PM emissions within a technology type and the second is then to determine whether any engine technology differences are statistically significant for a given PM parameter. It should be noted that the sample size per technology type was extremely small (3 engines per type) and this may make it difficult to discern subtle differences. However, it should also be noted that this study was the first of its kind where multiple engines within a given technology type were made available for measurement.

Figures on the left below (Figures 56a - 60a) present the technology type average PM parameter data (total aerosol) as a function of engine power at 1m measured at JETS APEX2. The triangles represent new technology and the circles represent the old. The error bars indicate uncertainty given by 1 standard deviation in the average. Figures on the right below (Figures 56b - 60b) present the JETS APEX2 data along with the CFM56-2C1 engine data acquired at APEX1 (Lobo et al., 2007).

## Dgeom

In the case of Dgeom, both engine types demonstrate an increase in Dgeom with power but no statistically significant difference between engine technologies is discernable since for all data points the error bars overlap (Figure 56a). This is also the case for the CFM56-2C1 engine studied in APEX1 (Figure 56b).


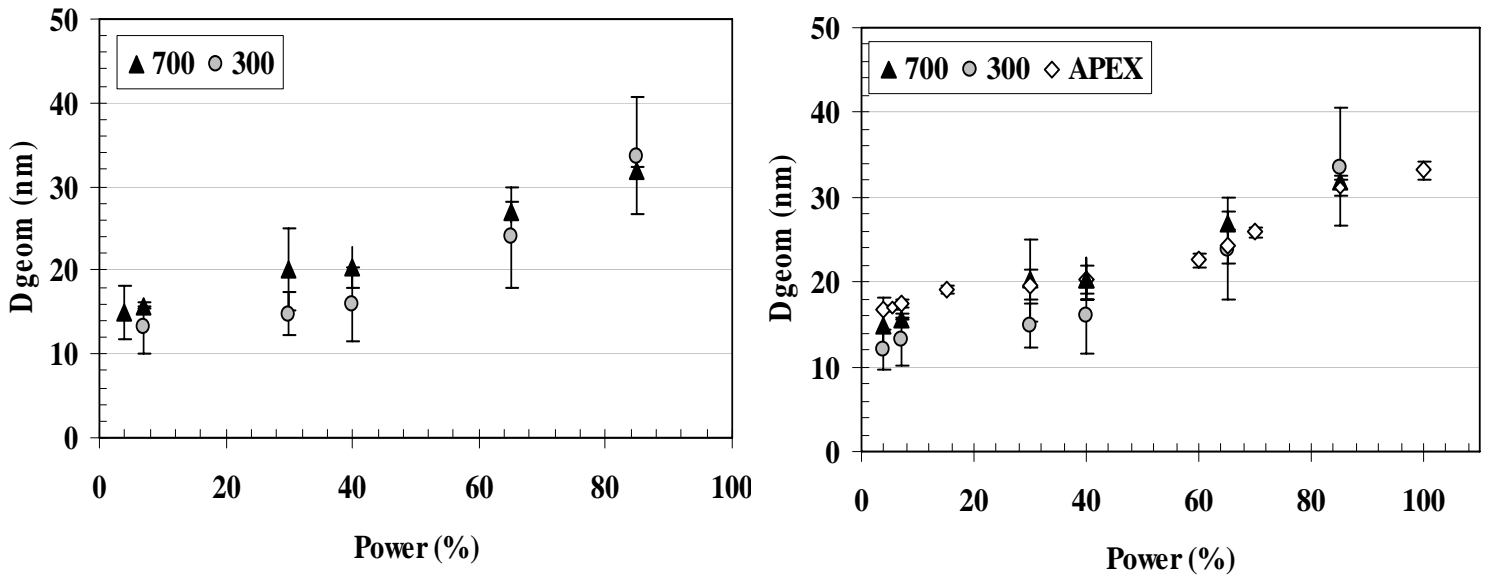


**Figure 56a: Dgeom as a function of power for -300 and -700 series.**

**Figure 56b: Comparison with APEX1 data**

## Sigma

In the case of Sigma, both engine types demonstrate a weak positive trend with power but no statistically significant difference between engine technologies is discernable (Figure 57a). This is also the case for the CFM56-2C1 engine studied in APEX1 (Figure 57b).

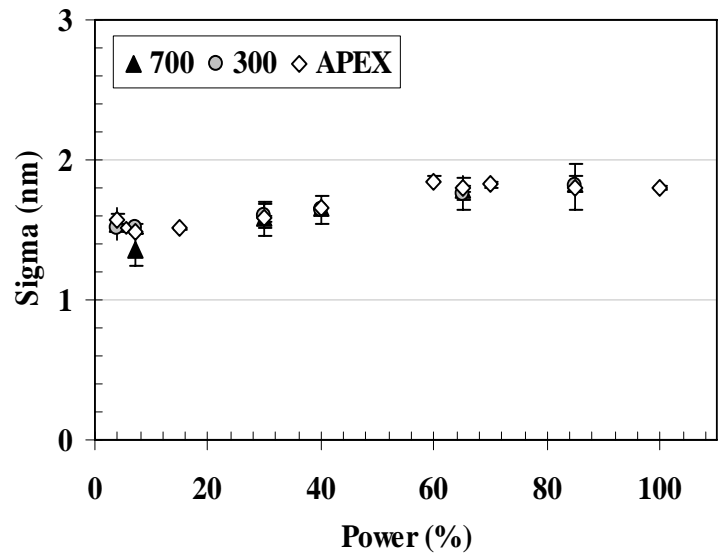
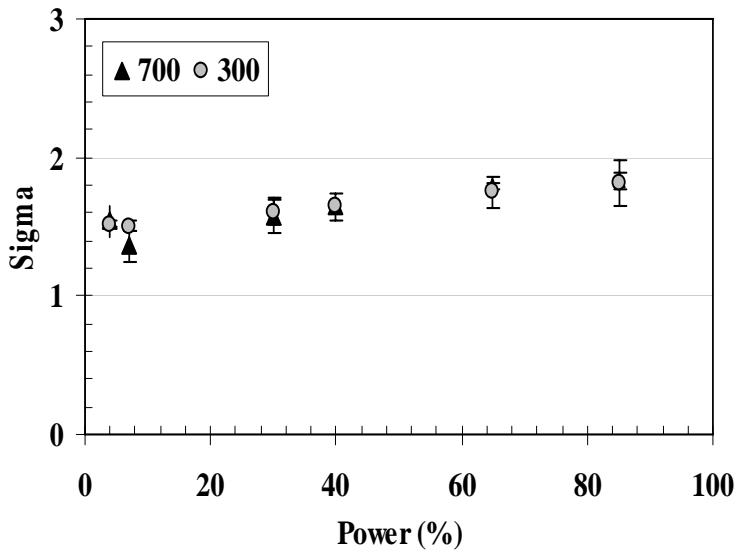


**Figure 57a: Sigma as a function of power for -300 and -700 series.**

**Figure 57b: Comparison with APEX1 data**

### DgeomM

In the case of DgeomM, both engine types demonstrate an increase with power but no statistically significant difference between engine technologies is discernable (Figure 58a). This is not the case when comparison is made to the even older technology engine (CFM56-2C1) data from APEX1 (Figure 58b). On average, the DgeomM value for the CFM56-2C1 engine exceeds that for the engine studied in JETS APEX2 by ~60%.

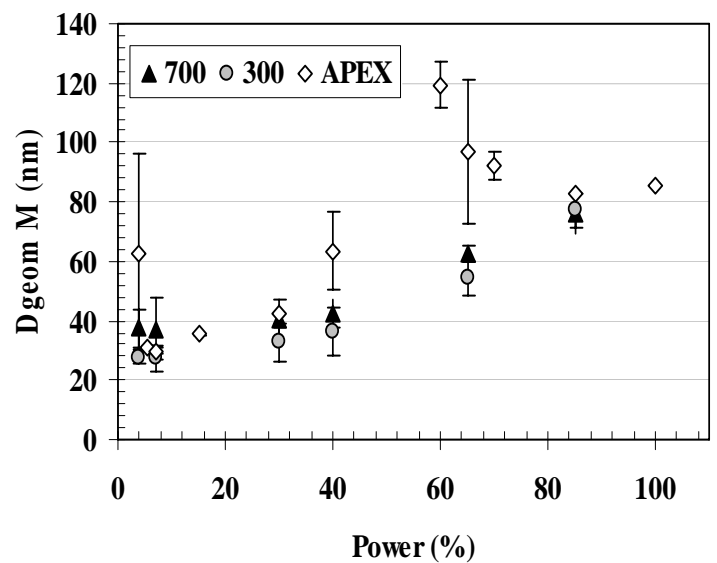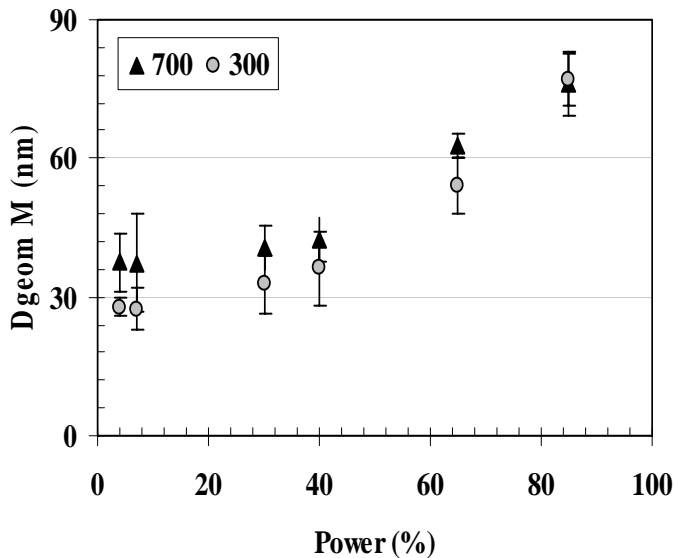


**Figure 58a: DgeomM as a function of power for -300 and -700 series.**

**Figure 58b: Comparison with APEX1 data**

## EIn

In the case of EIn, the -700 and -300 engine types demonstrate a minimum  $\sim 20\%$  power (Figure 59a). The new technology engines produce fewer particles per kilogram of fuel burned. This difference is large and statistically significant. Averaged across all powers, this difference represents a  $(79 \pm 12)\%$  reduction in number-based emissions normalized to fuel flow.

EIn for the APEX1 engine falls between those of the -300 and -700 series and the differences between all engines are statistically significant at higher powers (Figure 59b).

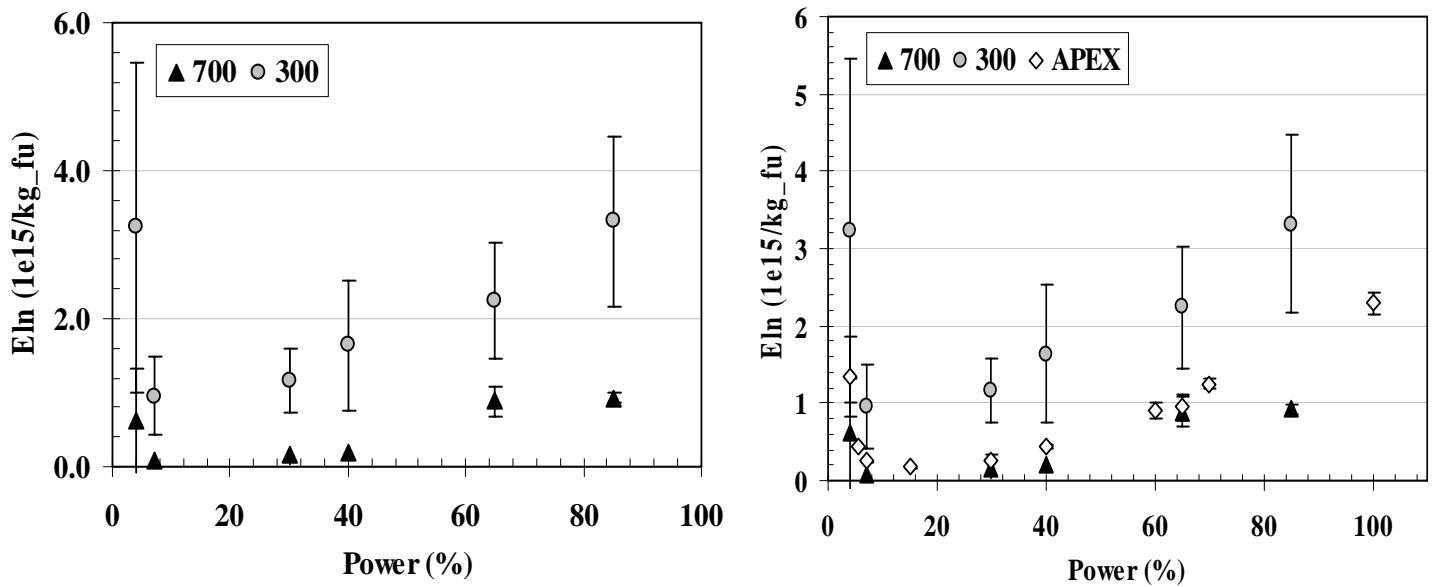


**Figure 59a: EIn as a function of power for -300 and -700 series.**

**Figure 59b: Comparison with APEX1 data**

## Elm

Mass-based emission index exhibited a trend to increase with power. The trend is stronger for the older engine technology (-300 series). There is a large and statistically significant difference at high power representing a 72% reduction in mass-based emissions normalized for fuel flow at 85% power (Figure 60a). This is also the case for the CFM56-2C1 engine studied in APEX1 (Figure 60b).

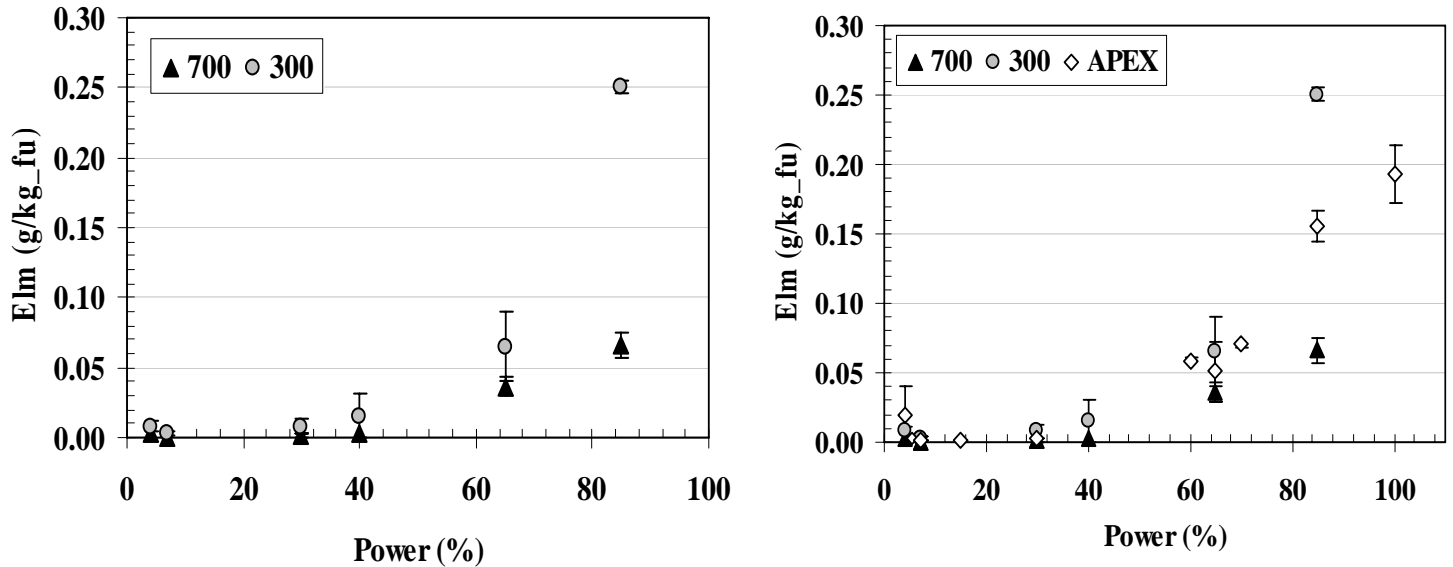

**Figure 60a: Elm as a function of power for -300 and -700 series.**


**Figure 60b: Comparison with APEX1 data**

### 4.3.1 Engine Warm-up Effect

Measurements of emissions were taken on each engine following the test matrix shown in Figure 61. This test sequence immediately followed an engine cold start and nominal 5 minute warm-up period. Measurements began only after the engine operator declared the engine stable. An unanticipated effect associated with engine warm-up was observed. The number-based emission indices, EIn, for a given operating power were observed to decrease with engine on-time. This effect is clearly demonstrated in both 1m and 50m data sets. Figure 61 is a typical example observed on a -700 series engine when the exhaust was sampled at 50m. To illustrate the time dependent nature of this data, each test matrix point is given a chronological sequence number and this number is used to label the appropriate data point in Figure 61. Sequence numbers 1-6 were taken during the time power was incrementally increased (left side of the test matrix), and sequence numbers 7-11 were taken as power was incrementally decreased. Thus sequence numbers 1 and 11 indicate emissions taken at the same engine operating power (4%), but separated



in engine on-time by a period of ~100 minutes. The difference in EIn for this 4% case represents a 63% reduction in number-based emissions normalized to fuel flow. The absolute reduction at 40% power was found to be 64%.

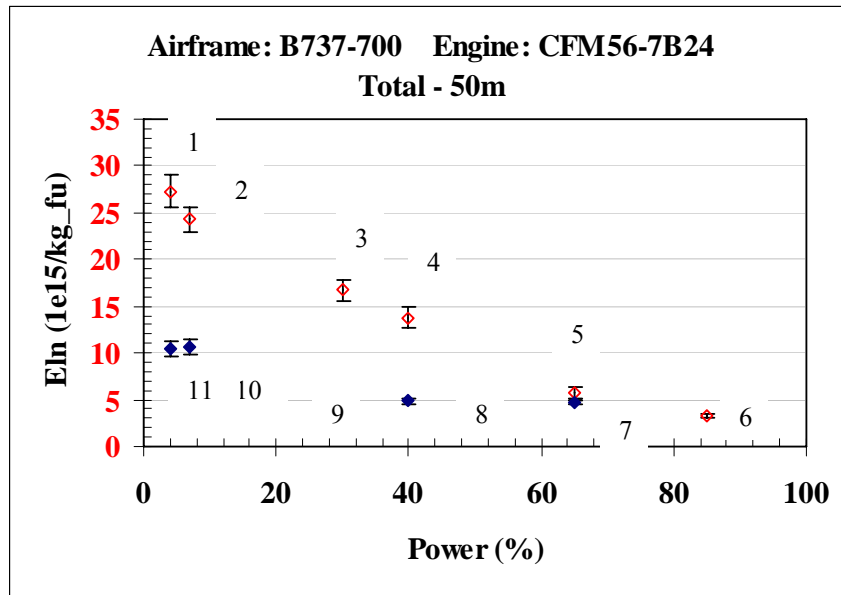


**Figure 61: Example of the warm up effect observed on a -700 series engine when the exhaust was sampled at 50m**

#### 4.3.2 Discussion of aerosol volatility at 1m

The exhaust temperature is too high at the 1m sampling location to allow the formation of volatile material. Hence only the non-volatile aerosol is considered here in this comparison of the 300 and 700 series engines.

## Dgeom


There was no statistically significant variation in mean particle size for either engine technology. At all power settings, except for the 65% case, the 1-sigma error bars overlap for the data points from the two engine classes. The error bars almost overlap at the 65% point.

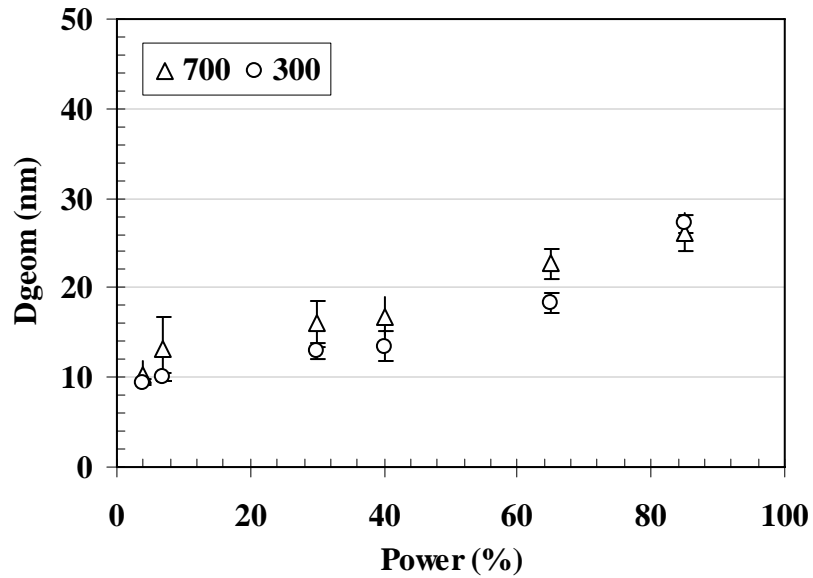

**Figure 62: Comparison of Dgeom for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series**

## Sigma


No statistically significant variation in the width of the particle size distribution for either engine technology was observed. The error bar overlap is very pronounced and holds at all engine powers.

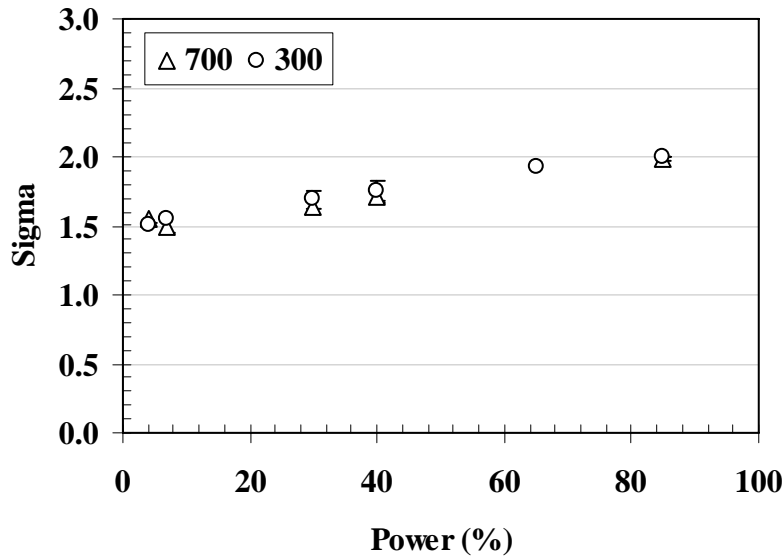

**Figure 63: Comparison of Sigma for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series**

DgeomM


There was no significant difference in mass-based mean particle size between engine technologies. The error bars overlap except for a slight separation at the 65% power setting.

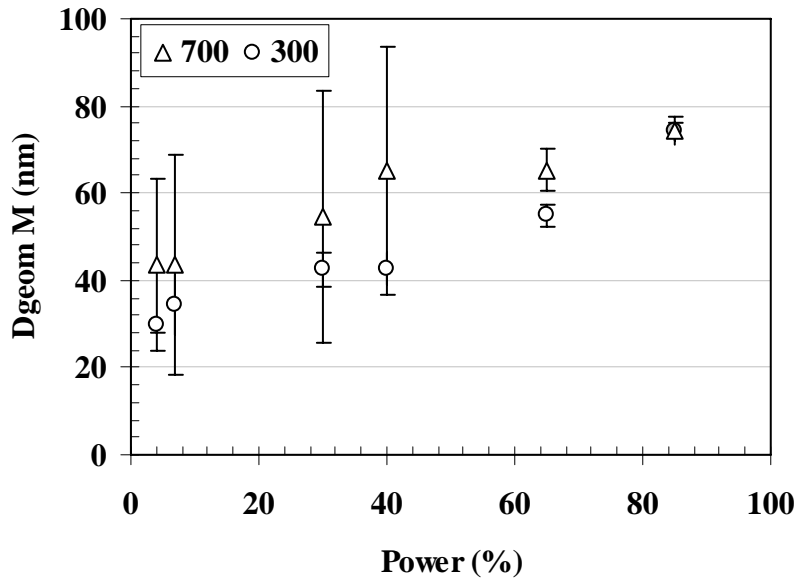

**Figure 64: Comparison of DgeomM for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series**

EIn


Statistically meaningful differences in EIn at mid and high powers were observed with the older technology engines demonstrating larger values. The newer technology engines are cleaner with respect to particle number.

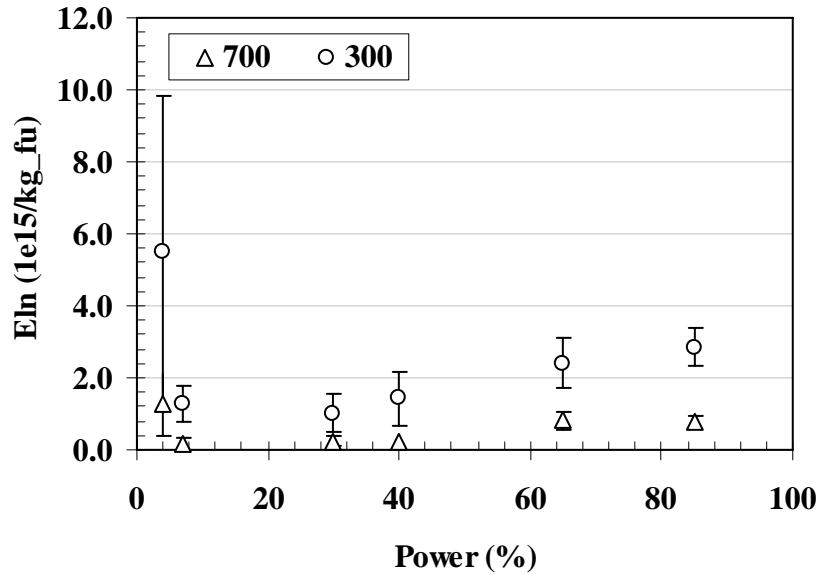

**Figure 65: Comparison of EIn for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series**

EIm

Statistically meaningful differences are observed at high power with the older technology engines demonstrating larger EIm. The newer technology engines are cleaner with respect to particle mass.

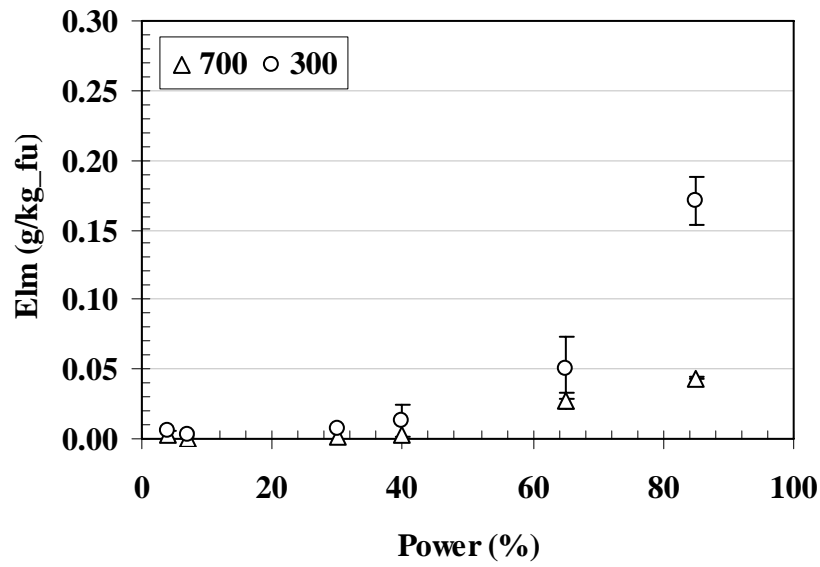

**Figure 66: Comparison of EIm for the non-volatile aerosol at 1m as a function of power for the -300 and -700 series**

### 4.3.3 Comparison of 1m Total and Non-volatile Aerosol Data

A comparison of total and non-volatile aerosol parameters – Dgeom, Sigma and DgeomM for the -300 and -700 series engines are presented in Figure 67 and a similar comparison for EIn and EIm are presented in Figure 68.







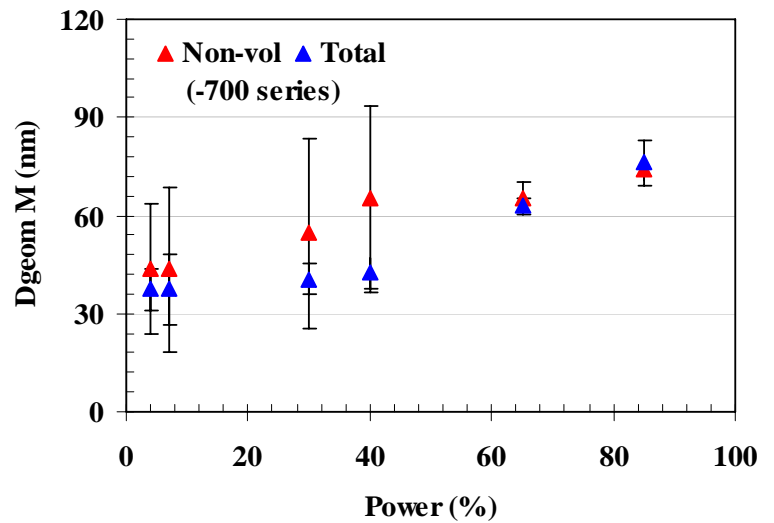


Figure 67: Comparison of total and non-volatile aerosol parameters – Dgeom, Sigma and DgeomM for the -300 and -700 series

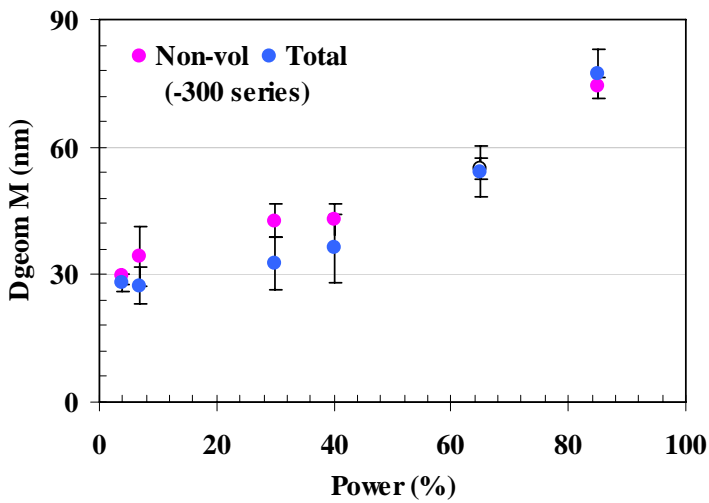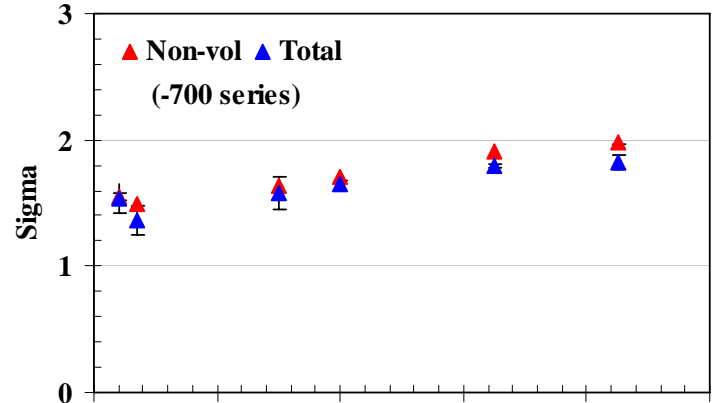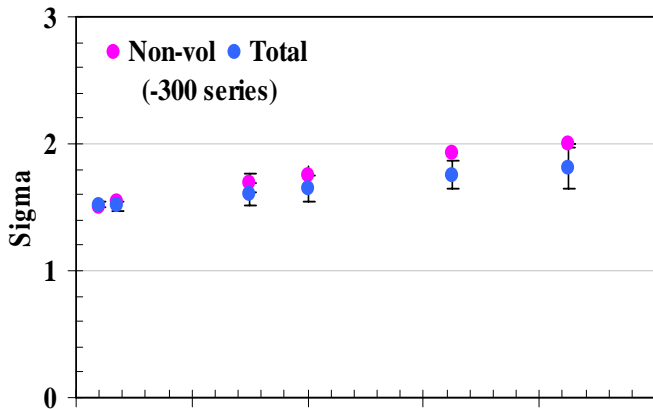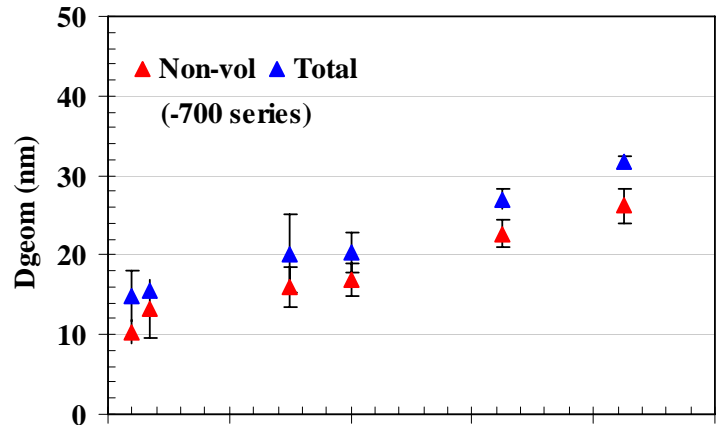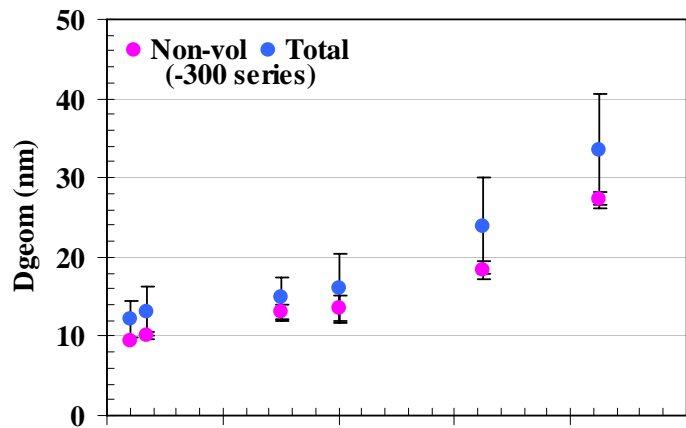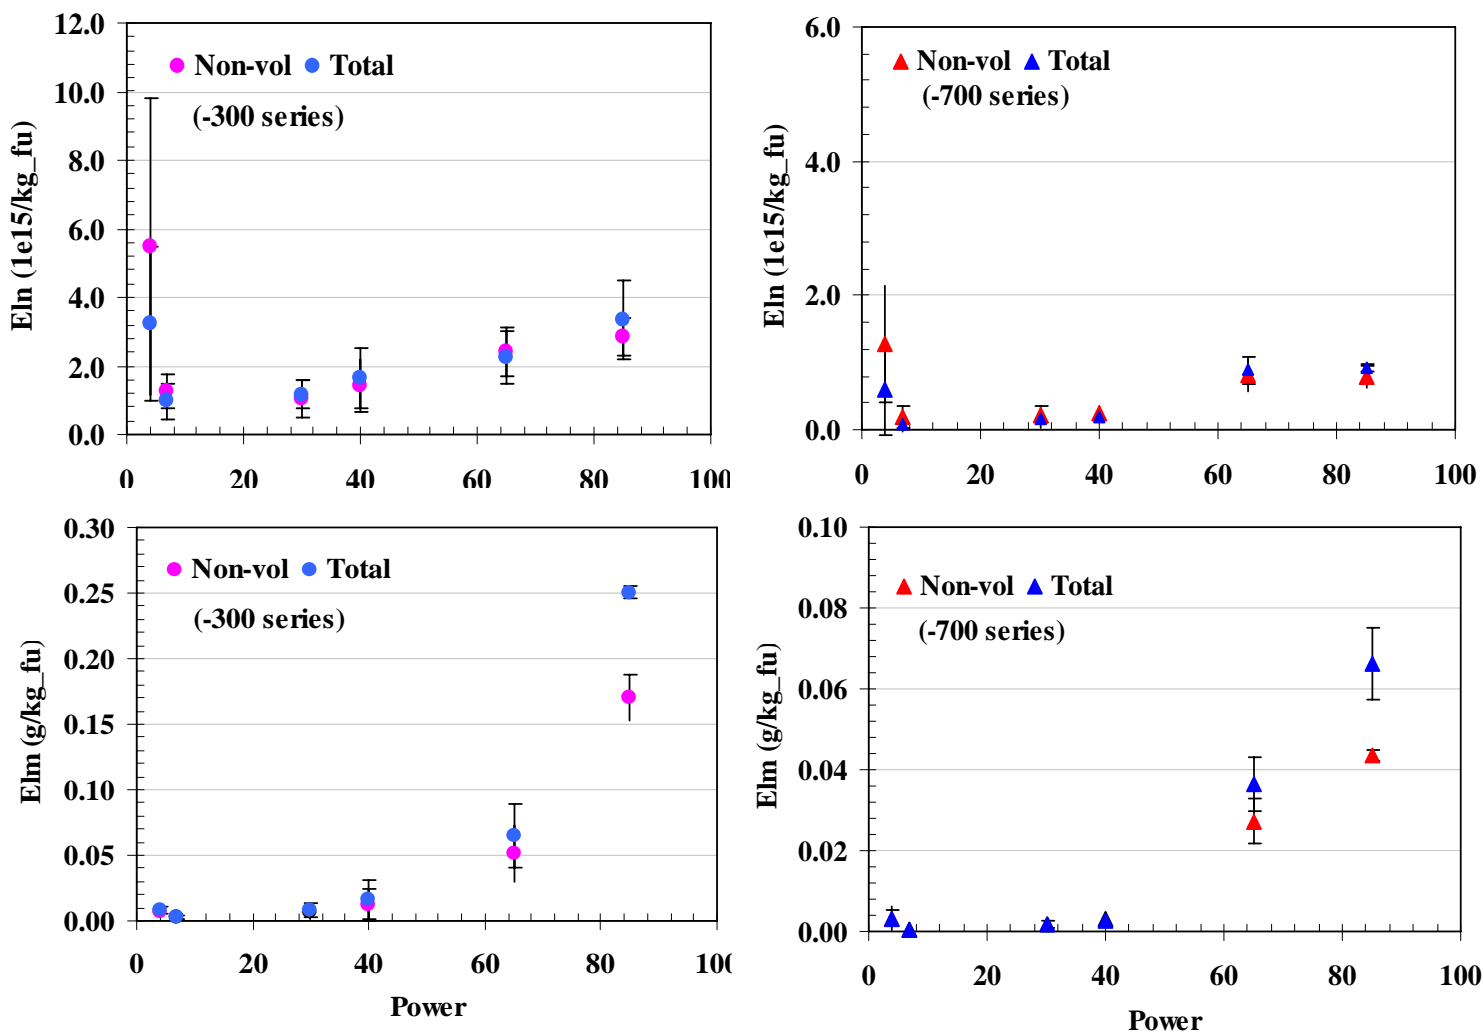

**Figure 68: Comparison of total and non-volatile number and mass-based emission indices for the -300 and -700 series**

The data for the total and non-volatile aerosol are in good agreement with each other except for a difference observed at the highest power condition for Dgeom and Elm. Good agreement would be anticipated since no condensation can occur before sample capture at the 1m location. Differences in Dgeom and Elm at the highest powers indicate minor line processing under these conditions may have taken place.

#### 4.3.4 Effect of plume processing (difference between 1m and 50m)

The exhaust sample is diluted with relatively cold ambient air as it travels away from the engine exit, and the lower mixed gas temperatures can trigger gas-to-particle conversion processes (nucleation and condensation) leading to the formation of large numbers of

volatile particles and volatile coatings on the original soot particles. The nucleation processes tend to create small particles and the volatile coatings on soot tend to be thin; hence the left side of the size distribution is impacted more than the right side. The production of these small particles serves to shift  $D_{geom}$  to smaller values and results in an order of magnitude increase in  $E_{In}$ . These particles do not significantly contribute to the mass dependent parameter values and no significant changes are observed in  $D_{geomM}$  and  $E_{Im}$ . It should be noted that the sample experiences ambient temperature and pressure as it passes through the large diameter (5cm) 50m sample line. No further dilution is imposed on the sample beyond that which naturally occurs during plume expansion in transit to the 50m sampling probe. Under these conditions, it is reasonable to conclude that any gas-to-particle conversion in the sample line merely mimics that which would have occurred in the atmosphere. This plume processing is a major effect. Typically the downstream aerosol is substantially different from that found at the engine exit. It should be noted that the final downstream aerosol depends not just on the engine emission characteristics (gas + particulate), but also strongly on the ambient air conditions (e.g. temperature and humidity).

#### **4.4 Organic gases and aerosol chemical speciation**

Dramatic increases in the PM concentrations are observed as the power increased to 85% power. The relative distributions of the substituted naphthalenes to non-substituted naphthalenes for the idle modes are in general agreement with the work from Spicer et al. 1992, 1994 (see Figures 48, 49). There was a sharp decrease in the relative contribution of substituted naphthalenes at the higher load points. Trends in the non-naphthalenic compounds are also noted with acenaphthylene, present significantly only in the idle mode, and fluoranthene decreasing with increasing power.

With respect to Chromium (VI), results for the aircraft were as expected, except for the sample from N429WN which showed a large response for Chromium (VI). It is important to note that the sample from N429WN was only one of 6 samples collected by UCR that had high chromium (VI). The variability in the metal distributions was much greater between engines than between engine loads (see Figure 52).

The mass of the ions collected on the Teflo filter were so low that only sulfate ions were above the detection limits of the instrument. In the case of the sulfate, the extracted ions (<1 ppm in water) were very close to the lower detection limit of the instrument.

Analysis of the DNPH cartridges and SUMMA canisters revealed anomalous  $CO_2$  concentrations which were attributed to a leak in a sub-system of the sampler. Consequently emission factor calculations could not be performed since any dilution taking place in these filter media were no longer quantifiable. As a result, only the mass concentration of species was measured. The major three contributors to the carbonyl emissions are formaldehyde, acetaldehyde, and acetone. Formaldehyde and acetaldehyde are most dominant carbonyl species in the aircraft exhaust emissions.



## 5.0 Summary and Conclusions

The objectives of the JETS APEX2 study were to produce a comprehensive data set of emission factors for total organic gases and PM for old and new technology CFM56 class engines operating out of a medium size hub airport in the State of California (i.e. Port of Oakland). This study was successful in producing the first state of the art measurements for PM physical characterization of in-service CFM56 type engines. Unfortunately, as a result of the failure of one of the non-real-time sampling systems, the TOG analysis was limited and from that perspective not all of the objectives set out in the proposed effort were accomplished. However, even with the limited TOG data this study represents the first extensive physico-chemical analysis of a series of in-service commercial engines and as such is an extremely valuable dataset. This study is part of a greater multi-agency effort that includes emissions measurements downwind of an active runway at Oakland during normal airport operations, and the results presented here are essential for the interpretation of the downwind measurements which is to follow (not a deliverable in the CARB-funded component of JETS APEX2). Preliminary analysis was presented at the APEX3 Conference in Cleveland, OH (Whitefield et al. 2006, Herndon et al. 2006) [these presentations can be found by accessing the URL: [http://particles.grc.nasa.gov/data/apex3\\_conf/](http://particles.grc.nasa.gov/data/apex3_conf/) ]

The emission factors reported here lead to the following conclusions:

- Measurement of NO<sub>x</sub> indicated that the general emissions performance of the engines was in keeping with certification measurements for the engines studied.
- Measurements of individual hydrocarbon species suggest that the Emission Indices for most of the major species decrease with increasing engine power, in proportion to each other, and specifically with formaldehyde, which is one of the most plentiful emitted hydrocarbons and can be measured accurately.
- The particle composition includes both sulfate and organic volatile fractions at downstream distances, adding to the carbonaceous aerosol that is present already at the engine exit plane. The sulfate contribution has little dependence on engine power, while the organic contribution is greatest at low engine powers.
- The relative distributions of the substituted naphthalenes to non-substituted naphthalenes for the idle modes are in general agreement with the work from Spicer et al. 1992, 1994.
- Chromium (VI) results, for all but one of the engines studied, were as expected.
- The major three contributors to the carbonyl emissions are formaldehyde, acetaldehyde, and acetone. Formaldehyde and acetaldehyde are most dominant carbonyl species in the aircraft exhaust emissions.
- The aerosol properties were calculated for the entire aerosol size distribution and not individual size modes.
- Size distributions for exit plane were generally lognormal. Strong and sometimes non-linear dependencies were observed with engine power settings.
- The onset of gas-to-particle conversion was apparent at 50m for low to medium powers. In this data non-lognormal size distributions were often observed, where the mean sizes decreased and EIn increased relative to the 1m size distributions.

- The aerosol Soluble Mass Fraction was found to increase with distance from the engine exit plane. Its value was negligible at the engine exit plane and was ~10% at 50m.

## 6.0 Recommendations

The results of this study proved that accurate emission factors can be acquired in a cost effective manner. Since the data is clearly engine/airframe specific, studies of this nature should now be performed on other important engine/airframe combinations e.g. B747/CF6-80.

The GRE at Oakland proved to be an ideal open air laboratory for dedicated aircraft engine emission studies in the exhaust nozzle and near field plumes for B737 commercial transports. The weather conditions and prevailing winds experienced on the east side of San Francisco Bay in late August were also favorable. These factors lead to the recommendation that the GRE at Oakland should be considered a high priority venue for any future scheduled tests.

It should be noted that the mix of transports routinely operating in and out of Oakland will limit the range of engines/airframes that can be studied. For future studies where B747, B757, B767, and B777 and the larger Airbus transports A320, A340 etc. are anticipated test vehicles, it will be necessary to consider attracting other aircraft to the Oakland test site or using GREs located at other airports provided appropriate weather conditions prevail.

In this study, engine operating conditions were recorded only once during each stable engine operating condition. In future tests it is recommended that high frequency data acquisition be employed for engine operating conditions. This may be difficult for older airframes but straight forward for newer additions to the commercial fleet that digitally record engine operating conditions.

Most of the data was gathered and initially analyzed in real-time. However, this was not the case for the UCR samples that were analyzed off-site post test. For future studies efforts should be expended to assure that the analysis could be undertaken for these samples on-site. This would provide quasi-real-time feedback on the integrity of such samples.

Engine to engine variability is difficult to estimate when the engine sample size is small (in this study  $\leq 4$  engines per model). The value of accurately estimating this parameter warrants the consideration of a longer period of study than the 4 days afforded this project, especially since the per-day costs are small compared to planning, preparation, set-up, and post test analysis costs.

As described in this report, valid measurements for TOG and multiple significant speciated VOCs were not obtained because of sampling and laboratory issues for the light hydrocarbon and carbonyl analyses. These measurements should be repeated at a future engine test, when the opportunity arises, to get better estimates of TOG and speciated VOCs.

## References

Alofs, D.J. (1978). "Performance of a dual-range cloud nucleus counter", *J. Appl. Meteor.*, 17:1286-1297.

Alofs, D.J. and Trueblood, M.B., (1981)."UMR dual mode CCN counter (Modes: CFD plus Haze)", *J. Rech. Atmos.*, 15:219-223.

Anderson, B. E., Branham, H.-S., Hudgins, C. H., Plant, J. V., Ballenthin, J. O., Miller, T. M., Viggiano, A. A., Blake, D. R., Boudries, H., Canagaratna, M., Maike-Lye, R. C., Onasch, T., Wormhoudt, J., Worsnop, D., Brunke, K. E., Culler, S., Penko, P., Sanders, T., Han, H.-S., Lee, P., Pui, D. Y. H., Thornhill, K. L., and Winstead, E. L., "Experiment to Characterize Aircraft Volatile Aerosol and Trace-Species Emissions (EXCAVATE)". NASA/TM-2005-213783, National Aeronautics and Space Administration, Hampton, VA, August 2005.

Biskos, G. Reavell, K., and Collings, N., "Description and Theoretical Analysis of a Differential Mobility Spectrometer", *Aerosol Sci. Technol.*, Vol. 39, 2005, 527-541.

Code of Federal Regulations. Protection of the Environment, 40 CFR 86, §86.1312-88, *Weighing chamber and microgram balance specifications*

de Gouw, J., Warneke, C., Karl, T., Eerdekens, G., van der Veen, C., and Fall, R. (2003). "Sensitivity and specificity of atmospheric trace gas detection by proton-transfer-reaction mass spectrometry", *International Journal of Mass Spectrometry*, 223: 365-382.

Dewes, W., Cottington, R., Hirsinger, F., Petzold, A., Ramarosan, R., Vogels, M., and Westerberg, J. (2000). "The AERONET Network -Emissions, Atmospheric Impact and Regulations", *Air & Space Europe* 2 1 (3).

Dutton, J. A. (chair), (2002). "Committee on Aeronautics Research and Technology for Environmental Compatibility Report: For Greener Skies – Reducing Environmental Impacts of Aviation", National Research Council, Washington D.C., ISBN: 0-309-08337-0.

Gerstle, T., Virag, P., Brown, P., and Wade, M. (2002). "Aircraft Engine and Auxiliary Power Unit Emissions Testing: Final Report F119 PW-100 Engine Emissions Testing Report", Internal Report IERA-RS-BR-SR-2002-0006.

Hagen, D.E., Podzimek, J., Heymsfield, A.J., Trueblood, M.B., and Lutrus, C.K. (1994). "Potential role of nuclei in cloud element formation at high altitudes", *Atmospheric Research* 31:123-135.

Hagen, D.E., Podzimek, J., and Trueblood, M.B. (1995). "Upper tropospheric aerosol sampled during project FIRE IFO II", *J. Atmos. Sci.* 52:4196-4209.

Hagen, D.E., Paladino, J., Whitefield, P.D., Trueblood, M.B., and Lilenfeld, H.V. (1997). "Airborne and ground based jet engine aerosol emissions sampling during two NASA field projects: SUCCESS and SNIF", *J. Aerosol Sci.* 28:S67-S68.

Hagen, D. and Whitefield, P.D. (2003). "A study of the fate of carbonaceous aerosol emissions through a gas turbine engine", A&WMA Conf. Proc.

Hagen, D.E., Whitefield, P.D., Lobo, P., and Trueblood, M.B. (2005). "PM Emission From a Commercial Jet Engine – Project APEX", Proc. 9<sup>th</sup>-Combustion Generated Nanoparticles Conf., Zurich.

Heard, D. E. (ed) (2006). *Analytical Techniques for Atmospheric Measurement*. Blackwell Publishing, Oxford.

Heland, J. and Schafer, K. (1998). "Determination of Major Combustion Products In Aircraft Exhausts by FTIR Emission Spectroscopy", *Atmospheric Environment* 32 (18):3067-3072.

Herndon, S. C., Shorter, J. H., Zahniser, M. S., Nelson, D. D., Jayne, J., Brown, R. C., Miake-Lye, R. C., Waitz, I., Silva, P., Lanni, T., Demerjian, K., and Kolb, C. E. (2004). "NO and NO<sub>2</sub> Emission Ratios Measured from In-Use Commercial Aircraft During Taxi and Takeoff", *Environ. Sci. Technol.*, 38:6078-6084.

Herndon, S. C., Shorter, J. H., Zahniser, M. S., Wormhoudt, J., Nelson, D. D., Demerjian, K. L., and Kolb, C. E. (2005). "Real-time Measurements of SO<sub>2</sub>, H<sub>2</sub>CO and CH<sub>4</sub> Emissions from in-use Curbside Passenger Buses in New York City using a Chase Vehicle", *Environ. Sci. Technol.*, 39:7984-7990.

Herndon, S. C., Rogers, T., Dunlea, E. J., Jayne, J. T., Miake-Lye, R. C., and Knighton, B. (2006). "Hydrocarbon Emissions from In-Use Commercial Aircraft during Airport Operations", *Environmental Science & Technology*, 40 (14):4406 - 4413.

Herndon, S., Onasch, T., Knighton, B., Wood, E., Timko, M., Jayne, J., Wormhoudt, J., Northway, M., Mortimer, P., Yelvington, P., Wong, H.-W., Shorter, J., McManus, B., Nelson, D., Zahniser, M., Worsnop, D., Kolb, C., Whitefield, P., Lobo, P., Hagen, D., Anderson, B., Wey, C., Howard, R., Kinsey, J., and Miake-Lye, R. "Aviation Engine Emissions Characterization using Wind-Advected Plumes", APEX 3 Conference, Cleveland OH, November 29-December 01, 2006

ICAO, International Civil Aviation Organization *Aircraft Engine Emissions DataBank*. (2006)

Jayne, J. T., Leard, D. C., Zhang, X. F., Davidovits, P., Smith, K. A., Kolb, C. E., and Worsnop, D. R. (2000). "Development of an aerosol mass spectrometer for size and composition analysis of submicron particles", *Aerosol Science and Technology*, 33(1-2):49-70.

Jimenez, J. L., Jayne, J. T., Shi, Q., Kolb, C. E., Worsnop, D. R., Yourshaw, I., Seinfeld, J. H., Flagan, R. C., Zhang, X. F., Smith, K. A., Morris, J. W., and Davidovits, P. (2003). "Ambient aerosol sampling using the Aerodyne Aerosol Mass Spectrometer", *Journal of Geophysical Research-Atmospheres*, 108(D7).

Knighton, W. B., Rogers, T. M., Anderson, B. E., Herndon, S. C., Yelvington, P. E., and Miake-Lye, R. C. (2007). "Quantification of Aircraft Engine Hydrocarbon Emissions Using Proton Transfer Reaction Mass Spectrometry", *Journal of Propulsion and Power*, Vol. 23, No. 5, 949-958

Lilenfeld, H.V., Whitefield, P.D., and Hagen, D.E. (1995). "Soot emissions from jet aircraft", AIAA (Amer. Institute of Aeronautics and Astronautics) paper No. 95-0110.

Li, W., Montassier, N. and Hopke, P. (1992). "A System to Measure the Hygroscopicity of Aerosol Particles", *Aerosol Sci. Technol.*, 17:25-35.

Lister, D. H. and Norman, P. D. (2003). "EC-NEPAir: Work Package 1 Aircraft Engine Emissions Certification - a Review of the Development of ICAO Annex 16", Volume II, GR4D-CT-2000-00182.

Lobo, P., Hagen, D.E., Whitefield, P.D., and Alofs, D.J. (2007). "Physical Characterization of Aerosol Emissions from a Commercial Gas Turbine Engine." *Journal of Propulsion and Power*, Vol. 23, No. 5, 919-929

Nelson, D. D., McManus, J. B., Urbanski, S., Herndon, S., and Zahniser, M. S. (2004). High precision measurements of atmospheric nitrous oxide and methane using thermoelectrically cooled mid-infrared quantum cascade lasers and detectors. *Spectrochimica Acta A*, 60:3325-3335.

NIOSH (National Institute of Occupational Safety and Health), (1996). *NIOSH Manual of Analytical Methods*, Cincinnati, OH.

NRC (National Research Council), (2003). "Toxicological Assessment of Jet-Propulsion Fuel 8", The National Academic Press.

Onasch, T.B., Jayne, J.T., Herndon, S., Canagaratna, M.R., Mortimer, I.P., Worsnop, D.R., Miake-Lye, R.C., and Anderson, B.E. (2007) "Chemical Properties of Aircraft Engine Exhaust Aerosols Sampled during APEX", *manuscript in preparation*

Penner, J. E., Lister, D. H., Griggs, D. J., Dokken, D. J., and McFarland, M. (eds.), (1999). "Aviation and the Global Atmosphere", IPCC Report, Cambridge University Press, Cambridge, UK, p. 373.

Petzold, A., Strom, J., Schroeder, F. P., and Karcher, B. (1999). "Carbonaceous Aerosol in Jet Engine Exhaust: Emission Characteristics and Implications for Heterogeneous Chemical Reactions", *Atmospheric Environment* 33:2689-2698.

Petzold, A. (2001). "Aircraft Engine Exhaust Measurement", *Air & Space Europe* 3 (1/2):92-95.

Petzold, A., Kramer, H., and Schonlinner, M. (2002). "Continuous Measurement of Atmospheric Black Carbon using a Multi-Angle Absorption Photometer", *Environ. Sci. Poll. Res.*, 4:78-82.

Petzold, A., and Schonlinner, M. (2004). "Multi-angle absorption photometry -- a new method for the measurement of aerosol light absorption and atmospheric black carbon", *J. Aerosol Sci.*, 35:421-441.

Podzimek, J., Hagen, D.E., and Robb, E. (1995). "Large aerosol particles in cirrus type clouds", *Atmos. Res.* 38:263-282.

Popp, P. J., Bishop, G. A., and Stedman, D. H. (1999). "Method for Commercial Aircraft Nitric Oxide Emission Measurements", *Environ. Sci. Technol.* 33:1542-1544.

Samet, J. M., Dominici, F., Curriero, F. C., Coursac, I., and Zeger, A. L. (2000). "Fine Particulate Air Pollution and Mortality in 20 U. S. Cities, 1987-1994", *N. Engl. J. Med.*, 343:1742-1749.

Sassen, K., Starr, D.C., Mace, G.G., Poellot, M.R., Melfi, S.H., Eberhard, W.L., Spinhirne, J.D., Eloranta, E.W., Hagen, D.E., and Hallett, J. (1995). "The 5-6 December 1991 FIRE IFO II Jet Stream Cirrus Case Study: Possible influences of volcanic aerosols", *J. Atmos. Sci.* 52:97-123.

Schmid, O., Hagen, D., Whitefield, P., Trueblood, M., Rutter, A., and Lilienfeld, H. (2004). "Methodology for particle characterization in the exhaust flow of gas turbine engines", *Aerosol Sci. & Technol.* 38:1108-1122.

Shah, S.D., Ogunyoku, T. A., Miller, J. W., and Cocker III, D. R. (2004), "On-Road Emission Rates of PAH and n-Alkane Compounds from Heavy-Duty Diesel Vehicles", Submitted to *Environ. Sci. & Technol.*, November, 2004

Siegl, W. O., Richert, J. F. O., Jensen, T. E., Schuetzle, D., Swarin, S. J., Loo, J. F., Probst, A., Nagy, D., and Schlenker, A. M. (1993). "Improved Emissions Speciation Methodology for Phase II of The Auto/Oil Air Quality Improvement Research Programs Hydrocarbons and Oxygenates." *SAE Tech. Pap. Ser., No. 930142*, Special Publication SP-1000.

Spicer, C.W., Holdren, M.W., Smith, D.L., Hughes, D.P., and Smith, M.D. (1992). "Chemical Composition of Exhaust from Aircraft Turbine Engines", *J. Eng. Gas Turbines Power* 114 (1): 111-117.

Spicer, C.W., Holdren, M.W., Riggin, R.M., and Lyon, T.F. (1994). "Chemical Composition and Photochemical Reactivity of Exhaust from Aircraft Turbine Engines", *Ann. Geophys.* 12:944–955.

Tesseraux, I. (2004). "Risk Factors of Jet Fuel Combustion Products", *Toxicology Letters* 149:295–300.

Waitz, I. A., Townsend, J., Cutcher-Gershenfeld, J., Greitzer, E. M., and Kerrebrock, J. L. "Aviation and the Environment: A National Vision Statement, Framework for Goals and Recommended Actions," *Report to the United States Congress*, on behalf of the U.S. DOT, FAA and NASA, December 2004

Wey, C.C., Anderson, B.E., Hudgins, C., Wey, C., Li-Jones, X., Winstead, E., Thornhill, L.K., Lobo, P., Hagen, D., Whitefield, P., Yelvington, P. E., Herndon, S.C., Onasch, T.B., Miake-Lye, R.C., Wormhoudt, J., Knighton, W.B., Howard, R., Bryant, D., Corporan, E., Moses, C., Holve, D., and Dodds, W. "Aircraft Particle Emissions eXperiment (APEX)" NASA/TM-2006-214382, ARL-TR-3903, National Aeronautics and Space Administration, Cleveland, OH, September 2006.

Whitefield, P.D. and Hagen, D.E. (1995). "Particulates and aerosol sampling from combustor rigs using the UMR mobile aerosol sampling system (MASS)", AIAA (Amer. Institute of Aeronautics and Astronautics) paper No. 95-0111.

Whitefield, P.D., Hagen, D.E., and Lilienfeld, H.V. (1997). "Ground based measurements of particulate emissions from supersonic transports - Concorde Olympus engine", Proc. of the Comite Avion Ozone International Colloquium I:119-124.

Whitefield, P., Hagen, D., Siple, G., and Pherson, J. (2001). "Estimation of particulate emission indices as a function of size for the LTO cycle for commercial jet engines", A&WMA Conf. Proc. #347.

Whitefield, P. D., Hagen, D. E., Wormhoudt, J. C., Miake-Lye, R. C., Wilson, C., Brundish, K., Waitz, I., Lukachko, S., and Yam, C. K. (2002). NASA/QinetiQ Collaborative Program-Final Report. NASA CR-2002-211900.

Whitefield, P., Lobo, P., and Hagen, D., "JETS APEX2 Runway Study", APEX3 Conference, Cleveland, OH. November 29- December 01, 2006

Wilson, C. W., Petzold, A., Nyeki, S., Schumann, U., and Zellner, R. (2004). "Measurement and Prediction of Emissions of Aerosols and Gaseous Precursors from Gas Turbine Engines (PartEmis): An Overview", *Aerospace Science and Technology* 8:131–143.

Wormhoudt, J., Herndon, S.C., Yelvington, P.E., Miake-Lye, R.C., and Wey, C. (2007) "Nitrogen Oxide (NO/NO<sub>2</sub>/HONO) Emissions Measurements in Aircraft Exhausts", *Journal of Propulsion and Power*, Vol. 23, No. 5, 906-911



Yelvington, P. E., Herndon, S. C., Wormhoudt, J., Jayne, J. T., Miake-Lye, R. C., Knighton, W. B., and Wey, C. (2007). "Chemical Speciation of Hydrocarbon Emissions from a Commercial Aircraft Engine", *Journal of Propulsion and Power*, Vol. 23, No. 5, 912-918

### **List of inventions reported and publications produced**

At this time there are no inventions to report and none to be anticipated. With respect to publications, there are no publications at this time; however, several are in preparation once approval for public release of this data has been provided.


## Glossary of terms, abbreviations and symbols

AMS	Aerosol Mass Spectrometer
APU	Auxiliary Power Unit
ARI	Aerodyne Research Inc.
BC	Black Carbon aerosol
BDL	Below Detection Limit
CAEP	Committee on Aviation and Environmental Protection
CFO	critical flow element
CFR	Code of Federal Regulations
CH <sub>2</sub> O	formaldehyde
CO	Carbon monoxide
CO <sub>2</sub>	Carbon dioxide
CPC	Condensation Particle Counters
Dgeom	Number-based geometric mean diameter
DMA	Differential Mobility Analyzers
DMS	Differential Mobility Spectrometers
DNPH	dinitrophenylhydrazine
DoD	Department of Defense
EC	Elemental Carbon
EI's	emission indices
EIm	Mass-based emission index
EIR	Environmental Impact Report
EPA	Environmental Protection Agency
FAA	Federal Aviation Administration
FID	flame ionization detector
GC	gas chromatograph
GC/FID	field ionization detector
GC/MS	mass spectrometer detector
GRE	Ground Runup Enclosure
GSEs	ground support equipment
H <sub>2</sub> O	Water
HC	hydrocarbon
HCHO	Formaldehyde
HNO <sub>3</sub>	nitric acid
HPLC	high performance liquid chromatograph
HRGC	high resolution gas chromatography
HRMS	high resolution mass spectrometry
ICAO	International Civil Aviation Organization
LPC	laser particle counter
LPM	liter per minute
LTO	landing and takeoff
MAAP	Multi-Angle Absorption Photometer
mz	mass-to-charge ratio
NASA	National Aeronautics and Space Administration
NCAR's	National Center for Atmospheric Research

NEPAIR	New Emissions Parameter
NH <sub>4</sub> <sup>+</sup>	ammonium
NIOSH	National Institute of Occupational Safety and Health
NMVOCs -C <sub>2</sub> -C <sub>10</sub>	non-methane hydrocarbons
NO	Nitric Oxide
n <sub>o</sub>	total particle concentration
NO <sub>x</sub>	oxides of nitrogen
OAK	Oakland International Airport
OC	organic carbon
PAHs	Polycyclic Aromatic Hydrocarbons
PCDD's	polychlorinated dibenzo-p-dioxins
PCDF's	polychlorinated dibenzofurans
Pen	penetration factor
PM	particulate matter
PTR-MS	Proton-Transfer Reaction Mass Spectroscopy
PUF/XAD-4	polyurethane foam
R	concentration of a HC emission component
SMF	Soluble Mass Fraction
SN	smoke number
SO <sub>2</sub>	Sulfur Dioxide
SVOCs	semi-volatile organic compounds
SWA	Southwest Airlines
TEM	Transmission Electronic Microscopy
THC	total hydrocarbons
TILDAS	Tunable Infrared Laser Differential Absorption Spectroscopy
TOG	total organic gases
UCR	University of California-Riverside
UHCs	unburned/partially combusted hydrocarbons
UMR	University of Missouri-Rolla
UMRCOE	University of Missouri-Rolla Center of Excellence
VOC	Volatile Organic Compounds
VVOCs	very volatile organic carbon gases


# APPENDIX A

## Oakland International Airport Diagram

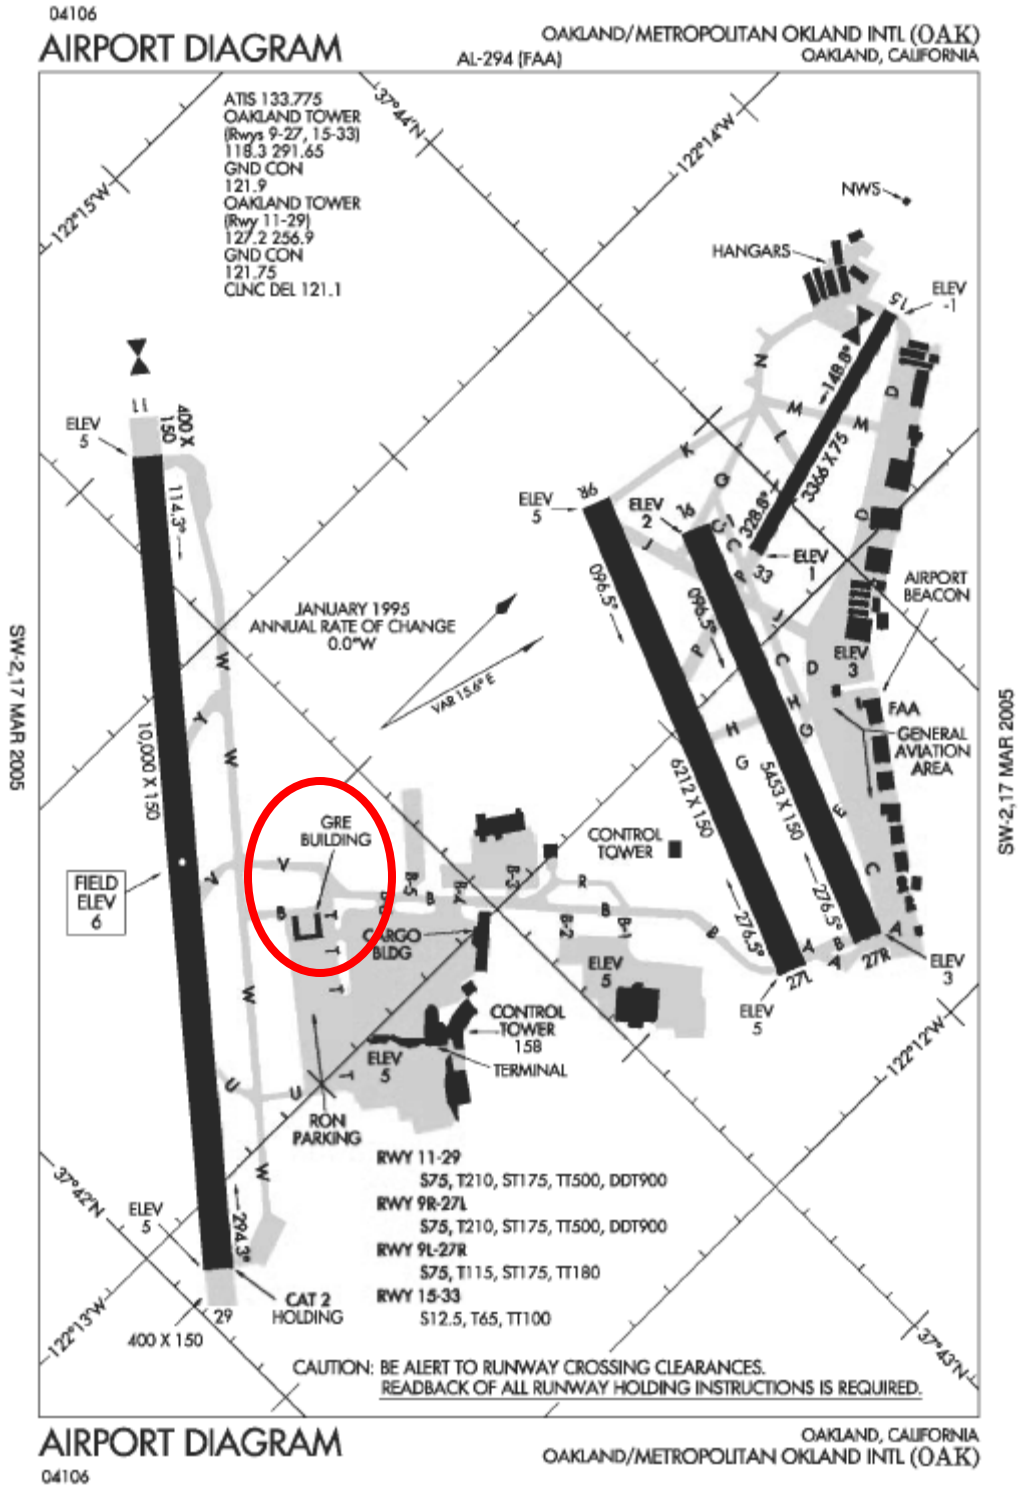


## APPENDIX B

### Wind Roses (all times in Pacific Standard Time)

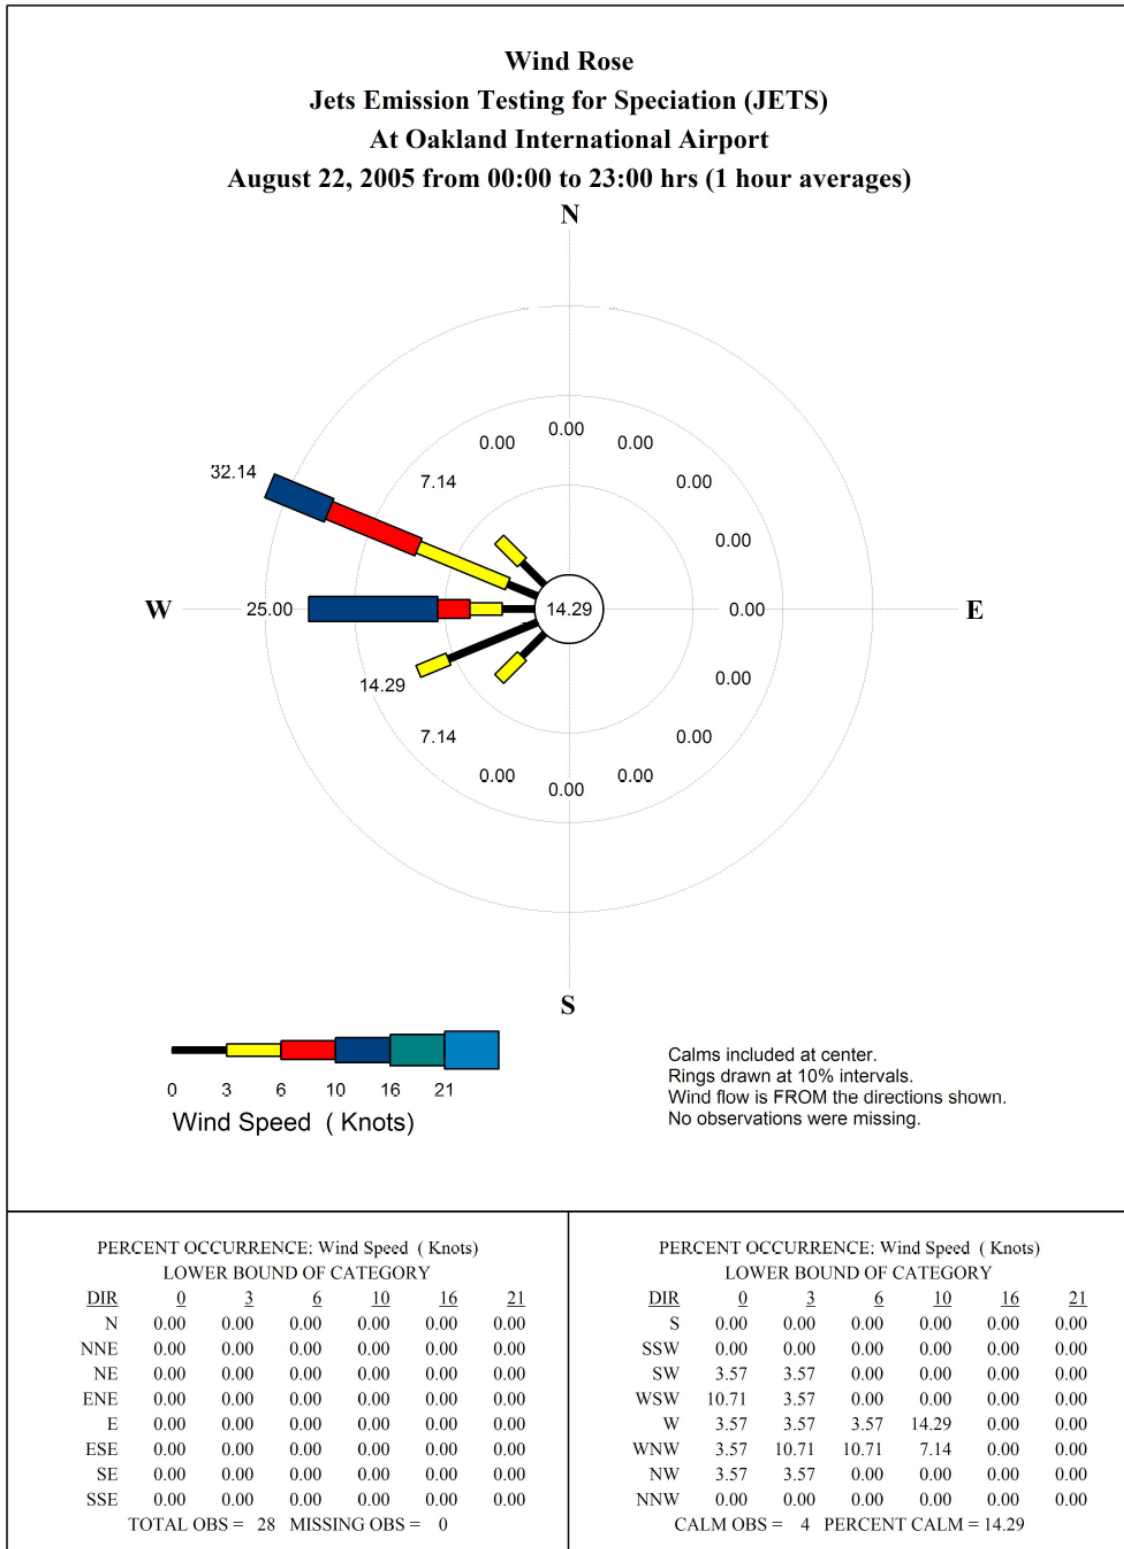

**Wind Rose**  
**Jets Emission Testing for Speciation (JETS)**  
**At Oakland International Airport**  
**August 23, 2005 from 00:00 to 23:00 hrs (1 hour averages)**

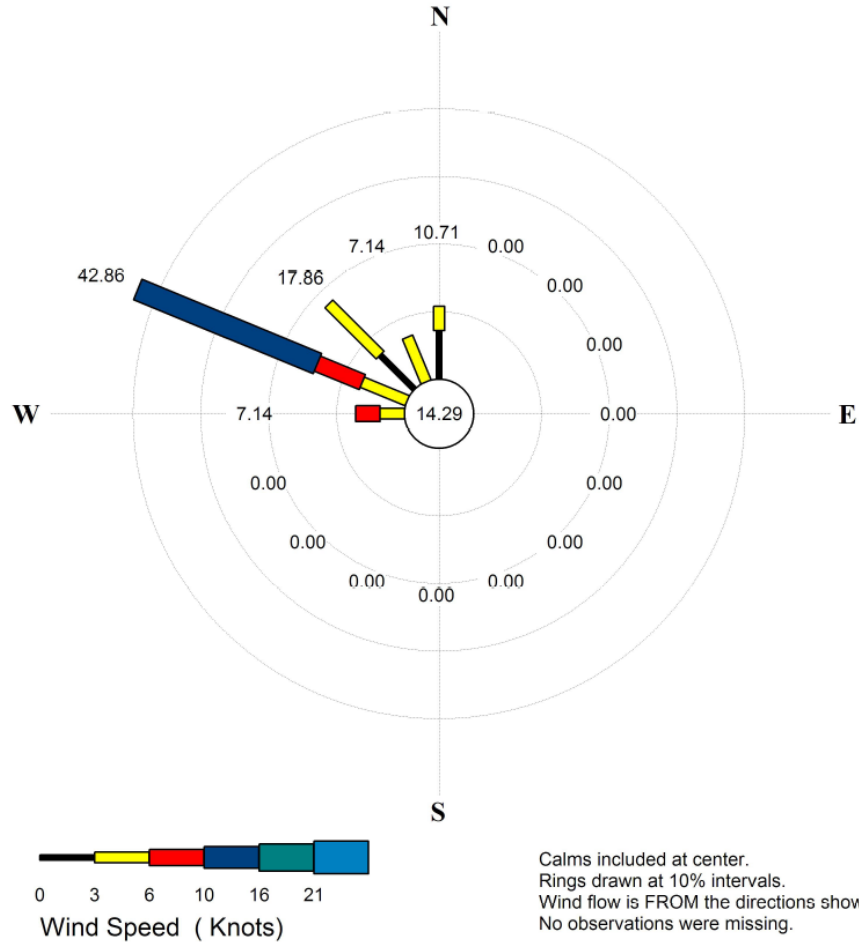


PERCENT OCCURRENCE: Wind Speed (Knots)  
LOWER BOUND OF CATEGORY

DIR	0	3	6	10	16	21
N	7.14	3.57	0.00	0.00	0.00	0.00
NNE	0.00	0.00	0.00	0.00	0.00	0.00
NE	0.00	0.00	0.00	0.00	0.00	0.00
ENE	0.00	0.00	0.00	0.00	0.00	0.00
E	0.00	0.00	0.00	0.00	0.00	0.00
ESE	0.00	0.00	0.00	0.00	0.00	0.00
SE	0.00	0.00	0.00	0.00	0.00	0.00
SSE	0.00	0.00	0.00	0.00	0.00	0.00
TOTAL OBS = 28 MISSING OBS = 0						

PERCENT OCCURRENCE: Wind Speed (Knots)  
LOWER BOUND OF CATEGORY

DIR	0	3	6	10	16	21
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	0.00	0.00	0.00	0.00	0.00	0.00
SW	0.00	0.00	0.00	0.00	0.00	0.00
WSW	0.00	0.00	0.00	0.00	0.00	0.00
W	0.00	3.57	3.57	0.00	0.00	0.00
WNW	0.00	7.14	7.14	28.57	0.00	0.00
NW	7.14	10.71	0.00	0.00	0.00	0.00
NNW	0.00	7.14	0.00	0.00	0.00	0.00
CALM OBS = 4 PERCENT CALM = 14.29						

**Wind Rose**  
**Jets Emission Testing for Speciation (JETS)**  
**At Oakland International Airport**  
**August 24, 2005 from 00:00 to 23:00 hrs (1 hour averages)**

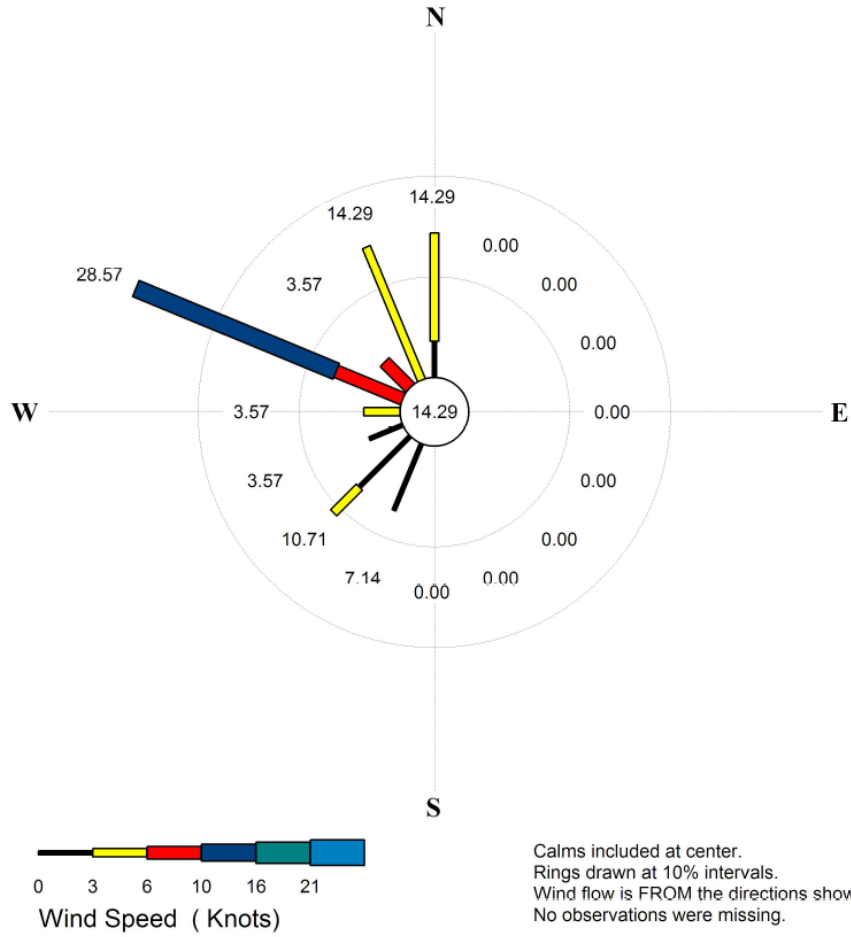

PERCENT OCCURRENCE: Wind Speed ( Knots)  
LOWER BOUND OF CATEGORY

DIR	0	3	6	10	16	21
N	3.57	10.71	0.00	0.00	0.00	0.00
NNE	0.00	0.00	0.00	0.00	0.00	0.00
NE	0.00	0.00	0.00	0.00	0.00	0.00
ENE	0.00	0.00	0.00	0.00	0.00	0.00
E	0.00	0.00	0.00	0.00	0.00	0.00
ESE	0.00	0.00	0.00	0.00	0.00	0.00
SE	0.00	0.00	0.00	0.00	0.00	0.00
SSE	0.00	0.00	0.00	0.00	0.00	0.00

TOTAL OBS = 28 MISSING OBS = 0

PERCENT OCCURRENCE: Wind Speed ( Knots)  
LOWER BOUND OF CATEGORY


DIR	0	3	6	10	16	21
S	0.00	0.00	0.00	0.00	0.00	0.00
SSW	7.14	0.00	0.00	0.00	0.00	0.00
SW	7.14	3.57	0.00	0.00	0.00	0.00
WSW	3.57	0.00	0.00	0.00	0.00	0.00
W	0.00	3.57	0.00	0.00	0.00	0.00
WNW	0.00	0.00	7.14	21.43	0.00	0.00
NW	0.00	0.00	3.57	0.00	0.00	0.00
NNW	0.00	14.29	0.00	0.00	0.00	0.00

CALM OBS = 4 PERCENT CALM = 14.29



## APPENDIX C

### Ambient DNPH cartridge sample results

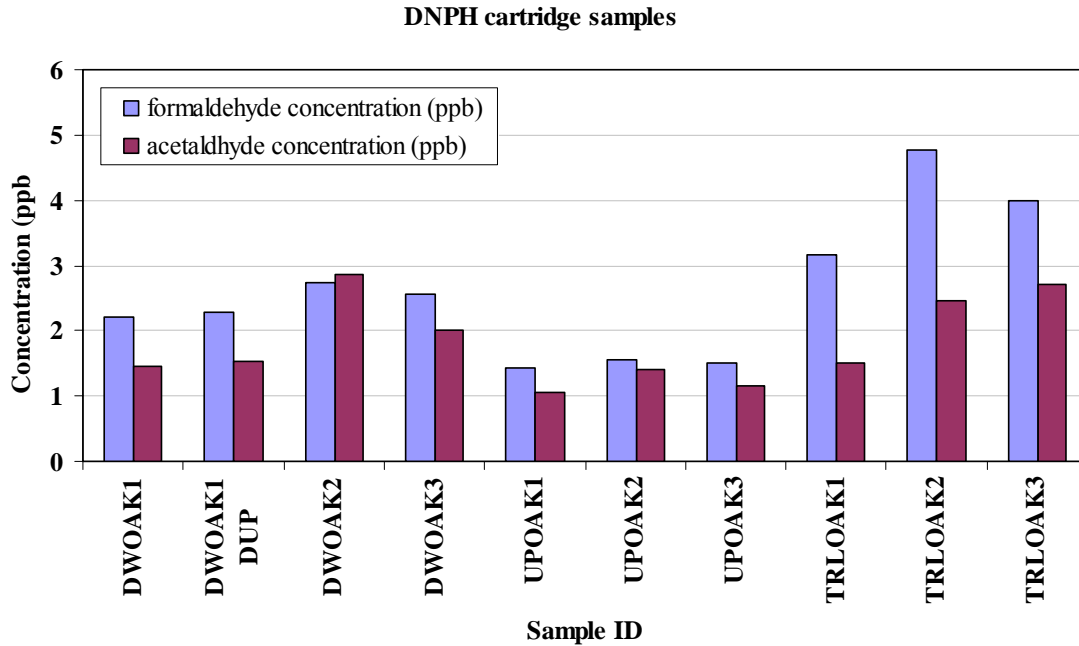

Sample ID	Definition	Start day, Time	End day, Time
DWOAK1	Downwind	8/22/2005 6:06 pm	8/23/2005 4:39 am
DWOAK1 DUP	Downwind Duplicate	8/22/2005 6:06 pm	8/23/2005 4:39 am
DWOAK2	Downwind	8/23/2005 8:04 pm	8/24/2005 5:56 am
DWOAK3	Downwind	8/24/2005 7:52 pm	8/25/2005 5:37 am
UPOAK1	Upwind	8/22/2005 7:19 pm	8/23/2005 5:15 am
UPOAK2	Upwind	8/23/2005 8:36 pm	8/24/2005 6:18 am
UPOAK3	Upwind	8/24/2005 8:17 pm	8/25/2005 6:21 am
TRLOAK1	ARB trailer	8/22/2005 6:52 pm	8/23/2005 5:53 am
TRLOAK2	ARB trailer	8/23/2005 7:39 pm	8/24/2005 6:45 am
TRLOAK3	ARB trailer	8/24/2005 7:33 pm	8/25/2005 2:28 am


The following compounds were undetectable:

Propanal, Acetone, Crotonaldehyde, Methyl Ethyl Ketone/Butyraldehydes, Benzaldehyde, Isopentanal, Pentanal, o-Tolualdehyde, m,p-Tolualdehyde, Hexanal

## APPENDIX D

### Ambient canister sample results

#### Upwind, GRE entrance and Downwind HCs

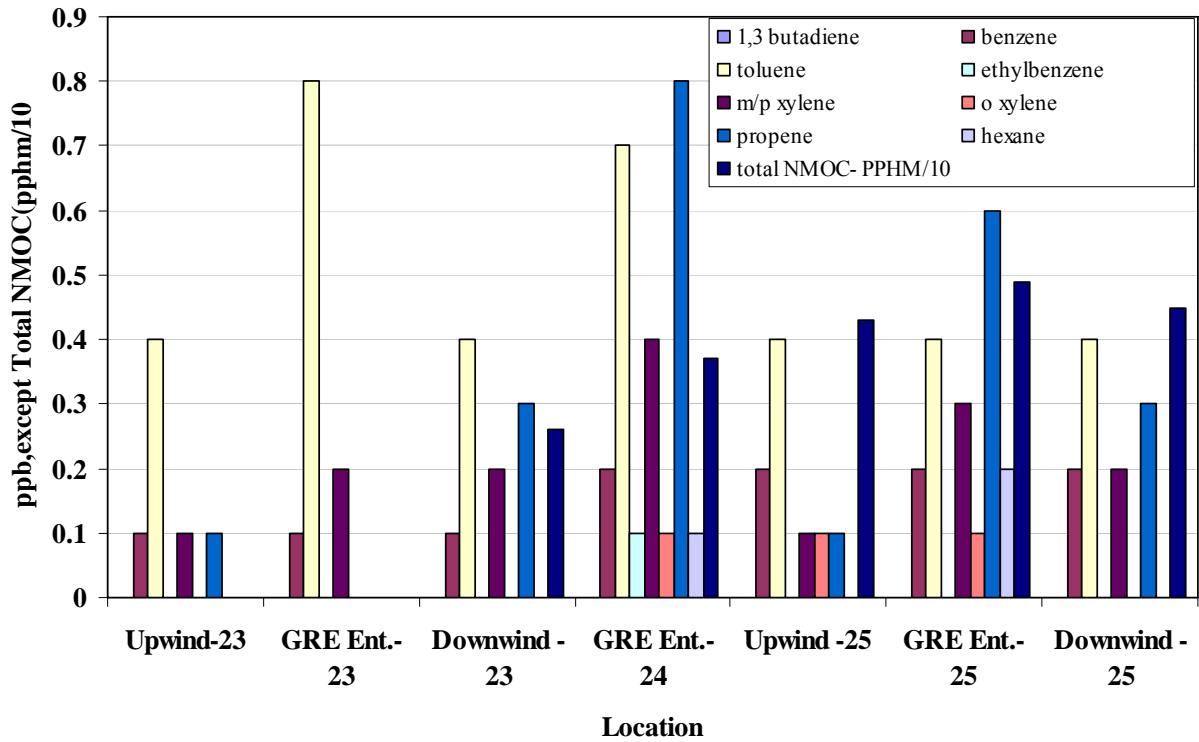

Location	Date	Start time	End time
Upwind-23	8/23/2005	8/22-19:03	batt. died
GRE Ent.-23	8/23/2005	8/22-19:59	8/23-06:04
Downwind -23	8/23/2005	8/22-18:00	batt. died
GRE Ent.-24	8/24/2005	8/23-20:55	8/24-06:50
Upwind -25	8/25/2005	8/24-18:25	8/25-06:14
GRE Ent.-25	8/25/2005	8/24-20:40	8/25-03:43
Downwind -25	8/25/2005	8/24-17:53	8/25-05:30

Notes:

Propene and hexane analyzed using MLD 24

Total NMOC analyzed using TO-12

All other compounds analyzed using MLD 52

Two canister samples from 8/24 sampling date did not fill

## APPENDIX E

### Spatial arrangement of sampling probes

## Probe Configuration of the Left and Right Rakes

### JETS-APEX2

Aircraft #1 (737-700), #2 & 3 (737-300)

#### Port Rake (aft looking forward)

*Pr1 - Spare*

T1 - AEDC

Pr2 - NASA Pressure Transducer

Gx1 - AEDC SM/AFR OSM

P1 - Particle Sampling Group (ganged w/P2)

G1 - NASA CGA & MGA

Gx2 - UCR Dioxin & Cr+6

P2 - Particle Sampling Group (ganged w/P1)

G2 - NASA TEOM

G3 - NASA CGA & MGA

T2 - AEDC

*Pr3 - Spare*

#### Starboard Rake (aft looking forward)

T1 - AEDC

*Gx1 - Spare*

Gx2 - UCR Speciated HC/PM

Gx3 - UCR Speciated HC/PM

P1 - Particle Sampling Group (ganged w/P2)

G1 - AEDC MGA/NASA CGA

Gx4 - UCR Speciated HC/PM

P2 - Particle Sampling Group (ganged w/P1)

Gx5 - UCR Speciated HC/PM

Gx6 - AEDC SM/ AFR OSM

P3 - instrumented with TCs (T1 & T2) - AEDC

T2 - AEDC

G = Gas Probes with 0.062" inlet orifice (incidental water cooling)

Gx = Gas Probes with 0.152" inlet orifice (no water cooling)

P = Particle Probes

## APPENDIX F

### Willard Dodds' (GEAE) Reports on Representativeness of Engine Performance and Emissions

# Apex2 Engine Performance

Precise characterization of engine performance would require more and/or better quality data and detailed data analysis

- Data are not available for all aircraft
- Ambient temperature/pressure were not provided
- Hand logged steady state engine data accuracy is not always adequate to get significant details (e.g. 1% fuel flow is significant), but we can observe main effects.


# What are We Looking For?

We expect core Speed (N2) to correlate closely with fan speed (N1). This is just a check of the general engine data quality.


Exhaust gas temperature (EGT) is a measure of performance deterioration. Higher than average EGT at the high thrust points is an indication of deterioration. EGT was logged to the nearest degree, but uncertainty in reading the gages is probably 2 to 3 degrees. Considering gage readability, a difference of 5 to 10 degrees is probably a significant indicator of deterioration.

Fuel flow (FF) is another indicator of performance deterioration. A two percent change in fuel flow is significant, but gage readability might not be adequate to see such a small change.


# Engine Core Speed (N2)

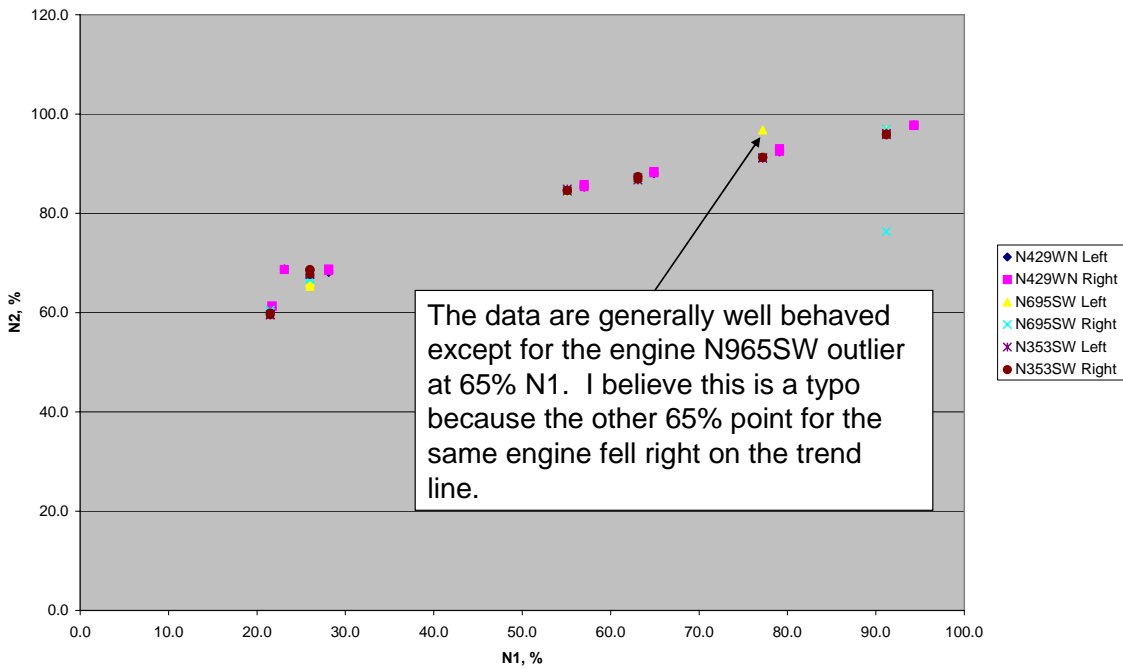

# Engine EGT

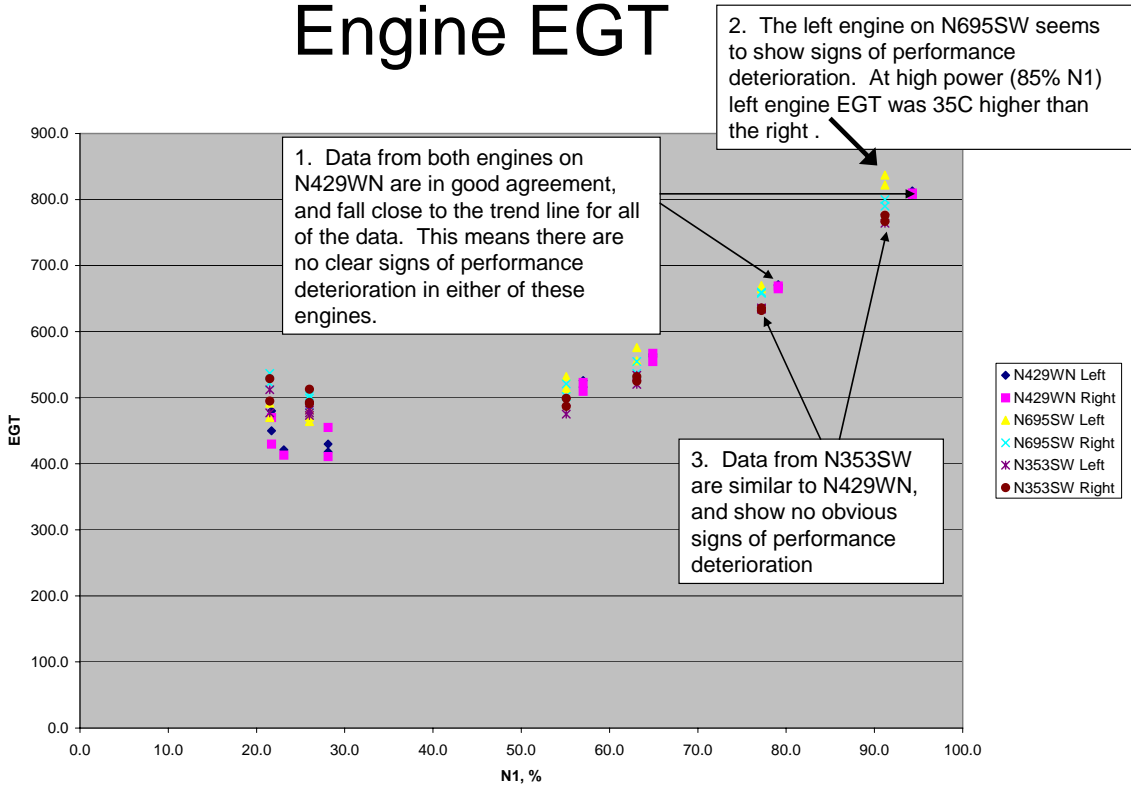

# Engine Fuel Flow

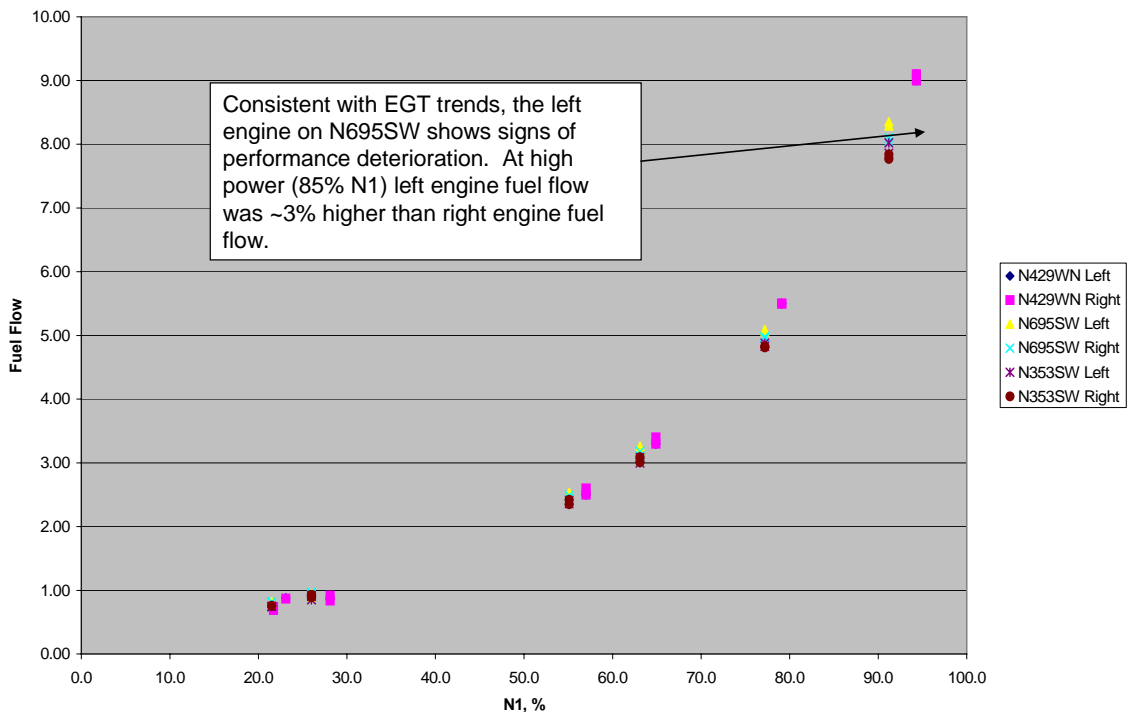

## Summary

Trends in engine core speed, EGT and fuel flow data are generally consistent with expectations.

The only apparent indication of performance deterioration was on the left engine of N695SW.

Performance deterioration would tend to increase combustor inlet temperature and fuel-air ratio, which would increase smoke emissions.

Additional detailed engine performance data analysis could be completed, if needed.

## APEX2 - Gaseous Emission Results of First 737-700 Engine Test

Willard Dodds, GEAE


Changlie Wey, QSS/NASA GRC

Gaseous emissions and sample fuel air ratio from Probe GR1, as measured by NASA Glenn, are compared to CFM56-7B24 engine certification results in the four plots below. All of the preliminary gaseous emission data are in Tables 1 and 2.

The sample fuel air ratios at all conditions were within 5% of expected levels (based on certification tests). During the certification tests, the fuel air ratio at each point was shown to be within 10% of the expected core flow value, based on engine cycle calculations. This indicates that Rake LG1 was measuring a representative sample of the core engine exhaust. The NASA data indicate that the core engine gas samples entering Probes LG3 and RG1 were diluted by about 30 to 40% fan air, but emissions indexes are in reasonable agreement with LG1. The sample collected at 30 meters is diluted by a factor of more than 10, and NASA emissions indexes for the 30-meter probe do not agree with LG1. This could be due to the low concentrations of CO, HC and NO<sub>x</sub> at 30 meters, which are not in the normal calibration range for gas sample measurements.

All gaseous emissions measured with probe LG1 are in good agreement with certification results. At 30% thrust, HC levels are higher when the engine is cool (during the initial run up from start to 85% thrust). This effect has been noted in previous tests. Certification tests are run on a warm engine (high power points are run first).

Based on these results, the emissions from this engine seem to be representative of the CFM56-7B engine type, and the samples from Probes LG1 and nearby probes were well within the core stream during the test. The effect of potential dilution by fan air should be considered in looking at data from other probe locations.

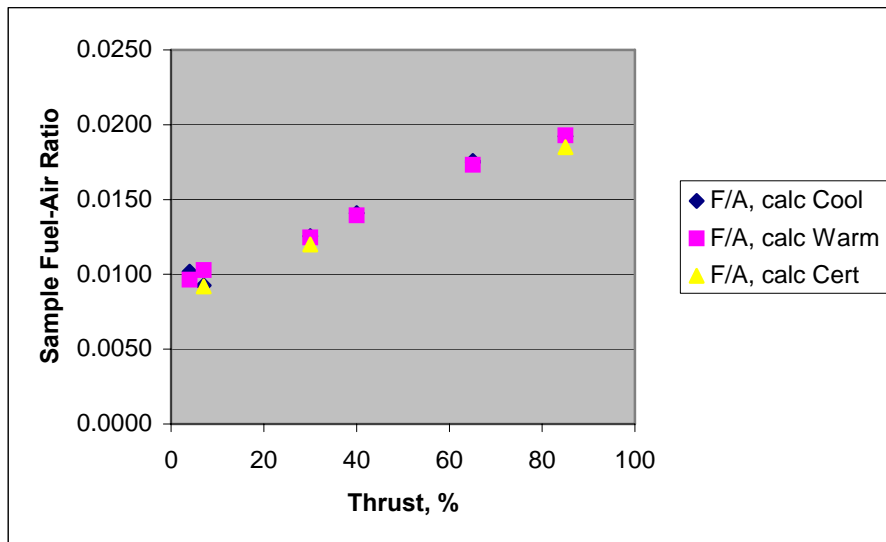

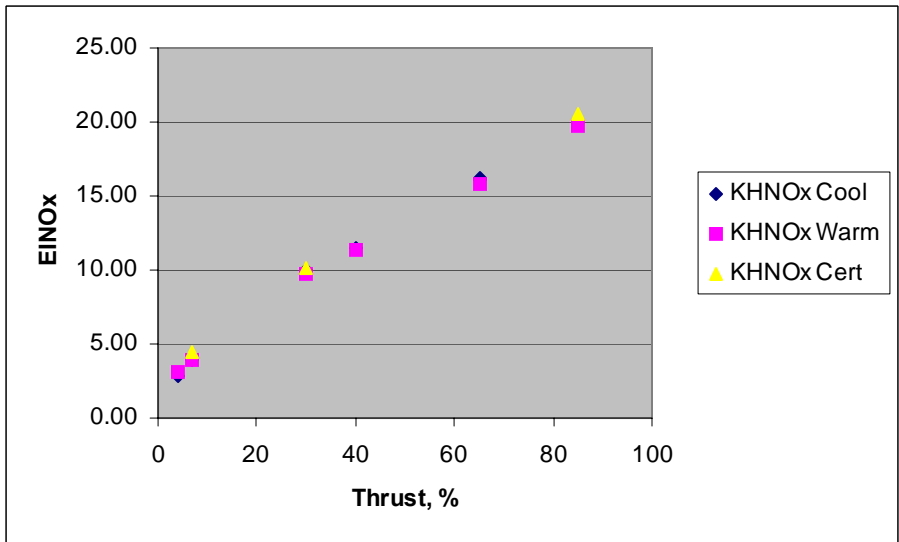
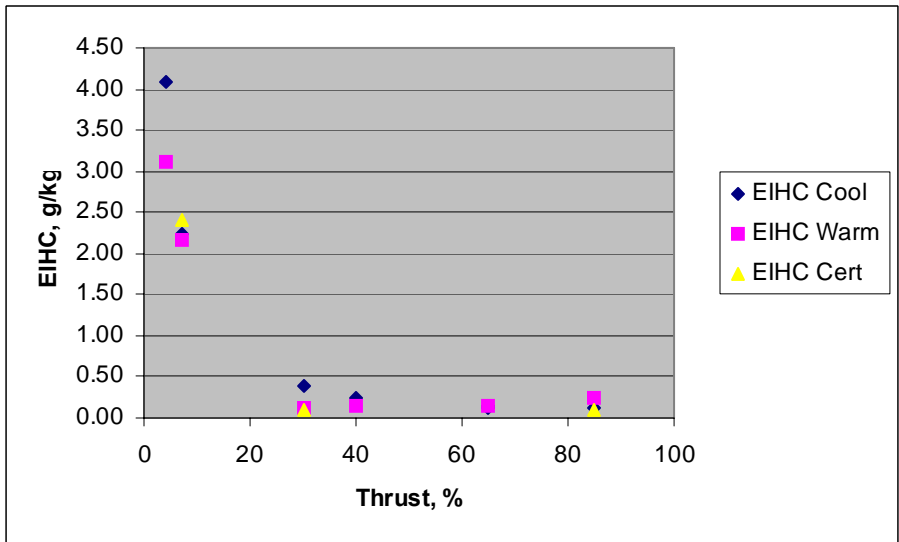
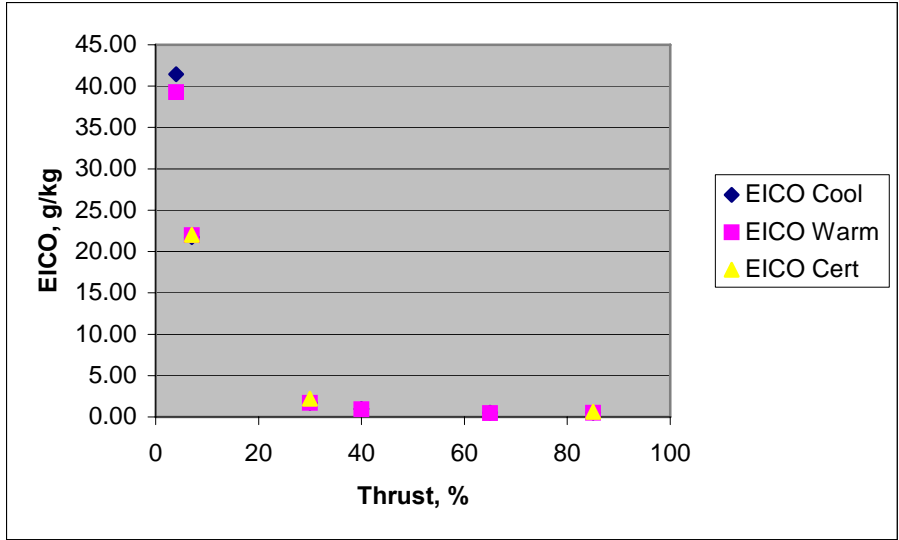




Table 1. Preliminary Raw Emissions Data.

Date	Power	Probe	Time	CO2 (dry) ppm	CO (dry) ppm	O2 (dry) %	NOx (wet) ppm	NO(wet) ppm	NO2 (wet) ppm	HC (wet) ppm	P,psia	Tdew,F
8/23/2005	4	LG1	2:08:20	21182.7	440.98	18.55	16.75	15.35	1.40	73.31	14.64	52
8/23/2005	4	LG3	2:10:31	13209.6	280.46	19.73	8.78	1.47	7.29	53.76	14.63	52
8/23/2005	4	30M	2:12:20	1596.9	12.32	21.30	0.81	0.33	0.47	14.27	14.63	52
8/23/2005	4	RG1	2:15:26	13776.0	263.92	19.77	9.60	1.36	8.22	50.53	14.63	52
8/23/2005	7	LG1	2:18:55	19505.1	210.41	18.97	21.62	20.67	0.91	36.60	14.64	52
8/23/2005	7	LG3	2:20:59	13773.3	180.19	19.73	12.43	5.42	6.98	36.15	14.63	52
8/23/2005	7	30M	2:22:53	1826.1	7.73	21.38	1.08	0.58	0.50	11.22	14.63	52
8/23/2005	7	RG1	2:25:11	12573.6	105.00	19.95	12.91	7.54	5.36	17.29	14.63	52
8/23/2005	30	LG1	2:30:36	26700.0	22.43	18.07	74.00	72.68	1.31	8.59	14.63	52
8/23/2005	30	LG3	2:32:16	19470.3	15.91	19.05	50.48	45.96	4.44	7.63	14.63	52
8/23/2005	30	30M	2:34:19	2275.5	2.23	21.41	2.66	2.09	0.56	7.37	14.63	52
8/23/2005	30	RG1	2:36:21	17534.5	14.64	19.36	41.99	37.78	4.18	6.01	14.63	52
8/23/2005	40	LG1	2:40:43	29993.9	14.16	17.68	95.07	93.25	1.79	5.75	14.63	52
8/23/2005	40	LG3	2:42:33	21588.1	9.90	18.80	65.06	60.30	4.78	5.37	14.63	52
8/23/2005	40	30M	2:44:24	2470.9	1.82	21.44	3.76	2.86	0.89	5.98	14.63	52
8/23/2005	40	RG1	2:46:37	18642.7	9.33	19.30	52.05	46.85	5.18	4.78	14.63	52
8/23/2005	65	LG1	2:52:12	37240.5	9.27	16.73	164.42	157.13	7.33	4.48	14.63	52
8/23/2005	65	LG3	2:54:12	26917.3	5.77	18.17	115.50	105.12	9.96	4.24	14.63	52
8/23/2005	65	30M	2:56:04	2949.0	3.81	21.44	6.55	5.03	1.51	5.48	14.63	52
8/23/2005	65	RG1	2:58:01	23026.5	5.16	18.73	93.16	84.46	8.69	3.89	14.63	52
8/23/2005	65	LG1	3:00:19	37469.3	9.03	16.74	167.61	159.45	7.95	3.70	14.63	52
8/23/2005	85	LG1	3:03:03	41009.3	9.81	16.24	226.51	213.60	12.56	3.82	14.63	52
8/23/2005	7	LG1	3:06:11	21612.7	236.02	18.88	23.81	20.52	3.25	39.42	14.63	52
8/23/2005	7	LG3	3:08:03	13803.5	192.45	19.95	12.58	4.59	7.98	41.68	14.63	52
8/23/2005	7	30M	3:10:10	2186.8	7.08	21.56	1.59	0.67	0.92	9.58	14.63	52
8/23/2005	7	RG1	3:12:12	12071.9	112.12	20.23	11.84	5.98	5.81	17.56	14.63	52
8/23/2005	85	LG1	3:17:12	41146.7	10.33	16.22	222.47	208.40	13.61	8.06	14.63	52
8/23/2005	65	LG1	3:20:08	36907.0	8.37	16.79	161.02	149.35	11.55	4.72	14.63	52
8/23/2005	65	LG3	3:22:14	26018.8	4.72	18.29	110.88	99.34	11.25	4.57	14.63	52
8/23/2005	65	30M	3:24:11	2752.8	1.55	21.48	6.43	4.50	1.90	5.21	14.63	52
8/23/2005	65	RG1	3:26:18	22425.6	4.47	18.80	88.09	78.69	9.41	3.88	14.63	52
8/23/2005	40	LG1	3:31:16	29663.9	13.34	17.80	93.04	85.74	6.73	3.37	14.63	52
8/23/2005	40	LG3	3:33:16	20781.3	9.55	19.01	61.16	53.67	7.03	3.48	14.63	52
8/23/2005	40	30M	3:35:14	2463.0	1.75	21.53	4.43	3.05	1.38	4.12	14.63	52
8/23/2005	40	RG1	3:37:15	17208.0	7.86	19.54	48.35	42.66	5.66	3.16	14.63	52
8/23/2005	30	LG1	3:42:29	26536.1	22.30	18.26	71.77	66.02	5.76	2.45	14.63	52
8/23/2005	30	LG3	3:44:26	18781.5	14.89	19.30	48.38	42.44	5.89	2.75	14.63	52
8/23/2005	30	30M	3:46:25	2383.6	1.96	21.54	3.49	2.21	1.28	3.45	14.63	52
8/23/2005	30	RG1	3:48:24	17264.3	13.71	19.55	40.96	35.37	5.55	2.59	14.63	52
8/23/2005	4	LG1	3:54:10	20118.5	395.98	18.98	17.39	12.68	4.70	52.90	14.63	52
8/23/2005	4	LG3	3:56:12	11608.7	225.47	20.23	8.62	1.11	7.52	37.45	14.63	52
8/23/2005	4	30M	3:58:12	2037.3	11.79	21.57	1.25	0.36	0.89	9.35	14.63	52
8/23/2005	4	RG1	4:00:12	12364.0	221.11	20.15	9.28	0.99	8.28	39.58	14.63	52

Table 2. Preliminary Emissions Indexes

Date	Power	Probe	Time	F/A, calc	EICO	EIHC	EINOx	EINO	Etac	Factor, H	Factor, P	KHNOx
										0.0063	14.694	
8/23/2005	4	LG1	2:08:20	0.0102	41.44	4.08	2.67	2.45	98.618	1.04	1.00	2.78
8/23/2005	4	LG3	2:10:31	0.0063	42.61	4.80	2.25	0.38	98.519	1.04	1.00	2.34
8/23/2005	4	30M	2:12:20	0.0006	18.98	12.78	2.07	0.85	98.276	1.04	1.00	2.15
8/23/2005	4	RG1	2:15:26	0.0066	38.51	4.33	2.36	0.33	98.662	1.04	1.00	2.45
8/23/2005	7	LG1	2:18:55	0.0093	21.75	2.24	3.79	3.62	99.265	1.04	1.00	3.94
8/23/2005	7	LG3	2:20:59	0.0065	26.48	3.12	3.08	1.34	99.066	1.04	1.00	3.20
8/23/2005	7	30M	2:22:53	0.0007	10.18	8.59	2.36	1.26	98.902	1.04	1.00	2.46
8/23/2005	7	RG1	2:25:11	0.0059	17.05	1.65	3.53	2.06	99.435	1.04	1.00	3.67
8/23/2005	30	LG1	2:30:36	0.0126	1.71	0.39	9.60	9.43	99.921	1.04	1.00	9.98
8/23/2005	30	LG3	2:32:16	0.0091	1.67	0.47	8.96	8.16	99.914	1.04	1.00	9.32
8/23/2005	30	30M	2:34:19	0.0009	2.28	4.38	4.54	3.57	99.509	1.04	1.00	4.72
8/23/2005	30	RG1	2:36:21	0.0082	1.71	0.41	8.28	7.45	99.919	1.04	1.00	8.60
8/23/2005	40	LG1	2:40:43	0.0141	0.96	0.23	11.01	10.80	99.954	1.04	1.00	11.44
8/23/2005	40	LG3	2:42:33	0.0101	0.93	0.30	10.43	9.66	99.948	1.04	1.00	10.84
8/23/2005	40	30M	2:44:24	0.0010	1.69	3.24	5.83	4.44	99.636	1.04	1.00	6.06
8/23/2005	40	RG1	2:46:37	0.0087	1.02	0.31	9.66	8.69	99.945	1.04	1.00	10.04
8/23/2005	65	LG1	2:52:12	0.0175	0.50	0.15	15.41	14.73	99.974	1.04	1.00	16.02
8/23/2005	65	LG3	2:54:12	0.0126	0.44	0.19	14.88	13.54	99.971	1.04	1.00	15.47
8/23/2005	65	30M	2:56:04	0.0013	2.90	2.43	8.32	6.39	99.689	1.04	1.00	8.65
8/23/2005	65	RG1	2:58:01	0.0108	0.46	0.20	14.01	12.70	99.969	1.04	1.00	14.56
8/23/2005	65	LG1	3:00:19	0.0176	0.49	0.12	15.61	14.85	99.976	1.04	1.00	16.23
8/23/2005	85	LG1	3:03:03	0.0192	0.48	0.11	19.33	18.23	99.977	1.04	1.00	20.09
8/23/2005	7	LG1	3:06:11	0.0103	21.99	2.17	3.77	3.25	99.266	1.04	1.00	3.91
8/23/2005	7	LG3	3:08:03	0.0066	28.19	3.59	3.11	1.13	98.979	1.04	1.00	3.23
8/23/2005	7	30M	3:10:10	0.0009	7.55	5.94	2.82	1.18	99.229	1.04	1.00	2.93
8/23/2005	7	RG1	3:12:12	0.0057	18.96	1.74	3.37	1.70	99.380	1.04	1.00	3.50
8/23/2005	85	LG1	3:17:12	0.0193	0.51	0.24	18.92	17.72	99.964	1.04	1.00	19.66
8/23/2005	65	LG1	3:20:08	0.0173	0.46	0.16	15.22	14.12	99.974	1.04	1.00	15.82
8/23/2005	65	LG3	3:22:14	0.0122	0.37	0.21	14.77	13.24	99.970	1.04	1.00	15.35
8/23/2005	65	30M	3:24:11	0.0012	1.28	2.50	8.83	6.19	99.720	1.04	1.00	9.18
8/23/2005	65	RG1	3:26:18	0.0105	0.41	0.21	13.60	12.15	99.970	1.04	1.00	14.14
8/23/2005	40	LG1	3:31:16	0.0139	0.91	0.14	10.89	10.04	99.965	1.04	1.00	11.32
8/23/2005	40	LG3	3:33:16	0.0098	0.94	0.20	10.18	8.93	99.958	1.04	1.00	10.58
8/23/2005	40	30M	3:35:14	0.0010	1.63	2.24	6.91	4.76	99.737	1.04	1.00	7.18
8/23/2005	40	RG1	3:37:15	0.0081	0.93	0.22	9.72	8.58	99.956	1.04	1.00	10.10
8/23/2005	30	LG1	3:42:29	0.0125	1.71	0.11	9.37	8.62	99.949	1.04	1.00	9.74
8/23/2005	30	LG3	3:44:26	0.0088	1.62	0.18	8.91	7.81	99.944	1.04	1.00	9.26
8/23/2005	30	30M	3:46:25	0.0010	1.90	1.95	5.65	3.58	99.760	1.04	1.00	5.87
8/23/2005	30	RG1	3:48:24	0.0081	1.62	0.18	8.21	7.09	99.944	1.04	1.00	8.53
8/23/2005	4	LG1	3:54:10	0.0097	39.29	3.10	2.93	2.13	98.767	1.04	1.00	3.04
8/23/2005	4	LG3	3:56:12	0.0055	39.21	3.82	2.52	0.33	98.697	1.04	1.00	2.62
8/23/2005	4	30M	3:58:12	0.0008	13.63	6.28	2.41	0.68	99.052	1.04	1.00	2.51
8/23/2005	4	RG1	4:00:12	0.0059	36.10	3.79	2.55	0.27	98.773	1.04	1.00	2.65

## APPENDIX G

### Fuel Aromatic and Sulfur Content Analysis Results

Submitted by: ED

Submitted:

Affiliation: RD

ANALYTICAL METHOD		Fuel Analysis & Methods Evaluation Section (FAME) Monitoring and Laboratory Division, CARB							
		ASTM D5186 SFC/FID			ASTM D86 Automatic			ASTM D5453 Antek	ASTM D4052 Density Mtr
Analysis Date		9/30/05 - 11/2/05			10/25/2005			9/21/2005	
Analyst		JJC / EL			JC / AL			EL	
Sample I.D.		Total Aromatics (vol %)	Total Aromatics (mass%)	Polycyclic Aromatics (mass%)	T10 (deg C)	T50 (deg C)	T90 (deg C)	Sulfur (ppm)	Density (g/mL)
N3535 SWR		20.5	21.0	1.36	174	206	250	206	0.8206
N3535 SWL		20.3	20.8	1.46	174	207	250	239	0.8198
N429 WNR		20.3	20.7	1.98	173	204	248	412	0.8079
N429 WNL		20.2	20.6	1.92	173	203	248	419	0.8080
N435 WNR		19.6	20.0	0.92	179	205	243	132	0.8252
N435 WNL		19.7	20.0	0.98	179	206	244	125	0.8256
N695 SWR		22.8	23.4	1.99	172	206	252	352	0.8120
N695 SWL		22.6	23.2	1.88	173	206	252	355	0.8217

Approved by: \_\_\_\_\_ NR: Not Requested

Date: 11/7/2005

average	20.75	21.21	1.56	174.63	205.38	248.38	280.00	0.8176
st. dev.	1.16	1.25	0.42	2.60	1.22	3.16	112.16	0.0068
count	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00

## APPENDIX H

### Fuel Carbon-Hydrogen Content Analysis Results



8210 Mosley Rd.  
Houston, TX 77075  
713 943-9776 Telephone  
713 943-3846 Facsimile

## CORE LABORATORIES

CRAIG WILLIAMS  
ARCADIS INC  
4915 PROSPECTUS DR, ST F  
DURHAM, NC 27713

Date Reported: 4/10/2006  
Date Received: 3/31/2006

#### Analytical Report

Test	Result	Units	Method	Date	Analyst
Sample Number: 161346-001	Sample ID: N353SW	Jets 2			Sample Rcvd: 3/31/2006
Sample Date:	Description:				
<b>Carbon/Hydrogen Content</b>					
Carbon Content	85.89	WT %	ASTM D-5291	4/9/2006	KC
Hydrogen Content	14.11	WT %	ASTM D-5291	4/9/2006	KC
<hr/>					
Sample Number: 161346-002	Sample ID: N429SW	Jets 2			Sample Rcvd: 3/31/2006
Sample Date:	Description:				
<b>Carbon/Hydrogen Content</b>					
Carbon Content	85.29	WT %	ASTM D-5291	4/9/2006	KC
Hydrogen Content	14.71	WT %	ASTM D-5291	4/9/2006	KC
<hr/>					
Sample Number: 161346-003	Sample ID: N435SW	Jets 2			Sample Rcvd: 3/31/2006
Sample Date:	Description:				
<b>Carbon/Hydrogen Content</b>					
Carbon Content	85.70	WT %	ASTM D-5291	4/9/2006	KC
Hydrogen Content	14.30	WT %	ASTM D-5291	4/9/2006	KC
<hr/>					
Sample Number: 161346-004	Sample ID: N695SW	Jets 2			Sample Rcvd: 3/31/2006
Sample Date:	Description:				
<b>Carbon/Hydrogen Content</b>					
Carbon Content	85.25	WT %	ASTM D-5291	4/9/2006	KC
Hydrogen Content	14.75	WT %	ASTM D-5291	4/9/2006	KC

Approved By: \_\_\_\_\_  
Pat Gideons  
Laboratory Supervisor

The analytical results, opinions or interpretations contained in this report are based upon information and material supplied by the client for whose exclusive and confidential use this report has been made. The analytical results, opinions or interpretations expressed represent the best judgment of Core Laboratories. Core Laboratories, however, makes no warranty or representation, express or implied, of any type, and expressly disclaims same as to the productivity, proper operations or profitableness of any oil, gas, coal, or other mineral, property, well or sand in connection with which such report is used or relied upon for any reason whatsoever. This report shall not be reproduced, in whole or in part, without the written approval of Core Laboratories.

## **APPENDIX I**

### **Summary Tables**

In this section, a series of summary tables based on the data presented in section 3.0 have been prepared for the reader's convenience.

The following tables present the PM data and speciation profiles for the eight engines studied. In each table PM shape parameters and number and mass based emissions indices are reported as a function engine percent rated thrust (mode). For the TOG each table includes a list of species for which mode-specific emission indices (see Figure 14) are reported along with the CAS, LOD, measurement method and measurement group.

All data acquired through this contract has been archived on a secure website provided by NASA. It can be accessed with appropriate permissions at the following URL: <https://owl.grc.nasa.gov>

**Table I.1: PM data and speciation profiles for N435WN Port Engine**

Aircraft Tail Number: Engine Location:		N435WN Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>PM</b>								
	Dgeom (nm)		5	DMS500			X	
	Sigma		1.05	DMS500			X	
	DgeomM (nm)		5	DMS500			X	
	Number(10e15/kg fuel)		0.02	DMS500			X	
	Mass		1.0E-06	DMS500			X	
<b>EC</b>								
<b>OC</b>								
<b>Normal Alkanes</b>								
	Methane*	74-82-8						
	Ethane*	74-84-0						
	Propane*	74-98-6						
	Butane	106-97-8						
	Pentane	109-66-0						
	Hexane	110-54-3						
	Heptane	142-82-5						
	Octane	111-65-9						
	Nonane	111-84-2						
	Decane	124-18-5						
	Undecane	1120-21-4						
	Dodecane	112-40-3						
	Tridecane	629-50-5						
<b>Branched Alkanes</b>								
	2-Methylbutane	78-78-4						
	2,3-Dimethylbutane	79-29-8						
	2-Methylpentane	107-83-5						
	3-Methylpentane	96-14-0						
	2,3-Dimethylpentane	565-59-3						
	2,4-Dimethylpentane	108-08-7						
	3,3-Dimethylpentane	562-49-2						
	2-Methylhexane	598-76-4						
	3-Methylhexane	589-34-4						
	3-Ethylpentane	617-78-7						
	3,5-Dimethylheptane	926-82-9						
	2-Methyloctane	3221-61-2						
	3-Methyloctane	2216-33-3						
	2,4-Dimethyloctane							
<b>Cycloalkanes</b>								
	Cyclopentane	287-923						
	Methylcyclopentane	96-37-7						
	Cyclohexane	110-82-7						
	t-1,2-Dimethylcyclopentane	2452-99-5						
	c-1,3-Dimethylcyclopentane	2453-00-1						
	Methylcyclohexane	108-87-2						
	1c,2t,3-Trimethylcyclopentane							
	Ethylcyclohexane	1678-91-7						

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: N435WN		Port				
Engine Location:		Port				
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Size Distribution Shape Parameters						
Dgeom (nm)	12.39 ± 0.12	11.81 ± 0.28	17.01 ± 0.41	18.77 ± 0.34	26.94 ± 0.30	NM
Sigma	1.55 ± 0.004	1.45 ± 0.02	1.62 ± 0.02	1.73 ± 0.01	1.80 ± 0.01	NM
DgeomM (nm)	36.54 ± 0.49	31.74 ± 2.09	45.57 ± 0.79	46.63 ± 0.42	61.97 ± 0.20	NM
Emission Indices (g/kg fuel)						
Number	0.63 ± 0.061	0.06 ± 0.012	0.13 ± 0.010	0.17 ± 0.008	0.92 ± 0.013	NM
Mass	0.005 ± 0.0003	0.0006 ± 0.0001	0.0017 ± 0.0001	0.0029 ± 0.0001	0.04 ± 0.0006	NM
Methane*		NM		NM	NM	NM
Ethane*		NM		NM	NM	NM
Propane*		NM		NM	NM	NM
Butane		NM		NM	NM	NM
Pentane		NM		NM	NM	NM
Hexane		NM		NM	NM	NM
Heptane		NM		NM	NM	NM
Octane		NM		NM	NM	NM
Nonane		NM		NM	NM	NM
Decane		NM		NM	NM	NM
Undecane		NM		NM	NM	NM
Dodecane		NM		NM	NM	NM
Tridecane		NM		NM	NM	NM
2-Methylbutane		NM		NM	NM	NM
2,3-Dimethylbutane		NM		NM	NM	NM
2-Methylpentane		NM		NM	NM	NM
3-Methylpentane		NM		NM	NM	NM
2,3-Dimethylpentane		NM		NM	NM	NM
2,4-Dimethylpentane		NM		NM	NM	NM
3,3-Dimethylpentane		NM		NM	NM	NM
2-Methylhexane		NM		NM	NM	NM
3-Methylhexane		NM		NM	NM	NM
3-Ethylpentane		NM		NM	NM	NM
3,5-Dimethylheptane		NM		NM	NM	NM
2-Methyloctane		NM		NM	NM	NM
3-Methyloctane		NM		NM	NM	NM
2,4-Dimethyloctane		NM		NM	NM	NM
Cyclopentane		NM		NM	NM	NM
Methylcyclopentane		NM		NM	NM	NM
Cyclohexane		NM		NM	NM	NM
t-1,2-Dimethylcyclopentane		NM		NM	NM	NM
c-1,3-Dimethylcyclopentane		NM		NM	NM	NM
Methylcyclohexane		NM		NM	NM	NM
1c,2t,3-Trimethylcyclopentane		NM		NM	NM	NM
Ethylcyclohexane		NM		NM	NM	NM

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H435WN Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Alkenes</b>							
	Ethene*	74-85-1		TILDAS	X		
	Propene*	115-07-1					
	1-Butene	106-98-9					
	c-2-Butene						
	t-2-Butene						
	2-Methylpropene	115-11-7					
	Pentene	25377-72-4					
	1-Hexene	592-41-6					
	3-Methyl-c-2-Pentene						
	3-Methyl-t-2-Pentene						
	4-Methyl-c-2-Pentene						
	4-Methyl-t-2-Pentene						
	1-Nonene	124-11-8					
	Propadiene	463-49-0					
	1,3-Butadiene	106-99-0					
	2-Methyl-1,3-Butadiene	78-79-5					
	Cyclopentadiene	542-92-7					
	Cyclohexene	110-83-8					
<b>Alkynes</b>							
	Ethyne*	74-86-2					
<b>Aromatic Hydrocarbons</b>							
	Benzene	71-43-2		PTR-MS	X		
	Toluene	108-88-3		PTR-MS	X		
	Ethylbenzene	100-41-4					
	o-Xylene	95-47-6					
	m&p-Xylene	63-68-3					
	1-Methyl-2-ethylbenzene	611-14-3					
	1-Methyl-3-ethylbenzene	620-14-4					
	1-Methyl-4-ethylbenzene	622-96-8					
	1,4-Dimethyl-2-ethylbenzene	1758-88-9					
	1,2,3-Trimethylbenzene	526-73-8					
	1,2,4-Trimethylbenzene	95-63-6					
	1,3,5-Trimethylbenzene	95-63-6					
	Indan	496-11-7					
	1,2-Diethylbenzene	135-01-3					
	1,3-Diethylbenzene	141-93-5					
	1,4-Diethylbenzene	105-05-5					
	1-Methyl-2-n-Propylbenzene						
	1-Methyl-3-n-Propylbenzene						
	1-Methyl-4-n-Propylbenzene						
	1-Methyl-2-i-Propylbenzene						
	1-Methyl-3-i-Propylbenzene						
	1,2,4,5-Tetramethylbenzene	95-93-2					
	n-Pent-Benzene						
	Styrene	100-42-5		PTR-MS	X		



**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N435WN Port				
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Ethene*	0.70	0.40	0.001	0.003	0.006	NM
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1591 ± .0238	0.0901 ± .0098	0.0018 ± .0003	0.0016 ± .0007	0.0020 ± .0013	NM
Toluene	0.0807 ± .0190	0.0425 ± .0071	0.0032 ± .0008	0.0025 ± .0022	0.0017 ± .0001	NM
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0290 ± .0076	0.0166 ± .0002	0.0007 ± .0005	0.0006 ± .0003	0.0007 ± .0001	NM

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H435WN Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Semivolatiles</b>								
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling				
	Acenaphthene	83-32-9						
	Fluorene	86-73-7						
	Phenanthrene	85-01-8						
	Anthracene	120-12-7						
	Fluoranthene	206-44-0						
	Pyrene	129-00-0						
	Benzo(a)pyrene	50-32-8						
	Indeno[1,2,3-c,d]pyrene	193-39-5						
	Dibenz[a,h]anthracene	53-70-3						
	Benzo[ghi]perylene	191-24-2						
	Hexatriacontane	630-06-8						
	Triacotane	638-68-6						
	Octacosane	630-02-4						
	Hexacosane	630-01-3						
	Tetracosane	646-31-1						
	Docosane	629-92-0						
	Eicosane	112-95-8						
	Nonadecane	629-92-5						
	Octadecane	593-46-3						
	Hexadecane	544-76-3						
	Tetradecane	629-59-4						
	Naphthalene	91-20-3						
	Benz(a)anthracene	56-55-3						
	Chrysene	218-01-9						
	Benzo(b)fluoranthene	205-99-2						
	Benzo(k)fluoranthene	207-08-9						
	Dodecane	112-40-3						
<b>Carbonyls</b>								
	Formaldehyde			TILDAS		X		
	Acetaldehyde			PTR-MS		X		
	Acetone	67-64-1						
	Acrolein	107-02-8		TILDAS				
	Propion-aldehyde	123-38-6						
	Crotonaldehyde	4170-30-3						
	MEK	78-93-3						
	Methacrolein	78-85-3						
	Butyraldehyde	123-72-8						
	Benzaldehyde	100-52-7						
	Valeraldehyde	110-62-3						
	Tolualdehyde							
	Hexaldehyde	66-25-1						
<b>Other Organics</b>								
	mz57			PTR-MS		X		
	mz59			PTR-MS		X		
	mz107			PTR-MS		X		
	MTBE	1634-04-4						

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: N435WN		Engine Location: Port					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Acenaphthylene	NM		NM		NM	NM	
Acenaphthene	NM		NM		NM	NM	
Fluorene	NM		NM		NM	NM	
Phenanthrene	NM		NM		NM	NM	
Anthracene	NM		NM		NM	NM	
Fluoranthene	NM		NM		NM	NM	
Pyrene	NM		NM		NM	NM	
Benzo(a)pyrene	NM		NM		NM	NM	
Indeno[1,2,3-c,d]pyrene	NM		NM		NM	NM	
Dibenz[a,h]anthracene	NM		NM		NM	NM	
Benzo[ghi]perylene	NM		NM		NM	NM	
Hexatriacontane	NM		NM		NM	NM	
Triacotane	NM		NM		NM	NM	
Octacosane	NM		NM		NM	NM	
Hexacosane	NM		NM		NM	NM	
Tetracosane	NM		NM		NM	NM	
Docosane	NM		NM		NM	NM	
Eicosane	NM		NM		NM	NM	
Nonadecane	NM		NM		NM	NM	
Octadecane	NM		NM		NM	NM	
Hexadecane	NM		NM		NM	NM	
Tetradecane	NM		NM		NM	NM	
Naphthalene	NM		NM		NM	NM	
Benz(a)anthracene	NM		NM		NM	NM	
Chrysene	NM		NM		NM	NM	
Benzo(b)fluoranthene	NM		NM		NM	NM	
Benzo(k)fluorantene	NM		NM		NM	NM	
Dodecane	NM		NM		NM	NM	
Formaldehyde	0.69 ± 0.11	0.38 ± 0.05	0.012 ± 0.0066	0.009 ± 0.0039	0.008 ± 0.0005	NM	
Acetaldehyde	0.33 ± 0.04	0.16 ± 0.019	0.004 ± 0.0012	0.002 ± 0.00008	0.003 ± 0.0003	NM	
Acetone	NM	NM	NM	NM	NM	NM	
Acrolein	NM	NM	NM	NM	NM	NM	
Propion-aldehyde	NM	NM	NM	NM	NM	NM	
Crotonaldehyde	NM	NM	NM	NM	NM	NM	
MEK	NM	NM	NM	NM	NM	NM	
Methacrolein	NM	NM	NM	NM	NM	NM	
Butyraldehyde	NM	NM	NM	NM	NM	NM	
Benzaldehyde	NM	NM	NM	NM	NM	NM	
Valeraldehyde	NM	NM	NM	NM	NM	NM	
Tolualdehyde	NM	NM	NM	NM	NM	NM	
Hexaldehyde	NM	NM	NM	NM	NM	NM	
mz57	0.3695 ± 0	0.1790 ± 0	0 ± 0	0 ± 0	0 ± 0	NM	
mz59	0.1544 ± .0154	0.0721 ± .0067	0.0031 ± .0008	0.0024 ± .0006	0.0017 ± .0002	NM	
mz107	0.1301 ± .0327	0.0666 ± .0013	0.0025 ± .0016	0.0016 ± .0005	0.0014 ± .0002	NM	
MTBE	NM	NM	NM	NM	NM	NM	

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H435WN Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Elemental Analysis</b>								
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)				
	Magnesium	7639-95-4	1.200					
	Beryllium	7440-41-7						
	Aluminum	7429-90-5	1.000					
	Silicon	7440-21-3	1.200					
	Phosphorous	7723-14-0	0.204					
	Sulfur	63705-05-5	0.204					
	Chlorine	7782-50-5	0.068					
	Potassium	744-09-5	0.017					
	Calcium	7440-70-2	0.017					
	Scandium	7440-20-2						
	Iron	7439-89-5	0.007					
	Titanium	7440-32-6	0.051					
	Vanadium	7440-62-2	0.020					
	Chromium	7440-47-3	0.017					
	Manganese	7439-96-5	0.009					
	Cobalt	7440-48-4	0.007					
	Nickel	7440-2-0	0.003					
	Copper	7440-50-8	0.003					
	Zinc	7440-66-6	0.003					
	Gallium	7440-55-3	0.425					
	Germanium	7440-38-2	0.017					
	Arsenic	7440-38-2	0.003					
	Selenium	7782-49-2	0.017					
	Rbidium		0.007					
	Strontium	7440-24-6	0.017					
	Yttrium		0.003					
	Niobium	7440-03-1						
	Molybdenum	7439-98-7	0.017					
	Palladium	7440-05-3	0.026					
	Silver	7440-22-4						
	Cadmium	7440-43-9	0.017					
	Indium	7440-74-6	0.017					
	Tin	7440-31-6	0.026					
	Antimony	7440-36-0	0.024					
	Cesium	7440-46-2						
	Barium	7440-39-3	0.170					
	Lanthanum	4639-91-0	0.425					
	Platinum	7440-06-4						
	Gold	7440-57-5						
	Mercury	7439-97-6						
	Lead	7439-92-1	0.051					
	Bismuth	7440-69-9						
	Uranium	7440-61-1						

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

<b>Aircraft Tail Number:</b>		<b>H435WN</b>					
<b>Engine Location:</b>		<b>Port</b>					
<b>Species</b>	<b>Power</b>						
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>	
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>	
Hexavalent Chromium		NM		NM		NM	NM
Magnesium		NM		NM		NM	NM
Beryllium		NM		NM		NM	NM
Aluminum		NM		NM		NM	NM
Silicon		NM		NM		NM	NM
Phosphorous		NM		NM		NM	NM
Sulfur		NM		NM		NM	NM
Chlorine		NM		NM		NM	NM
Potassium		NM		NM		NM	NM
Calcium		NM		NM		NM	NM
Scandium		NM		NM		NM	NM
Iron		NM		NM		NM	NM
Titanium		NM		NM		NM	NM
Vanadium		NM		NM		NM	NM
Chromium		NM		NM		NM	NM
Manganese		NM		NM		NM	NM
Cobalt		NM		NM		NM	NM
Nickel		NM		NM		NM	NM
Copper		NM		NM		NM	NM
Zinc		NM		NM		NM	NM
Gallium		NM		NM		NM	NM
Germanium		NM		NM		NM	NM
Arsenic		NM		NM		NM	NM
Selenium		NM		NM		NM	NM
Rbidium		NM		NM		NM	NM
Strontium		NM		NM		NM	NM
Yttrium		NM		NM		NM	NM
Niobium		NM		NM		NM	NM
Molybdenum		NM		NM		NM	NM
Palladium		NM		NM		NM	NM
Silver		NM		NM		NM	NM
Cadmium		NM		NM		NM	NM
Indium		NM		NM		NM	NM
Tin		NM		NM		NM	NM
Antimony		NM		NM		NM	NM
Cesium		NM		NM		NM	NM
Barium		NM		NM		NM	NM
Lanthanum		NM		NM		NM	NM
Platinum		NM		NM		NM	NM
Gold		NM		NM		NM	NM
Mercury		NM		NM		NM	NM
Lead		NM		NM		NM	NM
Bismuth		NM		NM		NM	NM
Uranium		NM		NM		NM	NM

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H435WN Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Non-HC</b>							
<b>Combustion Gases</b>	NO	10102-43-9		TILDAS	X		
	NO2	10102-44-0		TILDAS	X		
	NOX				X		
	HNO3	7697-37-2					
	HONO	7782-77-6					
	N2O	10024-97-2					
	CO	630-08-0		TILDAS	X		
	CO2	124-38-9			X		
	SO2	7446-09-5					
	SOX						
<b>Inorganic ions</b>	Sulfate	14808-79-8					
	Nitrate	7697-37-2					
NM - no measurement was made							
BDL - Below detection limit							
EI for CO2 determined by elemental analysis of fuel							
<b>Notes:</b>							
<b>UCR comments:</b>							
In the original text LODs were provided for all compounds and species measured on the high-flow side.							
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.							
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.							
UCR only made one measurement so uncertainty cannot be calculated.							
Analytical uncertainty for all measurement methods was provided in the original text.							

**Table I.1: PM data and speciation profiles for N435WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N435WN Port								
Species	Power									
	4%	7%	30%	40%	65%	85%				
	Mode 1		Mode 2		Mode 3	Mode 4				
NO	0.24	1.70	8.60	9.91	14.67	NM				
NO2	2.71	2.09	0.87	0.81	1.02	NM				
NOX	2.95	3.78	9.47	10.72	15.68	NM				
HNO3	NM	NM	NM	NM	NM	NM				
HONO	NM	NM	NM	NM	NM	NM				
N2O	NM	NM	NM	NM	NM	NM				
CO	18.05	14.74	1.48	0.85	0.44	NA				
CO2	3160	3160	3160	3160	3160	3160				
SO2	NM	NM	NM	NM	NM	NM				
SOX	NM	NM	NM	NM	NM	NM				
Sulfate	NM	NM	NM	NM	NM	NM				
Nitrate	NM	NM	NM	NM	NM	NM				
NM - no measurement was made BDL - Below detection limit EI for CO2 determined by elemental analysis of fuel										
<b>Notes:</b>										
<b>UCR comments:</b>										
In the original text LODs were provided for all compounds and species measured on the high-flow side.										
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.										
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.										
UCR only made one measurement so uncertainty cannot be calculated.										
Analytical uncertainty for all measurement methods was provided in the original text.										

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine**

Aircraft Tail Number: Engine Location:		N435WN Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>PM</b>								
	Dgeom (nm)		5	DMS500				X
	Sigma		1.05	DMS500				X
	DgeomM (nm)		5	DMS500				X
	Number(10e15/kg fuel)		0.02	DMS500				X
	Mass		1.0E-06	DMS500				X
	Mass				X			
<b>EC</b>					X			
<b>OC</b>					X			
<b>Normal Alkanes</b>								
	Methane*	74-82-8						
	Ethane*	74-84-0						
	Propane*	74-98-6						
	Butane	106-97-8						
	Pentane	109-66-0						
	Hexane	110-54-3						
	Heptane	142-82-5						
	Octane	111-65-9						
	Nonane	111-84-2						
	Decane	124-18-5						
	Undecane	1120-21-4						
	Dodecane	112-40-3						
	Tridecane	629-50-5						
<b>Branched Alkanes</b>								
	2-Methylbutane	78-78-4						
	2,3-Dimethylbutane	79-29-8						
	2-Methylpentane	107-83-5						
	3-Methylpentane	96-14-0						
	2,3-Dimethylpentane	565-59-3						
	2,4-Dimethylpentane	108-08-7						
	3,3-Dimethylpentane	562-49-2						
	2-Methylhexane	598-76-4						
	3-Methylhexane	589-34-4						
	3-Ethylpentane	617-78-7						
	3,5-Dimethylheptane	926-82-9						
	2-Methyloctane	3221-61-2						
	3-Methyloctane	2216-33-3						
	2,4-Dimethyloctane							
<b>Cycloalkanes</b>								
	Cyclopentane	287-923						
	Methylcyclopentane	96-37-7						
	Cyclohexane	110-82-7						
	t-1,2-Dimethylcyclopentane	2452-99-5						
	c-1,3-Dimethylcyclopentane	2453-00-1						
	Methylcyclohexane	108-87-2						
	1c,2t,3-Trimethylcyclopentane							
	Ethylcyclohexane	1678-91-7						



**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: N435WN		Engine Location: Starboard					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Size Distribution Shape Parameters							
Dgeom (nm)	14.24 ± 0.15	12.04 ± 0.47	17.09 ± 0.39	19.10 ± 0.27	25.74 ± 0.37	31.27 ± 0.64	
Sigma	1.60 ± 0.005	1.44 ± 0.04	1.64 ± 0.01	1.69 ± 0.01	1.81 ± 0.01	1.79 ± 0.01	
DgeomM (nm)	37.32 ± 0.37	28.4 ± 2.24	43.08 ± 0.63	44.35 ± 0.52	59.81 ± 0.29	71.09 ± 2.56	
Emission Indices (g/kg fuel)							
Number	0.61 ± 0.032	0.15 ± 0.03	0.19 ± 0.013	0.23 ± 0.009	0.83 ± 0.02	0.97 ± 0.033	
Mass	0.006 ± 0.0002	0.0005 ± 0.0001	0.003 ± 0.0001	0.004 ± 0.0001	0.03 ± 0.0008	0.06 ± 0.005	
Mass	0.0082		0.0209		0.0407	0.0704	
	0.0025		0.0017		0.0238	0.0414	
	0.0075		0.0030		0.0065	0.0168	
Methane*		NM		NM	NM	NM	
Ethane*		NM		NM	NM	NM	
Propane*		NM		NM	NM	NM	
Butane		NM		NM	NM	NM	
Pentane		NM		NM	NM	NM	
Hexane		NM		NM	NM	NM	
Heptane		NM		NM	NM	NM	
Octane		NM		NM	NM	NM	
Nonane		NM		NM	NM	NM	
Decane		NM		NM	NM	NM	
Undecane		NM		NM	NM	NM	
Dodecane		NM		NM	NM	NM	
Tridecane		NM		NM	NM	NM	
2-Methylbutane		NM		NM	NM	NM	
2,3-Dimethylbutane		NM		NM	NM	NM	
2-Methylpentane		NM		NM	NM	NM	
3-Methylpentane		NM		NM	NM	NM	
2,3-Dimethylpentane		NM		NM	NM	NM	
2,4-Dimethylpentane		NM		NM	NM	NM	
3,3-Dimethylpentane		NM		NM	NM	NM	
2-Methylhexane		NM		NM	NM	NM	
3-Methylhexane		NM		NM	NM	NM	
3-Ethylpentane		NM		NM	NM	NM	
3,5-Dimethylheptane		NM		NM	NM	NM	
2-Methyloctane		NM		NM	NM	NM	
3-Methyloctane		NM		NM	NM	NM	
2,4-Dimethyloctane		NM		NM	NM	NM	
Cyclopentane		NM		NM	NM	NM	
Methylcyclopentane		NM		NM	NM	NM	
Cyclohexane		NM		NM	NM	NM	
t-1,2-Dimethylcyclopentane		NM		NM	NM	NM	
c-1,3-Dimethylcyclopentane		NM		NM	NM	NM	
Methylcyclohexane		NM		NM	NM	NM	
1c,2t,3-Trimethylcyclopentane		NM		NM	NM	NM	
Ethylcyclohexane		NM		NM	NM	NM	

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N435WN Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Alkenes</b>							
	Ethene*	74-85-1		TILDAS		X	
	Propene*	115-07-1					
	1-Butene	106-98-9					
	c-2-Butene						
	t-2-Butene						
	2-Methylpropene	115-11-7					
	Pentene	25377-72-4					
	1-Hexene	592-41-6					
	3-Methyl-c-2-Pentene						
	3-Methyl-t-2-Pentene						
	4-Methyl-c-2-Pentene						
	4-Methyl-t-2-Pentene						
	1-Nonene	124-11-8					
	Propadiene	463-49-0					
	1,3-Butadiene	106-99-0					
	2-Methyl-1,3-Butadiene	78-79-5					
	Cyclopentadiene	542-92-7					
	Cyclohexene	110-83-8					
<b>Alkynes</b>							
	Ethyne*	74-86-2					
<b>Aromatic Hydrocarbons</b>							
	Benzene	71-43-2		PTR-MS		X	
	Toluene	108-88-3		PTR-MS		X	
	Ethylbenzene	100-41-4					
	o-Xylene	95-47-6					
	m&p-Xylene	63-68-3					
	1-Methyl-2-ethylbenzene	611-14-3					
	1-Methyl-3-ethylbenzene	620-14-4					
	1-Methyl-4-ethylbenzene	622-96-8					
	1,4-Dimethyl-2-ethylbenzene	1758-88-9					
	1,2,3-Trimethylbenzene	526-73-8					
	1,2,4-Trimethylbenzene	95-63-6					
	1,3,5-Trimethylbenzene	95-63-6					
	Indan	496-11-7					
	1,2-Diethylbenzene	135-01-3					
	1,3-Diethylbenzene	141-93-5					
	1,4-Diethylbenzene	105-05-5					
	1-Methyl-2-n-Propylbenzene						
	1-Methyl-3-n-Propylbenzene						
	1-Methyl-4-n-Propylbenzene						
	1-Methyl-2-i-Propylbenzene						
	1-Methyl-3-i-Propylbenzene						
	1,2,4,5-Tetramethylbenzene	95-93-2					
	n-Pent-Benzene						
	Styrene	100-42-5		PTR-MS		X	

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N435WN Starboard				
Species	Power					
	0.0400	0.0700	0.3000	0.4000	0.6500	0.8500
	Mode 1		Mode 2		Mode 3	Mode 4
Ethene*	2.6866	1.8924	0.8558	0.8305	0.9918	1.2119
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1855 ± .0026	0.0627 ± .0124	0.0020 ± .0005	0.0016 ± .0007	0.0013 ± .0004	0.0011 ± 0
Toluene	0.0908 ± .0007	0.0286 ± .0067	0.0011 ± .0009	0.0014 ± .0004	0.0008 ± 0	0.0009 ± 0
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0354 ± .0018	0.0109 ± .0022	0.0013 ± .0008	0.0009 ± .0010	0.0008 ± .0002	0.0005 ± 0

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		H435WN Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Semivolatiles</b>								
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling	X			
	Acenaphthene	83-32-9		XAD-PUF/Quartz sampling	X			
	Fluorene	86-73-7		XAD-PUF/Quartz sampling	X			
	Phenanthrene	85-01-8		XAD-PUF/Quartz sampling	X			
	Anthracene	120-12-7		XAD-PUF/Quartz sampling	X			
	Fluoranthene	206-44-0		XAD-PUF/Quartz sampling	X			
	Pyrene	129-00-0		XAD-PUF/Quartz sampling	X			
	Benzo(a)pyrene	50-32-8		XAD-PUF/Quartz sampling	X			
	Indeno[1,2,3-cd]pyrene	193-39-5		XAD-PUF/Quartz sampling	X			
	Dibenz[a,h]anthracene	53-70-3		XAD-PUF/Quartz sampling	X			
	Benzo[ghi]perylene	191-24-2		XAD-PUF/Quartz sampling	X			
	Hexatriacontane	630-06-8						
	Triaccontane	638-68-6		XAD-PUF/Quartz sampling	X			
	Octacosane	630-02-4		XAD-PUF/Quartz sampling	X			
	Hexacosane	630-01-3		XAD-PUF/Quartz sampling	X			
	Tetracosane	646-31-1		XAD-PUF/Quartz sampling	X			
	Docosane	629-92-0		XAD-PUF/Quartz sampling	X			
	Eicosane	112-95-8		XAD-PUF/Quartz sampling	X			
	Nonadecane	629-92-5		XAD-PUF/Quartz sampling	X			
	Octadecane	593-46-3		XAD-PUF/Quartz sampling	X			
	Hexadecane	544-76-3		XAD-PUF/Quartz sampling	X			
	Tetradecane	629-59-4		XAD-PUF/Quartz sampling	X			
	Naphthalene	91-20-2		XAD-PUF/Quartz sampling	X			
	Naphthalene	91-20-3		PTR-MS		X		
	Benz(a)anthracene	56-55-3		XAD-PUF/Quartz sampling	X			
	Chrysene	218-01-9		XAD-PUF/Quartz sampling	X			
	Benzo(b)fluoranthene	205-99-2		XAD-PUF/Quartz sampling	X			
	Benzo(k)fluoranthene	207-08-9		XAD-PUF/Quartz sampling	X			
	Dodecane	112-40-3		XAD-PUF/Quartz sampling	X			
<b>Carbonyls</b>								
	Formaldehyde			TILDAS		X		
	Acetaldehyde			PTR-MS		X		
	Acetone	67-64-1						
	Acrolein	107-02-8		TILDAS				
	Propion-aldehyde	123-38-6						
	Crotonaldehyde	4170-30-3						
	MEK	78-93-3						
	Methacrolein	78-85-3						
	Butyraldehyde	123-72-8						
	Benzaldehyde	100-52-7						
	Valeraldehyde	110-62-3						
	Tolualdehyde							
	Hexaldehyde	66-25-1						
<b>Other Organics</b>								
	mz57			PTR-MS		X		
	mz59			PTR-MS		X		
	mz107			PTR-MS		X		
	MTBE	1634-04-4						

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N435WN Starboard				
Species	Power					
	4%		7%		85%	
	Mode 1		Mode 2		Mode 3	
Acenaphthylene	2.20E-03		1.41E-04		6.35E-05	
Acenaphthene	5.64E-03		2.74E-03		2.28E-04	
Fluorene	5.35E-03		1.31E-04		3.50E-05	
Phenanthrene	5.91E-03		4.78E-04		1.49E-04	
Anthracene	8.99E-03		6.20E-04		2.80E-04	
Fluoranthene	1.57E-04		9.68E-05		7.06E-04	
Pyrene	3.01E-04		2.29E-04		9.74E-06	
Benzo(a)pyrene	9.88E-06		BDL		BDL	
Indeno[1,2,3-cd]pyrene	BDL		BDL		BDL	
Dibenz[a,h]anthracene	BDL		BDL		BDL	
Benzo[ghi]perylene	BDL		BDL		BDL	
Hexatriacontane	NM		NM		NM	
Triacontane	1.44E-07		1.60E-07		2.96E-07	
Octacosane	5.98E-07		7.03E-07		7.14E-07	
Hexacosane	2.81E-07		3.80E-07		4.66E-07	
Tetracosane	2.79E-07		2.47E-07		3.63E-07	
Docosane	2.84E-07		2.73E-07		5.19E-76	
Eicosane	2.86E-07		2.97E-07		4.65E-07	
Nonadecane	3.75E-07		3.95E-07		4.75E-07	
Octadecane	5.98E-07		7.03E-07		7.14E-07	
Hexadecane	6.20E-07		6.38E-07		6.48E-07	
Tetradecane	3.03E-07		3.63E-07		3.73E-07	
Naphthalene	1.64E-02		NM		5.30E-01	
Naphthalene	0.0349 ± .0010	0.0161 ± .0012	0.0035 ± .0017	0.0024 ± .0004	0.0017 ± .0001	NM
Benz(a)anthracene	6.31E-05		3.83E-05		6.08E-05	
Chrysene	6.39E-05		3.88E-05		7.89E-05	
Benzo(b)fluoranthene	1.35E-05		6.32E-06		8.42E-06	
Benzo(k)fluorantene	3.75E-05		1.37E-05		7.23E-06	
Dodecane	2.84E-07		2.73E-07		2.63E-04	
Formaldehyde	0.73 ± 0.05	0.27 ± 0.04	0.015 ± 0.008	0.012 ± 0.0026	0.01 ± 0.0002	0.007 ± 0
Acetaldehyde	0.35 ± 0.011	0.11 ± 0.013	0.003 ± 0.0015	0.003 ± 0.0004	0.003 ± 0.0003	0.002 ± 0
Acetone	NM	NM	NM	NM	NM	NM
Acrolein	NM	NM	NM	NM	NM	NM
Propion-aldehyde	NM	NM	NM	NM	NM	NM
Crotonaldehyde	NM	NM	NM	NM	NM	NM
MEK	NM	NM	NM	NM	NM	NM
Methacrolein	NM	NM	NM	NM	NM	NM
Butyraldehyde	NM	NM	NM	NM	NM	NM
Benzaldehyde	NM	NM	NM	NM	NM	NM
Valeraldehyde	NM	NM	NM	NM	NM	NM
Tolualdehyde	NM	NM	NM	NM	NM	NM
Hexaldehyde	NM	NM	NM	NM	NM	NM
mz57	0 ± 0	0.1251 ± 0	0.0129 ± .0022	0.0101 ± .0020	0.0098 ± .0048	0.0237 ± 0
mz59	0.1678 ± .0032	0.0540 ± .0061	0.0032 ± .0015	0.0021 ± .0006	0.0021 ± .0007	0.0022 ± 0
mz107	0.1392 ± .0068	0.0491 ± .0076	0.0041 ± .0027	0.0025 ± .0010	0.0023 ± .0007	0.0027 ± 0
MTBE						

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: N435WN Engine Location: Starboard							
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Elemental Analysis</b>							
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)			
	Magnesium	7639-95-4	1.200		X		
	Beryllium	7440-41-7					
	Aluminum	7429-90-5	1.000		X		
	Silicon	7440-21-3	1.200		X		
	Phosphorous	7723-14-0	0.204		X		
	Sulfur	63705-05-5	0.204		X		
	Chlorine	7782-50-5	0.068		X		
	Potassium	744-09-5	0.017		X		
	Calcium	7440-70-2	0.017		X		
	Scandium	7440-20-2					
	Iron	7439-89-5	0.007		X		
	Titanium	7440-32-6	0.051		X		
	Vanadium	7440-62-2	0.020		X		
	Chromium	7440-47-3	0.017		X		
	Manganese	7439-96-5	0.009		X		
	Cobalt	7440-48-4	0.007		X		
	Nickel	7440-2-0	0.003		X		
	Copper	7440-50-8	0.003		X		
	Zinc	7440-66-6	0.003		X		
	Gallium	7440-55-3	0.425		X		
	Germanium	7440-38-2	0.017		X		
	Arsenic	7440-38-2	0.003		X		
	Selenium	7782-49-2	0.017		X		
	Rbodium		0.007		X		
	Strontium	7440-24-6	0.017		X		
	Yttrium		0.003		X		
	Niobium	7440-03-1					
	Molybdenum	7439-98-7	0.017		X		
	Palladium	7440-05-3	0.026		X		
	Silver	7440-22-4					
	Cadmium	7440-43-9	0.017		X		
	Indium	7440-74-6	0.017		X		
	Tin	7440-31-6	0.026		X		
	Antimony	7440-36-0	0.024		X		
	Cesium	7440-46-2					
	Barium	7440-39-3	0.170		X		
	Lanthanum	4639-91-0	0.425		X		
	Platinum	7440-06-4					
	Gold	7440-57-5					
	Mercury	7439-97-6					
	Lead	7439-92-1	0.051		X		
	Bismuth	7440-69-9					
	Uranium	7440-61-1					

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		<b>II435WII</b>							
<b>Engine Location:</b>		<b>Starboard</b>							
<b>Species</b>	<b>Power</b>								
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>			
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>			
Hexavalent Chromium		NM		NM		NM		NM	
Magnesium		BDL		1.42E-04		BDL		BDL	
Beryllium		NM		NM		NM		NM	
Aluminum		BDL		BDL		BDL		BDL	
Silicon		BDL		BDL		BDL		BDL	
Phosphorous		BDL		BDL		BDL		BDL	
Sulfur		BDL		5.43E-06		2.10E-05		BDL	
Chlorine		BDL		BDL		3.58E-05		BDL	
Potassium		BDL		BDL		BDL		BDL	
Calcium		6.69E-06		9.96E-06		6.18E-06		BDL	
Scandium		NM		NM		NM		NM	
Iron		2.94E-05		1.54E-05		1.73E-05		7.64E-05	
Titanium		5.35E-06		9.05E-07		4.94E-06		BDL	
Vanadium		BDL		9.05E-07		BDL		5.09E-06	
Chromium		5.22E-05		3.62E-05		1.56E-04		2.09E-04	
Manganese		6.69E-06		4.53E-06		2.35E-05		2.04E-05	
Cobalt		2.68E-06		BDL		BDL		BDL	
Nickel		5.35E-06		4.53E-06		3.71E-06		1.02E-05	
Copper		BDL		BDL		BDL		BDL	
Zinc		BDL		3.62E-06		BDL		BDL	
Gallium		1.74E-05		4.53E-06		6.18E-06		7.64E-05	
Germanium		BDL		1.81E-06		BDL		BDL	
Arsenic		1.34E-06		BDL		BDL		BDL	
Selenium		BDL		BDL		BDL		BDL	
Rbidium		BDL		BDL		BDL		BDL	
Strontium		BDL		BDL		BDL		BDL	
Yttrium		BDL		BDL		1.24E-06		BDL	
Niobium		NM		NM		NM		NM	
Molybdenum		8.03E-06		3.62E-06		3.71E-06		3.05E-05	
Palladium		BDL		9.05E-07		4.94E-06		BDL	
Silver		NM		NM		NM		NM	
Cadmium		BDL		5.43E-06		6.18E-06		5.09E-06	
Indium		1.07E-05		7.24E-06		6.18E-06		6.11E-05	
Tin		1.34E-06		1.81E-06		BDL		BDL	
Antimony		BDL		BDL		BDL		BDL	
Cesium		NM		NM		NM		NM	
Barium		BDL		BDL		6.18E-06		2.55E-05	
Lanthanum		BDL		BDL		BDL		BDL	
Platinum		NM		NM		NM		NM	
Gold		NM		NM		NM		NM	
Mercury		NM		NM		NM		NM	
Lead		BDL		BDL		BDL		BDL	
Bismuth		NM		NM		NM		NM	
Uranium		NM		NM		NM		NM	

**Table I.2: PM data and speciation profiles for N435WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		H435WN Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Non-HC</b>							
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X	
	NO2	10102-44-0		TILDAS		X	
	NOX					X	
	HNO3	7697-37-2					
	HONO	7782-77-6					
	N2O	10024-97-2					
	CO	630-08-0		TILDAS		X	
	CO2	124-38-9				X	
	SO2	7446-09-5					
	SOX						
<b>Inorganic ions</b>	Sulfate	14808-79-8				X	
	Nitrate	7697-37-2					
NM - no measurement was made							
BDL - Below detection limit							
EI for CO2 determined by elemental analysis of fuel							
<b>Notes:</b>							
<b>UCR comments:</b>							
In the original text LODs were provided for all compounds and species measured on the high-flow side.							
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.							
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.							
UCR only made one measurement so uncertainty cannot be calculated.							
Analytical uncertainty for all measurement methods was provided in the original text.							





**Table I.3: PM data and speciation profiles for N353SW Port Engine**

Aircraft Tail Number: N353SW		Engine Location: Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
PM	Dgeom (nm)		5	DMS500			X
	Sigma		1.05	DMS500			X
	DgeomM (nm)		5	DMS500			X
	Number(10e15/kg fuel)		0.02	DMS500			X
	Mass		1.0E-06	DMS500			X
	EC	Mass					
OC							
<b>Normal Alkanes</b>							
	Methane*	74-82-8					
	Ethane*	74-84-0					
	Propane*	74-98-6					
	Butane	106-97-8					
	Pentane	109-66-0					
	Hexane	110-54-3					
	Heptane	142-82-5					
	Octane	111-65-9					
	Nonane	111-84-2					
	Decane	124-18-5					
	Undecane	1120-21-4					
	Dodecane	112-40-3					
	Tridecane	629-50-5					
<b>Branched Alkanes</b>							
	2-Methylbutane	78-78-4					
	2,3-Dimethylbutane	79-29-8					
	2-Methylpentane	107-83-5					
	3-Methylpentane	96-14-0					
	2,3-Dimethylpentane	565-59-3					
	2,4-Dimethylpentane	108-08-7					
	3,3-Dimethylpentane	562-49-2					
	2-Methylhexane	598-76-4					
	3-Methylhexane	589-34-4					
	3-Ethylpentane	617-78-7					
	3,5-Dimethylheptane	926-82-9					
	2-Methyloctane	3221-61-2					
	3-Methyloctane	2216-33-3					
	2,4-Dimethyloctane						
<b>Cycloalkanes</b>							
	Cyclopentane	287-923					
	Methylcyclopentane	96-37-7					
	Cyclohexane	110-82-7					
	t-1,2-Dimethylcyclopentane	2452-99-5					
	c-1,3-Dimethylcyclopentane	2453-00-1					
	Methylcyclohexane	108-87-2					
	1c,2t,3-Trimethylcyclopentane						
	Ethylcyclohexane	1678-91-7					

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: H353SW						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Size Distribution Shape Parameters						
Dgeom (nm)	10.01 ± 0.07	11.42 ± 0.10	13.77 ± 0.58	14.02 ± 0.57	19.58 ± 0.31	NM
Sigma	1.50 ± 0.003	1.48 ± 0.0026	1.52 ± 0.03	1.56 ± 0.02	1.78 ± 0.01	NM
DgeomM (nm)	24.45 ± 0.14	22.74 ± 0.14	26.39 ± 1.19	29.15 ± 0.47	49.24 ± 0.21	NM
Emission Indices (g/kg fuel)						
Number	2.14 ± 0.07	0.74 ± 0.03	0.86 ± 0.16	0.76 ± 0.08	1.70 ± 0.04	NM
Mass	0.01 ± 0.0002	0.003 ± 0.0001	0.004 ± 0.0008	0.005 ± 0.0003	0.04 ± 0.0008	NM
		NM		NM	NM	NM
		NM		NM	NM	NM
Methane*		NM		NM	NM	NM
Ethane*		NM		NM	NM	NM
Propane*		NM		NM	NM	NM
Butane		NM		NM	NM	NM
Pentane		NM		NM	NM	NM
Hexane		NM		NM	NM	NM
Heptane		NM		NM	NM	NM
Octane		NM		NM	NM	NM
Nonane		NM		NM	NM	NM
Decane		NM		NM	NM	NM
Undecane		NM		NM	NM	NM
Dodecane		NM		NM	NM	NM
Tridecane		NM		NM	NM	NM
2-Methylbutane		NM		NM	NM	NM
2,3-Dimethylbutane		NM		NM	NM	NM
2-Methylpentane		NM		NM	NM	NM
3-Methylpentane		NM		NM	NM	NM
2,3-Dimethylpentane		NM		NM	NM	NM
2,4-Dimethylpentane		NM		NM	NM	NM
3,3-Dimethylpentane		NM		NM	NM	NM
2-Methylhexane		NM		NM	NM	NM
3-Methylhexane		NM		NM	NM	NM
3-Ethylpentane		NM		NM	NM	NM
3,5-Dimethylheptane		NM		NM	NM	NM
2-Methyloctane		NM		NM	NM	NM
3-Methyloctane		NM		NM	NM	NM
2,4-Dimethyloctane		NM		NM	NM	NM
Cyclopentane		NM		NM	NM	NM
Methylcyclopentane		NM		NM	NM	NM
Cyclohexane		NM		NM	NM	NM
t-1,2-Dimethylcyclopentane		NM		NM	NM	NM
c-1,3-Dimethylcyclopentane		NM		NM	NM	NM
Methylcyclohexane		NM		NM	NM	NM
1c,2t,3-Trimethylcyclopentane		NM		NM	NM	NM
Ethylcyclohexane		NM		NM	NM	NM

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N353SW Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Alkenes</b>								
	Ethene*	74-85-1		TILDAS		X		
	Propene*	115-07-1						
	1-Butene	106-98-9						
	c-2-Butene							
	t-2-Butene							
	2-Methylpropene	115-11-7						
	Pentene	25377-72-4						
	1-Hexene	592-41-6						
	3-Methyl-c-2-Pentene							
	3-Methyl-t-2-Pentene							
	4-Methyl-c-2-Pentene							
	4-Methyl-t-2-Pentene							
	1-Nonene	124-11-8						
	Propadiene	463-49-0						
	1,3-Butadiene	106-99-0						
	2-Methyl-1,3-Butadiene	78-79-5						
	Cyclopentadiene	542-92-7						
	Cyclohexene	110-83-8						
<b>Alkynes</b>								
	Ethyne*	74-86-2						
<b>Aromatic Hydrocarbons</b>								
	Benzene	71-43-2		PTR-MS		X		
	Toluene	108-88-3		PTR-MS		X		
	Ethylbenzene	100-41-4						
	o-Xylene	95-47-6						
	m&p-Xylene	63-68-3						
	1-Methyl-2-ethylbenzene	611-14-3						
	1-Methyl-3-ethylbenzene	620-14-4						
	1-Methyl-4-ethylbenzene	622-96-8						
	1,4-Dimethyl-2-ethylbenzene	1758-88-9						
	1,2,3-Trimethylbenzene	526-73-8						
	1,2,4-Trimethylbenzene	95-63-6						
	1,3,5-Trimethylbenzene	95-63-6						
	Indan	496-11-7						
	1,2-Diethylbenzene	135-01-3						
	1,3-Diethylbenzene	141-93-5						
	1,4-Diethylbenzene	105-05-5						
	1-Methyl-2-n-Propylbenzene							
	1-Methyl-3-n-Propylbenzene							
	1-Methyl-4-n-Propylbenzene							
	1-Methyl-2-i-Propylbenzene							
	1-Methyl-3-i-Propylbenzene							
	1,2,4,5-Tetramethylbenzene	95-93-2						
	n-Pent-Benzene							
	Styrene	100-42-5		PTR-MS		X		

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H353SW Port								
Species	Power									
	4%	7%	30%	40%	65%	85%				
	Mode 1		Mode 2		Mode 3	Mode 4				
Ethene*	1.09	0.233	BDL	0.004	BDL	NM				
Propene*	NM	NM	NM	NM	NM	NM				
1-Butene	NM	NM	NM	NM	NM	NM				
c-2-Butene	NM	NM	NM	NM	NM	NM				
t-2-Butene	NM	NM	NM	NM	NM	NM				
2-Methylpropene	NM	NM	NM	NM	NM	NM				
Pentene	NM	NM	NM	NM	NM	NM				
1-Hexene	NM	NM	NM	NM	NM	NM				
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM				
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM				
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM				
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM				
1-Nonene	NM	NM	NM	NM	NM	NM				
Propadiene	NM	NM	NM	NM	NM	NM				
1,3-Butadiene	NM	NM	NM	NM	NM	NM				
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM				
Cyclopentadiene	NM	NM	NM	NM	NM	NM				
Cyclohexene	NM	NM	NM	NM	NM	NM				
Ethyne*	NM	NM	NM	NM	NM	NM				
Benzene	0.2883 ± 0	0.0631 ± .0053	0.0021 ± .0007	0.0020 ± .0017	0.0019 ± .0001	NM				
Toluene	0.1355 ± 0	0.0246 ± .0024	0.0043 ± 0	0.0028 ± .0027	0.0011 ± .0004	NM				
Ethylbenzene	NM	NM	NM	NM	NM	NM				
o-Xylene	NM	NM	NM	NM	NM	NM				
m&p-Xylene	NM	NM	NM	NM	NM	NM				
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM				
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM				
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM				
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM				
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM				
Indan	NM	NM	NM	NM	NM	NM				
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM				
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM				
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM				
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM				
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM				
n-Pent-Benzene	NM	NM	NM	NM	NM	NM				
Styrene	0.0571 ± 0	0.0098 ± .0021	0.0011 ± .0005	0.0007 ± .0003	0.0006 ± 0	NM				

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N353SW Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Semivolatiles</b>								
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling				
	Acenaphthene	83-32-9						
	Fluorene	86-73-7						
	Phenanthrene	85-01-8						
	Anthracene	120-12-7						
	Fluoranthene	206-44-0						
	Pyrene	129-00-0						
	Benzo(a)pyrene	50-32-8						
	Indeno[1,2,3-cd]pyrene	193-39-5						
	Dibenz[a,h]anthracene	53-70-3						
	Benzo[ghi]perylene	191-24-2						
	Hexatriacontane	630-06-8						
	Triacontane	638-68-6						
	Octacosane	630-02-4						
	Hexacosane	630-01-3						
	Tetracosane	646-31-1						
	Docosane	629-92-0						
	Eicosane	112-95-8						
	Nonadecane	629-92-5						
	Octadecane	593-46-3						
	Hexadecane	544-76-3						
	Tetradecane	629-59-4						
	Naphthalene	91-20-3		PTR-MS		X		
	Benz(a)anthracene	56-55-3						
	Chrysene	218-01-9						
	Benzo(b)fluoranthene	205-99-2						
	Benzo(k)fluoranthene	207-08-9						
	Dodecane	112-40-3						
<b>Carbonyls</b>								
				(DNPH Sampling)				
	Formaldehyde			TILDAS		X		
	Acetaldehyde			PTR-MS		X		
	Acetone	67-64-1						
	Acrolein	107-02-8		TILDAS				
	Propion-aldehyde	123-38-6						
	Crotonaldehyde	4170-30-3						
	MEK	78-93-3						
	Methacrolein	78-85-3						
	Butyraldehyde	123-72-8						
	Benzaldehyde	100-52-7						
	Valeraldehyde	110-62-3						
	Tolualdehyde							
	Hexaldehyde	66-25-1						
<b>Other Organics</b>								
	mz57			PTR-MS		X		
	mz59			PTR-MS		X		
	mz107			PTR-MS		X		
	MTBE	1634-04-4						

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: H353SW		Engine Location: Port					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Acenaphthylene		NM		NM		NM	NM
Acenaphthene		NM		NM		NM	NM
Fluorene		NM		NM		NM	NM
Phenanthrene		NM		NM		NM	NM
Anthracene		NM		NM		NM	NM
Fluoranthene		NM		NM		NM	NM
Pyrene		NM		NM		NM	NM
Benzo(a)pyrene		NM		NM		NM	NM
Indeno[1,2,3-cd]pyrene		NM		NM		NM	NM
Dibenz[a,h]anthracene		NM		NM		NM	NM
Benzo[ghi]perylene		NM		NM		NM	NM
Hexatriacontane		NM		NM		NM	NM
Triacotane		NM		NM		NM	NM
Octacosane		NM		NM		NM	NM
Hexacosane		NM		NM		NM	NM
Tetracosane		NM		NM		NM	NM
Docosane		NM		NM		NM	NM
Eicosane		NM		NM		NM	NM
Nonadecane		NM		NM		NM	NM
Octadecane		NM		NM		NM	NM
Hexadecane		NM		NM		NM	NM
Tetradecane		NM		NM		NM	NM
Naphthalene	0.0523 ± 0	0.0112 ± .0024	0.0025 ± .0001	0.0013 ± 0	0.0021 ± .0016		NM
Benz(a)anthracene		NM		NM		NM	NM
Chrysene		NM		NM		NM	NM
Benzo(b)fluoranthene		NM		NM		NM	NM
Benzo(k)fluorantene		NM		NM		NM	NM
Dodecane		NM		NM		NM	NM
Formaldehyde	1.13 ± 0	0.28 ± 0.017	0.00004 ± 0.004	0.0012 ± 0.002	(-)0.001 ± 0.001		NM
Acetaldehyde	0.49 ± 0	0.13 ± 0.008	0.004 ± 0.0005	0.004 ± 0.00006	0.003 ± 0.0003		NM
Acetone		NM		NM		NM	NM
Acrolein		NM		NM		NM	NM
Propion-aldehyde		NM		NM		NM	NM
Crotonaldehyde		NM		NM		NM	NM
MEK		NM		NM		NM	NM
Methacrolein		NM		NM		NM	NM
Butyraldehyde		NM		NM		NM	NM
Benzaldehyde		NM		NM		NM	NM
Valeraldehyde		NM		NM		NM	NM
Tolualdehyde		NM		NM		NM	NM
Hexaldehyde		NM		NM		NM	NM
mz57	0 ± 0	0.1719 ± .0168	0 ± 0	0.0461 ± 0	0.0129 ± 0		0 ± 0
mz59	0.2055 ± 0	0.0565 ± .0030	0.0033 ± .0005	0.0025 ± 0	0.0016 ± .0004		0 ± 0
mz107	0.2142 ± 0	0.0415 ± .0064	0.0032 ± .0020	0.0021 ± .0003	0.0025 ± .0012		0 ± 0
MTBE		NM		NM		NM	NM

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: N353SW		Engine Location: Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Elemental Analysis</b>							
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)			
	Magnesium	7639-95-4	1.200				
	Beryllium	7440-41-7					
	Aluminum	7429-90-5	1.000				
	Silicon	7440-21-3	1.200				
	Phosphorous	7723-14-0	0.204				
	Sulfur	63705-05-5	0.204				
	Chlorine	7782-50-5	0.068				
	Potassium	744-09-5	0.017				
	Calcium	7440-70-2	0.017				
	Scandium	7440-20-2					
	Iron	7439-89-5	0.007				
	Titanium	7440-32-6	0.051				
	Vanadium	7440-62-2	0.020				
	Chromium	7440-47-3	0.017				
	Manganese	7439-96-5	0.009				
	Cobalt	7440-48-4	0.007				
	Nickel	7440-2-0	0.003				
	Copper	7440-50-8	0.003				
	Zinc	7440-66-6	0.003				
	Gallium	7440-55-3	0.425				
	Germanium	7440-38-2	0.017				
	Arsenic	7440-38-2	0.003				
	Selenium	7782-49-2	0.017				
	Rbidium		0.007				
	Strontium	7440-24-6	0.017				
	Yttrium		0.003				
	Niobium	7440-03-1					
	Molybdenum	7439-98-7	0.017				
	Palladium	7440-05-3	0.026				
	Silver	7440-22-4					
	Cadmium	7440-43-9	0.017				
	Indium	7440-74-6	0.017				
	Tin	7440-31-6	0.026				
	Antimony	7440-36-0	0.024				
	Cesium	7440-46-2					
	Barium	7440-39-3	0.170				
	Lanthanum	4639-91-0	0.425				
	Platinum	7440-06-4					
	Gold	7440-57-5					
	Mercury	7439-97-6					
	Lead	7439-92-1	0.051				
	Bismuth	7440-69-9					
	Uranium	7440-61-1					



**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: H353SW		Engine Location: Port					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Hexavalent Chromium		NM		NM		NM	NM
Magnesium		NM		NM		NM	NM
Beryllium		NM		NM		NM	NM
Aluminum		NM		NM		NM	NM
Silicon		NM		NM		NM	NM
Phosphorous		NM		NM		NM	NM
Sulfur		NM		NM		NM	NM
Chlorine		NM		NM		NM	NM
Potassium		NM		NM		NM	NM
Calcium		NM		NM		NM	NM
Scandium		NM		NM		NM	NM
Iron		NM		NM		NM	NM
Titanium		NM		NM		NM	NM
Vanadium		NM		NM		NM	NM
Chromium		NM		NM		NM	NM
Manganese		NM		NM		NM	NM
Cobalt		NM		NM		NM	NM
Nickel		NM		NM		NM	NM
Copper		NM		NM		NM	NM
Zinc		NM		NM		NM	NM
Gallium		NM		NM		NM	NM
Germanium		NM		NM		NM	NM
Arsenic		NM		NM		NM	NM
Selenium		NM		NM		NM	NM
Rbodium		NM		NM		NM	NM
Strontium		NM		NM		NM	NM
Yttrium		NM		NM		NM	NM
Niobium		NM		NM		NM	NM
Molybdenum		NM		NM		NM	NM
Palladium		NM		NM		NM	NM
Silver		NM		NM		NM	NM
Cadmium		NM		NM		NM	NM
Indium		NM		NM		NM	NM
Tin		NM		NM		NM	NM
Antimony		NM		NM		NM	NM
Cesium		NM		NM		NM	NM
Barium		NM		NM		NM	NM
Lanthanum		NM		NM		NM	NM
Platinum		NM		NM		NM	NM
Gold		NM		NM		NM	NM
Mercury		NM		NM		NM	NM
Lead		NM		NM		NM	NM
Bismuth		NM		NM		NM	NM
Uranium		NM		NM		NM	NM

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number:		N353SW						
Engine Location:		Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Non-HC</b>								
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X		
	NO2	10102-44-0		TILDAS		X		
	NOX					X		
	HNO3	7697-37-2						
	HONO	7782-77-6						
	N2O	10024-97-2						
	CO	630-08-0		TILDAS		X		
	CO2	124-38-9				X		
	SO2	7446-09-5						
	SOX							
<b>Inorganic ions</b>	Sulfate	14808-79-8						
	Nitrate	7697-37-2						
NM - no measurement was made								
BDL - Below detection limit								
EI for CO2 determined by elemental analysis of fuel								
<b>Notes:</b>								
<b>UCR comments:</b>								
In the original text LODs were provided for all compounds and species measured on the high-flow side.								
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.								
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.								
UCR only made one measurement so uncertainty cannot be calculated.								
Analytical uncertainty for all measurement methods was provided in the original text.								

**Table I.3: PM data and speciation profiles for N353SW Port Engine (continued)**

Aircraft Tail Number: H353SW						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
NO	0.16	0.892	6.09	7.04	9.36	NM
NO2	2.51	2.18	1.00	0.885	0.88	NM
NOX	2.67	3.08	7.09	7.92	10.2	NM
HNO3	NM	NM	NM	NM	NM	NM
HONO	NM	NM	NM	NM	NM	NM
N2O						
CO	22.2	16.9	3.11	1.85	0.786	NM
CO2	3160	3160	3160	3160	3160	3160
SO2	NM	NM	NM	NM	NM	NM
SOX	NM	NM	NM	NM	NM	NM
Sulfate	NM	NM	NM	NM	NM	NM
Nitrate	NM	NM	NM	NM	NM	NM
NM - no measurement was made						
BDL - Below detection limit						
EI for CO2 determined by elemental analysis of fuel						
<b>Notes:</b>						
<b>UCR comments:</b>						
In the original text LODs were provided for all compounds and species measured on the high-flow side.						
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.						
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.						
UCR only made one measurement so uncertainty cannot be calculated.						
Analytical uncertainty for all measurement methods was provided in the original text.						

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine**

Aircraft Tail Number: Engine Location:		N353SW Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
PM	Dgeom (nm)		5	DMS500			X
	Sigma		1.05	DMS500			X
	DgeomM (nm)		5	DMS500			X
	Number(10e15/kg fuel)		0.02	DMS500			X
	Mass		1.0E-06	DMS500			X
	Mass				X		
EC					X		
OC					X		
<b>Normal Alkanes</b>							
	Methane*	74-82-8					
	Ethane*	74-84-0					
	Propane*	74-98-6					
	Butane	106-97-8					
	Pentane	109-66-0					
	Hexane	110-54-3					
	Heptane	142-82-5					
	Octane	111-65-9					
	Nonane	111-84-2					
	Decane	124-18-5					
	Undecane	1120-21-4					
	Dodecane	112-40-3					
	Tridecane	629-50-5					
<b>Branched Alkanes</b>							
	2-Methylbutane	78-78-4					
	2,3-Dimethylbutane	79-29-8					
	2-Methylpentane	107-83-5					
	3-Methylpentane	96-14-0					
	2,3-Dimethylpentane	565-59-3					
	2,4-Dimethylpentane	108-08-7					
	3,3-Dimethylpentane	562-49-2					
	2-Methylhexane	598-76-4					
	3-Methylhexane	589-34-4					
	3-Ethylpentane	617-78-7					
	3,5-Dimethylheptane	926-82-9					
	2-Methyloctane	3221-61-2					
	3-Methyloctane	2216-33-3					
	2,4-Dimethyloctane						
<b>Cycloalkanes</b>							
	Cyclopentane	287-923					
	Methylcyclopentane	96-37-7					
	Cyclohexane	110-82-7					
	t-1,2-Dimethylcyclopentane	2452-99-5					
	c-1,3-Dimethylcyclopentane	2453-00-1					
	Methylcyclohexane	108-87-2					
	1c,2t,3-Trimethylcyclopentane						
	Ethylcyclohexane	1678-91-7					

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: N353SW						
Engine Location: Starboard						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Size Distribution Shape Parameters						
Dgeom (nm)	13.25 ± 0.12	11.76 ± 0.10	15.11 ± 0.43	17.01 ± 0.43	20.39 ± 0.24	28.65 ± 0.29
Sigma	1.52 ± 0.01	1.56 ± 0.002	1.60 ± 0.013	1.61 ± 0.012	1.83 ± 0.008	1.93 ± 0.01
DgeomM (nm)	28.28 ± 0.71	26.51 ± 0.19	31.67 ± 0.53	33.45 ± 0.13	51.03 ± 0.23	73.17 ± 0.61
Emission Indices (g/kg fuel)						
Number	1.13 ± 0.05	0.76 ± 0.02	0.74 ± 0.10	0.66 ± 0.05	2.92 ± 0.06	4.13 ± 0.145
Mass	0.005 ± 0.0002	0.003 ± 0.0001	0.004 ± 0.0004	0.006 ± 0.0002	0.058 ± 0.0013	0.254 ± 0.014
Mass	0.0092		0.0058		NM	0.1820
	0.0044		0.0035		NM	0.1540
	0.0065		0.0035		NM	0.0221
Methane*	NM		NM		NM	NM
Ethane*	NM		NM		NM	NM
Propane*	NM		NM		NM	NM
Butane	NM		NM		NM	NM
Pentane	NM		NM		NM	NM
Hexane	NM		NM		NM	NM
Heptane	NM		NM		NM	NM
Octane	NM		NM		NM	NM
Nonane	NM		NM		NM	NM
Decane	NM		NM		NM	NM
Undecane	NM		NM		NM	NM
Dodecane	NM		NM		NM	NM
Tridecane	NM		NM		NM	NM
2-Methylbutane	NM		NM		NM	NM
2,3-Dimethylbutane	NM		NM		NM	NM
2-Methylpentane	NM		NM		NM	NM
3-Methylpentane	NM		NM		NM	NM
2,3-Dimethylpentane	NM		NM		NM	NM
2,4-Dimethylpentane	NM		NM		NM	NM
3,3-Dimethylpentane	NM		NM		NM	NM
2-Methylhexane	NM		NM		NM	NM
3-Methylhexane	NM		NM		NM	NM
3-Ethylpentane	NM		NM		NM	NM
3,5-Dimethylheptane	NM		NM		NM	NM
2-Methyloctane	NM		NM		NM	NM
3-Methyloctane	NM		NM		NM	NM
2,4-Dimethyloctane	NM		NM		NM	NM
Cyclopentane	NM		NM		NM	NM
Methylcyclopentane	NM		NM		NM	NM
Cyclohexane	NM		NM		NM	NM
t-1,2-Dimethylcyclopentane	NM		NM		NM	NM
c-1,3-Dimethylcyclopentane	NM		NM		NM	NM
Methylcyclohexane	NM		NM		NM	NM
1c,2t,3-Trimethylcyclopentane	NM		NM		NM	NM
Ethylcyclohexane	NM		NM		NM	NM

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N353SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Alkenes</b>								
	Ethene*	74-85-1		TILDAS		X		
	Propene*	115-07-1						
	1-Butene	106-98-9						
	c-2-Butene							
	t-2-Butene							
	2-Methylpropene	115-11-7						
	Pentene	25377-72-4						
	1-Hexene	592-41-6						
	3-Methyl-c-2-Pentene							
	3-Methyl-t-2-Pentene							
	4-Methyl-c-2-Pentene							
	4-Methyl-t-2-Pentene							
	1-Nonene	124-11-8						
	Propadiene	463-49-0						
	1,3-Butadiene	106-99-0						
	2-Methyl-1,3-Butadiene	78-79-5						
	Cyclopentadiene	542-92-7						
	Cyclohexene	110-83-8						
<b>Alkynes</b>								
	Ethyne*	74-86-2						
<b>Aromatic Hydrocarbons</b>								
	Benzene	71-43-2		PTR-MS		X		
	Toluene	108-88-3		PTR-MS		X		
	Ethylbenzene	100-41-4						
	o-Xylene	95-47-6						
	m&p-Xylene	63-68-3						
	1-Methyl-2-ethylbenzene	611-14-3						
	1-Methyl-3-ethylbenzene	620-14-4						
	1-Methyl-4-ethylbenzene	622-96-8						
	1,4-Dimethyl-2-ethylbenzene	1758-88-9						
	1,2,3-Trimethylbenzene	526-73-8						
	1,2,4-Trimethylbenzene	95-63-6						
	1,3,5-Trimethylbenzene	95-63-6						
	Indan	496-11-7						
	1,2-Diethylbenzene	135-01-3						
	1,3-Diethylbenzene	141-93-5						
	1,4-Diethylbenzene	105-05-5						
	1-Methyl-2-n-Propylbenzene							
	1-Methyl-3-n-Propylbenzene							
	1-Methyl-4-n-Propylbenzene							
	1-Methyl-2-i-Propylbenzene							
	1-Methyl-3-i-Propylbenzene							
	1,2,4,5-Tetramethylbenzene	95-93-2						
	n-Pent-Benzene							
	Styrene	100-42-5		PTR-MS		X		

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number:		H353SW				
Engine Location:		Starboard				
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Ethene*	0.712	0.136	BDL	0.00289	BDL	BDL
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1998 ± .0952	0.0375 ± .0044	0.0019 ± .0004	0.0012 ± .0003	0.0012 ± .0003	0.0012 ± 0
Toluene	0.0940 ± .0565	0.0127 ± .0014	0.0027 ± .0027	0.0009 ± .0002	0.0009 ± .0002	0.0007 ± 0
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0375 ± .0204	0.0056 ± .0012	0.0011 ± .0007	0.0004 ± .0001	0.0004 ± .0001	0.0005 ± 0

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N353SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Semivolatiles</b>								
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling	X			
	Acenaphthene	83-32-9		XAD-PUF/Quartz sampling	X			
	Fluorene	86-73-7		XAD-PUF/Quartz sampling	X			
	Phenanthrene	85-01-8		XAD-PUF/Quartz sampling	X			
	Anthracene	120-12-7		XAD-PUF/Quartz sampling	X			
	Fluoranthene	206-44-0		XAD-PUF/Quartz sampling	X			
	Pyrene	129-00-0		XAD-PUF/Quartz sampling	X			
	Benzo(a)pyrene	50-32-8		XAD-PUF/Quartz sampling	X			
	Indeno[1,2,3-cd]pyrene	193-39-5		XAD-PUF/Quartz sampling	X			
	Dibenz[a,h]anthracene	53-70-3		XAD-PUF/Quartz sampling	X			
	Benzo[ghi]perylene	191-24-2		XAD-PUF/Quartz sampling	X			
	Hexatriacontane	630-06-8						
	Triacontane	638-68-6		XAD-PUF/Quartz sampling	X			
	Octacosane	630-02-4		XAD-PUF/Quartz sampling	X			
	Hexacosane	630-01-3		XAD-PUF/Quartz sampling	X			
	Tetracosane	646-31-1		XAD-PUF/Quartz sampling	X			
	Docosane	629-92-0		XAD-PUF/Quartz sampling	X			
	Eicosane	112-95-8		XAD-PUF/Quartz sampling	X			
	Nonadecane	629-92-5		XAD-PUF/Quartz sampling	X			
	Octadecane	593-46-3		XAD-PUF/Quartz sampling	X			
	Hexadecane	544-76-3		XAD-PUF/Quartz sampling	X			
	Tetradecane	629-59-4		XAD-PUF/Quartz sampling	X			
	Naphthalene	91-20-2		XAD-PUF/Quartz sampling	X			
	Naphthalene	91-20-3		PTR-MS		X		
	Benz(a)anthracene	56-55-3		XAD-PUF/Quartz sampling	X			
	Chrysene	218-01-9		XAD-PUF/Quartz sampling	X			
	Benzo(b)fluoranthene	205-99-2		XAD-PUF/Quartz sampling	X			
	Benzo(k)fluoranthene	207-08-9		XAD-PUF/Quartz sampling	X			
	Dodecane	112-40-3		XAD-PUF/Quartz sampling	X			
<b>Carbonyls</b>								
	Formaldehyde			TILDAS		X		
	Acetaldehyde			PTR-MS		X		
	Acetone	67-64-1						
	Acrolein	107-02-8		TILDAS				
	Propion-aldehyde	123-38-6						
	Crotonaldehyde	4170-30-3						
	MEK	78-93-3						
	Methacrolein	78-85-3						
	Butyraldehyde	123-72-8						
	Benzaldehyde	100-52-7						
	Valeraldehyde	110-62-3						
	Tolualdehyde							
	Hexaldehyde	66-25-1						
<b>Other Organics</b>								
	mz57			PTR-MS		X		
	mz59			PTR-MS		X		
	mz107			PTR-MS		X		
	MTBE	1634-04-4						



**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N353SW Starboard										
Species	Power											
	4%		7%		30%		40%		65%		85%	
	Mode 1			Mode 2			Mode 3			Mode 4		
Acenaphthylene	0.021377042			1.91247E-03			0.000669928			2.72632E-05		
Acenaphthene	0.038970077			1.60742E-02			0.004724923			8.414E-05		
Fluorene	0.003237607			5.54317E-05			2.24589E-05			1.33099E-05		
Phenanthrene	0.004059081			2.63478E-04			3.05338E-05			0.000357917		
Anthracene	0.004678825			3.30689E-04			0.000258091			0.000425889		
Fluoranthene	0.000315034			0.000102087			2.97E-06			0.001133975		
Pyrene	0.000752021			1.81276E-04			0.000437521			0.001819716		
Benzo(a)pyrene	BDL			BDL			1.44753E-05			2.38615E-05		
Indeno[1,2,3-cd]pyrene	BDL			BDL			1.15698E-05			BDL		
Dibenz[a,h]anthracene	BDL			BDL			1.93E-05			BDL		
Benzo[ghi]perylene	BDL			BDL			BDL			BDL		
Hexatriacontane	NM			NM			NM			NM		
Triacontane	2.33E-06			1.80E-06			2.73E-06			9.02E-06		
Octacosane	6.93E-06			2.20E-06			2.39E-06			3.39E-05		
Hexacosane	1.67E-05			4.46E-05			2.59E-05			5.53E-04		
Tetracosane	4.34E-06			2.99E-06			3.55E-06			1.14E-05		
Docosane	2.58E-06			2.49E-06			4.38E-06			1.51E-05		
Eicosane	2.87E-06			3.12E-06			4.38E-06			2.23E-05		
Nonadecane	5.39E-06			5.85E-06			7.45E-06			3.13E-05		
Octadecane	1.87E-05			1.86E-05			2.13E-05			9.21E-05		
Hexadecane	6.46E-06			9.87E-06			1.15E-05			5.23E-05		
Tetradecane	2.94E-05			2.97E-05			4.52E-05			2.32E-04		
Naphthalene	9.69E-03			1.25564E+00			5.52E+00			6.68E-02		
Naphthalene	0.0317 ± .0183		0.0072 ± .0018		0.0020 ± .0004		0.0011 ± .0003		0.0011 ± .0003		0.0010 ± 0	
Benz(a)anthracene	2.74547E-05			1.00377E-05			5.22E-05			2.05E-04		
Chrysene	2.78242E-05			1.01728E-05			5.49E-05			2.91E-04		
Benzo(b)fluoranthene	BDL			BDL			1.69E-05			BDL		
Benzo(k)fluorantene	BDL			BDL			3.73E-05			6.35E-05		
Dodecane	1.59E-03			2.68E-04			9.81E-05			1.23E-03		
Formaldehyde	0.80 ± 0.34		0.16 ± 0.06		0.0018 ± 0.004		0.002 ± 0.0009		0.002 ± 0.0009		0.002 ± 0	
Acetaldehyde	0.36 ± 0.14		0.08 ± 0.007		0.005 ± 0.0005		0.002 ± 0.0008		0.002 ± 0.0008		0.002 ± 0	
Acetone	NM		NM		NM		NM		NM		NM	
Acrolein	NM		NM		NM		NM		NM		NM	
Propion-aldehyde	NM		NM		NM		NM		NM		NM	
Crotonaldehyde	NM		NM		NM		NM		NM		NM	
MEK	NM		NM		NM		NM		NM		NM	
Methacrolein	NM		NM		NM		NM		NM		NM	
Butyraldehyde	NM		NM		NM		NM		NM		NM	
Benzaldehyde	NM		NM		NM		NM		NM		NM	
Valeraldehyde	NM		NM		NM		NM		NM		NM	
Tolualdehyde	NM		NM		NM		NM		NM		NM	
Hexaldehyde	NM		NM		NM		NM		NM		NM	
mz57	0.3604 ± .0364		0.1031 ± .0218		0.0233 ± 0		0.0461 ± 0		0.0130 ± 0		0.0066 ± 0	
mz59	0.1521 ± .0585		0.0354 ± .0042		0.0027 ± .0011		0.0014 ± .0002		0.0014 ± .0002		0.0014 ± 0	
mz107	0.1455 ± .0844		0.0250 ± .0045		0.0023 ± .0010		0.0017 ± .0004		0.0017 ± .0004		0.0021 ± 0	
MTBE	NM		NM		NM		NM		NM		NM	

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N353SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Elemental Analysis</b>								
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)				
	Magnesium	7639-95-4	1.200		X			
	Beryllium	7440-41-7						
	Aluminum	7429-90-5	1.000		X			
	Silicon	7440-21-3	1.200		X			
	Phosphorous	7723-14-0	0.204		X			
	Sulfur	63705-05-5	0.204		X			
	Chlorine	7782-50-5	0.068		X			
	Potassium	744-09-5	0.017		X			
	Calcium	7440-70-2	0.017		X			
	Scandium	7440-20-2						
	Iron	7439-89-5	0.007		X			
	Titanium	7440-32-6	0.051		X			
	Vanadium	7440-62-2	0.020		X			
	Chromium	7440-47-3	0.017		X			
	Manganese	7439-96-5	0.009		X			
	Cobalt	7440-48-4	0.007		X			
	Nickel	7440-2-0	0.003		X			
	Copper	7440-50-8	0.003		X			
	Zinc	7440-66-6	0.003		X			
	Gallium	7440-55-3	0.425		X			
	Germanium	7440-38-2	0.017		X			
	Arsenic	7440-38-2	0.003		X			
	Selenium	7782-49-2	0.017		X			
	Rbodium		0.007		X			
	Strontium	7440-24-6	0.017		X			
	Yttrium		0.003		X			
	Niobium	7440-03-1						
	Molybdenum	7439-98-7	0.017		X			
	Palladium	7440-05-3	0.026		X			
	Silver	7440-22-4						
	Cadmium	7440-43-9	0.017		X			
	Indium	7440-74-6	0.017		X			
	Tin	7440-31-6	0.026		X			
	Antimony	7440-36-0	0.024		X			
	Cesium	7440-46-2						
	Barium	7440-39-3	0.170		X			
	Lanthanum	4639-91-0	0.425		X			
	Platinum	7440-06-4						
	Gold	7440-57-5						
	Mercury	7439-97-6						
	Lead	7439-92-1	0.051		X			
	Bismuth	7440-69-9						
	Uranium	7440-61-1						

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		<b>H353SW</b>					
<b>Engine Location:</b>		<b>Starboard</b>					
<b>Species</b>	<b>Power</b>						
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>	
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>	
Hexavalent Chromium		NM		NM	NM	NM	
Magnesium		4.69E-05		BDL	8.97E-05	BDL	
Beryllium		NM		NM	NM	NM	
Aluminum		6.32E-05		BDL	1.18E-04	3.40E-04	
Silicon		7.45E-05		8.30E-05	NM	NM	
Phosphorous		BDL		BDL	NM	NM	
Sulfur		2.47E-05		2.29E-05	1.48E-04	5.58E-04	
Chlorine		BDL		BDL	7.68E-05	BDL	
Potassium		BDL		BDL	BDL	BDL	
Calcium		4.19E-07		3.75E-06	2.28E-06	5.15E-05	
Scandium		NM		NM	NM	NM	
Iron		2.09E-06		2.29E-05	BDL	3.43E-05	
Titanium		2.09E-06		2.50E-06	4.56E-06	8.58E-06	
Vanadium		BDL		BDL	7.61E-07	BDL	
Chromium		8.37E-07		1.00E-05	5.32E-06	3.14E-05	
Manganese		4.19E-07		2.09E-06	2.28E-06	1.72E-05	
Cobalt		BDL		BDL	1.52E-06	8.58E-06	
Nickel		BDL		1.67E-06	BDL	1.14E-05	
Copper		BDL		4.17E-07	1.52E-06	2.86E-06	
Zinc		4.19E-06		4.59E-06	6.08E-06	2.57E-05	
Gallium		BDL		0.00E+00	1.52E-06	0.00E+00	
Germanium		8.37E-07		1.25E-06	0.00E+00	3.14E-05	
Arsenic		BDL		BDL	BDL	BDL	
Selenium		BDL		BDL	BDL	BDL	
Rbodium		BDL		BDL	NM	NM	
Strontium		BDL		BDL	NM	NM	
Yttrium		BDL		4.17E-07	1.52E-06	5.72E-06	
Niobium		NM		NM	NM	NM	
Molybdenum		1.26E-06		4.17E-07	1.52E-06	2.86E-06	
Palladium		BDL		BDL	6.08E-06	BDL	
Silver		NM		NM	NM	NM	
Cadmium		3.35E-06		BDL	2.28E-06	5.72E-06	
Indium		1.67E-06		2.09E-06	9.13E-06	1.43E-05	
Tin		1.67E-06		BDL	BDL	1.43E-05	
Antimony		BDL		BDL	BDL	BDL	
Cesium		NM		NM	NM	NM	
Barium		5.02E-06		2.50E-06	3.04E-06	0.00E+00	
Lanthanum		BDL		BDL	NM	NM	
Platinum		NM		NM	NM	NM	
Gold		NM		NM	NM	NM	
Mercury		NM		NM	NM	NM	
Lead		BDL		BDL	NM	NM	
Bismuth		NM		NM	NM	NM	
Uranium		NM		NM	NM	NM	

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N353SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Non-HC</b>								
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X		
	NO2	10102-44-0		TILDAS		X		
	NOX					X		
	HNO3	7697-37-2						
	HONO	7782-77-6						
	N2O	10024-97-2						
	CO	630-08-0		TILDAS		X		
	CO2	124-38-9				X		
	SO2	7446-09-5						
SOX								
<b>Inorganic ions</b>	Sulfate	14808-79-8			X			
	Nitrate	7697-37-2						
NM - no measurement was made								
BDL - Below detection limit								
EI for CO2 determined by elemental analysis of fuel								
<b>Notes:</b>								
<b>UCR comments:</b>								
In the original text LODs were provided for all compounds and species measured on the high-flow side.								
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.								
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.								
UCR only made one measurement so uncertainty cannot be calculated.								
Analytical uncertainty for all measurement methods was provided in the original text.								

**Table I.4: PM data and speciation profiles for N353SW Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		H353SW					
<b>Engine Location:</b>		Starboard					
<b>Species</b>	<b>Power</b>						
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>	
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>	
NO	0.204	1.21	5.70	6.89	9.41	14.6	
NO2	2.21	1.91	0.984	0.887	0.902	1.22	
NOX	2.41	3.12	6.69	7.78	10.3	15.8	
HNO3	NM	NM	NM	NM	NM	NM	
HONO	NM	NM	NM	NM	NM	NM	
N2O							
CO	19.3	12.3	3.05	1.92	0.935	1.068	
CO2	3160	3160	3160	3160	3160	3160	
SO2	NM	NM	NM	NM	NM	NM	
SOX	NM	NM	NM	NM	NM	NM	
Sulfate	0.000210879		0.00024978		0.00077622	0.003275906	
Nitrate	NM		NM		NM	NM	
NM - no measurement was made							
BDL - Below detection limit							
EI for CO2 determined by elemental analysis of fuel							
<b>Notes:</b>							
<b>UCR comments:</b>							
In the original text LODs were provided for all compounds and species measured on the high-flow side.							
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.							
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.							
UCR only made one measurement so uncertainty cannot be calculated.							
Analytical uncertainty for all measurement methods was provided in the original text.							

**Table I.5: PM data and speciation profiles for N695SW Port Engine**

Aircraft Tail Number: N695SW		Engine Location: Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
PM	Dgeom (nm)		5	DMS500			
	Sigma		1.05	DMS500			
	DgeomM (nm)		5	DMS500			
	Number(10e15/kg fuel)		0.02	DMS500			
	Mass		1.0E-06	DMS500			
	EC	Mass					
OC							
<b>Normal Alkanes</b>							
	Methane*	74-82-8					
	Ethane*	74-84-0					
	Propane*	74-98-6					
	Butane	106-97-8					
	Pentane	109-66-0					
	Hexane	110-54-3					
	Heptane	142-82-5					
	Octane	111-65-9					
	Nonane	111-84-2					
	Decane	124-18-5					
	Undecane	1120-21-4					
	Dodecane	112-40-3					
	Tridecane	629-50-5					
<b>Branched Alkanes</b>							
	2-Methylbutane	78-78-4					
	2,3-Dimethylbutane	79-29-8					
	2-Methylpentane	107-83-5					
	3-Methylpentane	96-14-0					
	2,3-Dimethylpentane	565-59-3					
	2,4-Dimethylpentane	108-08-7					
	3,3-Dimethylpentane	562-49-2					
	2-Methylhexane	598-76-4					
	3-Methylhexane	589-34-4					
	3-Ethylpentane	617-78-7					
	3,5-Dimethylheptane	926-82-9					
	2-Methyloctane	3221-61-2					
	3-Methyloctane	2216-33-3					
	2,4-Dimethyloctane						
<b>Cycloalkanes</b>							
	Cyclopentane	287-923					
	Methylcyclopentane	96-37-7					
	Cyclohexane	110-82-7					
	t-1,2-Dimethylcyclopentane	2452-99-5					
	c-1,3-Dimethylcyclopentane	2453-00-1					
	Methylcyclohexane	108-87-2					
	1c,2t,3-Trimethylcyclopentane						
	Ethylcyclohexane	1678-91-7					

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

<b>Aircraft Tail Number:</b>		<b>H695SW</b>					
<b>Engine Location:</b>		<b>Port</b>					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Size Distribution Shape Parameters							
Dgeom (nm)	NM	NM	NM	NM	NM	NM	
Sigma	NM	NM	NM	NM	NM	NM	
DgeomM (nm)	NM	NM	NM	NM	NM	NM	
Emission Indices (g/kg fuel)							
Number	NM	NM	NM	NM	NM	NM	
Mass	NM	NM	NM	NM	NM	NM	
		NM		NM	NM	NM	
		NM		NM	NM	NM	
Methane*		NM		NM	NM	NM	
Ethane*		NM		NM	NM	NM	
Propane*		NM		NM	NM	NM	
Butane		NM		NM	NM	NM	
Pentane		NM		NM	NM	NM	
Hexane		NM		NM	NM	NM	
Heptane		NM		NM	NM	NM	
Octane		NM		NM	NM	NM	
Nonane		NM		NM	NM	NM	
Decane		NM		NM	NM	NM	
Undecane		NM		NM	NM	NM	
Dodecane		NM		NM	NM	NM	
Tridecane		NM		NM	NM	NM	
2-Methylbutane		NM		NM	NM	NM	
2,3-Dimethylbutane		NM		NM	NM	NM	
2-Methylpentane		NM		NM	NM	NM	
3-Methylpentane		NM		NM	NM	NM	
2,3-Dimethylpentane		NM		NM	NM	NM	
2,4-Dimethylpentane		NM		NM	NM	NM	
3,3-Dimethylpentane		NM		NM	NM	NM	
2-Methylhexane		NM		NM	NM	NM	
3-Methylhexane		NM		NM	NM	NM	
3-Ethylpentane		NM		NM	NM	NM	
3,5-Dimethylheptane		NM		NM	NM	NM	
2-Methyloctane		NM		NM	NM	NM	
3-Methyloctane		NM		NM	NM	NM	
2,4-Dimethyloctane		NM		NM	NM	NM	
Cyclopentane		NM		NM	NM	NM	
Methylcyclopentane		NM		NM	NM	NM	
Cyclohexane		NM		NM	NM	NM	
t-1,2-Dimethylcyclopentane		NM		NM	NM	NM	
c-1,3-Dimethylcyclopentane		NM		NM	NM	NM	
Methylcyclohexane		NM		NM	NM	NM	
1c,2t,3-Trimethylcyclopentane		NM		NM	NM	NM	
Ethylcyclohexane		NM		NM	NM	NM	

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N695SW Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Alkenes</b>								
	Ethene*	74-85-1		TILDAS		X		
	Propene*	115-07-1						
	1-Butene	106-98-9						
	c-2-Butene							
	t-2-Butene							
	2-Methylpropene	115-11-7						
	Pentene	25377-72-4						
	1-Hexene	592-41-6						
	3-Methyl-c-2-Pentene							
	3-Methyl-t-2-Pentene							
	4-Methyl-c-2-Pentene							
	4-Methyl-t-2-Pentene							
	1-Nonene	124-11-8						
	Propadiene	463-49-0						
	1,3-Butadiene	106-99-0						
	2-Methyl-1,3-Butadiene	78-79-5						
	Cyclopentadiene	542-92-7						
	Cyclohexene	110-83-8						
<b>Alkynes</b>								
	Ethyne*	74-86-2						
<b>Aromatic Hydrocarbons</b>								
	Benzene	71-43-2		PTR-MS		X		
	Toluene	108-88-3		PTR-MS		X		
	Ethylbenzene	100-41-4						
	o-Xylene	95-47-6						
	m&p-Xylene	63-68-3						
	1-Methyl-2-ethylbenzene	611-14-3						
	1-Methyl-3-ethylbenzene	620-14-4						
	1-Methyl-4-ethylbenzene	622-96-8						
	1,4-Dimethyl-2-ethylbenzene	1758-88-9						
	1,2,3-Trimethylbenzene	526-73-8						
	1,2,4-Trimethylbenzene	95-63-6						
	1,3,5-Trimethylbenzene	95-63-6						
	Indan	496-11-7						
	1,2-Diethylbenzene	135-01-3						
	1,3-Diethylbenzene	141-93-5						
	1,4-Diethylbenzene	105-05-5						
	1-Methyl-2-n-Propylbenzene							
	1-Methyl-3-n-Propylbenzene							
	1-Methyl-4-n-Propylbenzene							
	1-Methyl-2-i-Propylbenzene							
	1-Methyl-3-i-Propylbenzene							
	1,2,4,5-Tetramethylbenzene	95-93-2						
	n-Pent-Benzene							
	Styrene	100-42-5		PTR-MS		X		



**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: H695SW						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Ethene*	0.571	0.360	BDL	BDL	BDL	NM
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1228 ± .0012	0.0739 ± .0057	0.0041 ± .0018	0.0009 ± .0009	0.0015 ± .0008	NM
Toluene	0.0582 ± .0033	0.0376 ± .0065	0.0026 ± .0009	0.0045 ± .0006	0.0033 ± .0023	NM
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0270 ± .0002	0.0159 ± .0007	0.0028 ± .0018	0.0018 ± .0004	0.0019 ± .0004	NM

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: II695SW		Engine Location: Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Semivolatiles</b>							
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling			
	Acenaphthene	83-32-9					
	Fluorene	86-73-7					
	Phenanthrene	85-01-8					
	Anthracene	120-12-7					
	Fluoranthene	206-44-0					
	Pyrene	129-00-0					
	Benzo(a)pyrene	50-32-8					
	Indeno[1,2,3-cd]pyrene	193-39-5					
	Dibenz[a,h]anthracene	53-70-3					
	Benzo[ghi]perylene	191-24-2					
	Hexatriacontane	630-06-8					
	Triacotane	638-68-6					
	Octacosane	630-02-4					
	Hexacosane	630-01-3					
	Tetracosane	646-31-1					
	Docosane	629-92-0					
	Eicosane	112-95-8					
	Nonadecane	629-92-5					
	Octadecane	593-46-3					
	Hexadecane	544-76-3					
	Tetradecane	629-59-4					
	Naphthalene	91-20-3		PTR-MS		X	
	Benz(a)anthracene	56-55-3					
	Chrysene	218-01-9					
	Benzo(b)fluoranthene	205-99-2					
	Benzo(k)fluoranthene	207-08-9					
	Dodecane	112-40-3					
<b>Carbonyls</b>							
	Formaldehyde			(DNPH Sampling) TILDAS		X	
	Acetaldehyde			PTR-MS		X	
	Acetone	67-64-1					
	Acrolein	107-02-8		TILDAS			
	Propion-aldehyde	123-38-6					
	Crotonaldehyde	4170-30-3					
	MEK	78-93-3					
	Methacrolein	78-85-3					
	Butyraldehyde	123-72-8					
	Benzaldehyde	100-52-7					
	Valeraldehyde	110-62-3					
	Tolualdehyde						
	Hexaldehyde	66-25-1					
<b>Other Organics</b>							
	mz57			PTR-MS		X	
	mz59			PTR-MS		X	
	mz107			PTR-MS		X	
	MTBE	1634-04-4					

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: H695SW						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Acenaphthylene		NM		NM	NM	NM
Acenaphthene		NM		NM	NM	NM
Fluorene		NM		NM	NM	NM
Phenanthrene		NM		NM	NM	NM
Anthracene		NM		NM	NM	NM
Fluoranthene		NM		NM	NM	NM
Pyrene		NM		NM	NM	NM
Benzo(a)pyrene		NM		NM	NM	NM
Indeno[1,2,3-cd]pyrene		NM		NM	NM	NM
Dibenz[a,h]anthracene		NM		NM	NM	NM
Benzo[ghi]perylene		NM		NM	NM	NM
Hexatriacotane		NM		NM	NM	NM
Triacotane		NM		NM	NM	NM
Octacosane		NM		NM	NM	NM
Hexacosane		NM		NM	NM	NM
Tetracosane		NM		NM	NM	NM
Docosane		NM		NM	NM	NM
Eicosane		NM		NM	NM	NM
Nonadecane		NM		NM	NM	NM
Octadecane		NM		NM	NM	NM
Hexadecane		NM		NM	NM	NM
Tetradecane		NM		NM	NM	NM
Naphthalene	0.0298 ± .0020	0.0179 ± .0014	0.0053 ± .0025	0.0033 ± .0005	0.0034 ± .0014	NM
Benz(a)anthracene		NM		NM	NM	NM
Chrysene		NM		NM	NM	NM
Benzo(b)fluoranthene		NM		NM	NM	NM
Benzo(k)fluorantene		NM		NM	NM	NM
Dodecane		NM		NM	NM	NM
Formaldehyde	0.62 ± 0.03	0.41 ± 0.03	0.008 ± 0.005	0.005 ± 0.002	0.005 ± 0.003	NM
Acetaldehyde	0.30 ± 0.004	0.20 ± 0.017	0.01 ± 0.0005	0.009 ± 0.0004	0.008 ± 0.0005	NM
Acetone	NM	NM	NM	NM	NM	NM
Acrolein	NM	NM	NM	NM	NM	NM
Propion-aldehyde	NM	NM	NM	NM	NM	NM
Crotonaldehyde	NM	NM	NM	NM	NM	NM
MEK	NM	NM	NM	NM	NM	NM
Methacrolein	NM	NM	NM	NM	NM	NM
Butyraldehyde	NM	NM	NM	NM	NM	NM
Benzaldehyde	NM	NM	NM	NM	NM	NM
Valeraldehyde	NM	NM	NM	NM	NM	NM
Tolualdehyde	NM	NM	NM	NM	NM	NM
Hexaldehyde	NM	NM	NM	NM	NM	NM
mz57	0.3454 ± 0	0.2085 ± .0270	0.0325 ± 0	0 ± 0	0.0190 ± 0	0 ± 0
mz59	0.1267 ± .0054	0.0862 ± .0064	0.0053 ± 0	0.0067 ± .0014	0.0042 ± .0007	0 ± 0
mz107	0.1140 ± .0097	0.0718 ± .0042	0.0075 ± .0046	0.0034 ± .0002	0.0043 ± .0003	0 ± 0
MTBE	NM	NM	NM	NM	NM	NM

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N695SW Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Elemental Analysis</b>								
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)				
	Magnesium	7639-95-4	1.200					
	Beryllium	7440-41-7						
	Aluminum	7429-90-5	1.000					
	Silicon	7440-21-3	1.200					
	Phosphorous	7723-14-0	0.204					
	Sulfur	63705-05-5	0.204					
	Chlorine	7782-50-5	0.068					
	Potassium	744-09-5	0.017					
	Calcium	7440-70-2	0.017					
	Scandium	7440-20-2						
	Iron	7439-89-5	0.007					
	Titanium	7440-32-6	0.051					
	Vanadium	7440-62-2	0.020					
	Chromium	7440-47-3	0.017					
	Manganese	7439-96-5	0.009					
	Cobalt	7440-48-4	0.007					
	Nickel	7440-2-0	0.003					
	Copper	7440-50-8	0.003					
	Zinc	7440-66-6	0.003					
	Gallium	7440-55-3	0.425					
	Germanium	7440-38-2	0.017					
	Arsenic	7440-38-2	0.003					
	Selenium	7782-49-2	0.017					
	Rbidium		0.007					
	Strontium	7440-24-6	0.017					
	Yttrium		0.003					
	Niobium	7440-03-1						
	Molybdenum	7439-98-7	0.017					
	Palladium	7440-05-3	0.026					
	Silver	7440-22-4						
	Cadmium	7440-43-9	0.017					
	Indium	7440-74-6	0.017					
	Tin	7440-31-6	0.026					
	Antimony	7440-36-0	0.024					
	Cesium	7440-46-2						
	Barium	7440-39-3	0.170					
	Lanthanum	4639-91-0	0.425					
	Platinum	7440-06-4						
	Gold	7440-57-5						
	Mercury	7439-97-6						
	Lead	7439-92-1	0.051					
	Bismuth	7440-69-9						
	Uranium	7440-61-1						

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

<b>Aircraft Tail Number:</b>		<b>N695SW</b>					
<b>Engine Location:</b>		<b>Port</b>					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Hexavalent Chromium		NM		NM	NM	NM	
Magnesium		NM		NM	NM	NM	
Beryllium		NM		NM	NM	NM	
Aluminum		NM		NM	NM	NM	
Silicon		NM		NM	NM	NM	
Phosphorous		NM		NM	NM	NM	
Sulfur		NM		NM	NM	NM	
Chlorine		NM		NM	NM	NM	
Potassium		NM		NM	NM	NM	
Calcium		NM		NM	NM	NM	
Scandium		NM		NM	NM	NM	
Iron		NM		NM	NM	NM	
Titanium		NM		NM	NM	NM	
Vanadium		NM		NM	NM	NM	
Chromium		NM		NM	NM	NM	
Manganese		NM		NM	NM	NM	
Cobalt		NM		NM	NM	NM	
Nickel		NM		NM	NM	NM	
Copper		NM		NM	NM	NM	
Zinc		NM		NM	NM	NM	
Gallium		NM		NM	NM	NM	
Germanium		NM		NM	NM	NM	
Arsenic		NM		NM	NM	NM	
Selenium		NM		NM	NM	NM	
Rbodium		NM		NM	NM	NM	
Strontium		NM		NM	NM	NM	
Yttrium		NM		NM	NM	NM	
Niobium		NM		NM	NM	NM	
Molybdenum		NM		NM	NM	NM	
Palladium		NM		NM	NM	NM	
Silver		NM		NM	NM	NM	
Cadmium		NM		NM	NM	NM	
Indium		NM		NM	NM	NM	
Tin		NM		NM	NM	NM	
Antimony		NM		NM	NM	NM	
Cesium		NM		NM	NM	NM	
Barium		NM		NM	NM	NM	
Lanthanum		NM		NM	NM	NM	
Platinum		NM		NM	NM	NM	
Gold		NM		NM	NM	NM	
Mercury		NM		NM	NM	NM	
Lead		NM		NM	NM	NM	
Bismuth		NM		NM	NM	NM	
Uranium		NM		NM	NM	NM	

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number:		H695SW						
Engine Location:		Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Non-HC</b>								
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X		
	NO2	10102-44-0		TILDAS		X		
	NOX					X		
	HNO3	7697-37-2						
	HONO	7782-77-6						
	N2O	10024-97-2						
	CO	630-08-0		TILDAS		X		
	CO2	124-38-9				X		
	SO2	7446-09-5						
	SOX							
<b>Inorganic ions</b>	Sulfate	14808-79-8						
	Nitrate	7697-37-2						
NM - no measurement was made								
BDL - Below detection limit								
EI for CO2 determined by elemental analysis of fuel								
<b>Notes:</b>								
<b>UCR comments:</b>								
In the original text LODs were provided for all compounds and species measured on the high-flow side.								
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.								
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.								
UCR only made one measurement so uncertainty cannot be calculated.								
Analytical uncertainty for all measurement methods was provided in the original text.								

**Table I.5: PM data and speciation profiles for N695SW Port Engine (continued)**

Aircraft Tail Number: N695SW						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
NO	0.23	0.69	5.54	7.22	10.2	NM
NO2	2.30	2.21	0.979	0.905	0.999	NM
NOX	2.53	2.90	6.52	8.12	11.2	NM
HNO3	NM	NM	NM	NM	NM	NM
HONO	NM	NM	NM	NM	NM	NM
N2O	NM	NM	NM	NM	NM	NM
CO	19.6	16.8	3.26	1.80	1.04	NM
CO2	3160	3160	3160	3160	3160	3160
SO2	NM	NM	NM	NM	NM	NM
SOX	NM	NM	NM	NM	NM	NM
Sulfate	NM	NM	NM	NM	NM	NM
Nitrate	NM	NM	NM	NM	NM	NM
NM - no measurement was made						
BDL - Below detection limit						
EI for CO2 determined by elemental analysis of fuel						
<b>Notes:</b>						
<b>UCR comments:</b>						
In the original text LODs were provided for all compounds and species measured on the high-flow side.						
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.						
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty						
UCR only made one measurement so uncertainty cannot be calculated.						
Analytical uncertainty for all measurement methods was provided in the original text.						

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine**

Aircraft Tail Number: Engine Location:		N695SW Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>PM</b>							
	Dgeom (nm)		5	DMS500			X
	Sigma		1.05	DMS500			X
	DgeomM (nm)		5	DMS500			X
	Number(10e15/kg fuel)		0.02	DMS500			X
	Mass		1.0E-06	DMS500			X
	Mass			DMS500	X		
<b>EC</b>					X		
<b>OC</b>					X		
<b>Normal Alkanes</b>							
	Methane*	74-82-8					
	Ethane*	74-84-0					
	Propane*	74-98-6					
	Butane	106-97-8					
	Pentane	109-66-0					
	Hexane	110-54-3					
	Heptane	142-82-5					
	Octane	111-65-9					
	Nonane	111-84-2					
	Decane	124-18-5					
	Undecane	1120-21-4					
	Dodecane	112-40-3					
	Tridecane	629-50-5					
<b>Branched Alkanes</b>							
	2-Methylbutane	78-78-4					
	2,3-Dimethylbutane	79-29-8					
	2-Methylpentane	107-83-5					
	3-Methylpentane	96-14-0					
	2,3-Dimethylpentane	565-59-3					
	2,4-Dimethylpentane	108-08-7					
	3,3-Dimethylpentane	562-49-2					
	2-Methylhexane	598-76-4					
	3-Methylhexane	589-34-4					
	3-Ethylpentane	617-78-7					
	3,5-Dimethylheptane	926-82-9					
	2-Methyloctane	3221-61-2					
	3-Methyloctane	2216-33-3					
	2,4-Dimethyloctane						
<b>Cycloalkanes</b>							
	Cyclopentane	287-923					
	Methylcyclopentane	96-37-7					
	Cyclohexane	110-82-7					
	t-1,2-Dimethylcyclopentane	2452-99-5					
	c-1,3-Dimethylcyclopentane	2453-00-1					
	Methylcyclohexane	108-87-2					
	1c,2t,3-Trimethylcyclopentane						
	Ethylcyclohexane	1678-91-7					



**Table I.6: PM data and speciation profiles for N695SW Starboard Engine (continued)**

Aircraft Tail Number: H695SW		Engine Location: Starboard				
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Size Distribution Shape Parameters						
Dgeom (nm)	11.38 ± 0.14	12.98 ± 0.08	16.98 ± 0.20	19.07 ± 0.18	31.05 ± 0.23	38.54 ± 0.24
Sigma	1.54 ± 0.007	1.52 ± 0.005	1.71 ± 0.004	1.73 ± 0.005	1.63 ± 0.009	1.69 ± 0.01
DgeomM (nm)	29.9 ± 2.02	28.77 ± 0.24	39.94 ± 0.33	46.86 ± 0.16	61.67 ± 0.22	81.16 ± 0.43
Emission Indices (g/kg fuel)						
Number	2.70 ± 0.16	0.28 ± 0.01	1.53 ± 0.05	2.07 ± 0.04	2.00 ± 0.05	2.51 ± 0.049
Mass	0.007 ± 0.0003	0.003 ± 0.0002	0.014 ± 0.0004	0.04 ± 0.0005	0.092 ± 0.002	0.25 ± 0.0072
Mass	0.0102		0.0196		0.0804	0.2160
	0.0056		0.0135		0.0595	0.1708
	0.0080		0.0064		0.0157	0.0406
Methane*	NM		NM		NM	NM
Ethane*	NM		NM		NM	NM
Propane*	NM		NM		NM	NM
Butane	NM		NM		NM	NM
Pentane	NM		NM		NM	NM
Hexane	NM		NM		NM	NM
Heptane	NM		NM		NM	NM
Octane	NM		NM		NM	NM
Nonane	NM		NM		NM	NM
Decane	NM		NM		NM	NM
Undecane	NM		NM		NM	NM
Dodecane	NM		NM		NM	NM
Tridecane	NM		NM		NM	NM
2-Methylbutane	NM		NM		NM	NM
2,3-Dimethylbutane	NM		NM		NM	NM
2-Methylpentane	NM		NM		NM	NM
3-Methylpentane	NM		NM		NM	NM
2,3-Dimethylpentane	NM		NM		NM	NM
2,4-Dimethylpentane	NM		NM		NM	NM
3,3-Dimethylpentane	NM		NM		NM	NM
2-Methylhexane	NM		NM		NM	NM
3-Methylhexane	NM		NM		NM	NM
3-Ethylpentane	NM		NM		NM	NM
3,5-Dimethylheptane	NM		NM		NM	NM
2-Methyloctane	NM		NM		NM	NM
3-Methyloctane	NM		NM		NM	NM
2,4-Dimethyloctane	NM		NM		NM	NM
Cyclopentane	NM		NM		NM	NM
Methylcyclopentane	NM		NM		NM	NM
Cyclohexane	NM		NM		NM	NM
t-1,2-Dimethylcyclopentane	NM		NM		NM	NM
c-1,3-Dimethylcyclopentane	NM		NM		NM	NM
Methylcyclohexane	NM		NM		NM	NM
1c,2t,3-Trimethylcyclopentane	NM		NM		NM	NM
Ethylcyclohexane	NM		NM		NM	NM

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		H695SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Alkenes</b>								
	Ethene*	74-85-1		TILDAS				
	Propene*	115-07-1						
	1-Butene	106-98-9						
	c-2-Butene							
	t-2-Butene							
	2-Methylpropene	115-11-7						
	Pentene	25377-72-4						
	1-Hexene	592-41-6						
	3-Methyl-c-2-Pentene							
	3-Methyl-t-2-Pentene							
	4-Methyl-c-2-Pentene							
	4-Methyl-t-2-Pentene							
	1-Nonene	124-11-8						
	Propadiene	463-49-0						
	1,3-Butadiene	106-99-0						
	2-Methyl-1,3-Butadiene	78-79-5						
	Cyclopentadiene	542-92-7						
	Cyclohexene	110-83-8						
<b>Alkynes</b>								
	Ethyne*	74-86-2						
<b>Aromatic Hydrocarbons</b>								
	Benzene	71-43-2		PTR-MS		X		
	Toluene	108-88-3		PTR-MS		X		
	Ethylbenzene	100-41-4						
	o-Xylene	95-47-6						
	m&p-Xylene	63-68-3						
	1-Methyl-2-ethylbenzene	611-14-3						
	1-Methyl-3-ethylbenzene	620-14-4						
	1-Methyl-4-ethylbenzene	622-96-8						
	1,4-Dimethyl-2-ethylbenzene	1758-88-9						
	1,2,3-Trimethylbenzene	526-73-8						
	1,2,4-Trimethylbenzene	95-63-6						
	1,3,5-Trimethylbenzene	95-63-6						
	Indan	496-11-7						
	1,2-Diethylbenzene	135-01-3						
	1,3-Diethylbenzene	141-93-5						
	1,4-Diethylbenzene	105-05-5						
	1-Methyl-2-n-Propylbenzene							
	1-Methyl-3-n-Propylbenzene							
	1-Methyl-4-n-Propylbenzene							
	1-Methyl-2-i-Propylbenzene							
	1-Methyl-3-i-Propylbenzene							
	1,2,4,5-Tetramethylbenzene	95-93-2						
	n-Pent-Benzene							
	Styrene	100-42-5		PTR-MS		X		

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		<b>H695SW</b>				
<b>Engine Location:</b>		<b>Starboard</b>				
<b>Species</b>	<b>Power</b>					
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>
Ethene*	0.998	0.505	0.00509	BDL	BDL	BDL
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*						
Benzene	0.1984 ± .0008	0.1031 ± .0083	0.0035 ± .0003	0.0016 ± 0	0.0006 ± .0004	0.0009 ± 0
Toluene	0.1025 ± 0	0.0478 ± .0035	0.0027 ± .0005	0.0021 ± .0003	0.0019 ± 0	0.0010 ± 0
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0496 ± 0	0.0215 ± .0033	0.0021 ± .0020	0.0015 ± .0005	0.0013 ± .0002	0.0004 ± 0

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N695SW Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Semivolatiles</b>							
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling	X		
	Acenaphthene	83-32-9		XAD-PUF/Quartz sampling	X		
	Fluorene	86-73-7		XAD-PUF/Quartz sampling	X		
	Phenanthrene	85-01-8		XAD-PUF/Quartz sampling	X		
	Anthracene	120-12-7		XAD-PUF/Quartz sampling	X		
	Fluoranthene	206-44-0		XAD-PUF/Quartz sampling	X		
	Pyrene	129-00-0		XAD-PUF/Quartz sampling	X		
	Benzo(a)pyrene	50-32-8		XAD-PUF/Quartz sampling	X		
	Indeno[1,2,3-cd]pyrene	193-39-5		XAD-PUF/Quartz sampling	X		
	Dibenz[a,h]anthracene	53-70-3		XAD-PUF/Quartz sampling	X		
	Benzo[ghi]perylene	191-24-2		XAD-PUF/Quartz sampling	X		
	Hexatriacontane	630-06-8					
	Triacontane	638-68-6		XAD-PUF/Quartz sampling	X		
	Octacosane	630-02-4		XAD-PUF/Quartz sampling	X		
	Hexacosane	630-01-3		XAD-PUF/Quartz sampling	X		
	Tetracosane	646-31-1		XAD-PUF/Quartz sampling	X		
	Docosane	629-92-0		XAD-PUF/Quartz sampling	X		
	Eicosane	112-95-8		XAD-PUF/Quartz sampling	X		
	Nonadecane	629-92-5		XAD-PUF/Quartz sampling	X		
	Octadecane	593-46-3		XAD-PUF/Quartz sampling	X		
	Hexadecane	544-76-3		XAD-PUF/Quartz sampling	X		
	Tetradecane	629-59-4		XAD-PUF/Quartz sampling	X		
	Naphthalene	91-20-2		XAD-PUF/Quartz sampling	X		
	Naphthalene	91-20-3		PTR-MS		X	
	Benz(a)anthracene	56-55-3					
	Chrysene	218-01-9					
	Benzo(b)fluoranthene	205-99-2					
	Benzo(k)fluoranthene	207-08-9					
	Dodecane	112-40-3					
<b>Carbonyls</b>							
	Formaldehyde			TILDAS		X	
	Acetaldehyde			PTR-MS		X	
	Acetone	67-64-1					
	Acrolein	107-02-8		TILDAS			
	Propion-aldehyde	123-38-6					
	Crotonaldehyde	4170-30-3					
	MEK	78-93-3					
	Methacrolein	78-85-3					
	Butyraldehyde	123-72-8					
	Benzaldehyde	100-52-7					
	Valeraldehyde	110-62-3					
	Tolualdehyde						
	Hexaldehyde	66-25-1					
<b>Other Organics</b>							
	mz57			PTR-MS		X	
	mz59			PTR-MS		X	
	mz107			PTR-MS		X	
	MTBE	1634-04-4					

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

Aircraft Tail Number: H695SW		Engine Location: Starboard					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Acenaphthylene	4.12E-02			1.24E-03		2.59E-03	7.68E-04
Acenaphthene	3.74E-02			8.60E-03		2.02E-02	4.51E-03
Fluorene	1.11E-03			8.07E-06		4.74E-05	3.21E-05
Phenanthrene	8.58E-04			5.56E-05		1.44E-04	9.57E-05
Anthracene	1.22E-03			9.07E-06		2.29E-04	4.73E-04
Fluoranthene	1.31E-04			7.27E-05		5.10E-06	1.23E-03
Pyrene	1.52E-04			1.73E-04		1.64E-04	7.35E-04
Benzo(a)pyrene	2.26E-05			3.35E-06		5.34E-06	2.43E-05
Indeno[1,2,3-cd]pyrene	4.98547E-06			BDL		BDL	1.96E-05
Dibenz[a,h]anthracene	BDL			BDL		BDL	1.65E-05
Benzo[ghi]perylene	5.24029E-06			BDL		BDL	BDL
Hexatriacontane	NM			NM		NM	NM
Triacontane	4.89E-06			3.80E-06		4.92E-06	1.50E-05
Octacosane	7.96E-06			4.21E-06		1.11E-05	3.94E-05
Hexacosane	2.08E-05			3.55E-05		1.07E-04	3.77E-04
Tetracosane	3.09E-06			4.07E-06		4.32E-06	9.49E-06
Docosane	3.81E-06			4.60E-06		7.23E-06	1.89E-05
Eicosane	5.61E-06			4.86E-06		6.08E-06	2.16E-05
Nonadecane	4.64E-05			1.07E-05		1.21E-05	3.07E-05
Octadecane	2.69E-04			1.34E-05		7.09E-05	1.06E-04
Hexadecane	3.75E-04			1.54E-05		2.30E-05	5.43E-05
Tetradecane	3.89E-05			6.07E-05		1.22E-04	2.34E-01
Naphthalene	2.16E-02			2.18E-01		2.25E+00	1.06E+00
Naphthalene	0.0427 ± .0015	0.0222 ± .0031	0.0046 ± .0040	0.0027 ± .0005	0.0024 ± .0002		
Benz(a)anthracene	6.17E-06			3.71E-05		3.91E-05	9.35E-05
Chrysene	7.88E-05			3.76E-05		3.96E-05	1.63E-04
Benzo(b)fluoranthene	9.85E-06			8.62E-06		BDL	BDL
Benzo(k)fluorantene	2.05E-05			1.42E-05		9.85E-06	5.83E-05
Dodecane	1.55E-03			2.71E-04		5.71E-04	1.76E-03
Formaldehyde	0.98 ± 0.014	0.53 ± 0.039	0.012 ± 0.0008	0.002 ± 0.0032	(-)0.0003 ± 0.003	0.0005 ± 0	
Acetaldehyde	0.45 ± 0.018	0.26 ± 0.018	0.009 ± 0.004	0.0038 ± 0.0016	0.003 ± 0.0004	0.004 ± 0	
Acetone	NM	NM	NM	NM	NM	NM	
Acrolein	NM	NM	NM	NM	NM	NM	
Propion-aldehyde	NM	NM	NM	NM	NM	NM	
Crotonaldehyde	NM	NM	NM	NM	NM	NM	
MEK	NM	NM	NM	NM	NM	NM	
Methacrolein	NM	NM	NM	NM	NM	NM	
Butyraldehyde	NM	NM	NM	NM	NM	NM	
Benzaldehyde	NM	NM	NM	NM	NM	NM	
Valeraldehyde	NM	NM	NM	NM	NM	NM	
Tolualdehyde	NM	NM	NM	NM	NM	NM	
Hexaldehyde	NM	NM	NM	NM	NM	NM	
mz57	0.6500 ± 0	0.3004 ± .0133	0.0158 ± 0	0.0153 ± 0	0.0142 ± 0	0.0045 ± 0	
mz59	0.1854 ± .0024	0.1105 ± .0073	0.0050 ± .0019	0.0029 ± .0005	0.0023 ± .0006	0.0015 ± 0	
mz107	0.1731 ± .0059	0.0853 ± .0102	0.0069 ± .0047	0.0028 ± .0004	0.0026 ± .0001	0.0015 ± 0	
MTBE	NM	NM	NM	NM	NM	NM	

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N695SW Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Elemental Analysis</b>							
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)			
	Magnesium	7639-95-4	1.200		X		
	Beryllium	7440-41-7					
	Aluminum	7429-90-5	1.000		X		
	Silicon	7440-21-3	1.200		X		
	Phosphorous	7723-14-0	0.204		X		
	Sulfur	63705-05-5	0.204		X		
	Chlorine	7782-50-5	0.068		X		
	Potassium	744-09-5	0.017		X		
	Calcium	7440-70-2	0.017		X		
	Scandium	7440-20-2					
	Iron	7439-89-5	0.007		X		
	Titanium	7440-32-6	0.051		X		
	Vanadium	7440-62-2	0.020		X		
	Chromium	7440-47-3	0.017		X		
	Manganese	7439-96-5	0.009		X		
	Cobalt	7440-48-4	0.007		X		
	Nickel	7440-2-0	0.003		X		
	Copper	7440-50-8	0.003		X		
	Zinc	7440-66-6	0.003		X		
	Gallium	7440-55-3	0.425		X		
	Germanium	7440-38-2	0.017		X		
	Arsenic	7440-38-2	0.003		X		
	Selenium	7782-49-2	0.017		X		
	Rbidium		0.007		X		
	Strontium	7440-24-6	0.017		X		
	Yttrium		0.003		X		
	Niobium	7440-03-1					
	Molybdenum	7439-98-7	0.017		X		
	Palladium	7440-05-3	0.026		X		
	Silver	7440-22-4					
	Cadmium	7440-43-9	0.017		X		
	Indium	7440-74-6	0.017		X		
	Tin	7440-31-6	0.026		X		
	Antimony	7440-36-0	0.024		X		
	Cesium	7440-46-2					
	Barium	7440-39-3	0.170		X		
	Lanthanum	4639-91-0	0.425				
	Platinum	7440-06-4			X		
	Gold	7440-57-5					
	Mercury	7439-97-6					
	Lead	7439-92-1	0.051				
	Bismuth	7440-69-9			X		
	Uranium	7440-61-1					

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		<b>H695SW</b>					
<b>Engine Location:</b>		<b>Starboard</b>					
<b>Species</b>	<b>Power</b>						
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>	
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>	
Hexavalent Chromium	NM	NM	NM	NM	NM	NM	
Magnesium	5.56E-05		1.07E-04		BDL	6.18E-04	
Beryllium	NM		NM		NM	NM	
Aluminum	BDL		1.35E-04		2.79E-04	BDL	
Silicon	BDL		1.94E-04		BDL	BDL	
Phosphorous	BDL		BDL		BDL	BDL	
Sulfur	7.30E-05		1.89E-04		4.89E-04	8.01E-04	
Chlorine	BDL		BDL		BDL	BDL	
Potassium	BDL		BDL		BDL	BDL	
Calcium	2.58E-06		1.41E-05		2.51E-05	4.41E-05	
Scandium	NM		NM		NM	NM	
Iron	8.40E-06		3.39E-05		3.39E-05	2.57E-05	
Titanium	BDL		4.94E-06		BDL	BDL	
Vanadium	6.46E-07		BDL		1.25E-06	BDL	
Chromium	5.81E-06		3.24E-05		1.42E-04	1.43E-04	
Manganese	2.58E-06		8.46E-06		2.38E-05	4.04E-05	
Cobalt	BDL		7.05E-07		8.78E-06	3.68E-06	
Nickel	6.46E-07		2.82E-06		1.76E-05	2.21E-05	
Copper	BDL		2.12E-06		BDL	BDL	
Zinc	6.46E-07		2.47E-05		1.25E-06	4.41E-05	
Gallium	1.23E-05		4.94E-06		0.00E+00	2.57E-05	
Germanium	6.46E-07		4.23E-06		6.27E-06	1.84E-05	
Arsenic	BDL		BDL		BDL	BDL	
Selenium	BDL		BDL		BDL	BDL	
Rbidium	BDL		7.05E-07		BDL	BDL	
Strontium	BDL		BDL		BDL	BDL	
Yttrium	BDL		BDL		BDL	3.68E-06	
Niobium	NM		NM		NM	NM	
Molybdenum	1.29E-06		2.12E-06		6.27E-06	1.47E-05	
Palladium	BDL		7.05E-07		2.51E-06	1.10E-05	
Silver	NM		NM		NM	NM	
Cadmium	3.23E-06		BDL		3.76E-06	1.10E-05	
Indium	5.17E-06		9.17E-06		1.51E-05	2.94E-05	
Tin	1.94E-06		BDL		1.00E-05	3.68E-06	
Antimony	BDL		BDL		BDL	BDL	
Cesium	NM		NM		NM	NM	
Barium	7.11E-06		1.13E-05		2.26E-05	3.68E-06	
Lanthanum	NM		NM		NM	NM	
Platinum	BDL		BDL		BDL	BDL	
Gold	NM		NM		NM	NM	
Mercury	NM		NM		NM	NM	
Lead	NM		NM		NM	NM	
Bismuth	BDL		BDL		BDL	BDL	
Uranium	NM		NM		NM	NM	

**Table I.6: PM data and speciation profiles for N695SW Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N695SW Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Non-HC</b>						X		
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X		
	NO2	10102-44-0		TILDAS		X		
	NOX							
	HNO3	7697-37-2						
	HONO	7782-77-6						
	N2O	10024-97-2					X	
	CO	630-08-0		TILDAS		X		
	CO2	124-38-9						
	SO2	7446-09-5						
	SOX							
<b>Inorganic ions</b>	Sulfate	14808-79-8				X		
	Nitrate	7697-37-2						
NM - no measurement was made								
BDL - Below detection limit								
EI for CO2 determined by elemental analysis of fuel								
<b>Notes:</b>								
<b>UCR comments:</b>								
In the original text LODs were provided for all compounds and species measured on the high-flow side.								
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.								
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.								
UCR only made one measurement so uncertainty cannot be calculated.								
Analytical uncertainty for all measurement methods was provided in the original text.								





**Table I.7: PM data and speciation profiles for N429WN Port Engine**

Aircraft Tail Number: N429WN		Engine Location: Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
PM	Dgeom (nm)		5	DMS500			
	Sigma		1.05	DMS500			
	DgeomM (nm)		5	DMS500			
	Number(10e15/kg fuel)		0.02	DMS500			
	Mass		1.0E-06	DMS500			
	EC OC	Mass					
<b>Normal Alkanes</b>							
	Methane*	74-82-8					
	Ethane*	74-84-0					
	Propane*	74-98-6					
	Butane	106-97-8					
	Pentane	109-66-0					
	Hexane	110-54-3					
	Heptane	142-82-5					
	Octane	111-65-9					
	Nonane	111-84-2					
	Decane	124-18-5					
	Undecane	1120-21-4					
	Dodecane	112-40-3					
	Tridecane	629-50-5					
<b>Branched Alkanes</b>							
	2-Methylbutane	78-78-4					
	2,3-Dimethylbutane	79-29-8					
	2-Methylpentane	107-83-5					
	3-Methylpentane	96-14-0					
	2,3-Dimethylpentane	565-59-3					
	2,4-Dimethylpentane	108-08-7					
	3,3-Dimethylpentane	562-49-2					
	2-Methylhexane	598-76-4					
	3-Methylhexane	589-34-4					
	3-Ethylpentane	617-78-7					
	3,5-Dimethylheptane	926-82-9					
	2-Methyloctane	3221-61-2					
	3-Methyloctane	2216-33-3					
	2,4-Dimethyloctane						
<b>Cycloalkanes</b>							
	Cyclopentane	287-923					
	Methylcyclopentane	96-37-7					
	Cyclohexane	110-82-7					
	t-1,2-Dimethylcyclopentane	2452-99-5					
	c-1,3-Dimethylcyclopentane	2453-00-1					
	Methylcyclohexane	108-87-2					
	1c,2t,3-Trimethylcyclopentane						
	Ethylcyclohexane	1678-91-7					

Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)

Aircraft Tail Number: H429WN						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1	Mode 2	Mode 3	Mode 4		
Size Distribution Shape Parameters						
Dgeom (nm)	NM	NM	NM	NM	NM	NM
Sigma	NM	NM	NM	NM	NM	NM
DgeomM (nm)	NM	NM	NM	NM	NM	NM
Emission Indices (g/kg fuel)						
Number	NM	NM	NM	NM	NM	NM
Mass	NM	NM	NM	NM	NM	NM
		NM	NM	NM	NM	NM
		NM	NM	NM	NM	NM
Methane*		NM	NM	NM	NM	NM
Ethane*		NM	NM	NM	NM	NM
Propane*		NM	NM	NM	NM	NM
Butane		NM	NM	NM	NM	NM
Pentane		NM	NM	NM	NM	NM
Hexane		NM	NM	NM	NM	NM
Heptane		NM	NM	NM	NM	NM
Octane		NM	NM	NM	NM	NM
Nonane		NM	NM	NM	NM	NM
Decane		NM	NM	NM	NM	NM
Undecane		NM	NM	NM	NM	NM
Dodecane		NM	NM	NM	NM	NM
Tridecane		NM	NM	NM	NM	NM
2-Methylbutane		NM	NM	NM	NM	NM
2,3-Dimethylbutane		NM	NM	NM	NM	NM
2-Methylpentane		NM	NM	NM	NM	NM
3-Methylpentane		NM	NM	NM	NM	NM
2,3-Dimethylpentane		NM	NM	NM	NM	NM
2,4-Dimethylpentane		NM	NM	NM	NM	NM
3,3-Dimethylpentane		NM	NM	NM	NM	NM
2-Methylhexane		NM	NM	NM	NM	NM
3-Methylhexane		NM	NM	NM	NM	NM
3-Ethylpentane		NM	NM	NM	NM	NM
3,5-Dimethylheptane		NM	NM	NM	NM	NM
2-Methyloctane		NM	NM	NM	NM	NM
3-Methyloctane		NM	NM	NM	NM	NM
2,4-Dimethyloctane		NM	NM	NM	NM	NM
Cyclopentane		NM	NM	NM	NM	NM
Methylcyclopentane		NM	NM	NM	NM	NM
Cyclohexane		NM	NM	NM	NM	NM
t-1,2-Dimethylcyclopentane		NM	NM	NM	NM	NM
c-1,3-Dimethylcyclopentane		NM	NM	NM	NM	NM
Methylcyclohexane		NM	NM	NM	NM	NM
1c,2t,3-Trimethylcyclopentane		NM	NM	NM	NM	NM
Ethylcyclohexane		NM	NM	NM	NM	NM

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N429WN Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Alkenes</b>							
	Ethene*	74-85-1		TILDAS		X	
	Propene*	115-07-1					
	1-Butene	106-98-9					
	c-2-Butene						
	t-2-Butene						
	2-Methylpropene	115-11-7					
	Pentene	25377-72-4					
	1-Hexene	592-41-6					
	3-Methyl-c-2-Pentene						
	3-Methyl-t-2-Pentene						
	4-Methyl-c-2-Pentene						
	4-Methyl-t-2-Pentene						
	1-Nonene	124-11-8					
	Propadiene	463-49-0					
	1,3-Butadiene	106-99-0					
	2-Methyl-1,3-Butadiene	78-79-5					
	Cyclopentadiene	542-92-7					
	Cyclohexene	110-83-8					
<b>Alkynes</b>							
	Ethyne*	74-86-2					
<b>Aromatic Hydrocarbons</b>							
	Benzene	71-43-2		PTR-MS		X	
	Toluene	108-88-3		PTR-MS		X	
	Ethylbenzene	100-41-4					
	o-Xylene	95-47-6					
	m&p-Xylene	63-68-3					
	1-Methyl-2-ethylbenzene	611-14-3					
	1-Methyl-3-ethylbenzene	620-14-4					
	1-Methyl-4-ethylbenzene	622-96-8					
	1,4-Dimethyl-2-ethylbenzene	1758-88-9					
	1,2,3-Trimethylbenzene	526-73-8					
	1,2,4-Trimethylbenzene	95-63-6					
	1,3,5-Trimethylbenzene	95-63-6					
	Indan	496-11-7					
	1,2-Diethylbenzene	135-01-3					
	1,3-Diethylbenzene	141-93-5					
	1,4-Diethylbenzene	105-05-5					
	1-Methyl-2-n-Propylbenzene						
	1-Methyl-3-n-Propylbenzene						
	1-Methyl-4-n-Propylbenzene						
	1-Methyl-2-i-Propylbenzene						
	1-Methyl-3-i-Propylbenzene						
	1,2,4,5-Tetramethylbenzene	95-93-2					
	n-Pent-Benzene						
	Styrene	100-42-5		PTR-MS		X	

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

<b>Aircraft Tail Number:</b>		<b>H429WN</b>				
<b>Engine Location:</b>		<b>Port</b>				
<b>Species</b>	<b>Power</b>					
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>
Ethene*	0.590	0.0143	BDL	NM	NM	NM
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1098 ± 0	0.0454 ± 0	0.0044 ± 0	NM	NM	NM
Toluene	0.0578 ± 0	0.0334 ± 0	0.0030 ± 0	NM	NM	NM
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0290 ± 0	0.0124 ± 0	0.0016 ± 0	NM	NM	NM

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N429WN Port						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>Semivolatiles</b>								
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling				
	Acenaphthene	83-32-9						
	Fluorene	86-73-7						
	Phenanthrene	85-01-8						
	Anthracene	120-12-7						
	Fluoranthene	206-44-0						
	Pyrene	129-00-0						
	Benzo(a)pyrene	50-32-8						
	Indeno[1,2,3-cd]pyrene	193-39-5						
	Dibenz[a,h]anthracene	53-70-3						
	Benzo(ghi)perylene	191-24-2						
	Hexatriacontane	630-06-8						
	Triacontane	638-68-6						
	Octacosane	630-02-4						
	Hexacosane	630-01-3						
	Tetracosane	646-31-1						
	Docosane	629-92-0						
	Eicosane	112-95-8						
	Nonadecane	629-92-5						
	Octadecane	593-46-3						
	Hexadecane	544-76-3						
	Tetradecane	629-59-4						
	Naphthalene	91-20-3		PTR-MS		X		
	Benz(a)anthracene	56-55-3						
	Chrysene	218-01-9						
	Benzo(b)fluoranthene	205-99-2						
	Benzo(k)fluoranthene	207-08-9						
	Dodecane	112-40-3						
<b>Carbonyls</b>				(DNPH Sampling)				
	Formaldehyde			TILDAS		X		
	Acetaldehyde			PTR-MS		X		
	Acetone	67-64-1						
	Acrolein	107-02-8		TILDAS				
	Propion-aldehyde	123-38-6						
	Crotonaldehyde	4170-30-3						
	MEK	78-93-3						
	Methacrolein	78-85-3						
	Butyraldehyde	123-72-8						
	Benzaldehyde	100-52-7						
	Valeraldehyde	110-62-3						
	Tolualdehyde							
	Hexaldehyde	66-25-1						
<b>Other Organics</b>								
	mz57			PTR-MS		X		
	mz59			PTR-MS		X		
	mz107			PTR-MS		X		
	MTBE	1634-04-4						

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

<b>Aircraft Tail Number:</b>		<b>H429WN</b>				
<b>Engine Location:</b>		<b>Port</b>				
<b>Species</b>	<b>Power</b>					
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>
Acenaphthylene		NM		NM	NM	NM
Acenaphthene		NM		NM	NM	NM
Fluorene		NM		NM	NM	NM
Phenanthrene		NM		NM	NM	NM
Anthracene		NM		NM	NM	NM
Fluoranthene		NM		NM	NM	NM
Pyrene		NM		NM	NM	NM
Benzo(a)pyrene		NM		NM	NM	NM
Indeno[1,2,3-cd]pyrene		NM		NM	NM	NM
Dibenz[a,h]anthracene		NM		NM	NM	NM
Benzo[ghi]perylene		NM		NM	NM	NM
Hexatriacontane		NM		NM	NM	NM
Triacontane		NM		NM	NM	NM
Octacosane		NM		NM	NM	NM
Hexacosane		NM		NM	NM	NM
Tetracosane		NM		NM	NM	NM
Docosane		NM		NM	NM	NM
Eicosane		NM		NM	NM	NM
Nonadecane		NM		NM	NM	NM
Octadecane		NM		NM	NM	NM
Hexadecane		NM		NM	NM	NM
Tetradecane		NM		NM	NM	NM
Naphthalene	0.0479 ± 0	0.0193 ± 0	0.0040 ± 0	NM	NM	NM
Benz(a)anthracene		NM		NM	NM	NM
Chrysene		NM		NM	NM	NM
Benzo(b)fluoranthene		NM		NM	NM	NM
Benzo(k)fluorantene		NM		NM	NM	NM
Dodecane		NM		NM	NM	NM
Formaldehyde	0.68 ± 0	0.24 ± 0	0.004 ± 0	NM	NM	NM
Acetaldehyde	0.33 ± 0	0.13 ± 0	0.009 ± 0	NM	NM	NM
Acetone	NM	NM	NM	NM	NM	NM
Acrolein	NM	NM	NM	NM	NM	NM
Propion-aldehyde	NM	NM	NM	NM	NM	NM
Crotonaldehyde	NM	NM	NM	NM	NM	NM
MEK	NM	NM	NM	NM	NM	NM
Methacrolein	NM	NM	NM	NM	NM	NM
Butyraldehyde	NM	NM	NM	NM	NM	NM
Benzaldehyde	NM	NM	NM	NM	NM	NM
Valeraldehyde	NM	NM	NM	NM	NM	NM
Tolualdehyde	NM	NM	NM	NM	NM	NM
Hexaldehyde	NM	NM	NM	NM	NM	NM
	NM	NM	NM	NM	NM	NM
mz57	0 ± 0	0 ± 0	0.0906 ± 0	0 ± 0	0 ± 0	0 ± 0
mz59	0.1587 ± 0	0.0554 ± 0	0.0044 ± 0	0 ± 0	0 ± 0	0 ± 0
mz107	0.1128 ± 0	0.0527 ± 0	0.0040 ± 0	0 ± 0	0 ± 0	0 ± 0
MTBE	NM	NM	NM	NM	NM	NM

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		N429WN Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Elemental Analysis</b>							
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)			
	Magnesium	7639-95-4	1.200				
	Beryllium	7440-41-7					
	Aluminum	7429-90-5	1.000				
	Silicon	7440-21-3	1.200				
	Phosphorous	7723-14-0	0.204				
	Sulfur	63705-05-5	0.204				
	Chlorine	7782-50-5	0.068				
	Potassium	744-09-5	0.017				
	Calcium	7440-70-2	0.017				
	Scandium	7440-20-2					
	Iron	7439-89-5	0.007				
	Titanium	7440-32-6	0.051				
	Vanadium	7440-62-2	0.020				
	Chromium	7440-47-3	0.017				
	Manganese	7439-96-5	0.009				
	Cobalt	7440-48-4	0.007				
	Nickel	7440-2-0	0.003				
	Copper	7440-50-8	0.003				
	Zinc	7440-66-6	0.003				
	Gallium	7440-55-3	0.425				
	Germanium	7440-38-2	0.017				
	Arsenic	7440-38-2	0.003				
	Selenium	7782-49-2	0.017				
	Rbodium		0.007				
	Strontium	7440-24-6	0.017				
	Yttrium		0.003				
	Niobium	7440-03-1					
	Molybdenum	7439-98-7	0.017				
	Palladium	7440-05-3	0.026				
	Silver	7440-22-4					
	Cadmium	7440-43-9	0.017				
	Indium	7440-74-6	0.017				
	Tin	7440-31-6	0.026				
	Antimony	7440-36-0	0.024				
	Cesium	7440-46-2					
	Barium	7440-39-3	0.170				
	Lanthanum	4639-91-0	0.425				
	Platinum	7440-06-4					
	Gold	7440-57-5					
	Mercury	7439-97-6					
	Lead	7439-92-1	0.051				
	Bismuth	7440-69-9					
	Uranium	7440-61-1					



**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

<b>Aircraft Tail Number:</b>	<b>H429WH</b>					
<b>Engine Location:</b>	<b>Port</b>					
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Hexavalent Chromium		NM		NM	NM	NM
Magnesium		NM		NM	NM	NM
Beryllium		NM		NM	NM	NM
Aluminum		NM		NM	NM	NM
Silicon		NM		NM	NM	NM
Phosphorous		NM		NM	NM	NM
Sulfur		NM		NM	NM	NM
Chlorine		NM		NM	NM	NM
Potassium		NM		NM	NM	NM
Calcium		NM		NM	NM	NM
Scandium		NM		NM	NM	NM
Iron		NM		NM	NM	NM
Titanium		NM		NM	NM	NM
Vanadium		NM		NM	NM	NM
Chromium		NM		NM	NM	NM
Manganese		NM		NM	NM	NM
Cobalt		NM		NM	NM	NM
Nickel		NM		NM	NM	NM
Copper		NM		NM	NM	NM
Zinc		NM		NM	NM	NM
Gallium		NM		NM	NM	NM
Germanium		NM		NM	NM	NM
Arsenic		NM		NM	NM	NM
Selenium		NM		NM	NM	NM
Rbodium		NM		NM	NM	NM
Strontium		NM		NM	NM	NM
Yttrium		NM		NM	NM	NM
Niobium		NM		NM	NM	NM
Molybdenum		NM		NM	NM	NM
Palladium		NM		NM	NM	NM
Silver		NM		NM	NM	NM
Cadmium		NM		NM	NM	NM
Indium		NM		NM	NM	NM
Tin		NM		NM	NM	NM
Antimony		NM		NM	NM	NM
Cesium		NM		NM	NM	NM
Barium		NM		NM	NM	NM
Lanthanum		NM		NM	NM	NM
Platinum		NM		NM	NM	NM
Gold		NM		NM	NM	NM
Mercury		NM		NM	NM	NM
Lead		NM		NM	NM	NM
Bismuth		NM		NM	NM	NM
Uranium		NM		NM	NM	NM

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

Aircraft Tail Number: Engine Location:		H429WN Port					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Non-HC</b>							
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X	
	NO2	10102-44-0		TILDAS		X	
	NOX					X	
	HNO3	7697-37-2					
	HONO	7782-77-6					
	N2O	10024-97-2					
	CO	630-08-0		TILDAS		X	
	CO2	124-38-9				X	
	SO2	7446-09-5					
SOX							
<b>Inorganic ions</b>	Sulfate	14808-79-8					
	Nitrate	7697-37-2					
NM - no measurement was made							
BDL - Below detection limit							
EI for CO2 determined by elemental analysis of fuel							
<b>Notes:</b>							
<b>UCR comments:</b>							
In the original text LODs were provided for all compounds and species measured on the high-flow side.							
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.							
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.							
UCR only made one measurement so uncertainty cannot be calculated.							
Analytical uncertainty for all measurement methods was provided in the original text.							

**Table I.7: PM data and speciation profiles for N429WN Port Engine (continued)**

Aircraft Tail Number: H429WN						
Engine Location: Port						
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1	Mode 2	Mode 3	Mode 4		
NO	0.144	1.68	7.54	NM	NM	NM
NO2	2.64	1.83	0.751	NM	NM	NM
NOX	2.78	3.51	8.29	NM	NM	NM
HNO3	NM	NM	NM	NM	NM	NM
HONO	NM	NM	NM	NM	NM	NM
N2O	NM	NM	NM	NM	NM	NM
CO	25.3	15.8	1.35	NM	NM	NM
CO2	3160	3160	3160	3160	3160	3160
SO2	NM	NM	NM	NM	NM	NM
SOX	NM	NM	NM	NM	NM	NM
Sulfate	NM	NM	NM	NM	NM	NM
Nitrate	NM	NM	NM	NM	NM	NM
NM - no measurement was made BDL - Below detection limit EI for CO2 determined by elemental analysis of fuel						
<b>Notes:</b>						
<b>UCR comments:</b>						
In the original text LODs were provided for all compounds and species measured on the high-flow side. LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues. These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.						
UCR only made one measurement so uncertainty cannot be calculated. Analytical uncertainty for all measurement methods was provided in the original text.						

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine**

Aircraft Tail Number: Engine Location:		N429WN Starboard						
Category	Species	CAS	LOD	Method	Group			
					UCR	ARI	UMR	
<b>PM</b>								
	Dgeom (nm)		5	DMS500				X
	Sigma		1.05	DMS500				X
	DgeomM (nm)		5	DMS500				X
	Number(10e15/kg fuel)		0.02	DMS500				X
	Mass		1.0E-06	DMS500				X
	Mass			DMS500	X			
<b>EC</b>					X			
<b>OC</b>					X			
<b>Normal Alkanes</b>								
	Methane*	74-82-8						
	Ethane*	74-84-0						
	Propane*	74-98-6						
	Butane	106-97-8						
	Pentane	109-66-0						
	Hexane	110-54-3						
	Heptane	142-82-5						
	Octane	111-65-9						
	Nonane	111-84-2						
	Decane	124-18-5						
	Undecane	1120-21-4						
	Dodecane	112-40-3						
	Tridecane	629-50-5						
<b>Branched Alkanes</b>								
	2-Methylbutane	78-78-4						
	2,3-Dimethylbutane	79-29-8						
	2-Methylpentane	107-83-5						
	3-Methylpentane	96-14-0						
	2,3-Dimethylpentane	565-59-3						
	2,4-Dimethylpentane	108-08-7						
	3,3-Dimethylpentane	562-49-2						
	2-Methylhexane	598-76-4						
	3-Methylhexane	589-34-4						
	3-Ethylpentane	617-78-7						
	3,5-Dimethylheptane	926-82-9						
	2-Methyloctane	3221-61-2						
	3-Methyloctane	2216-33-3						
	2,4-Dimethyloctane							
<b>Cycloalkanes</b>								
	Cyclopentane	287-923						
	Methylcyclopentane	96-37-7						
	Cyclohexane	110-82-7						
	t-1,2-Dimethylcyclopentane	2452-99-5						
	c-1,3-Dimethylcyclopentane	2453-00-1						
	Methylcyclohexane	108-87-2						
	1c,2t,3-Trimethylcyclopentane							
	Ethylcyclohexane	1678-91-7						

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine (continued)**

Aircraft Tail Number: H429WH		Engine Location: Starboard					
Species	Power						
	4%	7%	30%	40%	65%	85%	
	Mode 1		Mode 2		Mode 3	Mode 4	
Size Distribution Shape Parameters							
Dgeom (nm)	13.65 ± 0.12	11.80 ± 0.18	18.72 ± 0.17	19.06 ± 0.08	27.12 ± 0.06	32.26 ± 0.25	
Sigma	1.44 ± 0.01	1.25 ± 0.02	1.53 ± 0.01	1.62 ± 0.003	1.81 ± 0.002	1.87 ± 0.01	
DgeomM (nm)	33.15 ± 0.43	33.71 ± 1.28	36.66 ± 0.38	37.83 ± 0.25	66.36 ± 0.19	81.0 ± 1.03	
Emission Indices (g/kg fuel)							
Number	0.15 ± 0.01	0.01 ± 0.001	0.06 ± 0.003	0.16 ± 0.004	0.87 ± 0.009	0.88 ± 0.024	
Mass	0.0007 ± 0.0001	DL	0.0008 ± 0.0001	0.0017 ± 0.0001	0.038 ± 0.0006	0.073 ± 0.004	
Mass	0.0017		0.0022		0.0395	0.0700	
	0.0008		0.0016		0.0338	0.0475	
	0.0032		0.0028		0.0059	0.0243	
Methane*	NM		NM		NM	NM	
Ethane*	NM		NM		NM	NM	
Propane*	NM		NM		NM	NM	
Butane	NM		NM		NM	NM	
Pentane	NM		NM		NM	NM	
Hexane	NM		NM		NM	NM	
Heptane	NM		NM		NM	NM	
Octane	NM		NM		NM	NM	
Nonane	NM		NM		NM	NM	
Decane	NM		NM		NM	NM	
Undecane	NM		NM		NM	NM	
Dodecane	NM		NM		NM	NM	
Tridecane	NM		NM		NM	NM	
2-Methylbutane	NM		NM		NM	NM	
2,3-Dimethylbutane	NM		NM		NM	NM	
2-Methylpentane	NM		NM		NM	NM	
3-Methylpentane	NM		NM		NM	NM	
2,3-Dimethylpentane	NM		NM		NM	NM	
2,4-Dimethylpentane	NM		NM		NM	NM	
3,3-Dimethylpentane	NM		NM		NM	NM	
2-Methylhexane	NM		NM		NM	NM	
3-Methylhexane	NM		NM		NM	NM	
3-Ethylpentane	NM		NM		NM	NM	
3,5-Dimethylheptane	NM		NM		NM	NM	
2-Methyloctane	NM		NM		NM	NM	
3-Methyloctane	NM		NM		NM	NM	
2,4-Dimethyloctane	NM		NM		NM	NM	
Cyclopentane	NM		NM		NM	NM	
Methylcyclopentane	NM		NM		NM	NM	
Cyclohexane	NM		NM		NM	NM	
t-1,2-Dimethylcyclopentane	NM		NM		NM	NM	
c-1,3-Dimethylcyclopentane	NM		NM		NM	NM	
Methylcyclohexane	NM		NM		NM	NM	
1c,2t,3-Trimethylcyclopentane	NM		NM		NM	NM	
Ethylcyclohexane	NM		NM		NM	NM	

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N429WN Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Alkenes</b>							
	Ethene*	74-85-1		TILDAS		X	
	Propene*	115-07-1					
	1-Butene	106-98-9					
	c-2-Butene						
	t-2-Butene						
	2-Methylpropene	115-11-7					
	Pentene	25377-72-4					
	1-Hexene	592-41-6					
	3-Methyl-c-2-Pentene						
	3-Methyl-t-2-Pentene						
	4-Methyl-c-2-Pentene						
	4-Methyl-t-2-Pentene						
	1-Nonene	124-11-8					
	Propadiene	463-49-0					
	1,3-Butadiene	106-99-0					
	2-Methyl-1,3-Butadiene	78-79-5					
	Cyclopentadiene	542-92-7					
	Cyclohexene	110-83-8					
<b>Alkynes</b>							
	Ethyne*	74-86-2					
<b>Aromatic Hydrocarbons</b>							
	Benzene	71-43-2		PTR-MS		X	
	Toluene	108-88-3		PTR-MS		X	
	Ethylbenzene	100-41-4					
	o-Xylene	95-47-6					
	m&p-Xylene	63-68-3					
	1-Methyl-2-ethylbenzene	611-14-3					
	1-Methyl-3-ethylbenzene	620-14-4					
	1-Methyl-4-ethylbenzene	622-96-8					
	1,4-Dimethyl-2-ethylbenzene	1758-88-9					
	1,2,3-Trimethylbenzene	526-73-8					
	1,2,4-Trimethylbenzene	95-63-6					
	1,3,5-Trimethylbenzene	95-63-6					
	Indan	496-11-7					
	1,2-Diethylbenzene	135-01-3					
	1,3-Diethylbenzene	141-93-5					
	1,4-Diethylbenzene	105-05-5					
	1-Methyl-2-n-Propylbenzene						
	1-Methyl-3-n-Propylbenzene						
	1-Methyl-4-n-Propylbenzene						
	1-Methyl-2-i-Propylbenzene						
	1-Methyl-3-i-Propylbenzene						
	1,2,4,5-Tetramethylbenzene	95-93-2					
	n-Pent-Benzene						
	Styrene	100-42-5		PTR-MS		X	

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number:		H429WN				
Engine Location:		Starboard				
Species	Power					
	4%	7%	30%	40%	65%	85%
	Mode 1		Mode 2		Mode 3	Mode 4
Ethene*	0.636	0.145	BDL	BDL	BDL	BDL
Propene*	NM	NM	NM	NM	NM	NM
1-Butene	NM	NM	NM	NM	NM	NM
c-2-Butene	NM	NM	NM	NM	NM	NM
t-2-Butene	NM	NM	NM	NM	NM	NM
2-Methylpropene	NM	NM	NM	NM	NM	NM
Pentene	NM	NM	NM	NM	NM	NM
1-Hexene	NM	NM	NM	NM	NM	NM
3-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
3-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-c-2-Pentene	NM	NM	NM	NM	NM	NM
4-Methyl-t-2-Pentene	NM	NM	NM	NM	NM	NM
1-Nonene	NM	NM	NM	NM	NM	NM
Propadiene	NM	NM	NM	NM	NM	NM
1,3-Butadiene	NM	NM	NM	NM	NM	NM
2-Methyl-1,3-Butadiene	NM	NM	NM	NM	NM	NM
Cyclopentadiene	NM	NM	NM	NM	NM	NM
Cyclohexene	NM	NM	NM	NM	NM	NM
Ethyne*	NM	NM	NM	NM	NM	NM
Benzene	0.1282 ± .0029	0.048 ± .0093	0.0012 ± .0005	0.0008 ± .0002	0.0013 ± .0008	0.0011 ± 0
Toluene	0.0620 ± .0063	0.0228 ± .0057	0.0008 ± .0004	0.0012 ± .0007	0.0012 ± .0005	0.0006 ± 0
Ethylbenzene	NM	NM	NM	NM	NM	NM
o-Xylene	NM	NM	NM	NM	NM	NM
m&p-Xylene	NM	NM	NM	NM	NM	NM
1-Methyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-ethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-ethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Dimethyl-2-ethylbenzene	NM	NM	NM	NM	NM	NM
1,2,3-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,2,4-Trimethylbenzene	NM	NM	NM	NM	NM	NM
1,3,5-Trimethylbenzene	NM	NM	NM	NM	NM	NM
Indan	NM	NM	NM	NM	NM	NM
1,2-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,3-Diethylbenzene	NM	NM	NM	NM	NM	NM
1,4-Diethylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-4-n-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-2-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1-Methyl-3-i-Propylbenzene	NM	NM	NM	NM	NM	NM
1,2,4,5-Tetramethylbenzene	NM	NM	NM	NM	NM	NM
n-Pent-Benzene	NM	NM	NM	NM	NM	NM
Styrene	0.0278 ± .0033	0.0105 ± .0027	0.0005 ± .0004	0.0006 ± .0003	0.0005 ± .0001	0.0006 ± 0

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number: Engine Location:		N429WN Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Semivolatiles</b>							
(alkanes and PAHs)	Acenaphthylene	208-96-8		XAD-PUF/Quartz sampling	X		
	Acenaphthene	83-32-9		XAD-PUF/Quartz sampling	X		
	Fluorene	86-73-7		XAD-PUF/Quartz sampling	X		
	Phenanthrene	85-01-8		XAD-PUF/Quartz sampling	X		
	Anthracene	120-12-7		XAD-PUF/Quartz sampling	X		
	Fluoranthene	206-44-0		XAD-PUF/Quartz sampling	X		
	Pyrene	129-00-0		XAD-PUF/Quartz sampling	X		
	Benzo(a)pyrene	50-32-8		XAD-PUF/Quartz sampling	X		
	Indeno[1,2,3-cd]pyrene	193-39-5		XAD-PUF/Quartz sampling	X		
	Dibenz[a,h]anthracene	53-70-3		XAD-PUF/Quartz sampling	X		
	Benzo[ghi]perylene	191-24-2		XAD-PUF/Quartz sampling	X		
	Hexatriacontane	630-06-8					
	Triaccontane	638-68-6		XAD-PUF/Quartz sampling	X		
	Octacosane	630-02-4		XAD-PUF/Quartz sampling	X		
	Hexacosane	630-01-3		XAD-PUF/Quartz sampling	X		
	Tetracosane	646-31-1		XAD-PUF/Quartz sampling	X		
	Docosane	629-92-0		XAD-PUF/Quartz sampling	X		
	Eicosane	112-95-8		XAD-PUF/Quartz sampling	X		
	Nonadecane	629-92-5		XAD-PUF/Quartz sampling	X		
	Octadecane	593-46-3		XAD-PUF/Quartz sampling	X		
	Hexadecane	544-76-3		XAD-PUF/Quartz sampling	X		
	Tetradecane	629-59-4		XAD-PUF/Quartz sampling	X		
	Naphthalene	91-20-2		XAD-PUF/Quartz sampling	X		
	Naphthalene	91-20-3		PTR-MS		X	
	Benz(a)anthracene	56-55-3		XAD-PUF/Quartz sampling	X		
	Chrysene	218-01-9		XAD-PUF/Quartz sampling	X		
	Benzo(b)fluoranthene	205-99-2		XAD-PUF/Quartz sampling	X		
	Benzo(k)fluoranthene	207-08-9		XAD-PUF/Quartz sampling	X		
	Dodecane	112-40-3		XAD-PUF/Quartz sampling	X		
<b>Carbonyls</b>							
	Formaldehyde			TILDAS		X	
	Acetaldehyde			PTR-MS		X	
	Acetone	67-64-1					
	Acrolein	107-02-8		TILDAS			
	Propion-aldehyde	123-38-6					
	Crotonaldehyde	4170-30-3					
	MEK	78-93-3					
	Methacrolein	78-85-3					
	Butyraldehyde	123-72-8					
	Benzaldehyde	100-52-7					
	Valeraldehyde	110-62-3					
	Tolualdehyde						
	Hexaldehyde	66-25-1					
<b>Other Organics</b>							
	mz57			PTR-MS		X	
	mz59			PTR-MS		X	
	mz107			PTR-MS		X	
	MTBE	1634-04-4					



**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number:		H429WN						
Engine Location:		Starboard						
Species	Power							
	4%		7%		30%		40%	
	Mode 1		Mode 2		Mode 3		Mode 4	
Acenaphthylene	1.56E-03				3.83E-02		3.73E-05	
Acenaphthene	2.38E-03				3.87E-01		2.64E-04	
Fluorene	6.68E-03				6.55E-05		2.78E-05	
Phenanthrene	7.80E-03				2.31E-04		8.68E-05	
Anthracene	1.07E-02				2.21E-04		1.51E-04	
Fluoranthene	6.34E-05				4.70E-05		2.92E-06	
Pyrene	7.37E-05				1.12E-04		9.38E-05	
Benzo(a)pyrene	1.10E-05				2.16E-06		3.06E-06	
Indeno[1,2,3-cd]pyrene	2.42E-06				BDL		BDL	
Dibenz[a,h]anthracene	BDL				BDL		BDL	
Benzo[ghi]perylene	2.55E-06				BDL		BDL	
Hexatriacontane	NM				NM		NM	
Triacotane	2.26E-06				1.47E-06		2.11E-06	
Octacosane	4.36E-06				1.59E-06		2.55E-06	
Hexacosane	1.31E-05				1.45E-05		6.14E-05	
Tetracosane	1.84E-06				1.86E-06		2.66E-06	
Docosane	1.52E-06				2.07E-06		4.20E-06	
Eicosane	2.35E-06				1.92E-06		4.34E-06	
Nonadecane	1.53E-04				6.87E-06		7.79E-06	
Octadecane	7.21E-06				3.31E-05		3.50E-05	
Hexadecane	1.19E-04				7.40E-06		1.09E-05	
Tetradecane	3.14E-06				3.41E-05		5.27E-05	
Naphthalene	7.53E-03				1.90E+00		6.26E-01	
Naphthalene	0.0369 ± .0028	0.012 ± .0008	0.0018 ± .0006	0.0016 ± .0006	0.0015 ± .0006	0.0014 ± 0		
Benz(a)anthracene	3.00E-06				2.40E-05		2.24E-05	
Chrysene	3.83E-05				2.43E-05		2.27E-05	
Benzo(b)fluoranthene	4.78E-06				5.57E-06		BDL	
Benzo(k)fluorantene	9.97E-06				9.15E-06		5.64E-06	
Dodecane	3.95E-04				1.82E-04		3.34E-04	
Formaldehyde	0.74 ± 0.017	0.28 ± 0.05	0.003 ± 0.0008	0.0017 ± 0.002	0.0007 ± 0.001	0.002 ± 0		
Acetaldehyde	0.35 ± 0.012	0.13 ± 0.02	0.003 ± 0.0008	0.003 ± 0.0004	0.003 ± 0.0004	0.004 ± 0		
Acetone	NM	NM	NM	NM	NM	NM		
Acrolein	NM	NM	NM	NM	NM	NM		
Propion-aldehyde	NM	NM	NM	NM	NM	NM		
Crotonaldehyde	NM	NM	NM	NM	NM	NM		
MEK	NM	NM	NM	NM	NM	NM		
Methacrolein	NM	NM	NM	NM	NM	NM		
Butyraldehyde	NM	NM	NM	NM	NM	NM		
Benzaldehyde	NM	NM	NM	NM	NM	NM		
Valeraldehyde	NM	NM	NM	NM	NM	NM		
Tolualdehyde	NM	NM	NM	NM	NM	NM		
Hexaldehyde	NM	NM	NM	NM	NM	NM		
mz57	0.4015 ± .0104	0.1433 ± .0455	0.010 ± .0058	0.0094 ± .0025	0.011 ± .0027	0.0092 ± 0		
mz59	0.1596 ± .0083	0.053 ± .0077	0.0017 ± .0004	0.0014 ± .0005	0.0017 ± .0005	0.0016 ± 0		
mz107	0.1191 ± .0087	0.0440 ± .0103	0.0016 ± .0006	0.0014 ± .0009	0.0018 ± .0009	0.0015 ± 0		
MTBE	NM	NM	NM	NM	NM	NM		

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number: H429WH		Engine Location: Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Elemental Analysis</b>							
	Hexavalent Chromium	18540-29-9		(IC-CCD, XRF or ICP-MS)			
	Magnesium	7639-95-4	1.200		X		
	Beryllium	7440-41-7					
	Aluminum	7429-90-5	1.000		X		
	Silicon	7440-21-3	1.200		X		
	Phosphorous	7723-14-0	0.204		X		
	Sulfur	63705-05-5	0.204		X		
	Chlorine	7782-50-5	0.068		X		
	Potassium	744-09-5	0.017		X		
	Calcium	7440-70-2	0.017		X		
	Scandium	7440-20-2			X		
	Iron	7439-89-5	0.007		X		
	Titanium	7440-32-6	0.051		X		
	Vanadium	7440-62-2	0.020		X		
	Chromium	7440-47-3	0.017		X		
	Manganese	7439-96-5	0.009		X		
	Cobalt	7440-48-4	0.007		X		
	Nickel	7440-2-0	0.003		X		
	Copper	7440-50-8	0.003		X		
	Zinc	7440-66-6	0.003		X		
	Gallium	7440-55-3	0.425		X		
	Germanium	7440-38-2	0.017		X		
	Arsenic	7440-38-2	0.003		X		
	Selenium	7782-49-2	0.017		X		
	Rbidium		0.007		X		
	Strontium	7440-24-6	0.017		X		
	Yttrium		0.003		X		
	Niobium	7440-03-1					
	Molybdenum	7439-98-7	0.017		X		
	Palladium	7440-05-3	0.026		X		
	Silver	7440-22-4			X		
	Cadmium	7440-43-9	0.017		X		
	Indium	7440-74-6	0.017		X		
	Tin	7440-31-6	0.026		X		
	Antimony	7440-36-0	0.024		X		
	Cesium	7440-46-2					
	Barium	7440-39-3	0.170		X		
	Lanthanum	4639-91-0	0.425		X		
	Platinum	7440-06-4					
	Gold	7440-57-5					
	Mercury	7439-97-6					
	Lead	7439-92-1	0.051		X		
	Bismuth	7440-69-9					
	Uranium	7440-61-1					

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number:		H429WN							
Engine Location:		Starboard							
Species	Power								
	4%	7%	30%	40%	65%	85%			
	Mode 1		Mode 2		Mode 3	Mode 4			
Hexavalent Chromium		NM		NM	NM	NM			
Magnesium		5.20E-05		BDL	1.11E-04	4.38E-04			
Beryllium		NM		NM	NM	NM			
Aluminum		3.45E-05		8.05E-05	8.26E-05	BDL			
Silicon		BDL		BDL		BDL			
Phosphorous		BDL		BDL		BDL			
Sulfur		BDL		BDL	1.56E-04	9.01E-05			
Chlorine		BDL		BDL		BDL			
Potassium		BDL		BDL		BDL			
Calcium		1.53E-06		BDL	BDL	BDL			
Scandium		BDL		BDL	BDL	BDL			
Iron		9.17E-06		3.87E-06	BDL	4.87E-06			
Titanium		1.53E-06		1.29E-06	BDL	BDL			
Vanadium		BDL		BDL	BDL	BDL			
Chromium		9.17E-07		BDL	BDL	7.30E-06			
Manganese		BDL		BDL	BDL	9.74E-06			
Cobalt		BDL		8.61E-07	6.83E-07	2.43E-06			
Nickel		3.06E-07		8.61E-07	BDL	2.43E-06			
Copper		BDL		4.31E-07	BDL	BDL			
Zinc		9.17E-07		4.31E-07	6.83E-07	2.43E-06			
Gallium		BDL		BDL	BDL	4.87E-06			
Germanium		BDL		1.72E-06	BDL	1.22E-05			
Arsenic		BDL		4.31E-07	6.83E-07	4.87E-06			
Selenium		BDL		BDL	BDL	BDL			
Rbidiium		BDL		BDL	BDL	BDL			
Strontium		BDL		BDL	BDL	BDL			
Ytrium		BDL		BDL	BDL	BDL			
Niobium		NM		NM	NM	NM			
Molybdenum		BDL		8.61E-07	6.83E-07	BDL			
Palladium		BDL		8.61E-07	6.83E-07	7.30E-06			
Silver		NM		NM	NM	NM			
Cadmium		1.53E-06		BDL	2.05E-06	1.46E-05			
Indium		2.44E-06		2.15E-06	6.83E-07	1.70E-05			
Tin		BDL		1.29E-06	BDL	9.74E-06			
Antimony		BDL		BDL	BDL	BDL			
Cesium		NM		NM	NM	NM			
Barium		BDL		BDL	1.09E-05	BDL			
Lanthanum		BDL		BDL	BDL	BDL			
Platinum		NM		NM	NM	NM			
Gold		NM		NM	NM	NM			
Mercury		NM		NM	NM	NM			
Lead		BDL		BDL	BDL	BDL			
Bismuth		NM		NM	NM	NM			
Uranium		NM		NM	NM	NM			

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

Aircraft Tail Number:		N429WN					
Engine Location:		Starboard					
Category	Species	CAS	LOD	Method	Group		
					UCR	ARI	UMR
<b>Non-HC</b>							
<b>Combustion Gases</b>	NO	10102-43-9		Chemiluminescence		X	
	NO2	10102-44-0		TILDAS		X	
	NOX					X	
	HNO3	7697-37-2					
	HONO	7782-77-6					
	N2O	10024-97-2					
	CO	630-08-0		TILDAS		X	
	CO2	124-38-9				X	
	SO2	7446-09-5					
	SOX						
<b>Inorganic ions</b>	Sulfate	14808-79-8			X		
	Nitrate	7697-37-2					
NM - no measurement was made							
BDL - Below detection limit							
EI for CO2 determined by elemental analysis of fuel							
<b>Notes:</b>							
<b>UCR comments:</b>							
In the original text LODs were provided for all compounds and species measured on the high-flow side.							
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.							
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.							
UCR only made one measurement so uncertainty cannot be calculated.							
Analytical uncertainty for all measurement methods was provided in the original text.							

**Table I.8: PM data and speciation profiles for N429WN Starboard Engine  
(continued)**

<b>Aircraft Tail Number:</b>		<b>H429WN</b>								
<b>Engine Location:</b>		<b>Starboard</b>								
<b>Species</b>	<b>Power</b>									
	<b>4%</b>	<b>7%</b>	<b>30%</b>	<b>40%</b>	<b>65%</b>	<b>85%</b>				
	<b>Mode 1</b>		<b>Mode 2</b>		<b>Mode 3</b>	<b>Mode 4</b>				
NO	0.182	1.91	8.48	10.1	14.8	16.7				
NO2	2.61	2.11	0.876	0.814	0.998	1.52				
NOX	2.79	4.02	9.36	10.9	15.8	18.2				
HNO3	NM	NM	NM	NM	NM	NM				
HONO	NM	NM	NM	NM	NM	NM				
N2O	NM	NM	NM	NM	NM	NM				
CO	18.5	12.6	1.38	0.838	0.443	0.607				
CO2	3160	3160	3160	3160	3160	3160				
SO2	NM	NM	NM	NM	NM	NM				
SOX	NM	NM	NM	NM	NM	NM				
Sulfate	0.00019248		0.000207342		0.000301223	0.004671114				
Nitrate	NM		NM		NM	NM				
NM - no measurement was made BDL - Below detection limit EI for CO2 determined by elemental analysis of fuel										
<b>Notes:</b>										
<b>UCR comments:</b>										
In the original text LODs were provided for all compounds and species measured on the high-flow side.										
LODs were not provided for C <sub>1</sub> to C <sub>12</sub> compounds where we know there are sampling issues.										
These issues were fully discussed in the test. Analytical uncertainties are different and will not reflect the sampling uncertainty.										
UCR only made one measurement so uncertainty cannot be calculated.										
Analytical uncertainty for all measurement methods was provided in the original text.										