

Proof of Concept: Examining Characteristics of Roadway Infrastructure in Various 3D Visualization Modes

Final Report
February 2015

Sponsored by

Iowa State University
Midwest Transportation Center
U.S. Department of Transportation
Office of the Assistant Secretary for
Research and Technology



IOWA STATE UNIVERSITY
Institute for Transportation

About MTC

The Midwest Transportation Center (MTC) is a regional University Transportation Center (UTC) sponsored by the U.S. Department of Transportation Office of the Assistant Secretary for Research and Technology (USDOT/OST-R). The mission of the UTC program is to advance U.S. technology and expertise in the many disciplines comprising transportation through the mechanisms of education, research, and technology transfer at university-based centers of excellence. Iowa State University, through its Institute for Transportation (InTrans), is the MTC lead institution.

About InTrans

The mission of the Institute for Transportation (InTrans) at Iowa State University is to develop and implement innovative methods, materials, and technologies for improving transportation efficiency, safety, reliability, and sustainability while improving the learning environment of students, faculty, and staff in transportation-related fields.

ISU Non-Discrimination Statement

Iowa State University does not discriminate on the basis of race, color, age, ethnicity, religion, national origin, pregnancy, sexual orientation, gender identity, genetic information, sex, marital status, disability, or status as a U.S. veteran. Inquiries regarding non-discrimination policies may be directed to Office of Equal Opportunity, Title IX/ADA Coordinator, and Affirmative Action Officer, 3350 Beardshear Hall, Ames, Iowa 50011, 515-294-7612, email eoffice@iastate.edu.

Notice

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. The opinions, findings and conclusions expressed in this publication are those of the authors and not necessarily those of the sponsors.

This document is disseminated under the sponsorship of the U.S. DOT UTC program in the interest of information exchange. The U.S. Government assumes no liability for the use of the information contained in this document. This report does not constitute a standard, specification, or regulation.

The U.S. Government does not endorse products or manufacturers. If trademarks or manufacturers' names appear in this report, it is only because they are considered essential to the objective of the document.

Quality Assurance Statement

The Federal Highway Administration (FHWA) provides high-quality information to serve Government, industry, and the public in a manner that promotes public understanding. Standards and policies are used to ensure and maximize the quality, objectivity, utility, and integrity of its information. The FHWA periodically reviews quality issues and adjusts its programs and processes to ensure continuous quality improvement.

Technical Report Documentation Page

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Proof of Concept: Examining Characteristics of Roadway Infrastructure in Various 3D Visualization Modes		5. Report Date February 2015	
		6. Performing Organization Code	
7. Author(s) Nir Keren		8. Performing Organization Report No.	
9. Performing Organization Name and Address Institute for Transportation Iowa State University 2711 South Loop Drive, Suite 4700 Ames, IA 50010-8664		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. DTRT13-G-UTC37	
12. Sponsoring Organization Name and Address Midwest Transportation Center U.S. Department of Transportation 2711 S. Loop Drive, Suite 4700 Office of the Assistant Secretary for Ames, IA 50010-8664 Research and Technology Iowa State University 1200 New Jersey Avenue, SE 2711 South Loop Drive, Suite 4700 Washington, DC 20590 Ames, IA 50010-8664		13. Type of Report and Period Covered Final Report	
		14. Sponsoring Agency Code	
15. Supplementary Notes Visit www.intrans.iastate.edu for color pdfs of this and other research reports.			
16. Abstract Utilizing enhanced visualization in transportation planning and design gained popularity in the last decade. This work aimed at demonstrating the concept of utilizing a highly immersive, virtual reality simulation engine for creating dynamic, interactive, full-scale, three-dimensional (3D) models of highway infrastructure. For this project, the highway infrastructure element chosen was a two-way, stop-controlled intersection (TWSCI). VirtuTrace, a virtual reality simulation engine developed by the principal investigator, was used to construct the dynamic 3D model of the TWSCI. The model was implemented in C6, which is Iowa State University's Cave Automatic Virtual Environment (CAVE). Representatives from the Institute of Transportation at Iowa State University, as well as representatives from the Iowa Department of Transportation, experienced the simulated TWSCI. The two teams identified verbally the significant potential that the approach introduces for the application of next-generation simulated environments to road design and safety evaluation.			
17. Key Words 3D modeling—highway infrastructure—virtual reality		18. Distribution Statement No restrictions.	
19. Security Classification (of this report) Unclassified.	20. Security Classification (of this page) Unclassified.	21. No. of Pages 17	22. Price NA

PROOF OF CONCEPT: EXAMINING CHARACTERISTICS OF ROADWAY INFRASTRUCTURE IN VARIOUS 3D VISUALIZATION MODES

**Final Report
February 2015**

Principal Investigator
Nir Keren, Associate Professor
Virtual Reality Application Center, Agricultural and Biosystems Engineering
Iowa State University

Author
Nir Keren

Sponsored by
Iowa State University,
Midwest Transportation Center. and
U.S. Department of Transportation
Office of the Assistant Secretary for Research and Technology

A report from
Institute for Transportation
Iowa State University
2711 South Loop Drive, Suite 4700
Ames, IA 50010-8664
Phone: 515-294-8103 / Fax: 515-294-0467
www.intrans.iastate.edu

TABLE OF CONTENTS

ACKNOWLEDGMENTS	vii
EXECUTIVE SUMMARY	ix
LITERATURE REVIEW	1
PROJECT SUMMARY	2
Simulation Features	3
IMPRESSIONS.....	5
NEXT STEPS	6
REFERENCES	7

LIST OF FIGURES

Figure 1. Two-way, stop-controlled intersection on a flat terrain (left) and on a hilly terrain (right)	2
Figure 2. Simulator view of intersection with narrow merging lane (left) and a wide merging lane (right).....	2
Figure 3. Arm-mounted wireless mini keyboard for dynamic simulation control	3
Figure 4. Ocean environment (left) and mountain environment (right)	4

ACKNOWLEDGMENTS

The author would like to thank the Midwest Transportation Center, the U.S. Department of Transportation Office of the Assistant Secretary for Research and Technology, and Iowa State University for sponsoring this research.

The author also wishes to pay further acknowledgements to Michael Pawlovich from the Iowa Department of Transportation for providing critical information and technical review as needed. Similarly, the author is thankful for Omar Smadi and his team at the Institute for Transportation for their efforts in brainstorming the potential research and development (R&D) endeavors with the tool developed to date through this work.

EXECUTIVE SUMMARY

Utilizing enhanced visualization in transportation planning and design gained popularity in the last decade (e.g., TRB 2007 - ABJ95 committee on Visualization in Transportation and TRB 2011 - AFH30 committee on Emerging Technology for Design and Construction).

This work aimed at demonstrating the concept of utilizing a highly immersive, virtual reality simulation engine for creating dynamic, interactive, full-scale, three-dimensional (3D) models of highway infrastructure. For this project, the highway infrastructure element chosen was a two-way, stop-controlled intersection (TWSCI).

VirtuTrace, a virtual reality simulation engine developed by the principal investigator, was used to construct the dynamic 3D model of the TWSCI. The model was implemented in the C6, which is Iowa State University's CAVE Automated Virtual Environment.

Representatives from the Institute of Transportation at Iowa State University, as well as representatives from the Iowa Department of Transportation, experienced the simulated TWSCI. The two teams identified verbally the significant potential that the approach introduces for the application of next-generation simulated environments to road design and safety evaluation.

LITERATURE REVIEW

High traffic volume in towns is a major concern from various perspectives. Significant resources have been invested to increase transportation system efficiency by diverting traffic to bypasses.

Cena et al. (2011) note that the construction of bypasses resulted in a significant decrease in crash rates. The newly constructed bypasses usually result in an increase in traffic volume. The construction of rural expressways most often requires the construction of two-way, stop-controlled (TWSC) intersections, where a two-lane roadway crosses a four-lane expressway. Maze et al. (2004) reported that TWSC intersections are particularly problematic where the traffic volume on the main line is moderate and there is high traffic volume on the minor road.

Thus, the accelerating growth of highway transportation increases the complexity of designing safe infrastructure. One significant factor in the design of highways, for example, is geometry that is consistent with driver expectations. Inconsistent geometry may lead to violations of driver expectations and reduce safety.

This factor becomes even more significant when vehicles are close to each other (Maze et al. 2004, Wooldridge et al. 2003). Another characteristic of intersections that affect traffic safety is lighting (e.g., Isebrands et al. 2004). Other factors such as the way roadway and intersection characteristics are communicated to drivers may have major impacts on traffic safety.

Researchers have utilized sophisticated methods to analyze traffic safety of intersections and the impact of intersection characteristics on traffic safety. These efforts resulted in models and guidelines that serve the highway administration well. However, the research and development efforts above are primarily based on crash data. Furthermore, when attempting to examine the combined effects of more than one or two intersection characteristics, the statistical procedures become much more complicated, data availability becomes limited, and, consequently, the effect size (measure of the strength of the relationship between the variables) becomes a challenge.

Utilizing enhanced visualization techniques in the design of traffic infrastructure is becoming more prevalent (e.g., Taylor and Moler 2010). Bailey and colleagues (2001) examined the effects of three visualization modes—two-dimensional (2D), three-dimensional (3D), and virtual reality (VR)—on public preferences pertaining to highway design. The result indicated that 3D was the preferred mode of visualization. However, the study did not address the impact of the visualization mode on understanding the shortcomings and advantages of design characteristics.

Furthermore, the study did not utilize a full-scale model, where the virtual intersection is the size of a real intersection. Bailey et al. (2001) also indicated that “further development of the VR package would allow the landscape to be populated with moving objects, such as cars, trucks, and people. The trajectories of these objects and their interactions can be governed by rules that simulate realistic motions.” This statement epitomizes the limited computational and visualization power available in the very early 2000s.

PROJECT SUMMARY

This report summarizes a proof-of-concept project that demonstrates the feasibility of using a fully immersive, full-scale, 3D, interactive simulation engine for evaluation of safety transportation infrastructures.

The development efforts for this proof of concept resulted in 3D models for TWSC intersections that utilized an advanced interactive virtual reality (VR) simulator called VirtuTrace. VirtuTrace can present the intersections on a computer monitor and on full-scale models in the C6 (a 10 foot by 10 foot by 10 foot room), which is Iowa State University's Cave Automatic Virtual Environment (CAVE). Figure 1 provides an example from a proof-of-concept effort.

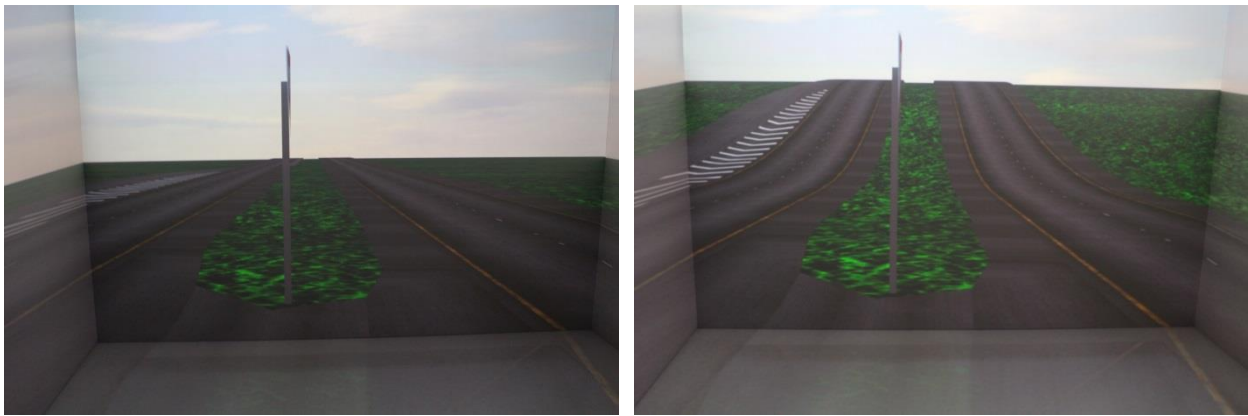


Figure 1. Two-way, stop-controlled intersection on a flat terrain (left) and on a hilly terrain (right)

The image on the left presents one side of a road around a TWSC intersection on a flat terrain, while the image on the right presents the same road, but on a hilly terrain. Similarly, Figure 2 shows a bird's eye view of an intersection with a narrow and a wide merging lane.



Figure 2. Simulator view of intersection with narrow merging lane (left) and a wide merging lane (right)

These and other terrain features can be modified real-time, in situ, through an arm-mounted wireless keyboard (see Figure 3).



Figure 3. Arm-mounted wireless mini keyboard for dynamic simulation control

Simulation Features

The following is a list of features that have been established in this proof of concept project:

- The simulator allows for moving in the virtual intersection by stepping in the desired direction in the C6. The farther the user is from the center of the C6, the faster the motion in the environments is.
- The simulator allows for viewing and exploring the scene from a bird's eye view with complete control of the bird's-eye view height.
- Changing terrain elevation (Figure 1) is controlled real-time through the mini keyboard.
- Changing acceleration lane (Figure 2) is controlled real-time through the mini keyboard.
- The world around the intersection can be changed in real time by the push of a button on the keyboard. Figure 4 demonstrates two examples.
- The presence of structures upstream or downstream from the intersection is controlled in real time through the mini keyboard.
- The angle of intersecting roads can be controlled in real time.

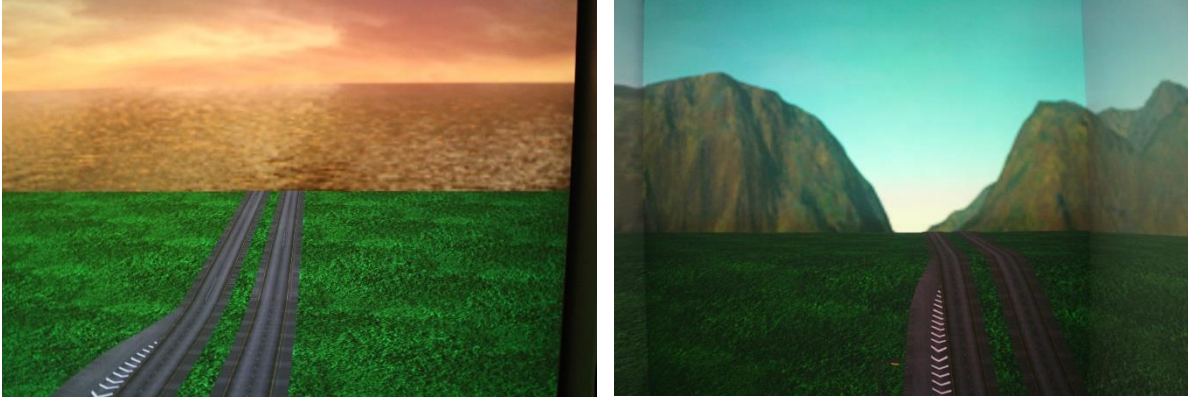


Figure 4. Ocean environment (left) and mountain environment (right)

IMPRESSIONS

The teams from Iowa State University's Institute for Transportation and the Iowa Department of Transportation experienced a demo of the simulation in full scale in the C6 as well as on a television (TV) monitor. Both teams expressed great appreciation for the simulators and the discussion continued as to the significant potential the simulator brings beyond the scope of this project.

NEXT STEPS

The next-phase proposal was submitted to the Midwest Transportation Center team. The proposal suggests the following:

- Extend the features of the simulator
- Develop modules for intersections with safety concerns and evaluate them with the simulator
- Establish focus groups for assessing the utility of the simulator for detecting safety deficiencies, comparing between full-scale and monitor-scale implementation of the simulator
- Work with instructors of highway design to integrate the simulator into their courses

REFERENCES

- Bailey, K., T. Grossardt and J. Brumm. 2001. Towards Structured Public Involvement in Highway Design: A Comparative Study of Visualization Methods and Preference Modeling using CAVE (Casewise Visual Evaluation). *Journal of Geographic Information and Decision Analysis*. 5: 1-15.
- Cena, L., Keren, N., Li, W. Carriquiry, A. L., Pawlovich, M. D., and Freeman, S. A. 2011. A Bayesian assessment of the effect of highway bypasses in Iowa on crashes and crash rate. *Journal of Safety Research*. 42(4): 241-252.
- Isebrands, H., Hallmark, S., Hans, Z., and McDonald, T. 2004. *Safety Impact of Street Lighting at Isolated Rural Intersections*. Center for Transportation Research and Education. Ames, IA. www.ctre.iastate.edu/reports/rural_lighting.pdf.
- Maze, T., Hawkins, N., and Burchett, G. 2004. *Rural Expressway Intersection Synthesis of Practice and Crash Analysis*. Center for Transportation Research and Education. Ames, IA. www.ctre.iastate.edu/reports/expressway.pdf.
- Taylor, M., and Moler, S. 2010. Visualization's next frontier. *Public Roads*, 73(4), www.fhwa.dot.gov/publications/publicroads/10janfeb/02.cfm. Last accessed February 2015.
- TRB. 2007. *Toward the Integrated Use of Google Earth within the Planning and Engineering Phases of Transportation System Development*. Research. Needs Statement by Committee ABJ95 on Visualization in Transportation. Transportation Research Board of the National Academies. Washington, DC.
- TRB. 2011. *Rapid Development of 3D BIM Elements from Scanning Technologies*. Research Needs Statement by Committee AFH30 on Emerging Technology for Design and Construction. Transportation Research Board. Washington, DC.
- Wooldridge, M. D., Fitzpatrick, K., Harwood, D. W., Potts, I. B., Elefteriadou, L., and Torbic, D. J. 2003. *Geometric Design Consistency on High-Speed Rural Two-Lane Roadways*. NCHRP Report 502. Transportation Research Board. Washington, DC.