

Highway Work Zone Capacity Estimation Using Field Data from Kansas

**Final Report
February 2015**

SWZDI 
Smart Work Zone Deployment Initiative

Sponsored by
Smart Work Zone Deployment Initiative
Federal Highway Administration
(TPF-5(081))

About SWZDI

Iowa, Kansas, Missouri, and Nebraska created the Midwest States Smart Work Zone Deployment Initiative (SWZDI) in 1999 and Wisconsin joined in 2001. Through this pooled-fund study, researchers investigate better ways of controlling traffic through work zones. Their goal is to improve the safety and efficiency of traffic operations and highway work.

ISU Non-Discrimination Statement

Iowa State University does not discriminate on the basis of race, color, age, ethnicity, religion, national origin, pregnancy, sexual orientation, gender identity, genetic information, sex, marital status, disability, or status as a U.S. veteran. Inquiries regarding non-discrimination policies may be directed to Office of Equal Opportunity, Title IX/ADA Coordinator, and Affirmative Action Officer, 3350 Beardshear Hall, Ames, Iowa 50011, 515-294-7612, email eooffice@iastate.edu.

Notice

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. The opinions, findings and conclusions expressed in this publication are those of the authors and not necessarily those of the sponsors.

This document is disseminated under the sponsorship of the U.S. DOT in the interest of information exchange. The sponsors assume no liability for the contents or use of the information contained in this document. This report does not constitute a standard, specification, or regulation.

The sponsors do not endorse products or manufacturers. Trademarks or manufacturers' names appear in this report only because they are considered essential to the objective of the document.

Quality Assurance Statement

The Federal Highway Administration (FHWA) provides high-quality information to serve Government, industry, and the public in a manner that promotes public understanding. Standards and policies are used to ensure and maximize the quality, objectivity, utility, and integrity of its information. The FHWA periodically reviews quality issues and adjusts its programs and processes to ensure continuous quality improvement.

Iowa DOT Statements

Federal and state laws prohibit employment and/or public accommodation discrimination on the basis of age, color, creed, disability, gender identity, national origin, pregnancy, race, religion, sex, sexual orientation or veteran's status. If you believe you have been discriminated against, please contact the Iowa Civil Rights Commission at 800-457-4416 or the Iowa Department of Transportation affirmative action officer. If you need accommodations because of a disability to access the Iowa Department of Transportation's services, contact the agency's affirmative action officer at 800-262-0003.

The preparation of this report was financed in part through funds provided by the Iowa Department of Transportation through its "Second Revised Agreement for the Management of Research Conducted by Iowa State University for the Iowa Department of Transportation" and its amendments.

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the Iowa Department of Transportation or the U.S. Department of Transportation Federal Highway Administration.

Technical Report Documentation Page

1. Report No. InTrans Project 06-277		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title Highway Work Zone Capacity Estimation Using Field Data from Kansas				5. Report Date February 2015	
				6. Performing Organization Code	
7. Author(s) Sunanda Dissanayake and Logan Ortiz				8. Performing Organization Report No.	
9. Performing Organization Name and Address Kansas State University Department of Civil Engineering 2118 Fiedler Hall Manhattan, KS 66506.				10. Work Unit No. (TR AIS)	
				11. Contract or Grant No.	
12. Sponsoring Organization Name and Address Midwest Smart Work Zone Deployment Initiative Iowa Department of Transportation 800 Lincoln Way Ames, Iowa 50010				13. Type of Report and Period Covered Final Report	
				14. Sponsoring Agency Code TPF-5(081)	
15. Supplementary Notes Visit www.intrans.iastate.edu/smartwz/ for color pdfs of this and other Midwest Smart Work Zone Deployment Initiative research reports.					
16. Abstract Although extensive research has been conducted on urban freeway capacity estimation methods, minimal research has been carried out for rural highway sections, especially sections within work zones. This study attempted to fill that void for rural highways in Kansas, by estimating capacity of rural highway work zones in Kansas. Six work zone locations were selected for data collection and further analysis. An average of six days' worth of field data was collected, from mid-October 2013 to late November 2013, at each of these work zone sites. Two capacity estimation methods were utilized, including the Maximum Observed 15-minute Flow Rate Method and the Platooning Method divided into 15-minute intervals. The Maximum Observed 15-minute Flow Rate Method provided an average capacity of 1469 passenger cars per hour per lane (pcphpl) with a standard deviation of 141 pcphpl, while the Platooning Method provided a maximum average capacity of 1195 pcphpl and a standard deviation of 28 pcphpl. Based on observed data and analysis carried out in this study, the suggested maximum capacity can be considered as 1500 pcphpl when designing work zones for rural highways in Kansas. This proposed standard value of rural highway work zone capacity could be utilized by engineers and planners so that they can effectively mitigate congestion at or near work zones that would have otherwise occurred due to construction/maintenance.					
17. Key Words capacity estimation—rural work zones—work-zone capacity				18. Distribution Statement No restrictions.	
19. Security Classification (of this report) Unclassified.		20. Security Classification (of this page) Unclassified.		21. No. of Pages 112	22. Price NA

HIGHWAY WORK ZONE CAPACITY ESTIMATION USING FIELD DATA FROM KANSAS

Final Report
February 2015

Principal Investigator
Sunanda Dissanayake
Department of Civil Engineering
Kansas State University

Authors
Sunanda Dissanayake and Logan Ortiz

Sponsored by the Midwest Smart Work Zone Deployment Initiative and
the Federal Highway Administration (FHWA) Pooled Fund Study TPF-5(081):
Iowa (lead state), Kansas, Missouri, Nebraska, Wisconsin

Preparation of this report was financed in part
through funds provided by the Iowa Department of Transportation
through its Research Management Agreement
with the Institute for Transportation
(InTrans Project 06-277)

TABLE OF CONTENTS

ACKNOWLEDGMENTS	ix
EXECUTIVE SUMMARY	xi
CHAPTER 1. INTRODUCTION	1
1.1 Background	1
1.2 Problem Statement	1
1.3 Objectives	3
1.4 Definitions, Terminology, and Acronyms	4
1.5 Outline of the Report	4
CHAPTER 2. LITERATURE REVIEW	5
2.1 Capacity Estimation	5
2.2 Capacity Estimation Analysis	6
CHAPTER 3. DATA COLLECTION AND METHODOLOGY	9
3.1 Rural Facility Types	12
3.2 Criteria for Site Selection	12
3.3 Work Zone Site-Selection Process	15
3.4 Equipment Used	19
3.5 Data Collection Sites and Setups	21
3.6 Maximum Observed 15-minute Flow Rate Method	26
3.7 Platooning Method	28
CHAPTER 4. DATA ANALYSIS AND RESULTS	31
4.1 Expected Capacity per Work Zone Site	31
4.2 Maximum Observed 15-minute Flow Rate Method Results	31
4.3 Platooning Method	55
4.4 Findings	73
4.5 Comparison of Two Methods	74
CHAPTER 5. SUMMARY AND CONCLUSIONS	75
5.1 Summary	75
5.2 Conclusions	75
REFERENCES	77
APPENDIX A. MAXIMUM OBSERVED 15-MINUTE FLOW RATE METHOD GRAPHS	79
APPENDIX B. PLATOONING METHOD GRAPHS	92
APPENDIX C. DEFINITIONS AND ACRONYMS	99

LIST OF FIGURES

Figure 1.1. Typical work zone setup and components for Kansas work zones	2
Figure 3.1. Standard traffic control setup for a 4-lane divided median 2-to-1 lane closure	10
Figure 3.2. Standard traffic control setup for a 4-lane divided median one roadway closed crossover	11
Figure 3.3. Aerial map of Kansas with data collection sites pinned	16
Figure 3.4. Zoomed-in aerial map of data collection sites	16
Figure 3.5. K-10 EB, K-18 EB, and K-18 H-H typical schematics	17
Figure 3.6. US-56 EB and WB typical schematic	18
Figure 3.7. TRAX I Plus traffic counter photos	21
Figure 3.8. K-10 EB site setup photos	22
Figure 3.9. K-18 EB site setup photos	23
Figure 3.10. K-18 H-H EB and WB site setup photos	24
Figure 3.11. US-56 EB site setup photos	25
Figure 3.12. US-56 WB site setup photos	26
Figure 4.1. K-10 EB site peak time period flow rate vs. mean speed graphs (continued)	35
Figure 4.2. K-18 EB site peak time period flow rate vs. mean speed graphs (continued)	39
Figure 4.3. K-18 H-H EB site peak time period flow rate vs. mean speed graphs (continued) ...	44
Figure 4.4. K-18 H-H WB site peak time period flow rate vs. mean speed graphs (continued) ...	46
Figure 4.5. US-56 EB site peak time period flow rate vs. mean speed graphs (continued)	50
Figure 4.6. US-56 WB site peak time period flow rate vs. mean speed graphs (continued)	54
Figure 4.7. K-10 EB site peak time period flow rate graph	57
Figure 4.8. K-18 EB site peak time period flow rate graph	60
Figure 4.9. K-18 H-H EB site peak time period flow rate graph	63
Figure 4.10. K-18 H-H WB site peak time period flow rate graph	66
Figure 4.11. US-56 EB site peak time period flow rate graph	69
Figure 4.12. US-56 WB site peak time period flow rate graph	72
Figure A.1. K-10 EB full flow rate vs. mean speed graphs (continued)	81
Figure A.2. K-18 EB full flow rate vs. mean speed graphs (continued)	83
Figure A.3. K-18 H-H EB full flow rate vs. mean speed graphs (continued)	85
Figure A.4. K-18 H-H WB full flow rate vs. mean speed graphs (continued)	87
Figure A.5. US-56 EB full flow rate vs. mean speed graphs (continued)	89
Figure A.6. US-56 WB full flow rate vs. mean speed graphs (continued)	91
Figure B.1. K-10 EB flow rate graph of the full observed data	93
Figure B.2. K-18 EB flow rate graph of the full observed data	94
Figure B.3. K-18 H-H EB flow rate graph of the full observed data	95
Figure B.4. K-18 WB flow rate graph of the full observed data	96
Figure B.5. US-56 EB flow rate graph of the full observed data	97
Figure B.6. US-56 WB flow rate graph of the full observed data	98

LIST OF TABLES

Table 1.1. Rural and urban crashes in Kansas for 2010.....	3
Table 1.2. Work zone crash summary in Kansas 2000–2010.....	3
Table 3.1. Geometric conditions at individual sites.....	14
Table 3.2. Geometric conditions at individual sites (continued)	14
Table 4.1. K-10 EB site for Maximum Observed 15-minute Flow Rate Method	33
Table 4.2. K-18 EB site for Maximum Observed 15-minute Flow Rate Method	37
Table 4.3. K-18 H-H EB site for Maximum Observed 15-minute Flow Rate Method	41
Table 4.4. K-18 H-H WB site for Maximum Observed 15-minute Flow Rate Method	42
Table 4.5. US-56 EB site for Maximum Observed 15-minute Flow Rate Method	48
Table 4.6. US-56 WB site for Maximum Observed 15-minute Flow Rate Method	52
Table 4.7. Results for K-10 EB site using Platooning Method.....	56
Table 4.8. Results for K-18 EB site using Platooning Method.....	59
Table 4.9. Results for K-18 H-H EB site using Platooning Method.....	62
Table 4.10. Results for K-18 H-H WB site using Platooning Method	65
Table 4.11. Results for US-56 EB site using Platooning Method	68
Table 4.12. Results for US-56 WB site using Platooning Method	71

ACKNOWLEDGMENTS

This research was conducted under the Midwest Smart Work Zone Deployment Initiative (SWZDI) and Federal Highway Administration (FHWA) Pooled Fund Study TPF-5(081), involving the following state departments of transportation:

- Iowa (lead state)
- Kansas
- Missouri
- Nebraska
- Wisconsin

The authors would like to thank the FHWA, the Iowa Department of Transportation, and the other pooled fund state partners for their financial support and technical assistance.

The authors would like to give special thanks to the members of the Kansas Department of Transportation who assisted with the data collection of this study. Those individuals include Kristina Erickson, Eric Nichols, Matt Mackeprang, Dale Hershberger, Howard Lubliner, and Duane Petty. They would like to thank Richard Cole and Brian Simpson at Jamar Technologies who helped mitigate issues encountered when using the traffic counters. Special thanks also go to the technical advisory committee members of this project for their guidance.

EXECUTIVE SUMMARY

Although extensive research has been conducted on urban freeway capacity estimation methods, minimal research has been carried out for rural highway sections, especially sections within work zones. This study attempted to fill that void for rural highways in Kansas, by estimating capacity of rural highway work zones in Kansas. Six work zone locations were selected for data collection and further analysis. An average of six days' worth of field data was collected, from mid-October 2013 to late November 2013, at each of these work zone sites. Two capacity estimation methods were utilized, including the Maximum Observed 15-minute Flow Rate Method and the Platooning Method divided into 15-minute intervals. The Maximum Observed 15-minute Flow Rate Method provided an average capacity of 1469 passenger cars per hour per lane (pcphpl) with a standard deviation of 141 pcphpl, while the Platooning Method provided a maximum average capacity of 1195 pcphpl and a standard deviation of 28 pcphpl. Based on observed data and analysis carried out in this study, the suggested maximum capacity can be considered as 1500 pcphpl when designing work zones for rural highways in Kansas. This proposed standard value of rural highway work zone capacity could be utilized by engineers and planners so that they can effectively mitigate congestion at or near work zones that would have otherwise occurred due to construction/maintenance.

CHAPTER 1. INTRODUCTION

1.1 Background

Highway transportation in the United States (U.S.) has been prevalent since the late 1700s. An effective highway system is necessary to efficiently transport goods, commerce, trade, and military supplies and personnel. Currently, the highway transportation system provides primary modes of travel for recreation, work, eating out, and socializing. As the highway system becomes more relevant to individuals' daily routines, upkeep and various regulations must be established for system maintenance and assurance of safety to individuals.

Since 2009 the American Society of Civil Engineers (ASCE) has issued an annual report card of America's infrastructure. The 2013 report card established grades for various forms of transportation in the U.S., including aviation, bridges, inland waterways, ports, rail, roads, and transit (ASCE 2013). No transportation grades were found to be better than a "C+." The grades and their corresponding equivalency are as follows: "A" equals excellent, "B" equals good, "C" equals mediocre, "D" equals poor, and "F" equals a failing condition. Reported grades pertaining to U.S. roads received a "D," meaning the roads are in poor condition. However, roads in the state of Kansas received a letter grade of "C+," indicating mediocre condition. Each statistic was found in ASCE's 2013 Report Card for America's Infrastructure (ASCE 2013).

Many of these grades are the result of system deterioration due to lack of maintenance. These grades can increase only by re-building or rehabilitating the highway system. The ASCE report card helped emphasize the importance of change in America's infrastructure. Road rehabilitation throughout America, however, requires the establishment of various types of work zones and potential long-term construction with which motorists must contend in their daily routines. These work zones could potentially cause more vehicle crashes, considerable travel delays, and inconveniences to motorists on the roadway.

Mitigation of these three conditions have been considered by transportation authorities and many studies have been conducted, resulting in various standards established by USDOT. These standards, which help motorists understand upcoming work zone situations, have been adopted nationally. One of the most widely used standards followed by transportation officials is the Highway Capacity Manual (HCM). HCM provides proven techniques for nationwide capacity estimation for various types of facilities. Methodologies for many types of road systems have been established, but few studies have incorporated work zones, specifically in rural areas. This current study is intended to provide relevant data and information in regards to rural highway work zones and then provide a proposed standard to be used for future planning and design.

1.2 Problem Statement

For many years, civil engineers have collected data and analyzed various highway facility types in order to gain a more thorough understanding of capacity. As a result, methods to estimate capacity were developed, but few of the methods pertained to work zones. This research focused

on data and analysis for rural work zone sites, including state highway work zones and local arterial work zone sites. Planners and engineers can use the results of this study to estimate the amount of congestion in terms of queue lengths and delay. The primary concern for motorists in a work zone is the additional time added to their daily commute. By mitigating congestion early in the design phase, a more efficient design with less severe crashes can be achieved. This research also provides necessary supplementary data required by the future versions of HCM to address capacity estimation on rural highway work zones. Few states have produced such research; therefore, sufficient information is lacking at the moment for the HCM to develop an accurate capacity estimation method for rural highway work zone sites nationwide.

A typical work zone site is illustrated in Figure 1.1, which consists of an advanced warning area, a transition area, an activity area, and a termination area, where the guidelines are provided in the Manual on Uniform Traffic Control Devices (MUTCD). Even with proper provisions, highway safety at work zones has become a relevant subject to engineers and planners.

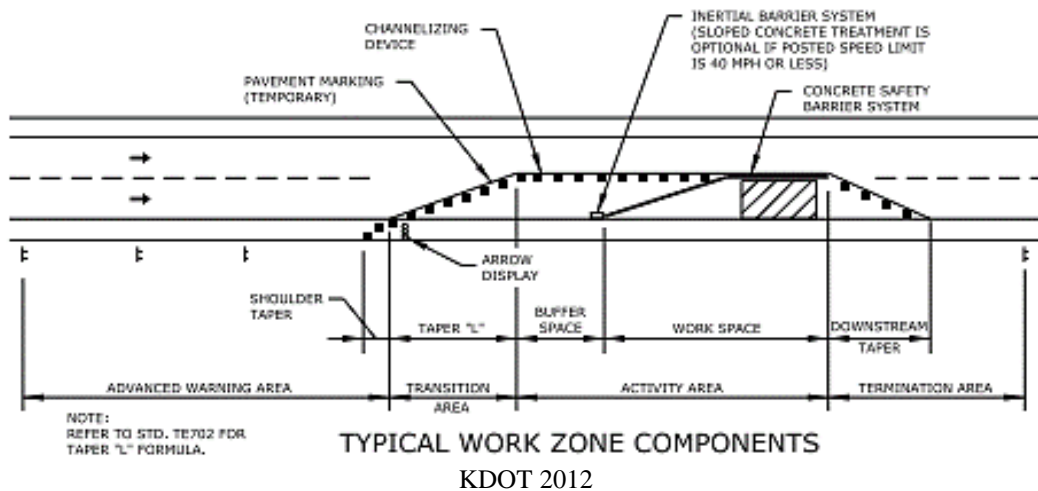


Figure 1.1. Typical work zone setup and components for Kansas work zones

According to the 2010 Kansas Traffic Accidents Facts Book, 69.7% of all fatal crashes in Kansas occurred on rural highways, as shown in Table 1.1 (KDOT 2010). As shown in Table 1.2, the number of crashes over the past five years from 2015 to 2010 in a work zone setting in Kansas has fluctuated. The number of work zone crashes in 2010 increased by 16.8% over the previous year (KDOT 2010). Information in these two tables demonstrates the significance of accurately determining a capacity estimation method for rural highway work zones in Kansas. With this information, engineers and city planners can properly account for motorists who utilize the section of road under construction and potentially re-route the excess traffic, so that the delays could be minimized and reduce the number of crashes that occur as a result of increased congestion. Reducing the amount of crashes in work zone sites and reducing the delay and congestion could possibly have significant economic impact on the society as well.

Table 1.1. Rural and urban crashes in Kansas for 2010

Roadway Type	Crashes	% of All	Fatal	Fatal
			Crashes	% of All
Rural Unknown	8	0.0%	1	0.3%
Rural Interstate	2,176	3.6%	16	4.3%
Rural Principal Arterial-Other	4,944	8.2%	78	20.7%
Rural Minor Arterial	3,842	6.3%	41	10.9%
Rural Major Collector	4,979	8.2%	57	15.2%
Rural Minor Collector	878	1.4%	12	3.2%
Rural Local Road	5,031	8.3%	57	15.2%
Rural Total	21,858	36.0%	262	69.7%
Urban Unknown	5	0.0%	0	0.0%
Urban Interstate	4,782	7.9%	19	5.1%
Urban Principal Arterial-Other Freeway	2,498	4.1%	15	4.0%
Urban Principal Arterial-Other	11,694	19.3%	34	9.0%
Urban Minor Arterial	8,658	14.3%	24	6.4%
Urban Major Collector	2,847	4.7%	7	1.9%
Urban Local Road	8,292	13.7%	15	4.0%
Urban* Total	38,776	64.0%	114	30.3%
Total	60,634	100.0%	376	100.0%

Source: KDOT 2010

Table 1.2. Work zone crash summary in Kansas 2000–2010

Year	Crashes					
	Total	Fatal	Injury	PDO	Deaths	Injuries
2000	1,430	9	363	1,058	9	552
2001	1,551	13	398	1,140	15	632
2002	1,637	16	393	1,228	19	592
2003	1,896	12	417	1,467	14	607
2004	2,165	20	505	1,640	26	756
2005	1,404	7	325	1,072	8	463
2006	1,862	14	452	1,396	15	659
2007	1,632	6	382	1,244	7	546
2008	1,694	6	410	1,278	7	610
2009	1,294	1	339	954	1	513
2010	1,556	4	418	1,134	4	593
Total	18,121	108	4,402	13,611	125	6,523

Source: KDOT 2010

1.3 Objectives

This research focused on highway work zone capacity estimation in Kansas and consisted of four objectives:

- To compare various capacity estimation methods.
- To identify the most suitable capacity estimation method for rural highway work zones in Kansas.
- To collect and investigate work zone field data on rural highways in Kansas
- To estimate the capacity of rural highway sections in Kansas using the identified methods and suggest a suitable maximum capacity value.

1.4 Definitions, Terminology, and Acronyms

The HCM does not specifically define work zone capacity, but it does define freeway capacity as the maximum sustained 15-minute rate of flow in passenger cars per hour per lane (pcphpl) able to be accommodated by a uniform freeway segment under prevailing traffic and roadway conditions in one direction (HCM 2010). Maximum sustained 15-minute flow rate is assumed to occur when congestion is present and all other situations are to be taken as the maximum observed 15-minute flow rate.

Other definitions pertinent to this study are listed in Appendix C and can be referenced when needed throughout this report. Definitions were obtained from (FHWA 2013) and (Garber and Hoel 2009). Any terms not found within the two references were defined based on this study and should not discredit a definition obtained from another location. The following acronyms should be referenced when warranted.

- KDOT Kansas Department of Transportation
- DOT Department of Transportation
- USDOT United States Department of Transportation
- SWZDI Smart Work Zone Deployment Initiative
- HCM Highway Capacity Manual
- FHWA Federal Highway Administration
- AASHTO American Association of State Highway and Transportation Officials
- ASCE American Society of Civil Engineering
- HPMS Highway Performance Monitoring System
- SHSP Strategic Highway Safety Plan
- HSIP Highway Safety Improvement Program
- FARS Fatality Analysis Reporting System
- MUTCD Manual on Uniform Traffic Control Devices

1.5 Outline of the Report

This report contains five chapters. Chapter 1 presents the introduction to this study. Chapter 2 provides a detailed literature review. Chapter 3 details data collection and methodology and Chapter 4 provides data analysis and results per site reviewed. Chapter 5 summarizes this study, and provides conclusions.

CHAPTER 2. LITERATURE REVIEW

This chapter summarizes past research and respective recommendations related to highway work zone capacity estimation methods.

2.1 Capacity Estimation

In past studies, upper and lower limits of capacity in a work zone have been estimated using three distinct methods. Ramezani (2011) used the first method, known as the Platooning Method, to find the upper limit of capacity in a work zone while counting all platooning vehicles in the vehicle stream. Results indicated that as the roadway operates at capacity, the upper observed capacity limit and lower observed capacity limit converge and hence become closer to actual roadway capacity (Ramezani 2011). The Platooning Method has two criteria: (1) if the headway is less than 4.0 seconds or (2) if the spacing is less than 250 ft. If neither of these criteria is met, the vehicle is considered free flowing.

In the other two methods, the 15-minute flow rate and the h-minus-n method, help establish the lower limit of the capacity in a work zone. The 15-minute Flow Rate Method in the study by Ramezani found roadway capacity by analyzing 15-minute moving intervals and then determining maximum 15-minute flow rate from the observed data. The h-minus-n method is used when large gaps are discovered in the traffic stream when determining capacity estimation of a work zone. However, this method does not produce accurate results in high speed limit sections. These methods are suggested to be used for 45 to 55 miles per hour (mph) speed limit zones.

In addition to the above methods, Adeli and Jiang (2003) used a computational approach in that every parameter important in obtaining capacity had a defined variable. Those variables were placed in an elaborate equation that calculated the estimated capacity. Overall, Adeli and Jiang (2003) considered seventeen factors and variables in this approach. The factors ranged from the percentage of trucks to driver compositions (Adeli and Jiang 2003). A statistical approach to calculating capacity is also possible using fuzzy logic concepts and neuro-computing concepts used in some research studies. Chosen variables for review must be carefully considered by the investigating engineer, and each variable must have a clear and concise definition or the results may be falsely interpreted. However, these approaches seem to be rather complex and impractical for utilization in this current study.

Dr. Tom V. Mathew from the Indian Institute of Technology Bombay stated that capacity is not dependent on demand (NPTEL 2006). According to the author, capacity is not just the number of observed vehicles on a roadway on any given day; instead, capacity is the amount of vehicles a roadway can carry on any day while accounting for geometric conditions and types of travelers on that roadway (NPTEL 2006). This research indicated that capacity depends on many factors, including time and position. Maximum flow rate can be found by observing the busiest 15-minute interval of peak hours. The study also reaffirms the fact that freeway capacity is not the maximum flow rate observed but an expected value for that particular section of freeway (NPTEL 2006).

In general, roadways can accommodate traffic fluctuations without the occurrence of a breakdown event; however, an increased chance of breakdown events occurs in work zone areas. A breakdown flow rate is defined as the flow rate observed immediately prior to a breakdown event (Lorenz and Elefteriadou 2000). A breakdown flow, which can occur at any flow rate, is not expected at the specific capacity of a roadway. However, many breakdown events occur at a specific section of a roadway, so these values must be compared to similar flow rates at the same location where a breakdown did not occur so that a meaningful comparison could be made. A breakdown flow rate can be found when three 20-second consecutive time intervals occur immediately following a speed drop below the work zone speed limit (Lorenz and Elefteriadou 2000).

When three analysts studied a rural highway in Iowa they found that when lane closures are present, capacity generally ranged from 1,400 passenger car equivalents to 1,600 passenger car equivalents (Maze et al. 2000). The analysts determined the maximum capacity of a rural highway with lane closure as the average volume of the ten highest volumes before and after queuing conditions.

Review of the literature mentioned above indicated that the Maximum Observed 15-minute Flow Rate Method and the Platooning Method could be utilized in this study to estimate rural highway work zone capacities.

2.2 Capacity Estimation Analysis

A study was conducted in Missouri to estimate the capacity of a freeway when work zones are present (Bham and Khazraee 2011). Authors mentioned that certain criteria must be met in order for a breakdown minute to be established within a 5-minute breakdown flow rate. The first criteria is that an average flow rate at or above the speed limit must be met for one full minute, preceded by five full 1-minute intervals of the average flow rate below the speed limit. The recovery stage is met when an average flow rate of the initial speed limit is sustained for five consecutive minutes. Then the process can be restarted. These two criteria are known as breakdown and recovery for the 5-minute Breakdown Flow Rate Method.

The next method utilized in the study, the maximum pre- and post- breakdown flow rates, may be applied after the Breakdown Flow Rate Method has been determined (Bham and Khazraee 2011). This method uses uncongested and congested conditions, also known as pre- and post-breakdown conditions of the breakdown flow rate. Each uncongested and congested event is identified before or after the 5-minute breakdown flow rate, respectively. All 1-minute intervals were classified as uncongested or congested, and any 5-minute period that could not be classified was marked as a queued period. Researchers identified three main components of capacity classification: maximum pre-breakdown flow, maximum queue discharge flow, and mean queue discharge flow. Once the three components were obtained, the data were used to establish whether or not a location was a bottleneck and, if such a condition existed, then the capacity was found.

Wayne A. Sarasua et al. estimated interstate highway capacities for short-term work zones in South Carolina (Sarasua et al. 2006). The study was conducted in two phases. The first phase monitored 23 work zone sites and the second phase monitored 12 additional sites, all within state limits of South Carolina. The ultimate goal of this project was to revise the policy of threshold limits of capacity for short-term interstate work zone lane closures. The threshold values were determined to be at the 85th percentile speed for motorists traversing the respective work zones. Phase I focused on methods to measure capacity, data collection methods, and factors affecting freeway work zone capacity. Phase II analyzed data collected in Phase I to identify relationships regarding speed, density, flow, and headway which were then used to prove that the revision of threshold limits was warranted. Throughout Phase II, Greenshields Model was initially used to discover a linear relationship between the speed and density of a work zone. However, a multi-Regime model was found to be better suited for representing the collected data. The study found that a capacity ranging between 1,200 and 1,400 pcphpl should be used to analyze work zones on interstates in South Carolina (Sarasua et al. 2006).

A study conducted in Illinois investigated 2 – to – 1 lane closures on interstate work zones to determine the capacity of that type of work zone. This study analyzed data from 11 collection sites in which as many parameters as possible were to remain the same. Three of the 11 sites were listed as short-term work zones while the remainder of the sites were listed as long-term work zones. This study also investigated vehicle headway and spacing and classified each vehicle as platooning or non-platooning. A vehicle was considered platooning if it had headway less than or equal to 4 sec or spacing less than or equal to 250 ft (Benekohal 2004). If neither parameter was met then the respective vehicle was considered free flowing and not considered when estimating capacity in this study.

After listing whether or not a vehicle was platooning, a methodology was established that allowed estimation of the capacity at a work zone. The capacity estimation used a model shown in Equation (1), followed by parameter definitions (Benekohal 2004).

$$C_{adj} = C_{Uo} * f_{HV} * PF \tag{1}$$

Where,

- C_{adj} = Adjusted capacity (vphpl)
- C_{Uo} = Capacity at operating speed U_o (pcphpl)
- f_{HV} = Heavy-vehicle adjustment factor
- PF= Platooning factor

This capacity estimation model was used together with other models and speed-curves from the HCM to create a nine-step process in order to determine capacity in respective work zones.

CORSIM software (version 5.1) was used by Heaslip in 2009 to establish work zone capacities. This study was based on analytical models provided in HCM 2000 version, and an adjusted capacity equation to account for basic parameters observed in the field. Three work zone configurations were used, including 2-to-1, 3-to-1, and 3-to-2 lane closures on freeways in Jacksonville, Fla. The adjusted capacity Equation (2) was:

$$C_{adj} = f_l * f_d * f_r * (C_{unadj} - V_R) \quad (2)$$

Where,

- C_{adj} = Adjusted capacity (vphpl)
- f_l = Adjustment for lighting conditions
- f_d = Adjustment for driver population
- f_r = Adjustment for rain
- C_{unadj} = Calculated unadjusted capacity (vphpl)
- V_R = Ramp volume (vph)

Each parameter was obtained from the data collected and then the capacity was estimated. When the average pre-breakdown flow rate was lowest, the average maximum discharge flow rate was at its highest. In addition, no difference was observed based on the lane closure configurations considered in the study (Heaslip 2009).

A study conducted in two major cities of Canada, Toronto and Ontario, investigated the definition of freeway capacity as a function of breakdown potential on the freeway (Lorenz and Elefteriadou 2001). The study analyzed 40 congested events which required nearly 20 days to collect data. This project, which utilized detector stations found on the 401 Freeway in Toronto and Ontario, Canada, recorded average vehicle speeds (km/hr) and vehicle counts for upstream and downstream conditions. The detector stations recorded data in 20 sec intervals for 8 to 24 hours, depending on the required sample period. Recovery periods, number of breakdowns, and breakdown flow were all analyzed from the data. Breakdown was deemed a non-deterministic event, meaning that breakdown probability increased as flow rate increased. Finally, a new capacity definition was proposed for the HCM which implies that a probability of obtaining a breakdown situation should be attached with the estimated capacity for a freeway site that is under review (Lorenz and Elefteriadou 2001).


CHAPTER 3. DATA COLLECTION AND METHODOLOGY

A review of the literature indicated that the Maximum Observed 15-minute Flow Rate Method and the Platooning Method could be utilized in this study to estimate rural highway work zone capacities. The Maximum Observed 15-minute Flow Rate Method can be viewed as the lower limit to capacity estimation and the Platooning Method can be viewed as the upper limit based on the previous studies conducted in this area (Ramezani 2010).

Three work zones or six directional locations were identified depending on work zone availability at the time of the project. At least six days' worth of data were collected on average between mid-October 2013 and late November 2013 at each of the sites. The three observation locations, K-18 in Riley County, K-10 in Johnson County, and US-56 in Johnson County, are considered rural state highways for the purposes of this study. Traffic counters were set up at locations where bottlenecks were likely to occur, which have previously provided the highest probability to result in capacity issues for the respective work zone.


Data collected for this study was obtained using Jamar Technologies Trax 1 Plus traffic counters. The traffic counters were strategically placed in work zone areas for which potential bottlenecks were identified. The standard work zone setup for Kansas is illustrated in Figure 1.1. Standards are controlled by KDOT to maintain uniformity across the state. Standard traffic control setups for each work zone situation used for this study are shown in Figures 3.1 and 3.2 for a 4-lane divided median 2-to-1 lane closure and for a 4-lane divided median one roadway closed crossover, respectively.

An estimation of capacity for each work zone was completed based on collected data using Maximum Observed 15-minute Flow Rate Method and Platooning Method, which will be explained in detail in the following sections. Capacities for each work zone site were compared to one another. Chapter 5 discusses the most suitable method for estimating capacities on rural highway work zones in Kansas. Chapter 5 also provides the base range to be used when estimating capacities on rural highway work zones in Kansas.

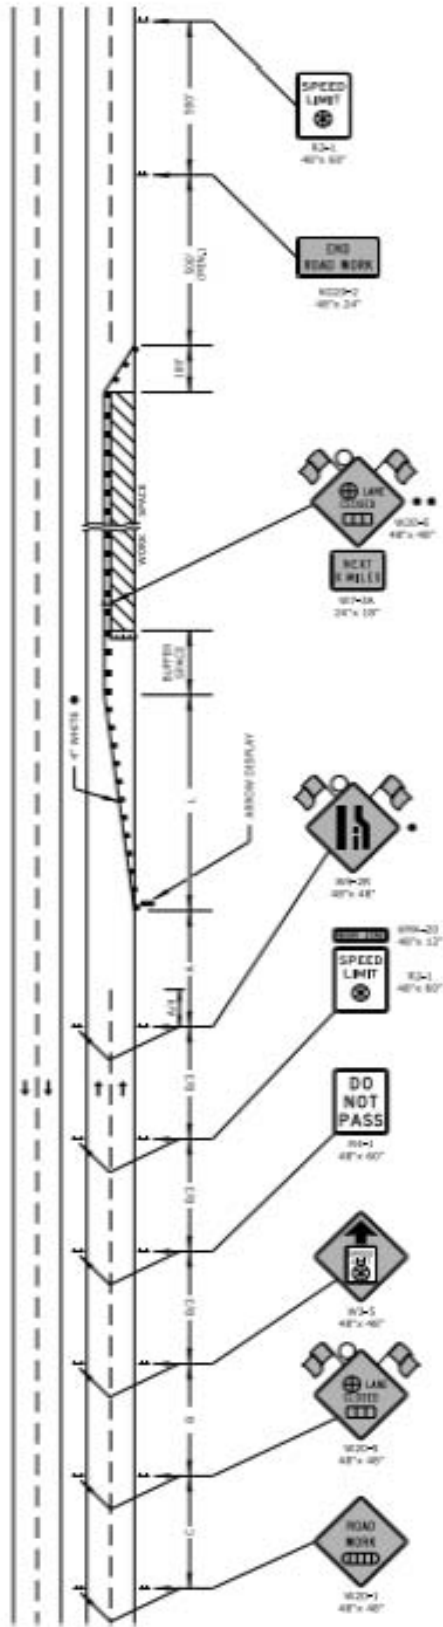

KDOT 2012

Figure 3.1. Standard traffic control setup for a 4-lane divided median 2-to-1 lane closure

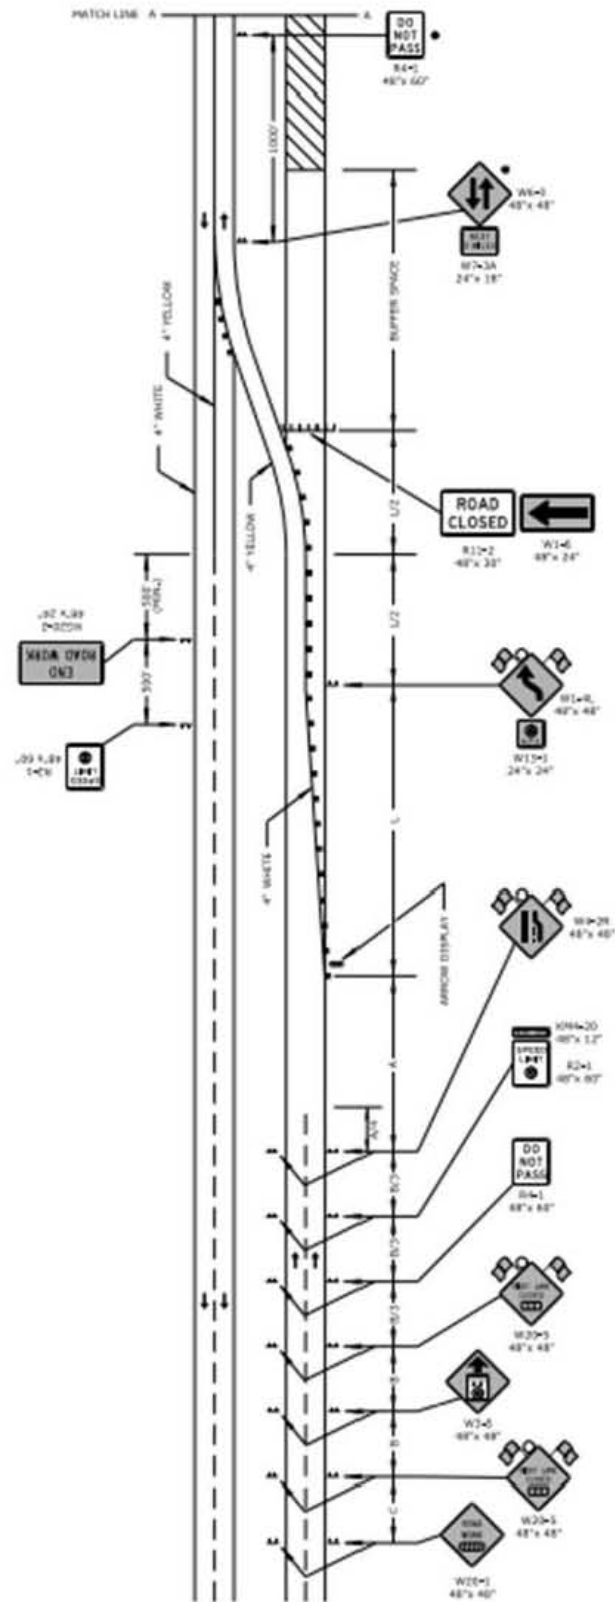

KDOT 2012

Figure 3.2. Standard traffic control setup for a 4-lane divided median one roadway closed crossover

3.1 Rural Facility Types

Rural facility type highways are located outside of urban cities and comprise the rural road system. Roadways on a rural highway system are classified into five types of roadways: principal arterial streets, minor arterial streets, major collectors, minor collectors, and local roads (Garber and Hoel 2009).

Principal arterial streets generally control traffic that circulates within an urban setting and smaller rural cities. An urban setting refers to locations with a population greater than 25,000 people. Similar to the urban principal arterial system, the rural principal arterial system is divided into freeways and other principal arterial streets. The difference between freeways and other principal arterial streets is that freeways have controlled access and no intersections at-grade.

Rural minor arterial systems connect cities, towns, or resorts with principal arterial streets. Minor arterial roads generally have a high speed limit, such as 45 to 65 mph, with limited entry points to the roadway. The rural collector system carries traffic within counties and generally guides traffic to arterial streets. The collector system is divided into two types of roads: major collector roads and minor collector roads. Motorists typically use the collector system in a rural setting as a short-term option to getting to the arterial system in the town. The last category for rural facility types is the local road system. These roads connect adjacent land with collector roads within the rural city.

3.2 Criteria for Site Selection

Work zone characteristics can be categorized in two categories: physical characteristics and geometric conditions. Both categories can cause significant changes in capacity estimation. Physical characteristics can change the way motorists perceive the upcoming work zone. Physical characteristics considered in this research include:

1. Duration of the project
2. Number of open lanes
3. Type of work activity in the work zone
4. Position of the closed lane(s)
5. Intensity of the work activity (low, medium, high)
6. Length of the lane closure
7. Traffic control devices getting utilized
8. Weather conditions

Geometric conditions of the roads in a work zone can also significantly change or impact capacity estimation. Geometric specifications to remain similar for this study include:

1. 2-to-1 (one directional) lane closure
2. Rural setting
3. Level terrain

4. Lane width(s)
5. Shoulder width(s)

By keeping geometric conditions similar, each data collection site can be compared with other sites. Physical characteristics and geometric characteristics of the sites utilized for data collection are listed in Table 3.1, 3.2, and 3.3 for each rural work zone site under review.

Table 3.1. Geometric conditions at individual sites

Site	Position		Lane Closure Length (ft)	Traversable Lane Width (ft)	Work Activity	Work Activity Intensity	Work Activity Duration (short or long term)	Weather Conditions
	Lanes Open	of Closed Lanes						
K-18 EB	1	Outside	15,600	11	Road Reconstruction	High	Long Term	Clear
K-18 H-H EB	1	Head-Head	15,600	11	Road Reconstruction	High	Long Term	Clear
K-18 H-H WB	1	Head-Head	15,600	11	Road Reconstruction	High	Long Term	Clear
K-10 EB	1	Outside	2,640	11	Bridge Repair	Medium	Long Term	Clear w/some rain
US-56 EB	1	Inside	3,400	12	Bridge Repair	Low	Long Term	Clear w/some rain
US-56 WB	1	Inside	3,000	12	Bridge Repair	Low	Long Term	Clear w/some rain

Table 3.2. Geometric conditions at individual sites (continued)

Site	Operation of Lanes in Work Zone		Traversable Lane Width (ft)	Outside Shoulder Width (ft)	Inside Shoulder Width (ft)	Median Divided or Undivided
	Setting					
K-18 EB	2-to-1	Rural	11	10	6	Divided
K-18 H-H EB	2-to-1	Rural	11	10	0	Non-Divided
K-18 H-H WB	2-to-1	Rural	11	6	0	Non-Divided
K-10 EB	2-to-1	Rural	11	10	6	Divided
US-56 EB	2-to-1	Rural	12	10	0	Non-Divided
US-56 WB	2-to-1	Rural	12	10	0	Non-Divided

3.3 Work Zone Site-Selection Process


Based on the geometric conditions that were to remain the same, the temporary traffic control engineer at KDOT assisted the research team with identifying work zone locations in Kansas. However, weather in Kansas limits a typical construction season from the beginning of March to early November. Consequently, weather was the major concern for data collection. Since data parameters to be collected were not established until early September, an efficient plan had to be developed that allowed for a maximum amount of data to be collected simultaneously while retaining accuracy. Three work zone locations were chosen to be analyzed. Those three sites included K-10 and Kill Creek Bridge, K-18 in between Manhattan and Ogden, and US-56 in Gardner. Each of these sites was in a rural setting and had similar geometric conditions.

Speed, volume, classification of vehicles, and gaps of traffic flow in work zones were collected at each site. Each variable was determined to be helpful in finding various breakdown effects in previous studies, typically leading to capacity estimation for the roadway.

Six rural data collection sites were observed on the three established work zones, as shown in Figures 3.3 and 3.4. The six sites for data collection included:

- K-18
 - One data collection site, at a head-to-head section of the work zone, collected data from eastbound traffic.
 - One data collection site, at a head-to-head section of the work zone, collected data from westbound traffic.
 - One data collection site, at the west end of the work zone, collected data at a 2-1 in the eastbound direction.
- K-10 and Kill Creek Bridge
 - One data collection site was at a 2-1 in the eastbound direction.
- US-56 and Gardner
 - One data collection site was at a 2-1 in the eastbound direction.
 - One data collection site was at a 2-1 in the westbound direction.

An average of six days of raw data was collected at each of the sites. Each site had standard highway work zone traffic control setup, as previously shown in Figures 3.1 and 3.2. In addition to the standards, Figures 3.5 and 3.6 provide an accurate schematic of each site setup. The traffic control devices used on each site was chosen based on the Manual on Uniform Traffic Control Devices (MUTCD). Because the traffic control setup was known, a similar setup of traffic counters was determined prior to arrival at the site, thus allowing for appropriate safety measures to be taken prior to entering the work zone.

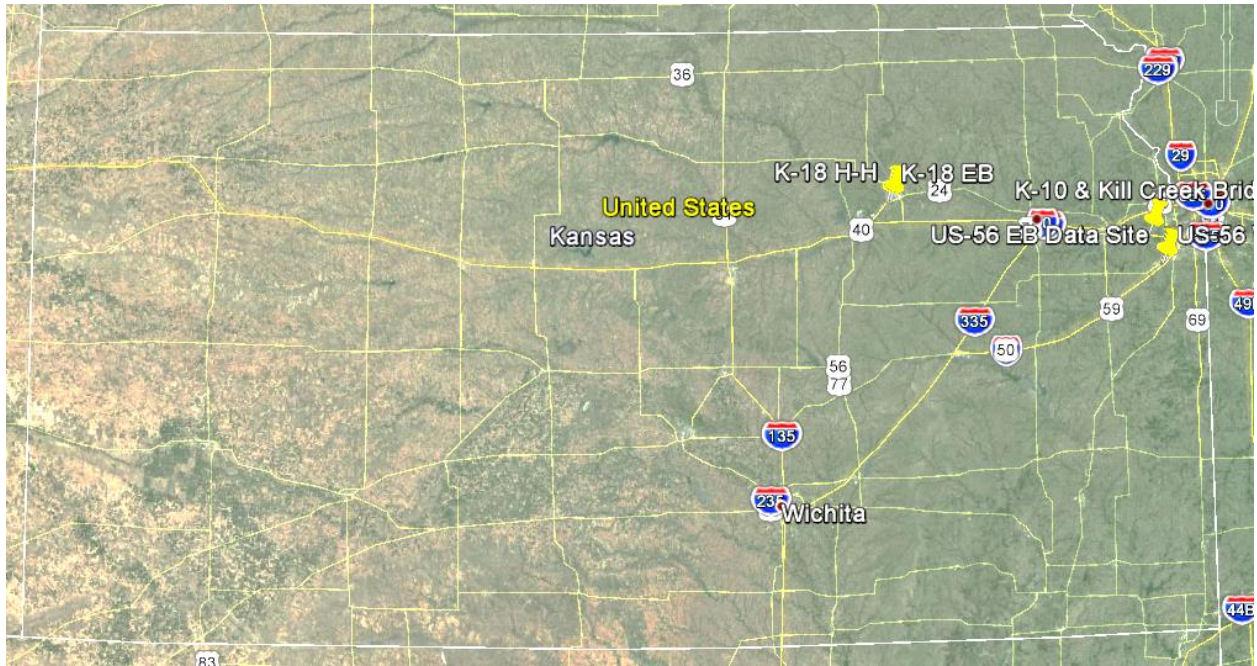

Map data ©2014 Google

Figure 3.3. Aerial map of Kansas with data collection sites pinned



Map data ©2014 Google

Figure 3.4. Zoomed-in aerial map of data collection sites

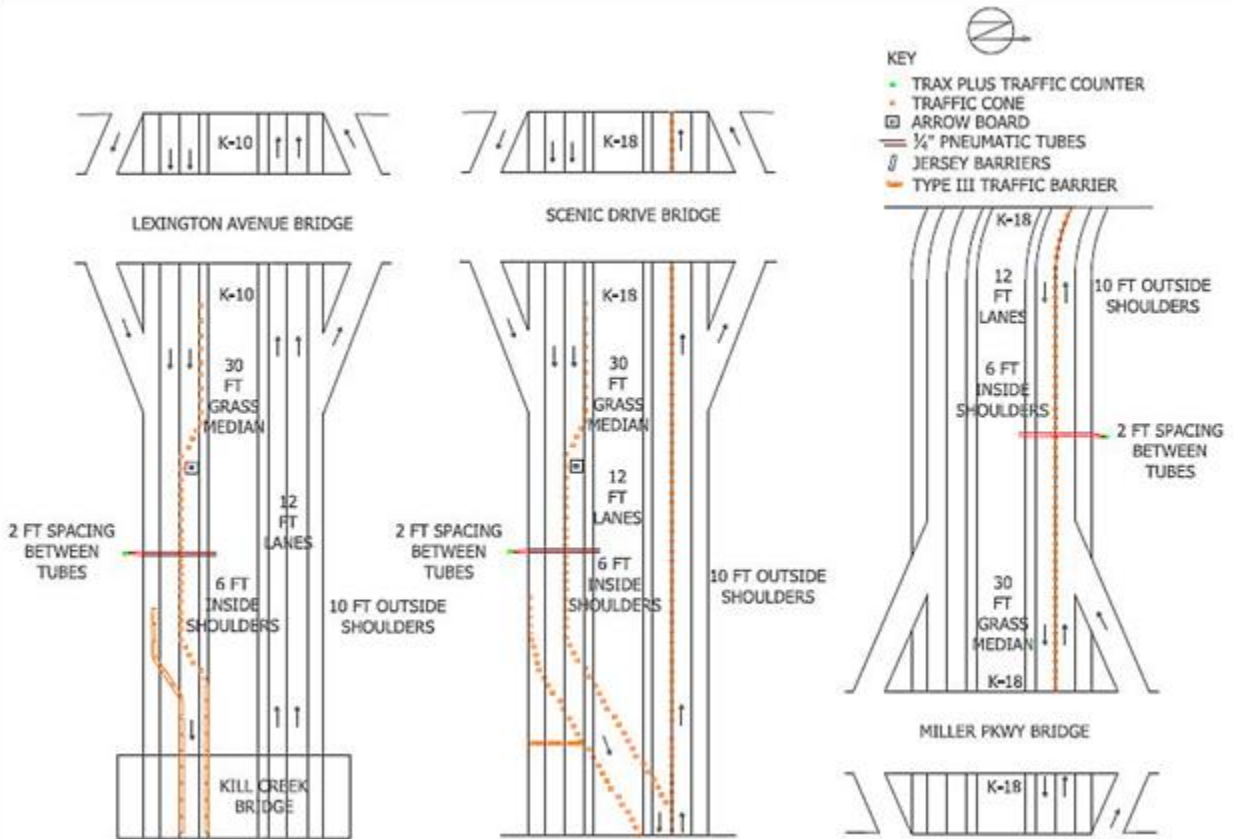


Image source: KDOT

Figure 3.5. K-10 EB, K-18 EB, and K-18 H-H typical schematics

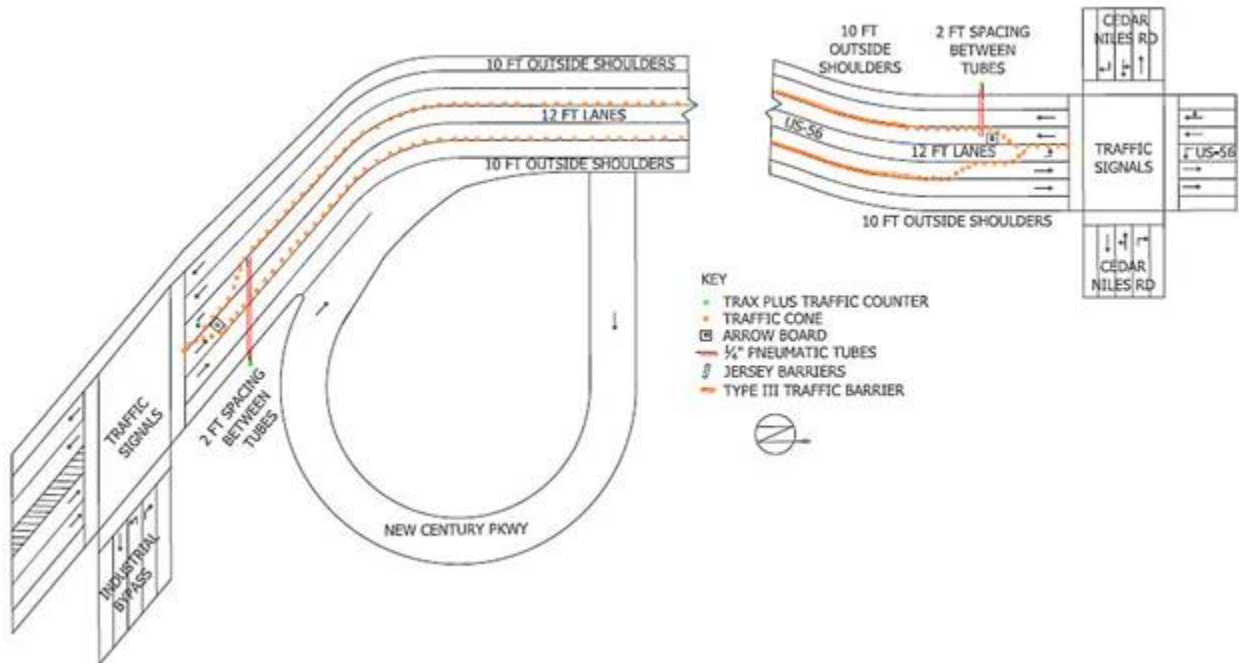


Image source: KDOT

Figure 3.6. US-56 EB and WB typical schematic

Each data collection site was analyzed for 24-hour intervals to determine maximum flow rate, maximum volume, mean speeds by considering 2 mph and 5 mph speed groups, posted speed limit prior to construction, work zone speed limit, breakdown flow rate, percentage of cars, percentage of buses, percentage of heavy vehicles, peak hour factor, and the date of data collection. Once a peak hour was determined, a peak time period was established by adding and subtracting an hour from that peak hour. Each parameter was analyzed based on a 15-minute interval.

Rain, which occurred during the K-10 and US-56 data collection process, was documented but only affected the speed collected for the K-10 work zone site. Data obtained at the US-56 sites included 3-day data collection counts instead of the average six days due to how the weather affected the pneumatic tubes on the roadway. Tubes in the westbound direction were pushed away from the roadway due to the adhesive tape's loss of bonding strength to the surface of the roadway, and the tubes in the eastbound direction were spliced due to damage from the traffic during inclement weather. Speed data obtained during the time of the rain for each site was eliminated due to data inconsistencies. Although the volume, classification, and gap counts were accurate, they were also eliminated for the Maximum Observed 15-minute Flow Rate Method because no correlation could be made between mean speed and flow rate on the roadway during the rainy days.

Motorcycle percentages were excluded from this study due to lack of motorcyclists at each site. The highest percentage of motorcyclists at any site in a 24-hour period was 0.7%, which was an average of 64 motorcycles. Small cars and light trucks were classified as passenger cars, buses

were classified as buses, and everything else was considered as heavy trucks. This information was needed for the conversion from vphpl to pcppl, which is discussed later in this chapter. The make-up of vehicles on the roadway during the time of data collection played a small role in the data collection site selection process due to the necessity of heavy vehicles on the roadway for an accurate measure of capacity for the respective site.

3.4 Equipment Used

Traffic counters used, called TRAX 1 Plus traffic counters made by Jamar Technologies, can obtain the speed, classification, gap, and volume of a roadway (Jamar 2008). Several types of pneumatic tubes could be used to gather data for these counters but tubes used for this research were round mini-tubes with an inside diameter of 0.187 in. and an outside diameter of 0.365 in. The tubes were cut into 50-ft sections. The L6 layout was used which sends a signal from two pneumatic tubes placed across two roadways to the traffic counter which warns the processor that two vehicles could simultaneously cross the tubes at any one time in the same or opposite directions. If layout L6 is the chosen, then the unit assumes that two-directional traffic on the roadway could be under study and data counts for both lanes must be recorded separately. This function can collect needed data for each work zone location. TRAX Pro software analyzed the collected data and exported those to Excel files based on chosen parameters.

The HCM states that under standard conditions and ideal geometric conditions, a 2 – to – 1 lane closure on a freeway would have a capacity of 1600 pcppl (HCM 2000). Heavy vehicles on the roadway drive at a slower pace and can cause queues; therefore, the heavy vehicles should be multiplied by a passenger car equivalent factor (PCE) to obtain accurate data analysis. The PCE values were obtained from table 9.25 in the textbook “Traffic and Highway Engineering” by Garber and Hoel in 2009. Garber and Hoel state that for level terrain on basic freeway sections, the PCE factor for recreational vehicles should be 1.2 and the PCE factor for heavy vehicles should be equal to 1.5 (Garber and Hoel 2009). These PCE values have been used in several similar studies. The most referenced study was by Bham and Khazraee in 2011.

Work zone features are another parameter in capacity determination on rural highways. The work zone features include eight geometric conditions, as listed in Table 3.1. This table provides relevant data for this study. The table consists of the number of open lanes, position of closed lane(s), length of lane closure, lane width, type of work activity, intensity of work activity (low/medium/high), traffic control devices used, and weather conditions. Each geometric parameter can affect the estimated capacity so the geometric parameters must be accurately recorded. Two major reductions found in the HCM include a 14% reduction in capacity for a 2-ft lane width reduction and an 11% reduction in capacity for a high percentage of heavy vehicles in the traffic stream (HCM 2000). However these values

Equipment used for this study included Jamar Technologies TRAX 1 Plus traffic counters, Jamar Technologies TRAXPro software, mini pneumatic tubes, adhesive tape, metal bracket (located on the side of the road to create tension on the tubes to ensure an accurate reading), a hammer, a class II safety vest, a tape measure, pen and paper, and a camera.

Jamar Technologies TRAX 1 Plus traffic counters use two half-round or D-shaped pneumatic tubes to perform three methods of data collection:

1. Basic function
2. Volume-Only function
3. Binned function

The basic function allows the user to obtain speed, volume, classification and/or gaps of vehicles in a traffic stream. This function uses real time to stamp data into a count file until the unit is shut off. In this function tubes should be spaced no less than 2 ft apart in order to accurately record speed. Spacing of 2 feet is recommended because it is much easier to determine why the data was not obtained correctly in the event it does not load into the software (JAMAR 2008). TRAX 1 Plus pneumatic tubes have several settings, but in order to obtain necessary data using the basic method, tubes should be set in layouts L5, L6, L10, L11, or L12. Layout L6 is the most common layout because it is designed for a standard two-lane roadway with traffic traveling in opposite directions. Layout L5 is the second most common layout because it mimics the L6 layout but is designed for two lanes of traffic traveling in the same direction.

The volume-only function only obtains the volume and gaps of vehicles. This function can use layouts L1, L2, L3, L4, L7, L8, L9, L13, or L14. This method of data collection is beneficial if the study required Average Daily Traffic (ADT) only. However, to estimate capacity on a roadway in a work zone, more data than just volume must be gathered.

The bin function in the data collection equipment can be used to summarize the classification, speed and/or gaps, depending on what data is required. This data is sorted and stored in specific categories or bins. The binned function can use any layout the basic function uses, but the L5 or L6 layout is recommended for data collection (Jamar 2008).

Other outputs obtained from the Jamar Technologies TRAX 1 Plus traffic counter include mean speed, pace, 85th percentile, ADT, vehicle classification distribution, and the percentage of vehicles exceeding speed limits. Pneumatic tubes use air pulses provided by vehicles to obtain stamped raw data, which are then analyzed with TRAXPro software provided by the manufacturer to produce intended outputs. This software produces queries and graphs of selected data stored within the traffic counter memory. The software also allows the user to extract data into Excel files, thus allowing the user to run analysis separate from the analysis that the software provides. Photos of the traffic counter used for this study are shown in Figure 3.7.

In knowing the vehicular gaps, through simple arithmetic, headway and speed can be calculated. For example, if vehicle speeds are 60 mph (88ft/s) and the gap recorded between two vehicles is 3 sec, then the vehicle's headway is 3.18 sec. If the assumption is made that average vehicle length is equal to 16 ft. If an average vehicle is 16 ft in length and the vehicle travels at 88 ft/s, the gap is 0.1818 sec. Based on basic rounding methods, the gap value is not significantly large enough to make a meaningful difference and therefore is assumed to equal the headway between vehicles in this study.



Figure 3.7. TRAX I Plus traffic counter photos

3.5 Data Collection Sites and Setups

This section details individual data collection sites and how those respective sites were set up in the field. Each site detailed includes corresponding figures and schematics to help define the counter setup.

3.5.1 K-10 EB

The K-10 EB work zone site was located in DeSoto, Kansas near Kill Creek Bridge, approximately 1,500 ft east of Lexington Avenue Bridge, as shown in Figure 3.5. This site is a bridge repair site which could be considered a long-term work zone site because construction phase of the roadwork extended well beyond 2-weeks. KDOT standard temporary traffic control was followed in all facets. Temporary concrete safety barriers or CSBs were used to ensure the safety of the construction crew. Photographs of the site are shown in Figure 3.8. During data

collection, the site experienced rain for three days, thus causing a discrepancy in the speed data collected. Therefore, the data for those three days was discarded after the preliminary analysis was performed. With the exception of the rainy days, the site had clear skies with temperatures in the 50's and 60's, during the data collection period.



Figure 3.8. K-10 EB site setup photos

3.5.2 K-18 EB

The K-18 EB site was located 2,500 ft east of Scenic Drive Bridge in Manhattan, Kansas, as shown in Figure 3.5. This site had a 10-ft outside shoulder width with two 12-ft lanes, followed by a 6-ft inside shoulder width. Photographs of the data collection setup are shown in Figure 3.9. The temporary traffic control for this work zone site followed KDOT standard setup specifications, including the use of an arrow board and channelizing devices spaced at approximately 50 ft. The location of the counter setup preceded the point at which directional traffic had to merge to a head-to-head situation. This work zone had a typical 2 – to – 1 lane closure, and the traffic counter was placed at a location considered a bottleneck situation. The weather during the data collection process for this site was clear with temperatures in the 50's and 60's. Although this site had no adjacent workers, it had an approximate 30-ft grass median dividing the eastbound and westbound traffic lanes.



Figure 3.9. K-18 EB site setup photos

3.5.3 K-18 H-H EB and WB Directions

The K-18 head-to-head (H-H) EB and WB data collection setup was approximately 1,500 ft west of Miller Parkway Bridge in Manhattan, Kansas, as shown in Figure 3.5. This site had a standard 10-ft outside shoulder with two 12-ft lanes adjacent to the shoulder, followed by a 6-ft outside shoulder. Photographs of the site are shown in Figure 3.10. This is the only setup that incorporated an H-H situation, but this site also used standard KDOT temporary traffic control setup. Construction was occurring approximately 30 feet beyond the traversable lanes. The lanes were divided by tubular markers spaced at approximately 120 ft with two reflective devices equally placed between the markers. Although construction equipment was adjacent to the traversable lane, the heavy machinery was out of the clear zone of the motorists and did not pose a threat to the motorists. Therefore, very little interruption was due to construction traffic. Due to H-H, no inside shoulders were available at this location. As with the other K-18 eastbound data collection site, clear skies and temperatures in the 50's and 60's prevented the weather from being a factor during the data collection process for this site.



Figure 3.10. K-18 H-H EB and WB site setup photos

3.5.4 US-56 EB

The US-56 EB data collection site was approximately 600 ft east of the Industrial Bypass traffic signal in Gardner, Kansas, as shown in Figure 3.6. The traffic control was a standard KDOT temporary traffic control setup for a 4 lane road with no median and a 2 – to – 1 lane closure. One on-ramp was approximately 350 ft east of the data collection location. Setup for this site is shown in Figure 3.11. This site had clear skies and temperatures ranging from 55 to 65 degrees Fahrenheit during the last three days of the collection process. During the first four days, the site encountered rainy conditions. Due to the rain, the adhesive tape used to hold mini-pneumatic tubes to the surface of the roadway gave way and caused too great of stresses on the tubes, causing them to splice. A second round of mini-tubes was placed on the traffic counter once the weather cleared, and data was obtained for the last three days of the data collection process. Setup at this site varied from the other sites because there was no median splitting the 60 ft hard surface driving lanes. Due to the roadway constraints, the use of typical Jamar Technology equipment to tie down the end of the mini-tubes which were not attached to the traffic counter had a slightly different setup. Due to the absence of a median, additional adhesive tape had to be used to adhere the mini-tubes to the road surface.



Figure 3.11. US-56 EB site setup photos

3.5.5 US-56 WB

The US-56 WB site was located approximately 750 ft west of Cedar Niles Road intersection in Gardner, Kansas, as shown in Figure 3.6. The westbound setup was similar to the eastbound setup. No median tied down the mini-tubes so additional adhesive tape was used to ensure accurate data was collected. The weather was rainy for the first four days and clear for the last three days of data collection. Unlike the EB site, mini-tubes for the WB site did not splice but were pushed to the outside shoulder and did not need to be replaced when re-set. All data during rainy conditions was discarded due to data inconsistencies. Traffic counters were set up in the transition zone of the standard KDOT temporary traffic control setup. An arrow board blocked the closed lane, consequently guiding motorists to the open lane. Channelizing devices were placed approximately 40 ft apart throughout the transition zone. Site setup is shown in Figure 3.12.



Figure 3.12. US-56 WB site setup photos

3.6 Maximum Observed 15-minute Flow Rate Method

The Maximum Observed 15-minute Flow Rate Method utilizes four parameters to establish estimated capacity of a work zone. The four parameters include the volume, maximum 15-minute flow rate, 15-minute mean speed, and 15-minute breakdown flow rate. If no three consecutive 15-minute intervals occur in which the flow rate falls below the threshold value, then a capacity for the site cannot be estimated. This constraint ensures that a single maximum 15-minute flow rate cannot become the capacity for a site and also assists in identifying the peak time period within a day. Peak time period specification also provides a more accurate comparison between the two methods under review: Maximum Observed 15-minute Flow Rate Method, and Platooning Method.

The maximum observed 15-minute flow rate can be determined by first obtaining 15-minute volumes per day per site, which is then converted to flow rates by multiplying the 15-minute volume by four, as shown in Equation (3):

$$q = V * 4 \tag{3}$$

Where,

q = the flow rate in vehicles per hour per lane (vphpl)

V = the 15-minute volume

Once flow rates are obtained for each 24-hr period for a site, the peak time period must be established.

The next piece of information that is needed to run the Maximum Observed 15-minute Flow Rate Method is the mean speeds for the corresponding 15-minute intervals where the volumes were being considered. Once mean speeds are divided into 15-minute intervals, corresponding peak time period mean speeds can be graphed and compared against the same peak time period flow rates. If capacity is observed at the site, a correlation between the flow rate and mean speed under review should be evident. As flow rate increases, the mean speed should decrease. As the flow rate hits its peak, mean speeds should become equal. As flow rate begins to decrease, mean speed should begin to increase again. If the pattern is not evident, the correlation is not met and a capacity cannot be determined for the respective site.

Correlation between flow rate and mean speed proves capacity if and only if at least three consecutive 15-minute intervals can be found below the threshold limit (Bham 2011). As defined, the threshold limit for this study was the work zone speed limit for the site under review.

After determining estimated capacity per day in vphpl, it must be converted to pcphpl. The conversion equation is listed as Equation (4):

$$Q = (P_c * q) + ((P_r * q) * E_R) + ((P_t * q) * E_T) \quad (4)$$

Where,

Q = flow rate in pcphpl

q = flow rate in vphpl

P_c = percentage of passenger cars observed during a 24-hr period

P_r = percentage of recreational vehicles during a 24-hr period

P_t = percentage of heavy vehicles during a 24-hr period

E_R = Passenger Car Equivalent factor for recreational vehicles (1.2)

E_T = Passenger Car Equivalent factor for heavy vehicles (1.5)

The common method listed in the HCM was not used in this study because the percentages of vehicles for each site were known based on field data collection. The only values that needed to be determined were PCE values for recreational vehicles and heavy vehicles which were both obtained from table 9.25 in the textbook “Traffic and Highway Engineering” by Garber and Hoel in 2009. The PCE values have been used in several similar studies. The most referenced study was by Bham and Khazraee in 2011. As shown in equation 3.2 the PCE factor for recreational vehicles to be used in this study is 1.2 while the PCE factor for heavy trucks in this study is 1.5. The large geometric factor that played a role in this decision was that each site was positioned in a level type of terrain. Converting flow rates to pcphpl allows capacity comparisons from one site with capacities from another site no matter the vehicle compositions.

The final parameter to be established in the Maximum Observed 15-minute Flow Rate Method is the 15-minute breakdown flow rate. This parameter is always less than the maximum observed 15-minute flow rate, because it sets one more parameter on flow rate values. The breakdown flow rate is considered for vehicles that have headway less than or equal to 4 sec. A true breakdown of traffic flow can be found by applying this parameter. If the 15-minute breakdown flow rate correlates with the maximum observed 15-minute flow rate, the estimated capacity is accurate. If the breakdown flow rate is greater than the maximum observed 15-minute flow rate, the observed data must be re-examined. If no correlation exists between the two parameters, the obtained data must also be re-examined. If either of these parameters have a negative correlation, capacity cannot be found from this method for the site.

After going through all the calculations, the capacity for each site was selected based on the largest maximum observed flow rate for that particular site.

3.7 Platooning Method

The Platooning Method utilizes two parameters to determine whether or not a vehicle is free flowing or in-platoon. Parameters for capacity estimation with this method include 4.0 sec or less of headway or 250 ft or less of spacing. If either of these parameters is true, the vehicle is in-platoon. After identifying in-platooning vehicles, average 15-minute headways can be identified. Once the new headways are found, capacity on the roadway can be estimated using Equation (5).

$$C_p = 3600 / h_p \quad (5)$$

Where,

$$C_p = \text{Potential Capacity (vphpl)}$$

$$h_p = \text{the average headway of all in-platoon vehicles (sec)}$$

Use of potential capacity is the primary difference between the Maximum Observed 15-minute Flow Rate Method and the Platooning Method used this study. This capacity estimation approach causes capacity values to be greater than what was found when using the Maximum Observed 15-minute Flow Rate Method because an average of 4 sec was used, whereas this method uses realistic observational data for headway values. However, just as the values were converted in the Maximum Observed 15-minute Flow Rate method they will be converted here. The conversion from a flow rate in vphpl to a flow rate in pcphpl can be seen Equation (6).

$$Q = (P_c * C_p) + ((P_r * C_p) * E_R) + ((P_t * C_p) * E_T) \quad (6)$$

Where,

$$Q = \text{flow rate in pcphpl}$$

$$C_p = \text{flow rate in vphpl}$$

P_c = percentage of passenger cars observed during a 24-hr period
 P_r = percentage of recreational vehicles during a 24-hr period
 P_t = percentage of heavy vehicles during a 24-hr period
 E_R = Passenger Car Equivalent factor for recreational vehicles (1.2)
 E_T = Passenger Car Equivalent factor for heavy vehicles (1.5)

Once the potential capacity is found then it is converted an estimated operating capacity as shown in, Equation (7). This equation must be utilized to accurately account for the platooning factor for the site.

$$CE_E = C_p * f_p \quad (7)$$

Where,

CE_E = the estimated operating capacity in passenger cars per hour per lane (pcphpl).
 C_p = the potential capacity in pcphpl.
 f_p = the platooning factor.

After the estimated capacity is found based on the platooning factor for the site it gets converted into an estimated flow rate in pcphpl. The conversion equation for this step can be seen in Equation (8).

$$Q = (P_c * CE_E) + ((P_r * CE_E) * E_R) + ((P_t * CE_E) * E_T) \quad (8)$$

Where,

Q = Estimated flow rate in pcphpl
 CE_E = Estimated capacity in vphpl
 P_c = percentage of passenger cars observed during a 24-hr period
 P_r = percentage of recreational vehicles during a 24-hr period
 P_t = percentage of heavy vehicles during a 24-hr period
 E_R = Passenger Car Equivalent factor for recreational vehicles (1.2)
 E_T = Passenger Car Equivalent factor for heavy vehicles (1.5)

In previous studies there have been four platooning factors that have been considered when using this method. The four platooning factors include a platooning factor of 1.0 for any data set with queuing conditions, a platooning factor of 0.95 should be used for long term and short-distance work zones, a platooning factor of 0.90 should be used for long term and long-distance work zones, and a platooning factor of 0.85 should be used for all short term work zones (Ramezani 2010).

However, since there was an abundant amount of obtained data for this study the platooning factors were determined separately per site per day. The values were based on the amount of platooning vehicles divided by the total amount of vehicles on the roadway for the respective 15-

minute time interval during the peak time period chosen for that specific day. Once these values were determined, the average of the variables during the peak time period under review for the respective 24 hour period was established. This approach provided very accurate results for the platooning factors per site because the factors were analyzed from the observed data and not assumed. The previous study lumped similar data collection sites together which could potentially cause distorted results because no two roadways are exactly identical. Once the platooning factors for each site were chosen the capacity estimation equation shown above was analyzed and an estimated capacity per day was established.

CHAPTER 4. DATA ANALYSIS AND RESULTS

Results showed that the occurrence of breakdown events did not always lead to capacity of the respective work zone. The breakdown event is typically caused by a simultaneous influx of vehicles in the bottleneck location which can be classified as the capacity of that roadway. However, a breakdown event can also be caused by a slow driver, therefore requiring the speed distribution graph to be analyzed with the frequency distribution graph to determine if a correlation can be observed. Typical observed correlation is when a significant decrease in vehicle mean speeds occurs at high frequencies of flow rates, thus proving capacity of the roadway. The maximum observed 15-minute flow rate often occurred after the breakdown, and the capacity was found as traffic regained speed until reoccurrence of event or the roadway managed traffic flow.

Sites at US-56 WB and EB may not provide accurate capacity data due to nearby controlled intersections. However, the other sites provided sufficient data to determine the capacity of a rural highway work zone in Kansas. For example, K-10 and Kill Creek Bridge gave the most accurate results and clearly provided maximum flow rate, breakdown flow rate, mean speed, and breakdown mean speed.

4.1 Expected Capacity per Work Zone Site

Based on previous research, the Maximum Observed 15-minute Flow Rate Method was expected to produce the lower limit of the capacity while the Platooning Method was expected to produce the upper limit. From the two limits, a range of capacity was expected to be formed. After completing the analysis using each method, a comparison of the accuracy of the two methods would be determined and the more accurate method would be identified.

4.2 Maximum Observed 15-minute Flow Rate Method Results

PCE values for recreational vehicles and heavy vehicles were both obtained from Table 9.25 in the textbook “Traffic and Highway Engineering” by Garber and Hoel in 2009. The PCE values have been used in several similar studies. The most referenced study was by Bham and Khazraee in 2011. As shown in equation 3.2 the PCE factor for recreational vehicles used in this study was 1.2 while the PCE factor for heavy trucks was 1.5. The average speed was found by averaging 24-hr periods of data obtained at each site. By using the equations discussed and studying collected data, a maximum flow rate, maximum volume, and maximum breakdown flow rate was determined per site. Each variable led to the capacity for each work zone. The capacity for each site was selected based on the largest maximum observed flow rate for the respective site. Values were selected based on the concept that when the capacity of a roadway is met, excess vehicles traversing the roadway will be delayed.

4.2.1 K-10 EB

Even though rain resulted in three days' worth of speed data being discarded, the work zone site located on K-10 near Kill Creek Bridge provided the strongest evidence of capacity compared to all the data collection sites. As shown in Table 4.1, the capacity for the K-10 EB site equaled 1730 pcphpl with a standard deviation of 46.82 pcphpl. The normal speed limit for this site was 70 mph while the work zone speed limit was found to equal 60 mph. The average and the average standard deviation were both based on the peak time period of the site. The correlation between flow rate and mean speed for the peak time period is shown in Figure 4.1. The mean speed for the entire data collection on this site was 60.3 mph, as shown in Figure A.1 in Appendix A. The three days' worth of data that was discarded was collected from October 29* thru October 31, 2013*. Due to the splicing of pneumatic tubes and failure to maintain 2-ft separation, the counter recorded vehicle pulses while the tubes varied from a few inches apart to a few feet apart. This drastically threw the values off as it can be seen on the three days mention from Table 4.1. Maximum flow rates for those three days are drastically larger than any other maximum flow rates recorded.

Table 4.1. K-10 EB site for Maximum Observed 15-minute Flow Rate Method

K-10 EB Site								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/28/2013	10:00 am to Midnight	58.26	92.10%	0.91%	6.99%	1522	1396	1356
10/29/2013*	24 hrs	61.29	57.39%	1.98%	40.63%	1917	1805	1878
10/30/2013*	24hrs	67.71	39.48%	16.20%	44.32%	2036	1910	1986
10/31/2013*	24hrs	63.52	44.12%	43.99%	11.89%	1836	1738	1804
11/1/2013	24hrs	57.06	93.68%	0.63%	5.69%	1730	1641	1656
11/2/2013	24hrs	59.63	96.85%	0.18%	2.97%	1157	1093	942
11/3/2013	24hrs	59.95	97.43%	0.08%	2.49%	1191	1030	992
11/4/2013	Midnight to 11:00 am	55.23	93.62%	0.64%	5.74%	1730	1681	1689
TOTAL/AVERAGE*		58.03	94.74%	0.49%	4.78%	1466	1368.2	1327
AVG STANDARD DEVIATION*		---	---	---	---	46.82	50.38	47.84

* It rained heavily during the days 10/29/13 to 10/31/13

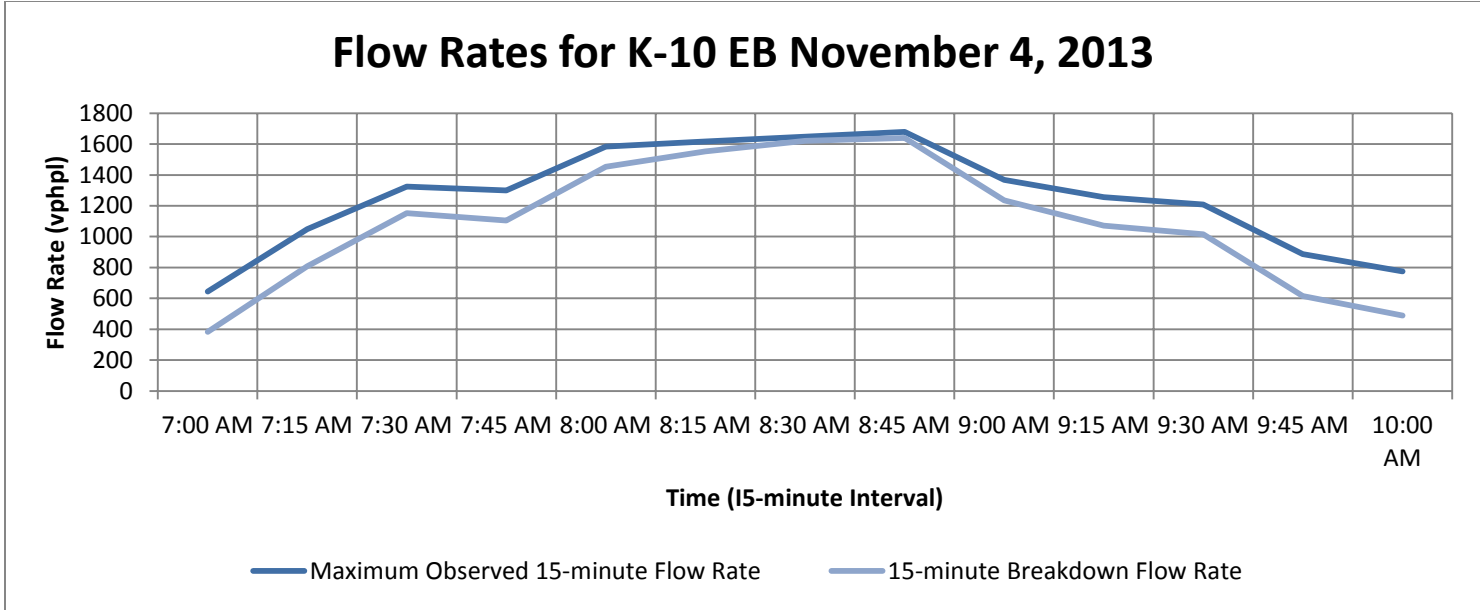


Figure 4.1. K-10 EB site peak time period flow rate vs. mean speed graphs

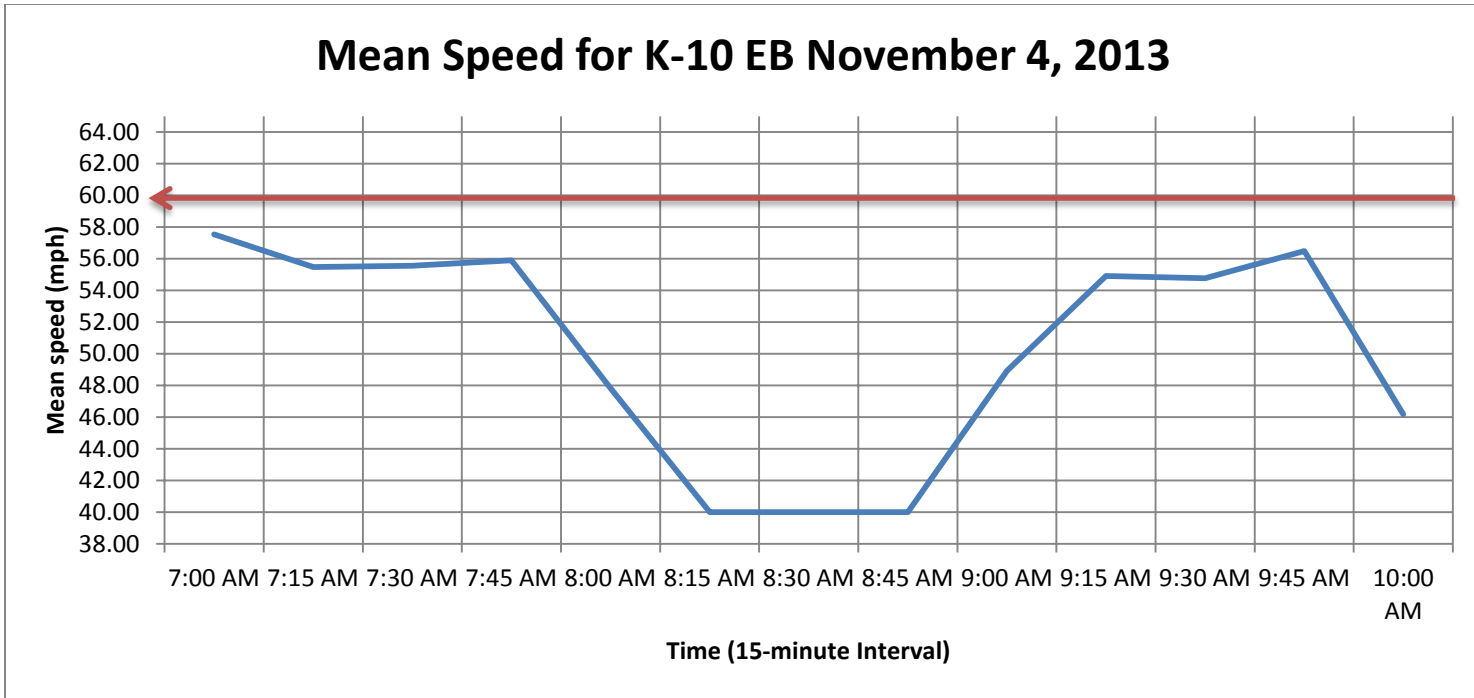


Figure 4.1. K-10 EB site peak time period flow rate vs. mean speed graphs (continued)

4.2.2 K-18 EB

Capacity established using the Maximum Observed 15-minute Flow Rate Method for the K-18 EB data collection site was found to be 1551 pcphpl with a standard deviation of 233.06 pcphpl, as shown in Table 4.2. The normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The weather during data collection for this site had clear skies and temperatures ranging from 55 to 65 degrees Fahrenheit. The correlation during the peak time period for one 24-hr period is shown in Figure 4.2. The mean speed of the entire data collection was equal to 53 mph, as shown in Figure A.2 in Appendix A. The average and the average standard deviation were both based on the peak time period for the site.

Table 4.2. K-18 EB site for Maximum Observed 15-minute Flow Rate Method

K-18 EB Site								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/19/2013	3:15 pm to Midnight	55.82	97.16%	0.50%	2.34%	847	830	648
10/20/2013	24 hrs	56.10	98.02%	0.08%	1.90%	731	715	477
10/21/2013	24hrs	54.99	93.17%	0.40%	6.43%	1368	1265	1264
10/22/2013	24hrs	55.58	91.61%	0.48%	7.91%	1423	1344	1203
10/23/2013	24hrs	55.55	92.73%	0.36%	6.90%	1255	1203	1015
10/24/2013	24hrs	55.46	92.20%	0.37%	7.43%	1490	1278	1316
10/25/2013	24hrs	55.29	93.49%	0.47%	6.04%	1551	1443	1386
10/26/2013	24hrs	56.70	96.26%	0.27%	3.47%	1278	1187	1079
10/27/2013	Midnight to 10:15 am	57.06	96.34%	0.19%	3.47%	419	350	191
TOTAL/AVERAGE		55.69	94.33%	0.37%	5.30%	1243	1158	1049
AVG STANDARD DEVIATION		---	---	---	---	233.06	217.09	248.72

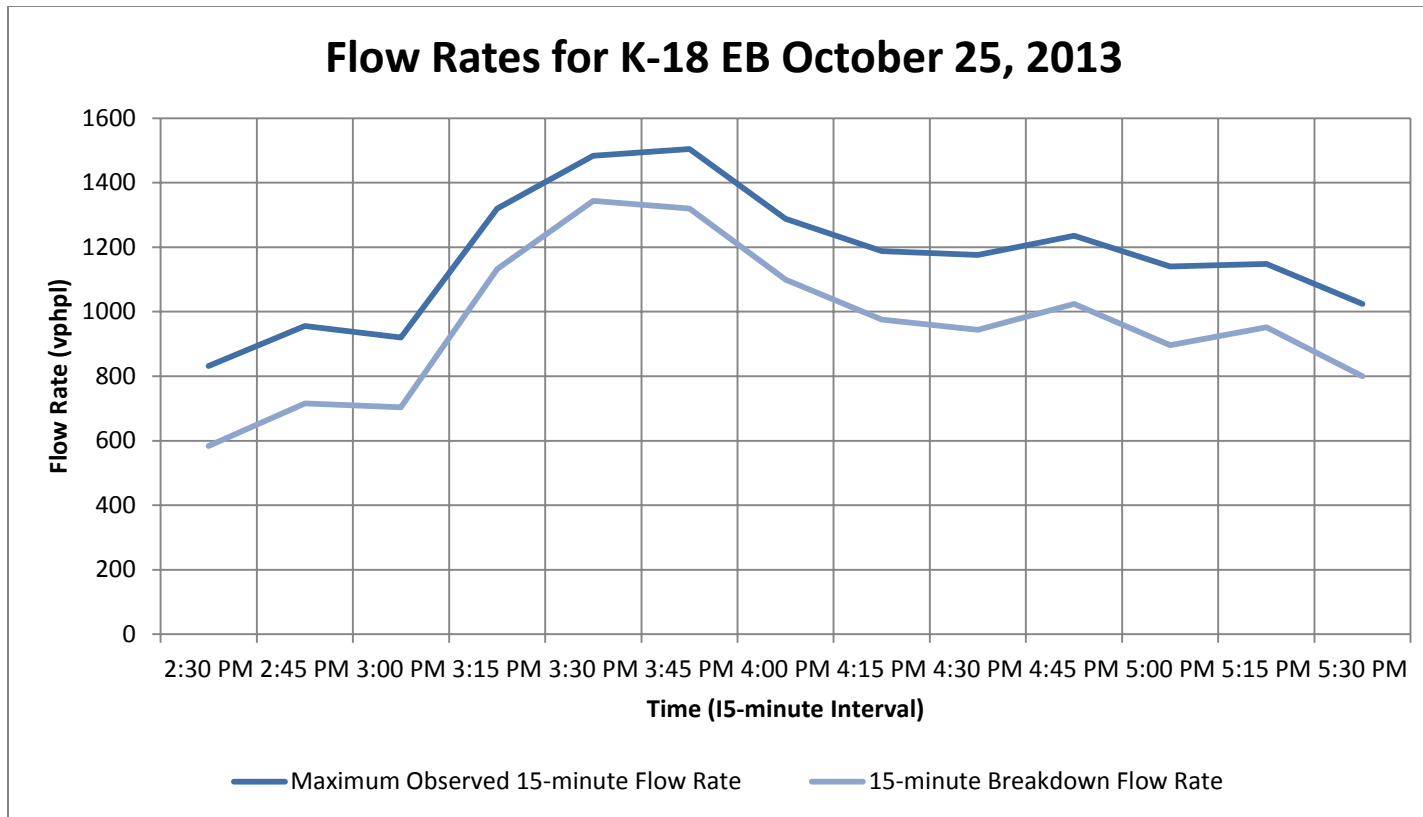


Figure 4.2. K-18 EB site peak time period flow rate vs. mean speed graphs

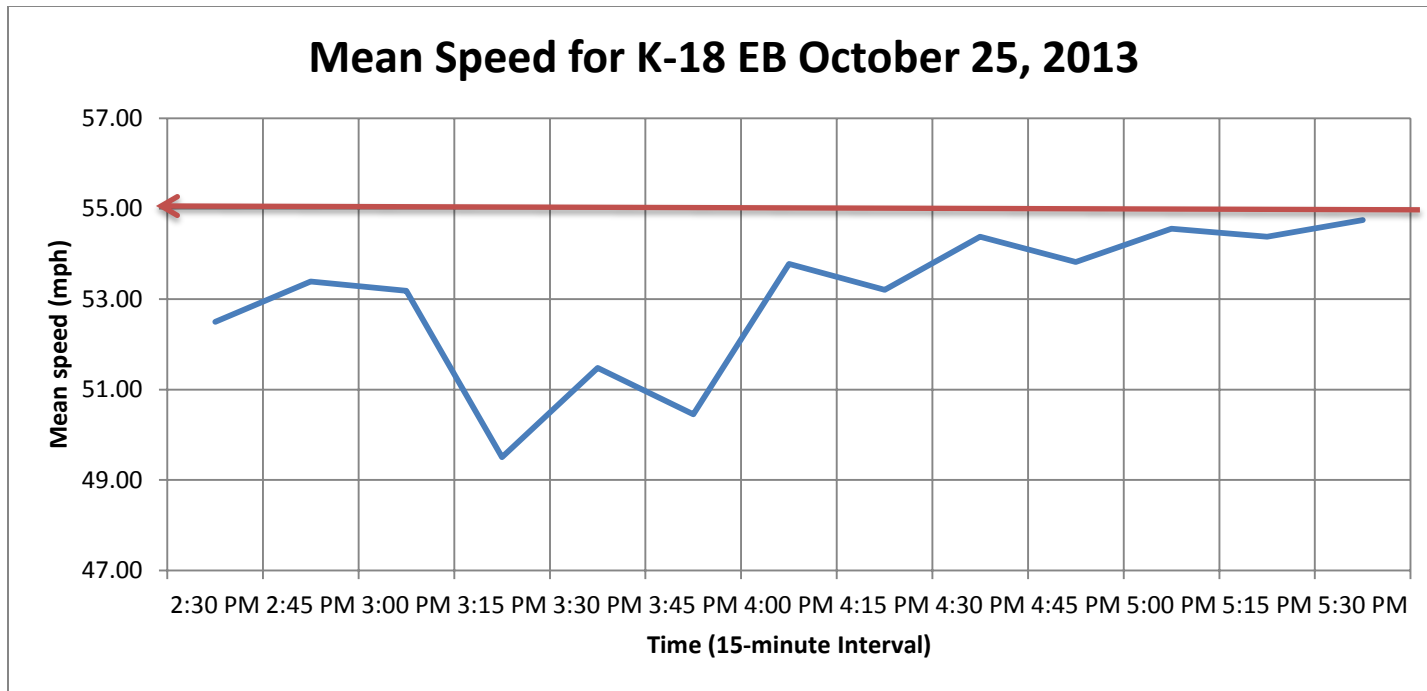


Figure 4.2. K-18 EB site peak time period flow rate vs. mean speed graphs (continued)

4.2.3 K-18 H-H EB and WB

Two data collection sites that had slightly different setups than the other data collection sites were the K-18 H-H EB and WB sites. The EB site provided reasonable capacity values throughout the duration of the data collection process. Maximum capacity for the K-18 H-H EB site was equal to 1530 pcphpl with a standard deviation of 156.77 pcphpl, as shown in Table 4.3. EB correlation graphs representing flow rates and mean speeds during the peak time period are shown in Figure 4.3. The normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The average and the average standard deviation were both based on the peak time period of the site. The mean speed for entire data collection at the EB site was 55.6 mph, as shown in Figure A.3 in Appendix A.

Analysis of capacities per day for the WB direction did not provide as accurate of results as the EB direction. The WB direction did not provide sufficient evidence that capacity could be determined. The mean speed must fall below the threshold value for three consecutive 15-minute time intervals, but this was not met in the observed data. Potential maximum capacity for the WB direction was 1292 pcphpl with a standard deviation of 124.14 pcphpl which is reasonable but possibly not accurate. Table 4.4 provides results for the K-18 WB data observation. Figure 4.4 displays the unmet parameter; therefore, no correlation between flow rates and mean speed for the K-18 WB data collection site could be made. Like the EB direction the normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The average and the average standard deviation were both based on the peak time period of the site. The mean speed for the entire data collection in the WB direction was 57.3 mph, as shown in Figure A.4 in Appendix A.

Table 4.3. K-18 H-H EB site for Maximum Observed 15-minute Flow Rate Method

K-18 H-H EB Site								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/19/2013	2:15 pm to Midnight	55.76	89.08%	0.66%	10.26%	964	851	762
10/20/2013	24 hrs	56.98	92.57%	0.11%	7.32%	751	725	535
10/21/2013	24hrs	55.78	86.57%	0.50%	12.93%	1436	1274	1257
10/22/2013	24hrs	55.69	86.64%	0.62%	12.74%	1393	1333	1188
10/23/2013	24hrs	55.35	86.94%	0.42%	12.64%	1247	1199	1047
10/24/2013	24hrs	55.19	86.52%	0.46%	13.02%	1249	1255	1245
10/25/2013	24hrs	55.58	86.60%	0.60%	12.81%	1530	1376	1359
10/26/2013	24hrs	55.61	90.54%	0.35%	9.11%	1335	1204	1151
10/27/2013	Midnight to 10:00 am	57.45	92.75%	0.32%	6.93%	369	318	178
TOTAL/AVERAGE		55.74	88.18%	0.47%	11.35%	1238	1152	1068
AVG STANDARD DEVIATION		---	---	---	---	156.77	146.36	162.04

Table 4.4. K-18 H-H WB site for Maximum Observed 15-minute Flow Rate Method

K-18 H-H WB Site								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/19/2013	2:15 pm to Midnight	56.73	93.84%	0.72%	5.44%	979	906	741
10/20/2013	24 hrs	57.65	95.17%	0.20%	4.63%	815	758	581
10/21/2013	24hrs	57.24	89.30%	0.46%	10.24%	968	768	741
10/22/2013	24hrs	56.99	88.70%	0.77%	10.53%	1029	936	789
10/23/2013	24hrs	56.65	88.51%	0.58%	10.91%	1009	928	777
10/24/2013	24hrs	56.94	89.14%	0.44%	10.42%	990	922	767
10/25/2013	24hrs	56.55	89.81%	0.48%	9.71%	966	914	751
10/26/2013	24hrs	57.44	93.53%	0.25%	6.23%	1292	1260	1127
10/27/2013	Midnight to 10:00 am	58.00	94.32%	0.27%	5.41%	543	408	325
TOTAL/AVERAGE		57.02	91.00%	0.49%	8.51%	1006	924	784
AVG STANDARD DEVIATION		---	---	---	---	124.14	140.67	132.07

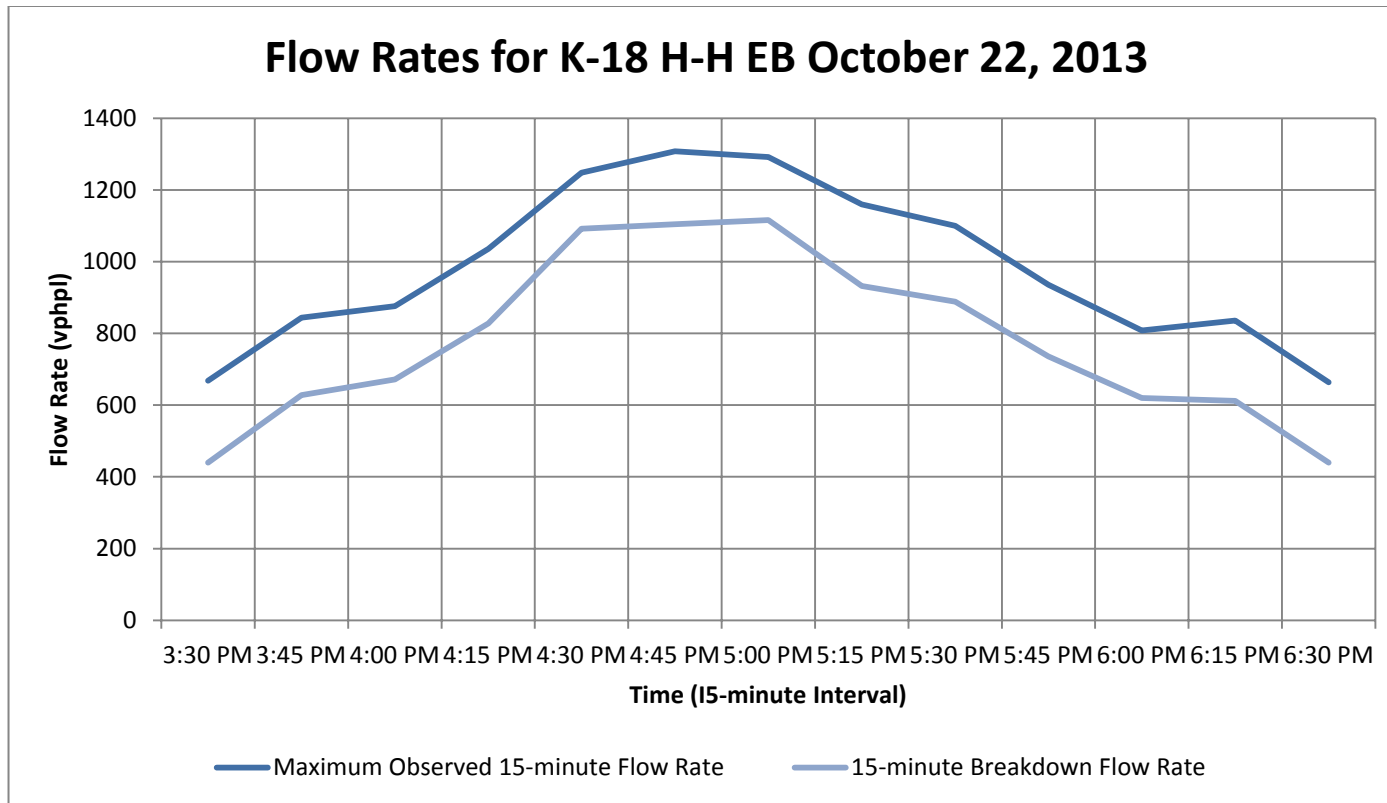


Figure 4.3. K-18 H-H EB site peak time period flow rate vs. mean speed graphs

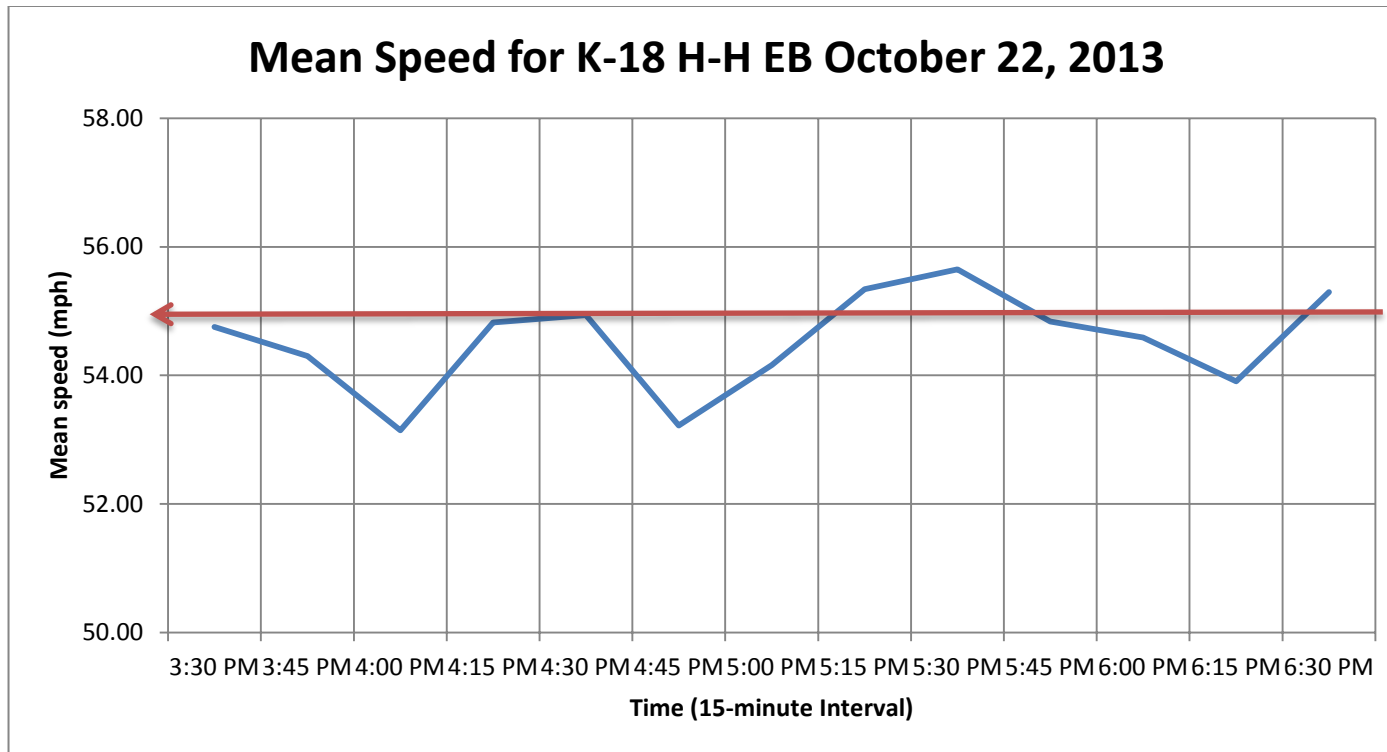


Figure 4.3. K-18 H-H EB site peak time period flow rate vs. mean speed graphs (continued)

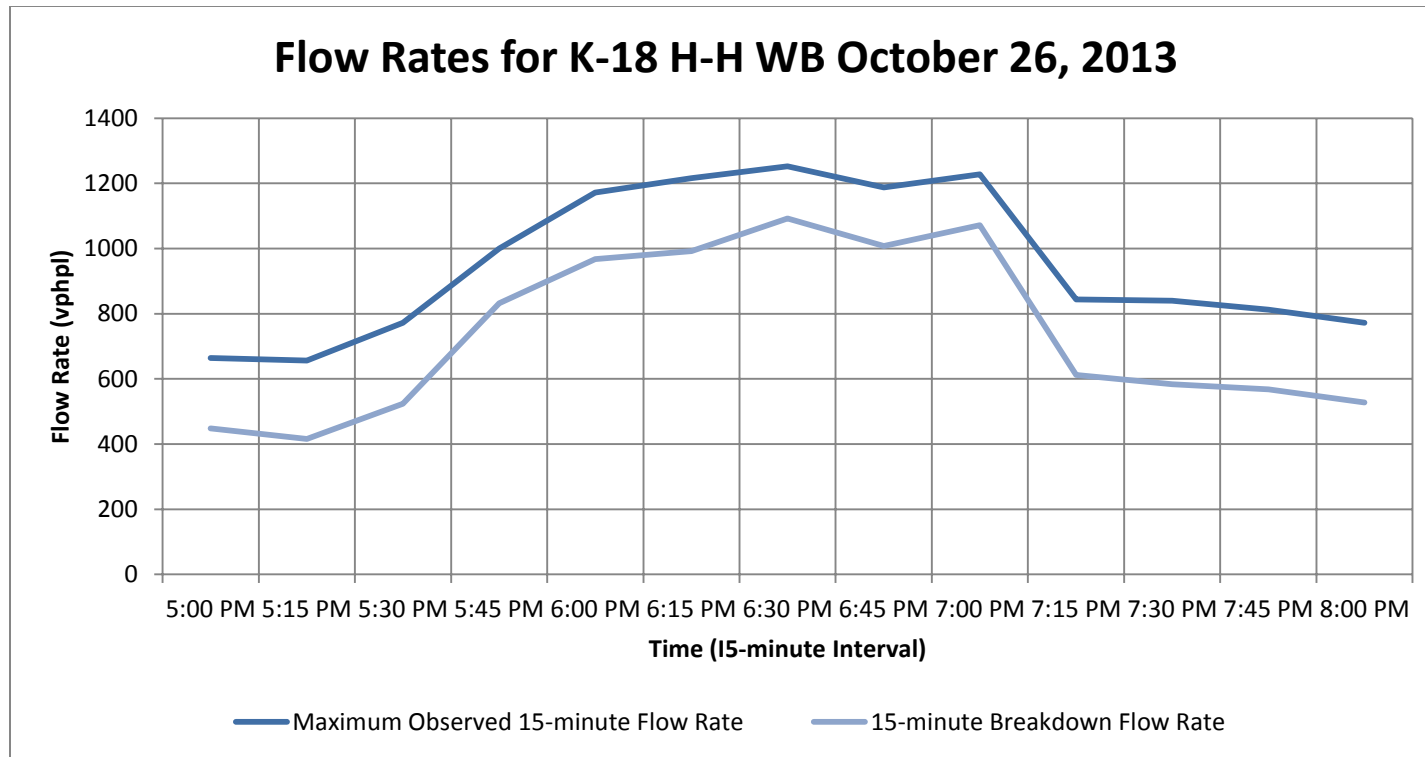


Figure 4.4. K-18 H-H WB site peak time period flow rate vs. mean speed graphs

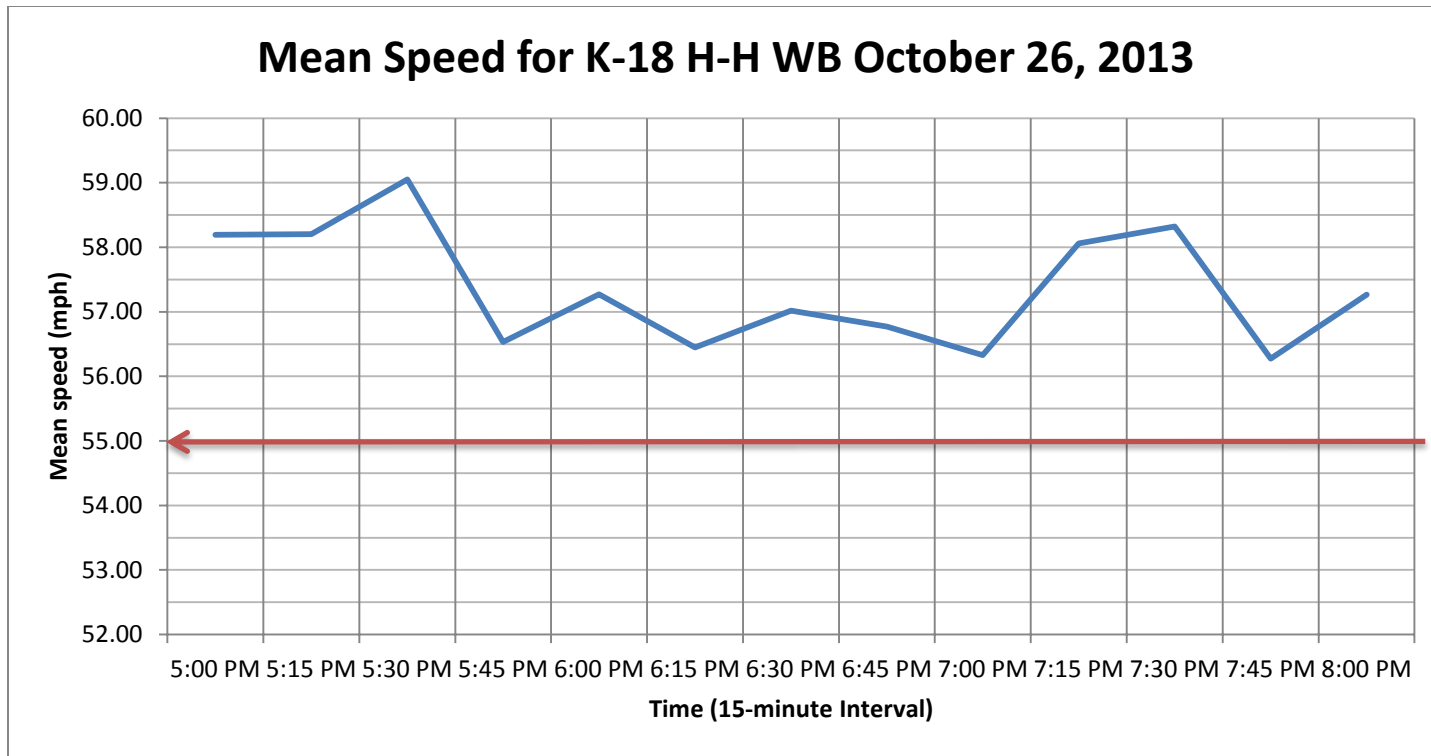


Figure 4.4. K-18 H-H WB site peak time period flow rate vs. mean speed graphs (continued)

4.2.4 US-56 EB

Data obtained at the US-56 EB data collection site was thought to have been lost due to a bad pin in the VGA adaptor which transfers data to the software program for analysis. However, after sending the traffic counter to Jamar Technologies for service, obtained data was extracted and determined to be accurate. Filtering out traffic breaks due to the signal-controlled intersection approximately 650 ft west of the data collection point was another challenge for estimating capacity at this site. The last obstacle to overcome was the weather interference for this site. Maximum capacity at the site was 1036 pcphpl with a standard deviation of 132.56 pcphpl, as shown in Table 4.5. The only full 24-hr period of collected data was obtained on October 29th, 2013. The normal speed limit for this site was 50 mph while the work zone speed limit was found to equal 40 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure 4.5 shows the correlation between mean speed and maximum observed 15-minute flow rate. This correlation proved that the capacity obtained from the site was accurate. The mean speed for the entire data collection at the site was 24.4 mph, as shown in Figure A.5 in Appendix A.

Table 4.5. US-56 EB site for Maximum Observed 15-minute Flow Rate Method

US-56 EB Site for the Maximum Observed 15-minute Flow Rate Method								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/28/2013	10:30 am to Midnight	29.25	91.85%	1.19%	6.96%	560	529	398
10/29/2013	24 hrs	24.40	93.27%	0.67%	6.05%	1036	857	805
10/30/2013	Midnight to 10:30 am	29.47	93.96%	0.44%	5.65%	778	745	560
TOTAL/AVERAGE		27.71	93.03%	0.77%	6.22%	791	710	588
AVG STANDARD DEVIATION		---	---	---	---	132.56	90.03	119.17

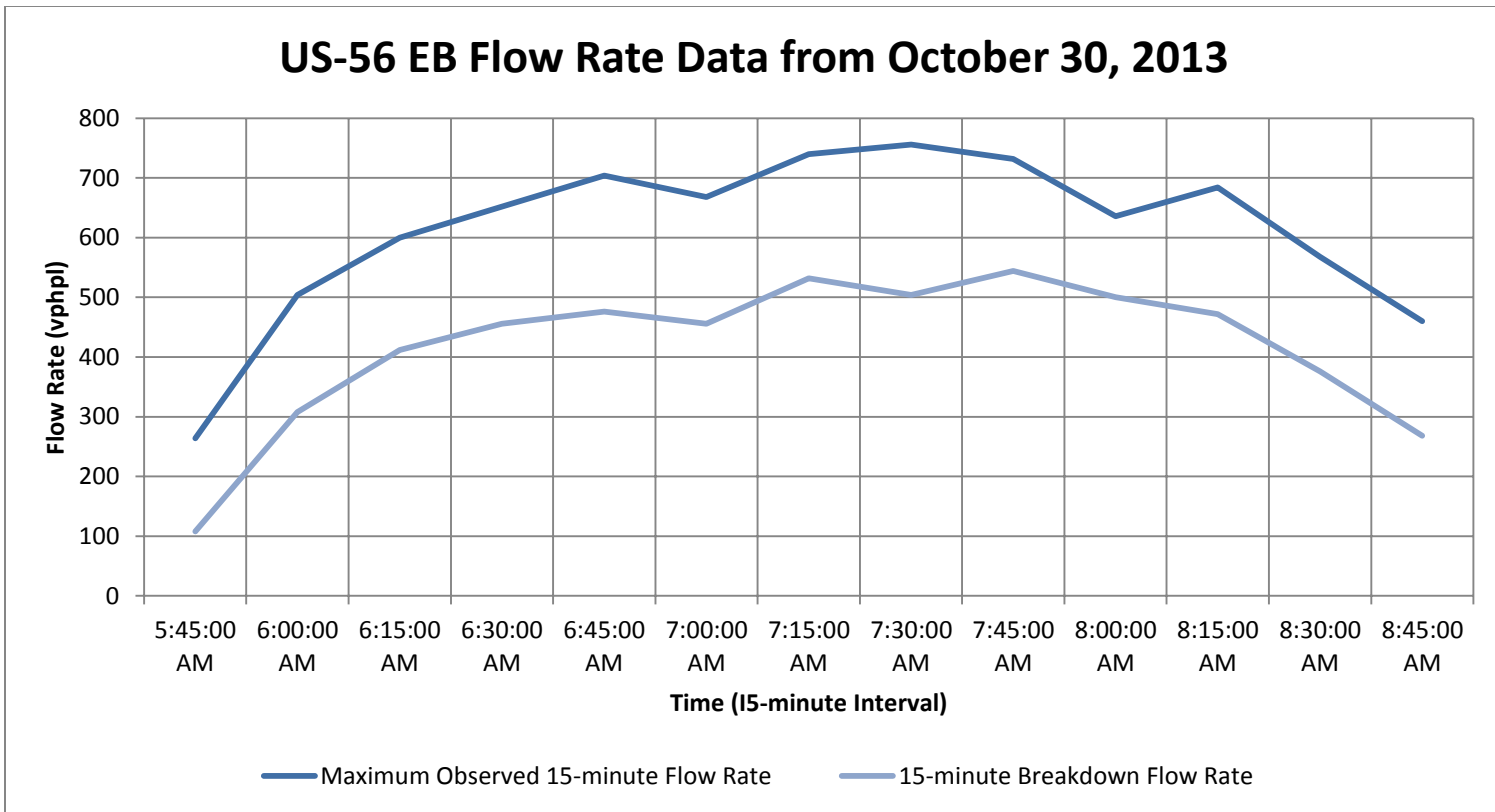


Figure 4.5. US-56 EB site peak time period flow rate vs. mean speed graphs

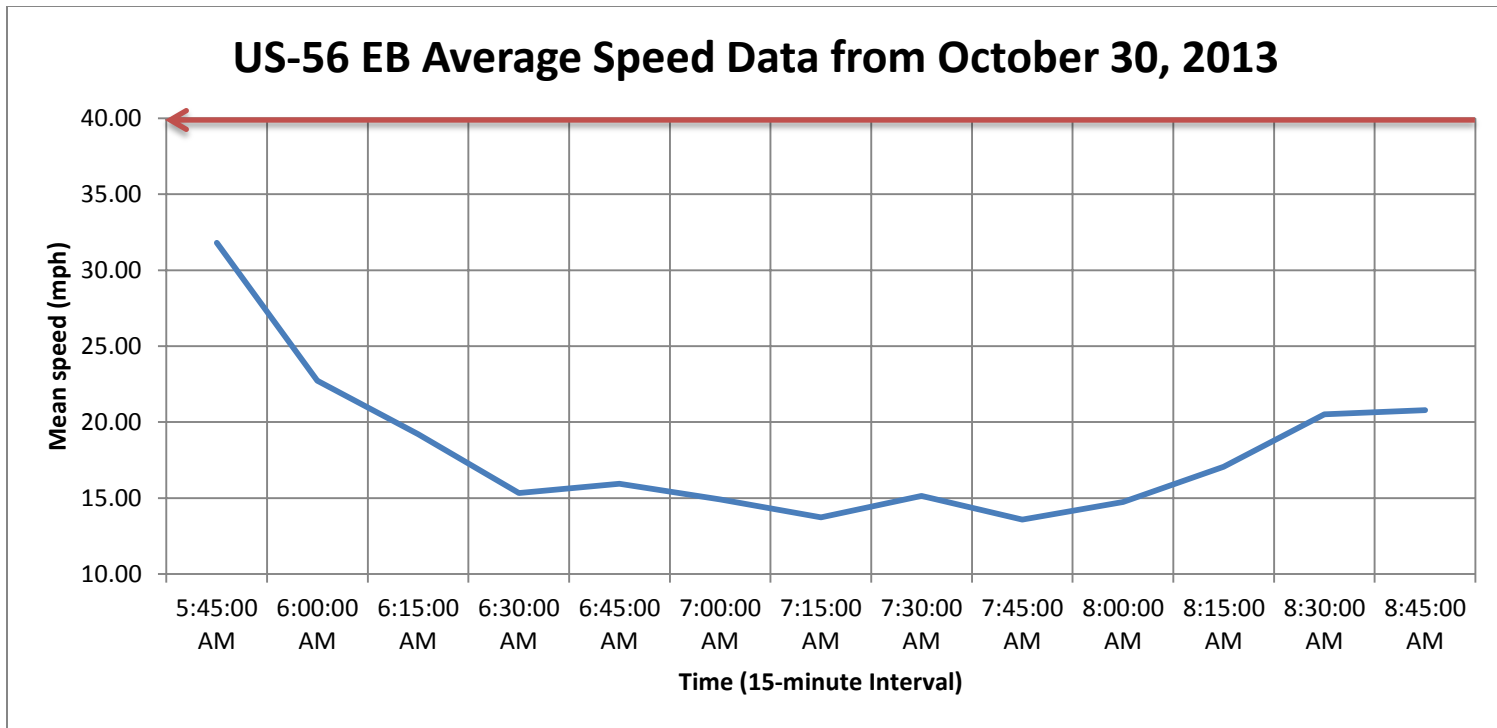


Figure 4.5. US-56 EB site peak time period flow rate vs. mean speed graphs (continued)

4.2.5 US-56 WB

Similar to the US-56 EB direction, the US-56 WB direction also encountered rain for the first four days of the data collection process. Data from the rainy days were discarded due to data inconsistencies, but one full 24-hr period of data collection was obtained in which the peak time period was found. Maximum capacity identified during the peak time period was 1496 pcphpl with a standard deviation of 132.36 pcphpl, as shown in Table 4.6. The normal speed limit for this site was 50 mph while the work zone speed limit was found to equal 40 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure 4.6 provides graphs to observe the correlation which proves that capacity was met on this site. Determined mean speed for the data collected at the site was 38.05 mph, as shown in Figure A.6 in Appendix A.

Table 4.6. US-56 WB site for Maximum Observed 15-minute Flow Rate Method

US-56 WB Site								
Date	Time Period	Average Speed (mph at 2 mph intervals)	Percent Cars	Percent Buses	Percent Trucks	Maximum Flow Rate (pcphpl)	Maximum Volume (pcphpl)	Breakdown Flow Rate (pcphpl)
10/28/2013	11:00 am to Midnight	39.65	89.92%	0.32%	9.76%	1465	1372	1339
10/29/2013	24 hrs	37.77	93.31%	0.19%	6.50%	1496	1404	1388
10/30/2013	24 hrs	36.93	90.45%	0.15%	6.52%	1201	1096	1056
TOTAL/AVERAGE		38.12	91.23%	0.22%	7.59%	1387	1291	1261
AVG STANDARD DEVIATION		---	---	---	---	132.36	138.27	146.33

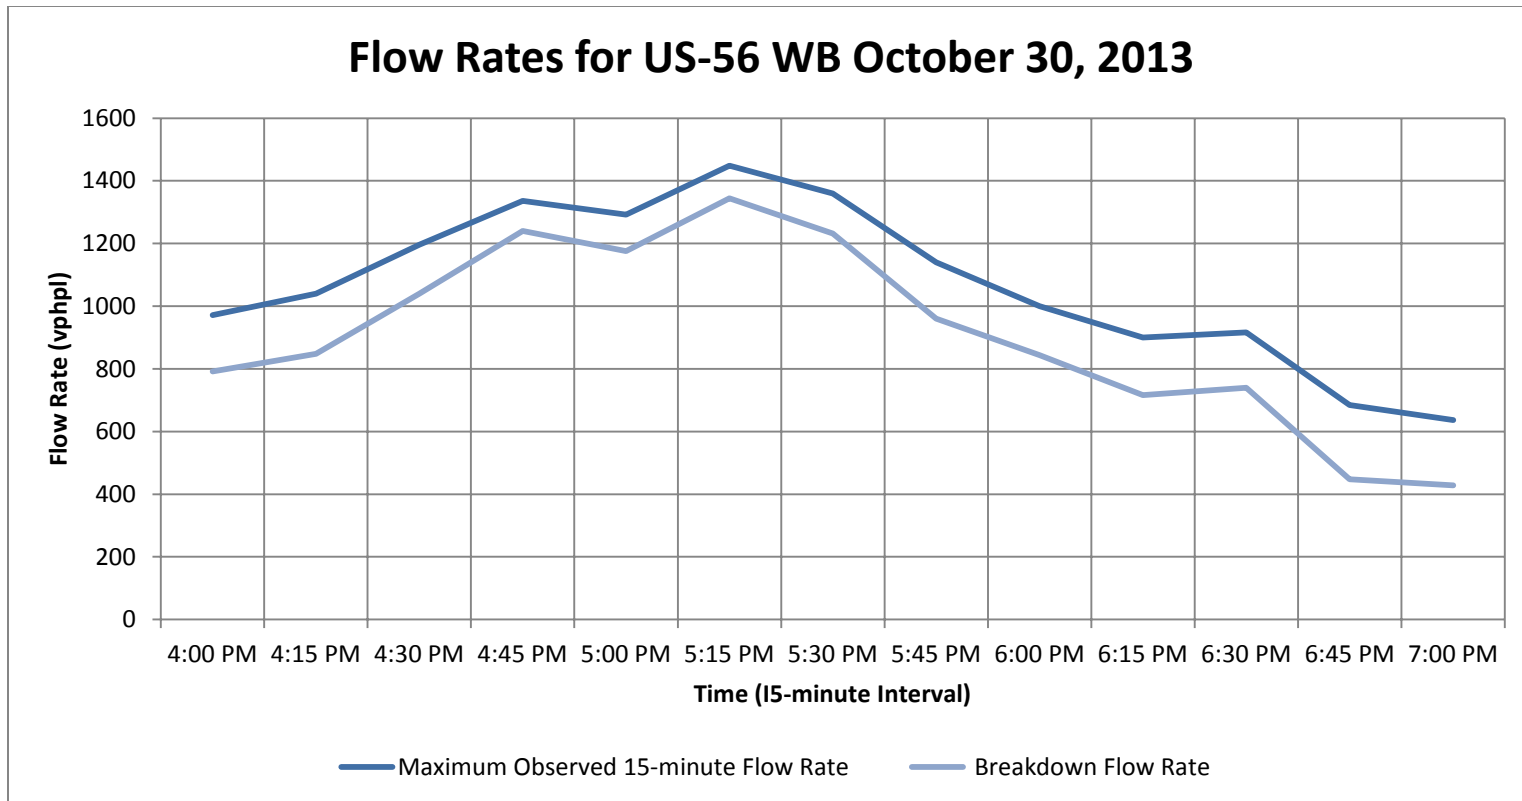


Figure 4.6. US-56 WB site peak time period flow rate vs. mean speed graphs

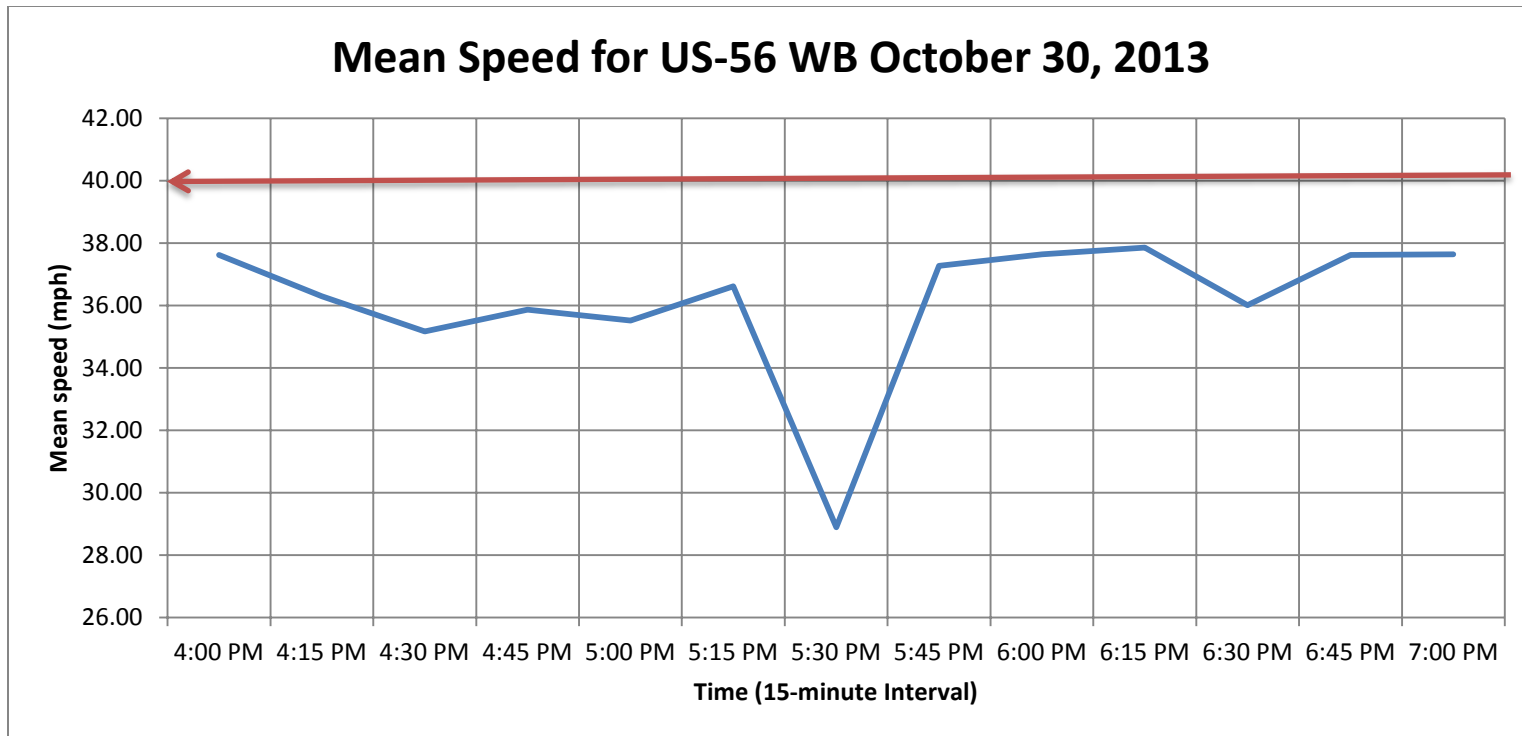


Figure 4.6. US-56 WB site peak time period flow rate vs. mean speed graphs (continued)

4.3 Platooning Method

The Platooning Method provided evidence that estimated capacities established in the Maximum Observed 15-minute Flow Rate Method were accurate. However, based on obtained data, justification of an upper limit existing with the Platooning Method and a lower limit existing with the Maximum Observed 15-minute Flow Rate Method was not established in this study. Instead, the opposite was found to be true. Various reasons can be identified for this difference, but the overall determination can be made that since platooning factors were not assumed but practically found for each site, the Platooning Method is a more accurate approach than previous studies.

Overall analysis per site for the Platooning Method is provided in the following subsections. Additional details on data collected at each site with respect to the Platooning Method are provided in Appendix B. Summary tables and graphs for each site are also shown and explained in Appendix B. The graphs in Appendix B show the peak time period for the maximum 24-hr period per site. The platooning factor per site was multiplied by the maximum potential capacity to discern the maximum estimated capacity per site.

In the Platooning Method, potential capacity per site can only be found if more than five platooning vehicles are found per interval for three consecutive time intervals. This approach eliminates high values for capacities during non-peak hours of the day/night. When only one to three vehicles are seen in-platoon, average headways became smaller and therefore provide larger estimated capacities.

4.3.1 K-10 EB

The K-10 EB observed data is provided in Table 4.7 and the setup is shown in Figure 4.7. As discussed, data collected during rainy days were discarded from the analysis, identified by italics and underlining in Table 4.7. Excluding those three days, the maximum estimated capacity for this site was found to equal 1358 pcphpl with a platooning factor of 0.8 and a standard deviation of 31.06 pcphpl. This was due to the amount of vehicles found in-platoon during the peak time period from the respective day where the maximum estimated capacity could be seen. This platooning factor was relatively high compared to other sites but this site was also the most traversed highway under review. The average speed in 2 mph intervals over the provided peak time periods was found to equal 58.03 mph. The normal speed limit for this site was 70 mph while the work zone speed limit was found to equal 60 mph. The average and the average standard deviation were both based on the peak time period of the site. The full set of observed data for the site is provided in Figure B.1 in Appendix B.

Table 4.7. Results for K-10 EB site using Platooning Method

K-10 EB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/28/2013	10:00 am to Midnight	92.10%	0.91%	6.99%	0.80	1530	1224	1586	1269
10/29/2013*	24 hrs	57.39%	1.98%	40.63%	0.80	1504	1203	1815	1452
10/30/2013*	24hrs	39.48%	16.20%	44.32%	0.80	1560	1248	1956	1565
10/31/2013*	24hrs	44.12%	43.99%	11.89%	0.80	1517	1214	1741	1393
11/1/2013	24hrs	93.68%	0.63%	5.69%	0.80	1556	1245	1602	1282
11/2/2013	24hrs	96.85%	0.18%	2.97%	0.80	1468	1174	1490	1192
11/3/2013	24hrs	97.43%	0.08%	2.49%	0.80	1452	1162	1470	1176
11/4/2013	Midnight to 11:00 am	93.62%	0.64%	5.74%	0.80	1648	1318	1697	1358
TOTAL/AVERAGE*		94.74%	0.49%	4.78%	0.80	1531	1225	1569	1255
AVG STANDARD DEVIATION*		---	---	---	---	37.76	30.21	38.82	31.06

* It rained heavily during the days 10/29 to 10/31.

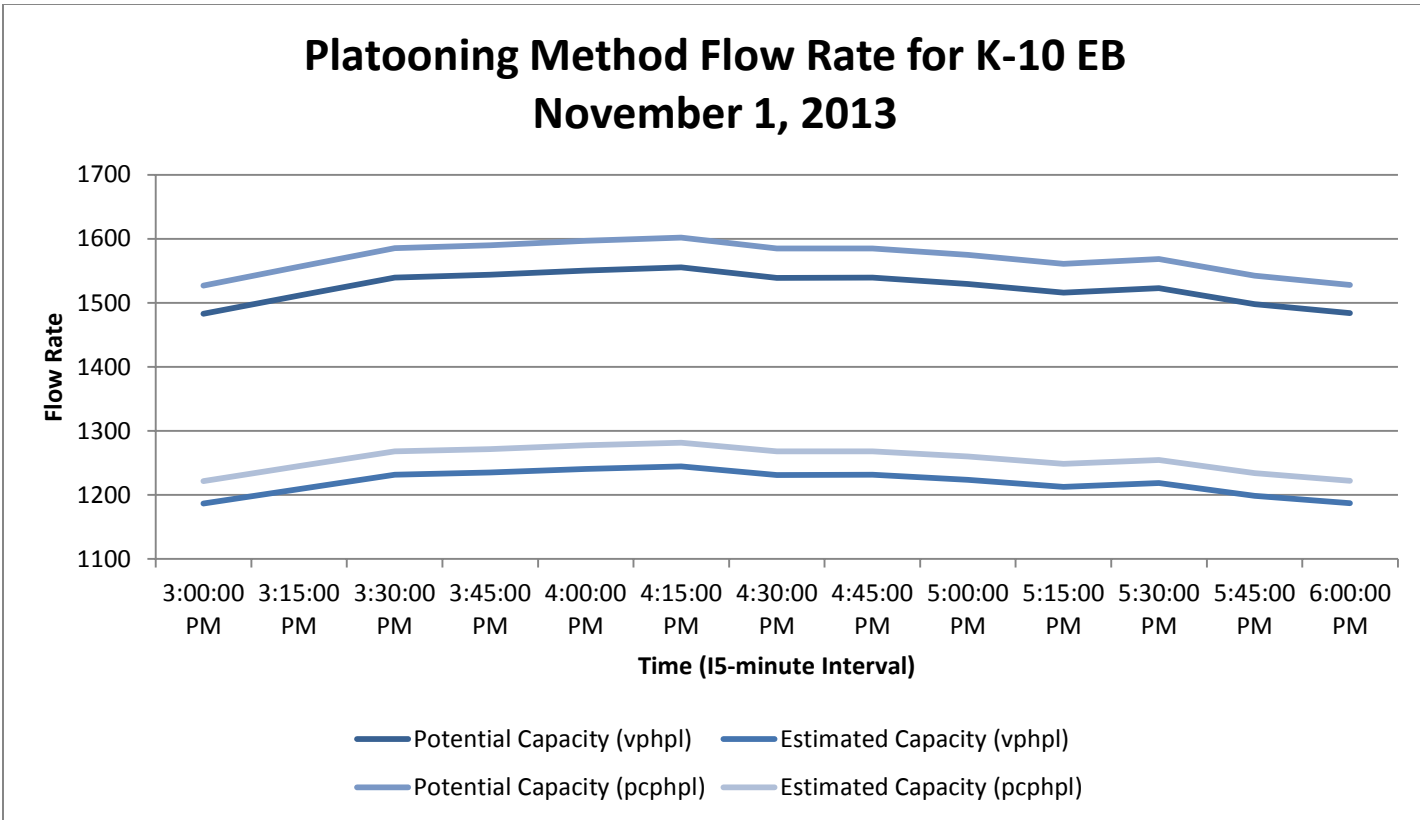


Figure 4.7. K-10 EB site peak time period flow rate graph

4.3.2 K-18 EB

The K-18 EB observed data is shown in Table 4.8 and Figure 4.8. The table provides estimated capacities per day. The maximum estimated capacity for this site was found to equal 1113 pcphpl with a standard deviation of 25.57 pcphpl. The estimated capacity is low for this site because the platooning factor was found to equal 0.68. This value was low due to the amount of vehicles that were observed in-platoon. Although this site is traversed frequently, construction had been underway for the past several months leading up to the data collection process for this report. Many motorists may have found a more direct route to their final destination, thus reducing vehicle volume on the roadway, and decreasing the flow rate on the roadway, and leading to a lower platooning factor. The average speed in 2 mph intervals over the provided peak time periods was found to equal 55.84 mph. The normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The average and the average standard deviation were both based on the peak time period of the site. The full set of observed data for the site is presented in Figure B.2 in Appendix B.

Table 4.8. Results for K-18 EB site using Platooning Method

K-18 EB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/19/2013	3:15 pm to Midnight	97.16%	0.50%	2.34%	0.68	1526	1038	1545	1051
10/20/2013	24 hrs	98.02%	0.08%	1.90%	0.68	1525	1037	1540	1047
10/21/2013	24hrs	93.17%	0.40%	6.43%	0.68	1564	1064	1616	1099
10/22/2013	24hrs	91.61%	0.48%	7.91%	0.68	1573	1070	1637	1113
10/23/2013	24hrs	92.73%	0.36%	6.90%	0.68	1498	1019	1551	1055
10/24/2013	24hrs	92.20%	0.37%	7.43%	0.68	1534	1043	1592	1083
10/25/2013	24hrs	93.49%	0.47%	6.04%	0.68	1541	1048	1589	1081
10/26/2013	24hrs	96.26%	0.27%	3.47%	0.68	1522	1035	1549	1053
10/27/2013	Midnight to 10:15 am	96.34%	0.19%	3.47%	0.68	1519	1033	1546	1051
TOTAL/AVERAGE		94.55%	0.35%	5.10%	0.68	1534	1043	1574	1070
AVG STANDARD DEVIATION		---	---	---	---	36.58	24.88	37.60	25.57

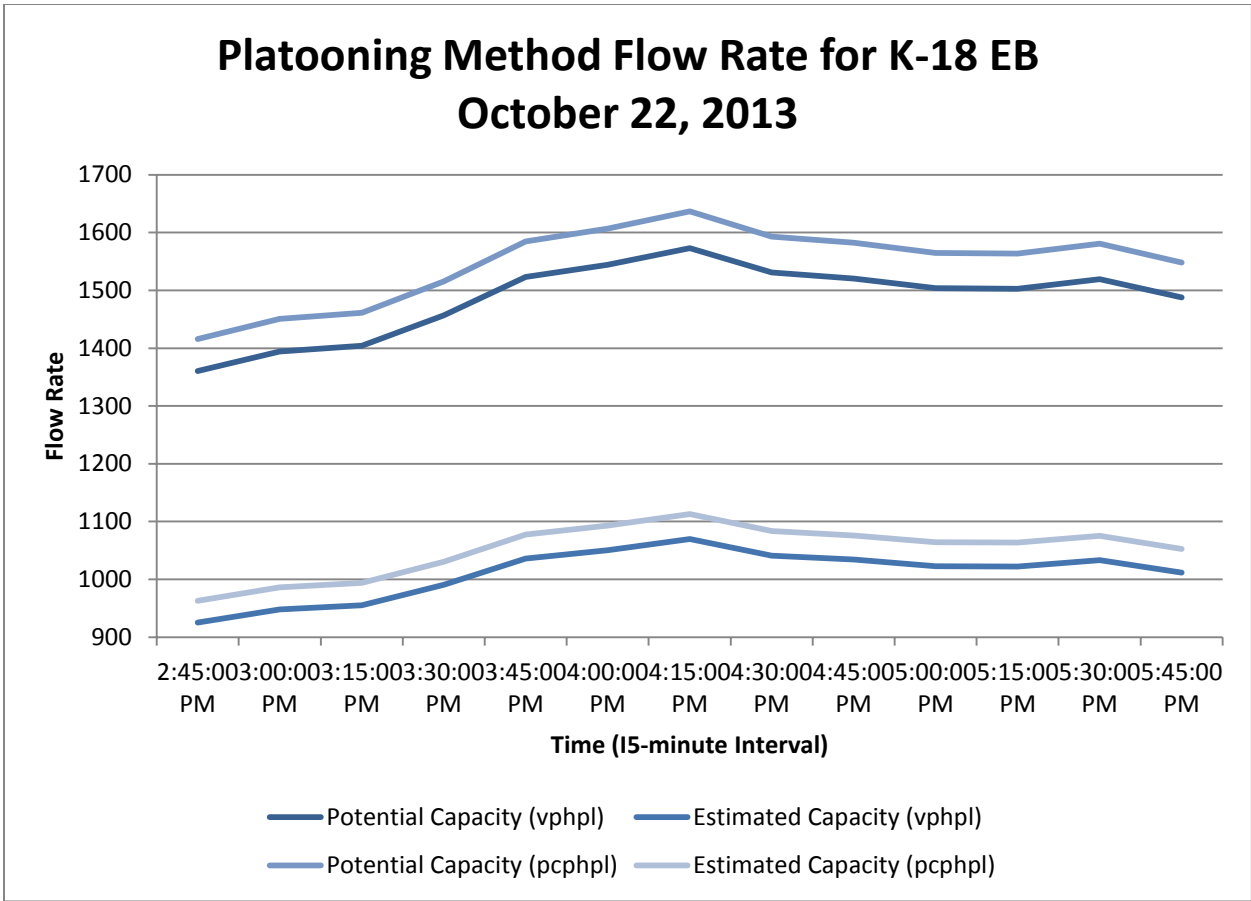


Figure 4.8. K-18 EB site peak time period flow rate graph

4.3.3 K-18 H-H EB

The maximum estimated capacity for the K-18 H-H EB site was found to equal 1207 pcphpl with a standard deviation of 26.82 pcphpl, as shown in Table 4.9. The platooning factor for this site was 0.72 which was the average of each site and thereby considered the most accurate due to motorist usage during peak time periods. Traffic on the roadway in this section had to move through a head-to-head section while accounting for large construction trucks entering and leaving the construction location. However, the traversable lane was approximately 30 ft from the construction so traffic flow was generally not disrupted due to large volumes in the work zone. Figure 4.9 provides the peak time period flow rate graph for the peak 24-hr period on this site. The average speed in 2 mph intervals over the provided peak time periods was found to equal 55.93 mph. The normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure B.3 shown in Appendix B provides the full observed data on this site.

Table 4.9. Results for K-18 H-H EB site using Platooning Method

K-18 H-H EB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/19/2013	2:15 pm to Midnight	89.08%	0.66%	10.26%	0.72	1591	1146	1675	1206
10/20/2013	24 hrs	92.57%	0.11%	7.32%	0.72	1586	1142	1644	1184
10/21/2013	24hrs	86.57%	0.50%	12.93%	0.72	1573	1133	1676	1207
10/22/2013	24hrs	86.64%	0.62%	12.74%	0.72	1569	1130	1671	1203
10/23/2013	24hrs	86.94%	0.42%	12.64%	0.72	1544	1112	1643	1183
10/24/2013	24hrs	86.52%	0.46%	13.02%	0.72	1555	1120	1658	1194
10/25/2013	24hrs	86.60%	0.60%	12.81%	0.72	1541	1110	1641	1182
10/26/2013	24hrs	90.54%	0.35%	9.11%	0.72	1545	1112	1616	1164
10/27/2013	Midnight to 10:00 am	92.75%	0.32%	6.93%	0.72	1624	1169	1681	1211
TOTAL/AVERAGE		88.69%	0.45%	10.86%	0.72	1570	1130	1656	1193
AVG STANDARD DEVIATION		---	---	---	---	35.47	25.54	37.25	26.82

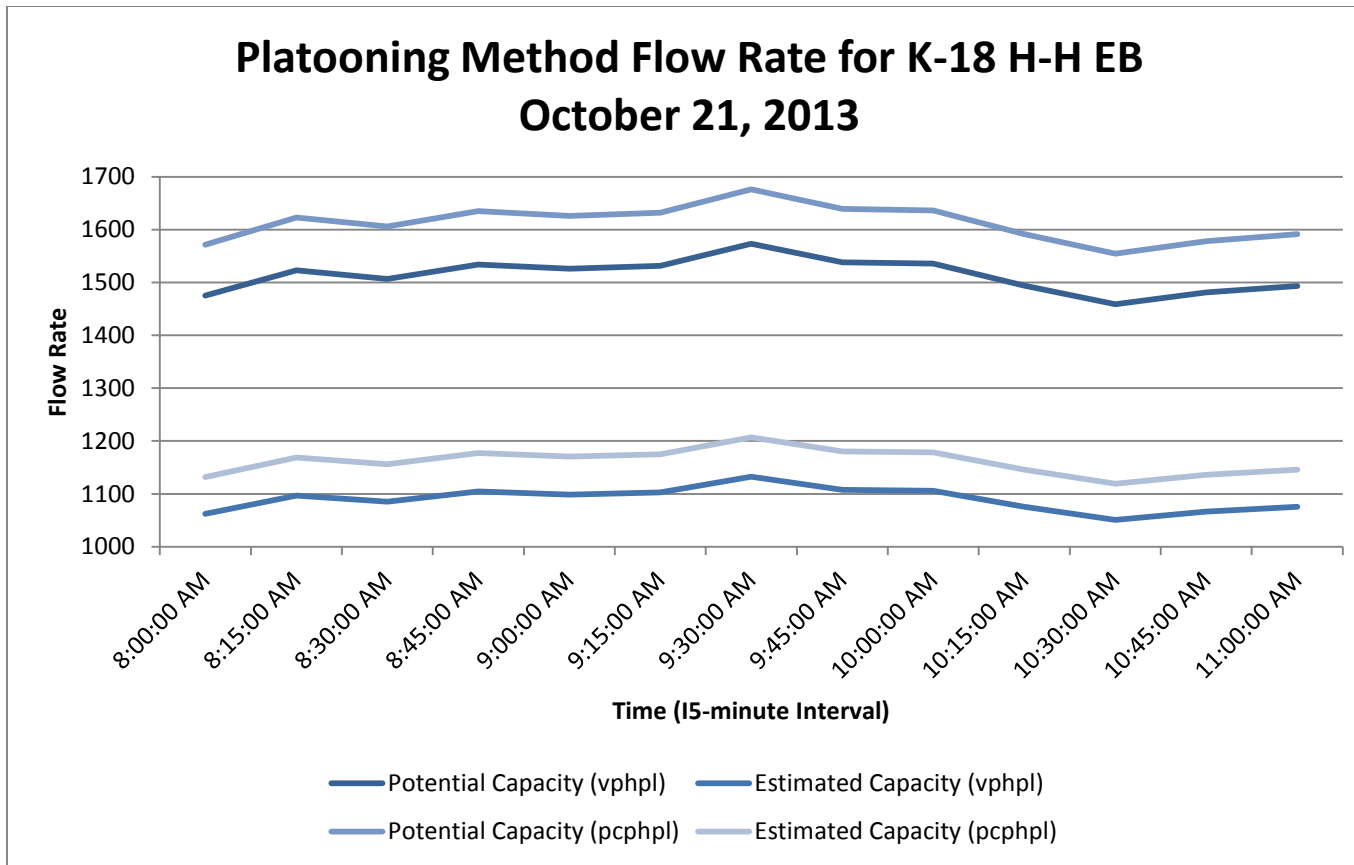


Figure 4.9. K-18 H-H EB site peak time period flow rate graph

4.3.4 K-18 H-H WB

The K-18 H-H WB site was under the same conditions as the EB direction but had a maximum estimated capacity of 1020 pcphpl with a standard deviation of 19.71 pcphpl, as shown in Table 4.10. Similar to the K-18 EB site, estimated capacity can be seen to be lower than potential capacity due to the platooning factor of 0.62 for this site. Motorists could use several alternative routes to avoid this site, possibly causing the low platooning factor. If some of the passenger cars chose alternative routes, traffic volume on the roadway would decrease, leading to less in-platoon vehicles. Since estimated capacity accounts for the platooning factor and the platooning factor accounts for the amount of in-platoon vehicles, the estimated capacity would be lower than expected in this situation. The peak time period flow rate graph for the maximum 24-hr period for this site is shown in Figure 4.10. The average speed in 2 mph intervals over the provided peak time periods was found to equal 57.13 mph. The normal speed limit for this site was 65 mph while the work zone speed limit was found to equal 55 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure B.4 in Appendix B provides the full observed data from this site.

Table 4.10. Results for K-18 H-H WB site using Platooning Method

K-18 H-H WB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/19/2013	2:15 pm to Midnight	93.84%	0.72%	5.44%	0.62	1490	924	1533	950
10/20/2013	24 hrs	95.17%	0.20%	4.63%	0.62	1498	929	1533	951
10/21/2013	24hrs	89.30%	0.46%	10.24%	0.62	1498	929	1576	977
10/22/2013	24hrs	88.70%	0.77%	10.53%	0.62	1485	921	1565	971
10/23/2013	24hrs	88.51%	0.58%	10.91%	0.62	1503	932	1587	984
10/24/2013	24hrs	89.14%	0.44%	10.42%	0.62	1563	969	1646	1020
10/25/2013	24hrs	89.81%	0.48%	9.71%	0.62	1512	937	1587	984
10/26/2013	24hrs	93.53%	0.25%	6.23%	0.62	1489	923	1536	952
10/27/2013	Midnight to 10:00 am	94.32%	0.27%	5.41%	0.62	1478	916	1519	942
TOTAL/AVERAGE		91.37%	0.46%	8.17%	0.62	1502	931	1565	970
AVG STANDARD DEVIATION		---	---	---	---	30.51	18.92	31.79	19.71

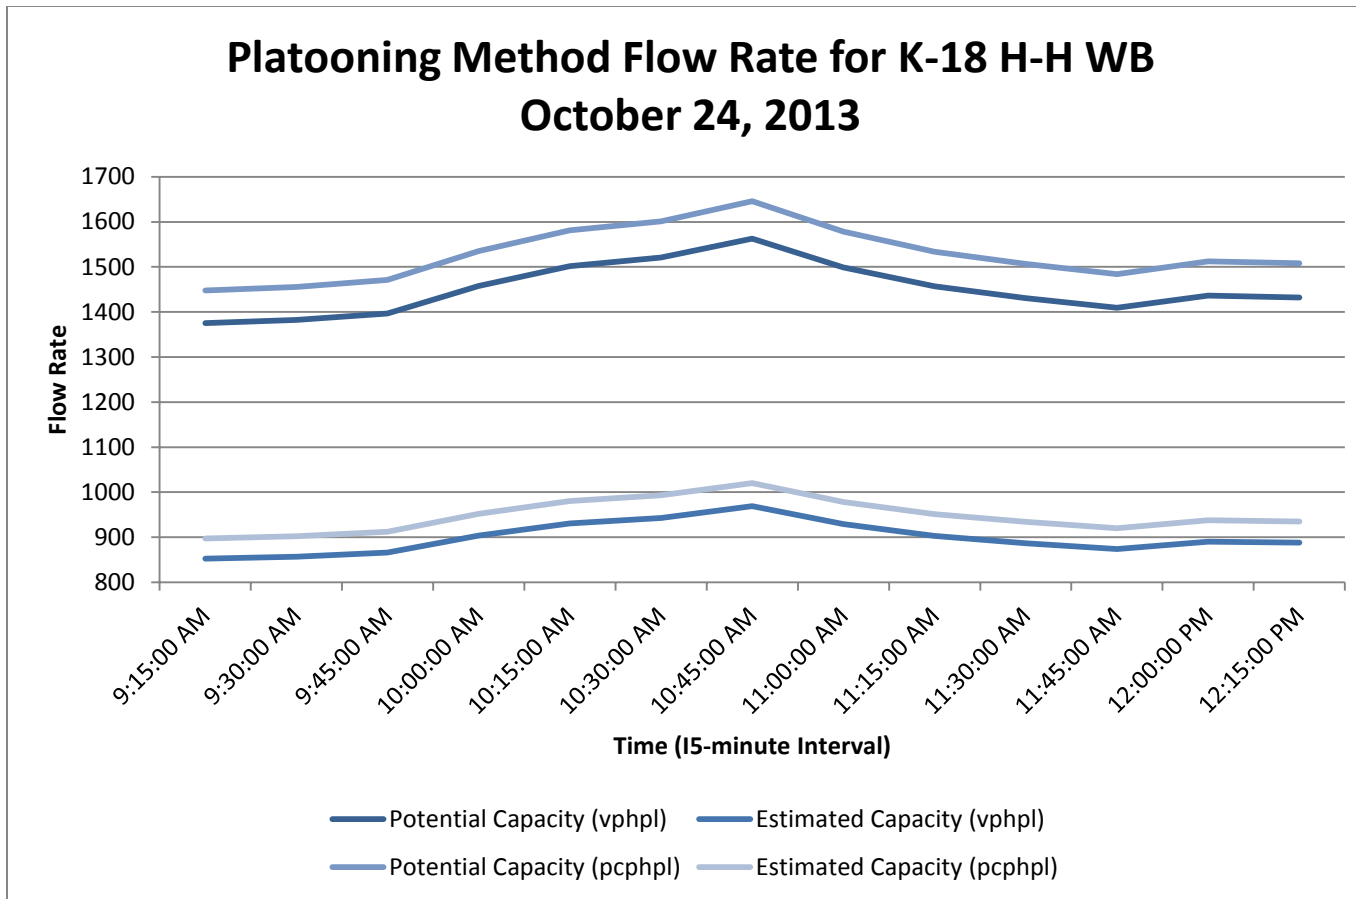


Figure 4.10. K-18 H-H WB site peak time period flow rate graph

4.3.5 US-56 EB

The traffic signal upstream from the US-56 EB data collection site may have occasionally controlled the platooning factor, thus causing the platooning factor of 0.69 for the US-56 EB site. Due to the low platooning factor, a lower estimated capacity can be expected. The maximum estimated capacity for the US-56 EB site was equal to 1204 pcphpl with the standard deviation equal to 33.4 pcphpl, as shown in Table 4.11. This site was also affected by rainy days and, therefore, only three days' worth of data was available to analyze. Figure 4.11 provides the peak time period flow rate graph for the site. The average speed in 2 mph intervals over the provided peak time periods was found to equal 27.71 mph. The normal speed limit was found to equal 50 mph while the work zone speed limit was found to equal 40 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure B.5 provides the full observed data at this site, as shown in Appendix B.

Table 4.11. Results for US-56 EB site using Platooning Method

US-56 EB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/28/2013	10:30 am to Midnight	91.85%	1.19%	6.96%	0.69	1638	1130	1699	1172
10/29/2013	24 hrs	93.27%	0.67%	6.05%	0.69	1691	1167	1744	1204
10/30/2013	Midnight to 10:30 am	93.96%	0.44%	5.65%	0.69	1643	1134	1692	1167
TOTAL/AVERAGE		93.02%	0.77%	6.22%	0.69	1658	1144	1712	1181
AVG STANDARD DEVIATION		---	---	---	---	46.8	32.3	48.4	33.4

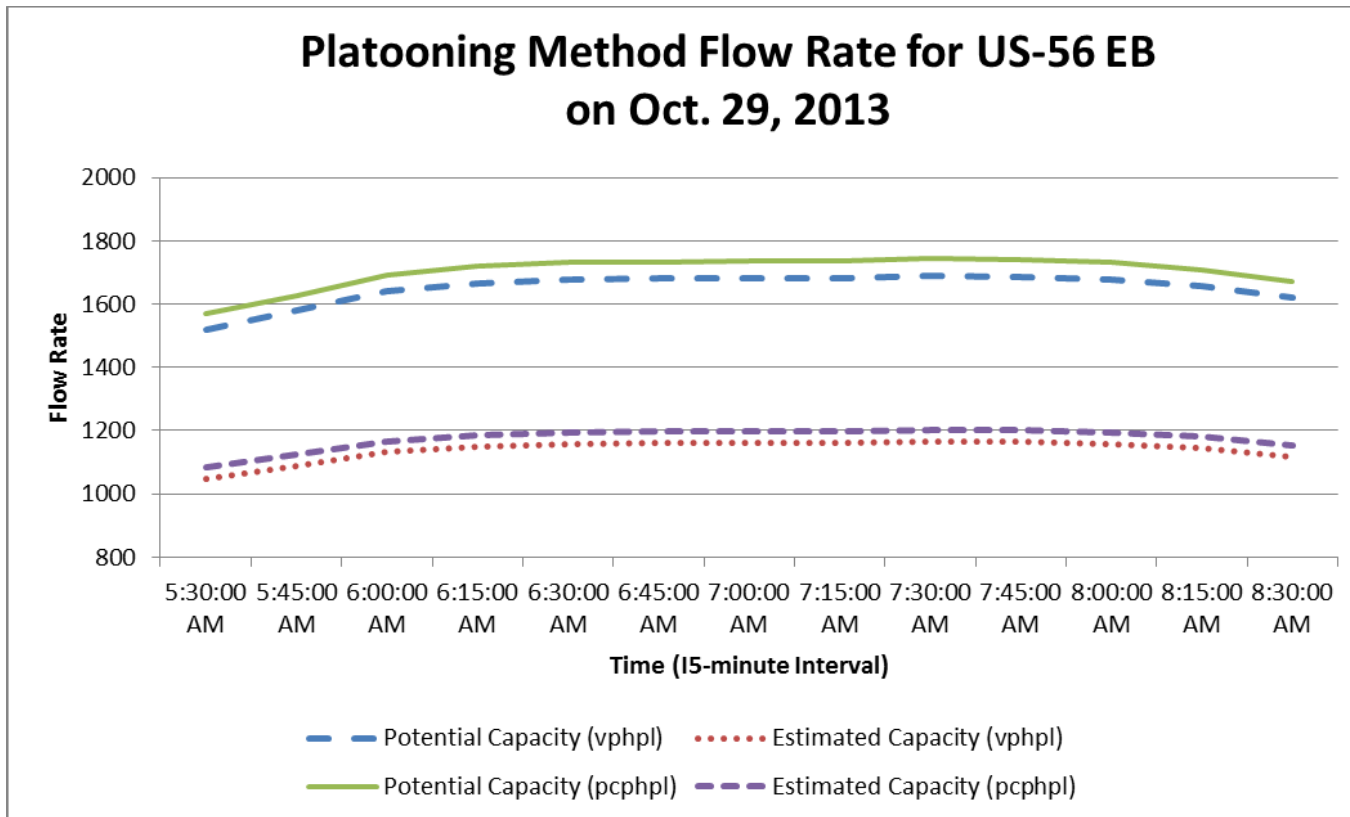


Figure 4.11. US-56 EB site peak time period flow rate graph

4.3.6 US-56 WB

The US-56 WB site also had an upstream traffic signal which, similar to the US-56 EB site, may have controlled traffic flow so that the platooning factor became inaccurate. However, the platooning factor for this site was found to be 0.84, thus proving that the traffic signal had no control over platooning vehicles for this site. The US-56 WB site had an anticipated high volume on the roadway due to the location to Interstate 35. In addition, an intermodal system is located in Gardner which could have led to an increased percentage of heavy trucks entering the work zone site, thereby leading to more in-platoon vehicles. Maximum estimated capacity for the US-56 WB site was equal to 1387 pcphpl with a standard deviation of 30.99 pcphpl, as shown in Table 4.12. The peak time period flow rate graph in Figure 4.12 provides the graph for the maximum 24-hr flow rate on this site. The average speed in 2 mph intervals over the provided peak time periods was found to equal 38.12 mph. The normal speed limit for this site was 50 mph while the work zone speed limit was found to equal 40 mph. The average and the average standard deviation were both based on the peak time period of the site. Figure B.6 shown in Appendix B provides the graph of the full observed data for this site.

Table 4.12. Results for US-56 WB site using Platooning Method

US-56 WB Site for the Platooning Method									
Date	Time Period	Percent Cars	Percent Buses	Percent Trucks	Platooning Factor	Potential Capacity (vphpl)	Estimated Capacity (vphpl)	Potential Capacity (pcphpl)	Estimated Capacity (pcphpl)
10/28/2013	11:00 am to Midnight	89.92%	0.32%	9.76%	0.84	1573	1321	1651	1387
10/29/2013	24 hrs	93.31%	0.19%	6.50%	0.84	1548	1300	1599	1343
10/30/2013	24 hrs	90.45%	0.15%	6.52%	0.84	1483	1246	1489	1251
TOTAL/AVERAGE		91.23%	0.22%	7.59%	0.84	1535	1289	1580	1327
AVG STANDARD DEVIATION		---	---	---	---	35.59	29.90	36.89	30.99

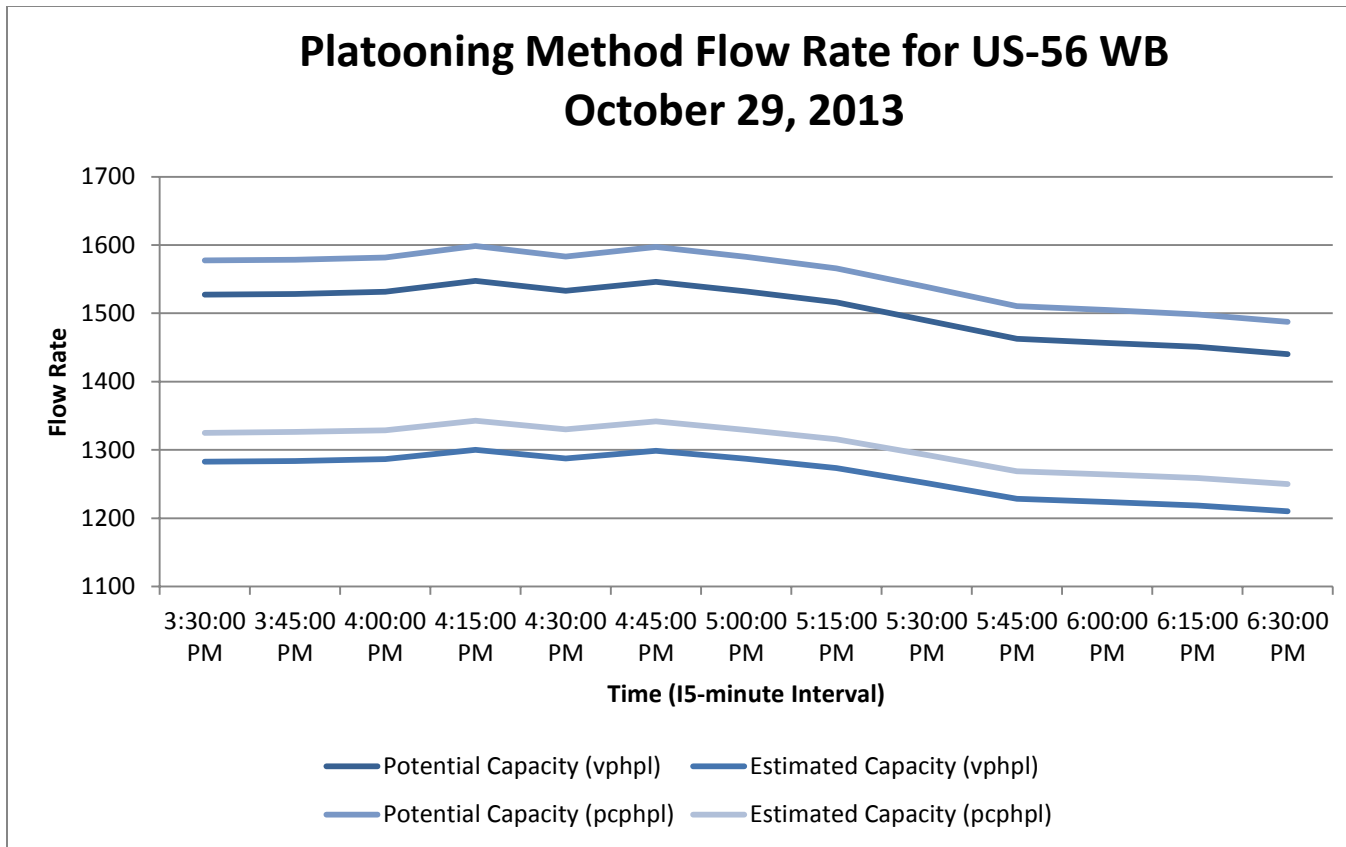


Figure 4.12. US-56 WB site peak time period flow rate graph

4.4 Findings

This section summarizes the findings for each site setup. The following paragraph details the average capacity per method and provides a range to be used if necessary.

4.4.1 Maximum Observed 15-minute Flow Rate Method

Maximum observed 15-minute flow rate capacities were found for five of the six data collection sites. For the sixth site, since no breakdown events occurred, capacity could not be established. Capacities that were found are presented below:

- K-10 EB Capacity = 1730 pcphpl
 - Standard deviation = 47 pcphpl
- K-18 EB Capacity = 1551 pcphpl
 - Standard deviation = 233 pcphpl
- K-18 H-H EB Capacity = 1530 pcphpl
 - Standard deviation = 157 pcphpl
- K-18 H-H WB Capacity = Unknown
 - Standard deviation = Unknown
- US-56 EB Capacity = 1036 pcphpl
 - Standard deviation = 133 pcphpl
- US -56 WB Capacity = 1496 pcphpl

Based on the Maximum Observed 15-minute Flow Rate Method, the average capacity was 1469 pcphpl with an average standard deviation of 141 pcphpl. When determining work zone capacity on a rural highway in Kansas while using the Maximum Observed 15-minute Flow Rate Method, it is suggested that a maximum capacity value of 1500 pcphpl could be used.

4.4.2 Platooning Method

The 15-minute breakdown flow rate method provided capacities for all six sites for the observed data. The capacities were:

- K-10 EB Capacity = 1358 pcphpl
 - Standard deviation = 31 pcphpl
- K-18 EB Capacity = 1113 pcphpl
 - Standard deviation = 26 pcphpl
- K-18 H-H EB Capacity = 1207 pcphpl
 - Standard deviation = 27 pcphpl
- K-18 H-H WB Capacity = 1020 pcphpl
 - Standard deviation = 20 pcphpl
- US-56 EB Capacity = 1204 pcphpl
 - Standard deviation = 33 pcphpl

- S -56 WB Capacity = 1387 pcphpl
 - Standard deviation = 31 pcphpl

Based on the Platooning Method, the average capacity was 1195 pcphpl with an average standard deviation of 28 pcphpl. When determining work zone capacity on a rural highway in Kansas while using the Platooning Method, the recommended capacity value of 1200 pcphpl should be used with a standard deviation of 28 pcphpl.

4.5 Comparison of Two Methods

A comparison between the Maximum Observed 15-minute Flow Rate Method and the Platooning Method were conducted with the intention of identifying which method should be used to estimate capacity on rural highway work zones in Kansas. The Maximum Observed 15-minute Flow Rate Method does not require much data to accurately provide estimated capacity for the work zone under review. However, the Platooning Method requires a substantial amount of data in order to utilize the method. If sufficient data is not obtained, the proportion of in-platooning vehicles will be low and capacity cannot be determined.

If even a small amount of data is obtained per site, the maximum observed 15-minute flow rate is the recommended capacity estimation method. If the amount of data collected at the site is abundant, the Platooning Method should be used. The Platooning Method is a more accurate method when properly accounting for the platooning factor. However, in order to obtain an accurate platooning factor, a large amount of in-platooning vehicles must be present.

In this study, the Maximum Observed 15-minute Flow Rate Method provided greater values for capacities per site than was expected, while the Platooning Method provided much lower capacities than expected. Overall, the expected capacities were found to be comparable to other studies with respect to work zone capacity estimation. The overall capacity that should be used in the event no data is to be collected is the most conservative approach of 1500 pcphpl. Although the Platooning Method has a much lower average standard deviation, it would not be the more reasonable choice because the average capacity is far lower than that of the Maximum Observed 15-minute Flow Rate Method's average capacity. As previously discussed, both of these values are respectable based on past research in this field and either approach would be warranted for design.

CHAPTER 5. SUMMARY AND CONCLUSIONS

5.1 Summary

As stated in Chapter 2, Bham and Khazraee determined that the mean queue discharge flow rate was less than the breakdown flow rate due in part to traffic flow failing to average congested queue conditions (Bham and Khazraee 2011). Maximum sustained 15-minute flow rate was found to be conservative and should be adjusted in accordance with the mean queue discharge flow and breakdown flow rates. Based on these findings, a study had to be conducted that would exploit breakdown events on rural highway work zones in order to estimate the capacity of such roadway conditions. Therefore, the study analyzed the effects of breakdown flow rates on threshold speed for specific work zones.

Currently, capacity for this research is defined as the maximum observed 15-minute flow rate in pcphpl that a rural work zone can sustain under prevailing traffic and roadway conditions in one direction. Capacity was observed in 5 out of 6 rural work zone locations when using the Maximum Observed 15-minute Flow Rate Method. Average capacity found per site equaled 1469 pcphpl with a standard deviation of 141 pcphpl. Capacity was observed in 6 out of 6 rural work zone locations when using the Platooning Method. Average capacity found per site equaled 1273 pcphpl with a standard deviation of 28 pcphpl. The proposed capacity to be used for rural highway work zones is 1500 pcphpl with a standard deviation of 141 pcphpl.

5.2 Conclusions

In conclusion, the Maximum Observed 15-minute Flow Rate Method included four parameters that estimated capacity of a work zone site: volume, maximum 15-minute flow rate, 15-minute mean speed, and 15-minute breakdown flow rate. If the observed flow rates did not fall below the threshold value for three consecutive 15-minute intervals, a capacity for the site could not be estimated. The platooning factor included three set parameters to ensure the vehicle was platooning and not free flowing. The three analyzed parameters included headway less than or equal to 4 sec or spacing between the vehicles of 250 ft or less. Once those parameters were analyzed, the third parameter was accounted for to ensure a platooning condition was possible during the specified time. This parameter required at least three consecutive 15-minute intervals with more than five vehicles considered platooning. Once the three parameters were satisfied, a peak time period of 3 hrs was determined per day to provide a realistic analysis of capacity on the roadway during the peak hour. The first two parameters were replicated based on research conducted by Ramezani (2010). The third parameter had to be accounted for due to mass amount of data obtained during this study. No previous studies have been conducted with this parameter; however, by utilizing the third parameter, capacity on the roadways can be compared to results from the Maximum Observed 15-minute Flow Rate Method. In previous studies the Platooning Method was considered an upper limit and the maximum sustained 15-minute flow rate was considered the lower limit with capacity range between the two values (Ramezani 2010). Findings from the two methods under review for this study provide a more precise estimation of capacity due to similar capacity estimations per site.

Based on the expected comparison shown in Section 4.1, the platooning factor yields a consistent result when estimating capacity for a rural highway work zone in Kansas. However, in order to obtain consistent results, significant data is required for this method to be accurately measured for any given site. The Maximum Observed 15-minute Flow Rate capacity can produce respectable capacity values with less data. The other considerable piece of information is “how” the data is obtained. If the data is obtained with any form of capacity-counting device, the device could provide the investigator with an abundant amount of data, but if obtained data was found by roadway inspection during specific time intervals then the required data may not be available to run the Platooning Method. These criteria determine the analysis method for estimating capacity on a roadway if an inspector was used for data collection.

For research analyzed with Kansas work zone data, the determination was made that the most suitable course of action is to use the most conservative approach in finding the capacities which is to use the Maximum Observed 15-minute Flow Rate Method to estimate capacity on rural highway work zones in Kansas. Use of this method for obtained data averaged over every site yielded a result of 1469 pcphpl with a standard deviation of 141 pcphpl. The estimated capacity, rounded to the nearest hundred to maintain consistency with the HCM, then yielded a capacity estimation of 1500 pcphpl. This capacity can be used for any rural highway work zone site in Kansas with similar geometric conditions to sites reviewed for this study. These descriptions are provided in Section 3.3.

In conclusion, for rural highway work zones in Kansas a capacity estimation method should be determined based on the amount of data obtained prior to site construction. Based on observed data and analysis of this study, a capacity of 1500 pcphpl with a standard deviation of 141 pcphpl should be used as a base condition when estimating capacity for a rural highway work zone in Kansas. Geometric conditions should be similar to those shown in Section 3.3 for base conditions to yield an accurate result for the roadway under review.

REFERENCES

- Adeli, H., and Jiang, X. (2003). Neuro-Fuzzy Model for Freeway Work Zone Capacity Estimation. *Journal of Transportation Engineering*, Vol. 129, No. 5, September 1, 2003. ©ASCE, ISSN 0733-947X/2003/5-484-493
- A.S.C.E. (2013). Report Card for America's Infrastructure. 2013 Report Card for America's Infrastructure website. Retrieved April 27, 2014, from www.infrastructurereportcard.org
- Banks, J. H. (2009). Flow Breakdown at Freeway Bottlenecks. *Transportation Research Record: Journal of the Transportation Research Board*, No. 2099, Transportation Research Board of the National Academies, Washington, D.C., pp. 14-21. DOI: 10.3141/2099-02
- Benekohal, R. F., Kaja-Mohideen, A., Chitturi, M. V. (2004). Methodology for Estimating Operating Speed and Capacity in Work Zones. *Transportation Research Record: Journal of the Transportation Research Board*, No. 1883, Transportation Research Board of the National Academies, Washington, DC., pp. 103-111.
- Bham, G. H., and Khazraee, S. H. (2011). Missouri work zone capacity: Results of field data analysis. (Master's thesis), Available from Smart Work Zone Deployment Initiative. (FHWA MO-2011-00X).
- Dissanayake, S., and Liu, L. (2009). *Geometric Design and Other Characteristics Affecting Operating Speeds on Gravel Roads*. Available from K-TRAN of the Kansas Department of Transportation. Reference no: K-TRAN: KSU-06-5
- FHWA, (2014). *Concrete Barriers*, FHWA Safety. Retrieved May 4, 2014, from safety.fhwa.dot.gov/roadway_dept/policy_guide/road_hardware/ctrmeasures/concrete_barriers/
- FHWA (2013). United States Department of Transportation Federal Highway Administration. Work Zone Mobility and Safety Program. Retrieved April 29, 2014, from ops.fhwa.dot.gov/wz/resources/publications/fhwahop12005/gloss.htm
- Garber, N., and Hoel, L. (2009). *Traffic & Highway Engineering*. (4th ed.). Toronto, Canada: Cengage Learning.
- Heaslip, K., Kondyli, A., Arguea, D., Elefteriadou, L., and Sullivan, F. (2009). Estimation of Freeway Work Zone Capacity through Simulation and Field Data. *Transportation Research Record: Journal of the Transportation Research Board*, No. 2130, Transportation Research Board of the National Academies, Washington, D.C., pp. 16-24.
- JAMAR Technologies, Inc. (2008). *TRAX 1 Plus User's Manual*. Retrieved from www.jamartech.com/manuals.html on May 1, 2014.
- KDOT, (2012). *Section 805: Work Zone Traffic Control and Safety*. Retrieved May 4, 2014, from www.ksdot.org/burconsmain/specprov/2007/pdf/07-08001-r06.pdf.
- KDOT, (2010). *2010 Kansas Traffic Accidents Facts Books*. Retrieved March 5, 2015, from www.ksdot.org/Assets/wwwksdotorg/bureaus/burTransPlan/prodinfo/acctstat/2010FactsBook.pdf.
- Lorenz, M., and Elefteriadou, L. (2000). A Probabilistic Approach to Defining Freeway Capacity and Breakdown. Transportation Research Board (Ed.), Fourth International Symposium on Highway Capacity (pp. 84-95). doi: 0097-8515
- Lorenz, M. R., and Elefteriadou, L. (2001). Defining Freeway Capacity as Function of Breakdown Probability. *Transportation Research Record: Journal of the Transportation Research Board*, No. 1776, Transportation Research Board of the National Academies, Washington, D.C., pp. 43-51. Paper No. 01-3343

- Mathew, T., and Rao, K. (2006). Ch. 35 Capacity and Level of Service. Retrieved from [www.cdeep.iitb.ac.in/nptel/Civil Engineering/Transportation Engg 1/35-Ltexthtml/nptel_ceTEI_L35.pdf](http://www.cdeep.iitb.ac.in/nptel/Civil%20Engineering/Transportation%20Engg%201/35-Ltexthtml/nptel_ceTEI_L35.pdf)
- Maze, T. H., Shrock, S. D., and Kamyab, A. (2000). Capacity of Freeway Work Zone Lane Closures. Transportation Research Board (Ed.) (pp. 171-183)
- National Highway Traffic Safety Administration, (2014). 2011 Traffic Fatalities by State. NCSA Data Resource Website. Retrieved April 27, 2014, from www-fars.nhtsa.dot.gov/States/StatesCrashesAndAllVictims.aspx
- Sarasua, W. A., Davis, W. J., Chowdhury, M. A., and Ogle, J. H. (2006). Estimating Interstate Highway Capacity for Short-Term Work Zone Lane Closures. *Transportation Research Record: Journal of the Transportation Research Board*, No. 1948, Transportation Research Board of the National Academies, Washington, D.C., pp. 45-57.
- Ramenzani, H., Benekohal, R. F., and Avrenli, K. A. (2011). Methodology to measure work zone capacity using field data. TRB 2011 Annual Meeting Transportation research board 90th annual meeting, Washington, DC., Paper No. 11-3968
- Transportation Research Board. (2010). *Highway Capacity Manual*. Transportation Research Board, National Research Council, Washington, DC.
- Transportation Research Board. (2000). *Highway Capacity Manual*. Transportation Research Board, National Research Council, Washington, DC.

**APPENDIX A. MAXIMUM OBSERVED 15-MINUTE FLOW RATE METHOD
GRAPHS**

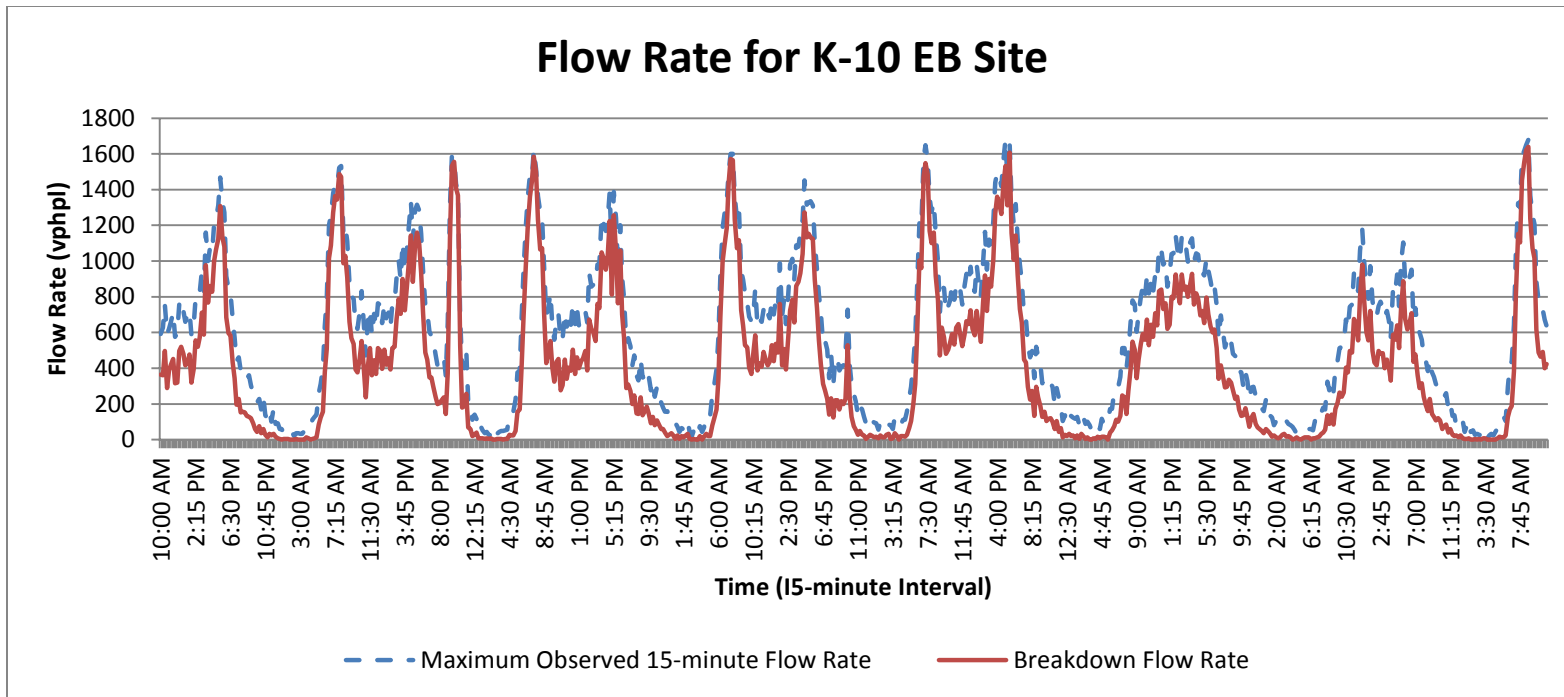


Figure A.1. K-10 EB full flow rate vs. mean speed graphs

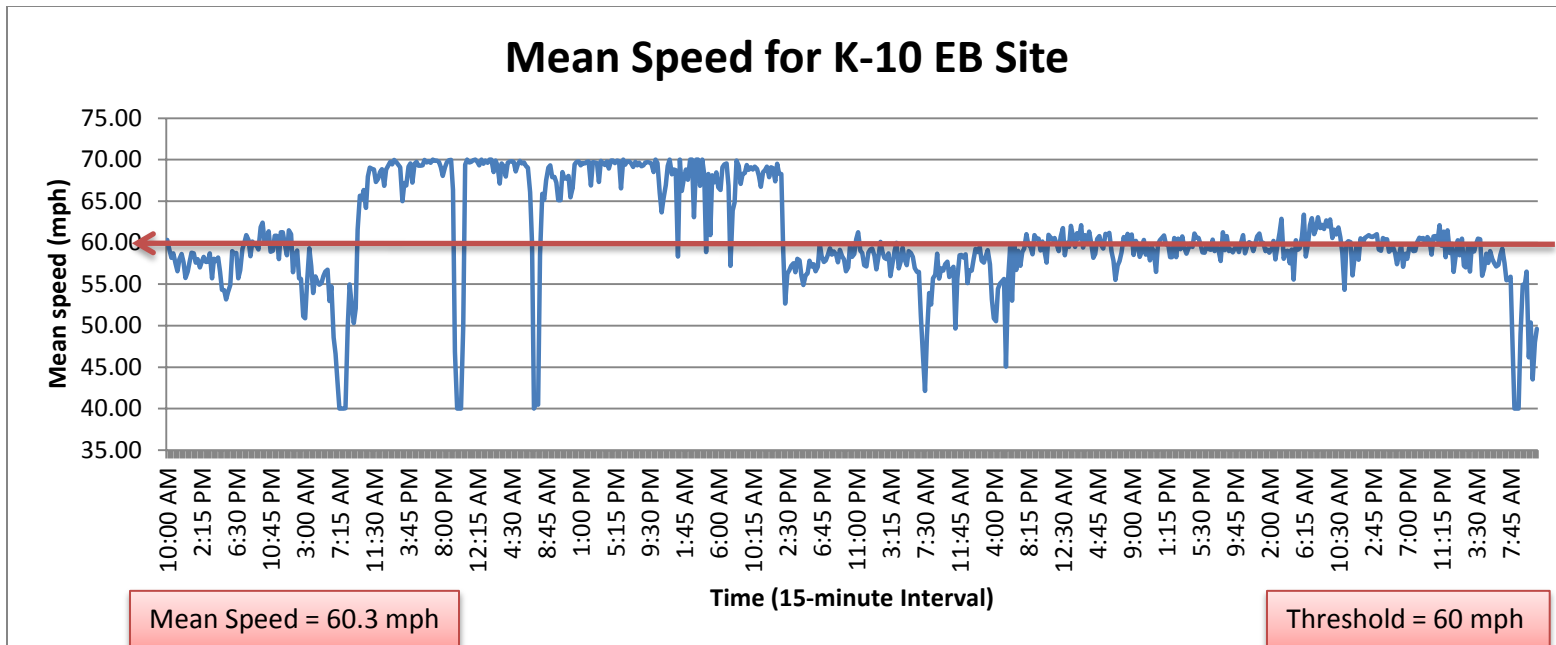


Figure A.1. K-10 EB full flow rate vs. mean speed graphs (continued)

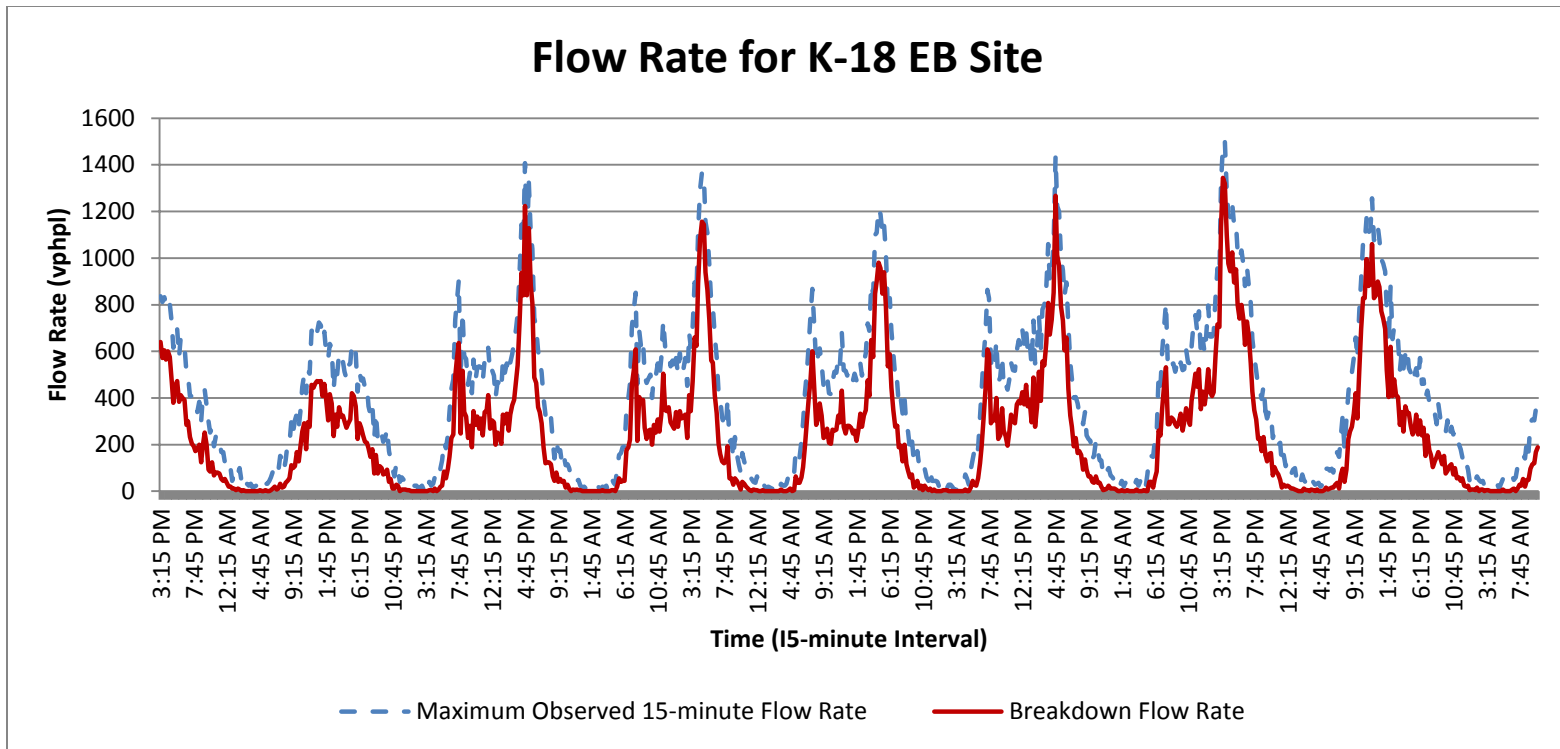


Figure A.2. K-18 EB full flow rate vs. mean speed graphs

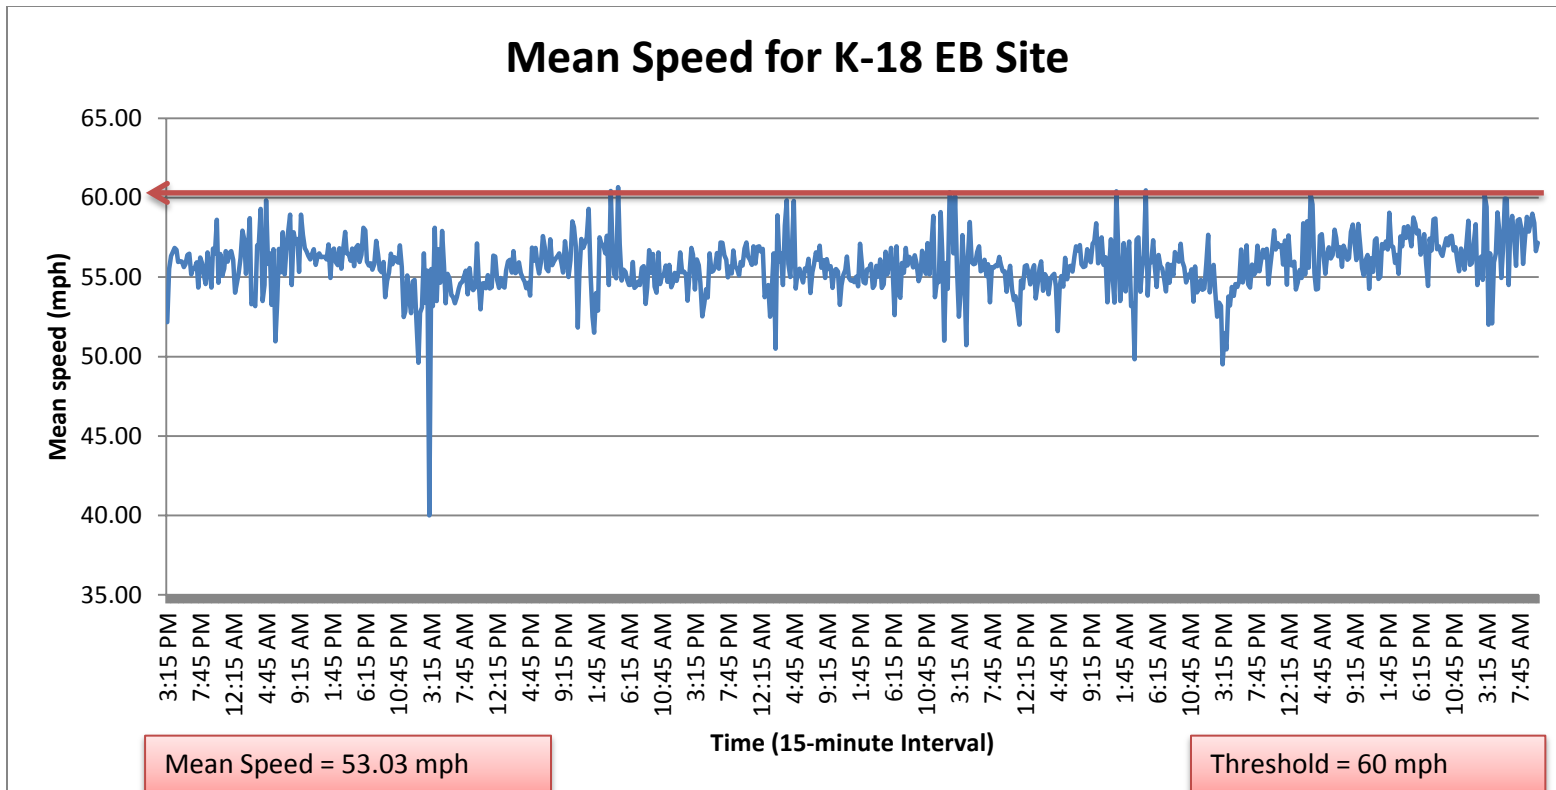


Figure A.2. K-18 EB full flow rate vs. mean speed graphs (continued)

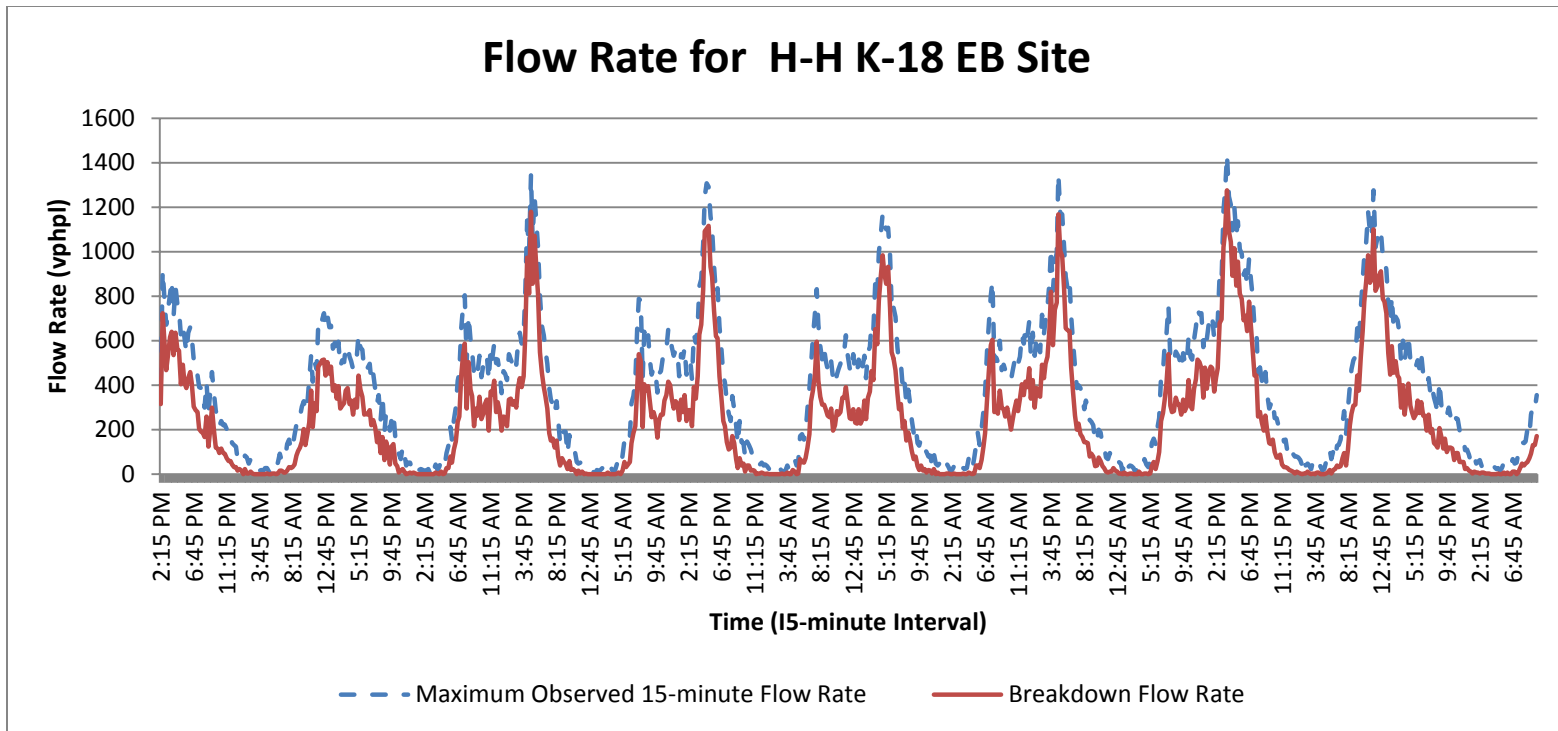


Figure A.3. K-18 H-H EB full flow rate vs. mean speed graphs

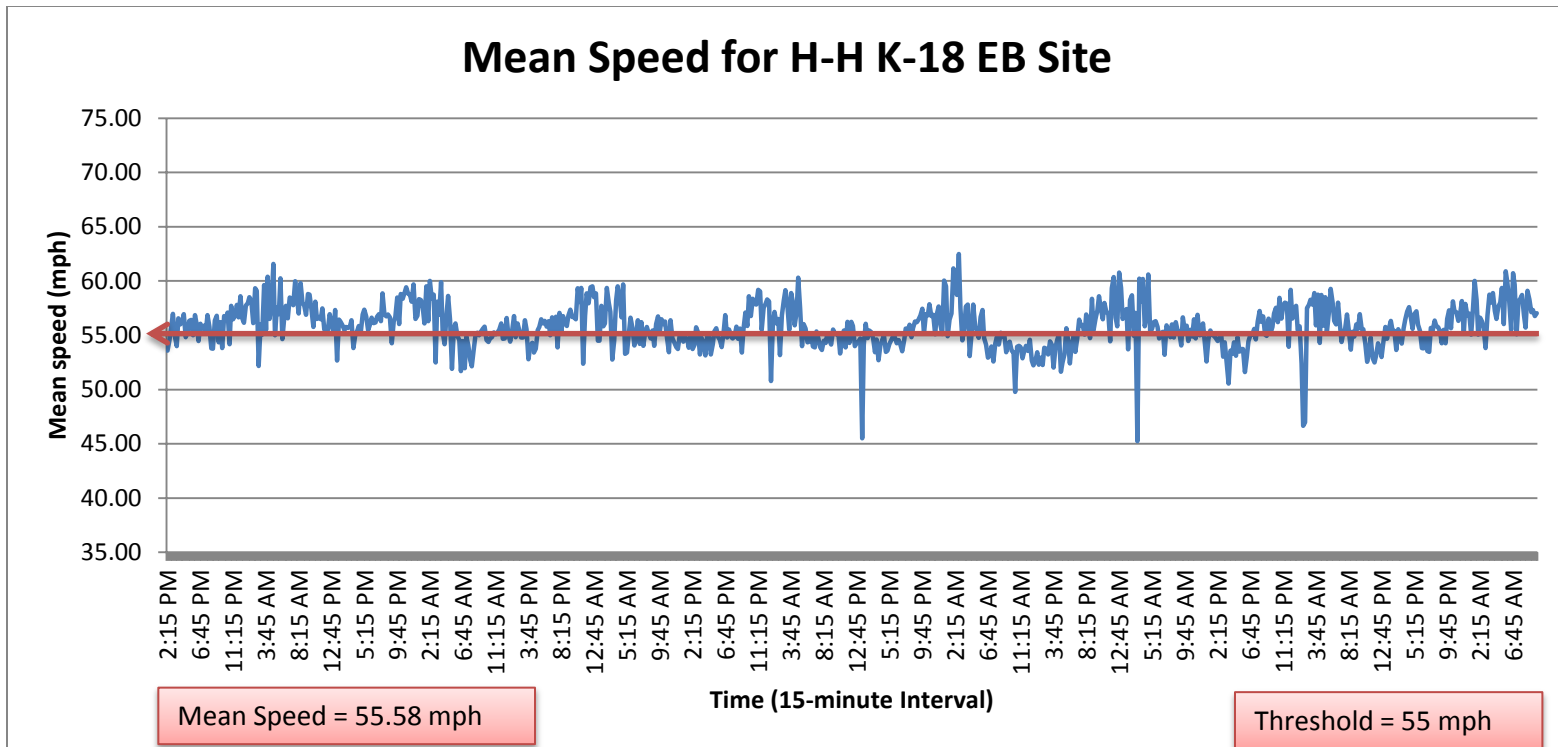


Figure A.3. K-18 H-H EB full flow rate vs. mean speed graphs (continued)

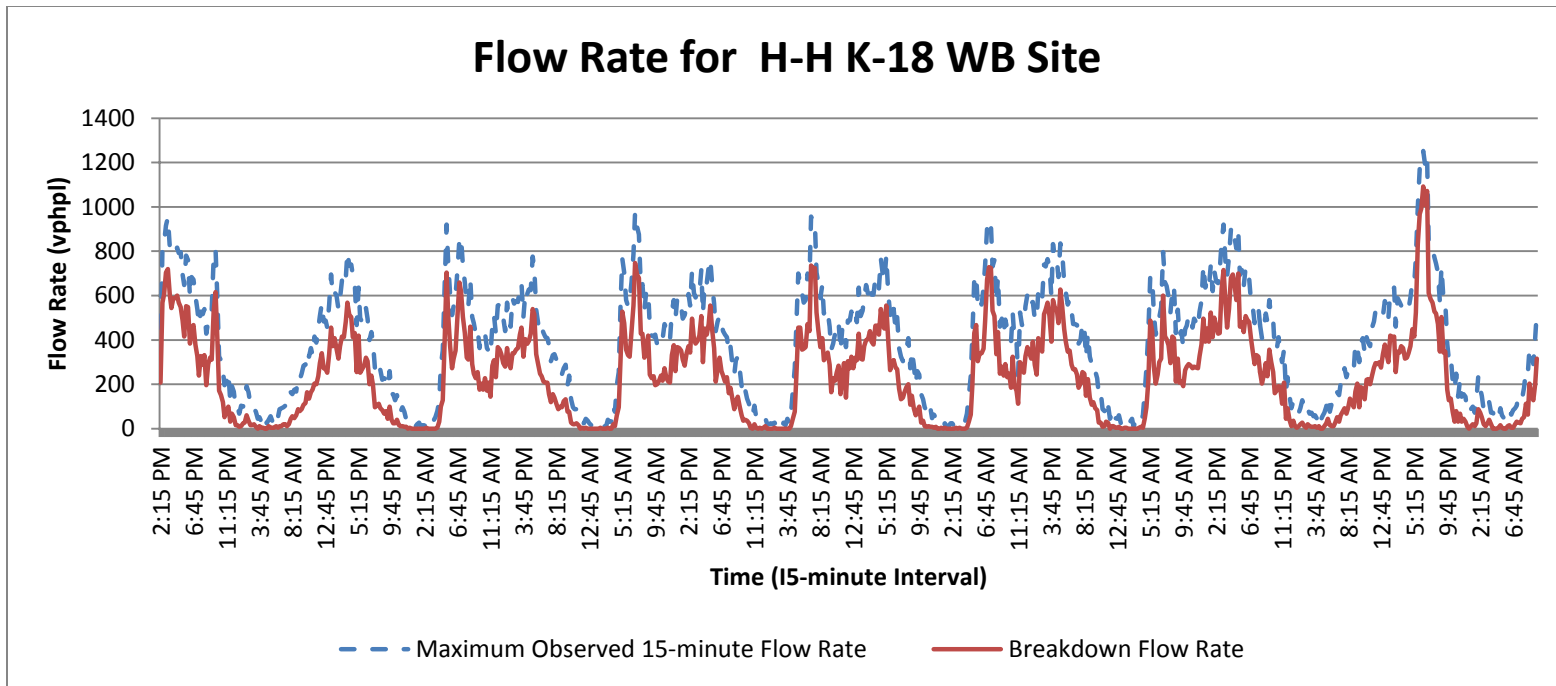


Figure A.4. K-18 H-H WB full flow rate vs. mean speed graphs

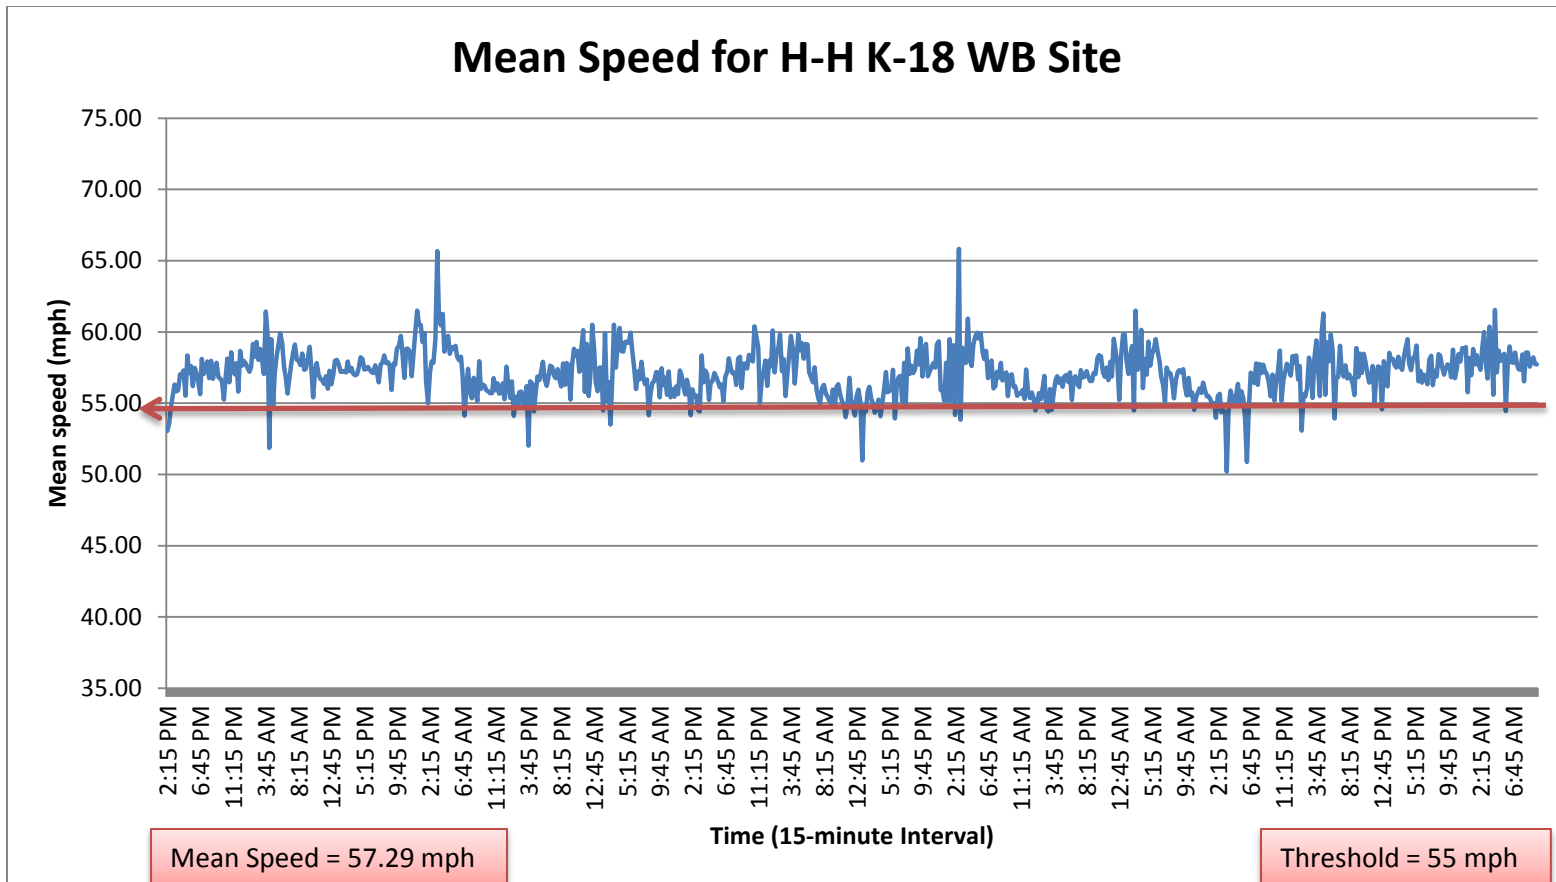


Figure A.4. K-18 H-H WB full flow rate vs. mean speed graphs (continued)

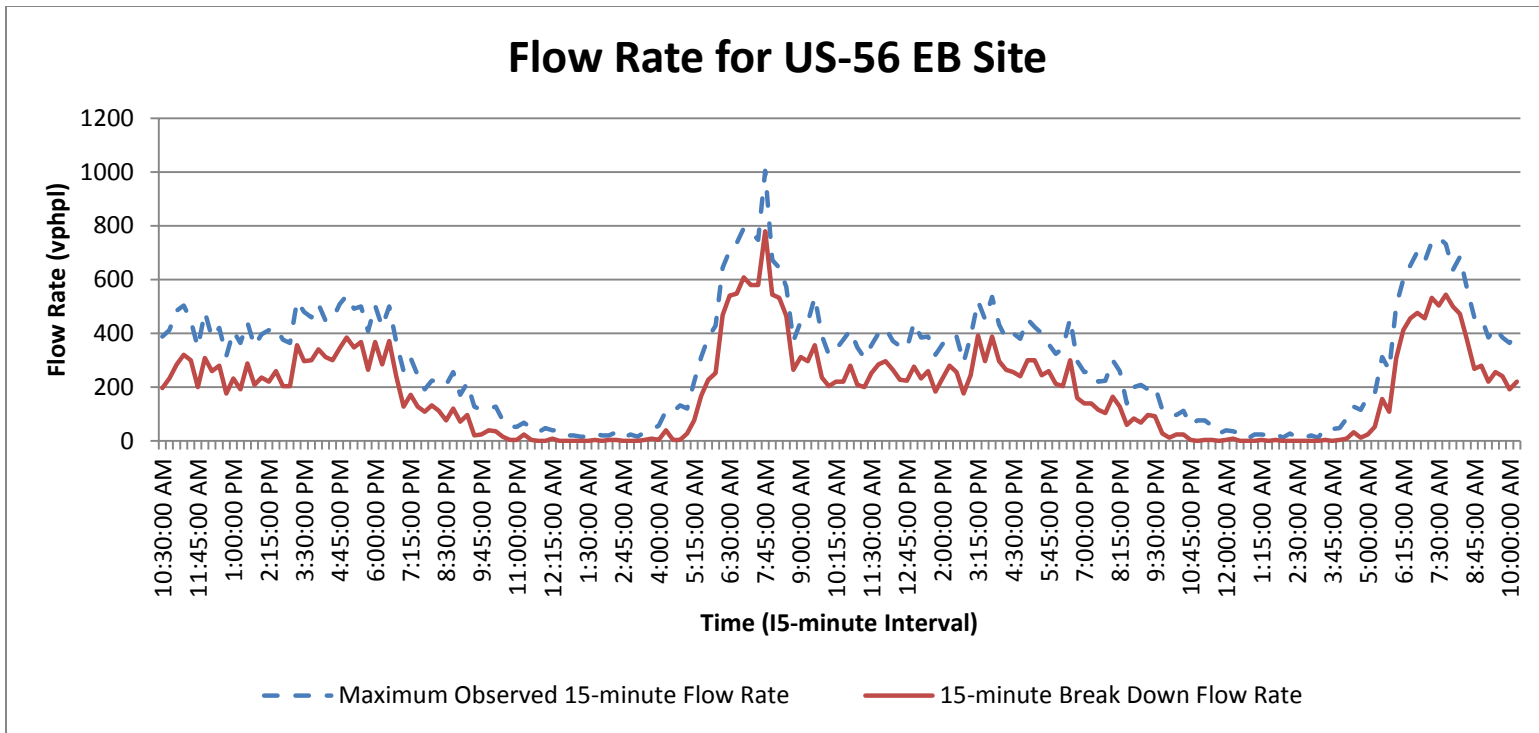


Figure A.5. US-56 EB full flow rate vs. mean speed graphs

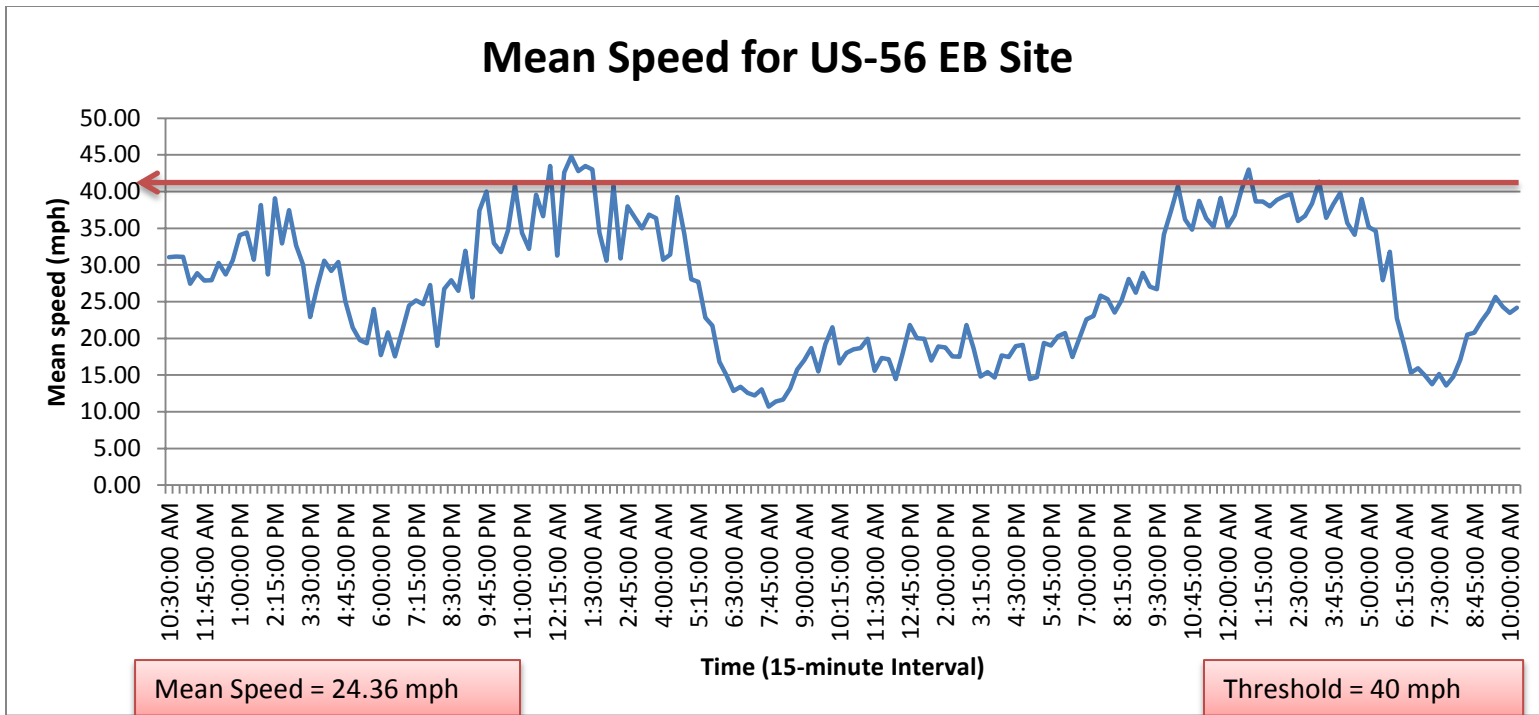


Figure A.5. US-56 EB full flow rate vs. mean speed graphs (continued)

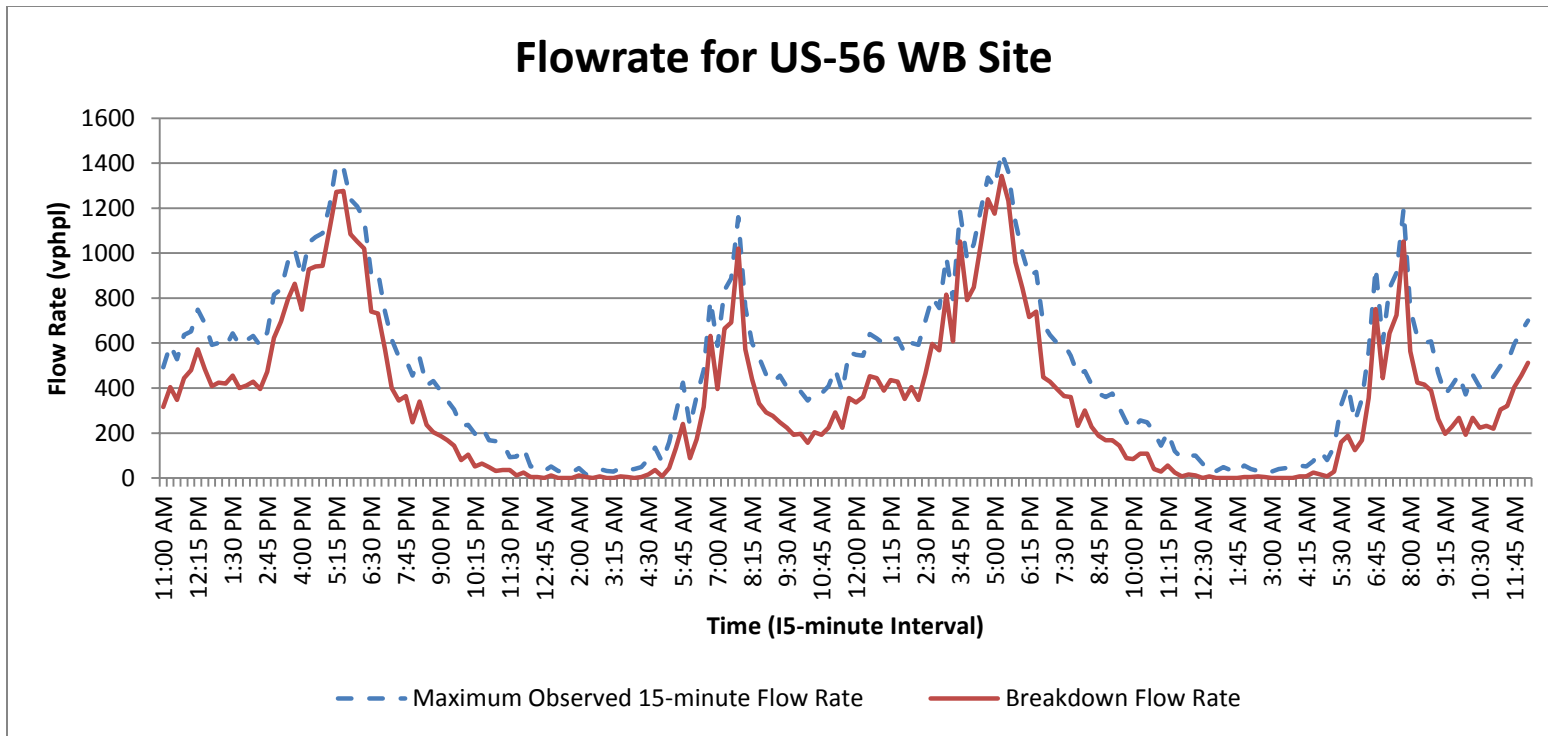


Figure A.6. US-56 WB full flow rate vs. mean speed graphs

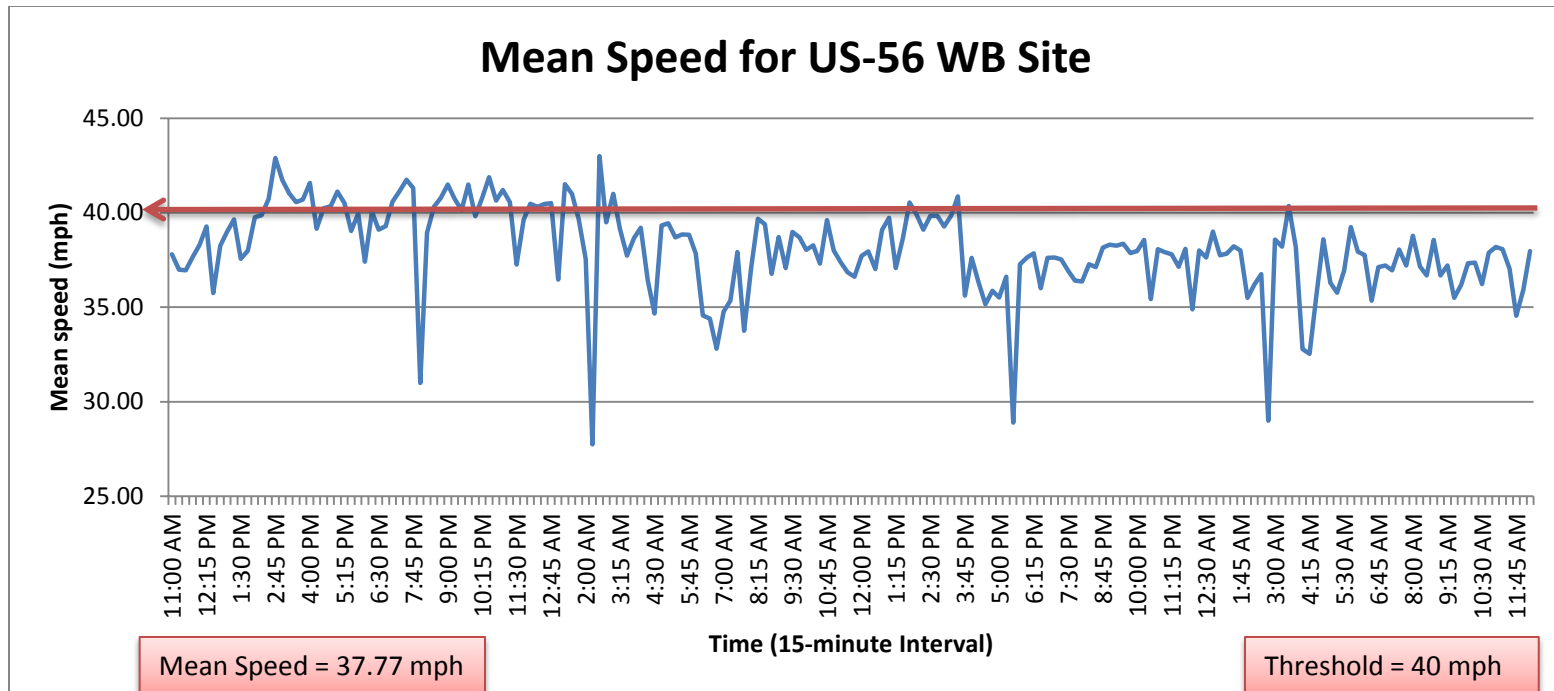


Figure A.6. US-56 WB full flow rate vs. mean speed graphs (continued)

APPENDIX B. PLATOONING METHOD GRAPHS

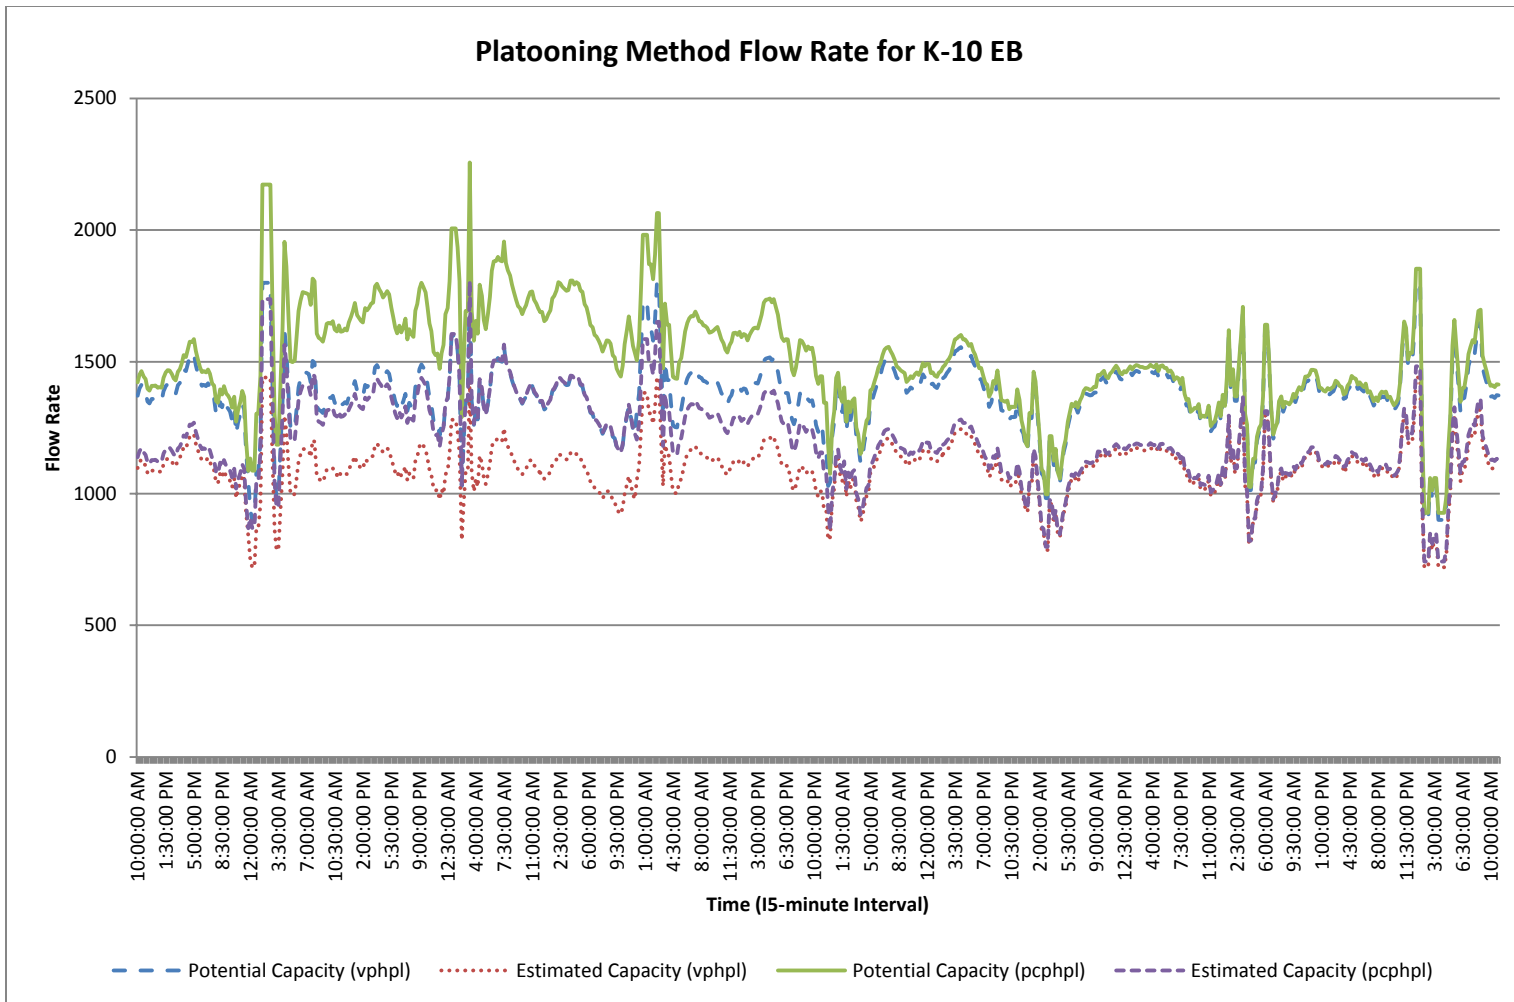


Figure B.1. K-10 EB flow rate graph of the full observed data

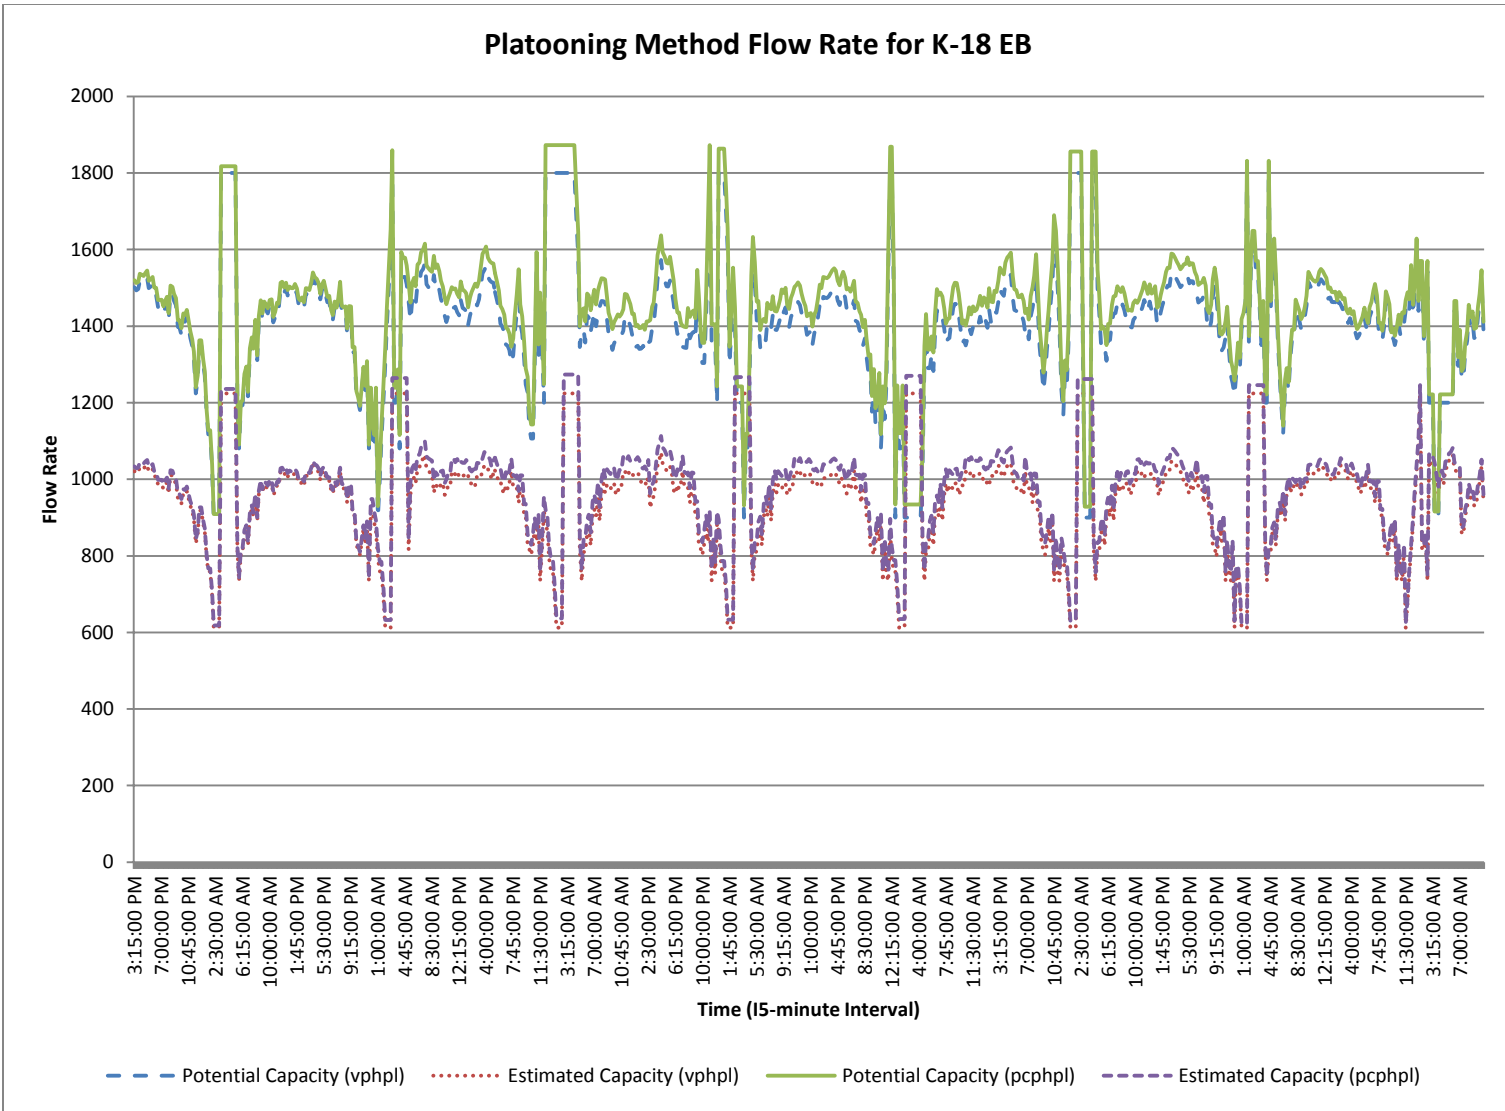


Figure B.2. K-18 EB flow rate graph of the full observed data

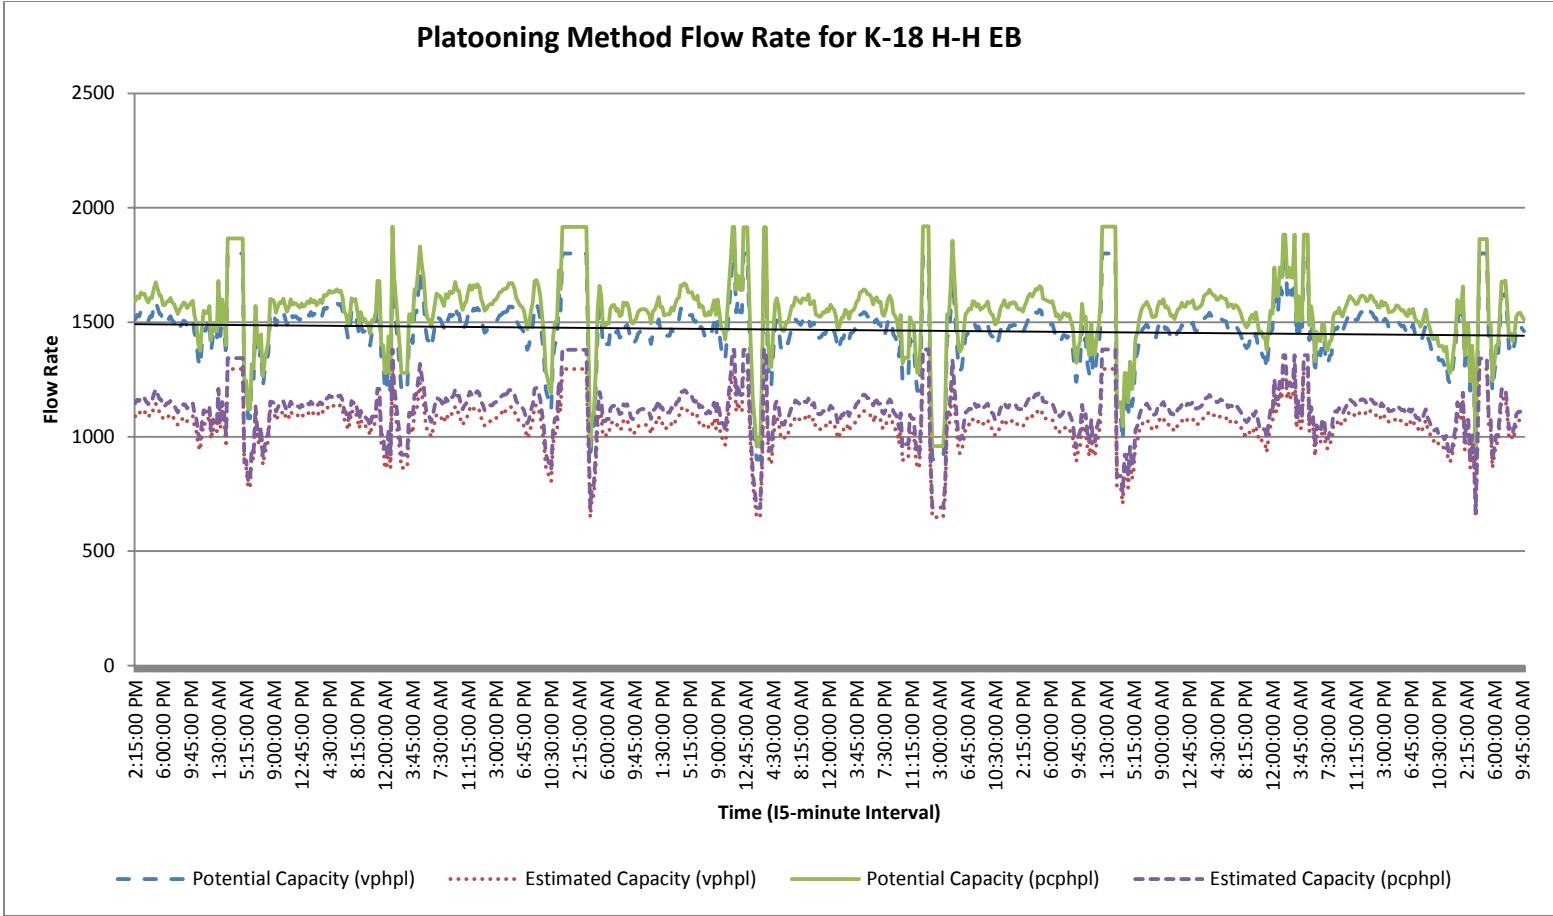


Figure B.3. K-18 H-H EB flow rate graph of the full observed data

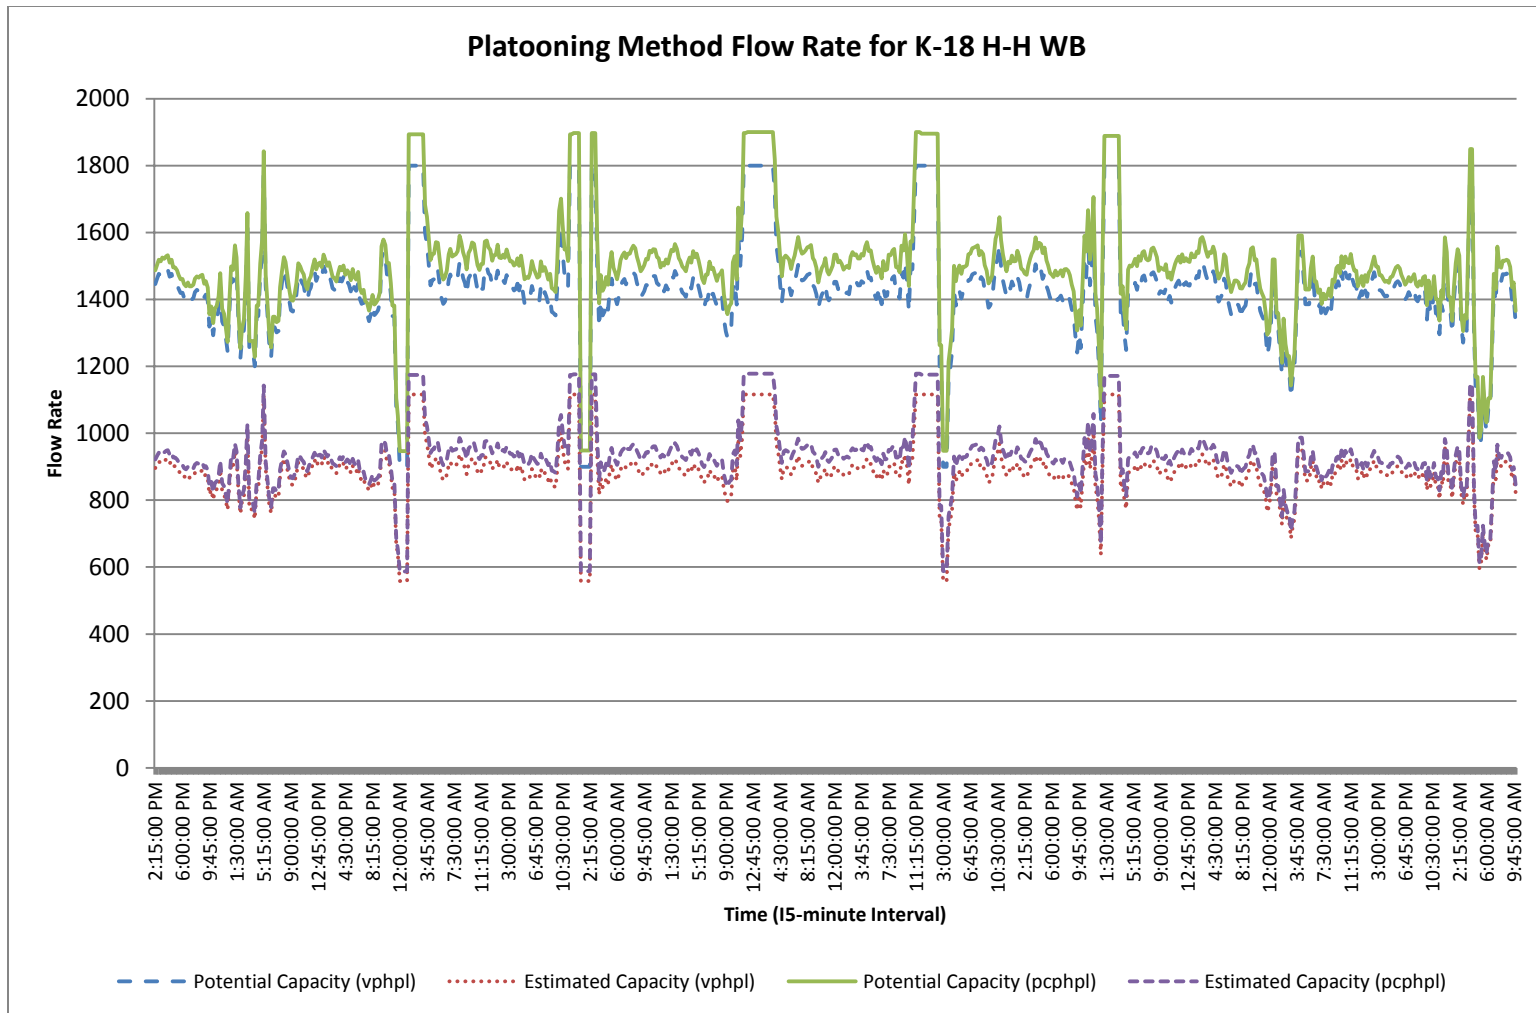


Figure B.4. K-18 WB flow rate graph of the full observed data

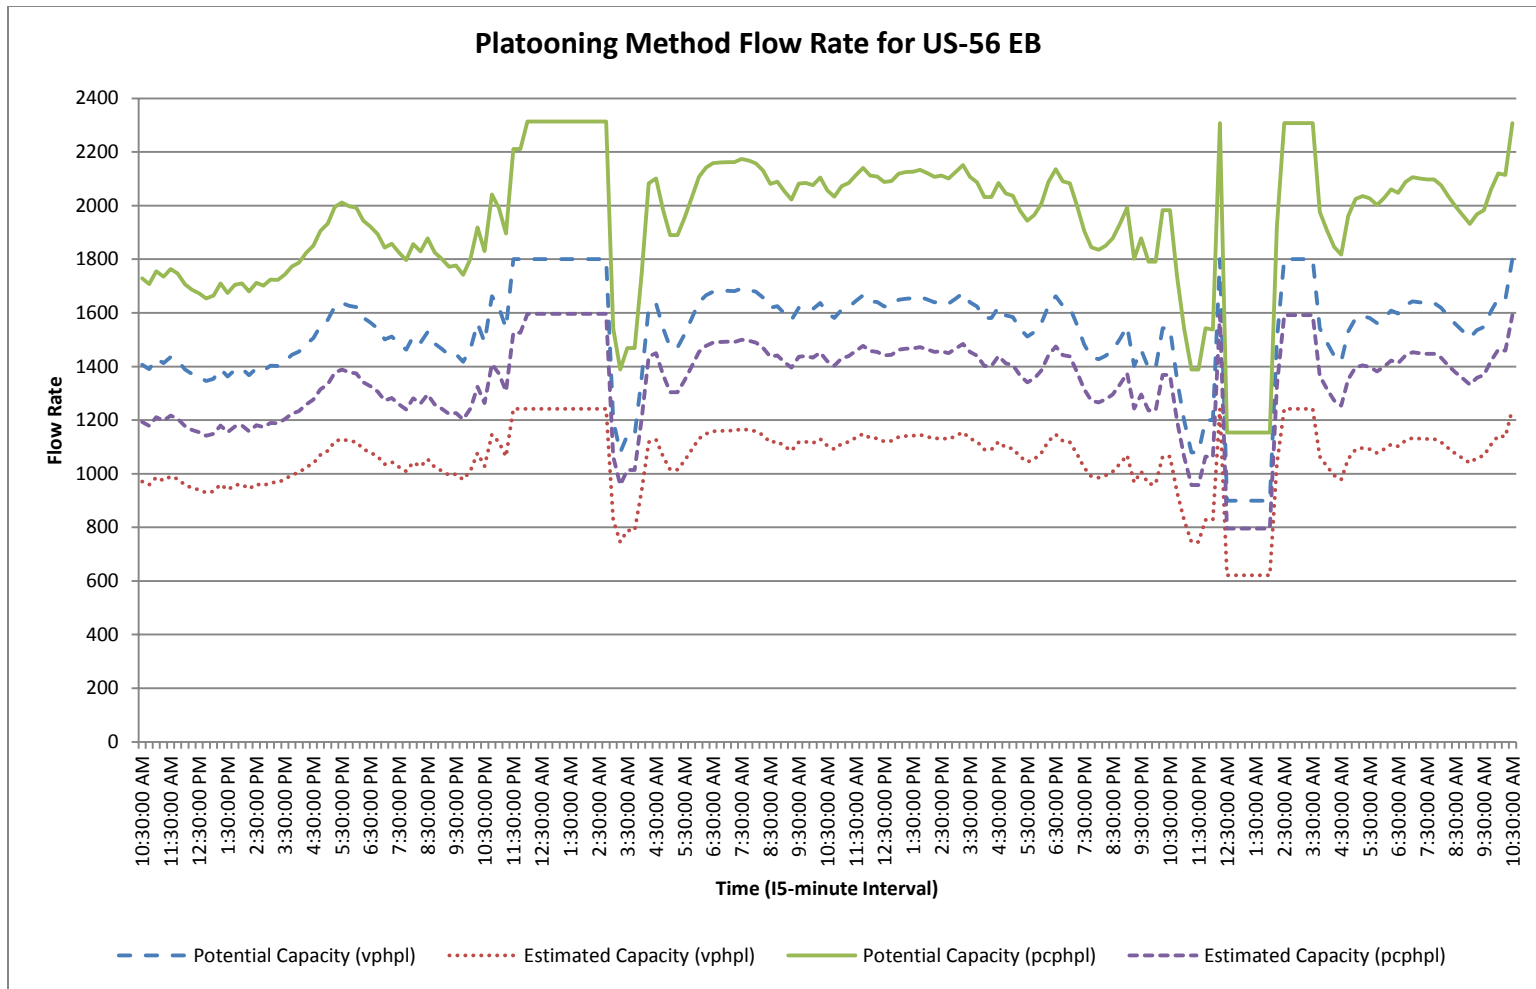


Figure B.5. US-56 EB flow rate graph of the full observed data

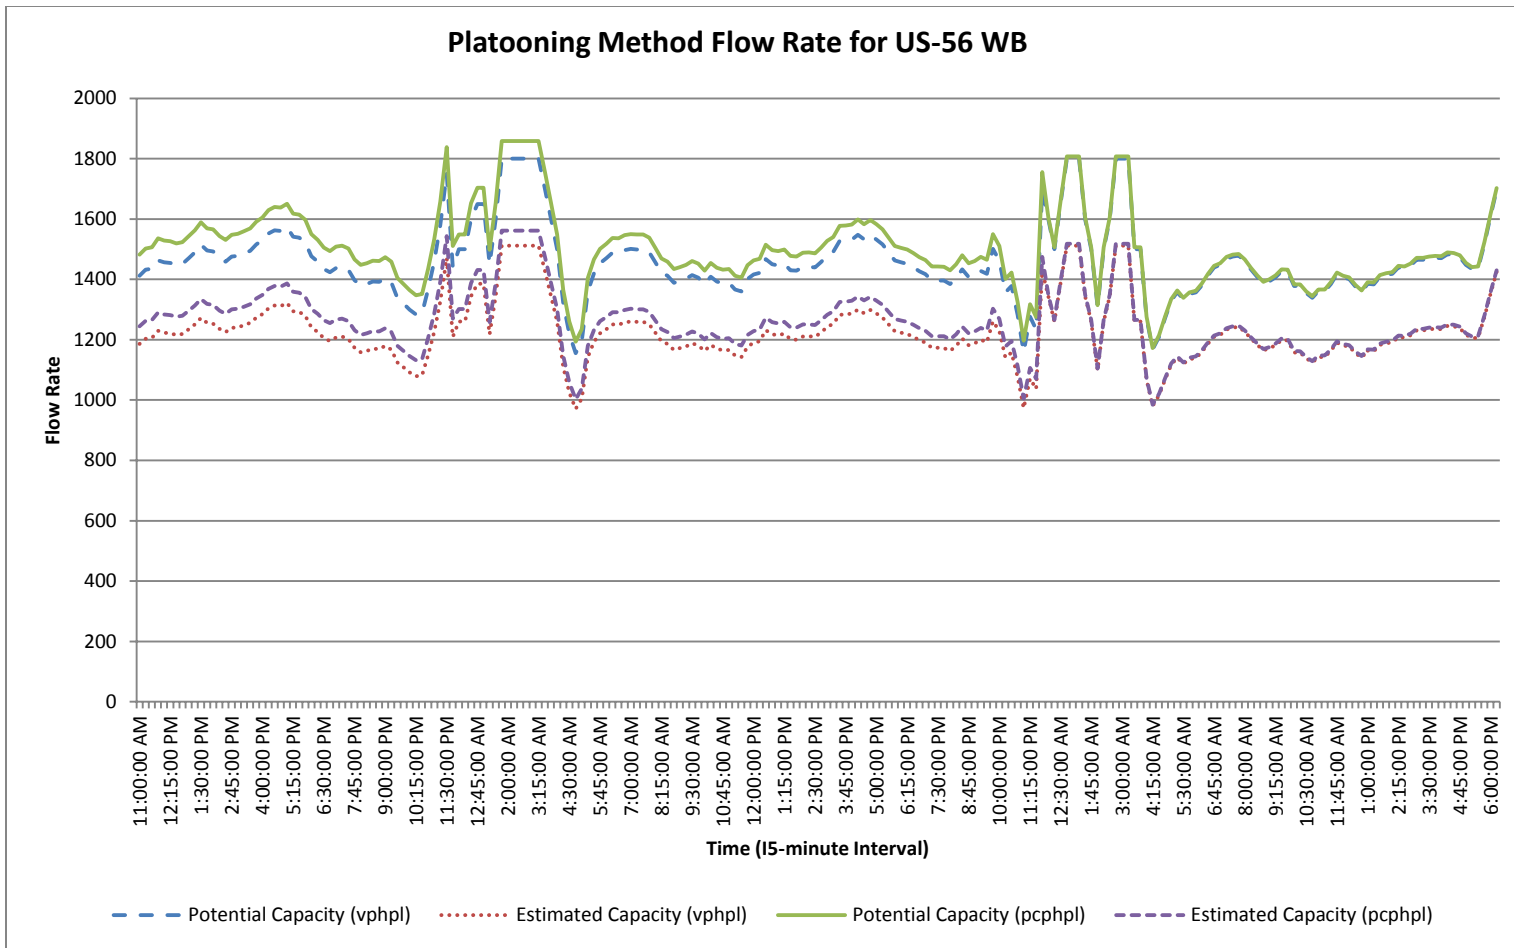


Figure B.6. US-56 WB flow rate graph of the full observed data

APPENDIX C. DEFINITIONS AND ACRONYMS

Average Annual Daily Traffic (AADT) – The total volume of traffic passing a point or segment of a highway facility in both directions for one year divided by the number of days in the year.

Bottleneck Locations – Locations in which vehicles are funneled into fewer lanes due to construction.

Breakdown Flow Rate – Traffic flow rate immediately prior to the onset of congestion.

Congestion – Traffic condition in which an excess amount of vehicles suddenly have a decreased rate of speed and long wait time.

Construction Season – Months within the year in which construction can be performed without deviation from local agencies standard specifications due to weather.

Density – Number of vehicles traveling over a unit length of highway at an instant in time. This can also be known as concentration.

Eastbound (EB) – The direction traffic is moving on a roadway.

Facility Types – Various roadway systems in the United States.

Flow Rate – Equivalent hourly rate at which vehicles pass a point on a highway during a period of time less than 1 hr and is then converted to 1-hr intervals.

Free Flow – A condition in which a traffic flow is unaffected by upstream or downstream conditions.

Gap – Headway in a major stream, evaluated by a vehicle driver in a minor stream who wishes to merge into the major stream. It is expressed either in units of time (time gap) or in units of distance (space gap).

Geometric Conditions – A term used to describe physical characteristics of a roadway approach or a section, including the number and width of lanes, grades, and the allocation of lanes for various uses, including designation of a parking lane.

Head to head (H-H) – Section of a roadway is a 2-lane highway with one traveling lane for each direction. This situation may arise due to various reasons. In this study, the reason for H-H sections were due to construction closing one-half of the highway.

Hourly Traffic Demand – 24-hr hourly distribution of vehicles passing through the work zone in a single direction under normal operating conditions.

Maximum Queue Discharge Flow – Maximum flow rate released from a queued condition.

Mean Queue Discharge Flow Rate – Average traffic flow during congested queued conditions.

Mean Speed – Arithmetic mean of the speeds of vehicles passing a point on a highway during an interval of time.

Passenger Car – Defined as vehicle classes 1 through 3 in the FHWA Traffic Monitoring Guide. Includes automobiles (small, medium, or large), pickup trucks, and vans.

Passenger Car Equivalent (PCE) – The number of passenger cars displaced by a single heavy vehicle of a particular type under specified roadway, traffic, and control conditions.

Peak Hour Volume (PHV) – Maximum number of vehicles that pass a point on a highway during a period of 60 consecutive min.

Peak Time Period – 3-hr time frame that houses the peak hour for the particular work zone site for a given day.

Percent Recreational Vehicles (ER) – Percentage of recreational vehicles traversing a site.

Percent Trucks and Buses (ET) – Percentage of heavy vehicles traversing a site.

Platooning Vehicles – Vehicles that can be seen trailing one another and have headway less than or equal to 4 seconds or have spacing less than or equal to 250 ft (Ramezani 2011).

Pneumatic Road Tubes – Measures the pulse from vehicles as they cross the tubes and sends recorded data to the counter to be stored.

Pre-breakdown Flow – Flow rate prior to the onset of a breakdown event.

Queue – A line of vehicles, bicycles, or persons waiting to be served by the system in which the flow rate from the front of the queue determines the average speed within the queue. Slow-moving vehicles or people joining the rear of the queue usually are considered part of the queue. Internal queue dynamics can involve starts and stops. A fast-moving line of vehicles often is referred to as a moving queue.

Queue Delay – Additional time necessary to travel through the queue under restricted traffic flow.

Single Unit Truck – Defined as vehicle classes 4 through 7 in the FHWA Traffic Monitoring Guide. Includes six-tire trucks and trucks on a single frame with three or more axles.

Space Headway – Distance between the front of a vehicle and the front of the following vehicle. Usually expressed in feet.

Temporary Traffic Control – Setup of various work zones by using devices to control motorists' actions. The operations are standardized by local agencies for situations encountered in the design phase.

Threshold Value – Work zone speed limit under review.

Time Headway – Difference between the time the front of a vehicle arrives at a point on the highway and the time the front of the next vehicle arrives at that same point (usually expressed in seconds).

Traffic Counter – A device that collects data by obtaining pulse readings from pneumatic tubes and sends it back to the device for storage.

Volume – The amount of vehicles traversing a site for any specified time period.

Westbound (WB) – The direction traffic is moving on a roadway.

Work Zone – A segment of highway in which maintenance and construction operations impinge on the number of lanes available to traffic or affect operational characteristics of traffic flowing through the segment. A work zone typically is marked by signs, channelizing devices, barriers, pavement markings, and/or work vehicles. It extends from the first warning sign or high-intensity rotating, flashing, oscillating, or strobe lights on a vehicle to the END ROAD WORK sign or the last temporary traffic control device.

Work Zone Capacity – The maximum sustainable flow rate at which vehicles can pass a given point or uniform segment of a lane or roadway in a work zone during a specified period under prevailing roadway, traffic, and control conditions. Capacity usually is expressed as passenger cars per hour per lane (pcphpl) or vehicles per hour per lane (vphpl).