

RC
1042
.L66
1994b



U.S. Department
of Transportation
National Highway
Traffic Safety
Administration

DOT HS 808 219

December 1994

Final Report

Final Report of a Non-Deformable Crabbed Impactor into a 1988 Ford Taurus 4-Door Sedan in Support of CRASH3 Damage Algorithm Reformulation

Notice

Transportation Research Center Inc. does not endorse or certify products of manufacturers. The manufacturer's name appears solely to identify the test article. Transportation Research Center Inc. assumes no liability for the report or use thereof. It is responsible for the facts and the accuracy of the data presented herein. This report does not constitute a standard, specification, or regulation.

This publication is distributed by the U. S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

RC
1042
L66
1994b
C.1

1. Report No. DOT HS 808 219		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of a Non-Deformable Crabbed Impactor Into a 1988 Ford Taurus 4-door sedan in Support of CRASH3 Damage Algorithm Reformulation				5. Report Date December 1994	
				6. Performing Organization Code	
7. Author(s) K. W. Looker, Project Engineer, TRC				8. Performing Organization Report No. 941007	
9. Performing Organization Name and Address National Highway Traffic Safety Admin. Vehicle Research and Test Center P. O. Box 37 East Liberty, OH 43319				10. Work Unit No. (TRAIS)	
				11. Contract or Grant No. DTNH22-88-C-07292	
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration 400 Seventh St., S.W. Washington, DC 20590				13. Type of Report and Period Covered Final Report Oct. - Dec. 1994	
				14. Sponsoring agency Code DOT/NHTSA/VRTC	
15. Supplemental Notes					
16. Abstract This test was conducted for research and development in support of the CRASH3 damage algorithm reformulation. This test was conducted on a 1988 Ford Taurus 4-door sedan, VIN 1FABP5240SA215297, at Transportation Research Center Inc. on October 7, 1994. The impact speed was 54.1 kph. Maximum Cumulative Crush: At Vehicle Axle Height: 235 mm At Vehicle H-Point Height: 274 mm At Vehicle Mid Door Height: 256 mm At Vehicle Window Sill Height: 203 mm At Vehicle Window Top Height: -56 mm					
17. Key Words Non-Deformable Crabbed Impactor 1988 Ford Taurus 4-door sedan CRASH3 Damage Algorithm Reformulation			18. Distribution Statement Document is available to the public through the National Technical Information Service Springfield, Virginia 22161		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified		21. Number of Pages 109	22. Price	

MAY 12 1998

NASSIF BRANCH LIBRARY


METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
in	inches	2.5	centimeters	cm
ft	feet	30	centimeters	cm
yd	yards	0.9	meters	m
mi	miles	1.6	kilometers	km
AREA				
m ²	square inches	6.5	square centimeters	cm ²
ft ²	square feet	0.09	square meters	m ²
yd ²	square yards	0.8	square meters	m ²
mi ²	square miles	2.6	square kilometers	km ²
	acres	0.4	hectares	ha
MASS (weight)				
oz	ounces	28	grams	g
lb	pounds	0.45	kilograms	kg
	short tons (2000 lb)	0.9	tonnes	t
VOLUME				
tsp	teaspoons	5	milliliters	ml
Tbsp	tablespoons	15	milliliters	ml
fl oz	fluid ounces	30	milliliters	ml
c	cups	0.24	liters	l
pt	pints	0.47	liters	l
qt	quarts	0.95	liters	l
gal	gallons	3.8	liters	l
ft ³	cubic feet	0.03	cubic meters	m ³
yd ³	cubic yards	0.76	cubic meters	m ³
TEMPERATURE (exact)				
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
mm	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
m	meters	1.1	yards	yd
km	kilometers	0.6	miles	mi
AREA				
cm ²	square centimeters	0.16	square inches	in ²
m ²	square meters	1.2	square yards	yd ²
km ²	square kilometers	0.4	square miles	mi ²
ha	hectares (10,000 m ²)	2.5	acres	
MASS (weight)				
g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	tonnes (1000 kg)	1.1	short tons	
VOLUME				
ml	milliliters	0.03	fluid ounces	fl oz
l	liters	2.1	pints	pt
l	liters	1.06	quarts	qt
l	liters	0.26	gallons	gal
m ³	cubic meters	35	cubic feet	ft ³
m ³	cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (exact)				
°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F

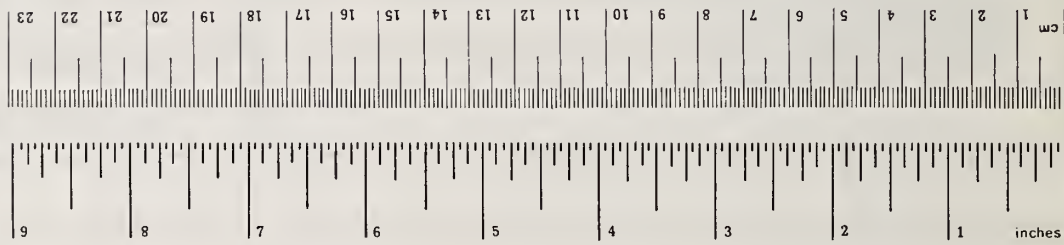

* 1 m = 2.54 (exactly). For other exact conversions and more detailed tables, see NBS Misc. Publ. 286, Units of Weights and Measures, Price \$2.25, SD Catalog No. C13.10.286.

Table of Contents

Section	Title	Page
1.0	Purpose and Test Procedure	1-1
2.0	Vehicle and Test Data	2-1
3.0	Test Summary	3-1
Appendix A	Photographs	A-1
Appendix B	Data Plots	B-1
Appendix C	Miscellaneous Test Information	C-1

List of Tables

Number	Description	Page
1	Test Vehicle Information	2-2
2	Impactor Information	2-5
3	Profile Measurements at Vehicle Axle Height	2-6
4	Profile Measurements at Vehicle H-Point Height	2-8
5	Profile Measurements at Vehicle Mid-Door Height	2-10
6	Profile Measurements At Vehicle Window Sill Height	2-12
7	Profile Measurements at Vehicle Window Top Height	2-14
8	Vehicle Accelerometer Locations and Data Summary	2-17
9	Crabbed Impactor Accelerometer Locations and Data Summary	2-19
10	Camera Information	2-21
11	Test Conditions	3-2
12	Vehicle Crush at Axle Height	3-3
13	Vehicle Crush at H-Point Height	3-5
14	Vehicle Crush at Mid Door Height	3-7
15	Vehicle Crush at Window Sill Height	3-9
16	Vehicle Crush at Window Top Height	3-11

List of Figures

Number	Description	Page
1	Vehicle Accelerometer Placement	2-16
2	Crabbed Impactor Accelerometer Placement	2-18
3	Camera Positions	2-20
4	Vehicle Crush Profile at Axle Height	3-4
5	Vehicle Crush Profile at H-Point Height	3-6
6	Vehicle Crush Profile at Mid-Door Height	3-8
7	Vehicle Crush Profile at Window Sill Height	3-10
8	Vehicle Crush Profile at Window Top Height	3-12

List of Photographs

<u>Title</u>	<u>Figure</u>
Pre-Test Front View	A-1
Post-Test Front View	A-2
Pre-Test Left Front View	A-3
Post-Test Left Front View	A-4
Pre-Test Left Side View	A-5
Post-Test Left Side View	A-6
Pre-Test Left Rear View	A-7
Post-Test Left Rear View	A-8
Pre-Test Rear View	A-9
Post-Test Rear View	A-10
Pre-Test Right Side View	A-11
Post-Test Right Side View	A-12
Pre-Test Overhead Alignment - View 1	A-13
Pre-Test Overhead Alignment - View 2	A-14

Section 1.0

Purpose and Test Procedure

Purpose and Test Procedure

The purpose of this non-deformable crabbed impactor side impact test was for research and development in support of the CRASH3 damage algorithm reformulation.

The 1988 Ford Taurus was equipped with a 3.8-liter, 6-cylinder, transverse, gasoline engine with a 3-speed automatic transmission. The test weight of the vehicle was 1419 killograms.

The vehicle was instrumented with eleven (11) accelerometers to measure vehicle X-axis, Y-axis, and Z-axis acceleration.

The impactor was crabbed 27° counterclockwise from the direction of forward motion. The test weight of the impactor was 1328 kg.

The impactor was instrumented to record data from five (5) accelerometers to measure X-axis, Y-axis, and Z-axis acceleration.

The crash test event was recorded by three (3) high-speed motion picture cameras operating at approximately 1000 frames per second.

Section 2.0

Vehicle and Test Data

Table 1 Test Vehicle Information

Vehicle Manufacturer: Ford Motor Company Model Year: 1988
Make/Model: Ford/Taurus GL VIN: 1FABP5240SA215297
Body Style: 4-door Sedan Color: Brown
Engine Data: Type: Transverse Cylinders: 6 Displacement: 3.8-liter
Transmission Data: 3 Speed, Manual, X Automatic, X Fwd, Rwd, 4wd
Date Vehicle Received: 09/30/94 Odometer Reading: 74,708
Dealer's Name and Address: NA

Accessories:

Power Steering	Yes	Automatic Transmission	Yes
Power Brakes	Yes	Automatic Speed Control	Yes
Power Seats	Yes	Tilting Steering Wheel	Yes
Power Windows	Yes	Telescoping Steering Wheel	No
Tinted Glass	Yes	Air Conditioning	Yes
Radio	Yes	Anti-Skid Brake	No
Clock	Yes	Rear Window Defroster	Yes
Other	None		

Remarks:

1. Is the vehicle stock throughout? Yes
2. Does vehicle show evidence of prior accident history? No
3. Does vehicle show any significant corrosion? No
4. Condition of the front/rear bumper and frame: Good

Certification Data From Vehicle's Label:

Vehicle Manufactured By: Ford Motor Company
Date of Manufacture: 03/88 VIN: 1FABP5240SA215297
GVWR: 4615 lbs.
GAWR: Front: 2594 lbs., Rear: 2135 lbs.

Table 1 Test Vehicle Information, Cont'd.

Tires On Vehicle (Mfr., Line, Size): Remington, P205/65R15

Tire Pressure With Maximum Capacity Vehicle Load: Front: 241 kPa

Rear: 241 kPa

Spare Tire (Mfr., Line, Size): Michelin, T135/80R14

Type of Seats: Front: Split Bench

Rear: Bench

Type of Front Seat Backs: Manually adjustable

Maximum Width: 1803 mm

Wheelbase: 2700 mm

Location of Label Stating Tire Data:

The label was located on the right rear passenger door.

Tire & Capacity Data From Vehicle's Label:

Recommended Tire Size: P205/65R15

Recommended Cold Tire Pressure: Front: 35 psi; Rear: 35 psi

Designated Seating Capacity: 2 Front 3 Rear 5 Total

Vehicle Capacity Weight: 900 lbs.

Test Vehicle Attitude (All measurements are in millimeters.):

Delivered Attitude: LF 685; RF 686; LR 648; RR 647

Pre-Test Attitude: LF 678; RF 681; LR 634; RR 635

Post-Test Attitude: LF 675; RF 718; LR 625; RR 653

Table 1 Vehicle Information, Cont'd.

Weight of Test Vehicle as Received (With Maximum Fluids):

Right Front	457 kg	Right Rear	247 kg
Left Front	484 kg	Left Rear	240 kg
Total Front Weight	941 kg	(65.9% of total vehicle weight)	
Total Rear Weight	487 kg	(34.1% of total vehicle weight)	
Total Delivered Weight	1428 kg		

Weight of Test Vehicle:

Right Front	446 kg	Right Rear	253 kg
Left Front	469 kg	Left Rear	251 kg
Total Front Weight	915 kg	(64.5% of total vehicle weight)	
Total Rear Weight	504 kg	(35.5% of total vehicle weight)	
Total Test Weight	1419 kg		

Weight of ballast secured in vehicle cargo area: 0 kg

Components removed to meet target test weight: None

CG = 959 mm rearward of front wheel centerline

Table 2 Impactor Information

Impactor Type: FMVSS 214 with rigid face

Crabbed Angle¹: 27°

Test Weight of Impactor:

RF 329 kg; RR 335 kg

LF 573 kg; LR 91 kg

Total Front Weight 902 kg

Total Rear Weight 426 kg

Total Test Weight 1328 kg

¹ As measured counterclockwise from the line of forward motion to the impactor's front longitudinal centerline.

Table 3
Profile Measurements At Vehicle Axle Height 250 mm

Location	0	1	2	3	4	5	6	7
	X	Y	X	Y	X	Y	X	Y
Pre-Test	282	1110	284	975	304	812	328	657
Post-Test	296	1040	305	896	322	740	345	589

Location	8	9	10	11	12	13	14	15
	X	Y	X	Y	X	Y	X	Y
Pre-Test	355	510	417	379	484	352	553	326
Post-Test	382	440	396	374	440	308	582	267

Location	16	17	18	19	20	21	22	23
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	24	25	26	27	28	29	30	31
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	1610	269	1769	265	1838	269
Post-Test	NA	NA	1692	338	1811	431	1873	421

Location	32	33	34	35	36	37	38	39
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2077	260	2224	253	2378	257	2448	258
Post-Test	2106	425	2260	429	2410	440	2496	445

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 3, Cont'd.
Profile Measurements At Vehicle Axle Height 250 mm

Location	40	41	42	43	44	45	46	47								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	2684	260	2757	256	2816	255	2893	257	2967	3044	267	3119	265	3190	260	
Post-Test	2707	463	2787	464	2846	467	2919	477	3000	492	3076	486	3153	475	3227	473

Location	48	49	50	51	52	53	54	55								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	3274	259	3348	262	3390	271	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	3300	477	3349	427	3420	394	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Location	56	57	58	59	60	61	62	63								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Location	64	65	66	67	68	69	70	71								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

Location	72	73	74	75	76	77	78	79								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 4
Profile Measurements At Vehicle H-Point Height 539 mm

Location	0	1	2	3	4	5	6	7
	X	Y	X	Y	X	Y	X	Y
Pre-Test	284	1084	288	930	853	298	784	702
Post-Test	305	1014	308	860	784	318	714	629

Location	8	9	10	11	12	13	14	15
	X	Y	X	Y	X	Y	X	Y
Pre-Test	329	472	380	332	464	296	540	259
Post-Test	375	399	420	256	504	218	576	200

Location	16	17	18	19	20	21	22	23
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	24	25	26	27	28	29	30	31
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	1535	1609	197	1756	196	1834	195
Post-Test	NA	1597	1655	305	1824	400	1895	404

Location	32	33	34	35	36	37	38	39
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2064	188	2138	188	2214	181	2365	181
Post-Test	2125	405	2200	411	2276	408	2430	415

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 4, Cont'd.
Profile Measurements At Vehicle H-Point Height 539 mm

Location	40	41	42	43	44	45	46	47
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2667	180	2743	178	2785	175	2859	182
Post-Test	2725	426	2796	452	2856	440	2890	430

Location	48	49	50	51	52	53	54	55
	X	Y	X	Y	X	Y	X	Y
Pre-Test	3237	180	3310	184	3382	188	3463	182
Post-Test	3304	421	3355	395	3409	362	3488	318

Location	56	57	58	59	60	61	62	63
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	4219	195
Post-Test	NA	NA	NA	NA	NA	NA	4226	158

Location	64	65	66	67	68	69	70	71
	X	Y	X	Y	X	Y	X	Y
Pre-Test	4445	203	4520	211	4574	221	4651	233
Post-Test	4454	172	4527	175	4582	180	4650	188

Location	72	73	74	75	76	77	78	79
	X	Y	X	Y	X	Y	X	Y
Pre-Test	4902	604	4909	680	4918	752	4925	834
Post-Test	4916	565	4918	642	4917	715	4930	798

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 5
Profile Measurements At Vehicle Mid Door Height 633mm

Location	0	1	2	3	4	5	6	7
	X	Y	X	Y	X	Y	X	Y
Pre-Test	304	1082	311	1004	310	928	317	778
Post-Test	330	1011	337	935	330	860	340	700

Location	8	9	10	11	12	13	14	15
	X	Y	X	Y	X	Y	X	Y
Pre-Test	352	473	378	402	405	335	460	310
Post-Test	397	415	417	340	445	261	517	228

Location	16	17	18	19	20	21	22	23
	X	Y	X	Y	X	Y	X	Y
Pre-Test	845	245	920	227	NA	NA	NA	NA
Post-Test	895	197	972	186	NA	NA	NA	NA

Location	24	25	26	27	28	29	30	31
	X	Y	X	Y	X	Y	X	Y
Pre-Test	1454	206	1526	211	1604	206	1678	200
Post-Test	1506	252	1578	259	1654	262	1766	375

Location	32	33	34	35	36	37	38	39
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2048	197	2123	197	2198	190	2275	194
Post-Test	2121	390	2213	395	2293	390	2367	392

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 5, Cont'd.
 Profile Measurements At Vehicle Mid Door Height 633mm

Location	40	41	42	43	44	45	46	47
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2656	188	2732	189	2785	184	2858	192
Post-Test	2738	402	2799	432	2853	438	2931	430

Location	48	49	50	51	52	53	54	55
	X	Y	X	Y	X	Y	X	Y
Pre-Test	3238	187	3315	191	3391	194	3467	190
Post-Test	3318	435	3369	388	3431	362	3486	311

Location	56	57	58	59	60	61	62	63
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	3994	183	4070	193	4143	193
Post-Test	NA	NA	3980	181	4055	179	4130	183

Location	64	65	66	67	68	69	70	71
	X	Y	X	Y	X	Y	X	Y
Pre-Test	4443	217	4520	231	4570	243	4650	260
Post-Test	4430	196	4502	208	4554	209	4625	223

Location	72	73	74	75	76	77	78	79
	X	Y	X	Y	X	Y	X	Y
Pre-Test	4793	605	4800	4800	4807	754	4813	830
Post-Test	4793	577	4790	650	4788	726	4780	803

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 6
Profile Measurements At Vehicle Window Sill Height 912 mm

Location	0	1	2	3	4	5	6	7
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	8	9	10	11	12	13	14	15
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	16	17	18	19	20	21	22	23
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	916	992	1067	1142	1216	1290	1365
Post-Test	NA	974	1050	1125	1200	1275	1350	1425

Location	24	25	26	27	28	29	30	31
	X	Y	X	Y	X	Y	X	Y
Pre-Test	1439	281	1595	277	1673	268	1816	265
Post-Test	1500	265	1644	269	1751	320	1895	313

Location	32	33	34	35	36	37	38	39
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2042	265	2197	257	2347	257	2422	256
Post-Test	2120	315	2270	325	2420	313	2495	315

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 6, Cont'd.
 Profile Measurements At Vehicle Window Sill Height 912mm

Location	40	41	42	43	44	45	46	47								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	2647	253	2718	250	2784	238	2857	251	2934	249	3009	245	3086	253	3162	246
Post-Test	2719	323	2789	321	2895	424	2950	435	3007	452	3066	432	3127	422	3200	407

Location	48	49	50	51	52	53	54	55								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	3237	245	3311	246	3388	255	3463	248	3540	235	3616	234	3692	241	3767	241
Post-Test	3242	384	3333	339	3391	305	3465	256	3535	252	3610	242	3666	263	3750	262

Location	56	57	58	59	60	61	62	63								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	3843	248	3919	242	3995	247	4073	250	4147	245	4216	251	4293	263	4370	256
Post-Test	3827	252	3900	253	3976	248	4053	246	4130	245	4209	241	4280	243	4360	236

Location	64	65	66	67	68	69	70	71								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	4443	258	4516	270	4592	277	4669	295	4736	318	4771	370	4785	459	4788	531
Post-Test	4437	240	4512	241	4589	245	4663	250	4734	284	4765	357	4781	430	4796	500

Location	72	73	74	75	76	77	78	79								
	X	Y	X	Y	X	Y	X	Y								
Pre-Test	4799	607	4802	682	4819	756	4826	830	4826	907	4830	982	4833	1056	NA	NA
Post-Test	4796	576	4800	648	4807	725	4815	797	4820	874	4821	948	4825	1021	NA	NA

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 7

Profile Measurements At Vehicle Window Top Height 1380 mm

Location	0	1	2	3	4	5	6	7
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	8	9	10	11	12	13	14	15
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	16	17	18	19	20	21	22	23
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	24	25	26	27	28	29	30	31
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	32	33	34	35	36	37	38	39
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	2297	2373	536	2452	530
Post-Test	NA	NA	NA	2291	2266	527	2443	538
							534	2521
							530	2595
							534	2592
							530	524

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.

All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Table 7, Cont'd.
Profile Measurements At Vehicle Window Top Height 1380 mm

Location	40	41	42	43	44	45	46	47
	X	Y	X	Y	X	Y	X	Y
Pre-Test	2670	2745	2793	2870	2948	3023	3099	3174
Post-Test	2670	2741	2798	2870	2948	3022	3100	3175

Location	48	49	50	51	52	53	54	55
	X	Y	X	Y	X	Y	X	Y
Pre-Test	3247	3324	3399	3536	3554	3544	NA	NA
Post-Test	3250	3328	3404	3510	3552	3525	NA	NA

Location	56	57	58	59	60	61	62	63
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

Location	64	65	66	67	68	69	70	71
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA


Location	72	73	74	75	76	77	78	79
	X	Y	X	Y	X	Y	X	Y
Pre-Test	NA	NA	NA	NA	NA	NA	NA	NA
Post-Test	NA	NA	NA	NA	NA	NA	NA	NA

All measurements are in millimeters. Column readings are 75 millimeters apart starting on the left side of the vehicle.


All X-axis measurements taken from a reference plane 500 millimeters from and parallel to the rear bumper.

All Y-axis measurements taken from a reference plane 1200 millimeters from and parallel to the vehicle's longitudinal centerline.

Figure 1 Vehicle Accelerometer Placement

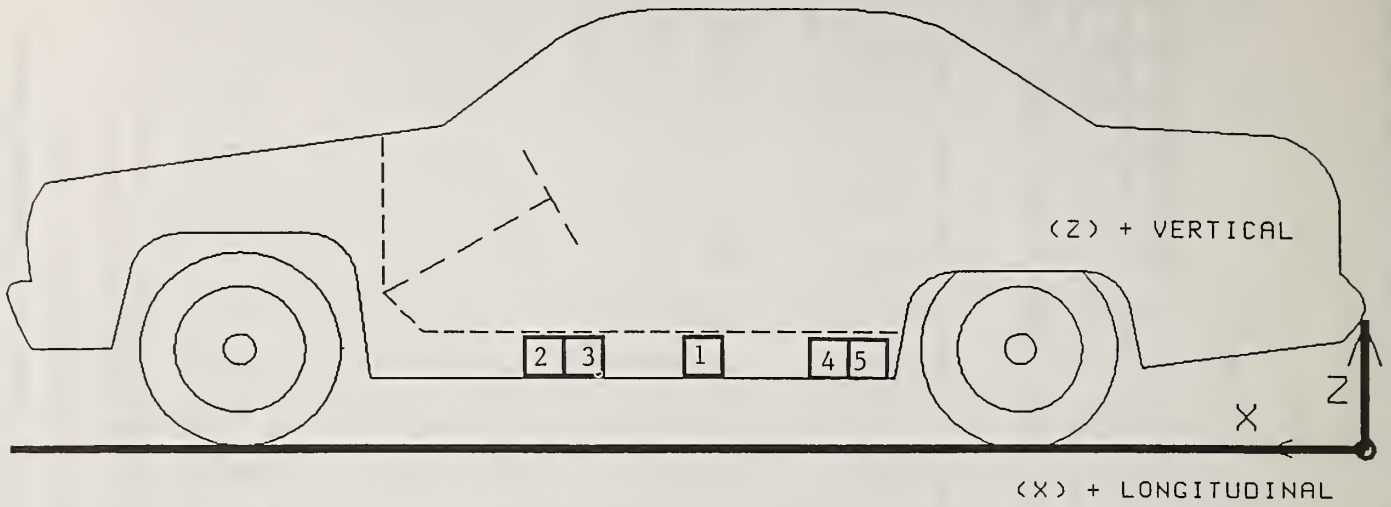

SIDE VIEW

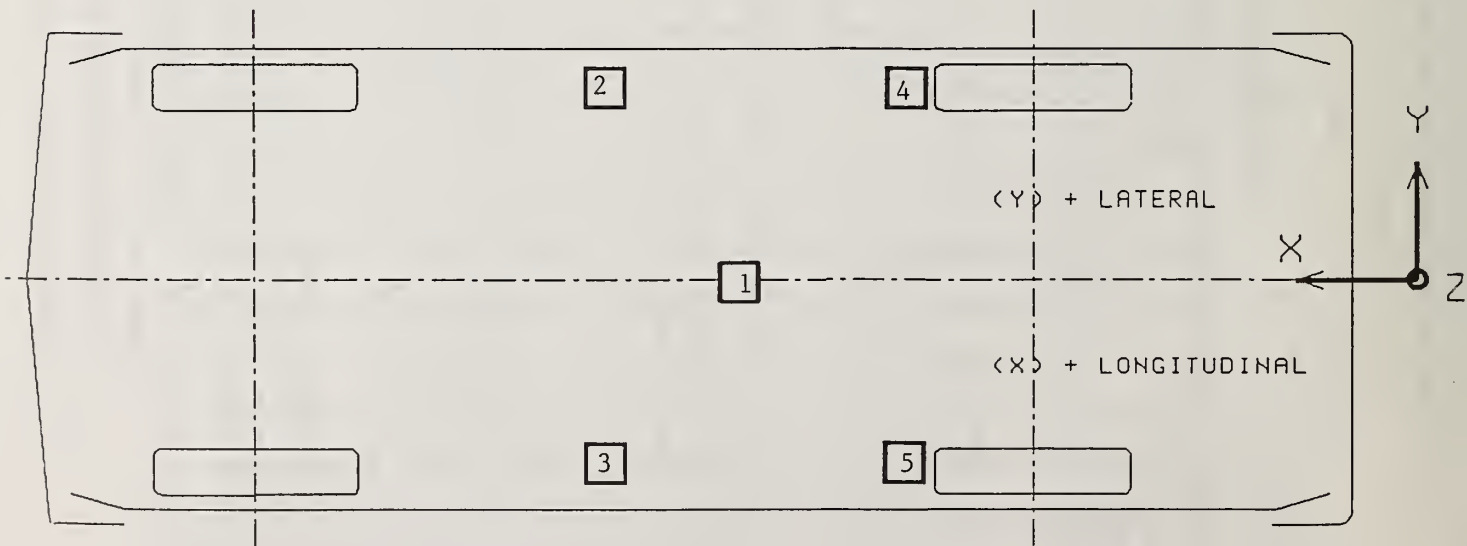

BOTTOM VIEW

Table 8 Vehicle Accelerometer Locations and Data Summary


Test No. 941007

TEST NUMBER: 941007 No. LOCATION	X	Y	Z	POSITIVE DIRECTION	NEGATIVE DIRECTION
1 VEHICLE CENTER OF GRAVITY	2913 mm	0 mm	321 mm		
LONGITUDINAL				5.8 g @ 49.5 ms	11.3 g @ 23.8 ms
LATERAL				4.5 g @ 72.2 ms	22.4 g @ 10.8 ms
VERTICAL				11.8 g @ 11.4 ms	19.3 g @ 33.2 ms
RESULTANT				26.0 g @ 33.3 ms	
2 LEFT FRONT SILL	2015 mm	682 mm	325 mm		
LONGITUDINAL ¹				76.8 g @ 13.8 ms	-0.9 g @ 0.0 ms
LATERAL				40.8 g @ 10.5 ms	141.0 g @ 6.6 ms
3 RIGHT FRONT SILL	1989 mm	-680 mm	303 mm		
LONGITUDINAL ¹				5.9 g @ 62.8 ms	16.0 g @ 31.9 ms
LATERAL				4.9 g @ 64.6 ms	26.8 g @ 35.8 ms
4 LEFT REAR SEAT	1976 mm	547 mm	304 mm		
CROSSMEMBER					
LONGITUDINAL				23.0 g @ 44.8 ms	112.4 g @ 19.4 ms
LATERAL ¹				14.8 g @ 24.9 ms	78.7 g @ 20.0 ms
5 RIGHT REAR SEAT	1978 mm	-515 mm	330 mm		
CROSSMEMBER					
LONGITUDINAL				25.6 g @ 50.6 ms	15.5 g @ 23.3 ms
LATERAL				3.4 g @ 47.1 ms	31.5 g @ 50.6 ms


REFERENCE: X: + FORWARD FROM VEHICLE'S REAR BUMPER
 Y: + LEFTWARD FROM VEHICLE'S LONGITUDINAL CENTERLINE
 Z: + UPWARD FROM GROUND LEVEL

¹ See DATA ACQUISITION EXPLANATIONS

Figure 2 Crabbed Impactor Accelerometer Placement

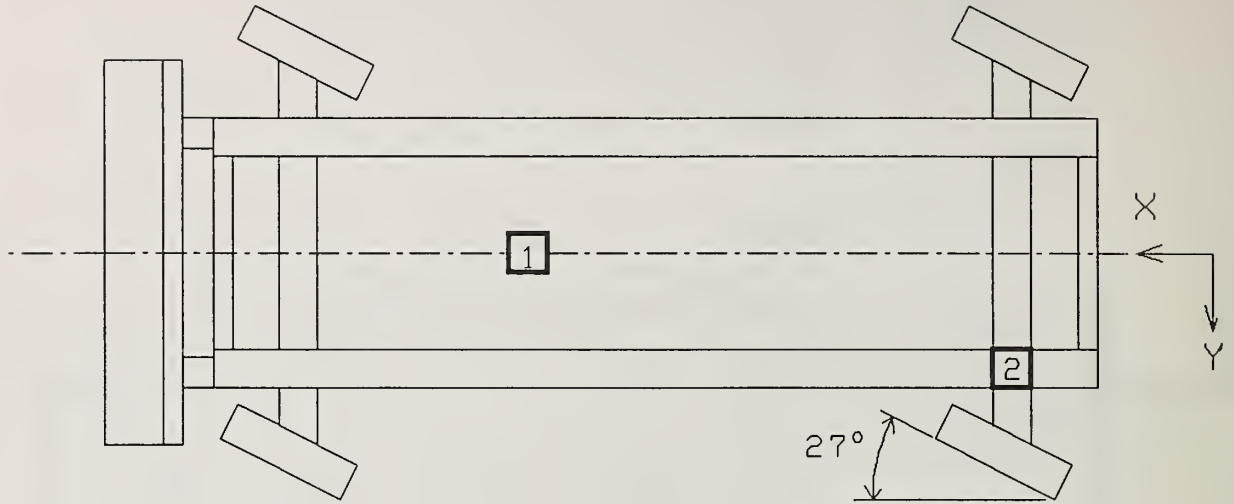

TOP VIEW

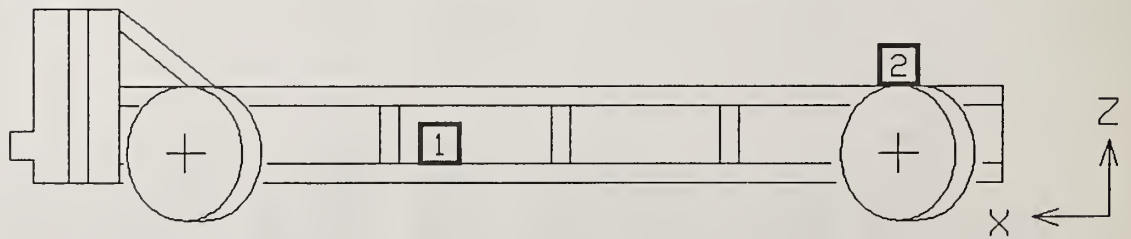

SIDE VIEW

Table 9 Crabbed Impactor Accelerometer Locations and Data Summary

Test No. 941007

TEST NUMBER: 941007 No. LOCATION	X	Y	Z	POSITIVE DIRECTION	NEGATIVE DIRECTION
1 CENTER OF GRAVITY	1842 mm	0 mm	315 mm		
LONGITUDINAL				0.8 g @ 131.4 ms	15.5 g @ 17.3 ms
LATERAL				7.4 g @ 28.6 ms	2.4 g @ 74.8 ms
VERTICAL				6.7 g @ 21.0 ms	6.1 g @ 14.1 ms
RESULTANT				17.0 g @ 20.8 ms	
2 LEFT FRAME RAIL OVER REAR AXLE	385 mm	638 mm	621 mm		
LONGITUDINAL				1.4 g @ 173.3 ms	18.8 g @ 18.4 ms
LATERAL				7.6 g @ 23.9 ms	1.5 g @ 16.5 ms

REFERENCE: X: + FORWARD FROM REARMOST POINT OF FRAME
 Y: + LEFTWARD FROM BARRIER CENTERLINE
 Z: + UPWARD FROM GROUND LEVEL

Figure 3 Camera Positions

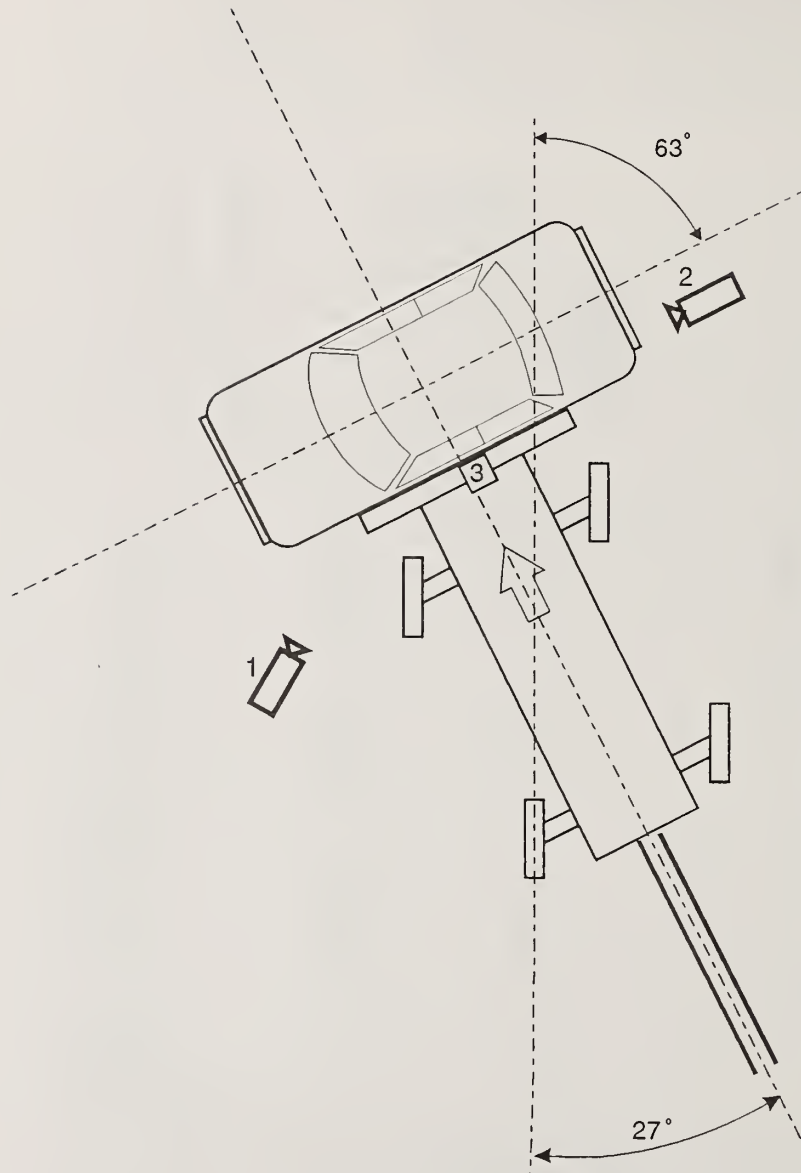


Table 10 Camera Information

Test No. 941007

<u>Camera Number</u>	<u>Location</u>	<u>Type</u>	<u>Lens (mm)</u>	<u>Speed (fps)</u>	<u>Purpose of Camera Data</u>
1	Left wide	Photosonic	13	1002	Impact overall
2	Right wide	Photosonic	13	1000	Impact overall
3	Overhead	Photosonic	8.5	1000	Impact overall

Section 3.0

Test Summary

Table 11 Test Conditions

Test No. 941007

Date of Test: 10/07/94

Time of Test: 12:45

Ambient Temperature at Impact Area: 21° C

Intended Impact Velocity: 53.9 kph

Actual Impact Velocity: Primary = 54.1 kph
Secondary = 54.1 kph

Subject Vehicle Data

Length of Direct Contact Damage: 1554 mm

Maximum Cumulative Crush

At Vehicle Axle Height: 235 mm

At Vehicle H-Point Height: 274 mm

At Vehicle Mid Door Height: 256 mm

At Vehicle Window Sill Height: 203 mm

At Vehicle Window Top Height: -56 mm

All distance measurements are in millimeters.

Table 12 Vehicle Crush at Axle Height

Test No. 941007

$$FL = \underline{\quad 1728 \quad}$$

$$C1 = \underline{\quad 69 \quad}$$

$$C2 = \underline{\quad 166 \quad}$$

$$C3 = \underline{\quad 179 \quad}$$

$$C4 = \underline{\quad 204 \quad}$$

$$C5 = \underline{\quad 219 \quad}$$

$$C6 = \underline{\quad 123 \quad}$$

NOTE: FL is the post-test length of the damaged surface.

Measurements C1 - C6 were spaced equally apart over the post-impact length of the damaged surface. This distance is defined as length "FL" on the vehicle crush profile plot.

All measurements are in millimeters.

Figure 4 Vehicle Crush Profile at Axle Height

Test No. 941007

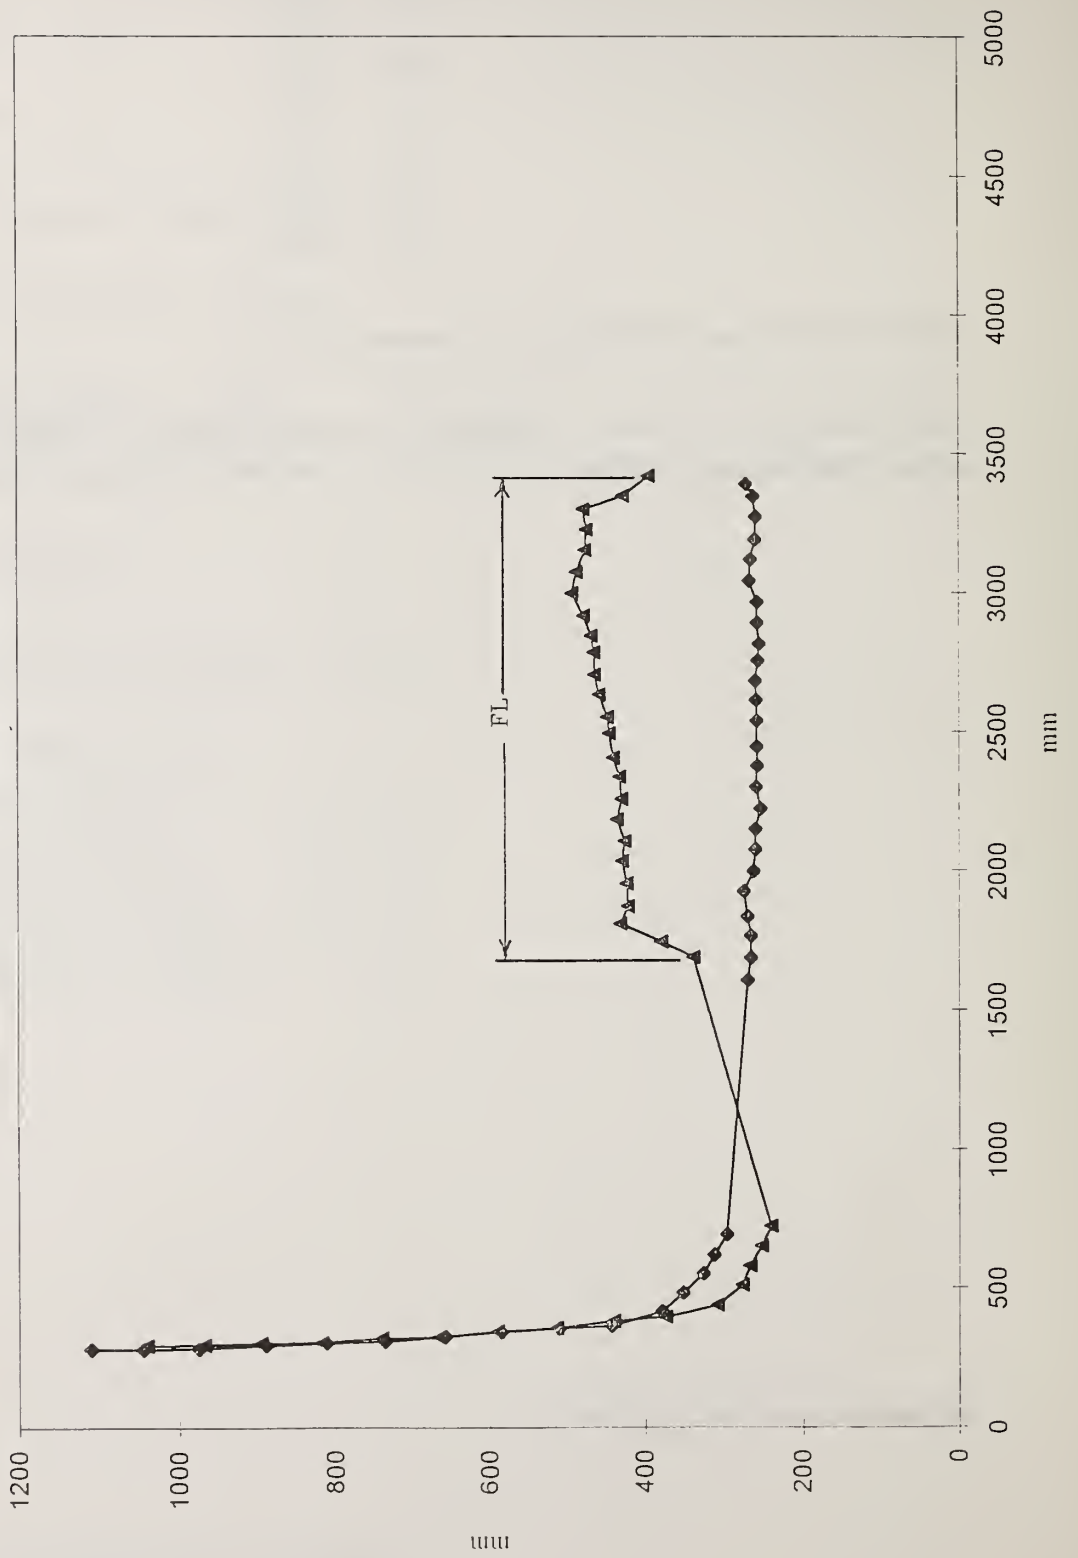


Table 13 Vehicle Crush at H-Point Height

Test No. 941007

FL = 1946

C1 = 92

C2 = 209

C3 = 226

C4 = 247

C5 = 252

C6 = 121

NOTE: FL is the post-test length of the damaged surface.

Measurements C1 - C6 were spaced equally apart over the post-impact length of the damaged surface. This distance is defined as length "FL" on the vehicle crush profile plot.

All measurements are in millimeters.

Figure 5 Vehicle Crush Profile at H-Point Height

Test No. 941007

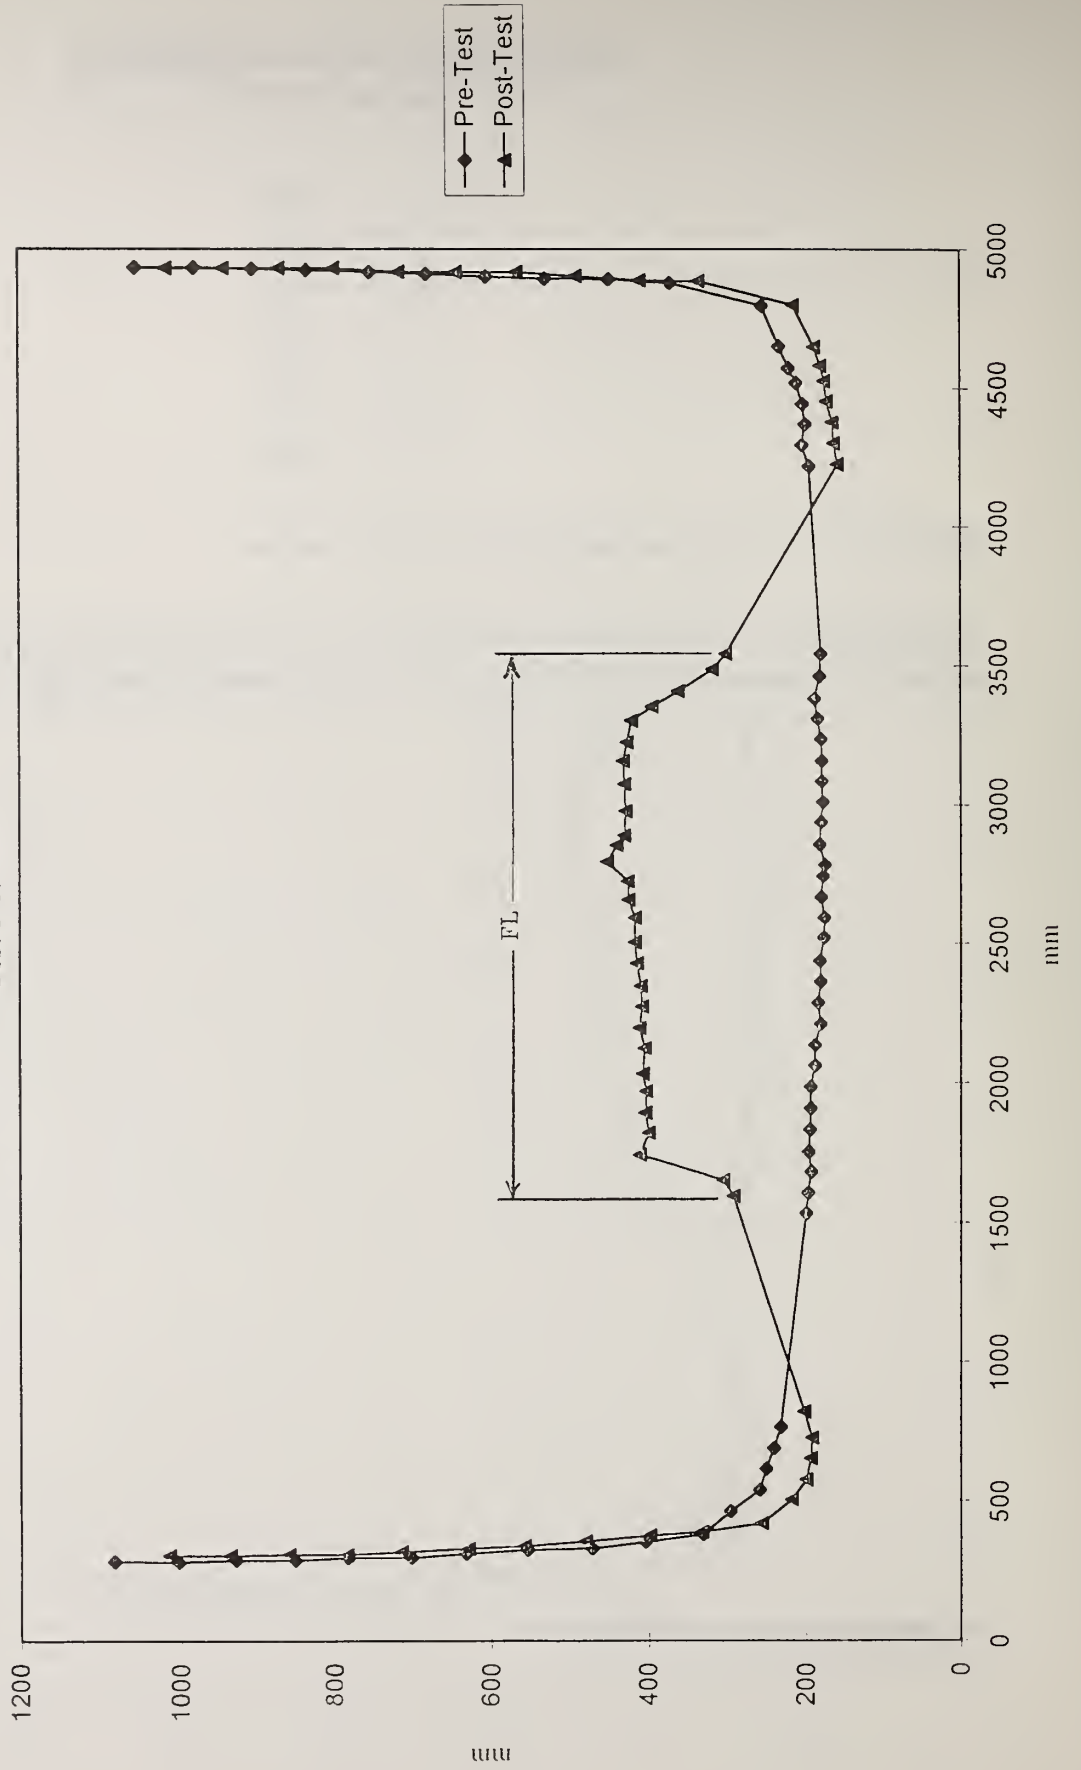


Table 14 Vehicle Crush at Mid Door Height

Test No. 941007

$$FL = \underline{\quad 2253 \quad}$$

$$C1 = \underline{\quad 35 \quad}$$

$$C2 = \underline{\quad 190 \quad}$$

$$C3 = \underline{\quad 199 \quad}$$

$$C4 = \underline{\quad 236 \quad}$$

$$C5 = \underline{\quad 249 \quad}$$

$$C6 = \underline{\quad 61 \quad}$$

NOTE: FL is the post-test length of the damaged surface.

Measurements C1 - C6 were spaced equally apart over the post-impact length of the damaged surface. This distance is defined as length "FL" on the vehicle crush profile plot.

All measurements are in millimeters.

Figure 6 Vehicle Crush Profile at Mid-Door Height

Test No. 941007

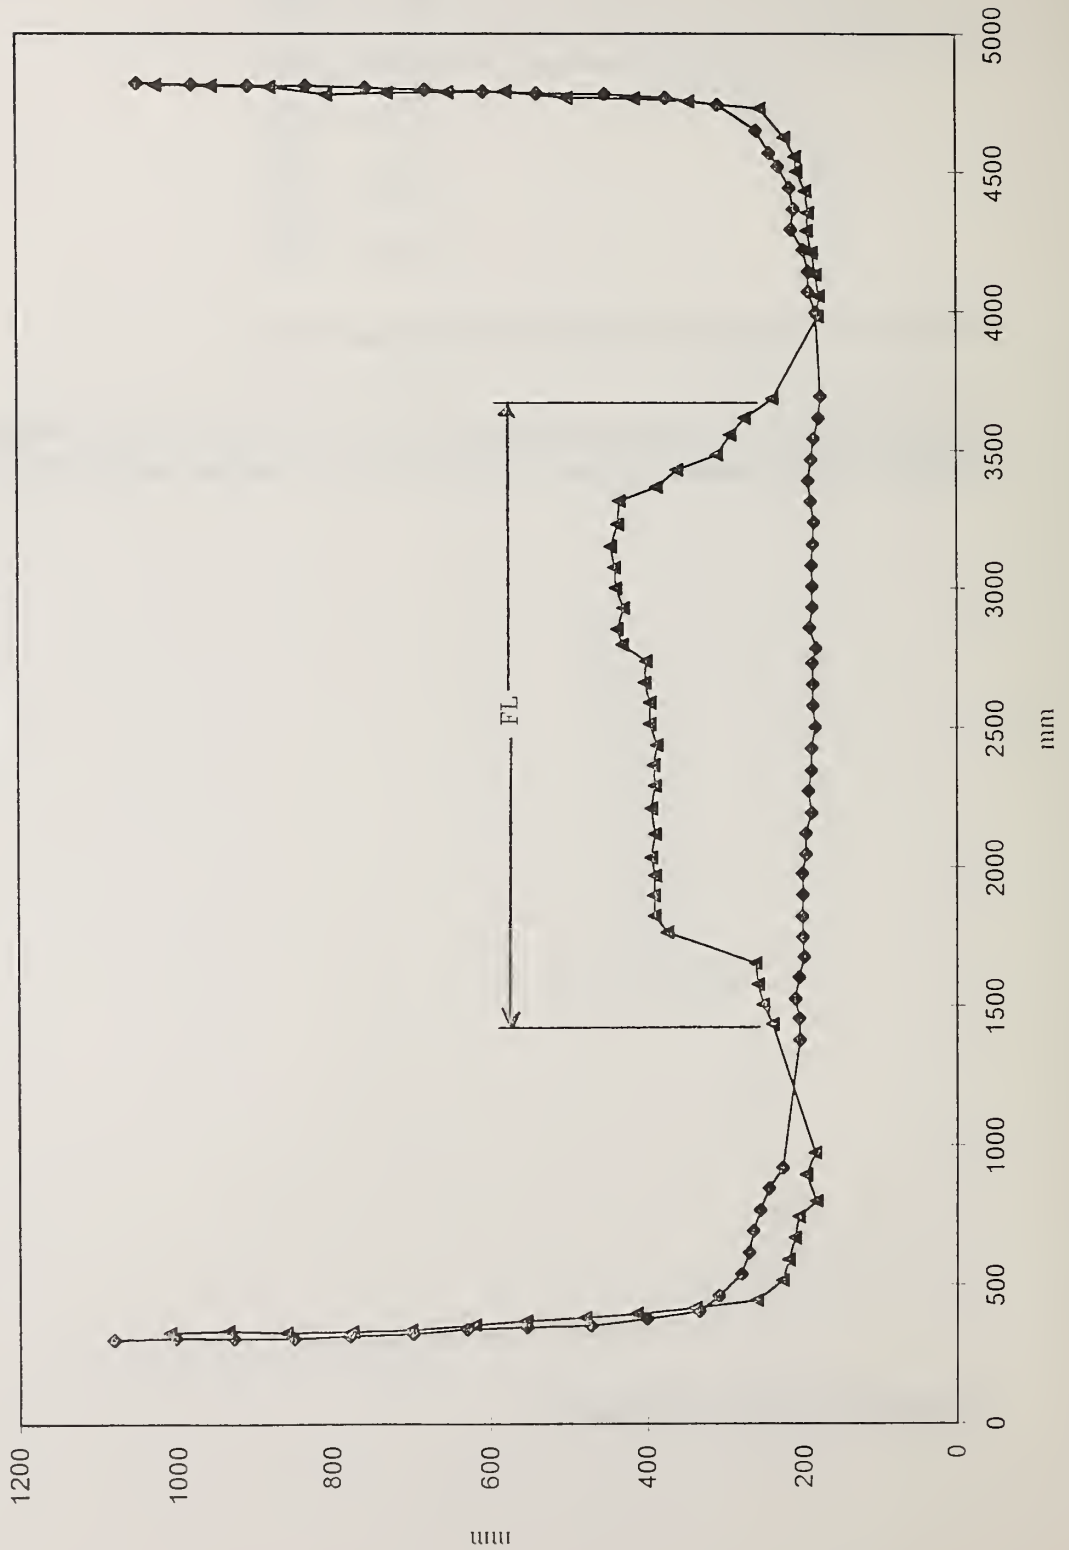


Table 15 Vehicle Crush at Window Sill Height

Test No. 941007

$$FL = \underline{\quad 1640 \quad}$$

$$C1 = \underline{\quad 52 \quad}$$

$$C2 = \underline{\quad 47 \quad}$$

$$C3 = \underline{\quad 56 \quad}$$

$$C4 = \underline{\quad 70 \quad}$$

$$C5 = \underline{\quad 188 \quad}$$

$$C6 = \underline{\quad 50 \quad}$$

NOTE: FL is the post-test length of the damaged surface.

Measurements C1 - C6 were spaced equally apart over the post-impact length of the damaged surface. This distance is defined as length "FL" on the vehicle crush profile plot.

All measurements are in millimeters.

Figure 7 Vehicle Crush Profile at Window Sill Height

Test No. 941007

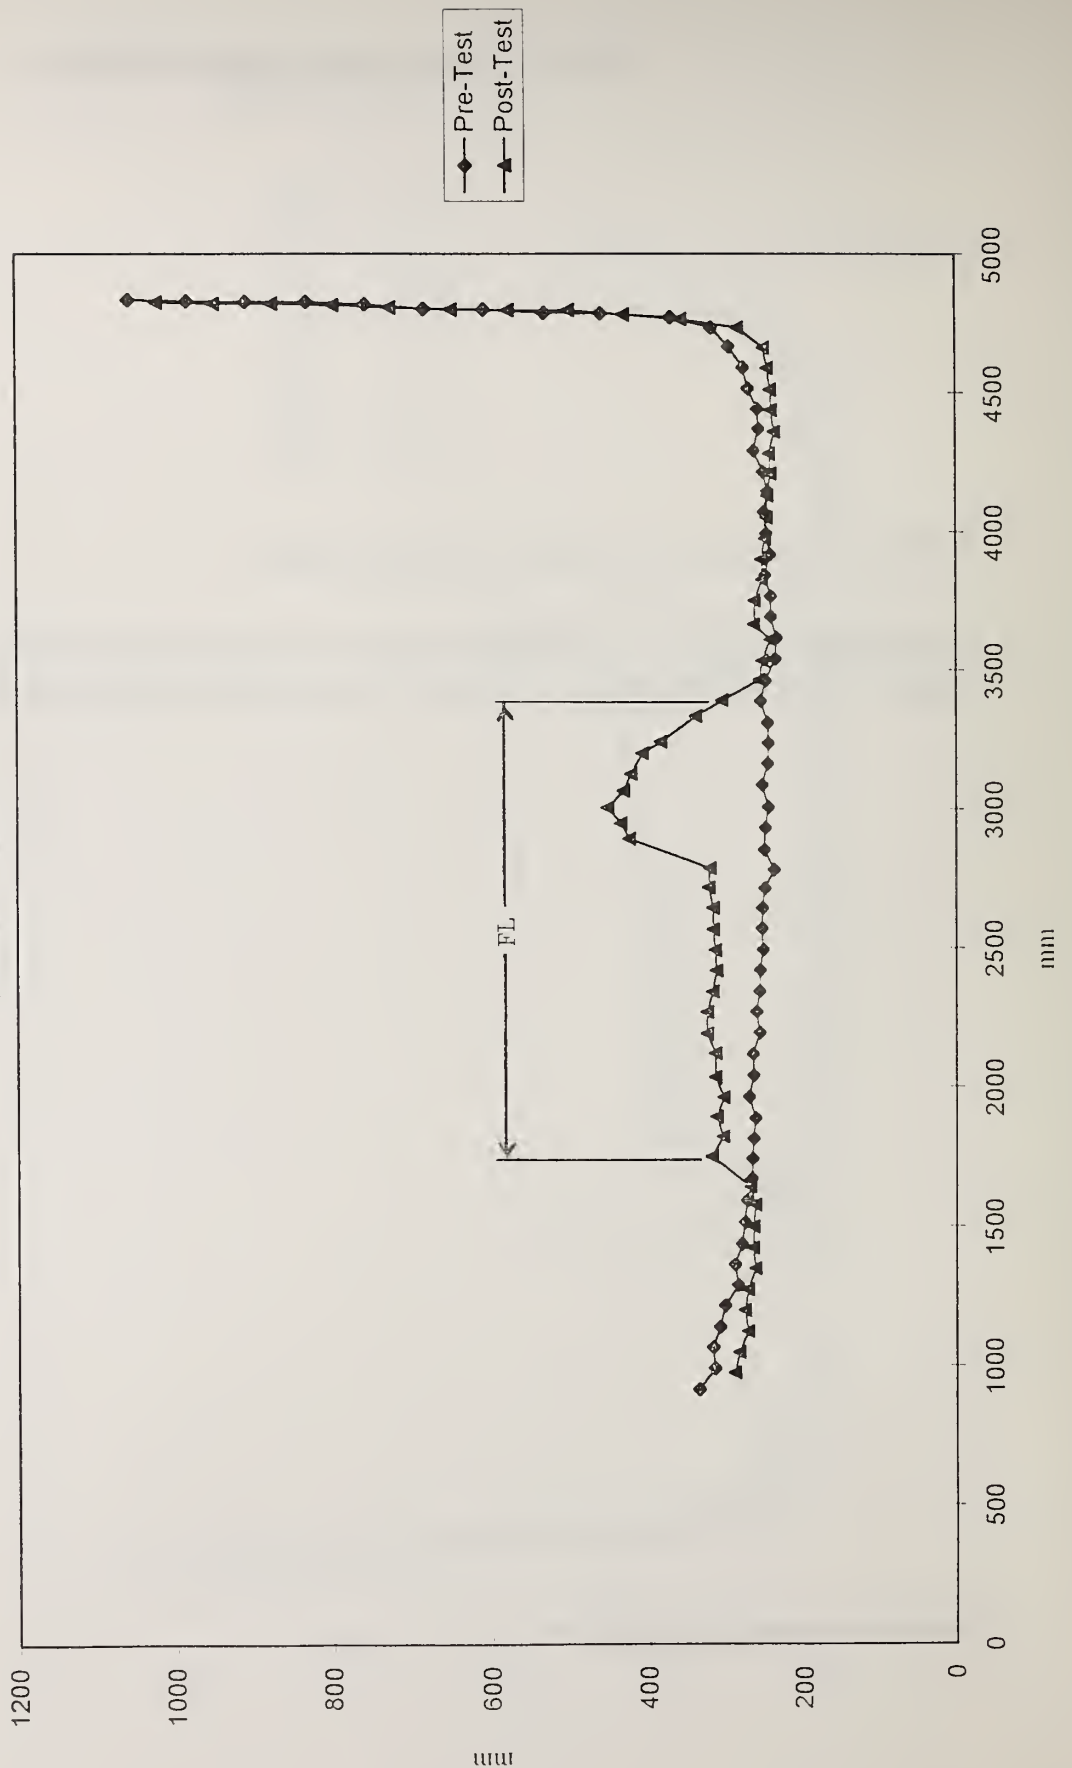


Table 16 Vehicle Crush at Window Top Height

Test No. 941007

$$FL = \underline{\quad 754 \quad}$$

$$C1 = \underline{\quad -12 \quad}$$

$$C2 = \underline{\quad -14 \quad}$$

$$C3 = \underline{\quad -17 \quad}$$

$$C4 = \underline{\quad -56 \quad}$$

$$C5 = \underline{\quad -26 \quad}$$

$$C6 = \underline{\quad -19 \quad}$$


NOTE: FL is the post-test length of the damaged surface.

Measurements C1 - C6 were spaced equally apart over the post-impact length of the damaged surface. This distance is defined as length "FL" on the vehicle crush profile plot.

All measurements are in millimeters.

Figure 8. Vehicle Crush Profile at Window Top Height

Test No. 941007

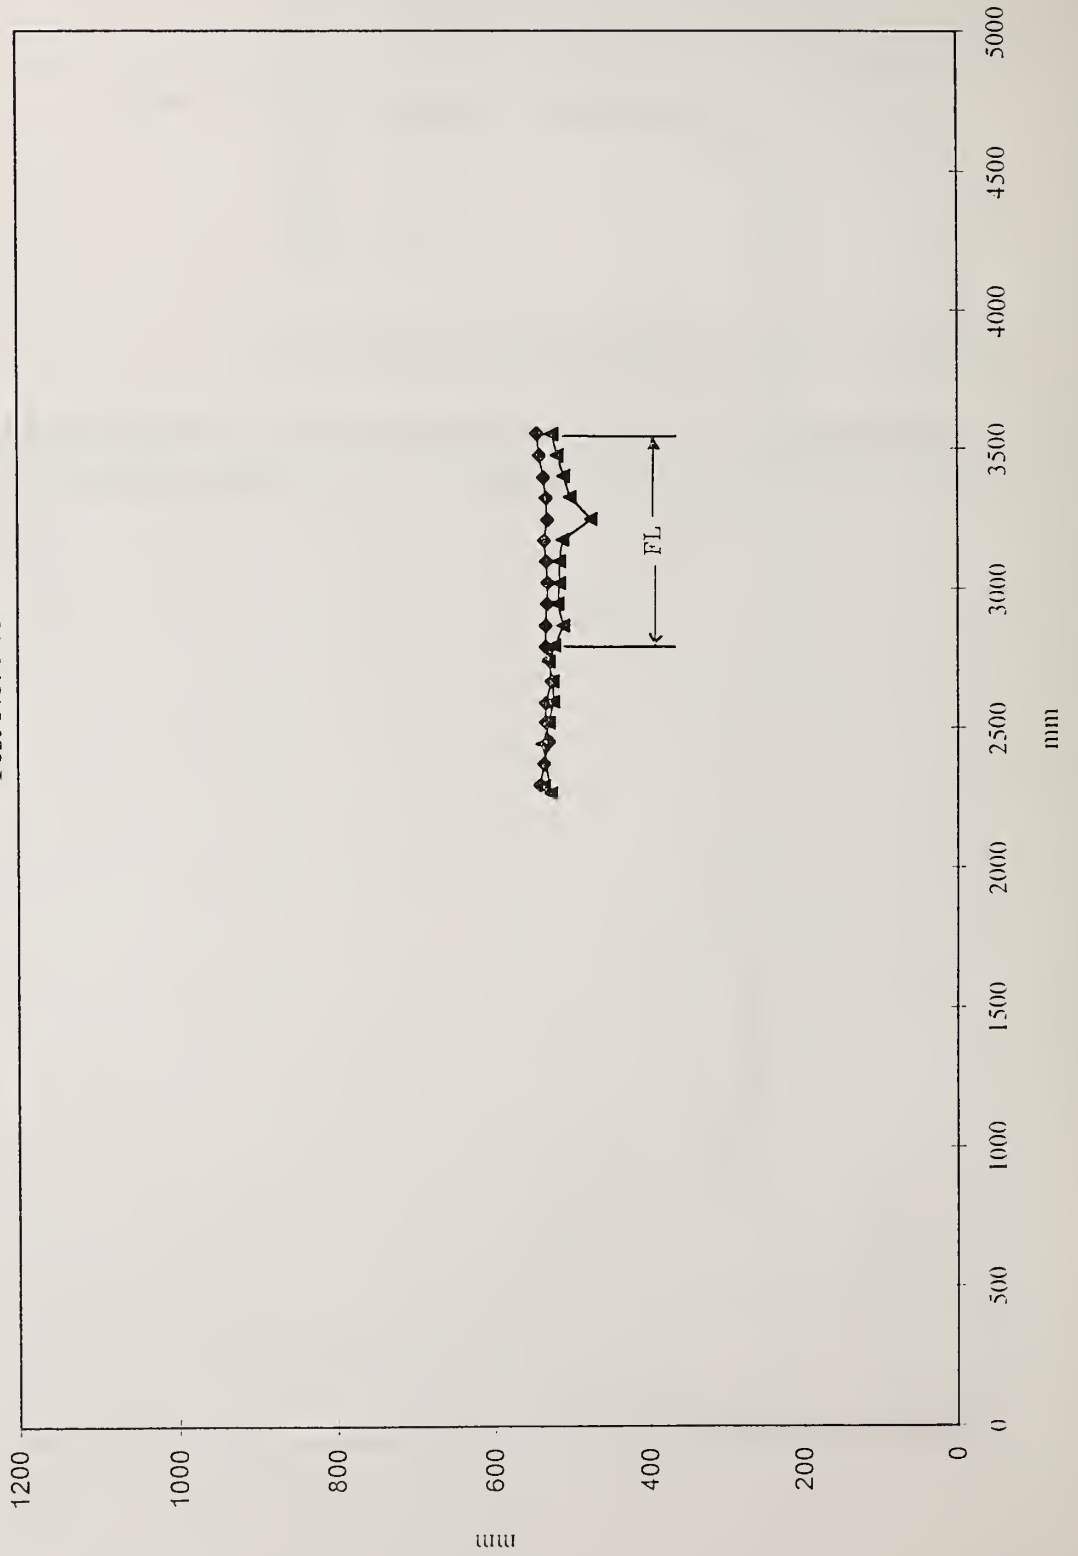

Data Acquisition Explanations

The vehicle's left front sill X-axis acceleration data channel, LFSXG1, did not return to zero after the impact event. This anomaly affected the computations of the vehicle's left front sill X-axis velocity and displacement.

The vehicle's right front sill X-axis acceleration data channel, RFSXG1, did not return to zero after the impact event. This anomaly affected the computations of the vehicle's right front sill X-axis velocity and displacement.

The vehicle's left rear seat crossmember Y-axis acceleration data channel, TLRYG1, exceeded its data channel rated full scale output between 19 and 25 milliseconds. This anomaly affected the computations of the vehicle's left rear seat crossmember velocity and displacement.

Appendix A

Photographs



Figure A-1. Pre-Test Front View



Figure A-2. Post-Test Front View



Figure A-3. Pre-Test Left Front View



Figure A-4. Post-Test Left Front View



Figure A-5. Pre-Test Left Side View



Figure A-6. Post-Test Left Side View



Figure A-7. Pre-Test Left Rear View

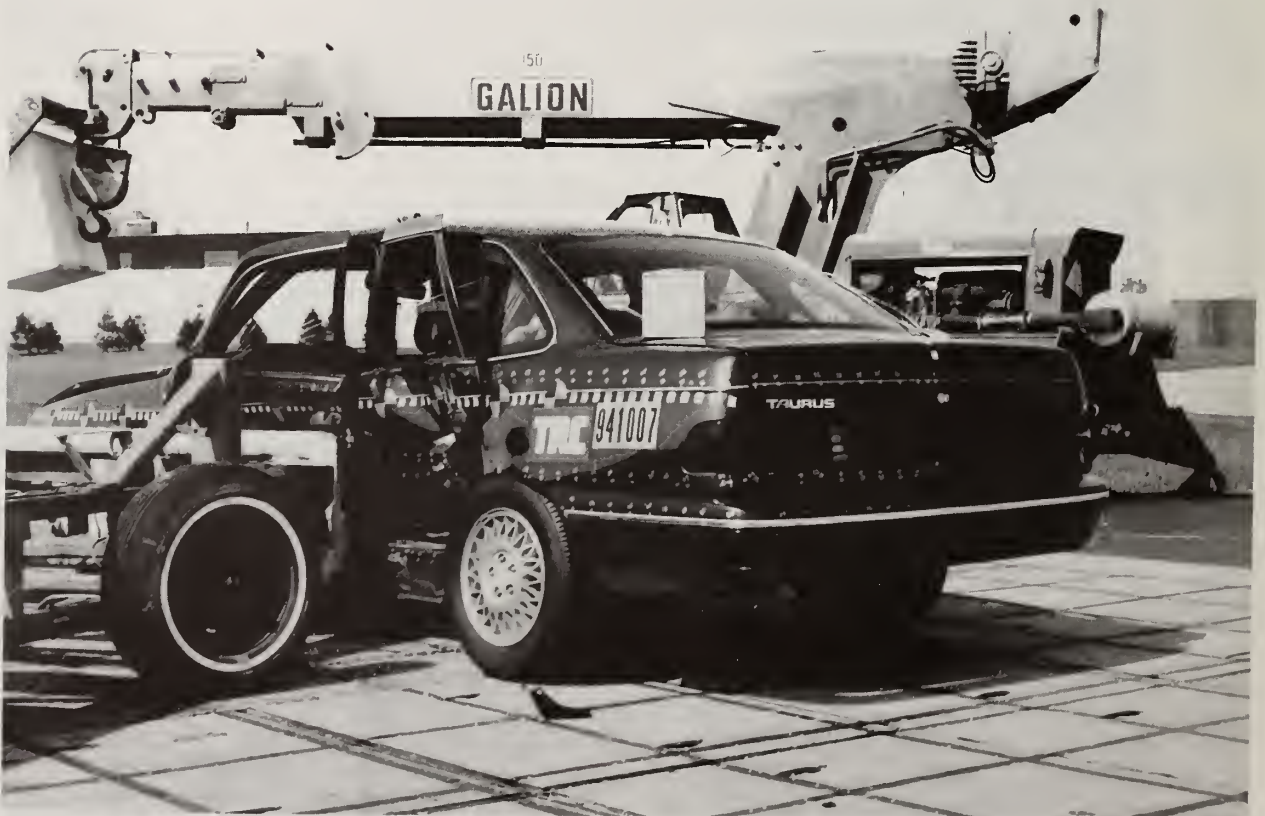


Figure A-8. Post-Test Left Rear View



Figure A-9. Pre-Test Rear View



Figure A-10. Post-Test Rear View



Figure A-11. Pre-Test Right Side View



Figure A-12. Post-Test Right Side View

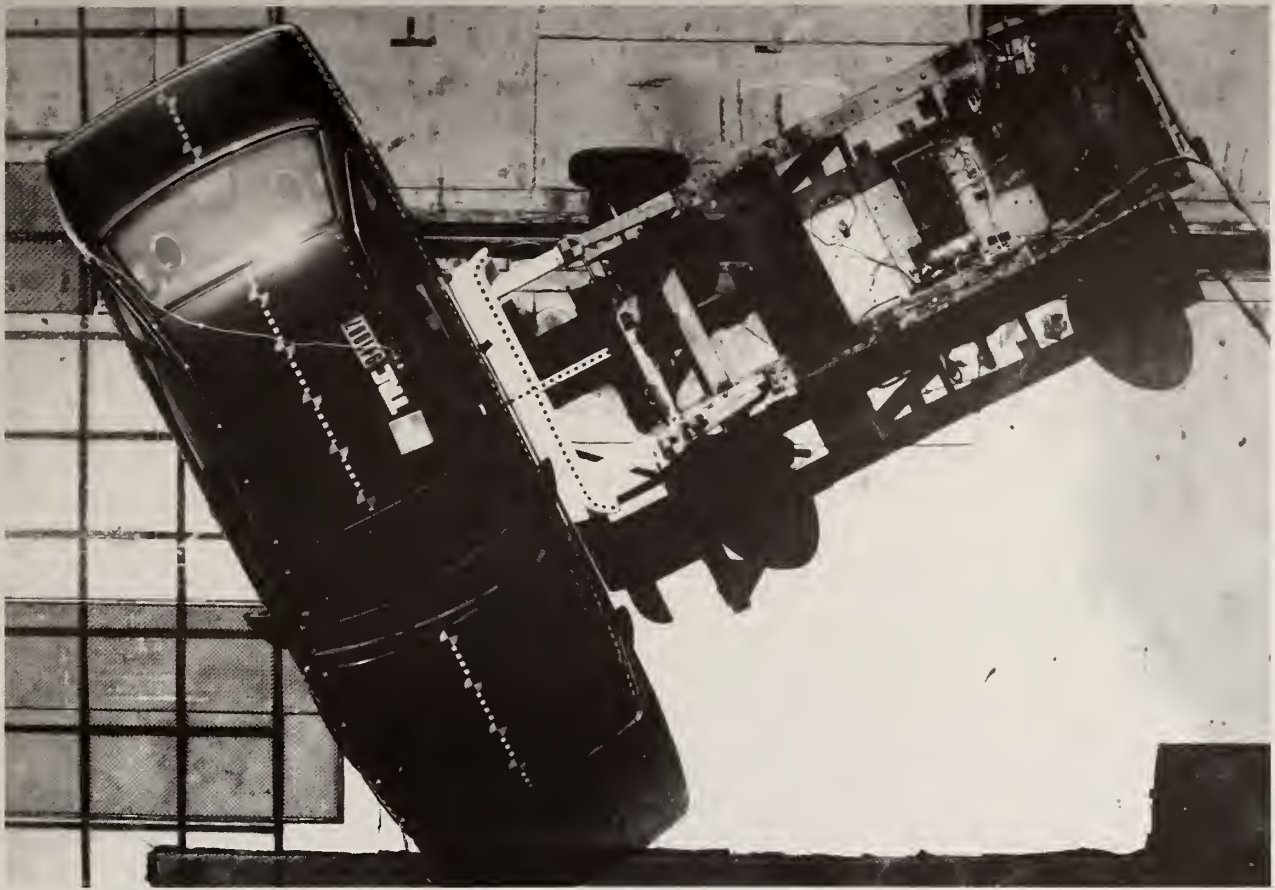


Figure A-13. Pre-Test Overhead Alignment - View 1

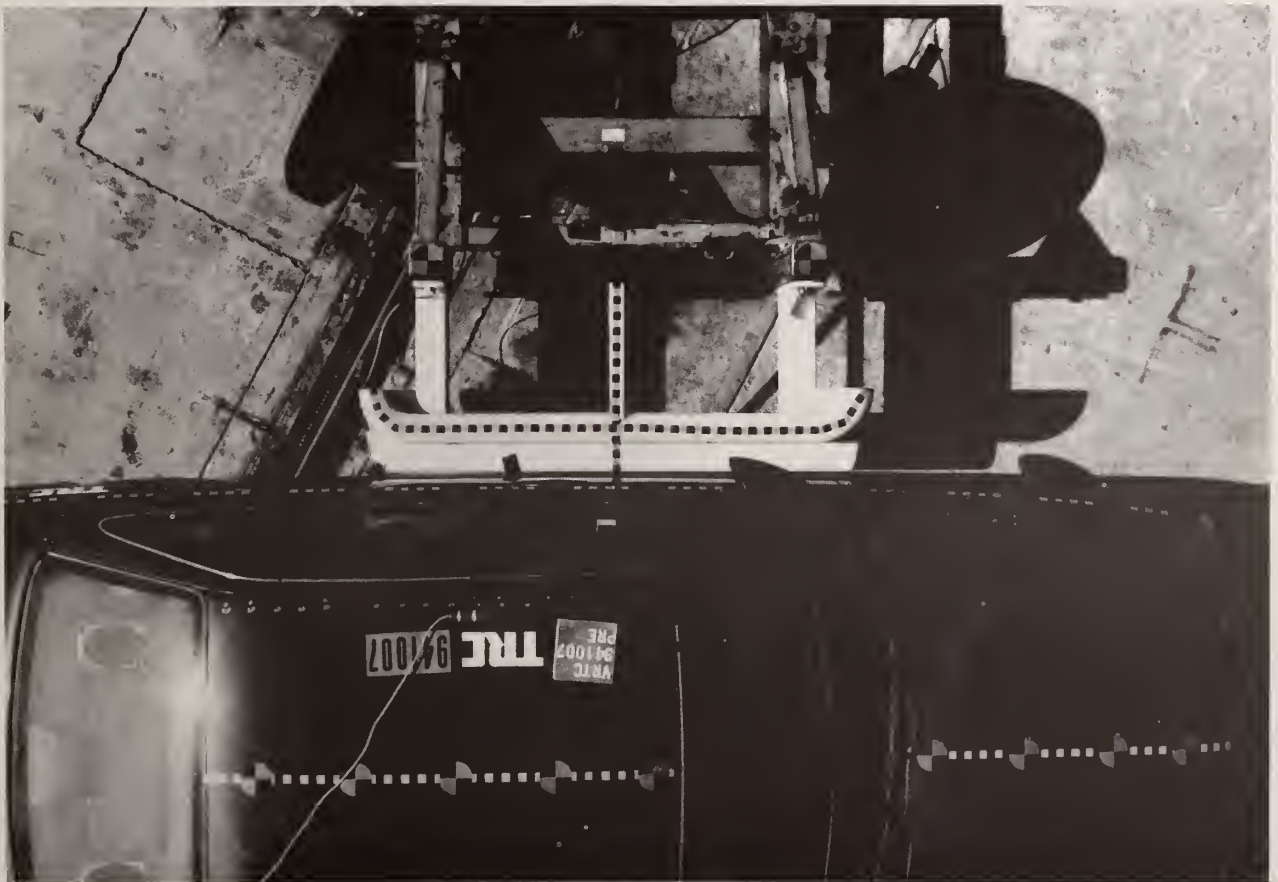


Figure A-14. Pre-Test Overhead Alignment - View 2


Appendix B

Data Plots

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY X-AXIS ACCELERATION

SIDE IMPACT

TEST NUMBER 941007

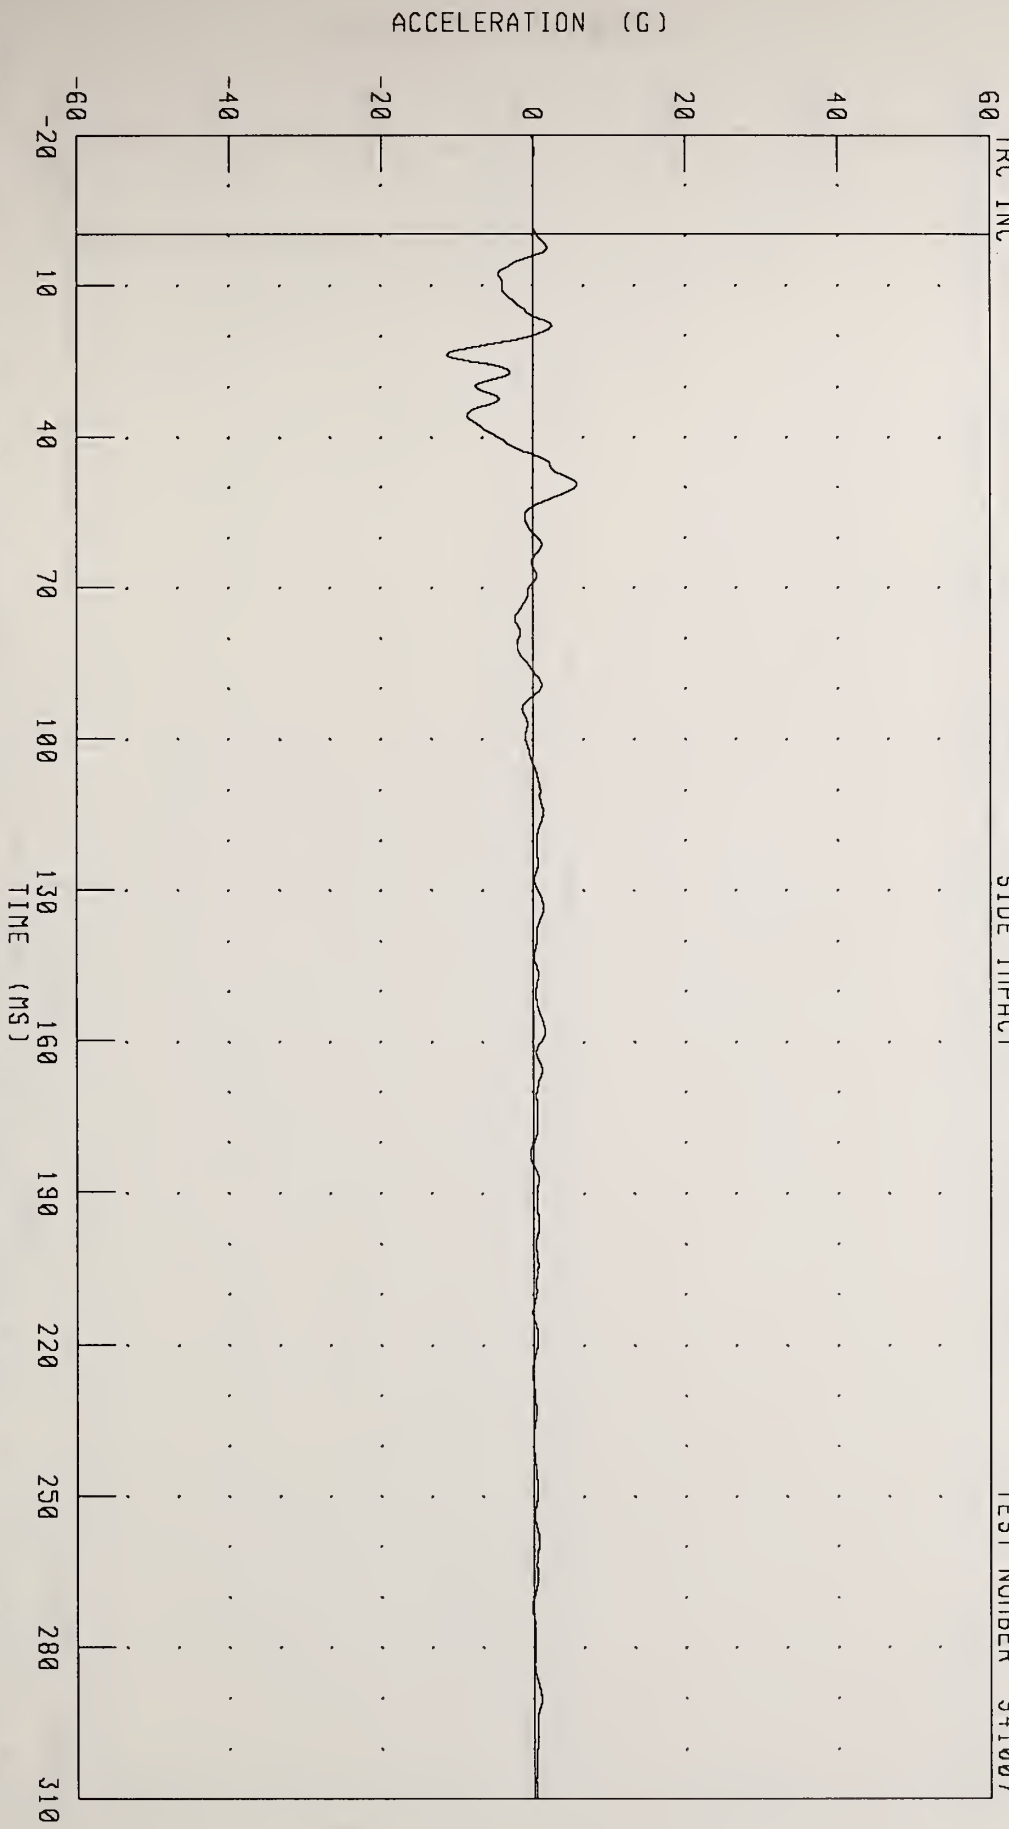


CHANNEL: VCGXG FILTER: CH CLASS 60

PEAK DATA: 5.79 G @ 49.52 MS, -11.34 G @ 23.84 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY X-AXIS VELOCITY

SIDE IMPACT


TEST NUMBER 941007

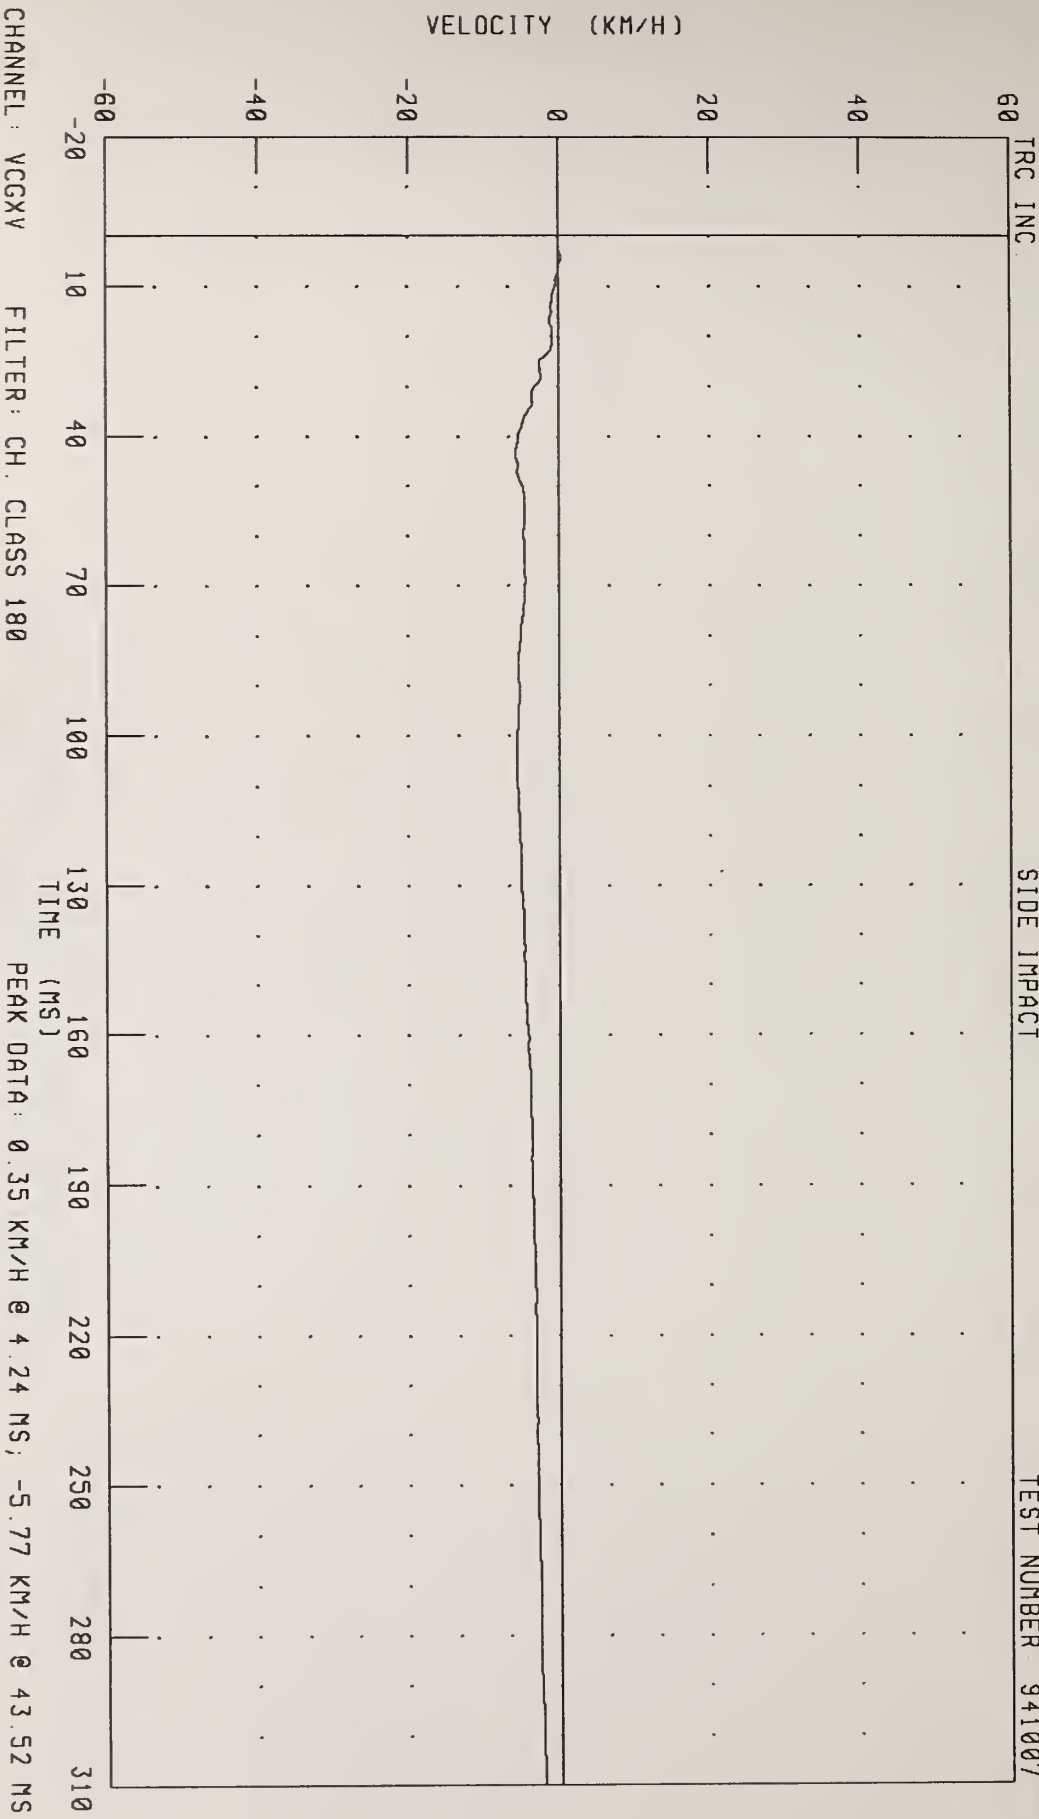

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY X-AXIS DISPLACEMENT

SIDE IMPACT

TEST NUMBER 941007

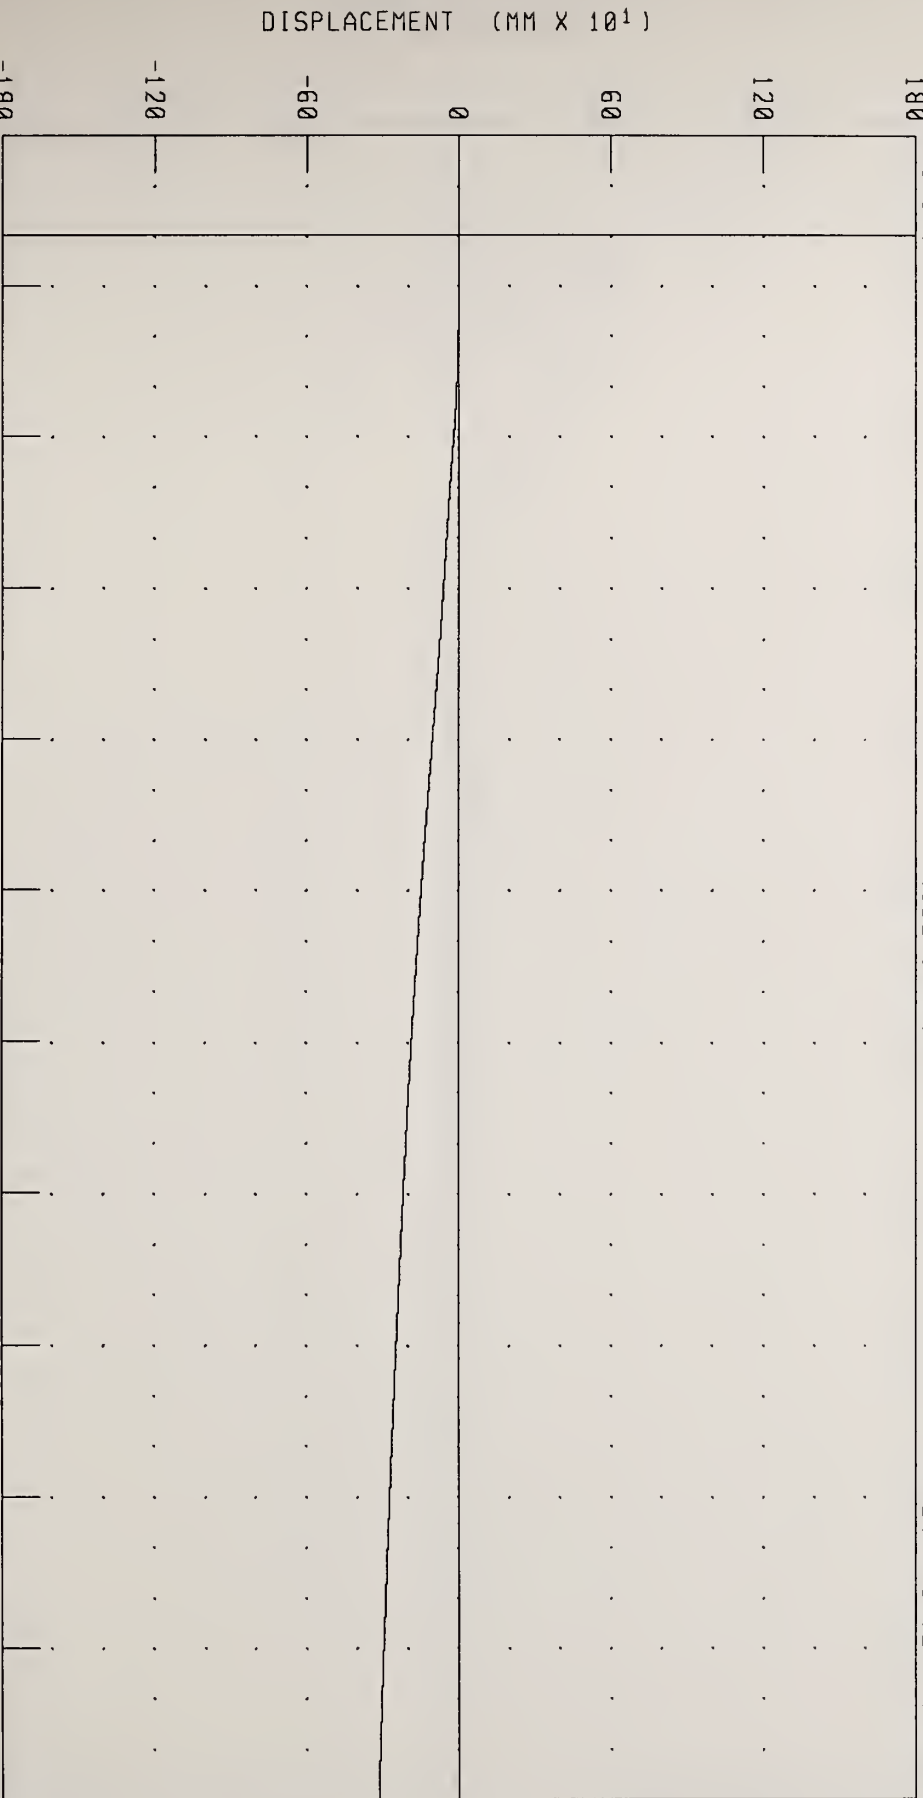


CHANNEL : VCGXD FILTER : CH. CLASS 180
PEAK DATA : 0.19 MM @ 7.20 MS, -316.80 MM @ 310.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY Y-AXIS ACCELERATION

SIDE IMPACT


TEST NUMBER 941007

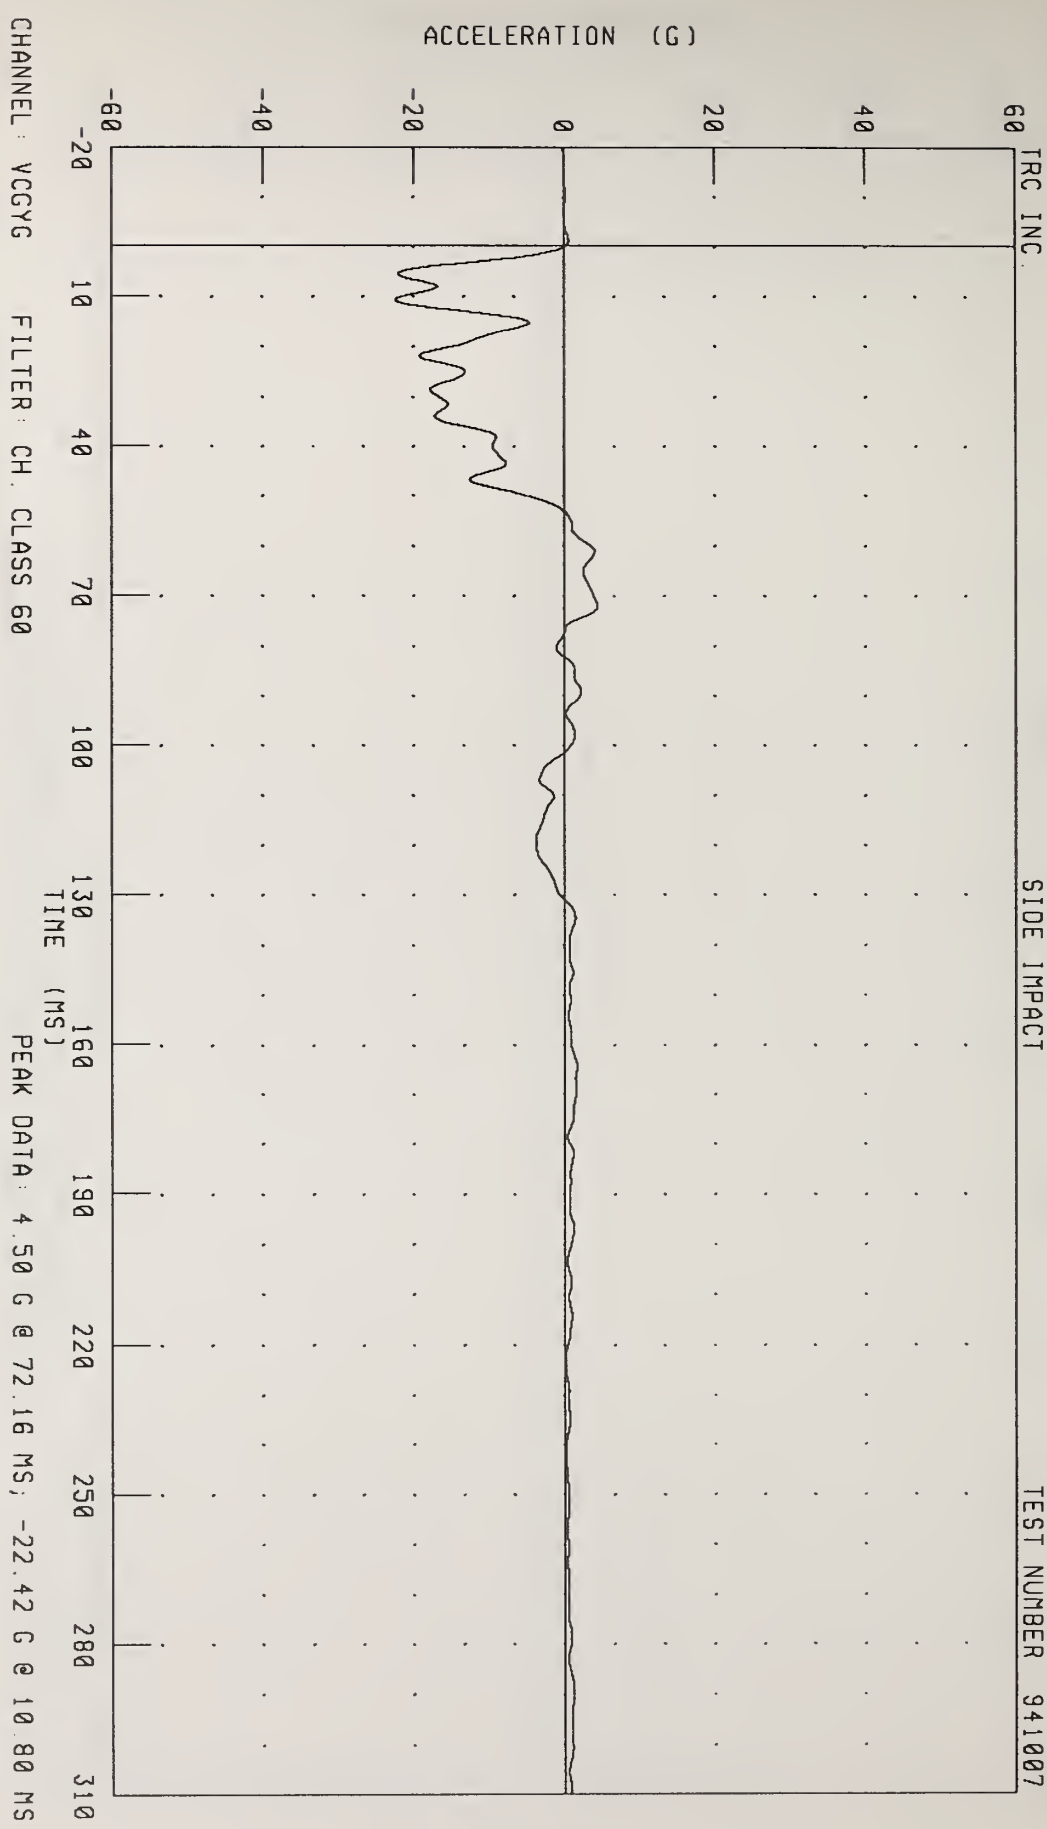

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY Y-AXIS VELOCITY

SIDE IMPACT

TEST NUMBER 941007

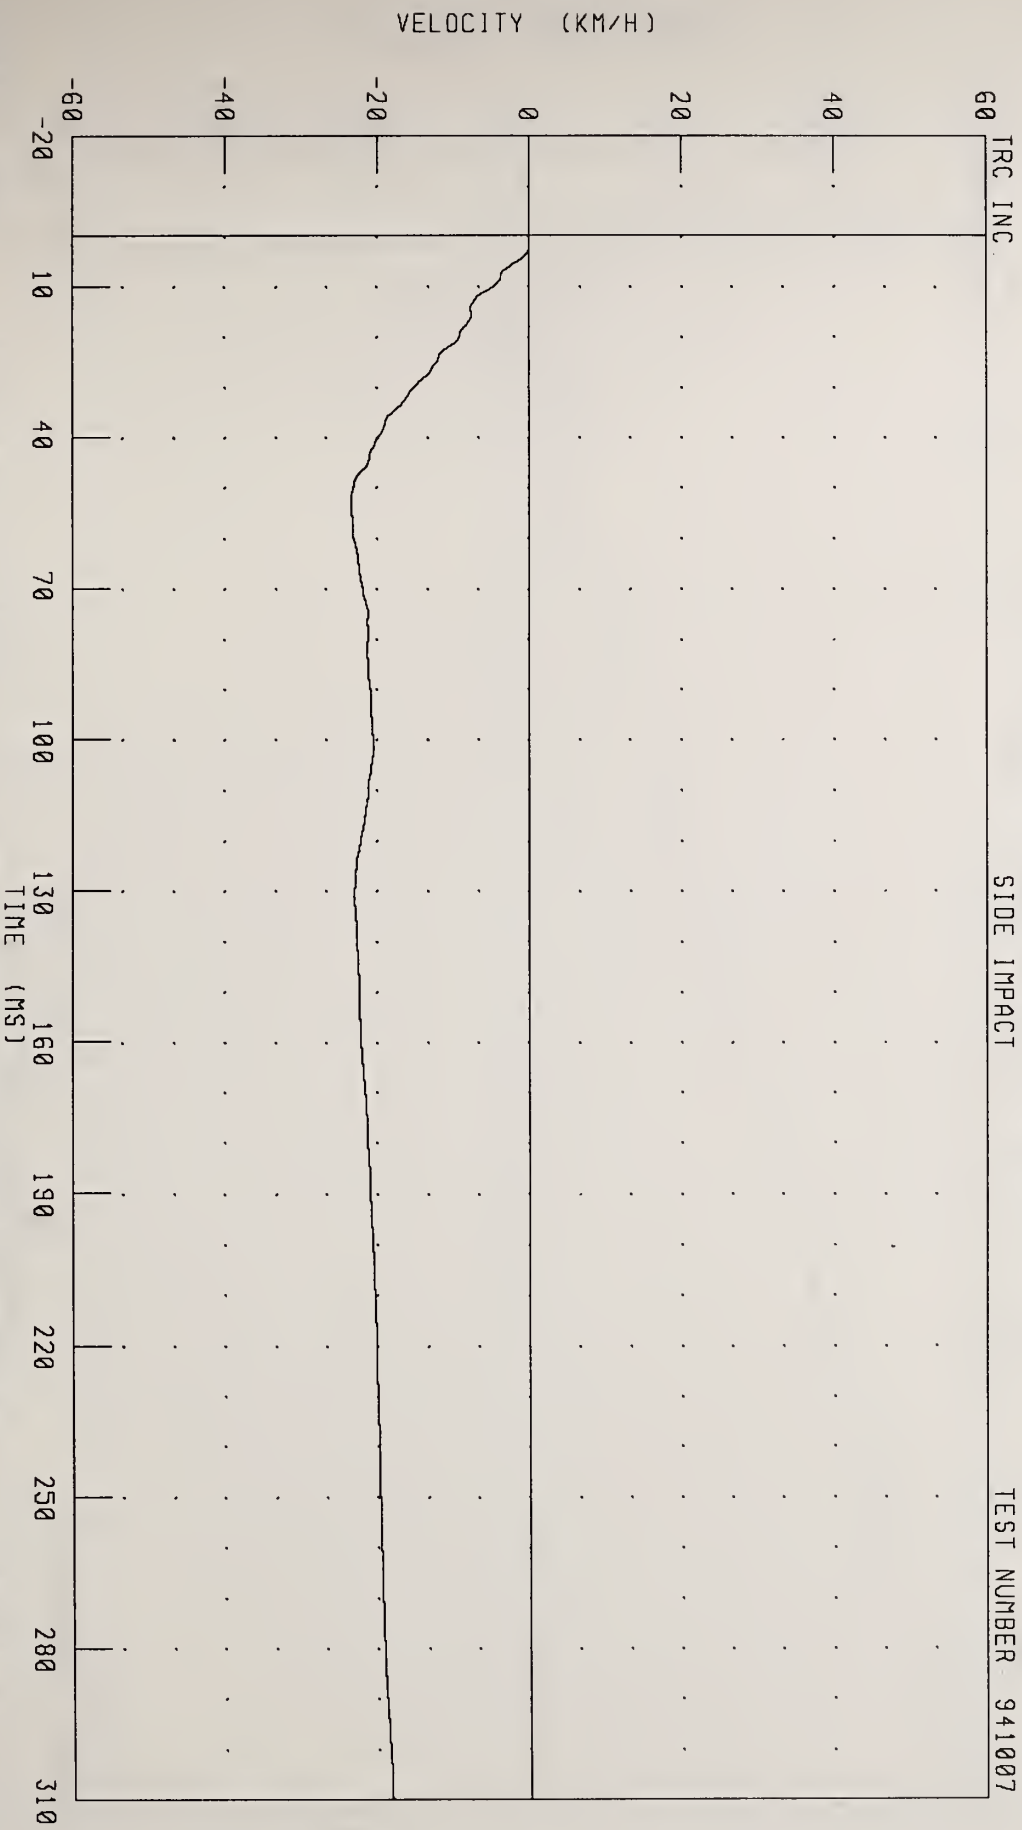

CHANNEL: VCGYV


FILTER: CH CLASS 180

PEAK DATA: 0.01 KM/H @ 2.00 MS, -23.36 KM/H @ 54.72 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY Y-AXIS DISPLACEMENT

SIDE IMPACT

TEST NUMBER 941007

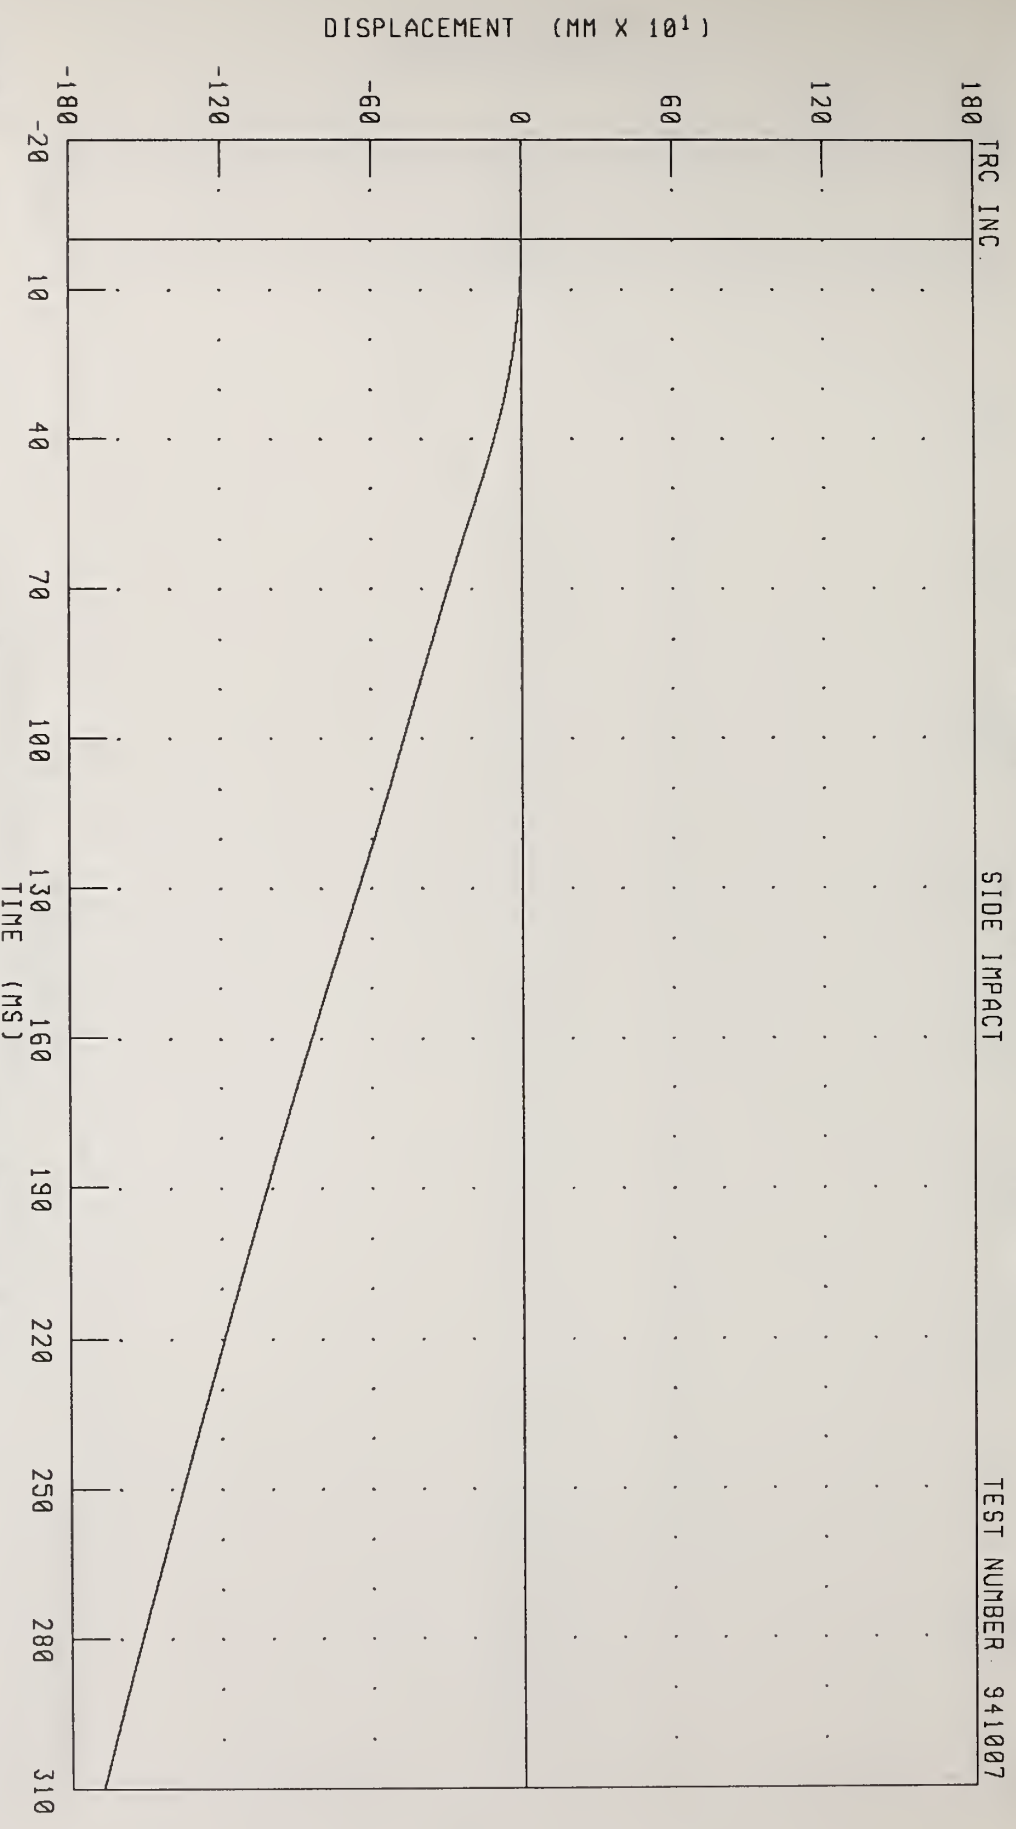


CHANNEL: VCGYD FILTER: CH. CLASS 180
PEAK DATA: 0.00 MM @ 2.32 MS, -1672.93 MM @ 310.00 MS

TRC INC.

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY Z-AXIS ACCELERATION


SIDE IMPACT

TEST NUMBER 941007

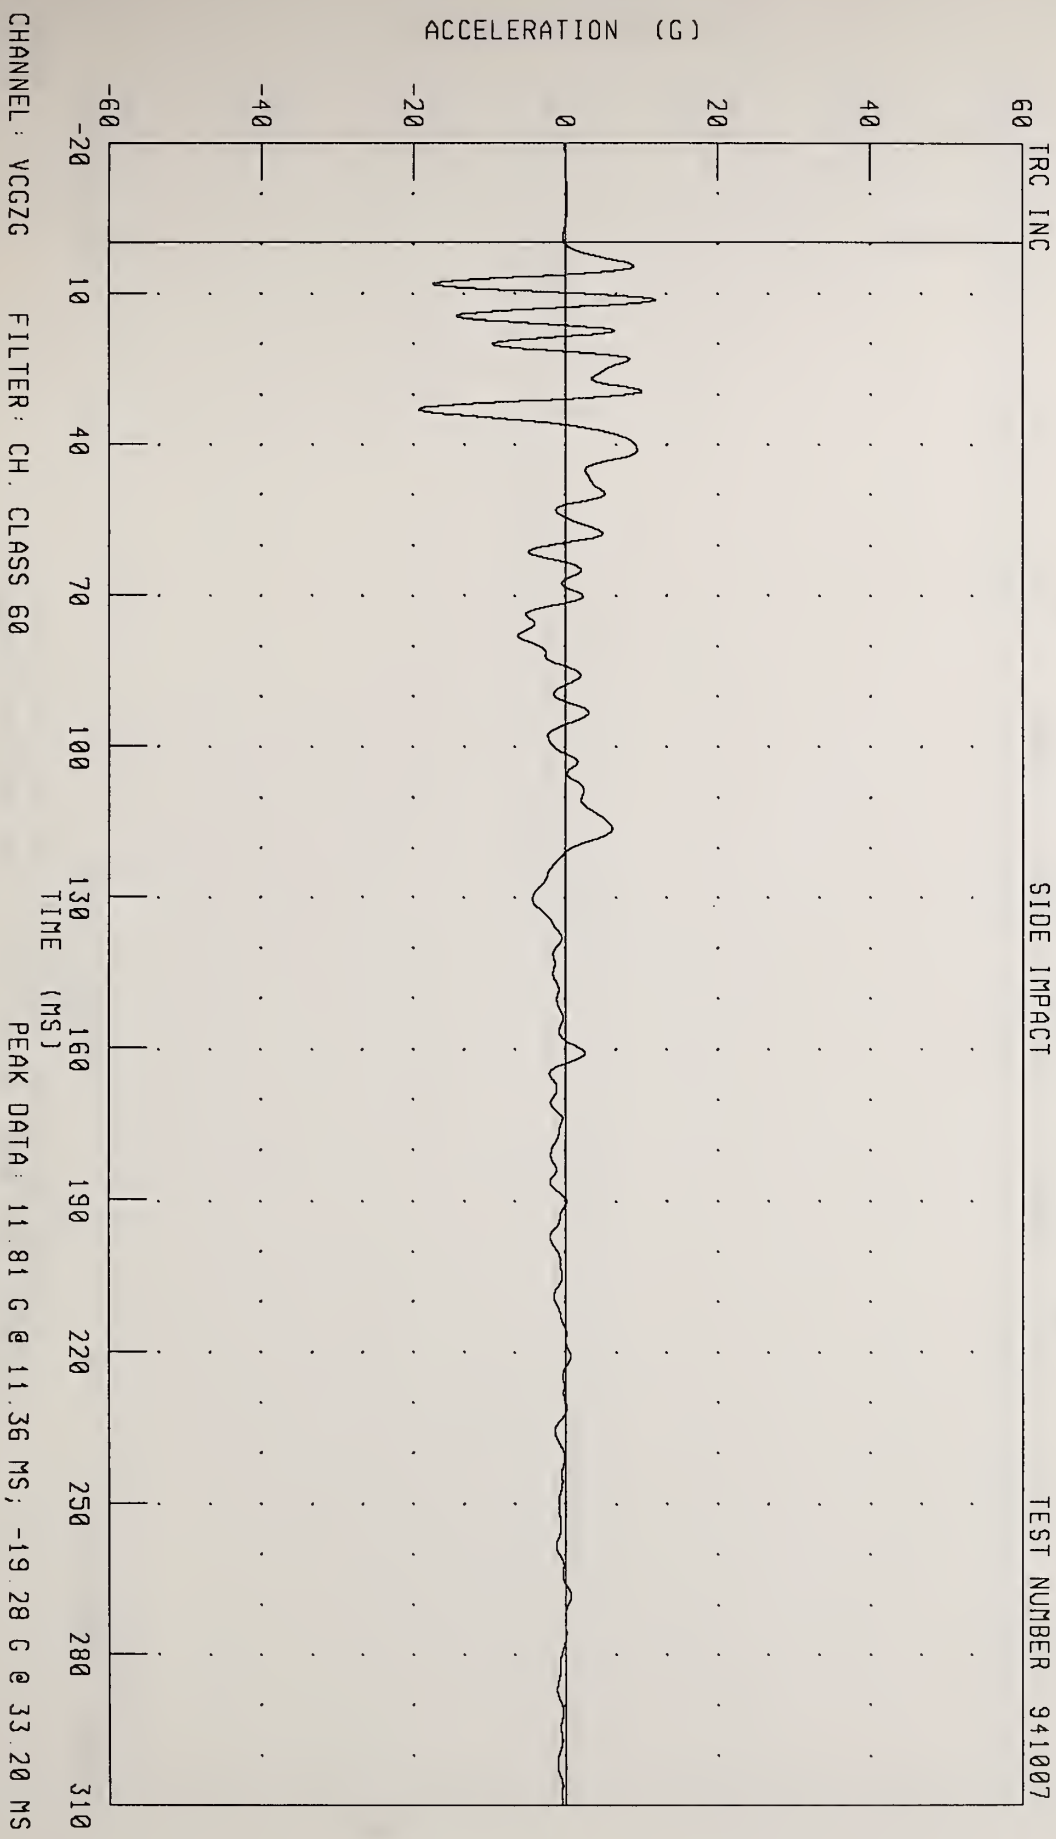

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY Z-AXIS VELOCITY
SIDE IMPACT


TEST NUMBER 941007

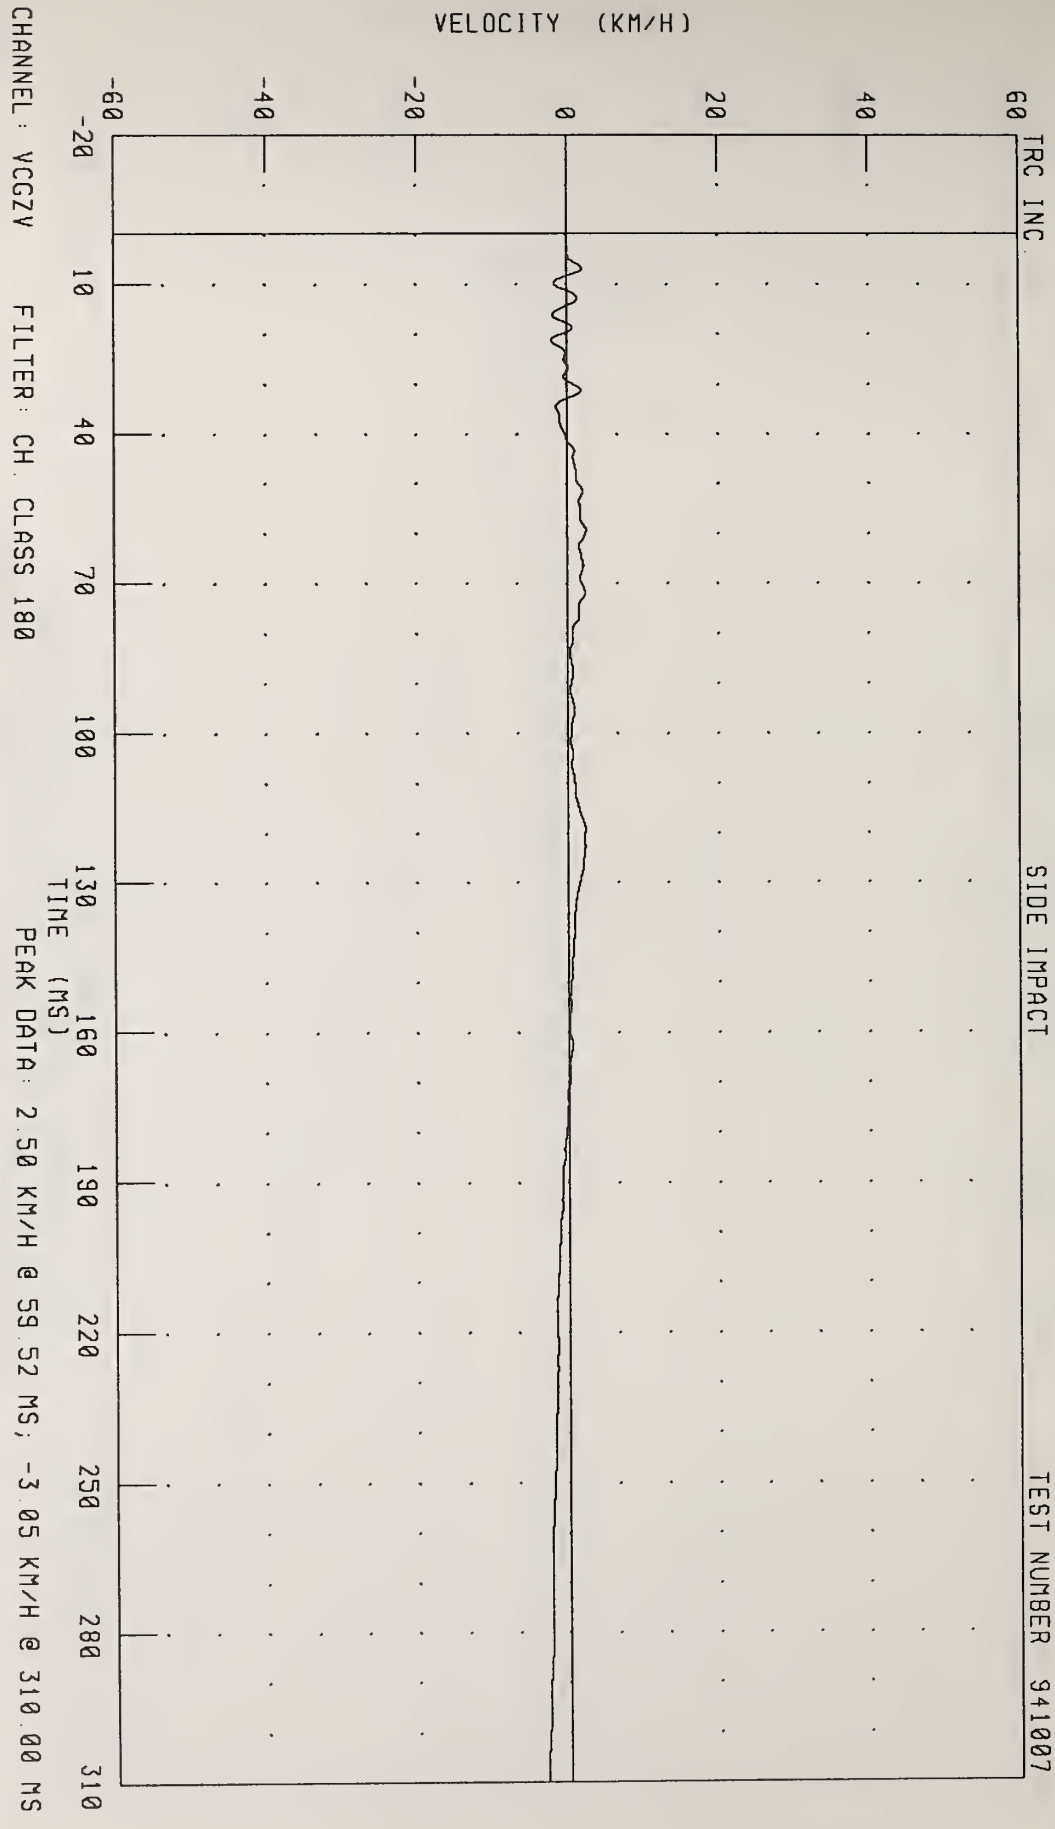

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
 VEHICLE CENTER OF GRAVITY Z-AXIS DISPLACEMENT
 SIDE IMPACT

TRC INC

TEST NUMBER 941007

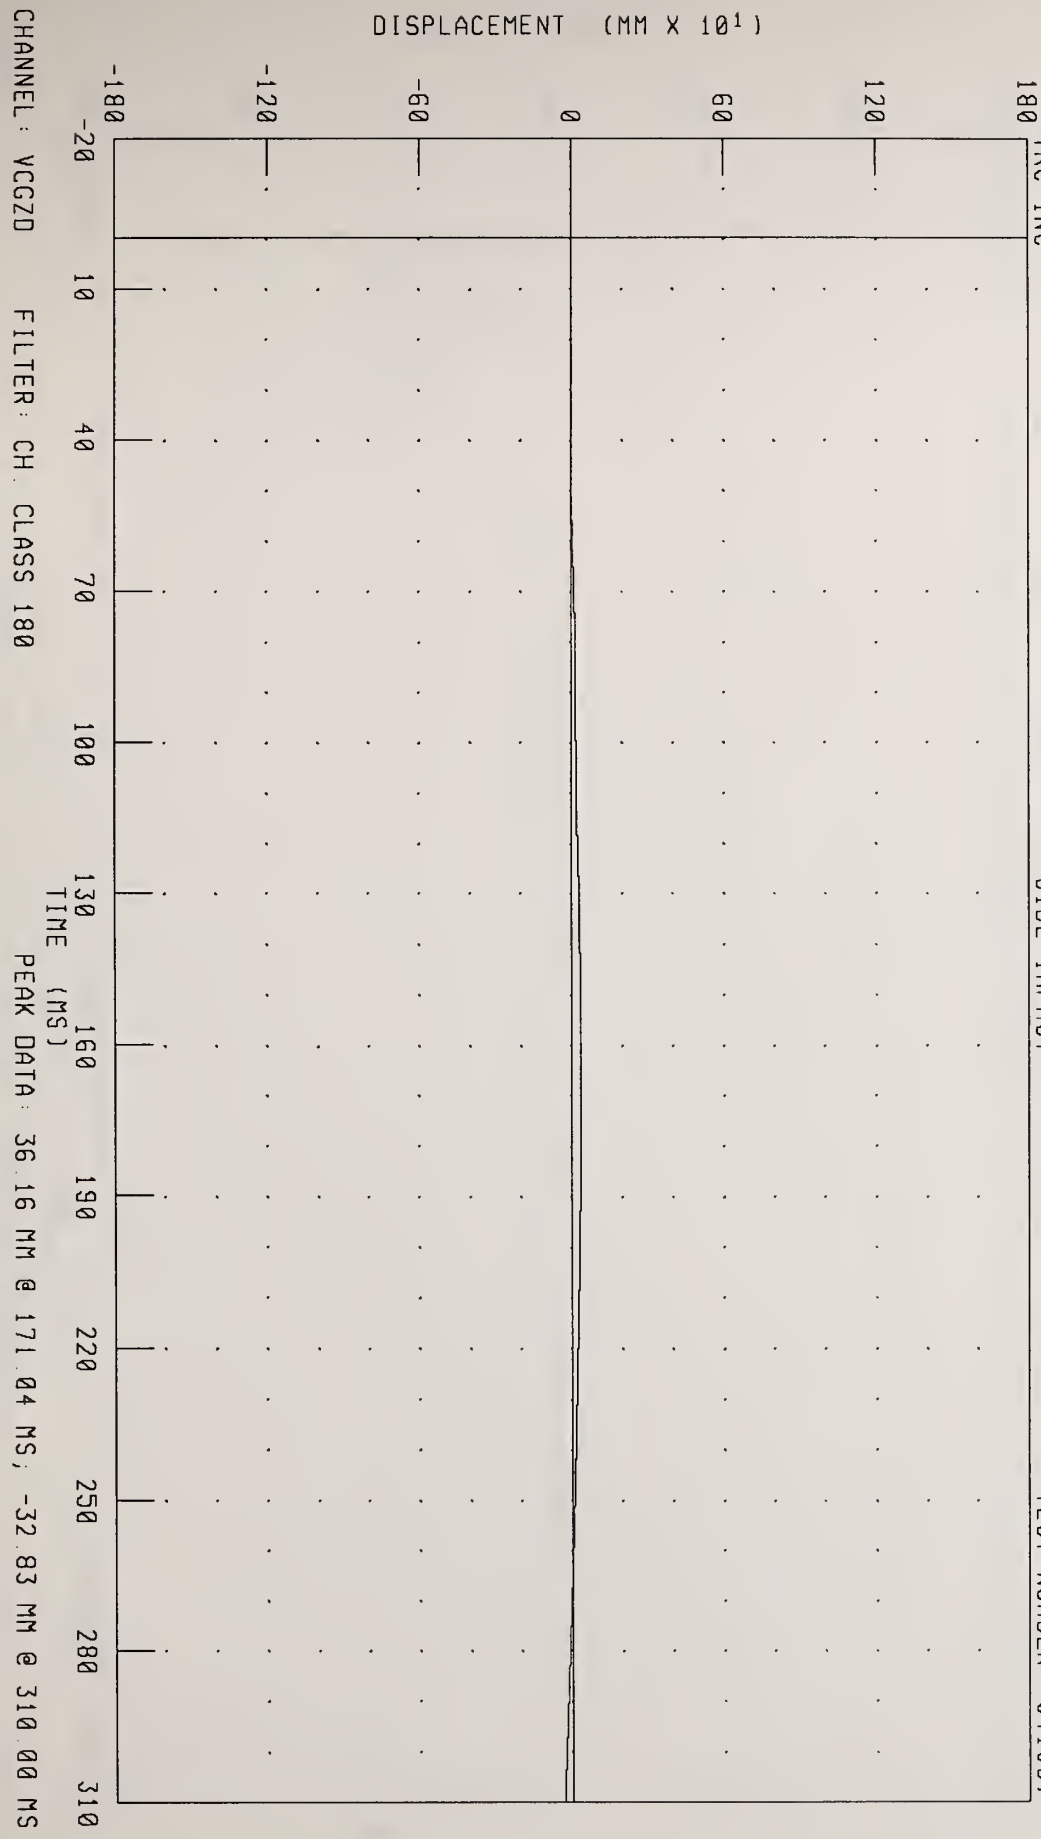


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY RESULTANT ACCELERATION

TRC INC

SIDE IMPACT

TEST NUMBER 941007

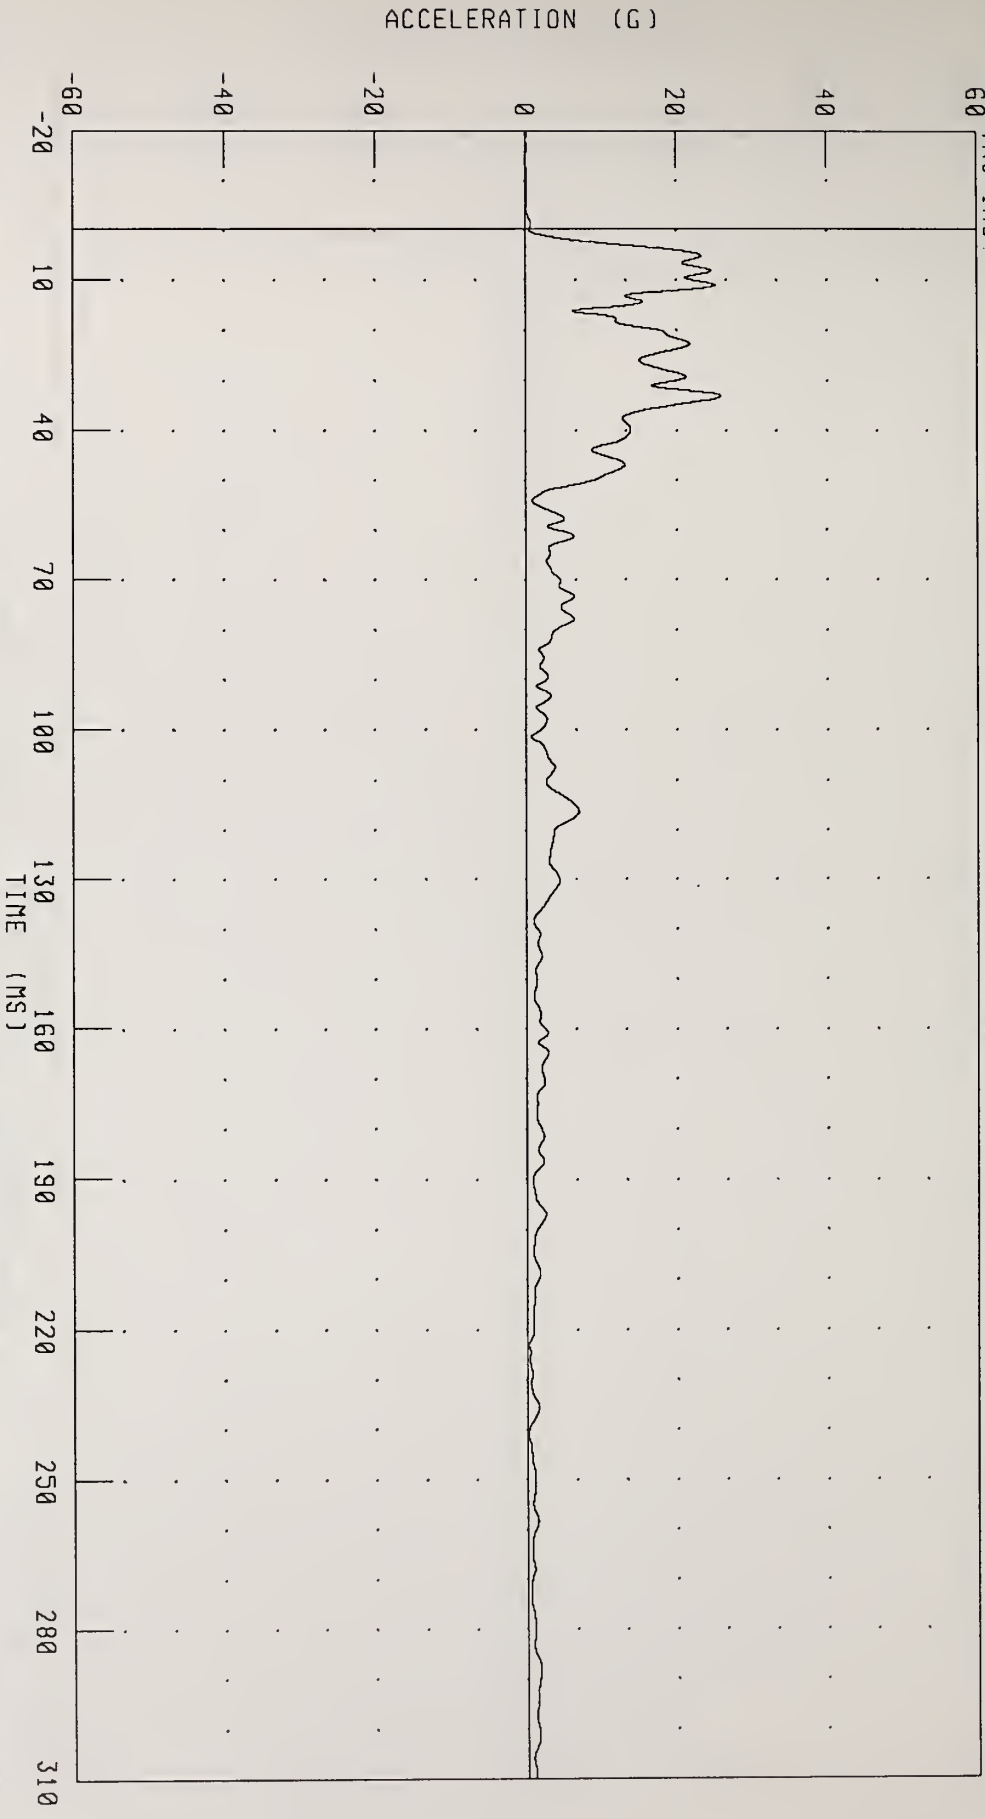


CHANNEL: VCGRC FILTER: CH CLASS 60
PEAK DATA: 25.99 G @ 25.28 MS, 0.04 G @ -14.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY RESULTANT VELOCITY


SIDE IMPACT

TEST NUMBER 941007

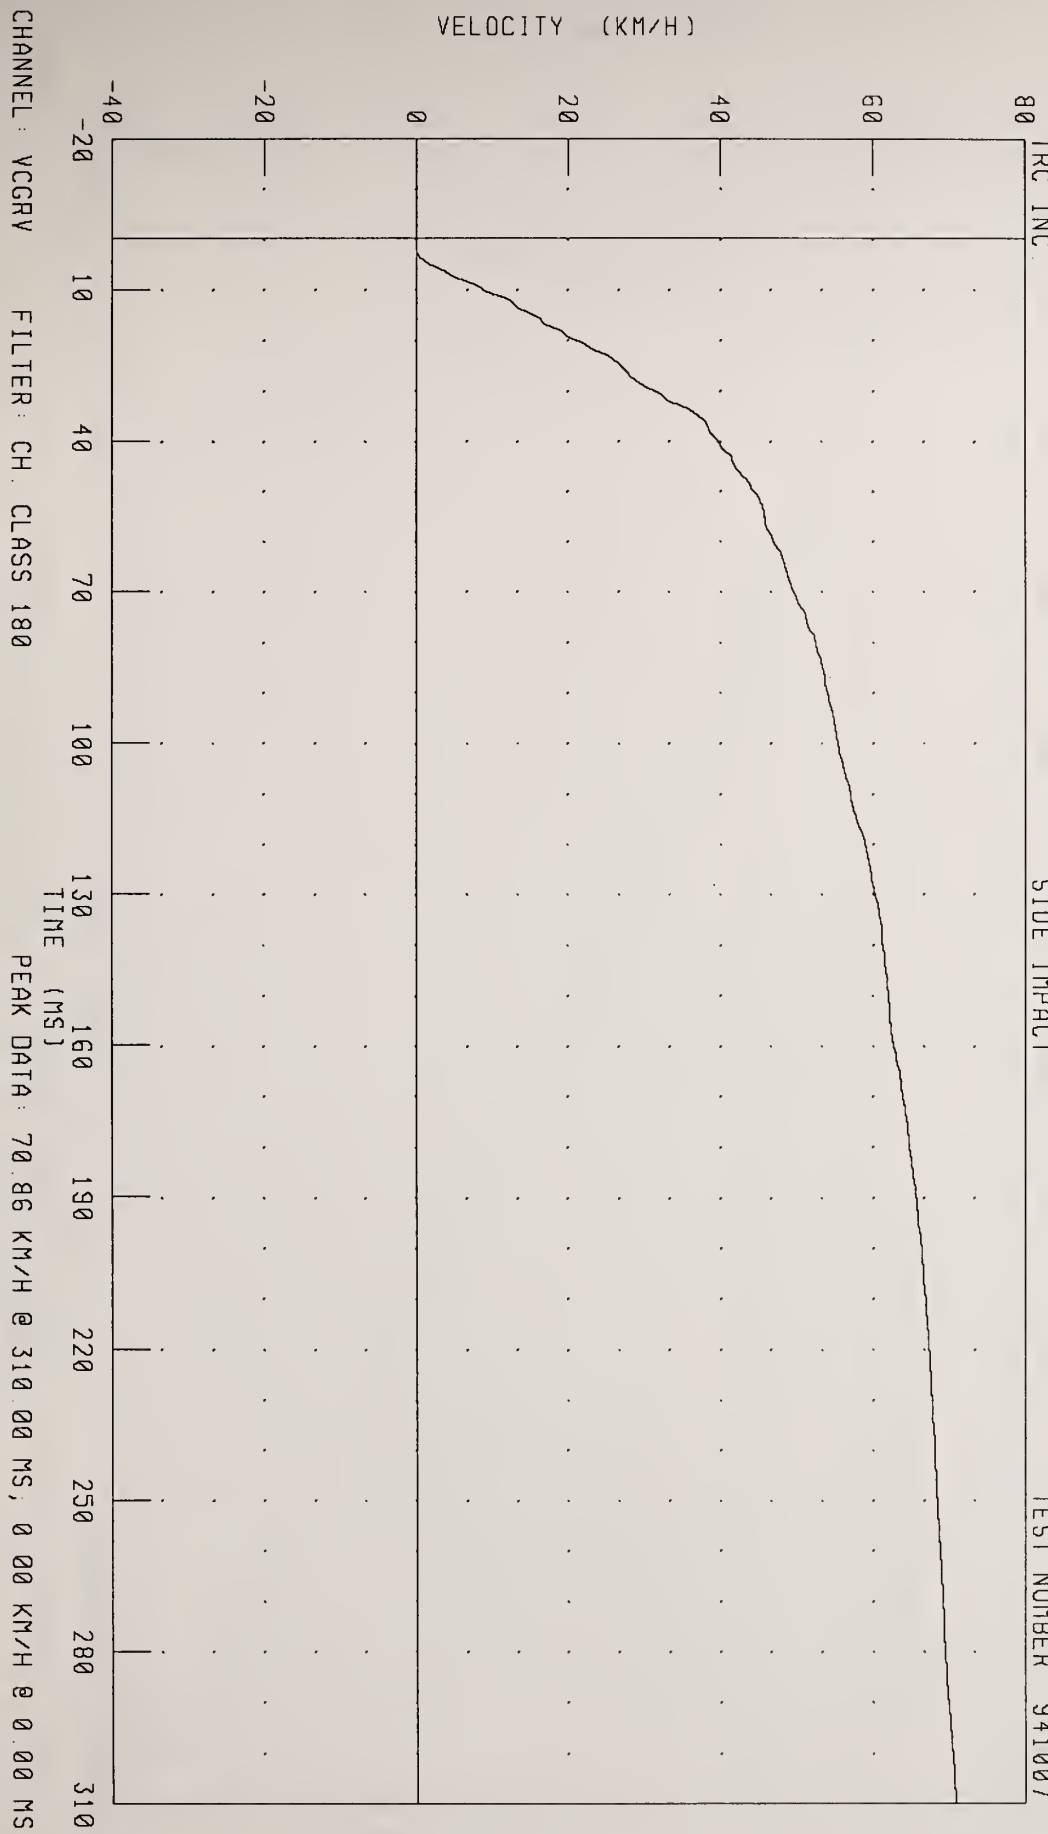

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
VEHICLE CENTER OF GRAVITY RESULTANT DISPLACEMENT
SIDE IMPACT

TEST NUMBER 941007

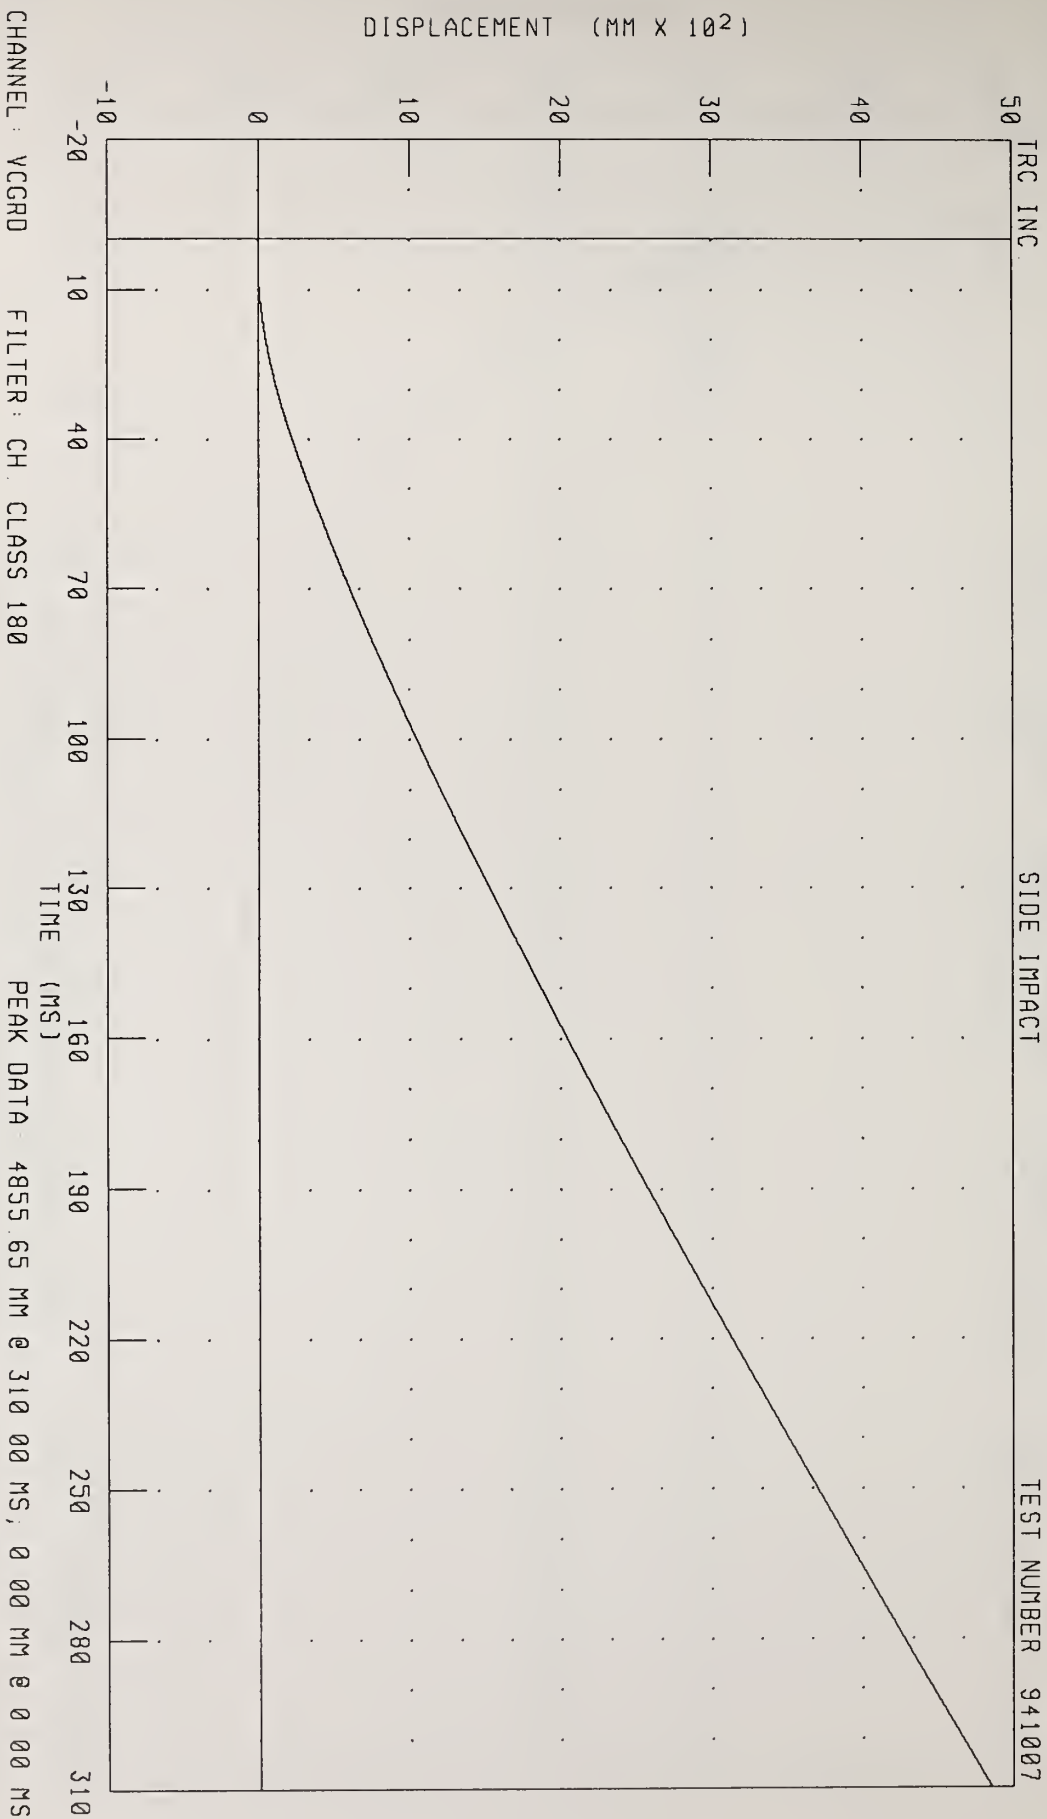

CHANNEL: YCGRD FILTER: CH CLASS 180 PEAK DATA 4855.65 MM @ 310 00 MS, 0 00 MM @ 0 00 MS


DISPLACEMENT (MM X 10²)

TRC INC.

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL X-AXIS ACCELERATION
SIDE IMPACT

TRC INC.


TEST NUMBER 941007

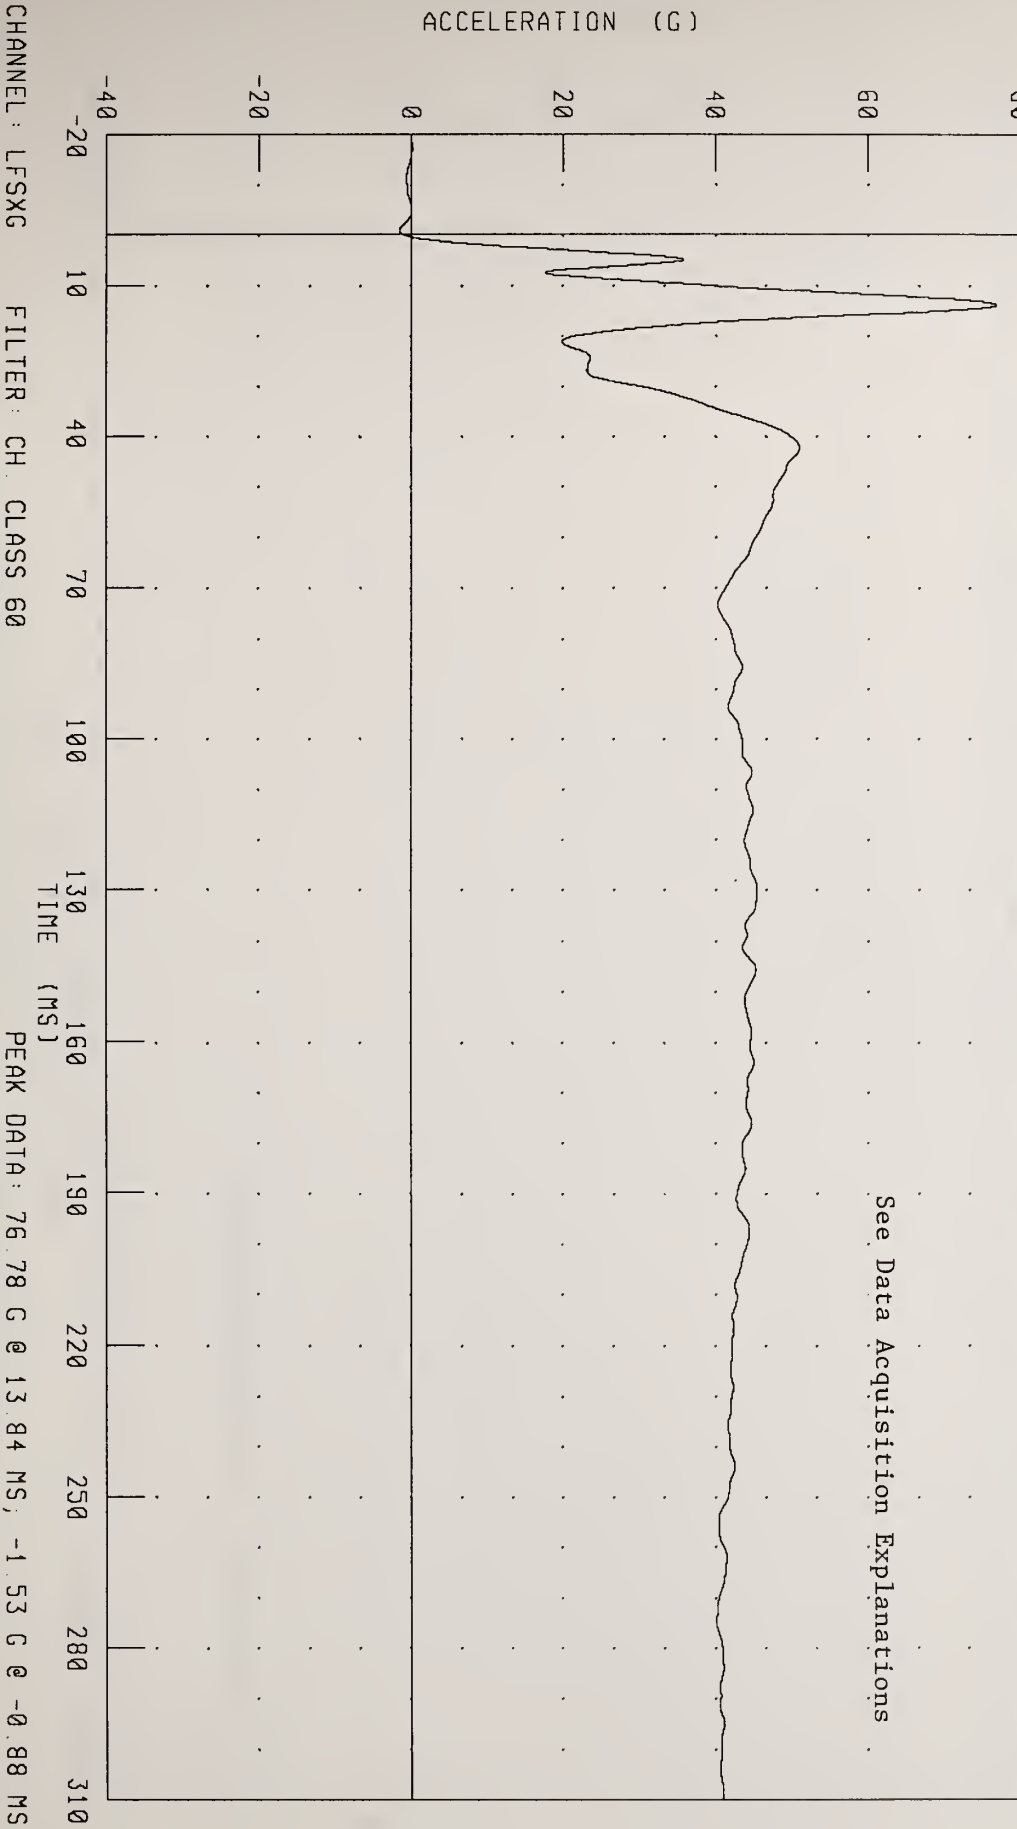

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL X-AXIS VELOCITY

SIDE IMPACT

TEST NUMBER 941007

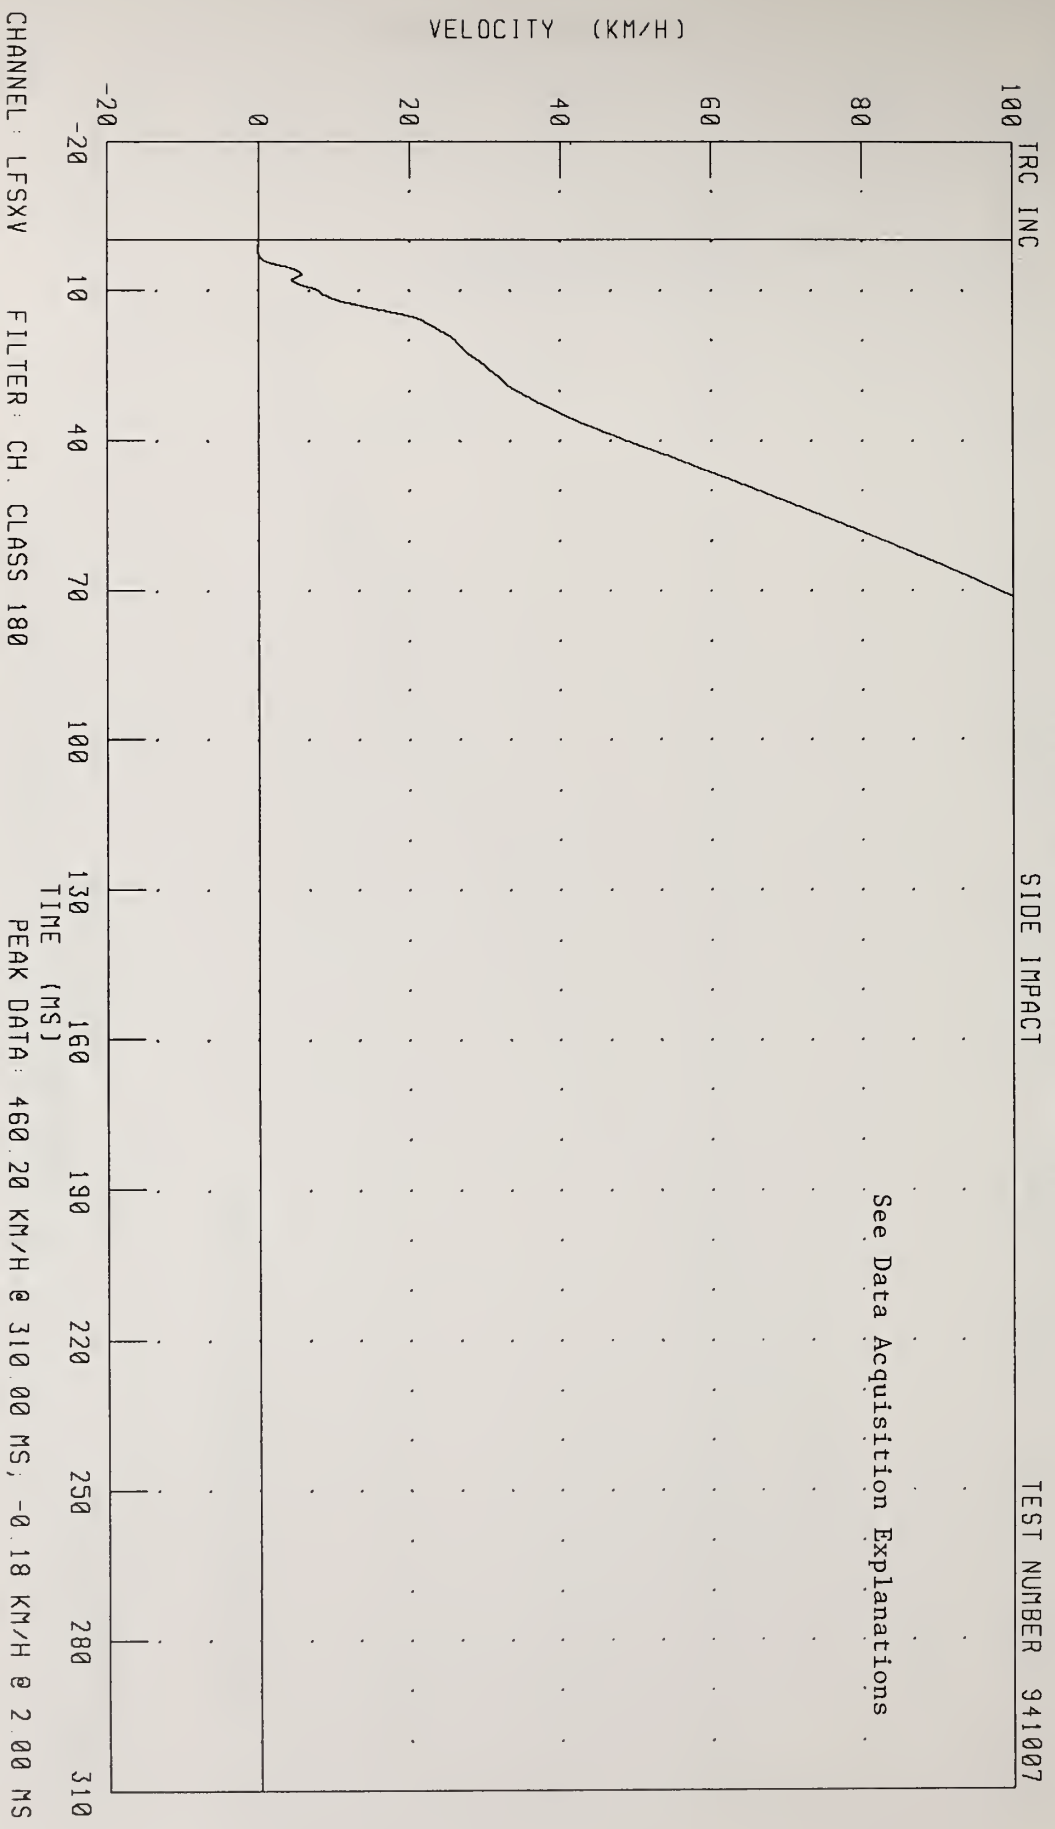


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL X-AXIS DISPLACEMENT

SIDE IMPACT


TEST NUMBER 941007

See Data Acquisition Explanations

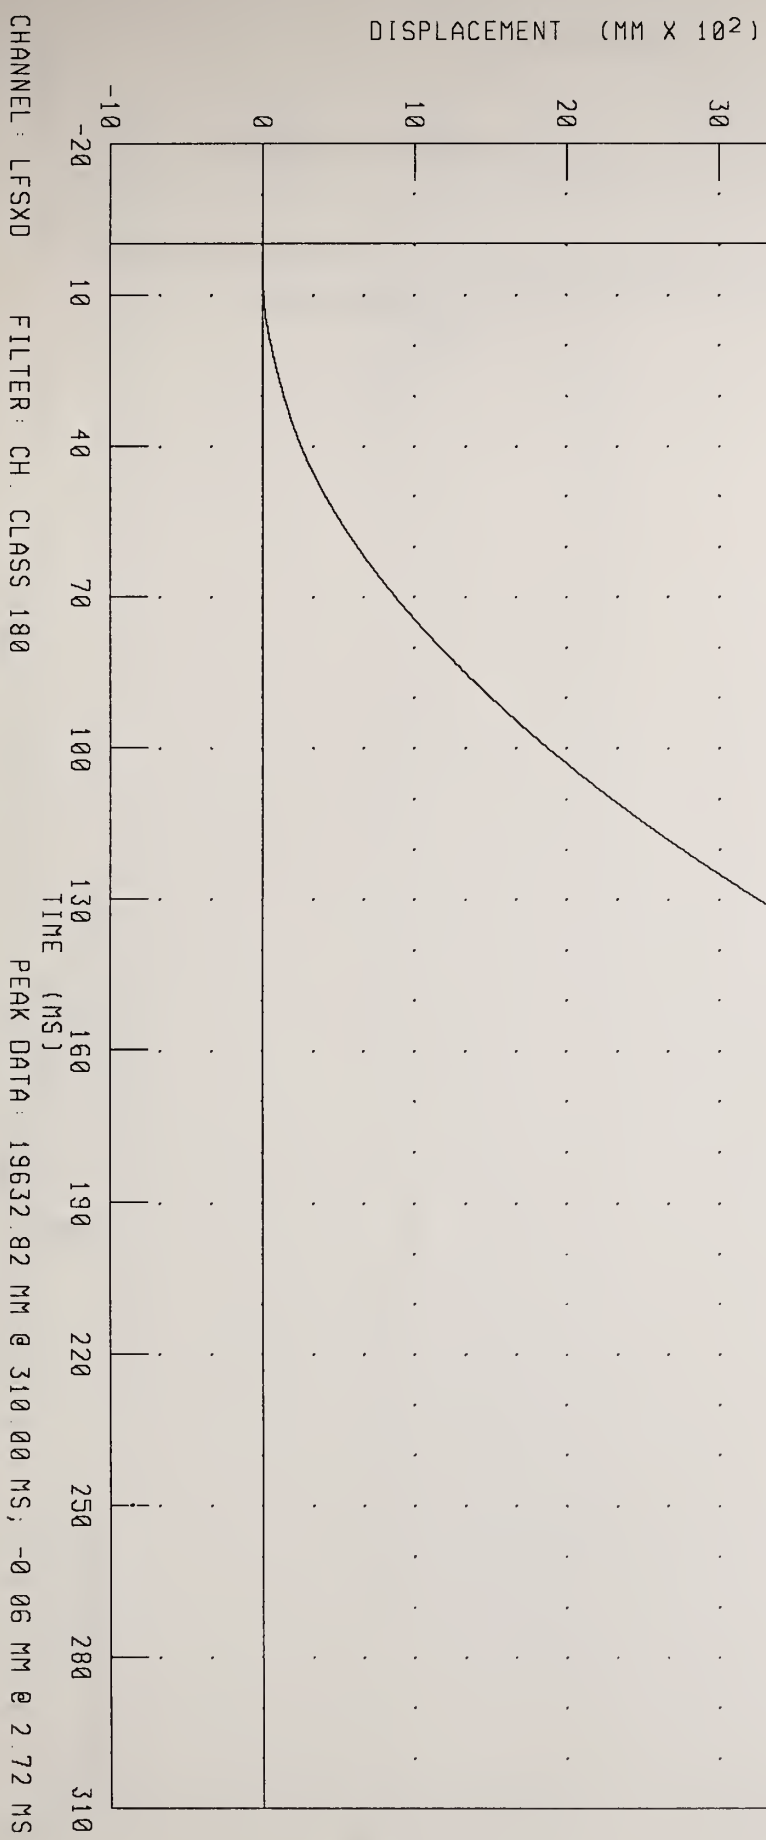

CHANNEL: LFSXD FILTER: CH CLASS 180 PEAK DATA: 19632.82 MM @ 310.00 MS, -0.06 MM @ 2.72 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL Y-AXIS ACCELERATION
SIDE IMPACT
TEST NUMBER 941007

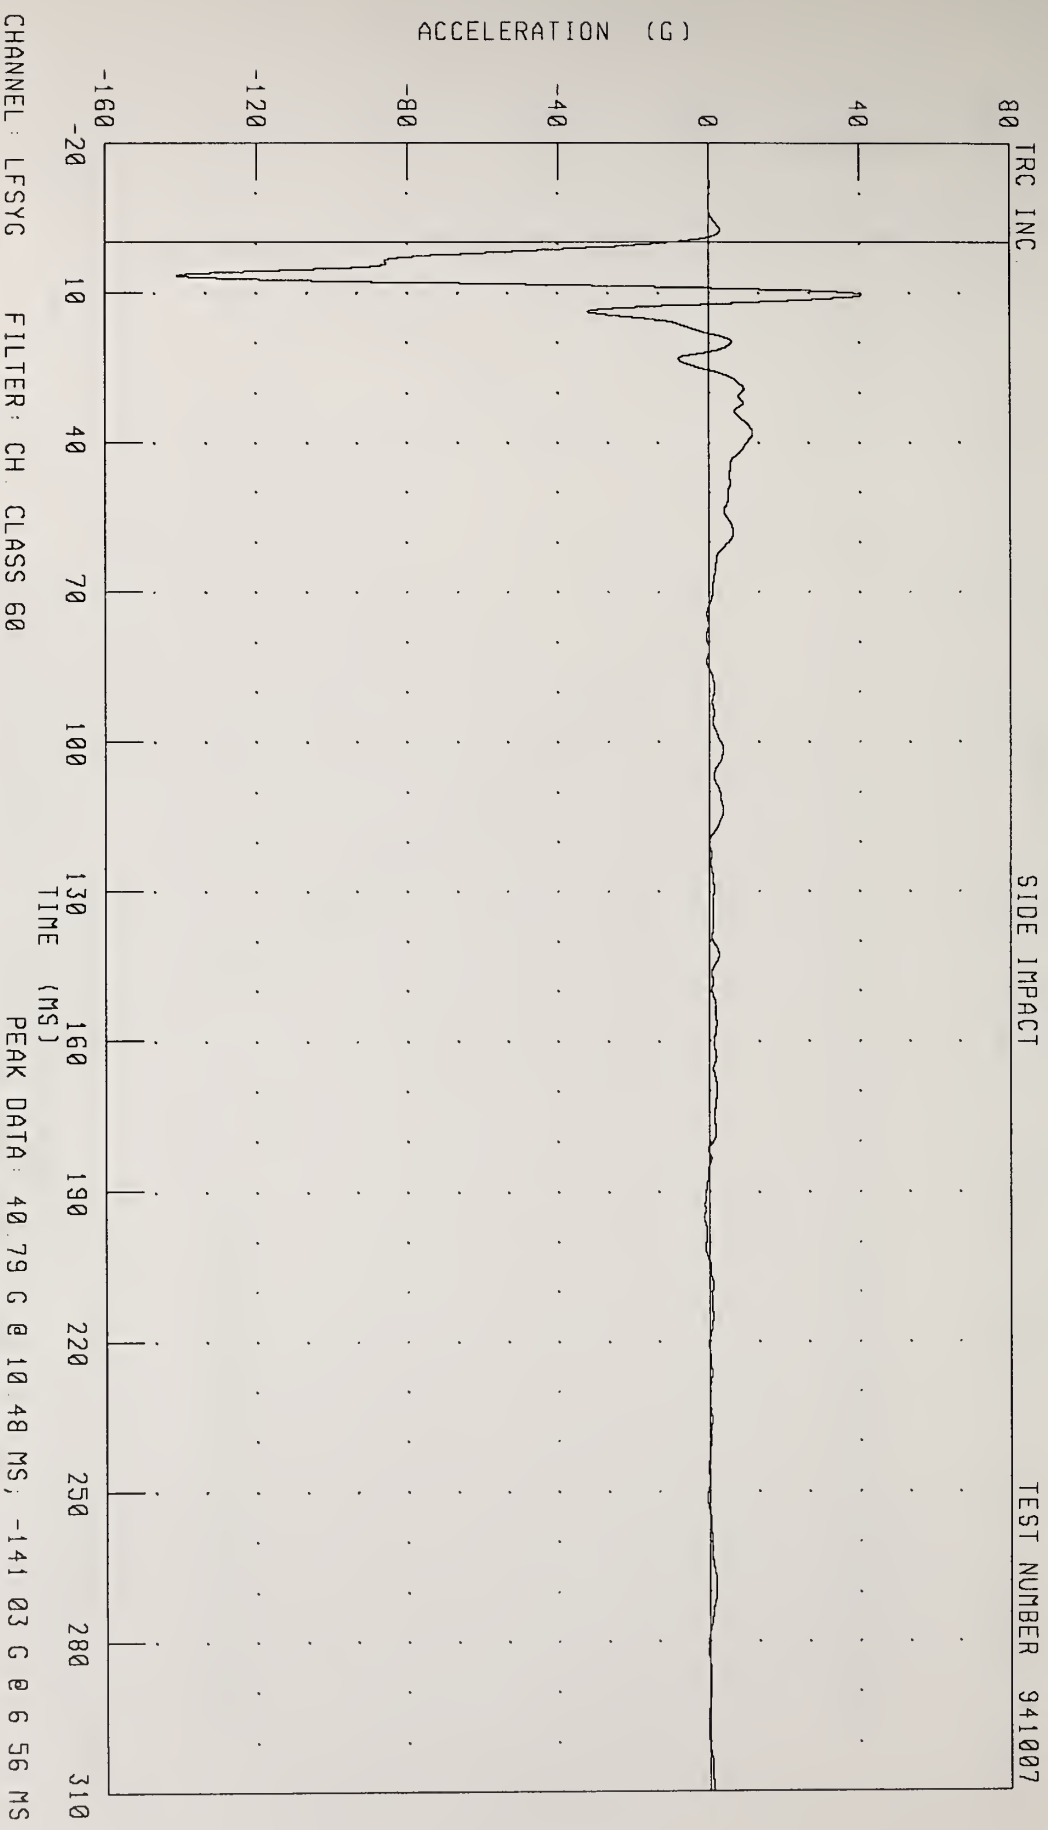


CHANNEL: LFSYG FILTER: CH. CLASS 60
PEAK DATA: 40.79 G @ 10.48 MS, -141.03 G @ 6.56 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL Y-AXIS VELOCITY

SIDE IMPACT

TEST NUMBER 941007

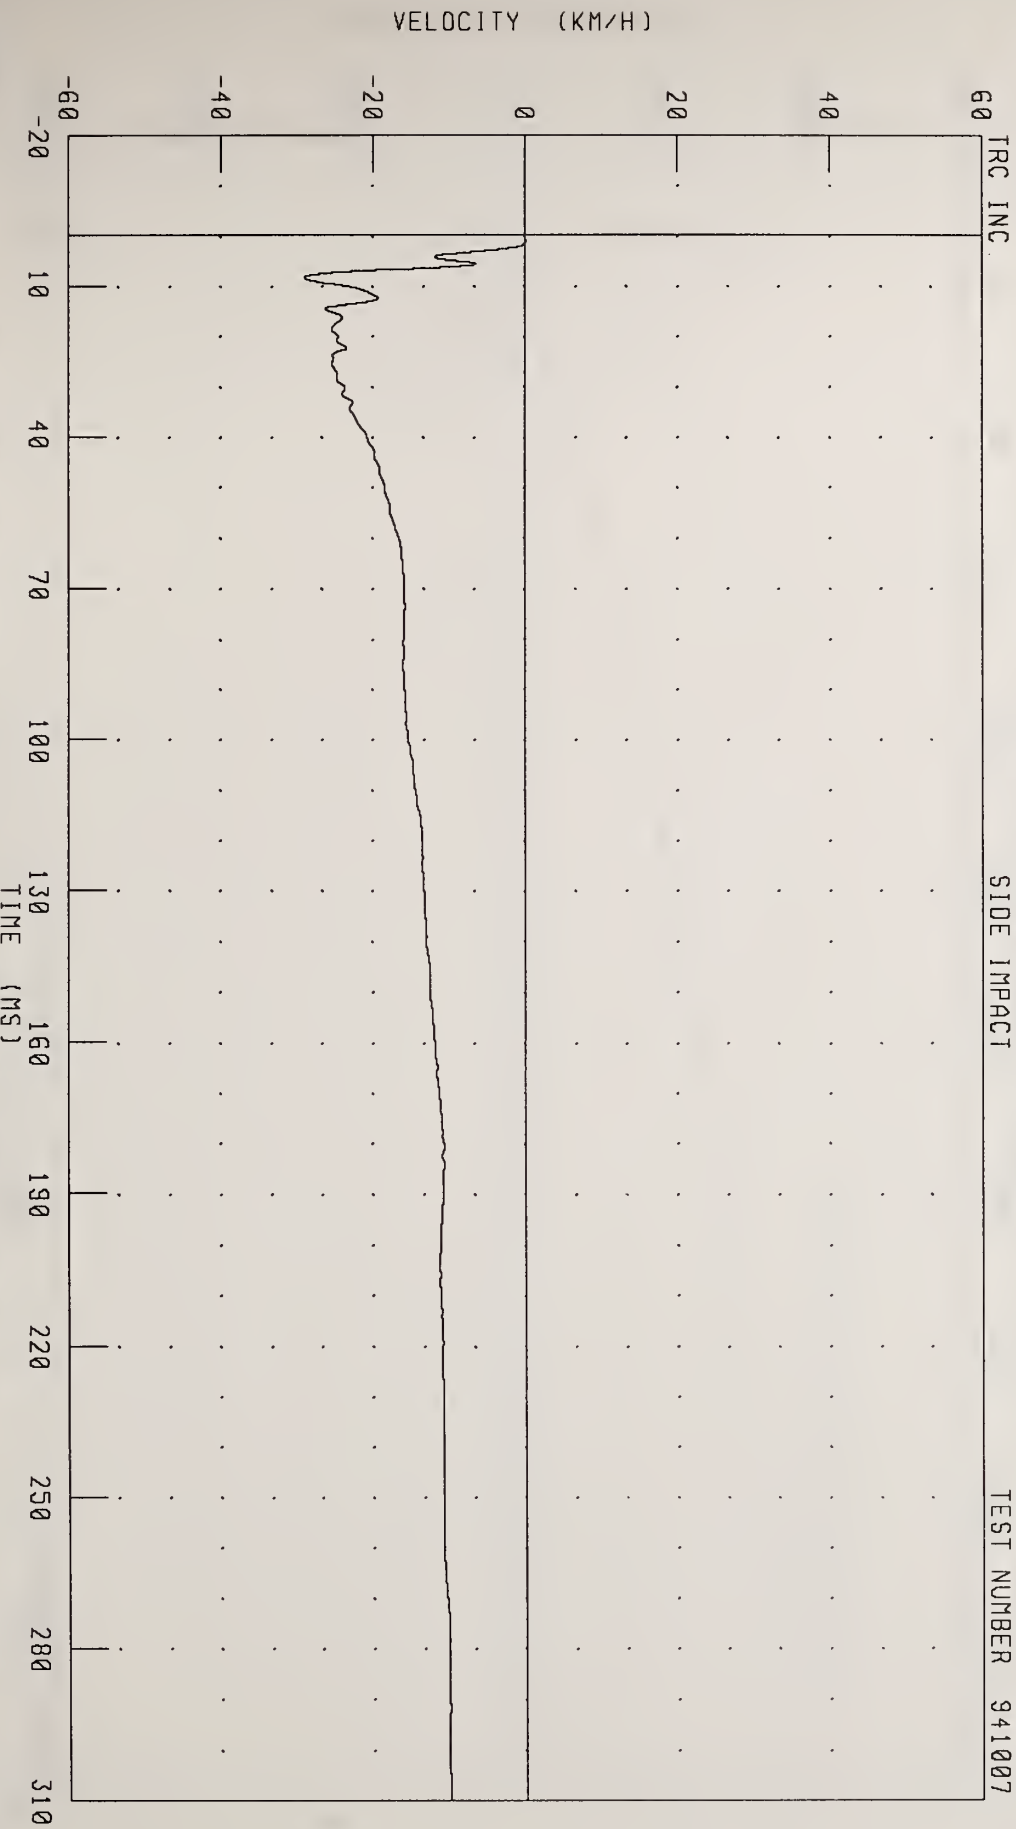


CHANNEL: LFSYV FILTER: CH CLASS 180

PEAK DATA: 0.13 KM/H @ 1.20 MS, -29.03 KM/H @ 8.32 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT FRONT SILL Y-AXIS DISPLACEMENT

SIDE IMPACT

TEST NUMBER 941007

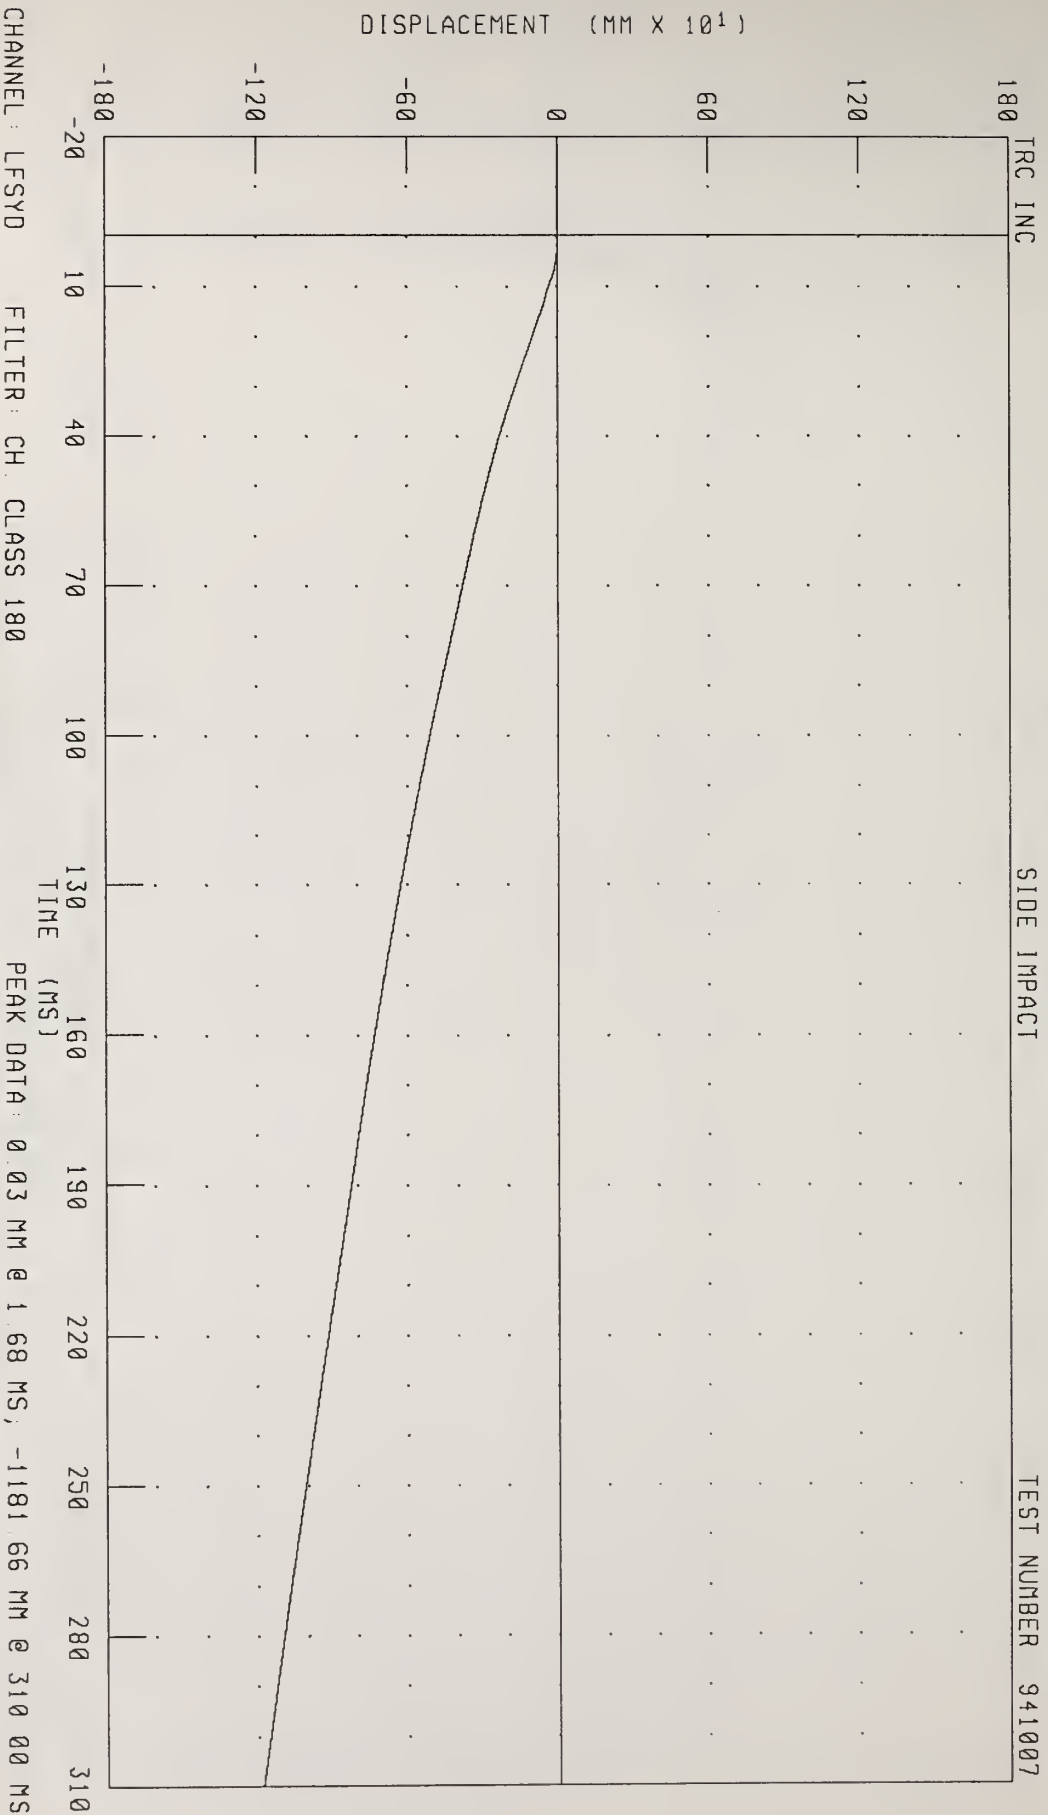

CHANNEL: LFSYD FILTER: CH CLASS 180


PEAK DATA: 0.03 MM @ 1.68 MS, -1181.66 MM @ 310.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT FRONT SILL X-AXIS ACCELERATION
SIDE IMPACT

TRC INC.

TEST NUMBER 941007


See Data Acquisition Explanations

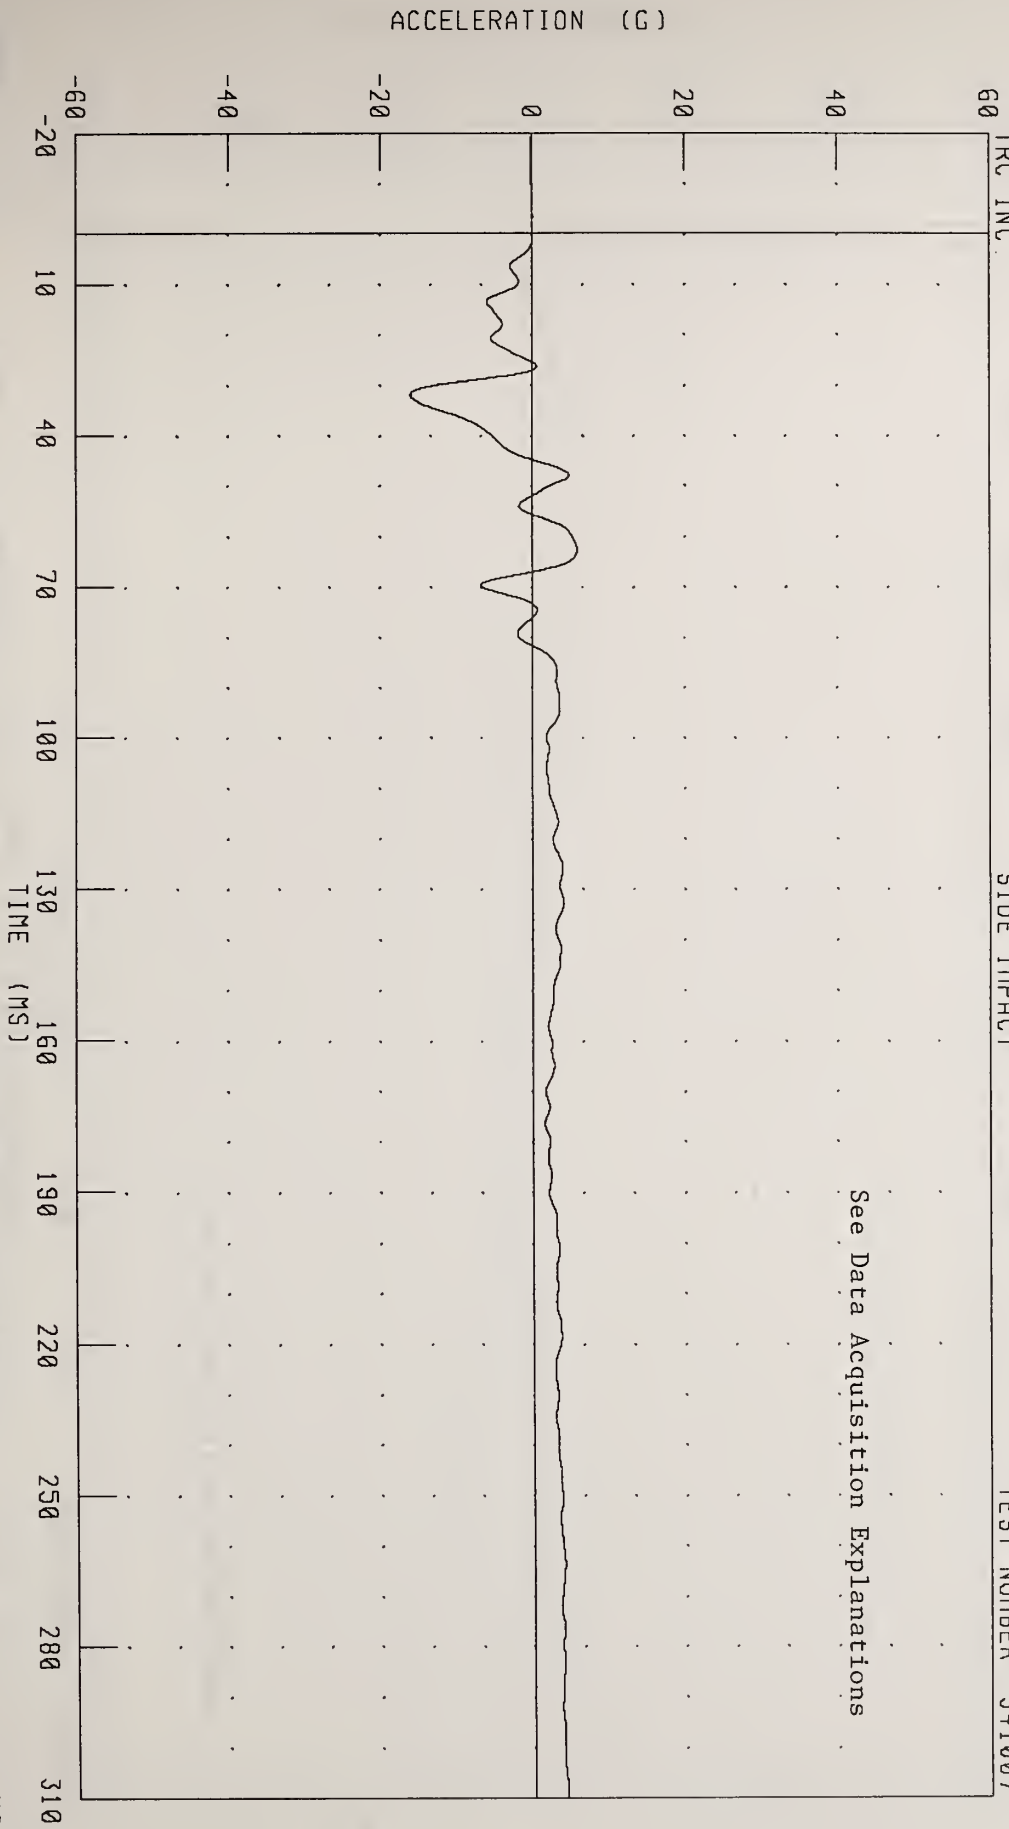

CHANNEL: RFSXG FILTER: CH. CLASS 60
PEAK DATA: 5.90 G @ 62.80 MS, -16.00 G @ 31.92 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT FRONT SILL X-AXIS VELOCITY
SIDE IMPACT


TEST NUMBER 941007

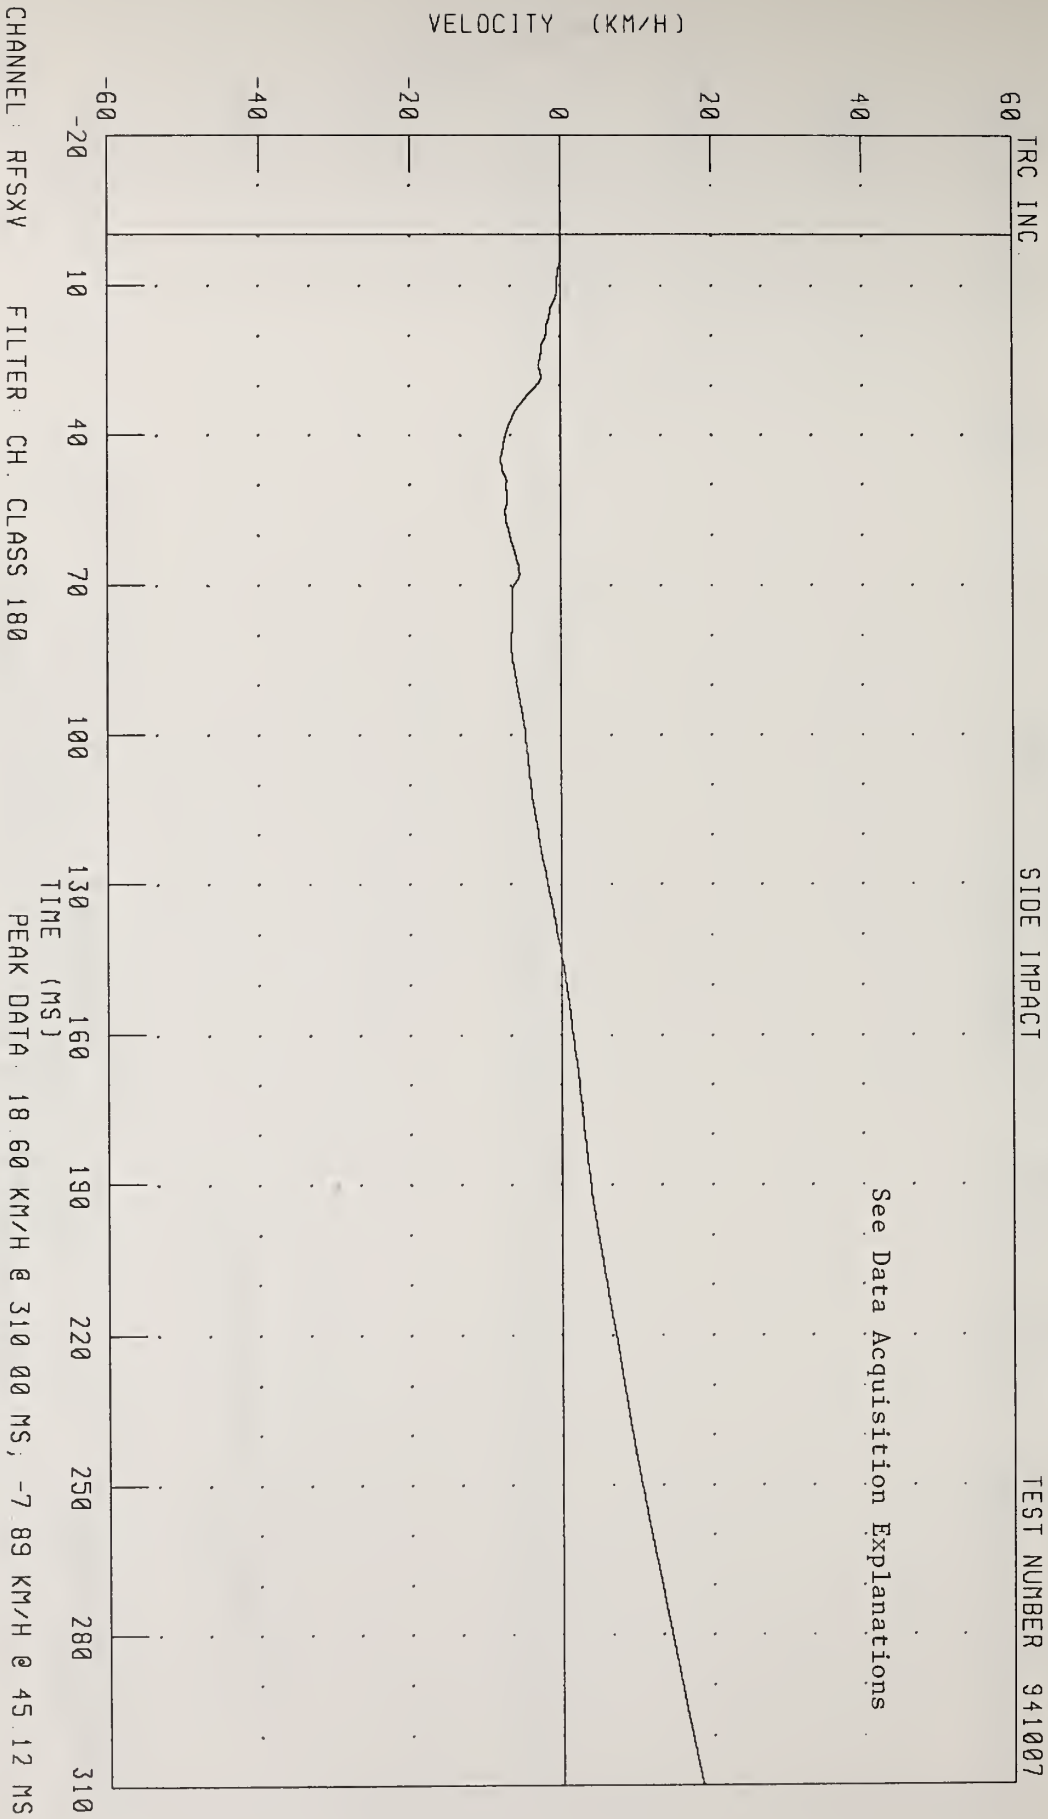

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
 RIGHT FRONT SILL X-AXIS DISPLACEMENT

SIDE IMPACT

TEST NUMBER 941007

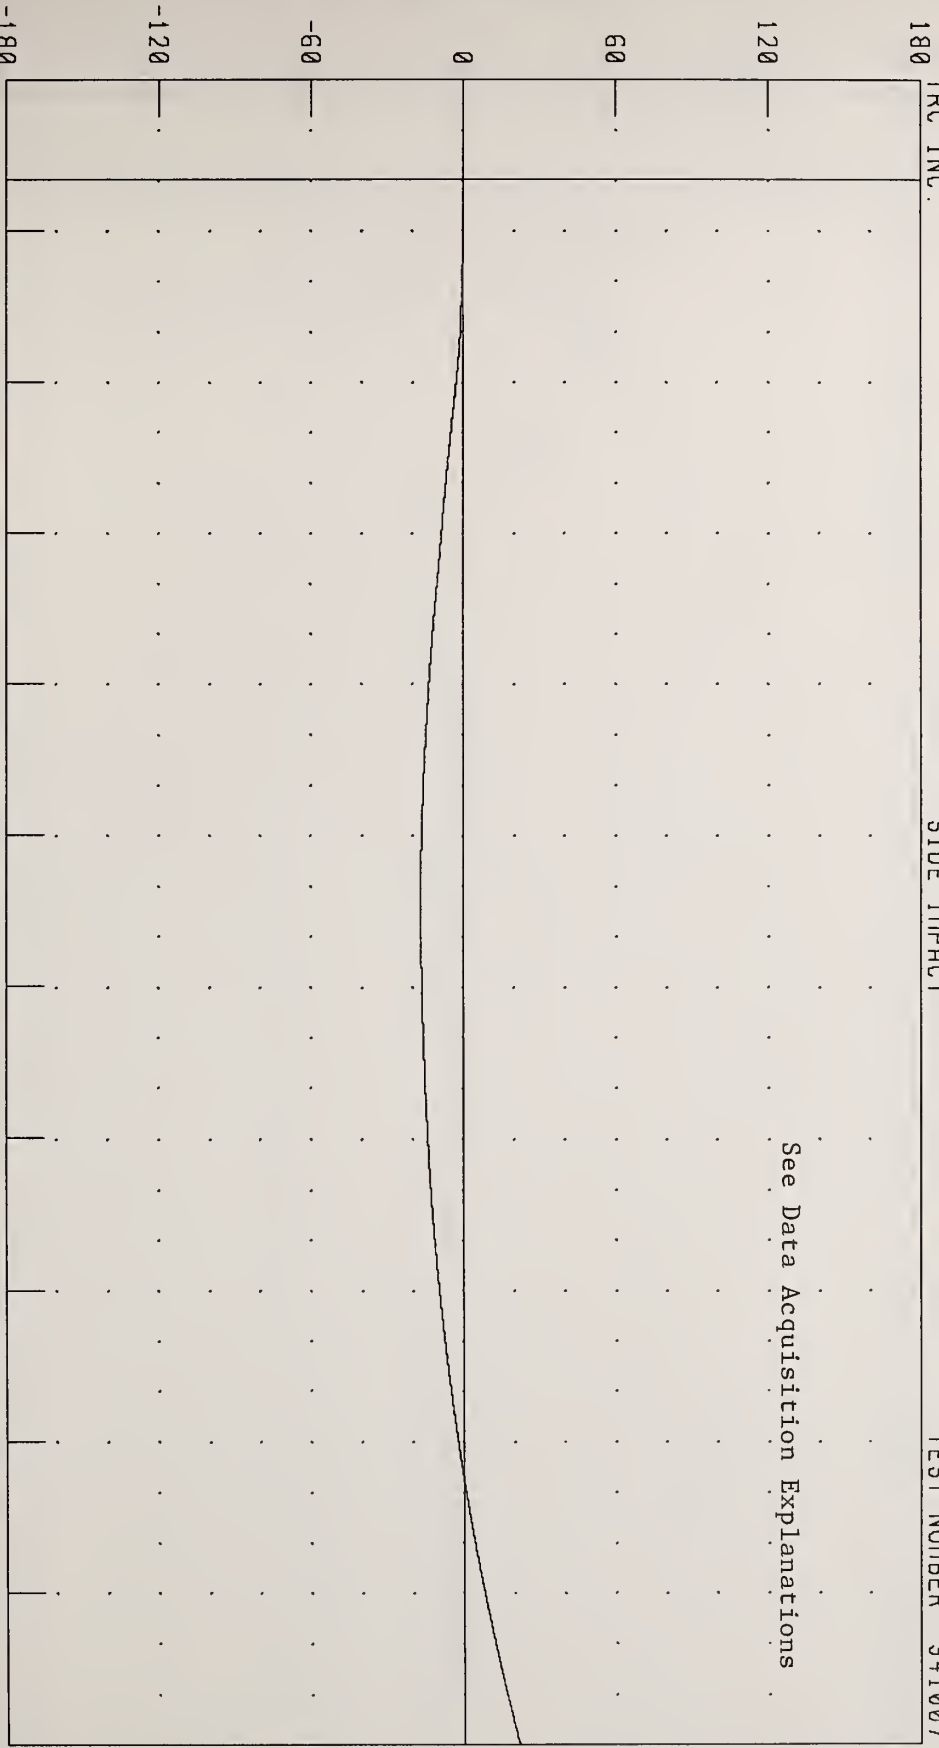


CHANNEL: RFSXD FILTER: CH. CLASS 180 PEAK DATA: 218.43 MM @ 310.00 MS, -166.87 MM @ 144.40 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT FRONT SILL Y-AXIS ACCELERATION
SIDE IMPACT

TRC INC.

TEST NUMBER 941007

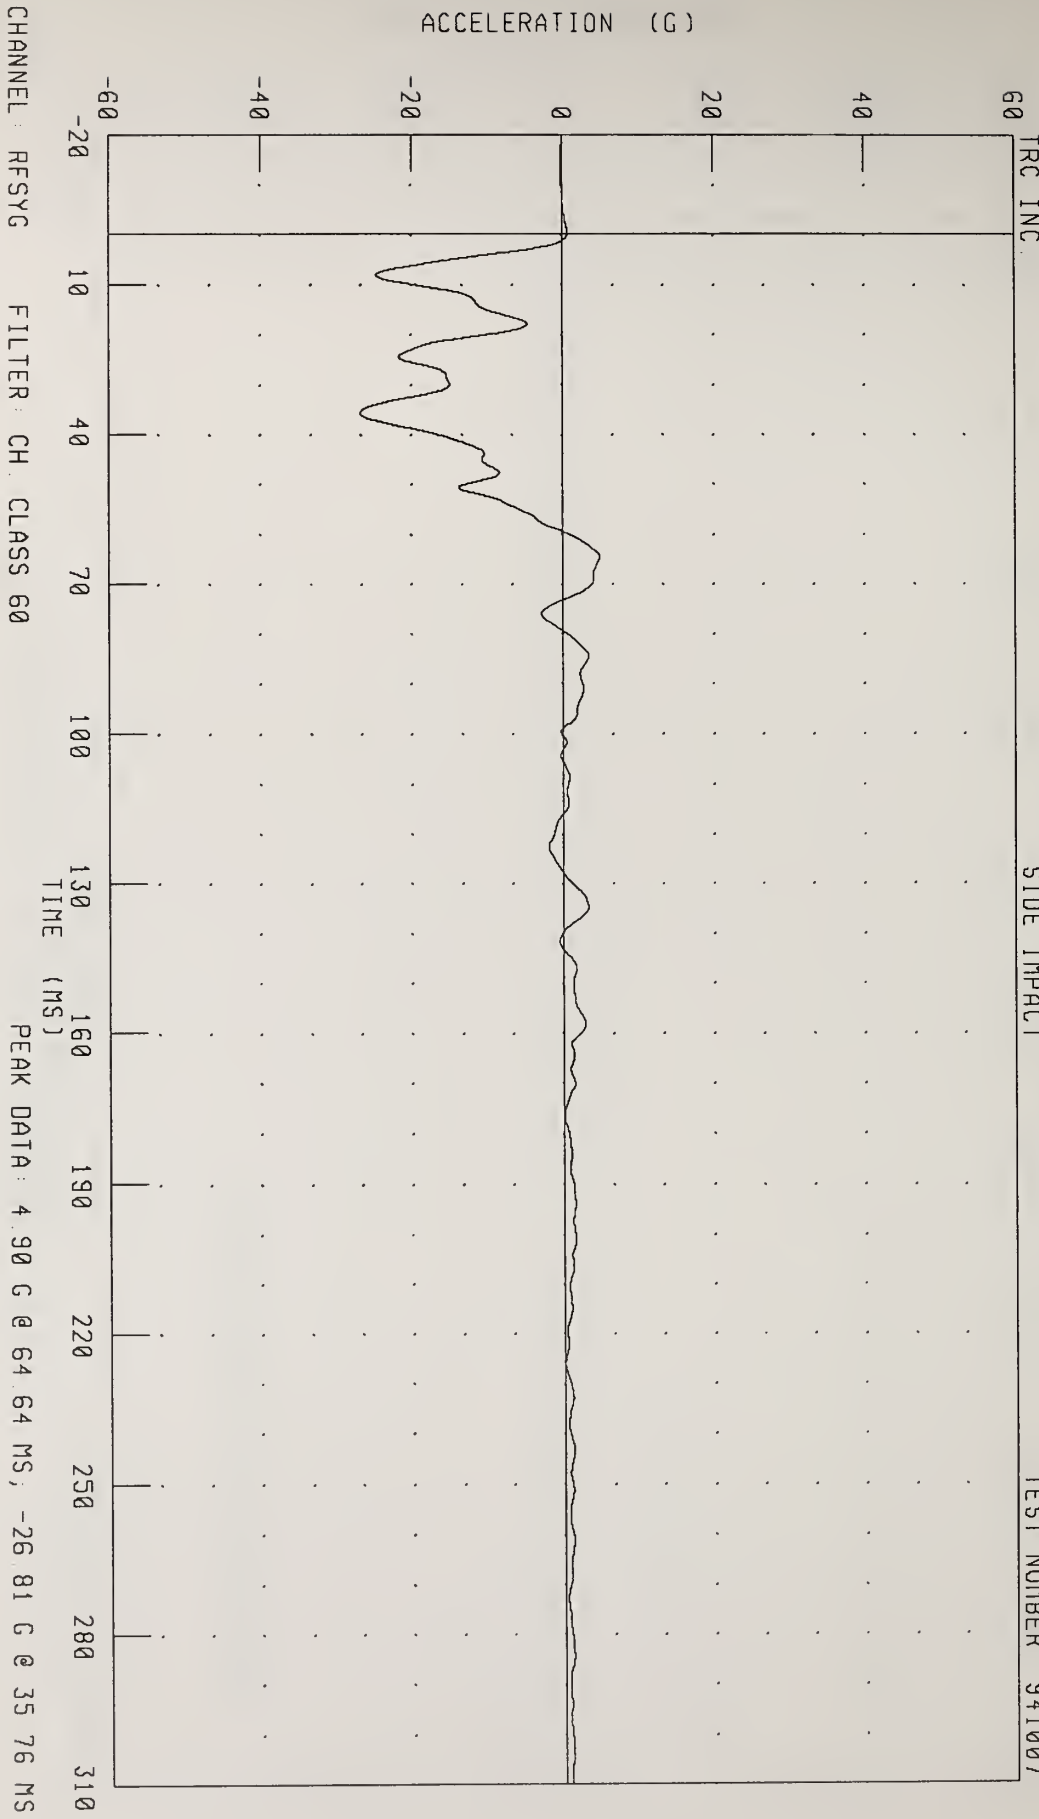


CHANNEL: RFSYG FILTER: CH CLASS 60

PEAK DATA: 4.90 G @ 64.64 MS, -26.81 G @ 35.76 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT FRONT SILL Y-AXIS VELOCITY


SIDE IMPACT

TEST NUMBER 941007

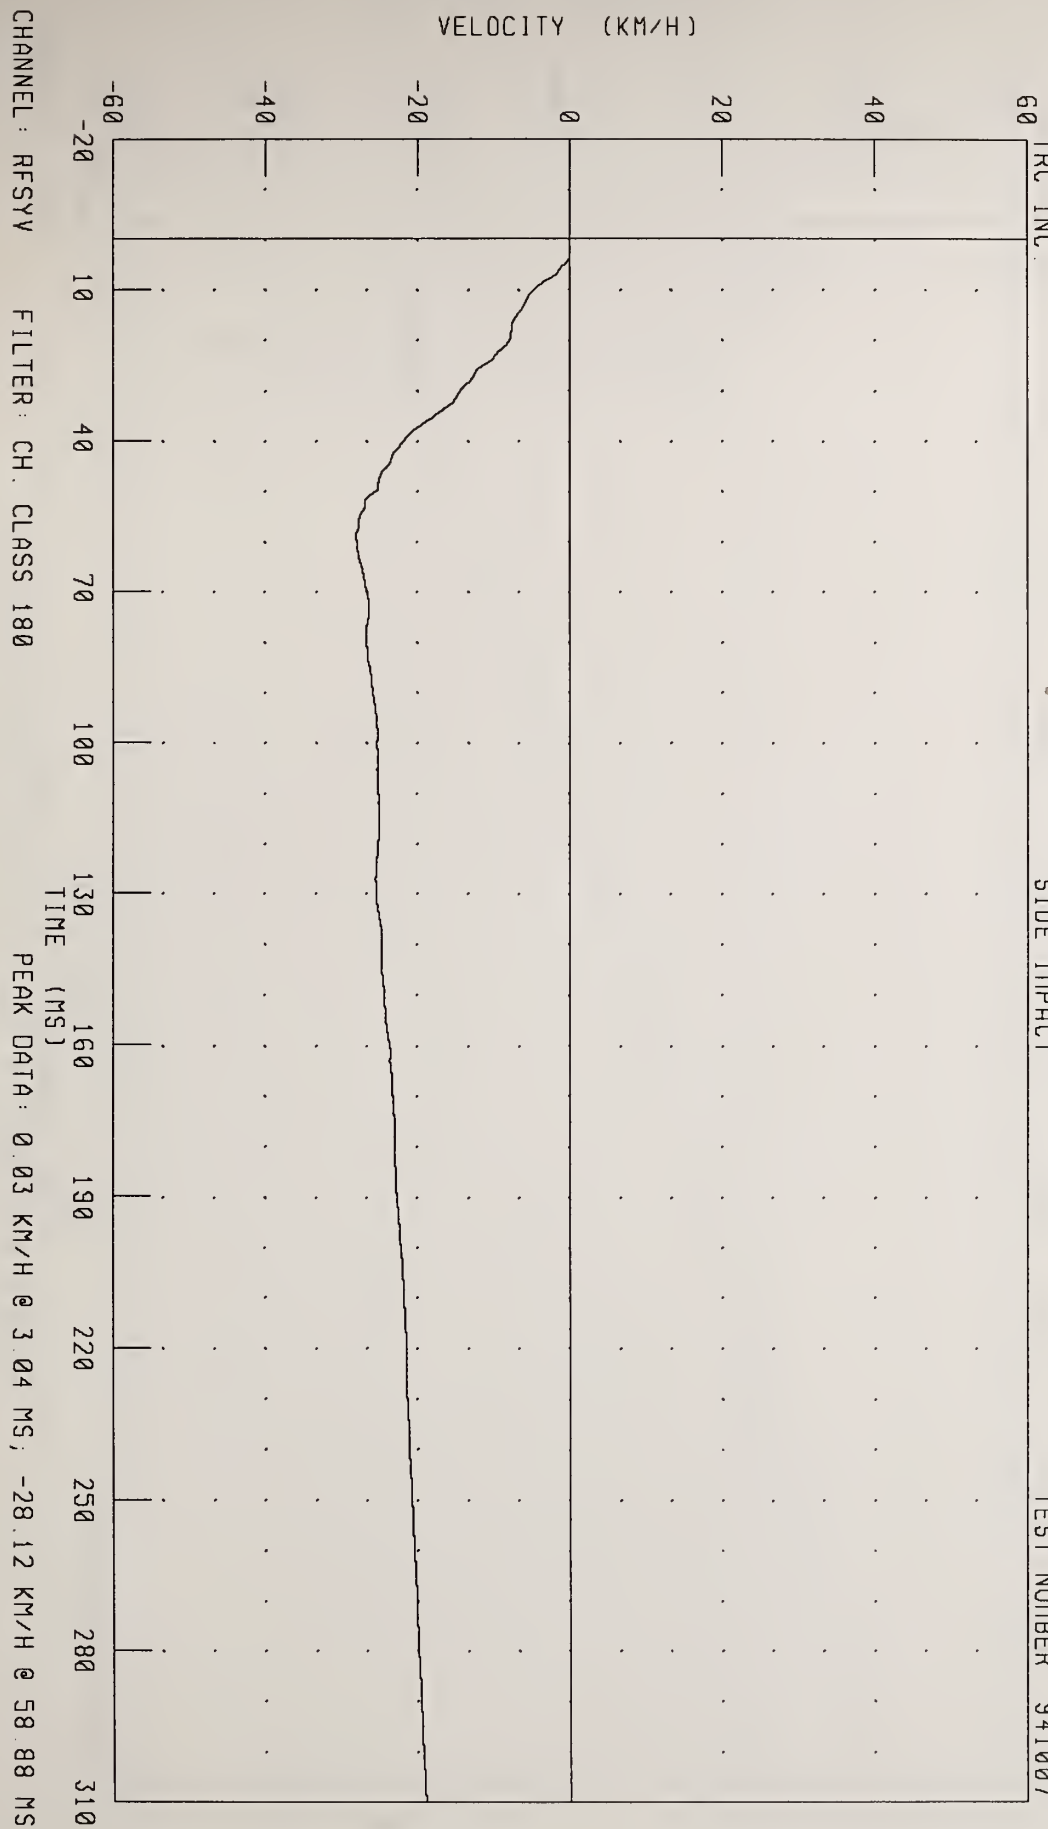

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT FRONT SILL Y-AXIS DISPLACEMENT
SIDE IMPACT

TEST NUMBER 941007

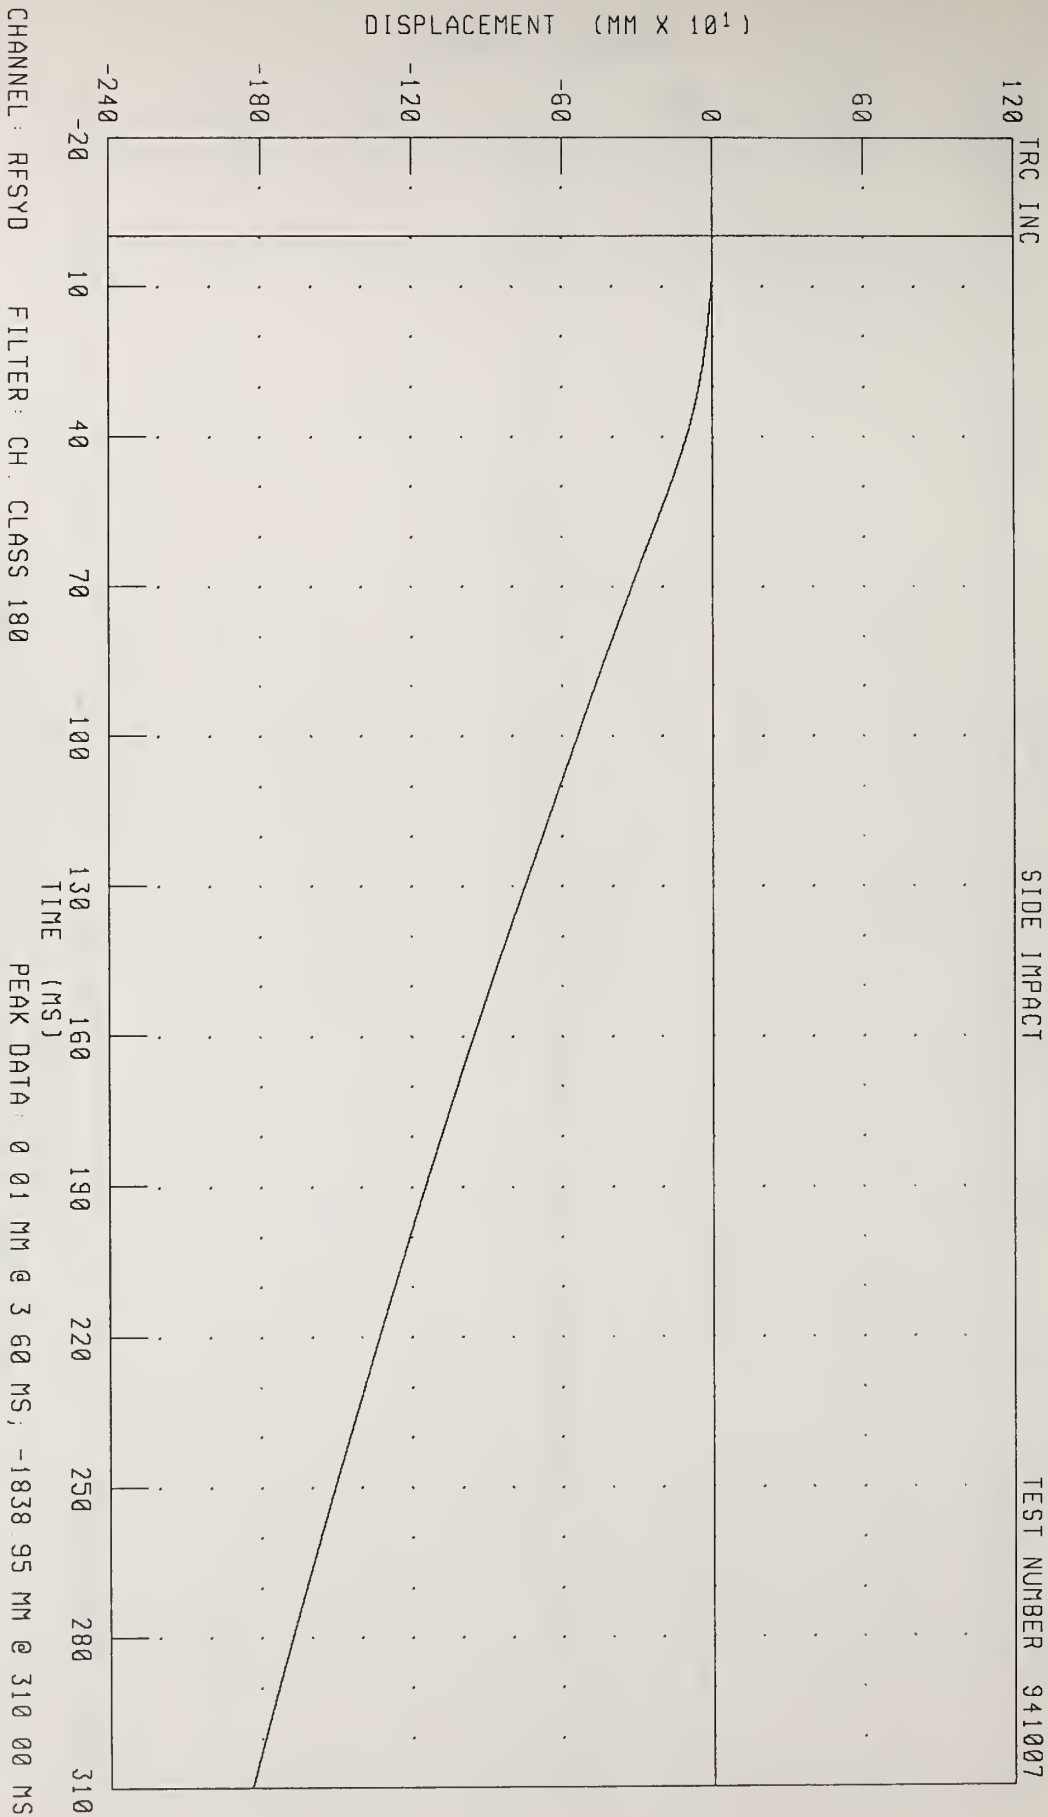


CHANNEL: RFSYD

FILTER: CH. CLASS 180

PEAK DATA: 0 01 MM @ 3 60 MS, -1838 95 MM @ 310 00 MS


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT X-AXIS ACCELERATION
SIDE IMPACT

TEST NUMBER 941007

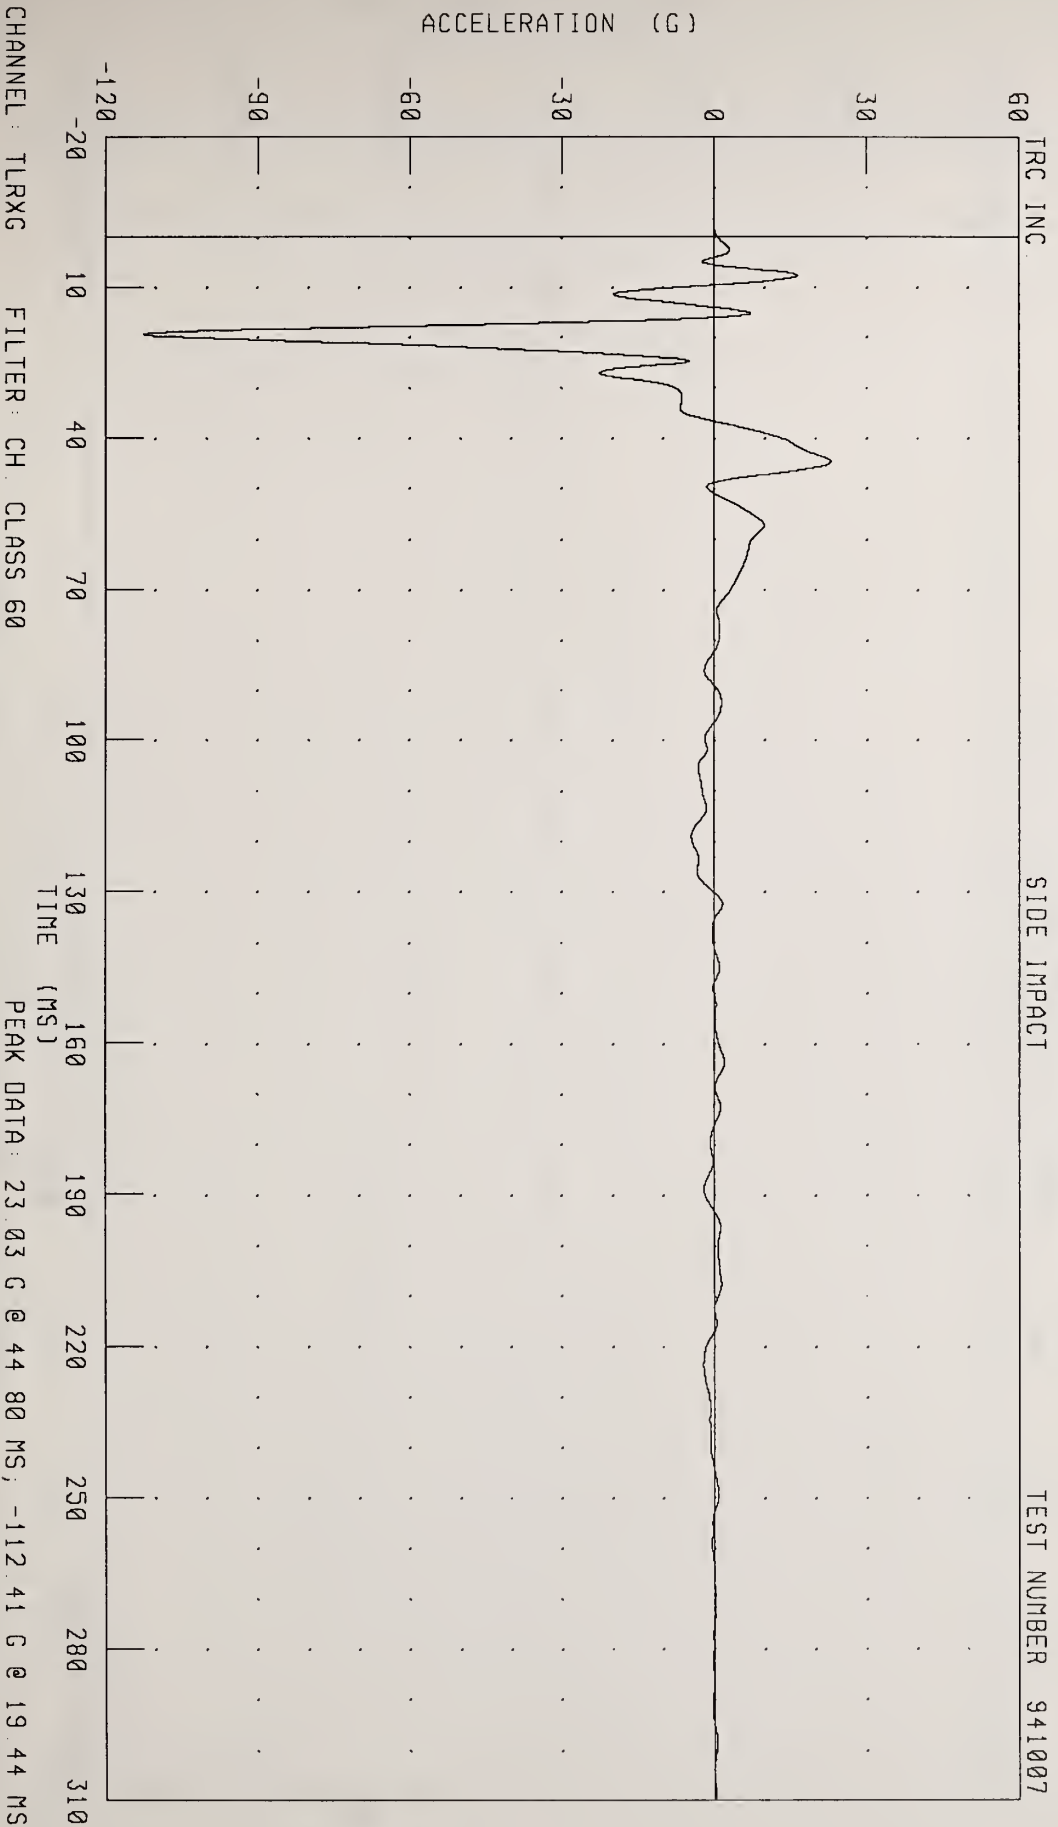


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT X-AXIS VELOCITY
SIDE IMPACT

TEST NUMBER 941007

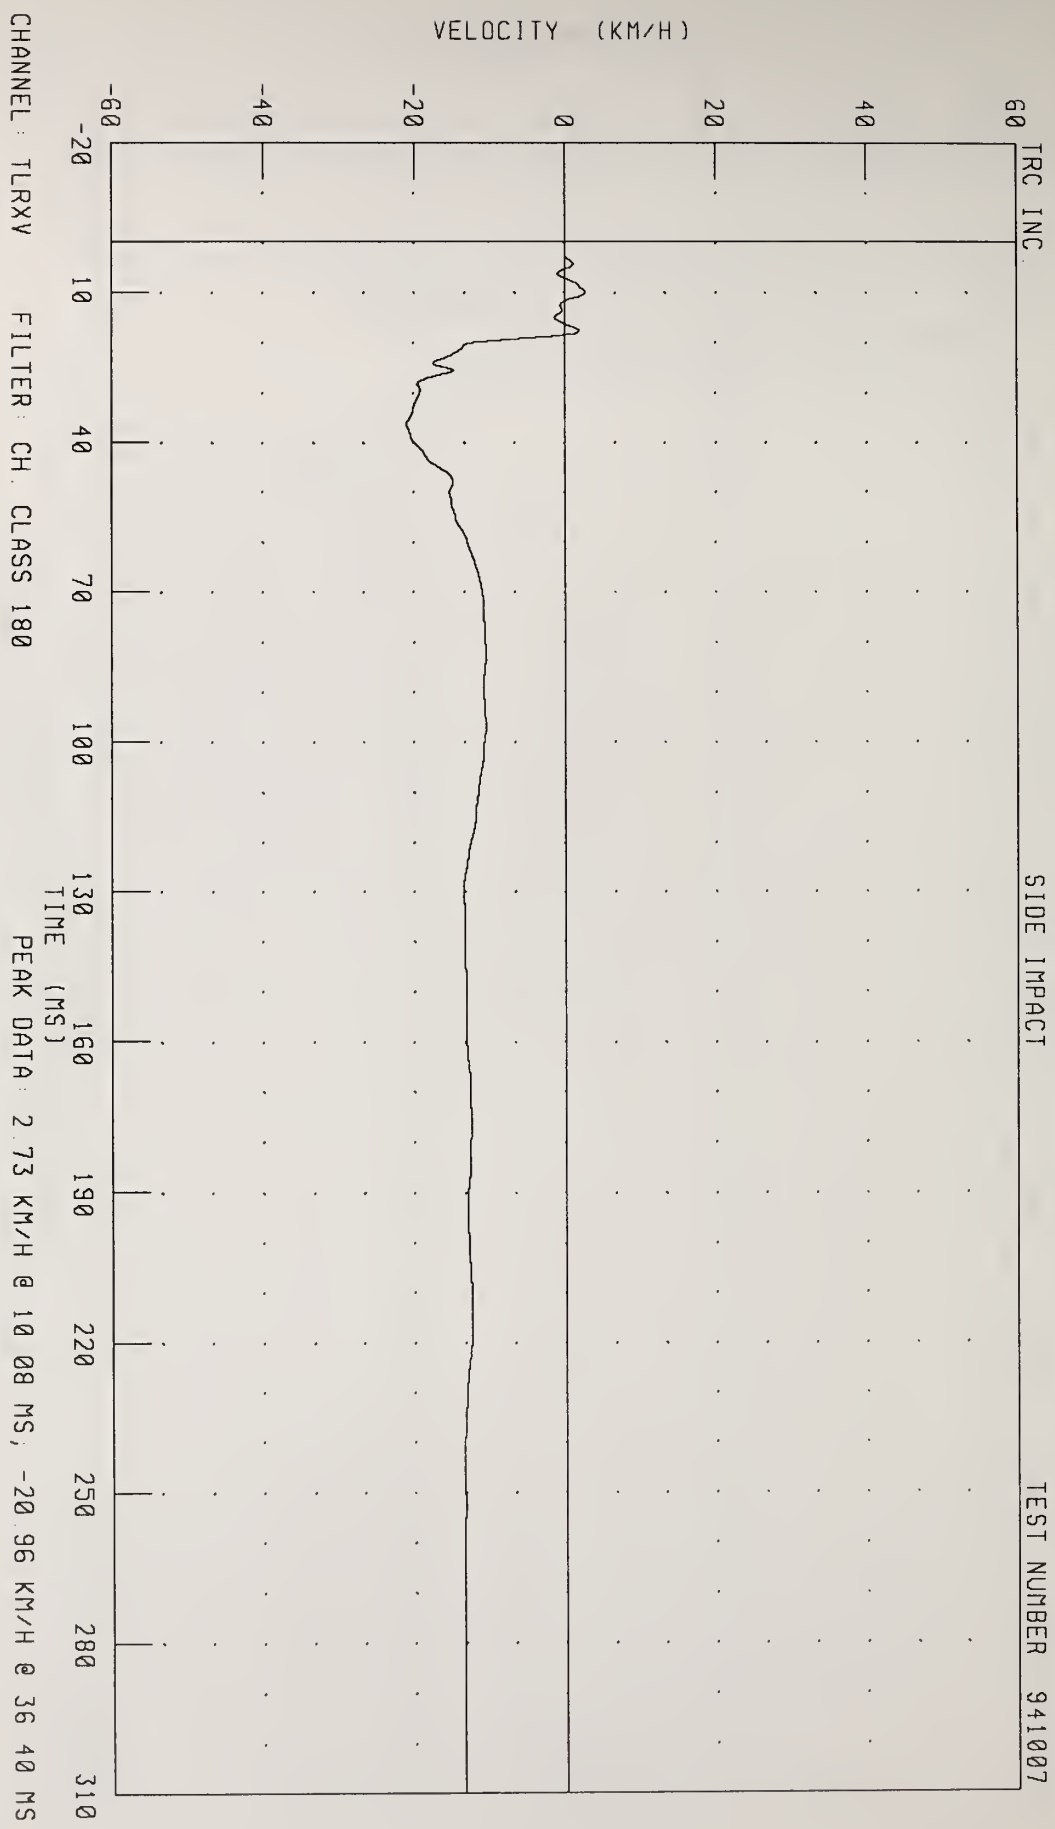


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT X-AXIS DISPLACEMENT
SIDE IMPACT

TRC INC TEST NUMBER 941007

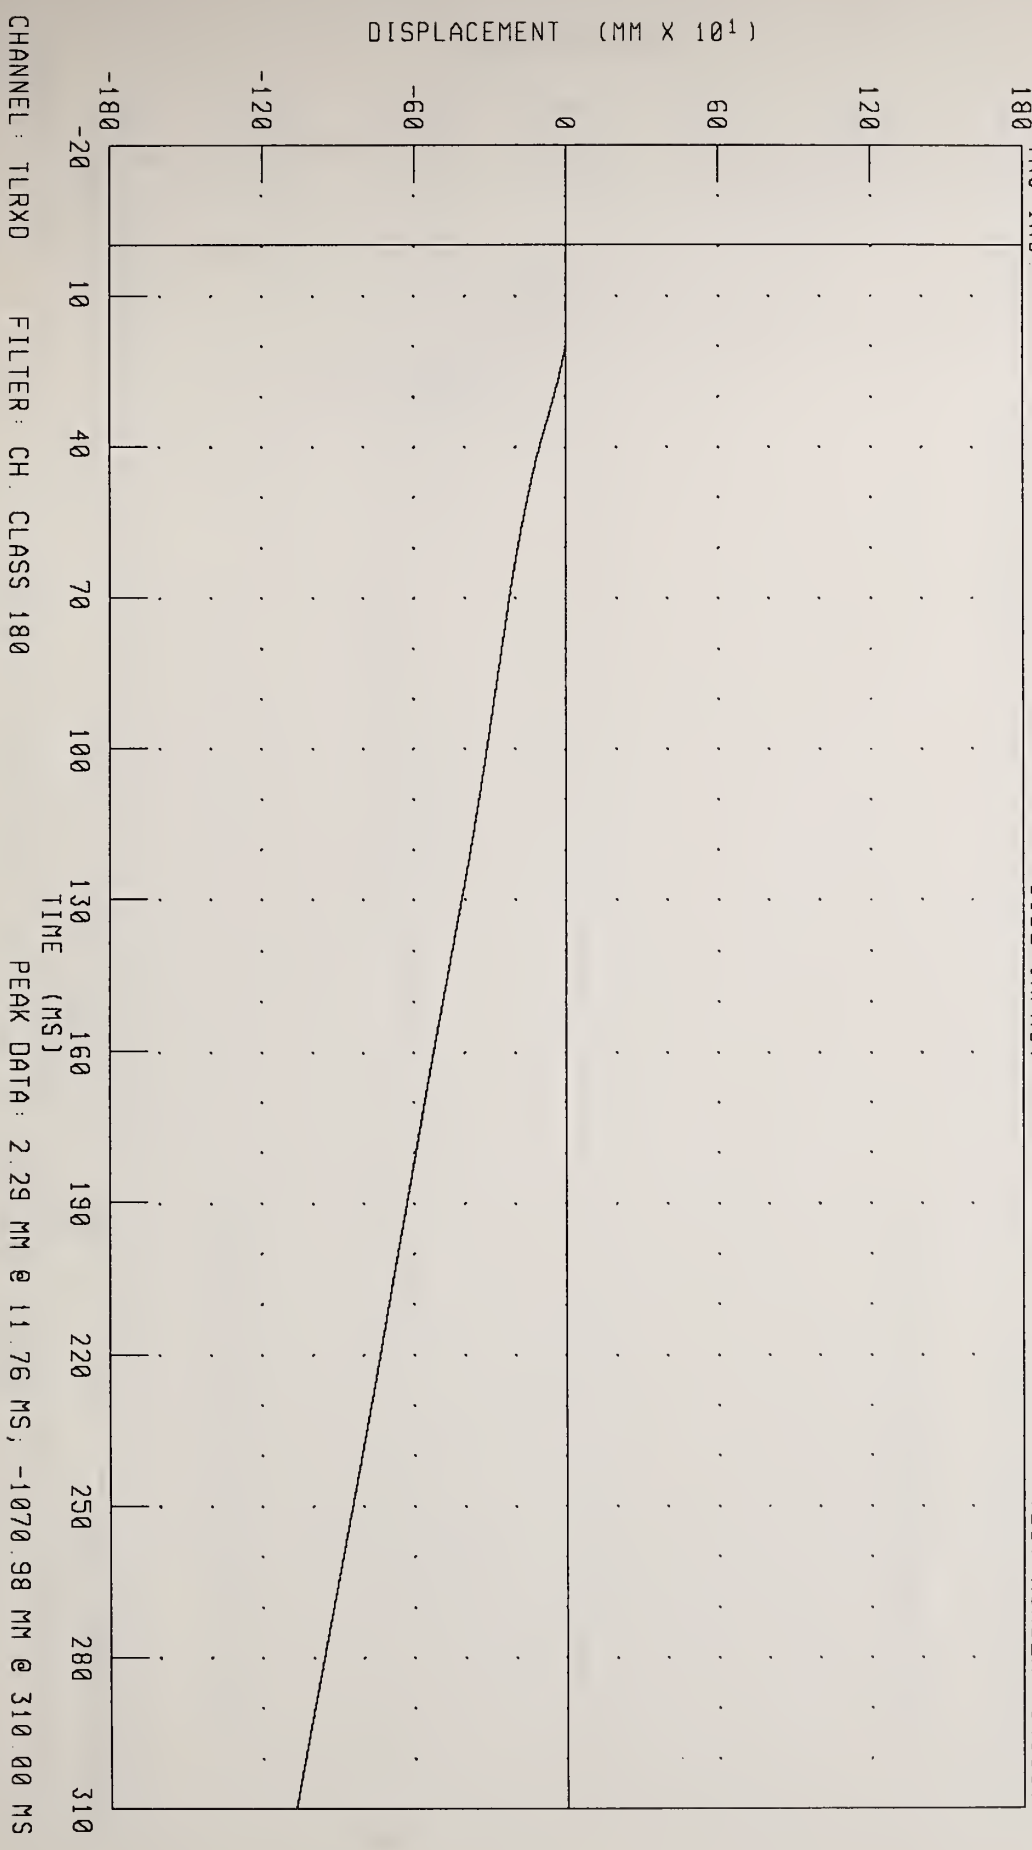


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT Y-AXIS ACCELERATION
SIDE IMPACT

TEST NUMBER 941007

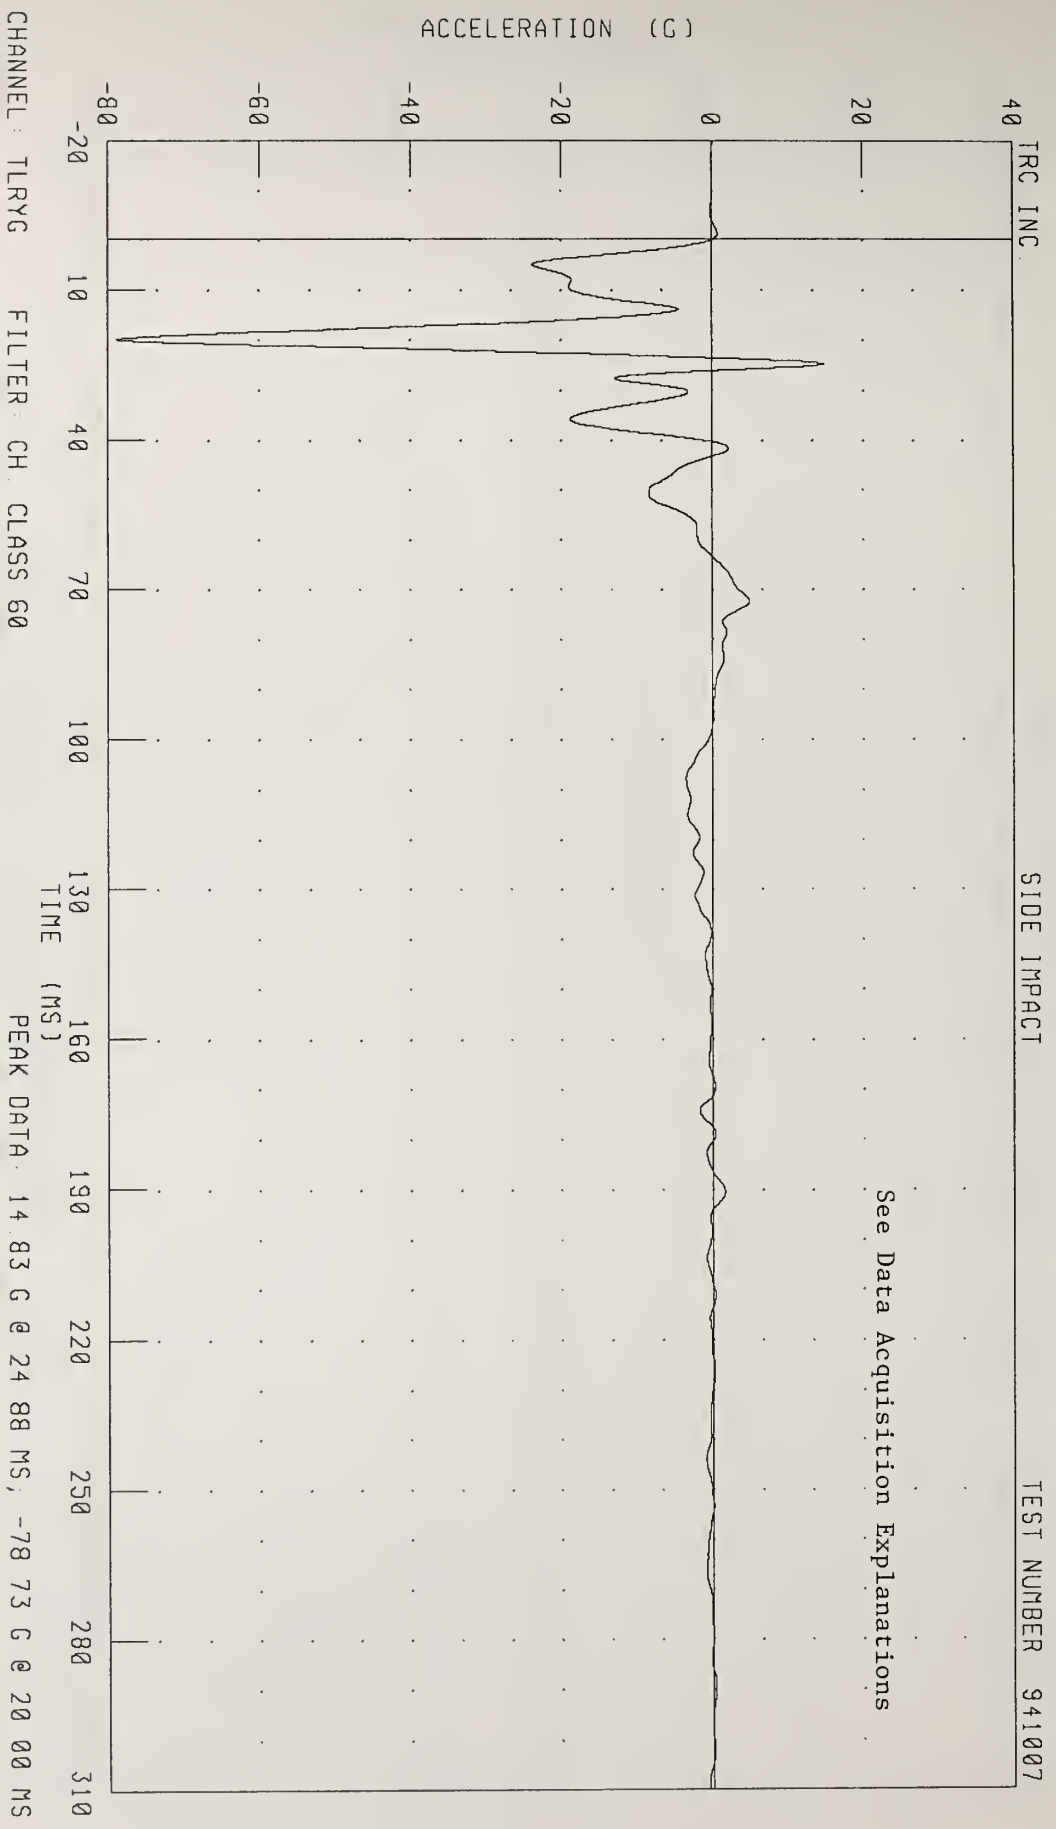

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT Y-AXIS VELOCITY
SIDE IMPACT

TRC INC. TEST NUMBER 941007

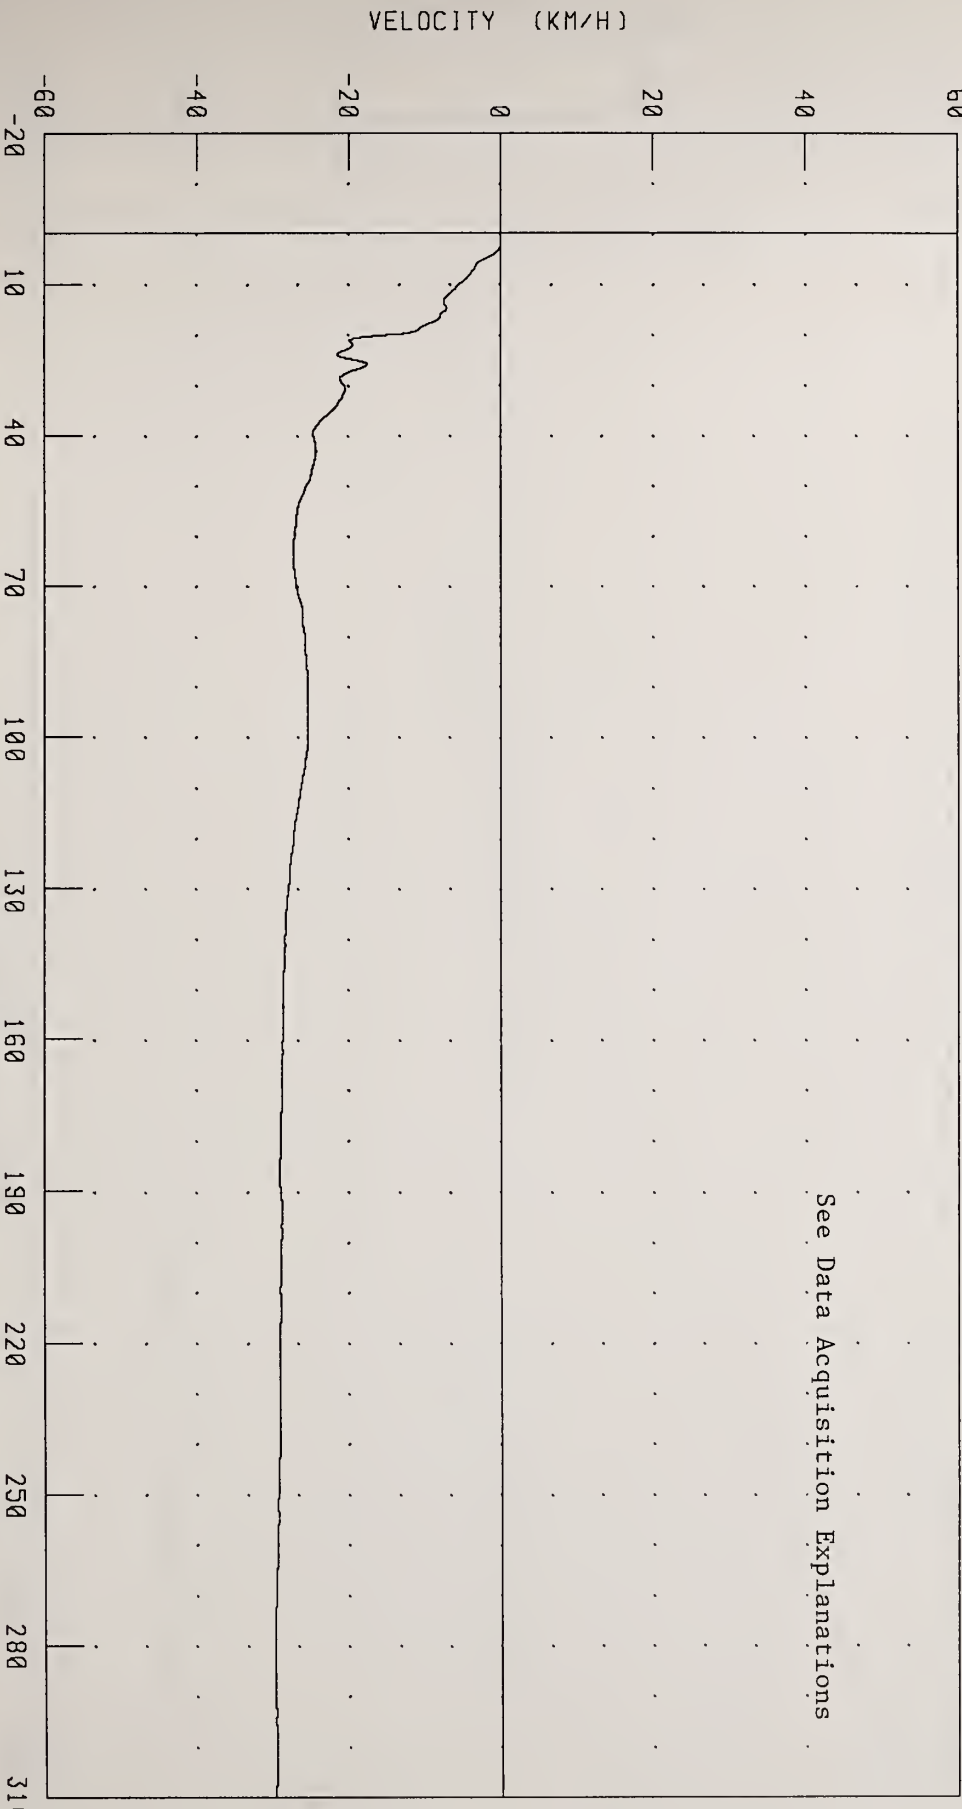


See Data Acquisition Explanations

CHANNEL: TLRYV FILTER: CH. CLASS 180
PEAK DATA: 0.01 KM/H @ 1.52 MS, -29.79 KM/H @ 286.64 MS


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
LEFT REAR SEAT Y-AXIS DISPLACEMENT
SIDE IMPACT

TEST NUMBER 941007

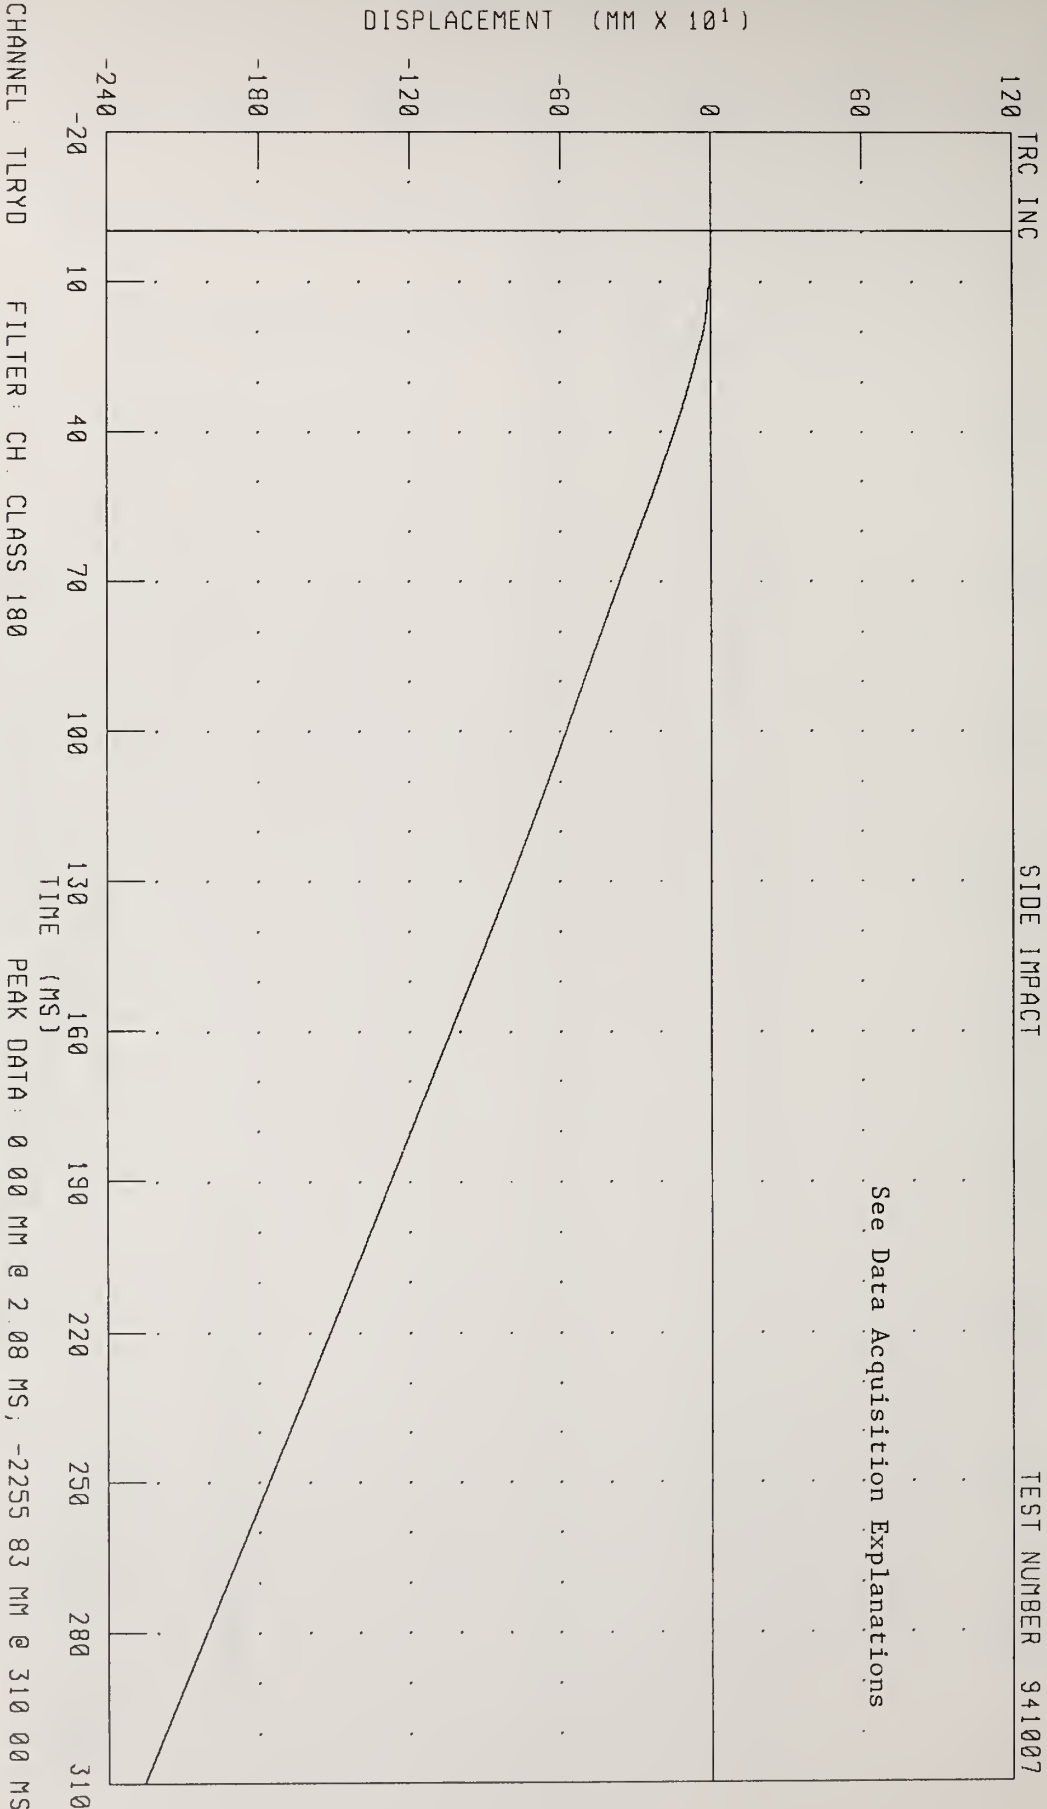

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT X-AXIS ACCELERATION
SIDE IMPACT

TEST NUMBER 941007

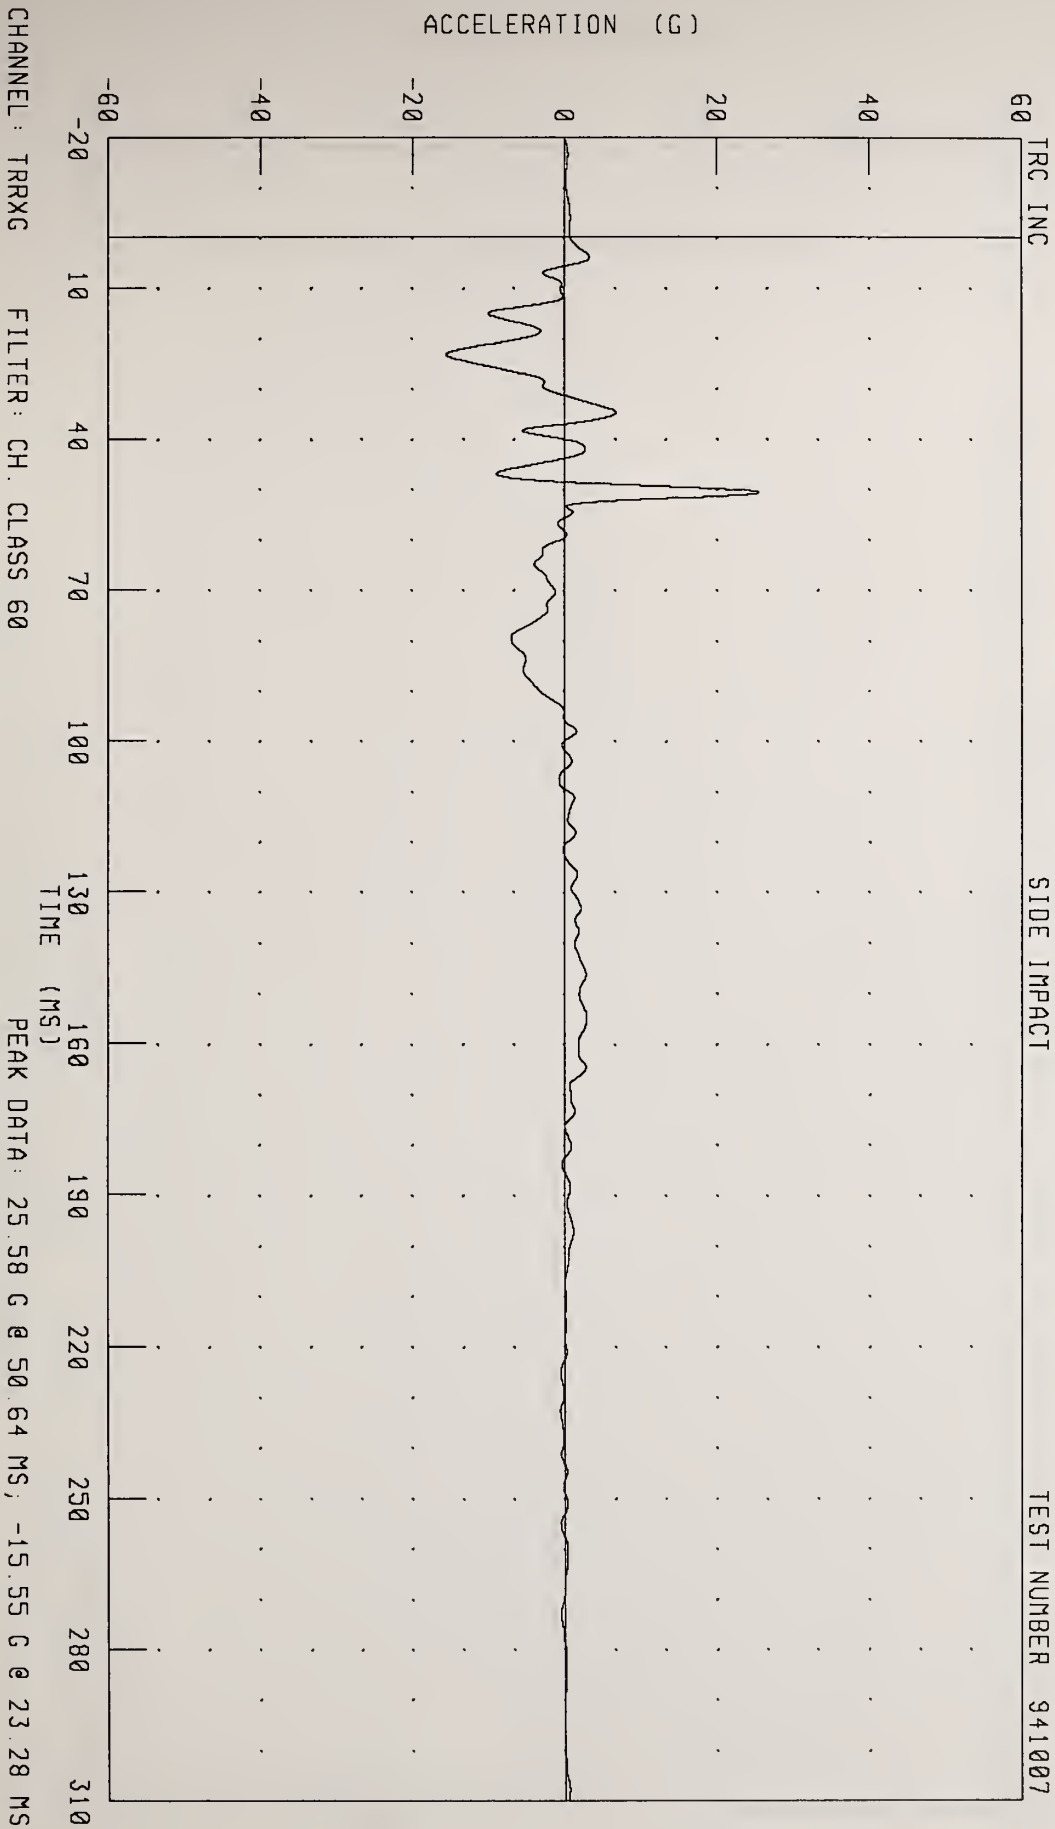


CHANNEL: TRRXG

FILTER: CH. CLASS 60

PEAK DATA: 25.58 G @ 50.64 MS, -15.55 G @ 23.28 MS


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT X-AXIS VELOCITY
SIDE IMPACT

TEST NUMBER 941007

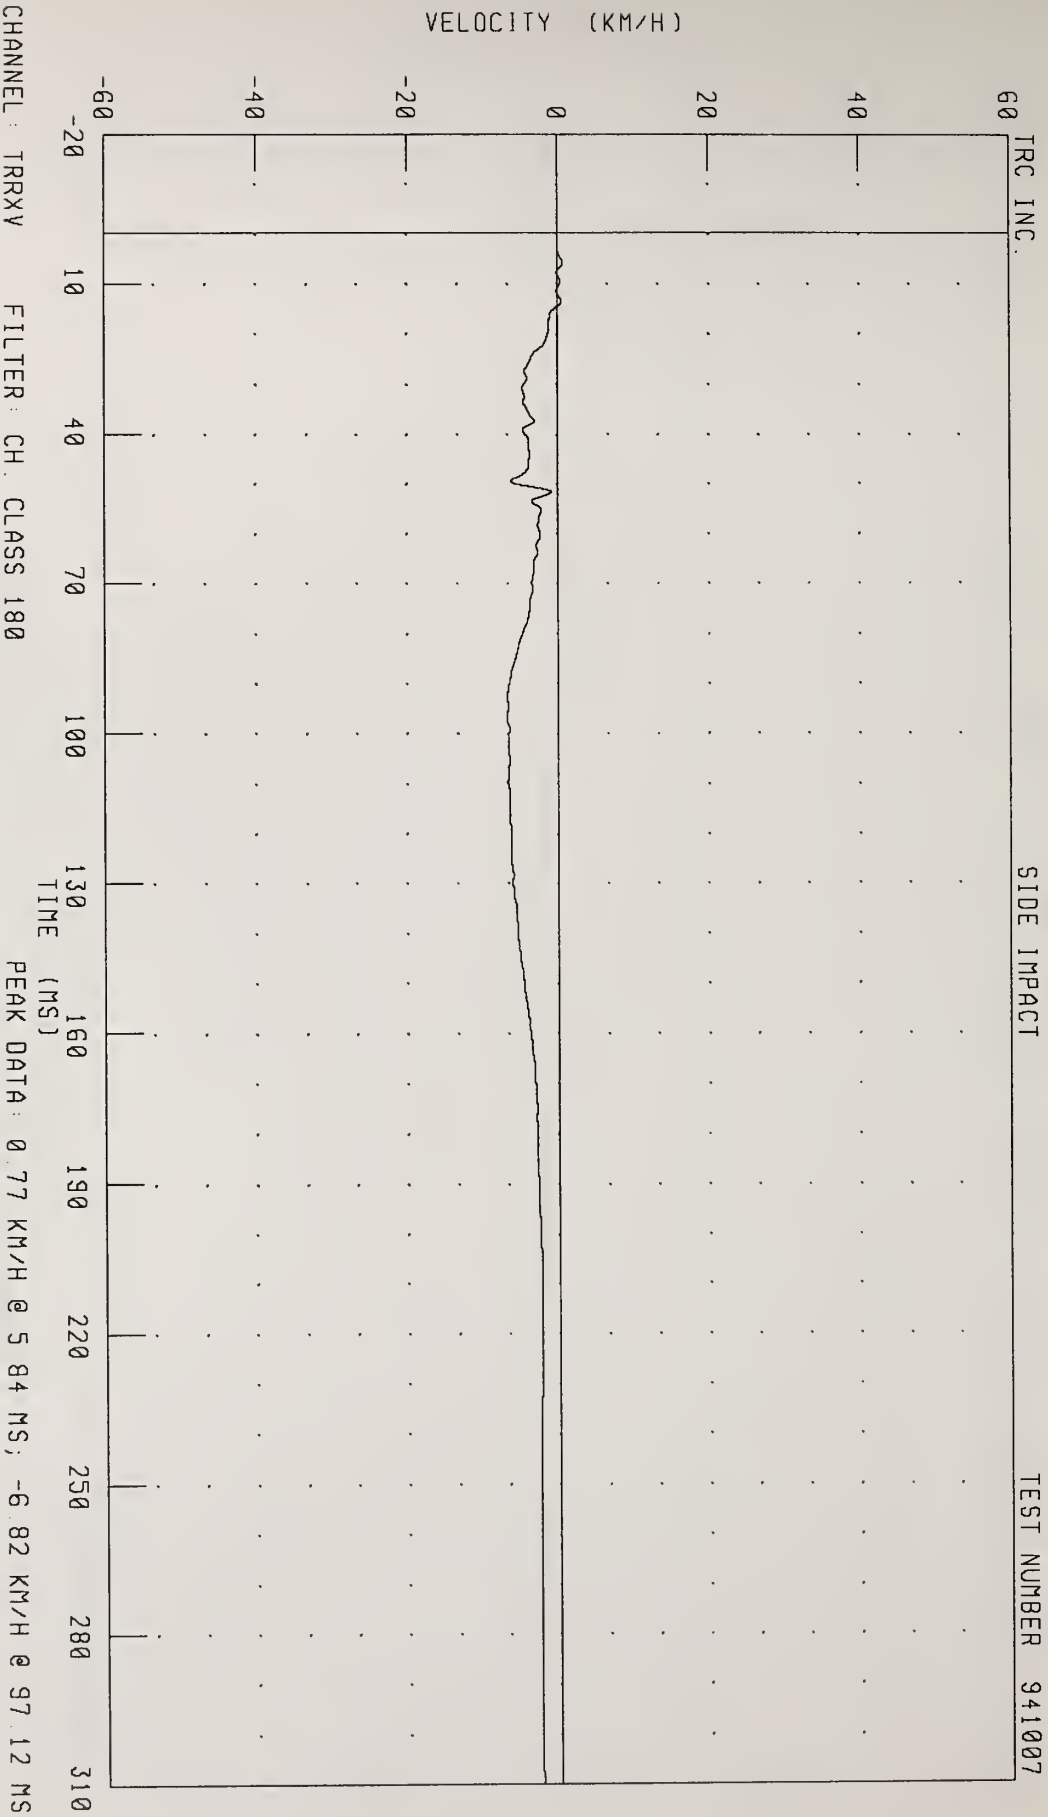


CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT Y-AXIS ACCELERATION
SIDE IMPACT

TEST NUMBER 941007

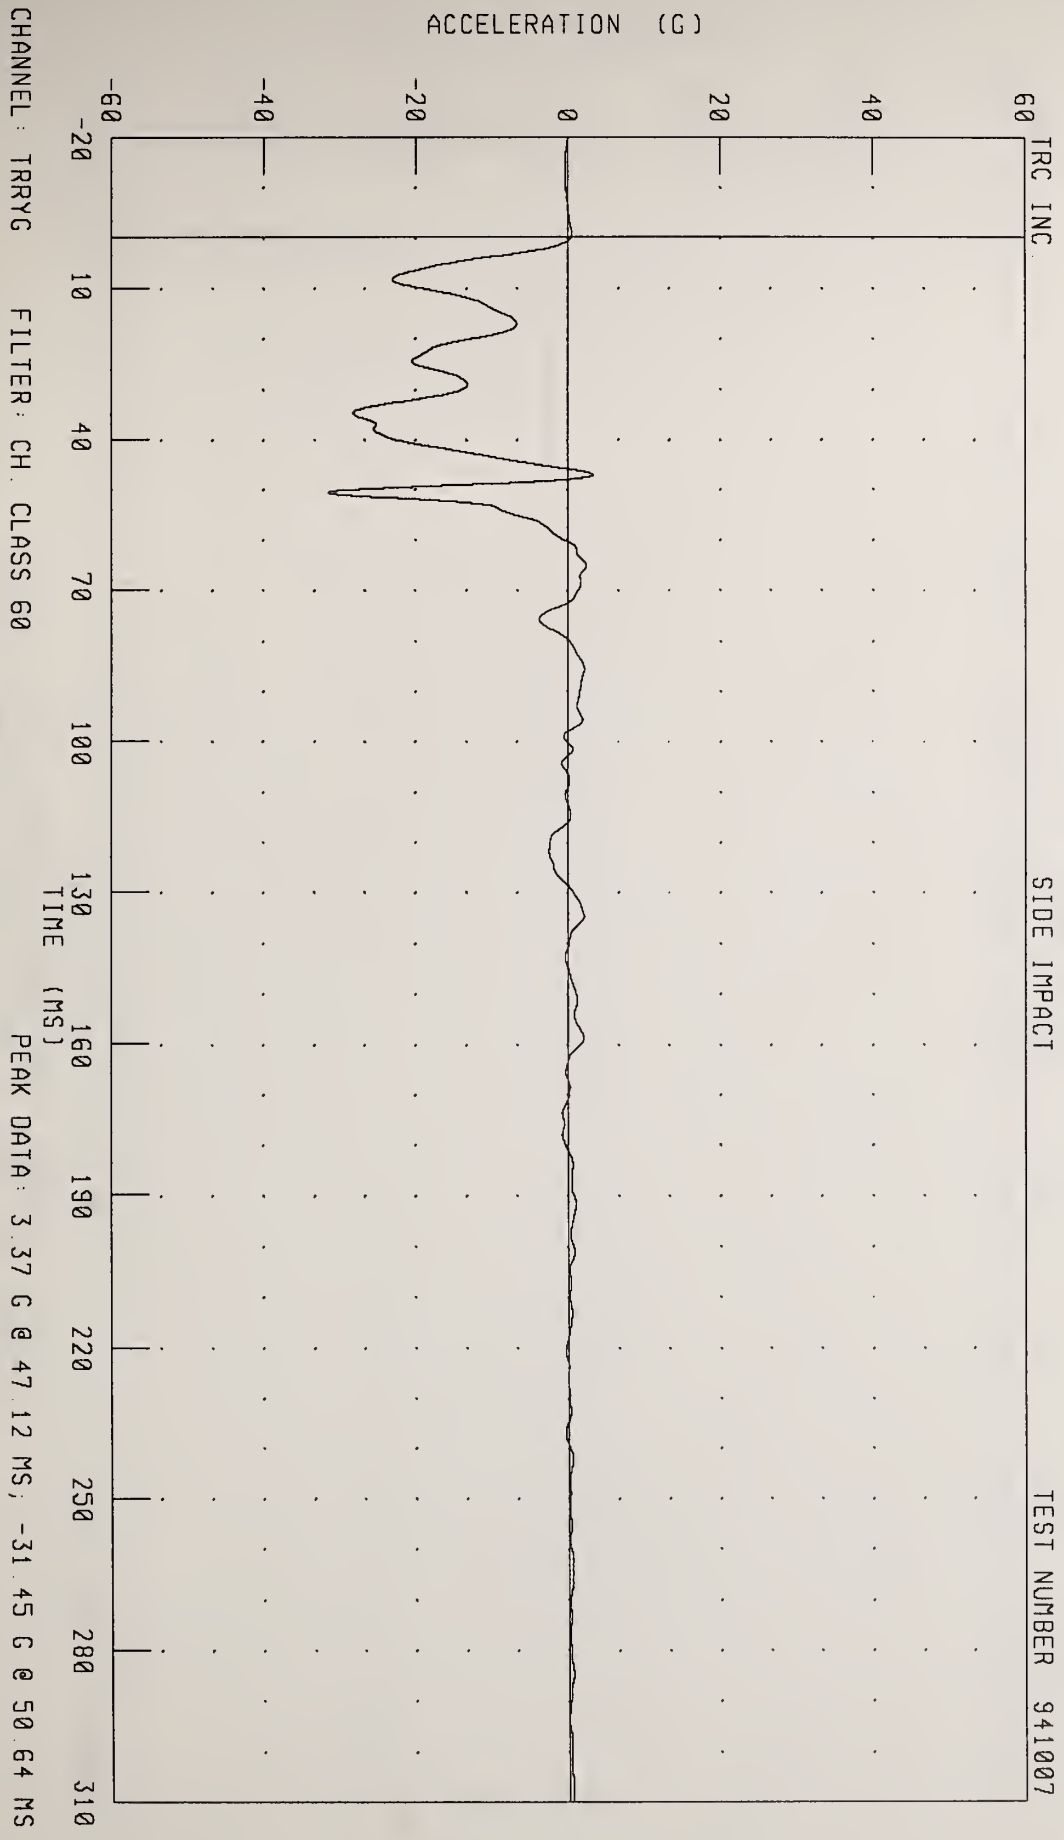

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT X-AXIS DISPLACEMENT
SIDE IMPACT


TEST NUMBER 941007

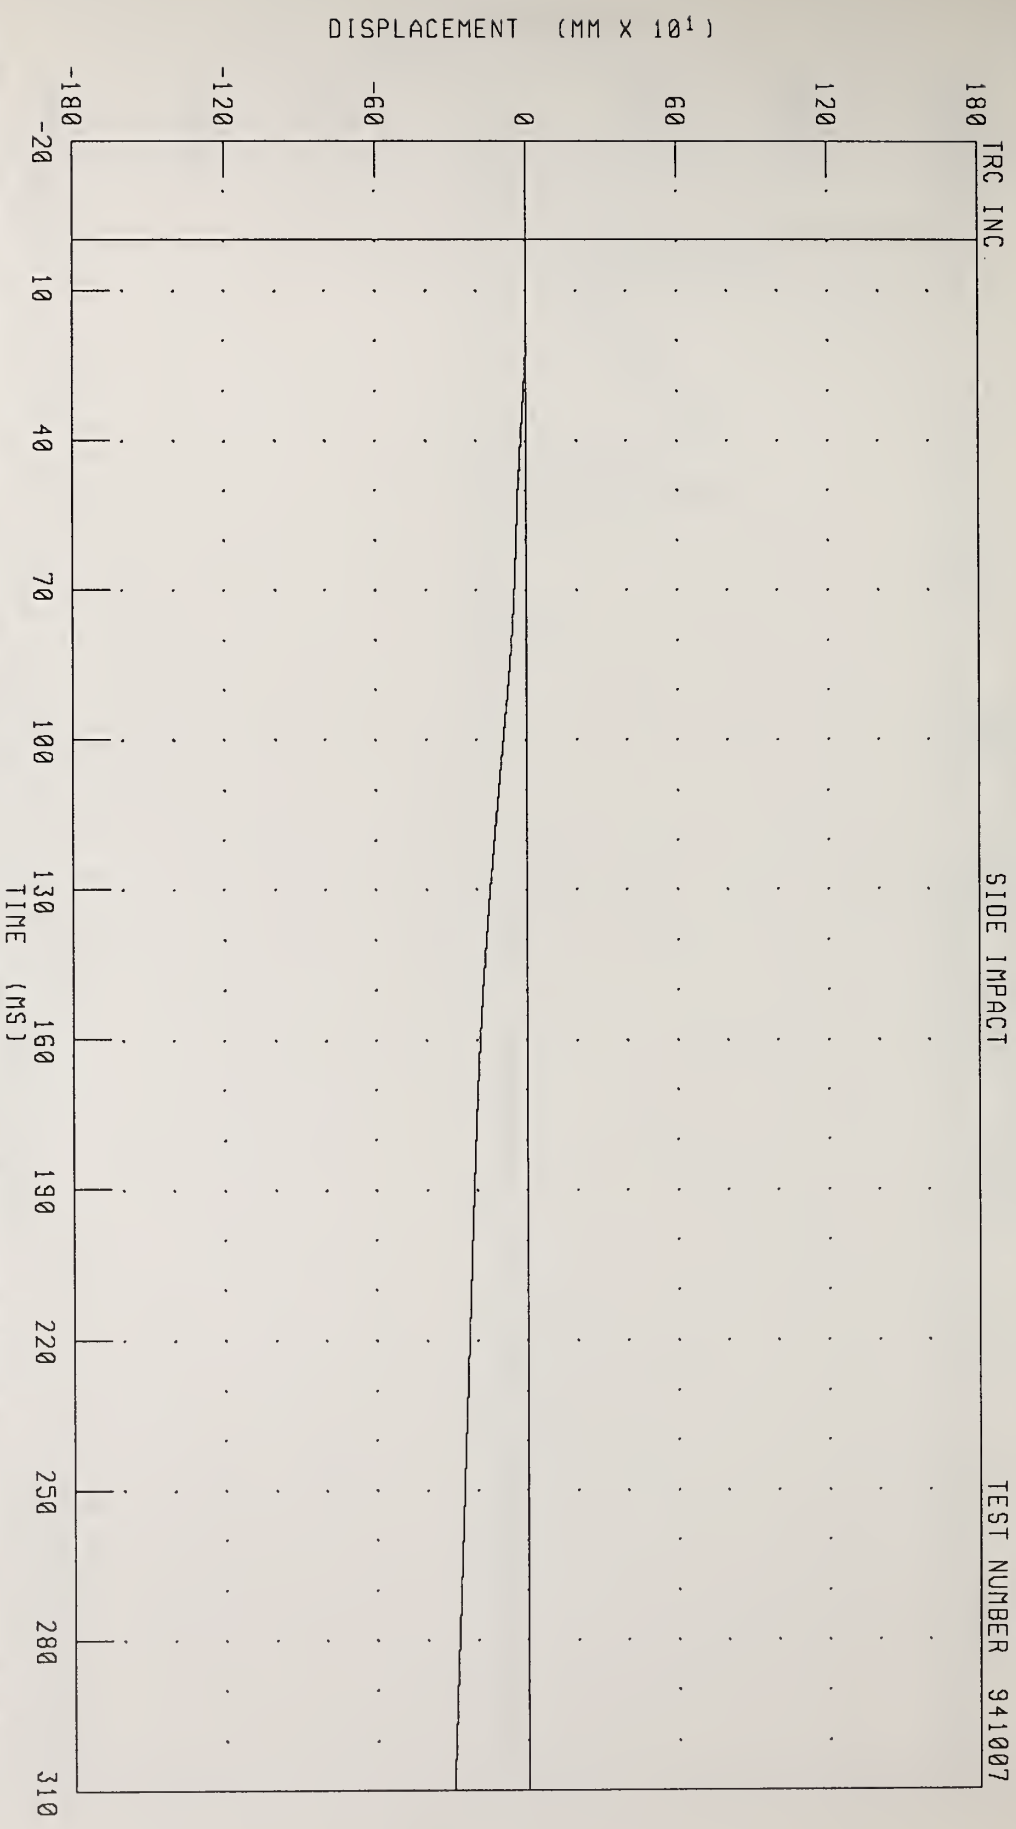

CHANNEL: TRRXD FILTER: CH CLASS 180
PEAK DATA: 0.87 MM @ 14.64 MS; -295.89 MM @ 310.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT Y-AXIS VELOCITY
SIDE IMPACT


TEST NUMBER: 941007

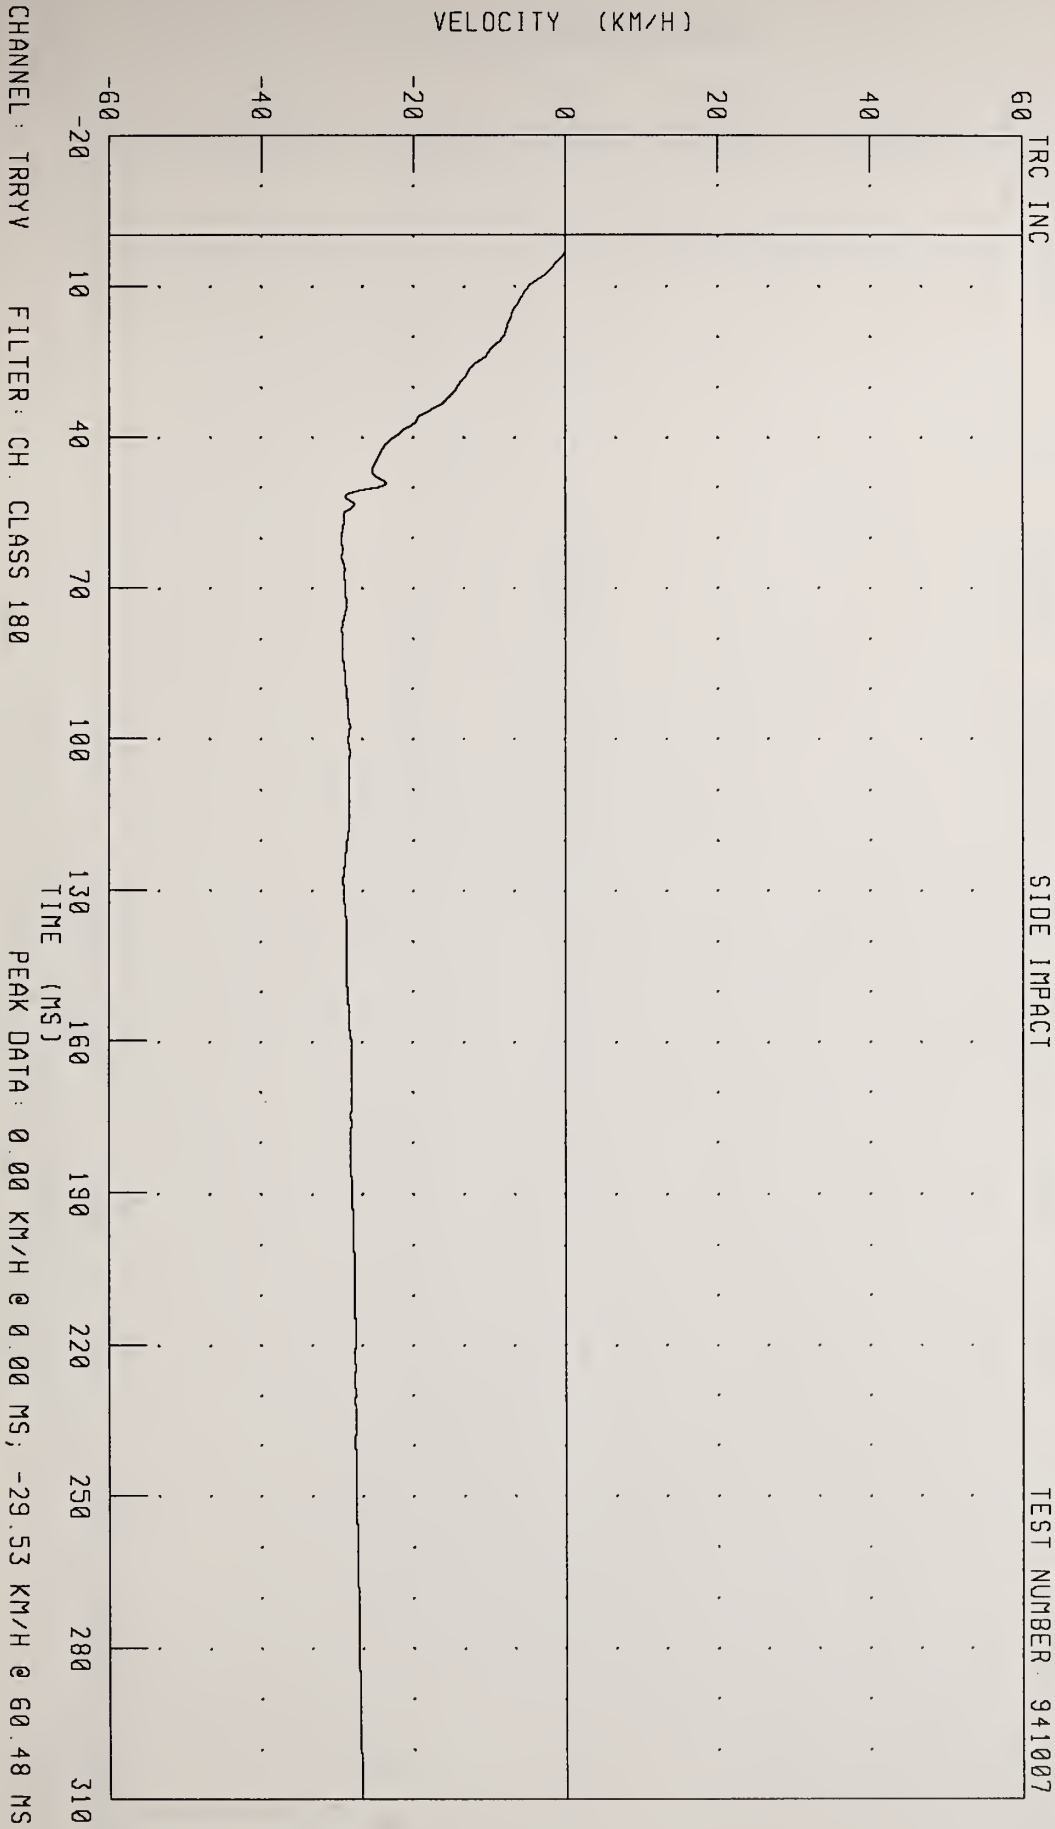

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
RIGHT REAR SEAT Y-AXIS DISPLACEMENT
SIDE IMPACT

TRC INC

TEST NUMBER 941007

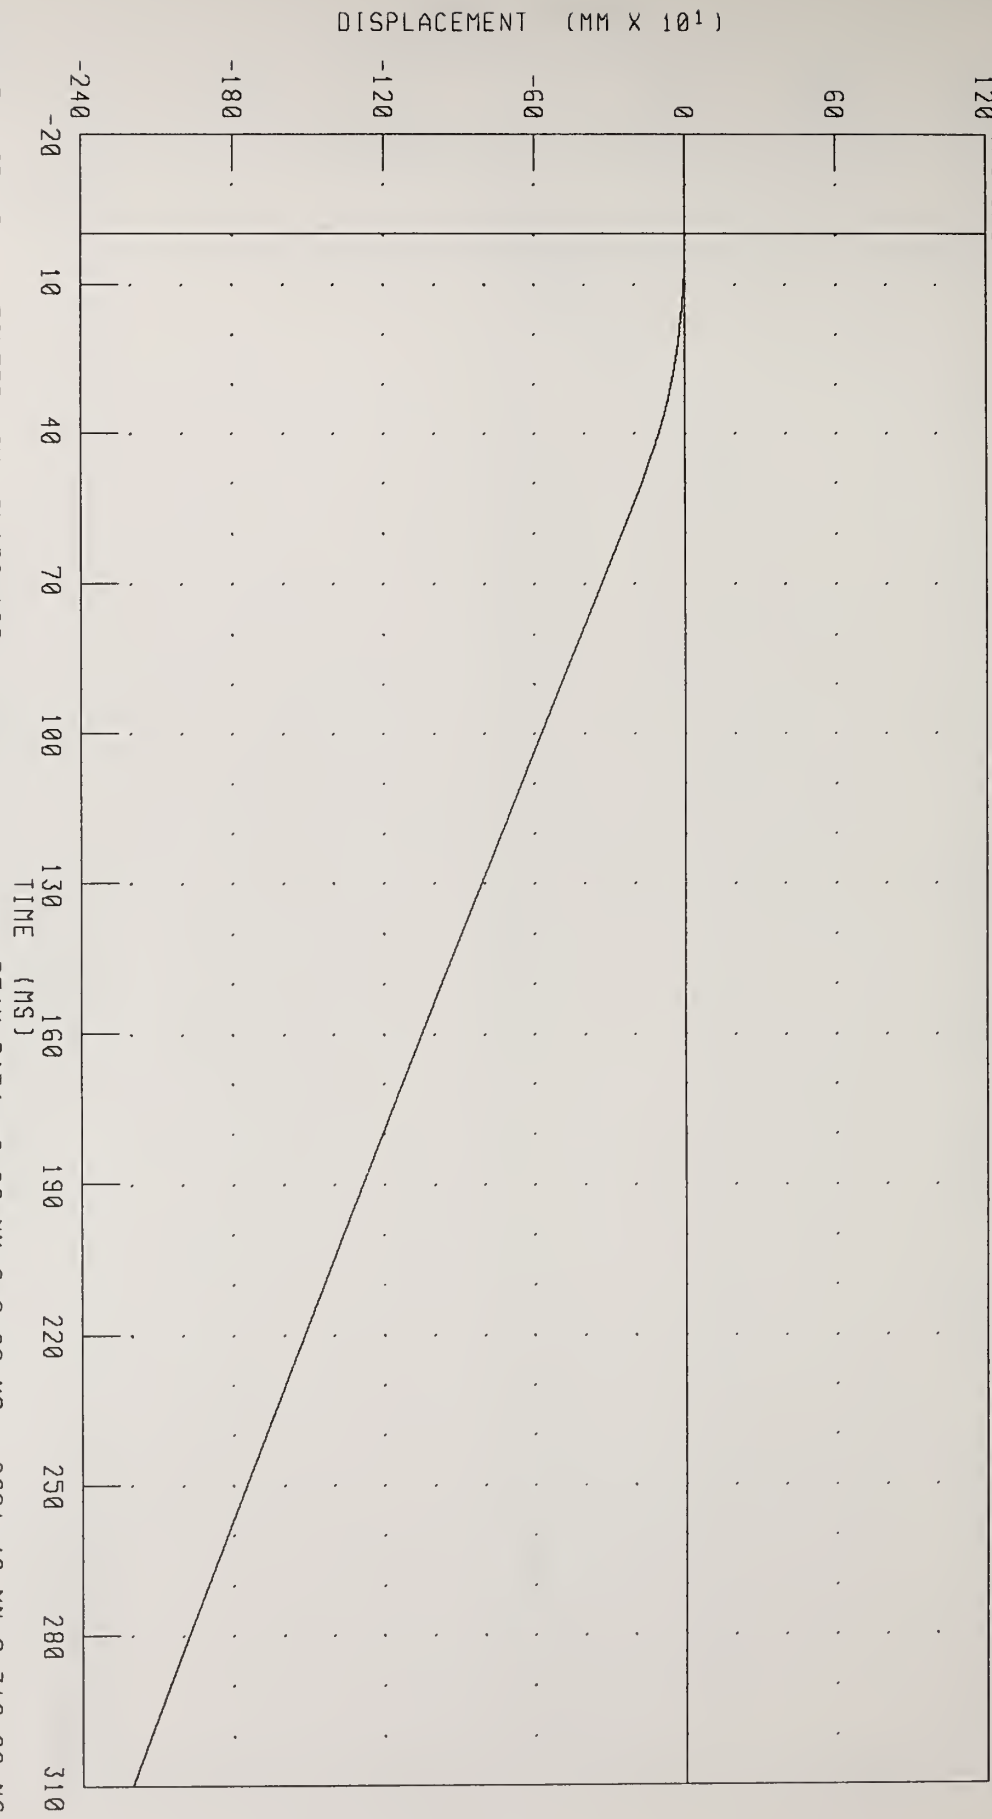


CHANNEL: TRRYD FILTER: CH CLASS 180 PEAK DATA: 0 00 MM @ 0 00 MS; -2201 49 MM @ 310 00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY X-AXIS ACCELERATION

SIDE IMPACT


TEST NUMBER 941007

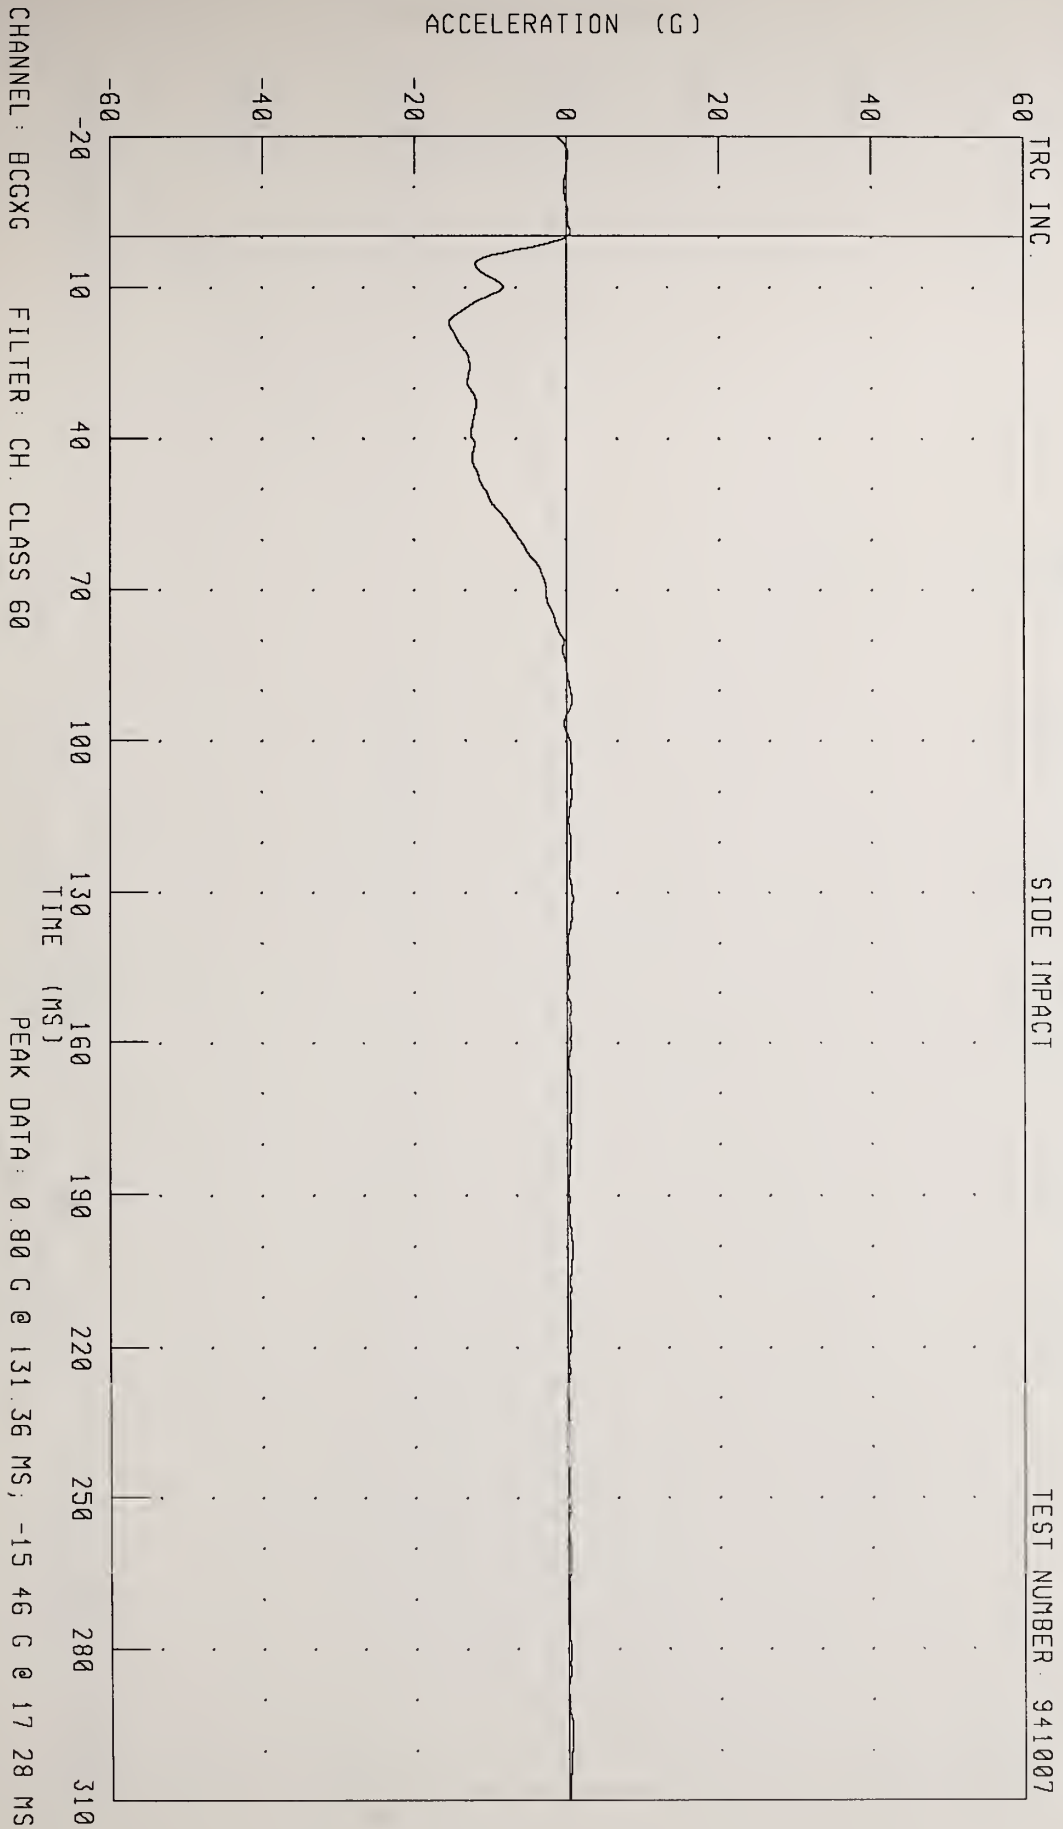

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY X-AXIS VELOCITY
SIDE IMPACT

TRC INC.

TEST NUMBER 941007

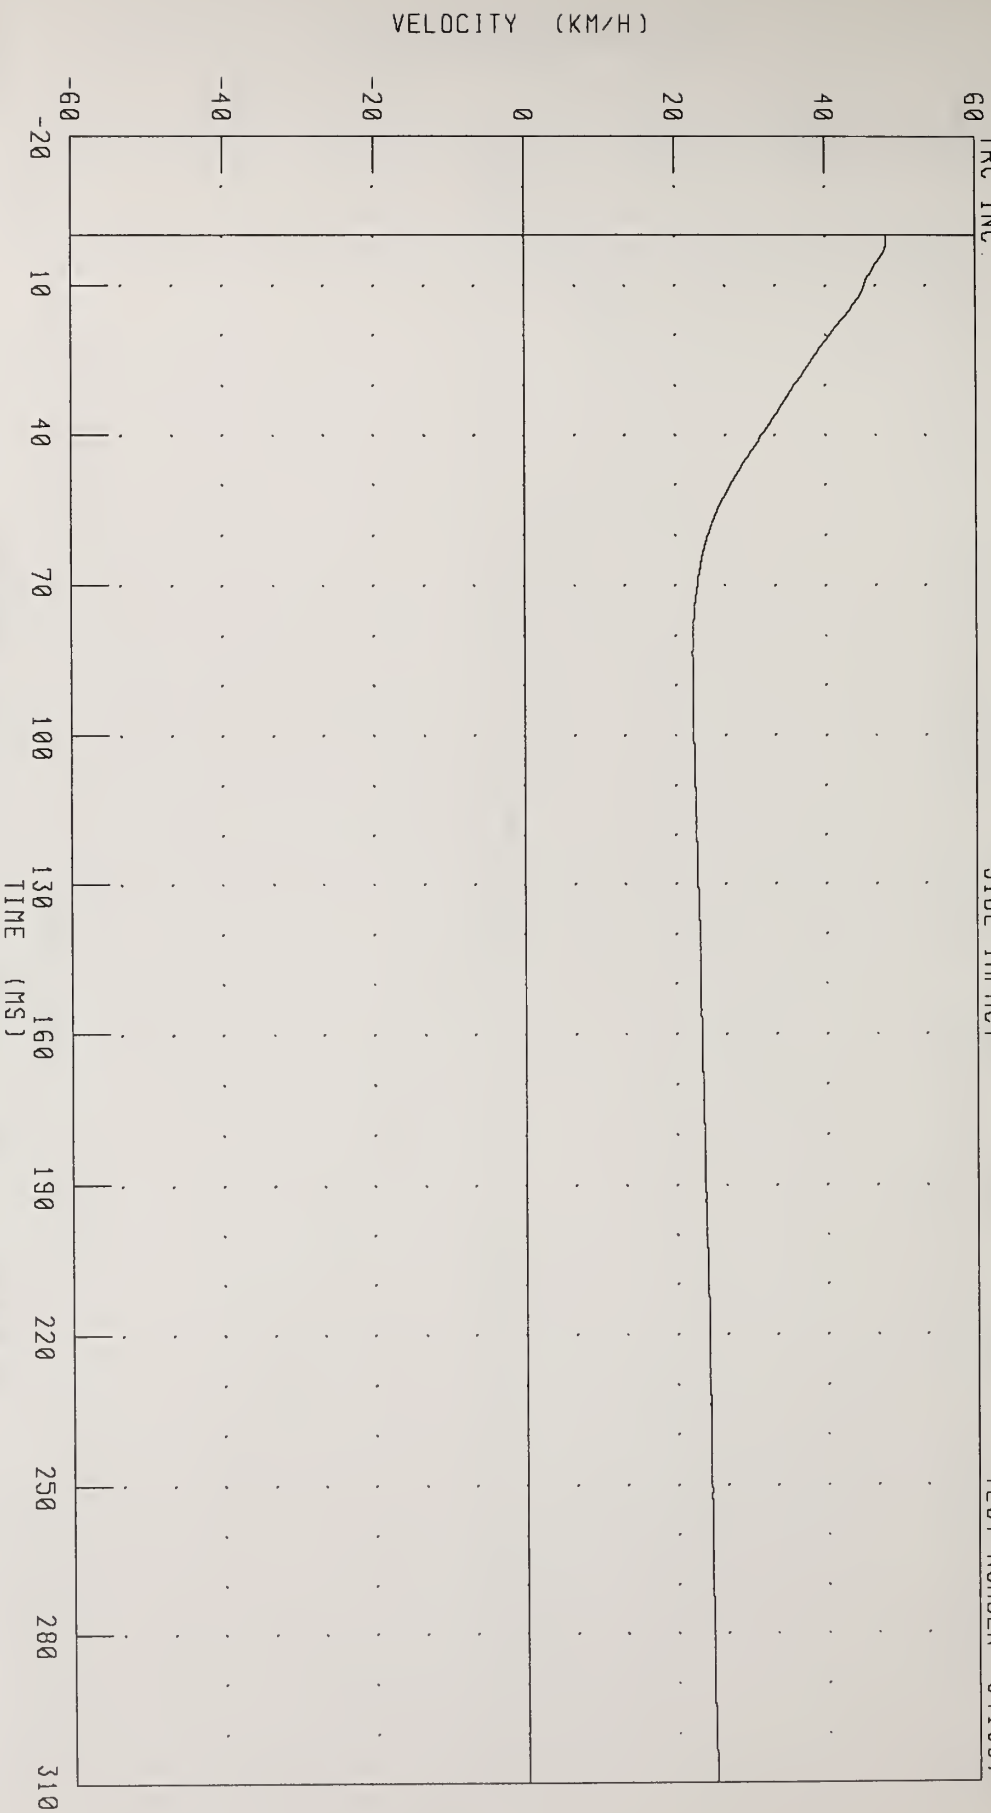


CHANNEL: BCGXY FILTER: CH CLASS 180

PEAK DATA: 48.13 KM/H @ 0 80 MS, 22.27 KM/H @ 83 60 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY X-AXIS DISPLACEMENT


TRC INC. TEST NUMBER: 941007

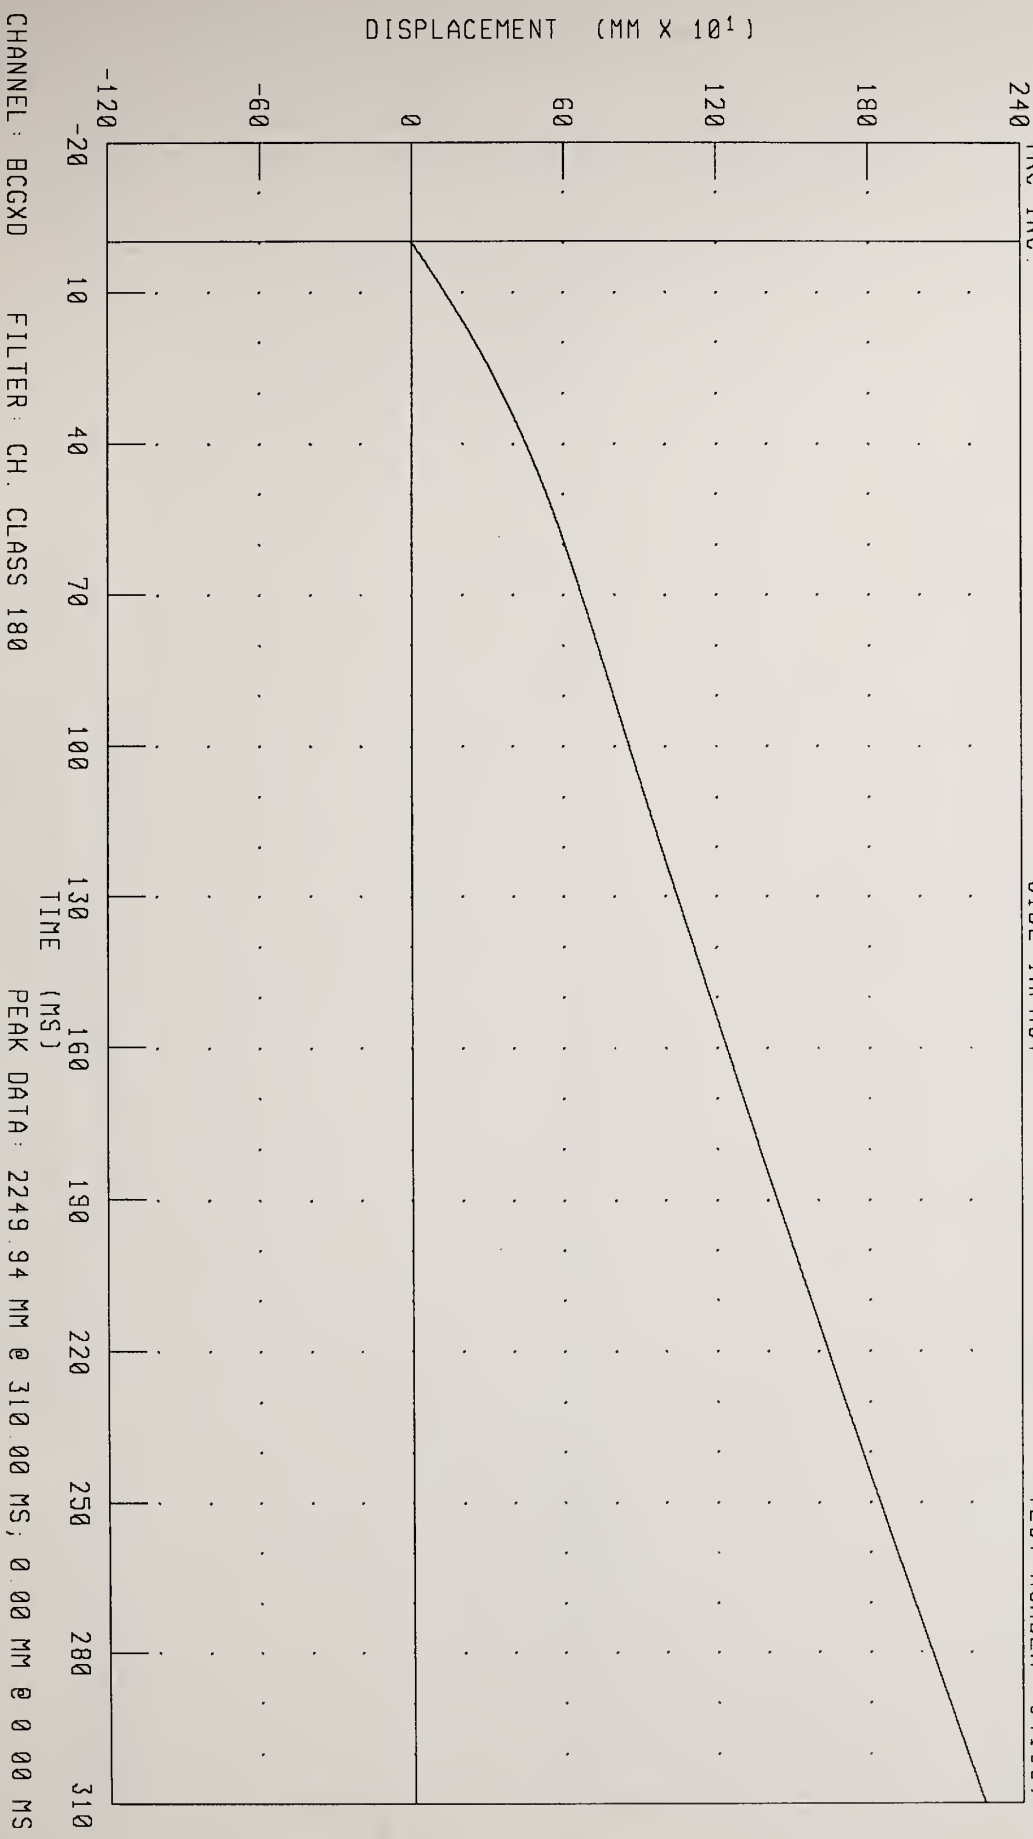

CHANNEL: BCGXD FILTER: CH. CLASS 180 PEAK DATA: 2249.94 MM @ 310.00 MS, 0.00 MM @ 0.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY Y-AXIS ACCELERATION
SIDE IMPACT


TEST NUMBER 941007

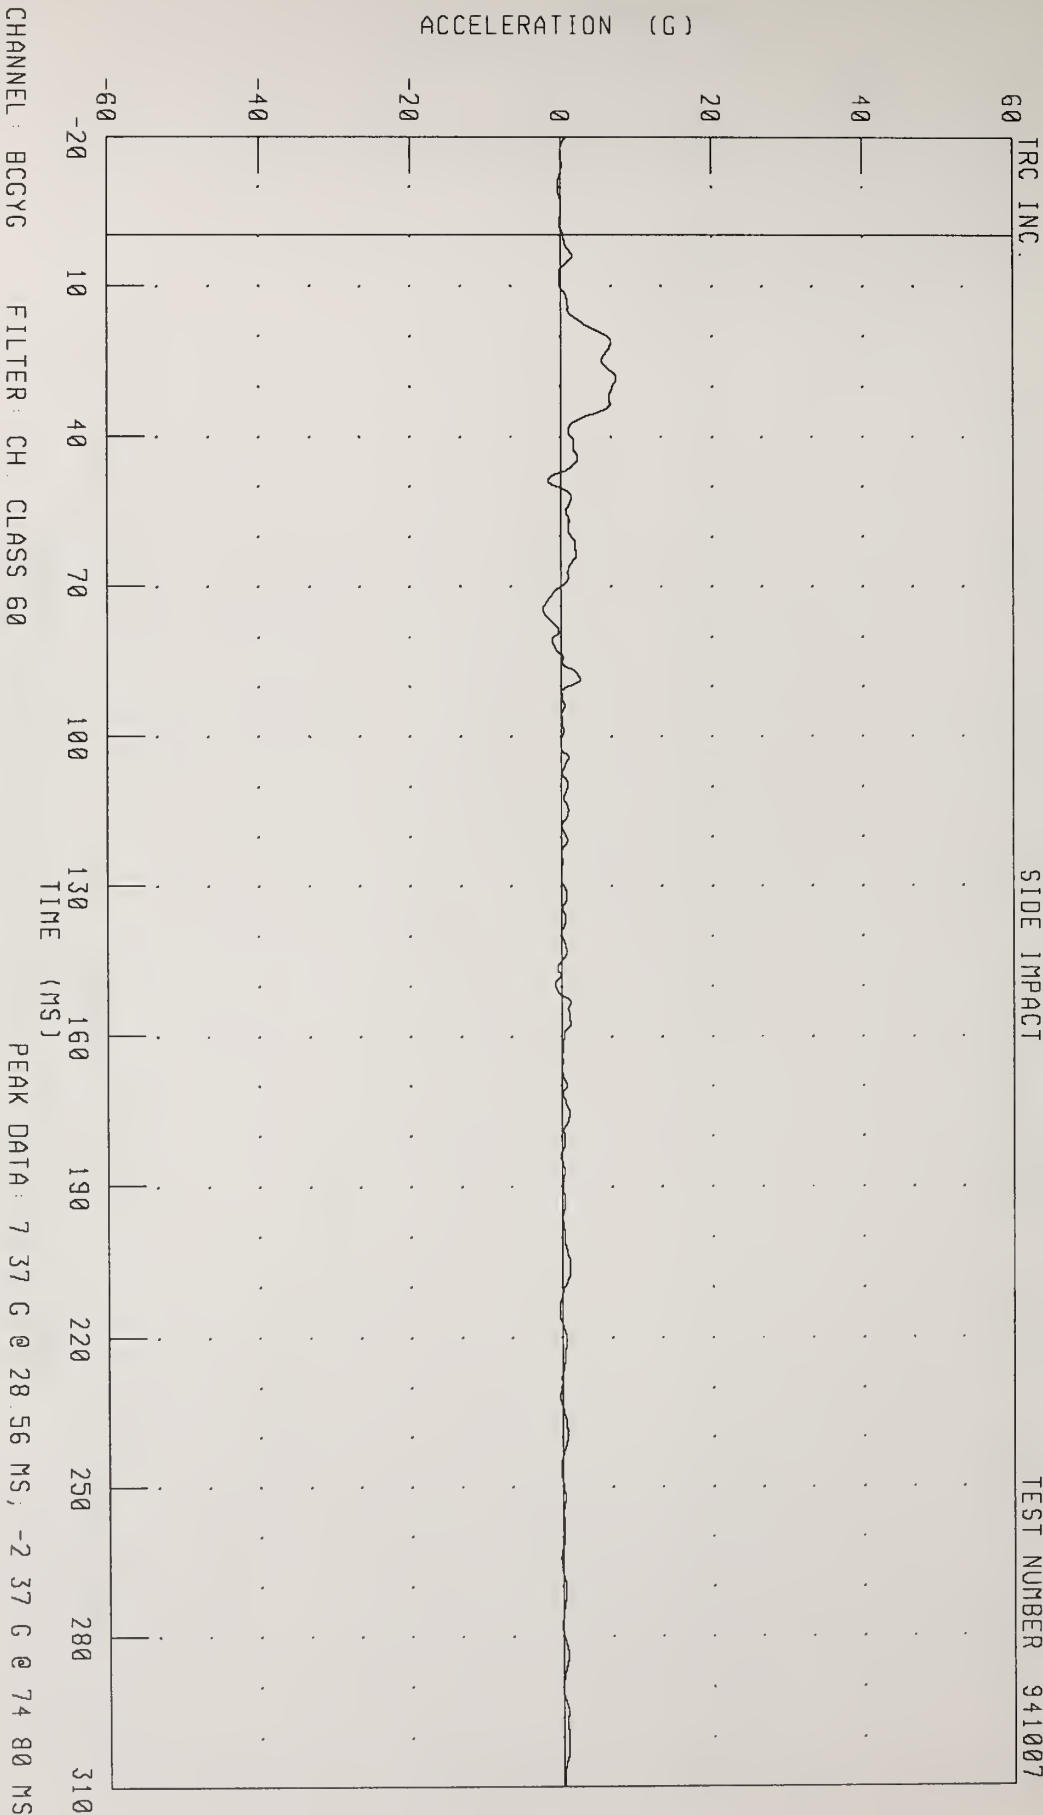

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY Y-AXIS VELOCITY
SIDE IMPACT

TRC INC.

TEST NUMBER 941007

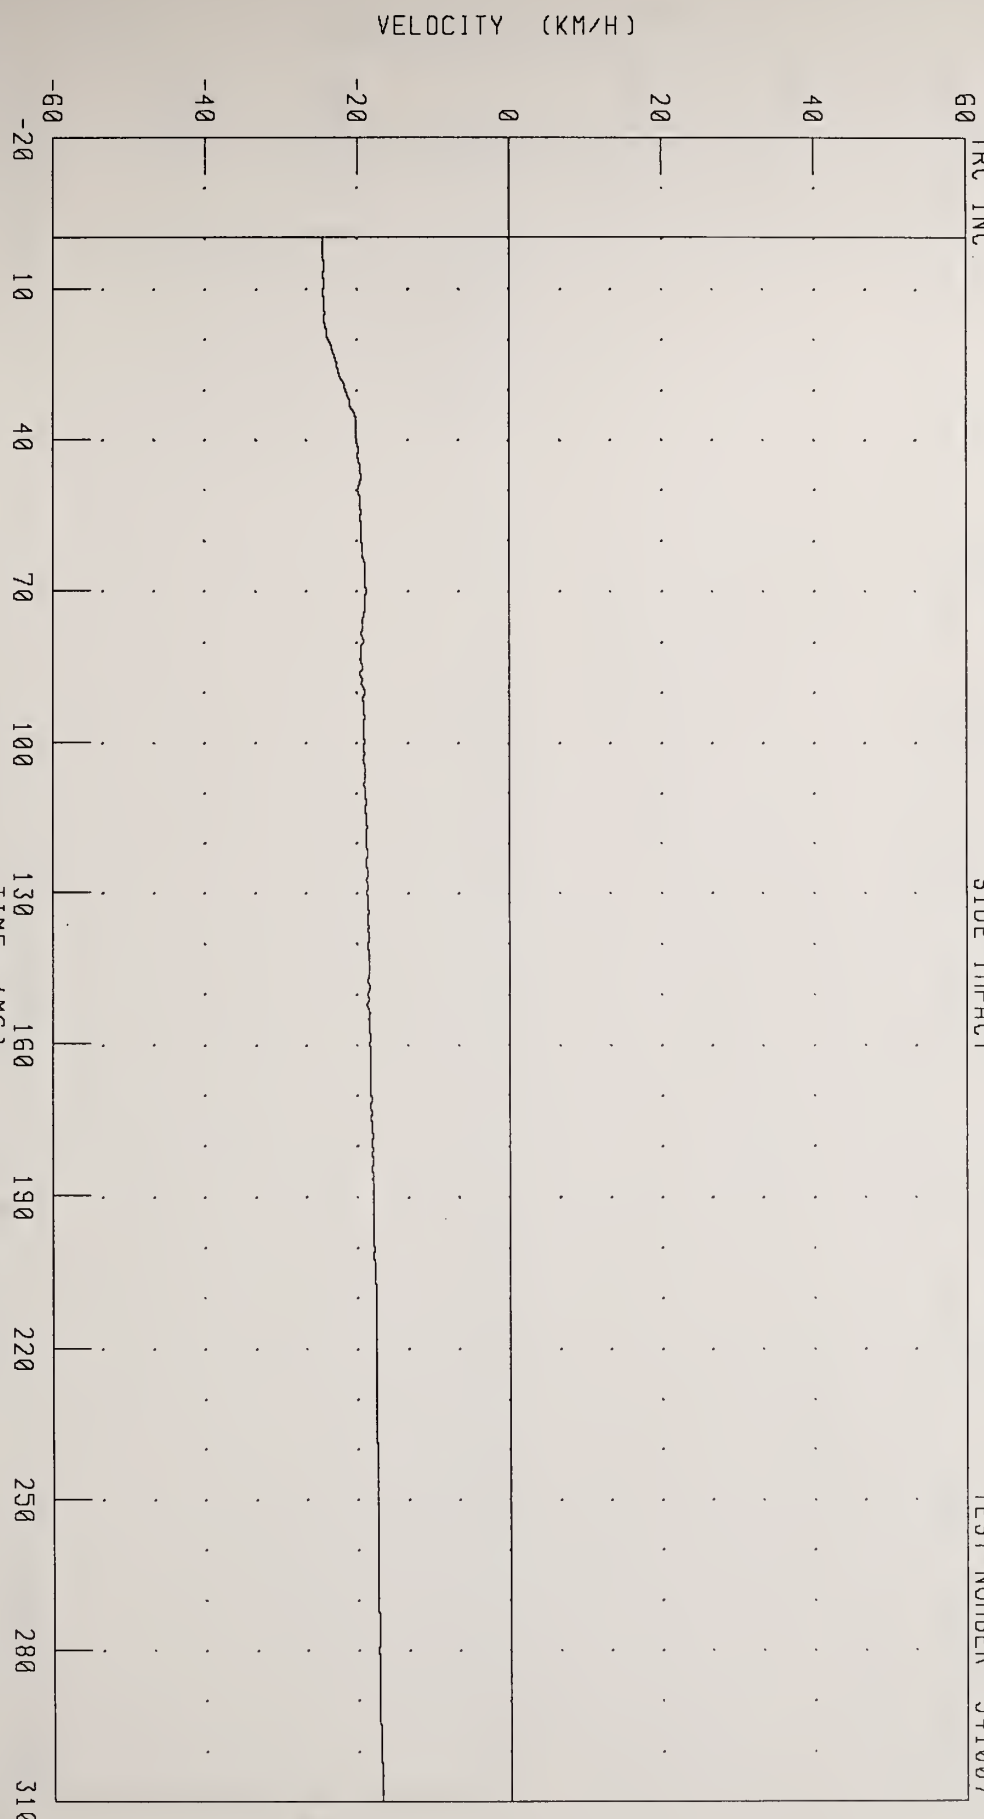


VELOCITY (KM/H)

CHANNEL: BCGYV FILTER: CH CLASS 180
PEAK DATA: -16.90 KM/H @ 310.00 MS, -24.62 KM/H @ 3.12 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY Y-AXIS DISPLACEMENT
SIDE IMPACT

TRC INC.

TEST NUMBER 941007

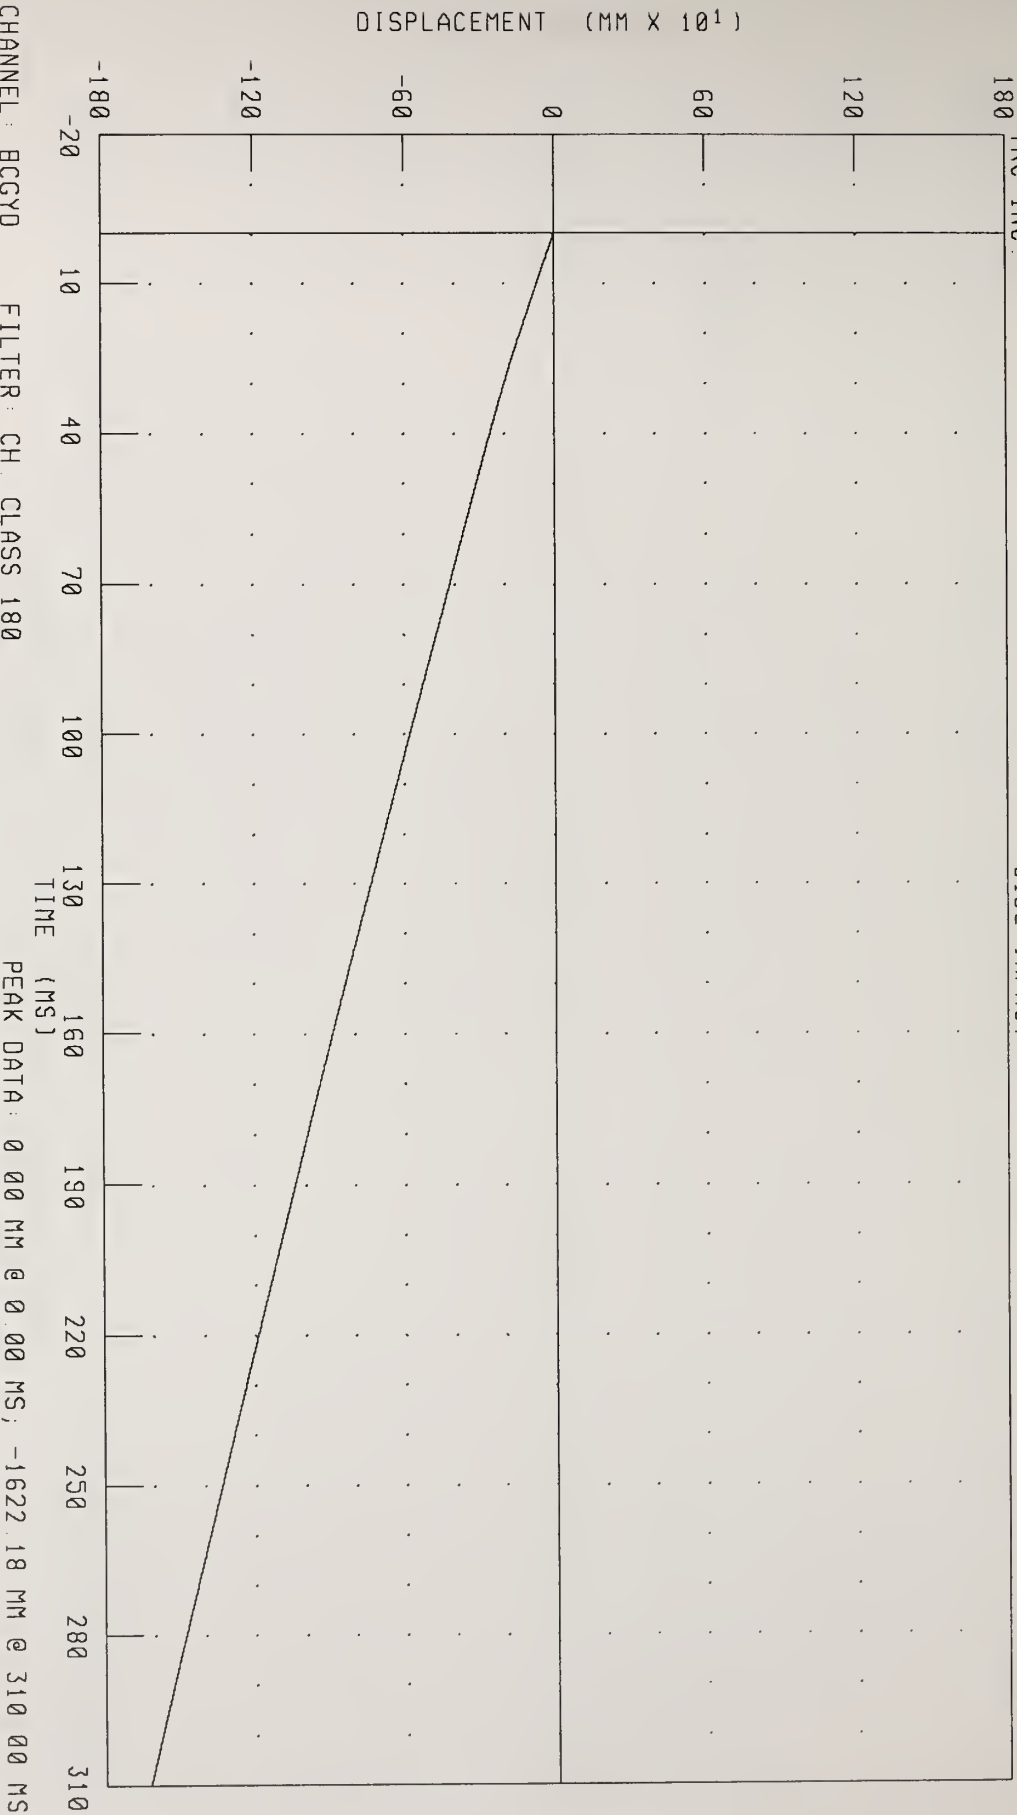

CHANNEL: BCGYD

FILTER: CH CLASS 180


PEAK DATA: 0 00 MM @ 0 00 MS, -1622.18 MM @ 310 00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY Z-AXIS ACCELERATION

TRC INC.

SIDE IMPACT

TEST NUMBER 941007

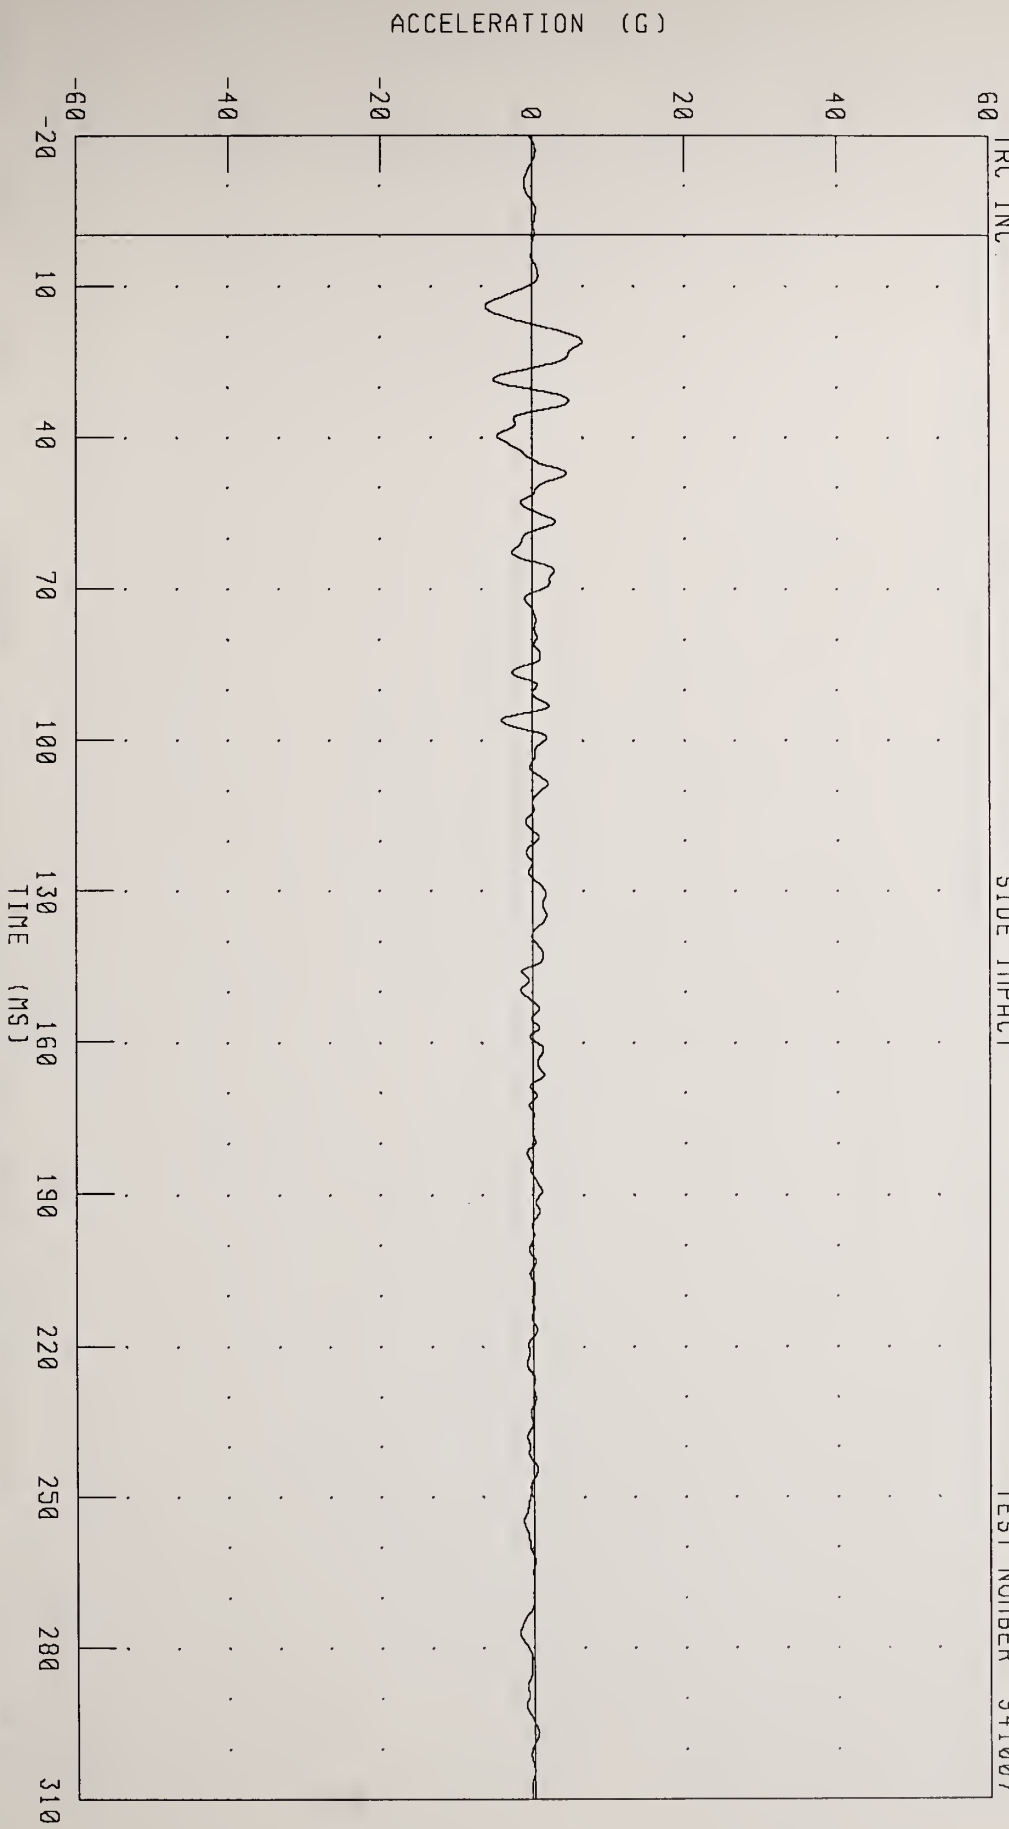


CHANNEL: BCGZG FILTER: CH. CLASS 60 PEAK DATA: 6.67 G @ 20.96 MS, -6.15 G @ 14.08 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY Z-AXIS VELOCITY

TRC INC.

SIDE IMPACT

TEST NUMBER 941007

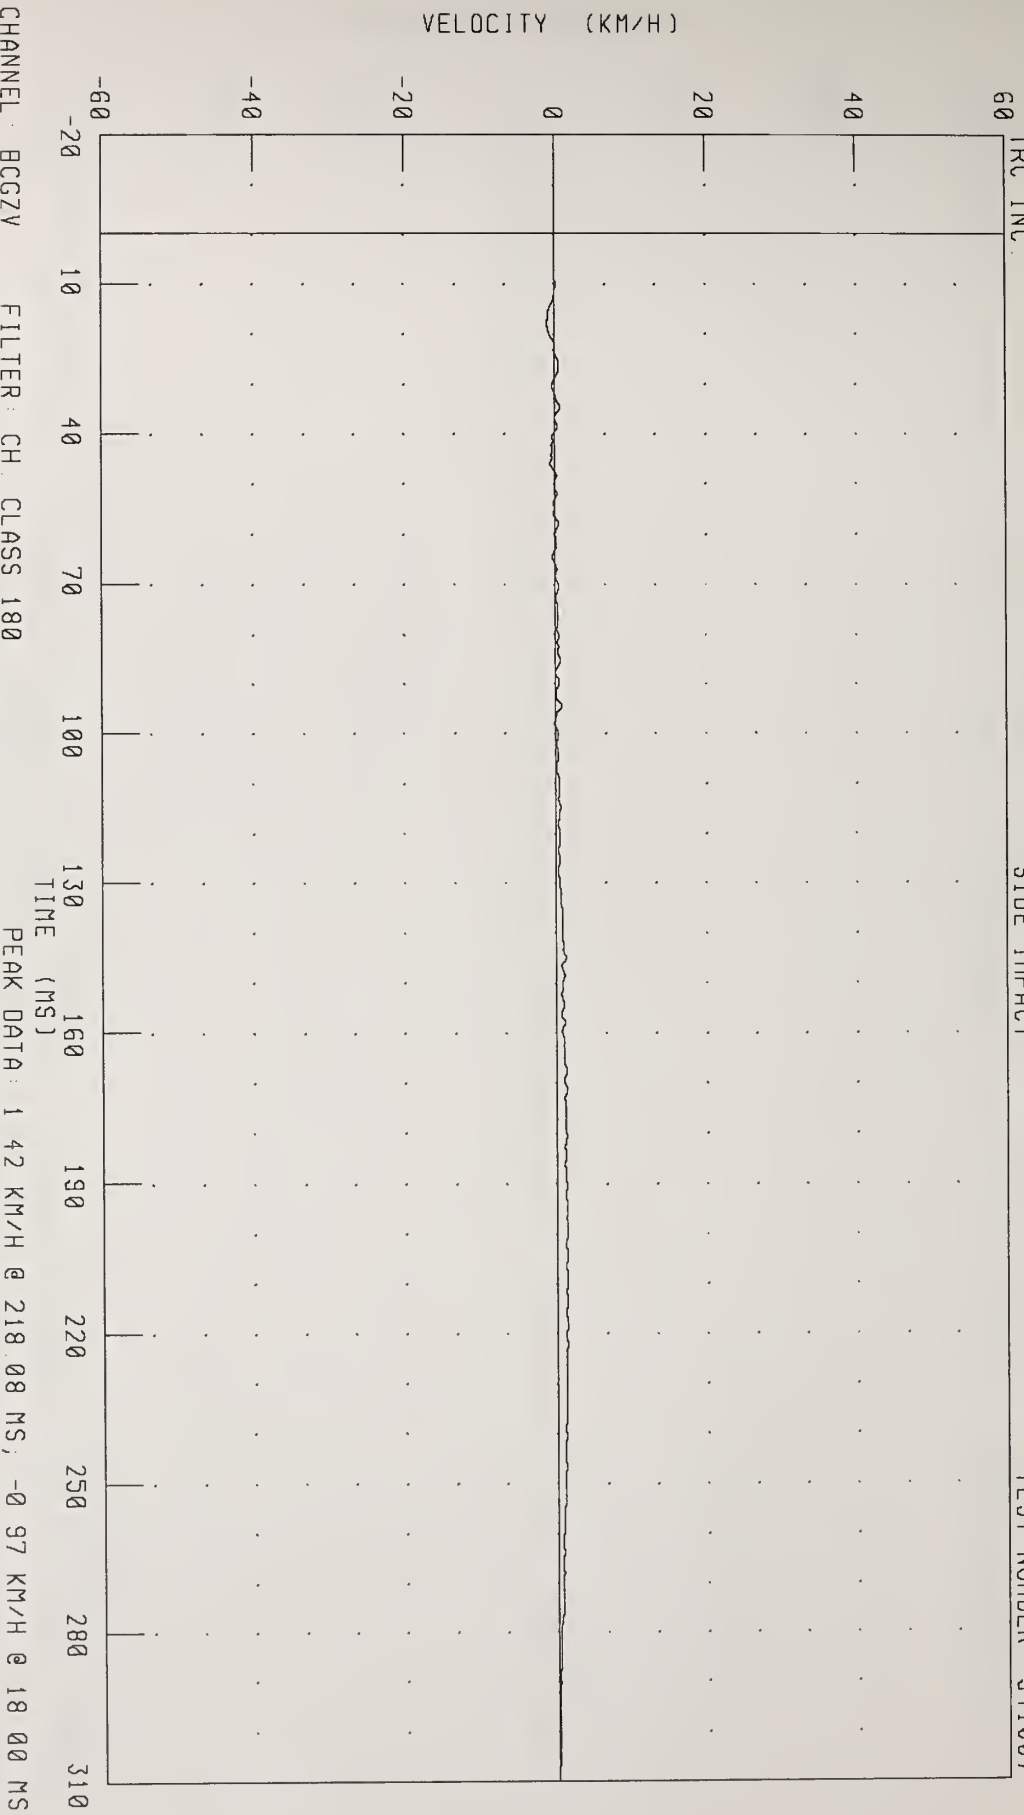


CHANNEL: BCGZV FILTER: CH CLASS 180

PEAK DATA: 1 42 KM/H @ 218.08 MS, -0 97 KM/H @ 18 00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
 CRABBED IMPACTOR CENTER OF GRAVITY Z-AXIS DISPLACEMENT


TRC INC. SIDE IMPACT TEST NUMBER 941007

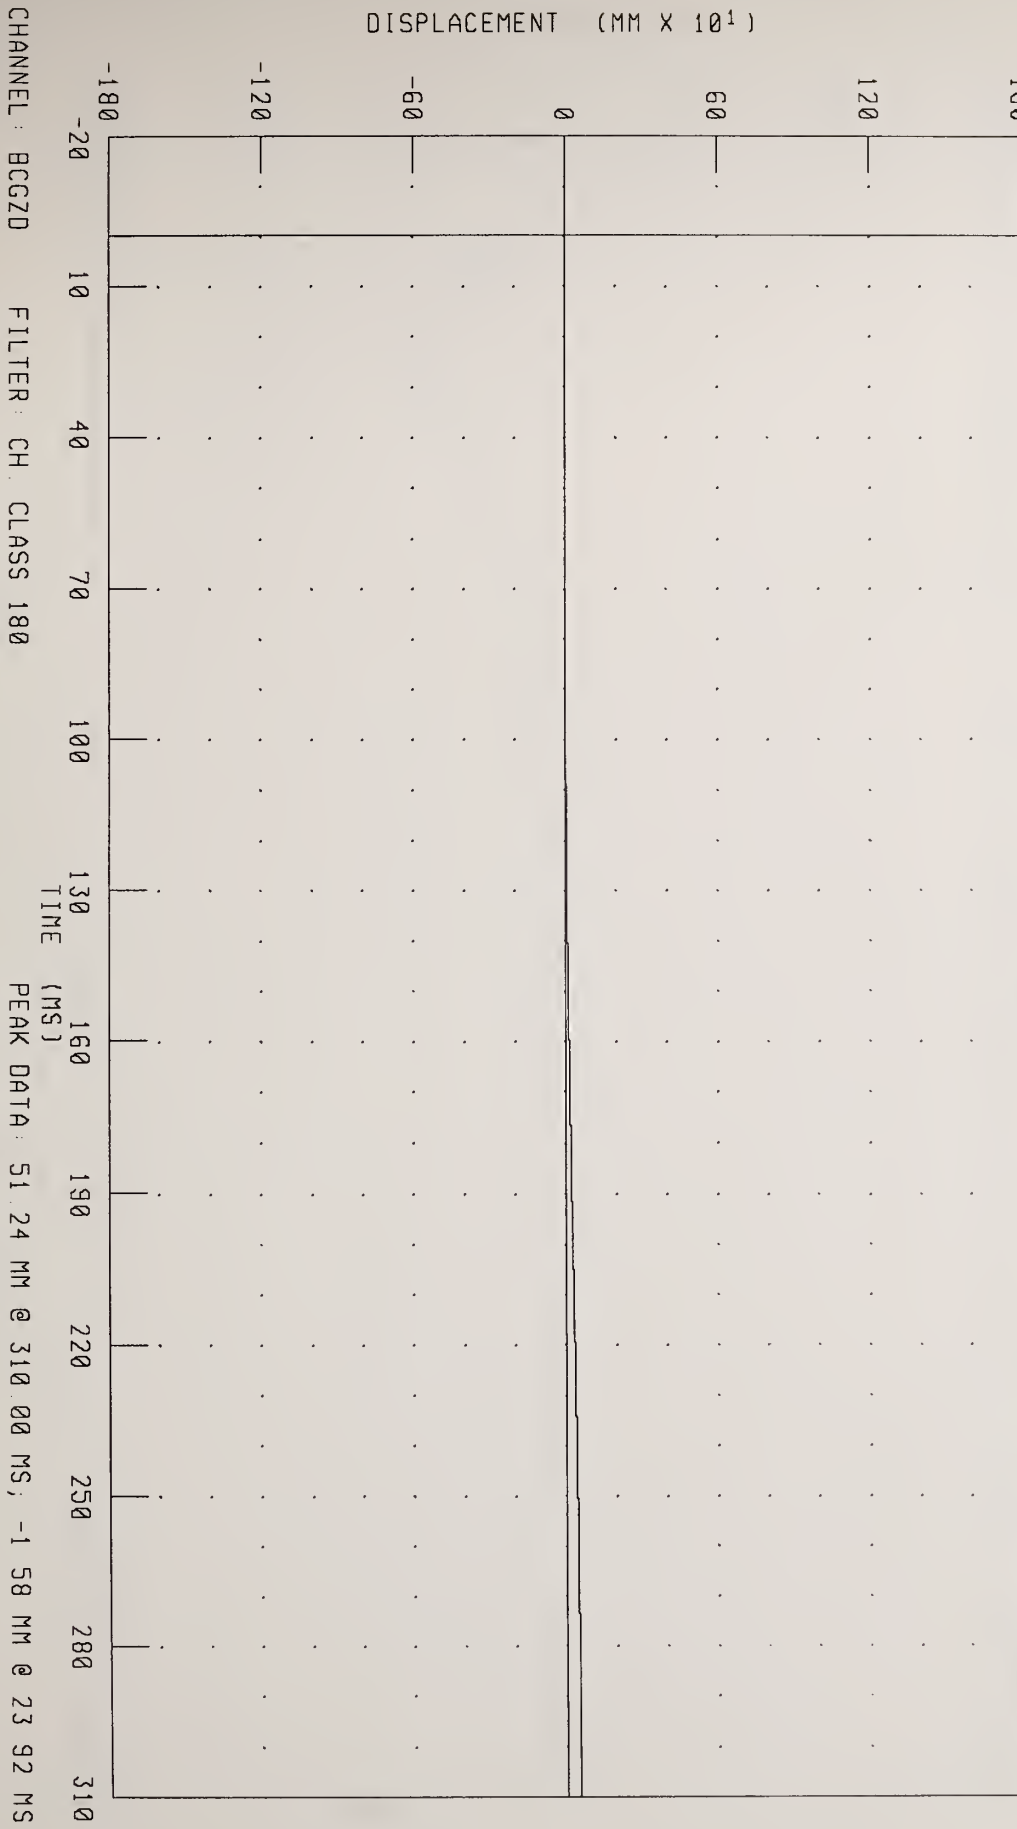

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR CENTER OF GRAVITY RESULTANT ACCELERATION

SIDE IMPACT


TEST NUMBER 941007

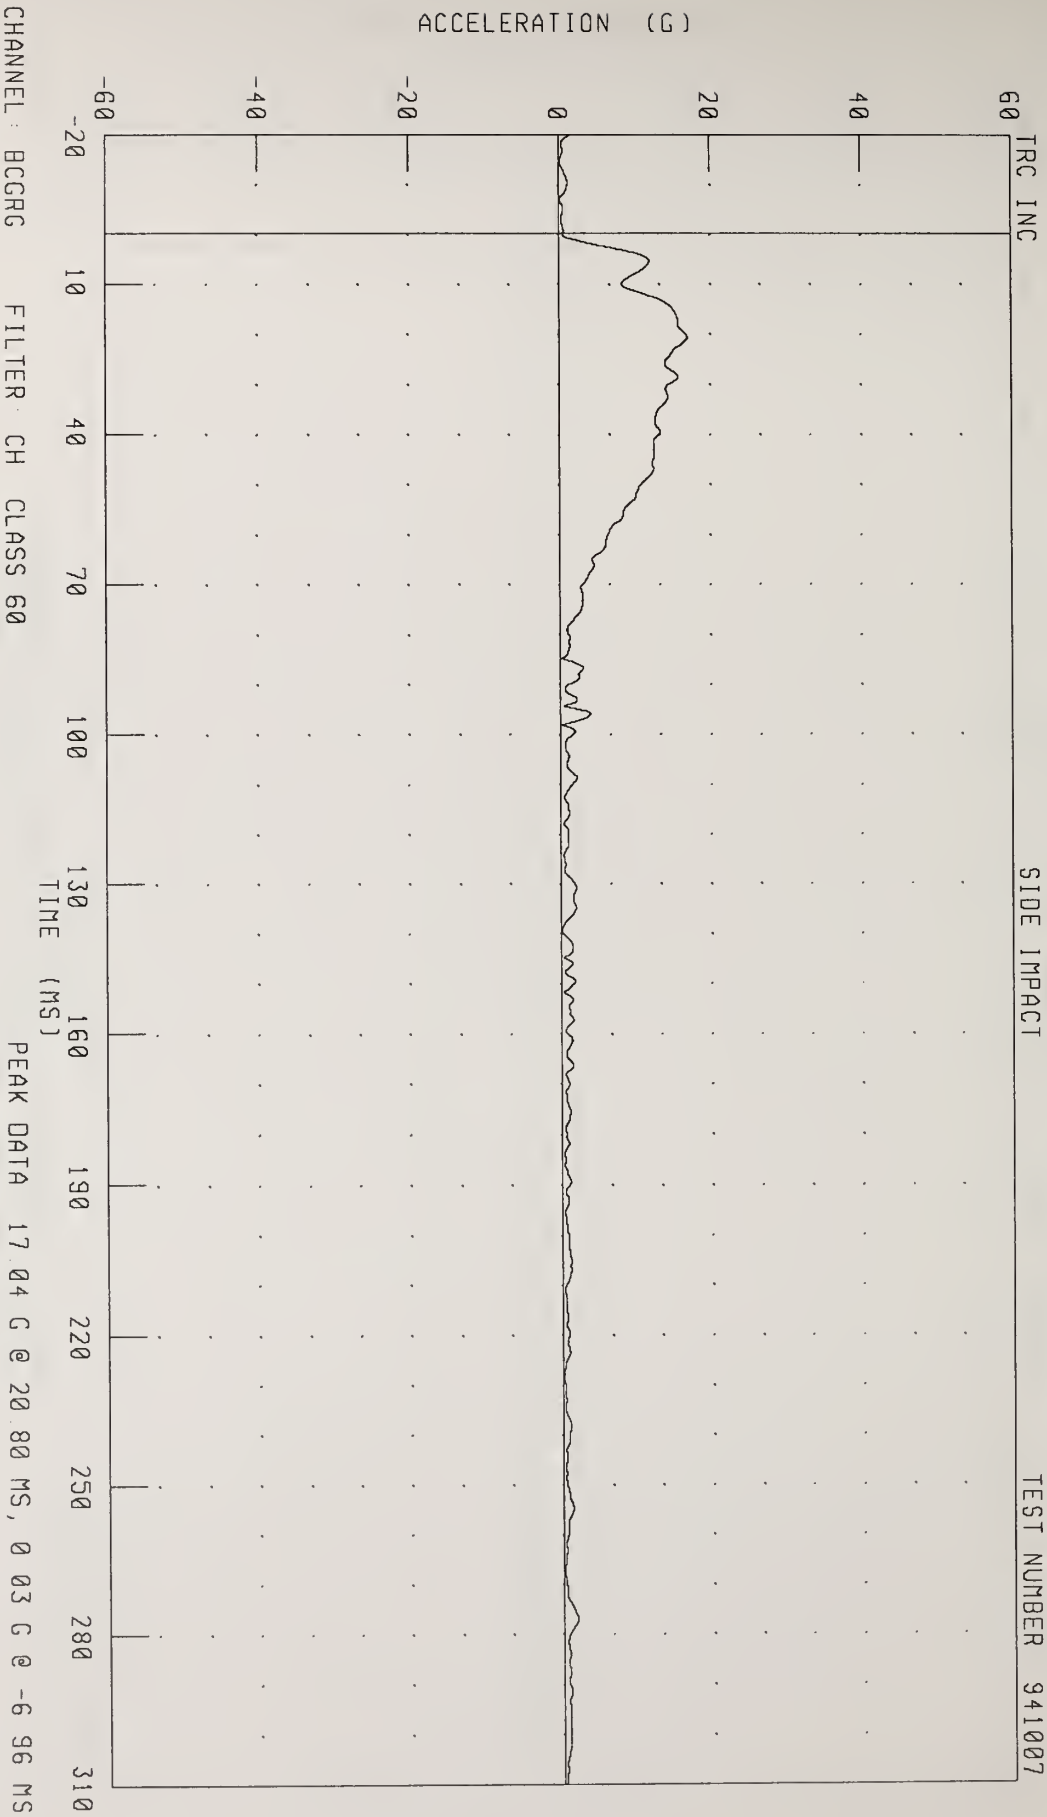

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR LEFT SIDE RAIL X-AXIS ACCELERATION

SIDE IMPACT

TEST NUMBER 9411007

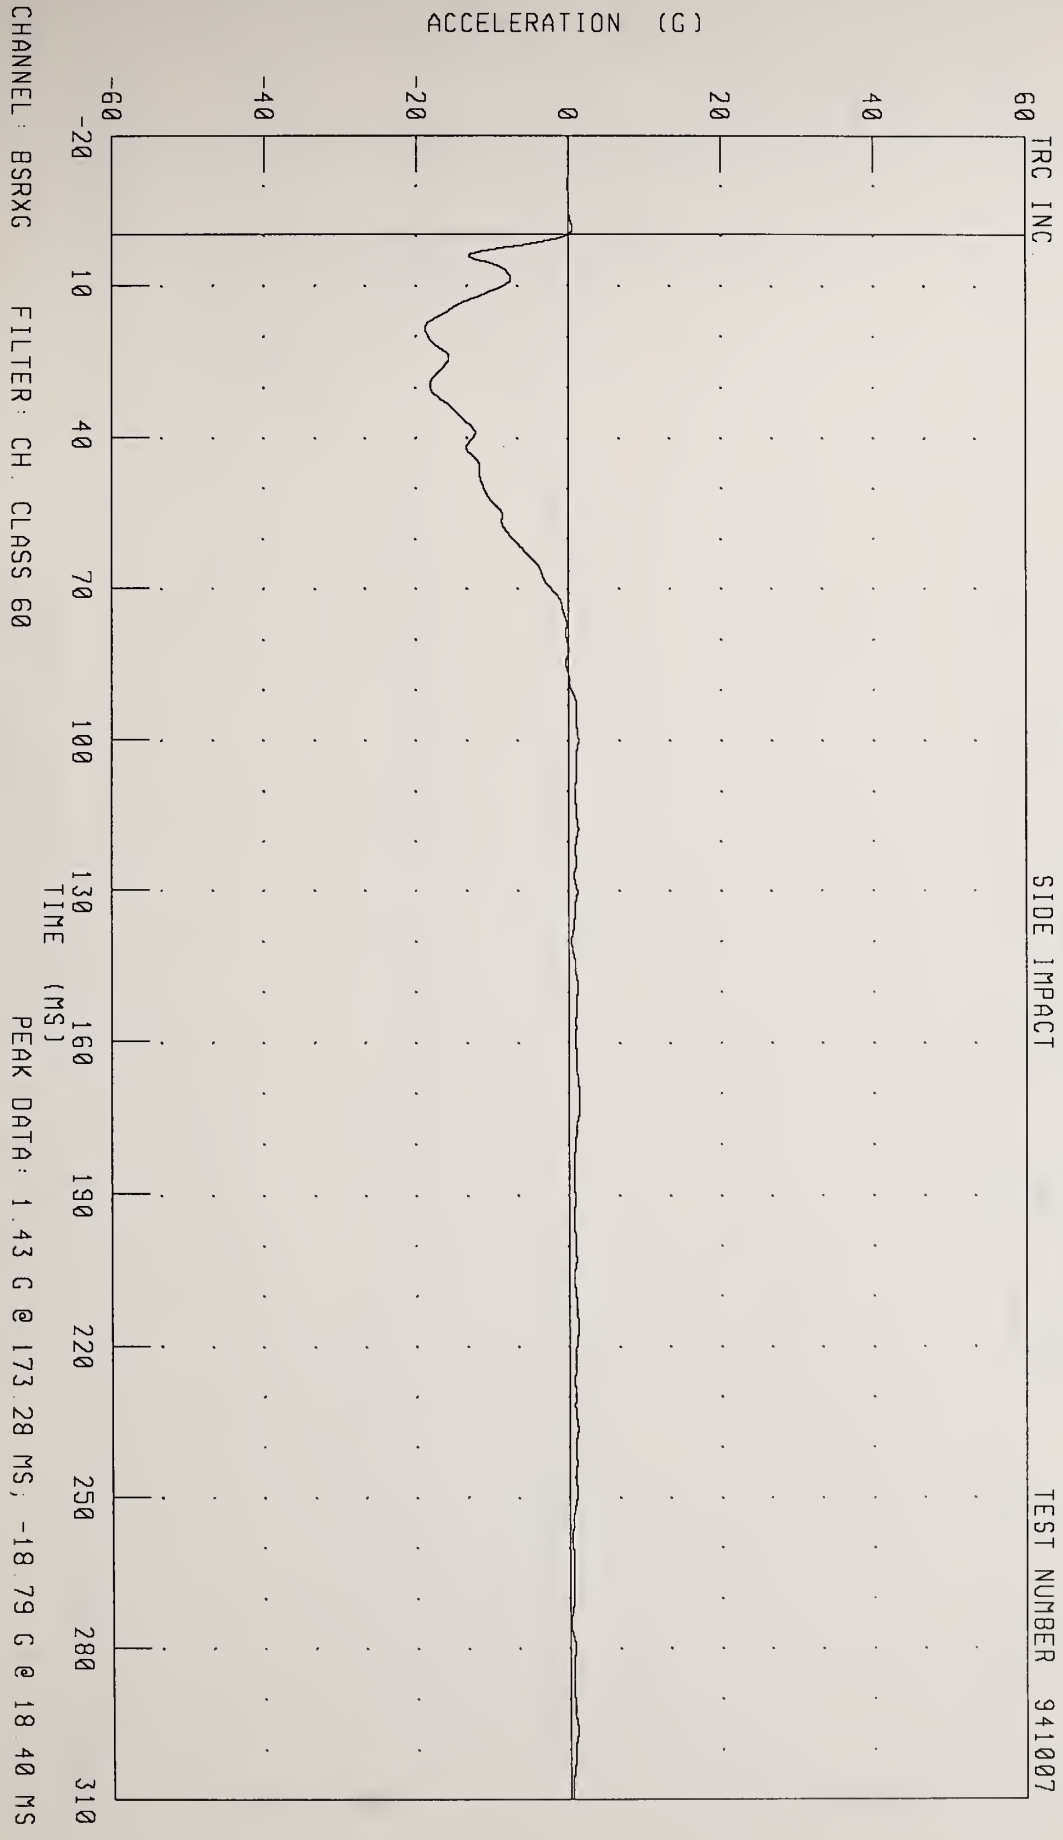


CHANNEL: BSRXG FILTER: CH. CLASS 60

PEAK DATA: 1.43 G @ 173.28 MS, -18.79 G @ 18.40 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR LEFT SIDE RAIL X-AXIS VELOCITY
SIDE IMPACT


TEST NUMBER 941007

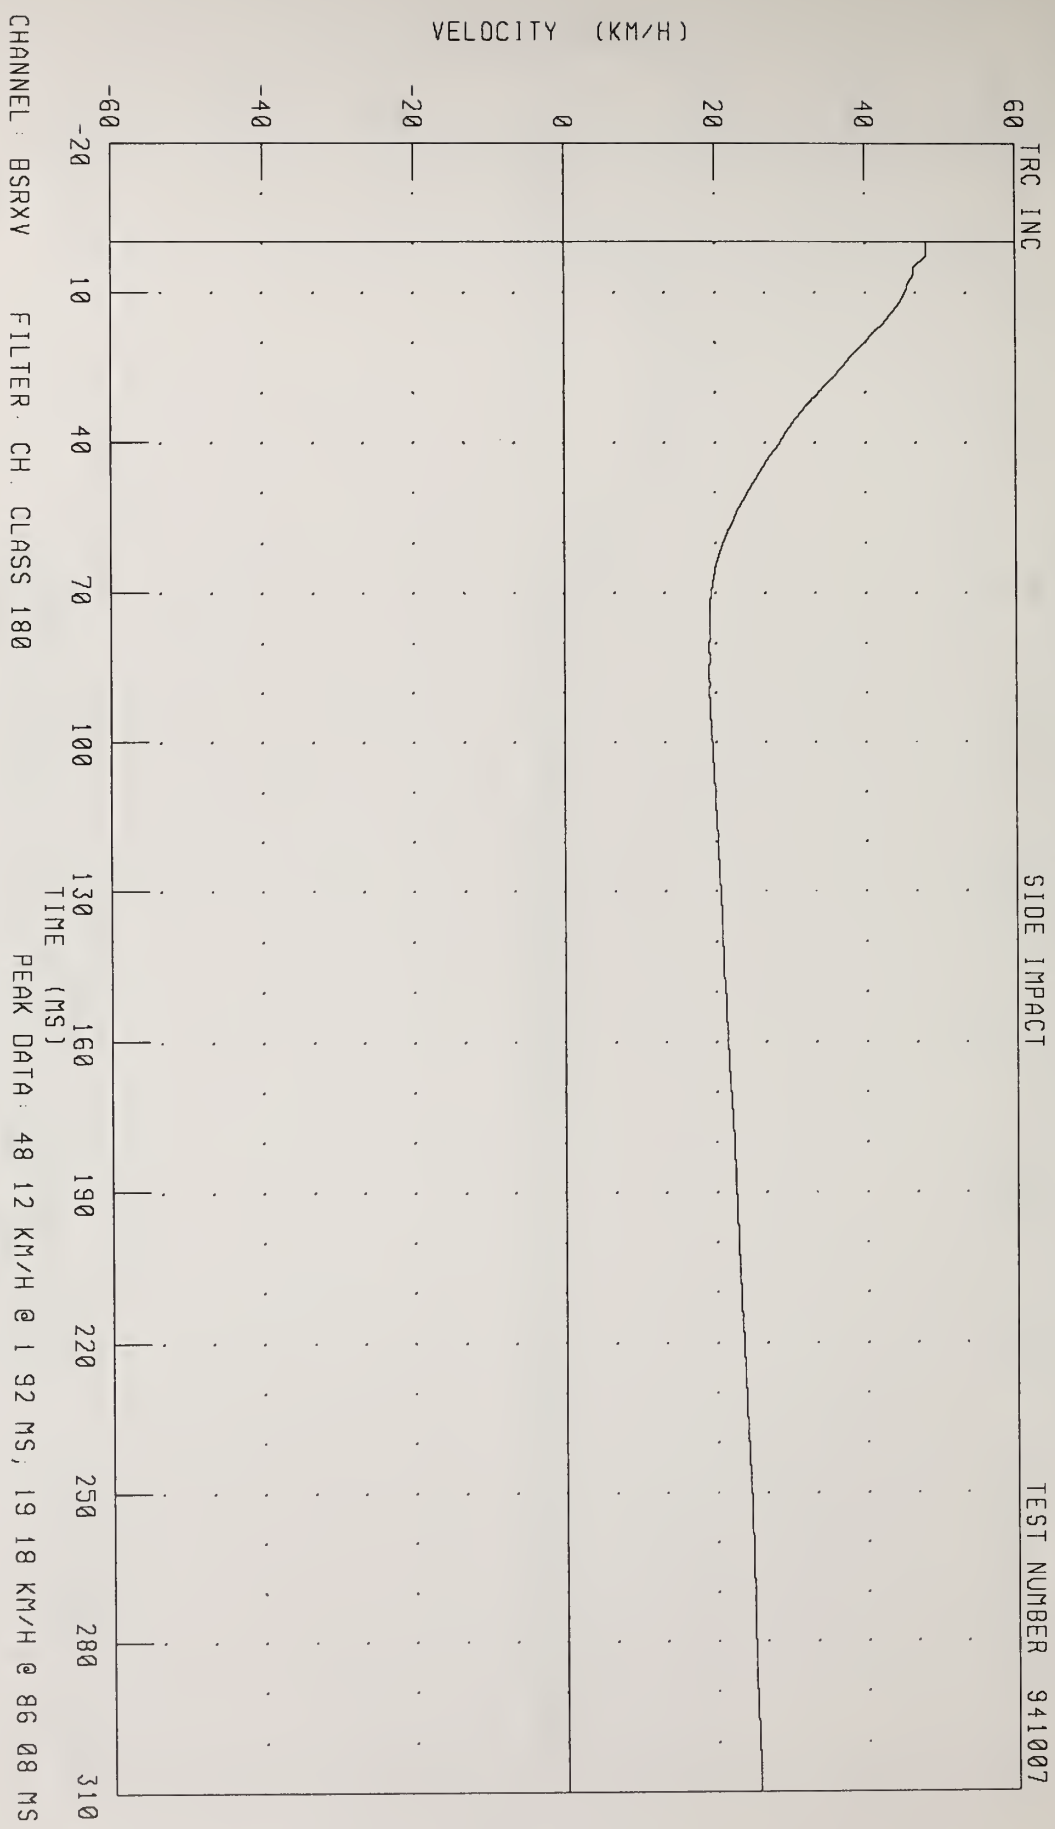

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR LEFT SIDE RAIL X-AXIS DISPLACEMENT

SIDE IMPACT

TEST NUMBER 941007

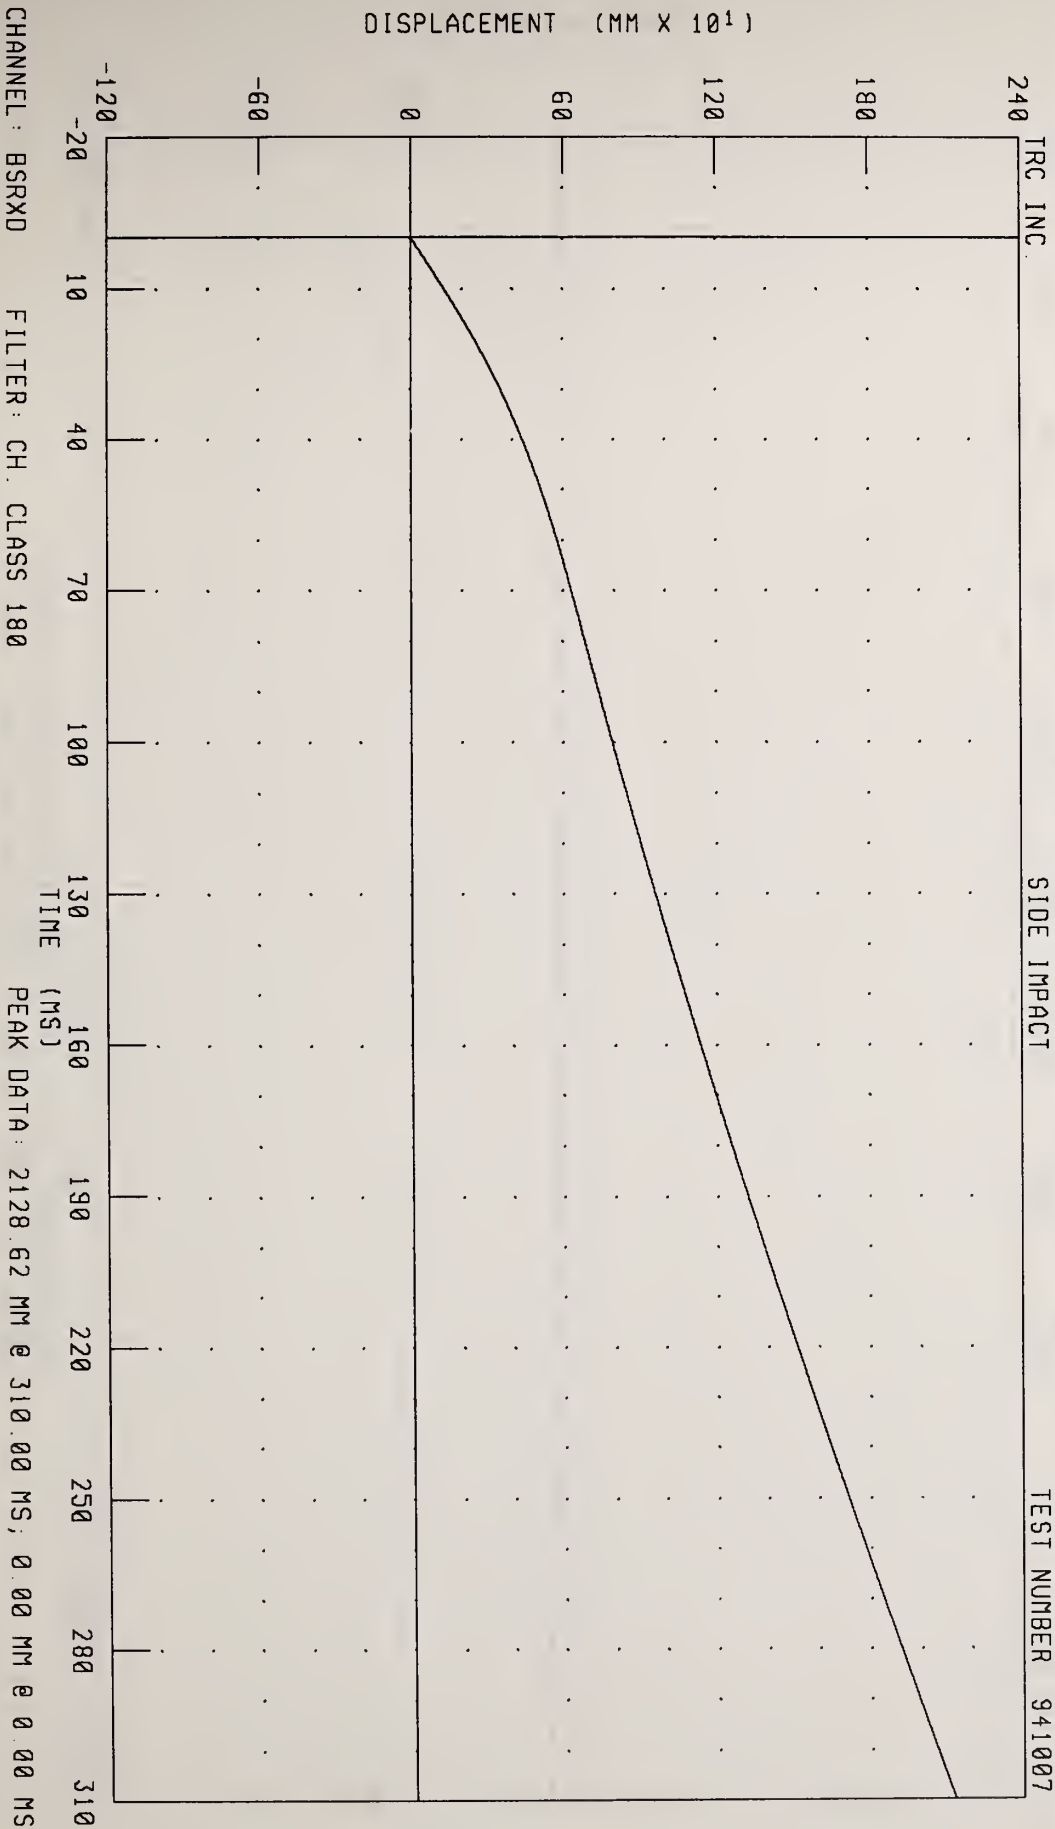


CHANNEL: BSRXD FILTER: CH. CLASS 180 PEAK DATA: 2128.62 MM @ 310.00 MS, 0.00 MM @ 0.00 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR LEFT SIDE RAIL Y-AXIS ACCELERATION
SIDE IMPACT

TRC INC.

TEST NUMBER : 941007

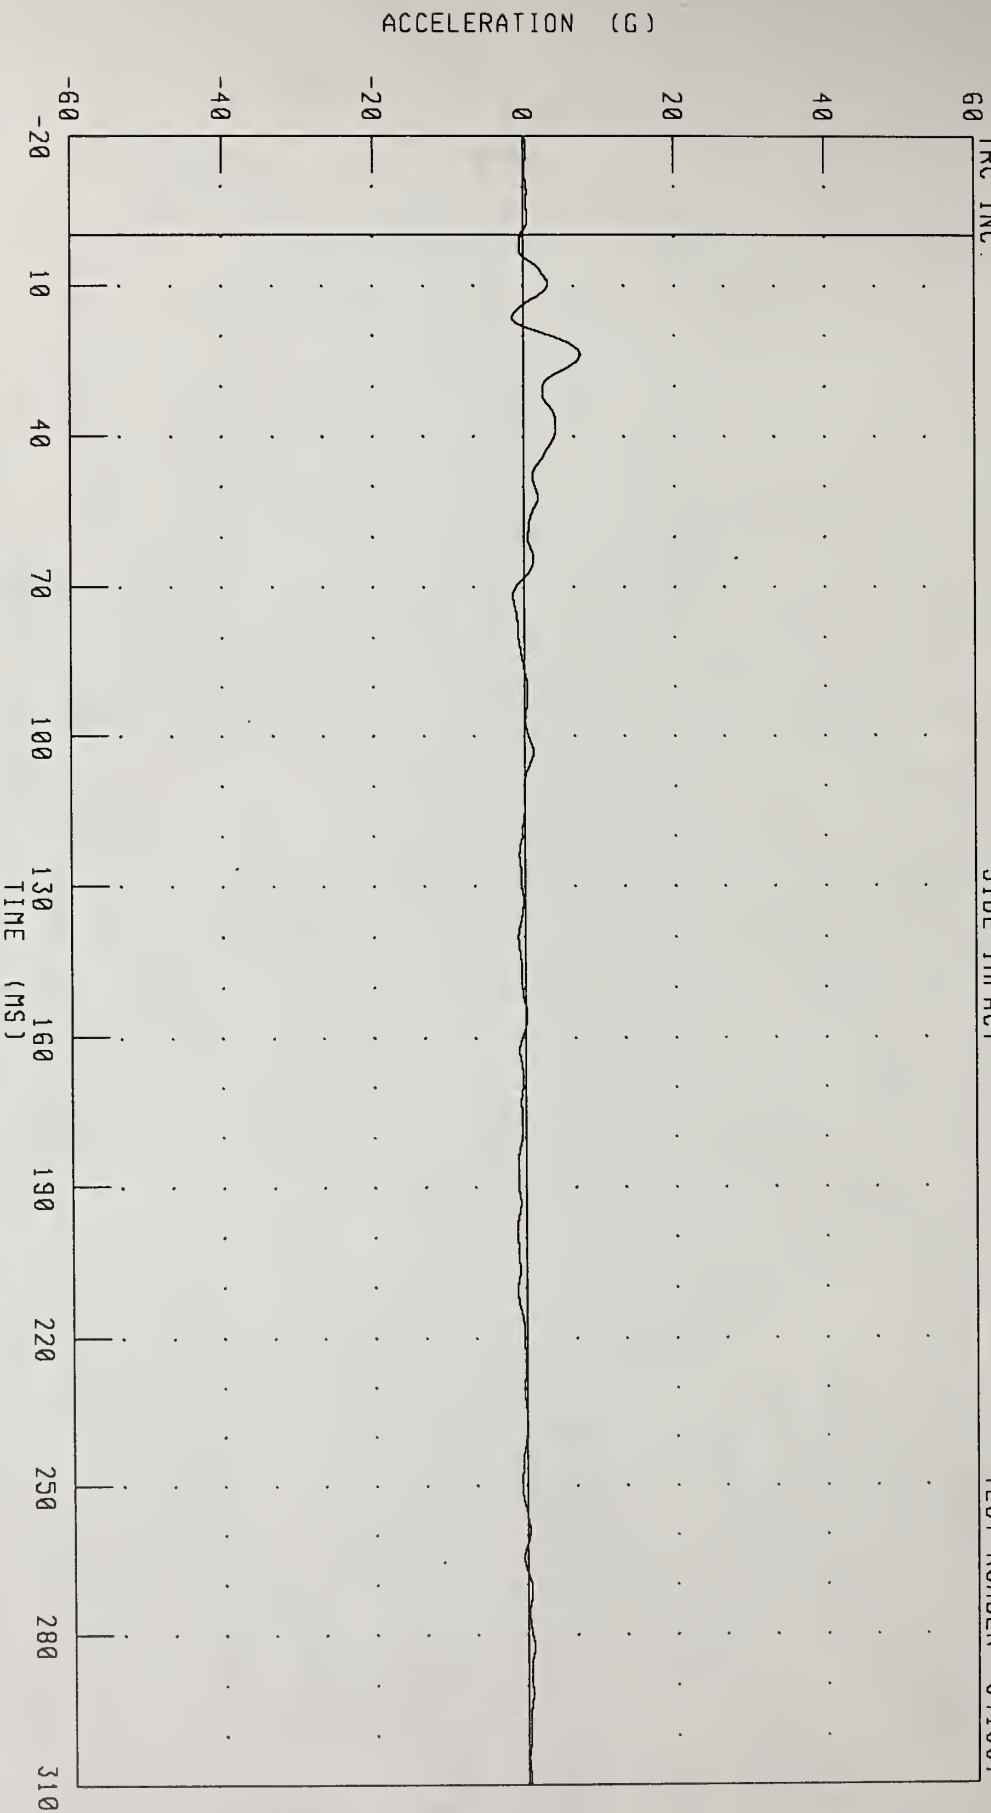


CHANNEL : BSRYG FILTER : CH CLASS 60

PEAK DATA: 7.56 G @ 23.92 MS, -1.46 G @ 16.48 MS

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
 CRABBED IMPACTOR LEFT SIDE RAIL Y-AXIS VELOCITY


SIDE IMPACT

TEST NUMBER 941007

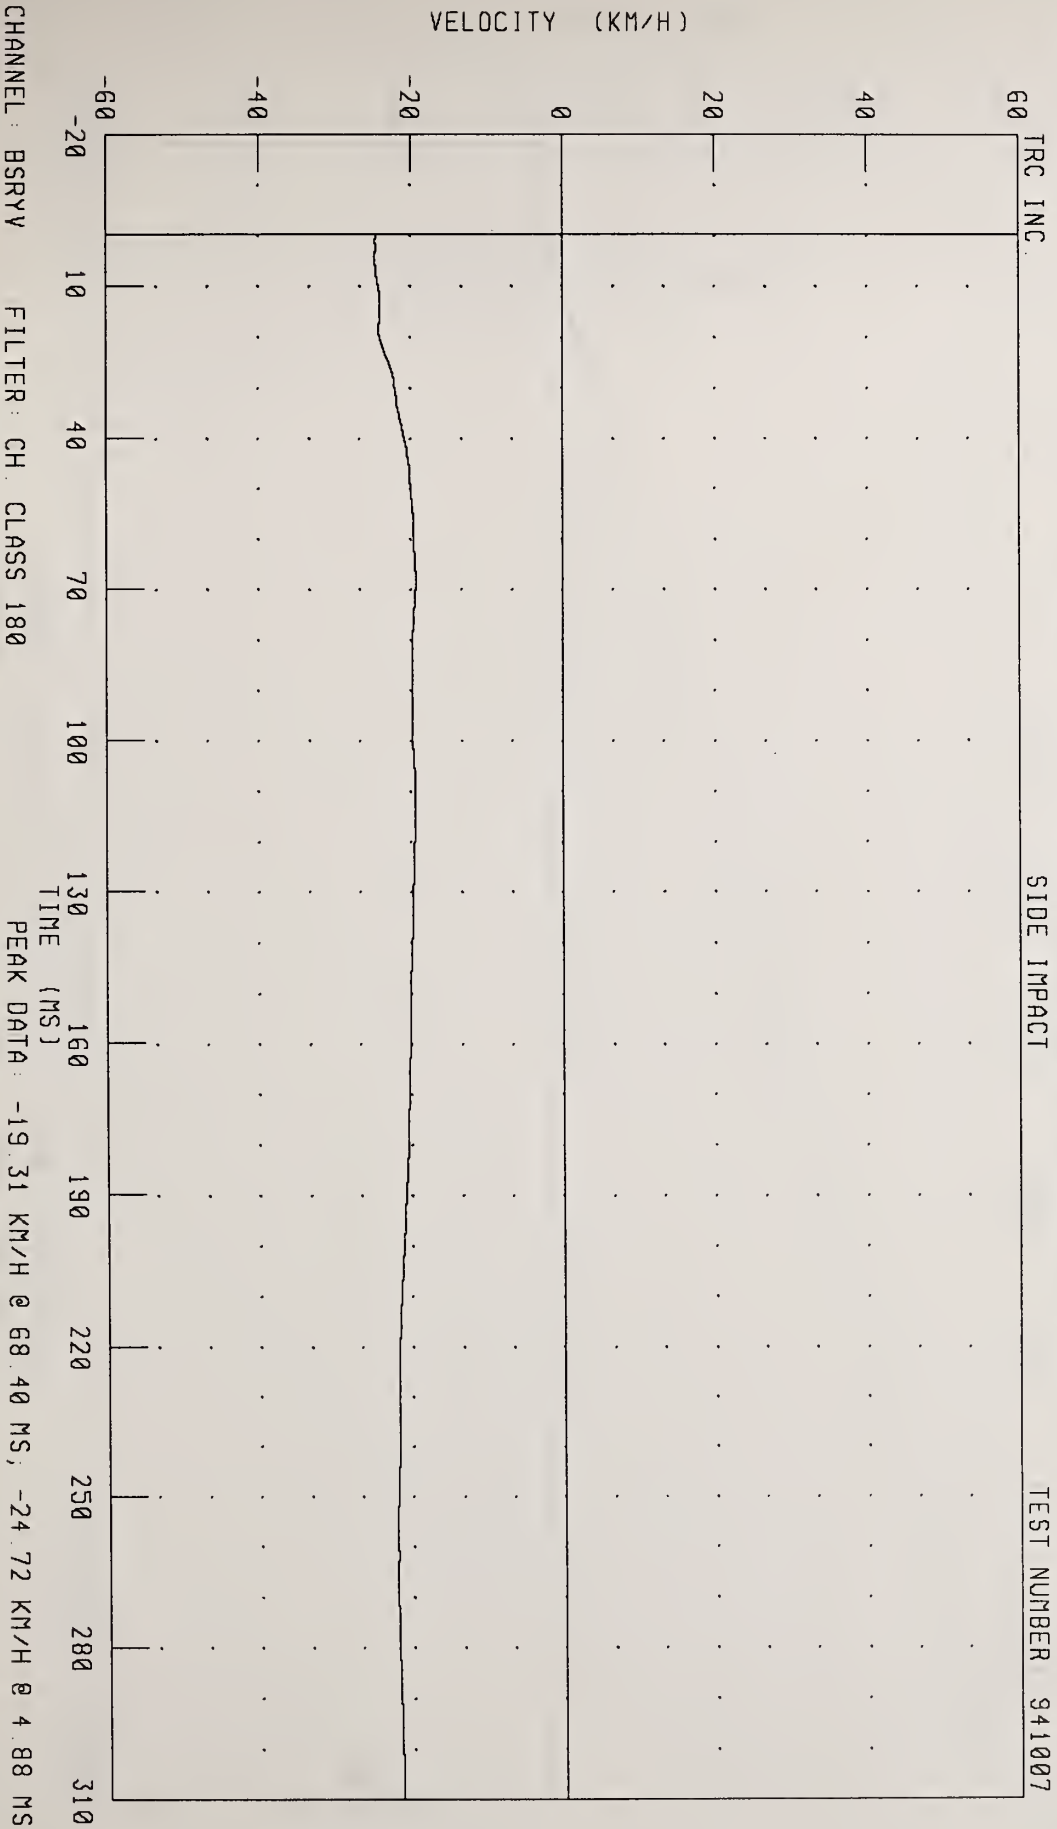

CRABBED IMPACTOR INTO LEFT SIDE OF 1988 FORD TAURUS
CRABBED IMPACTOR LEFT SIDE RAIL Y-AXIS DISPLACEMENT
SIDE IMPACT

TEST NUMBER: 941007

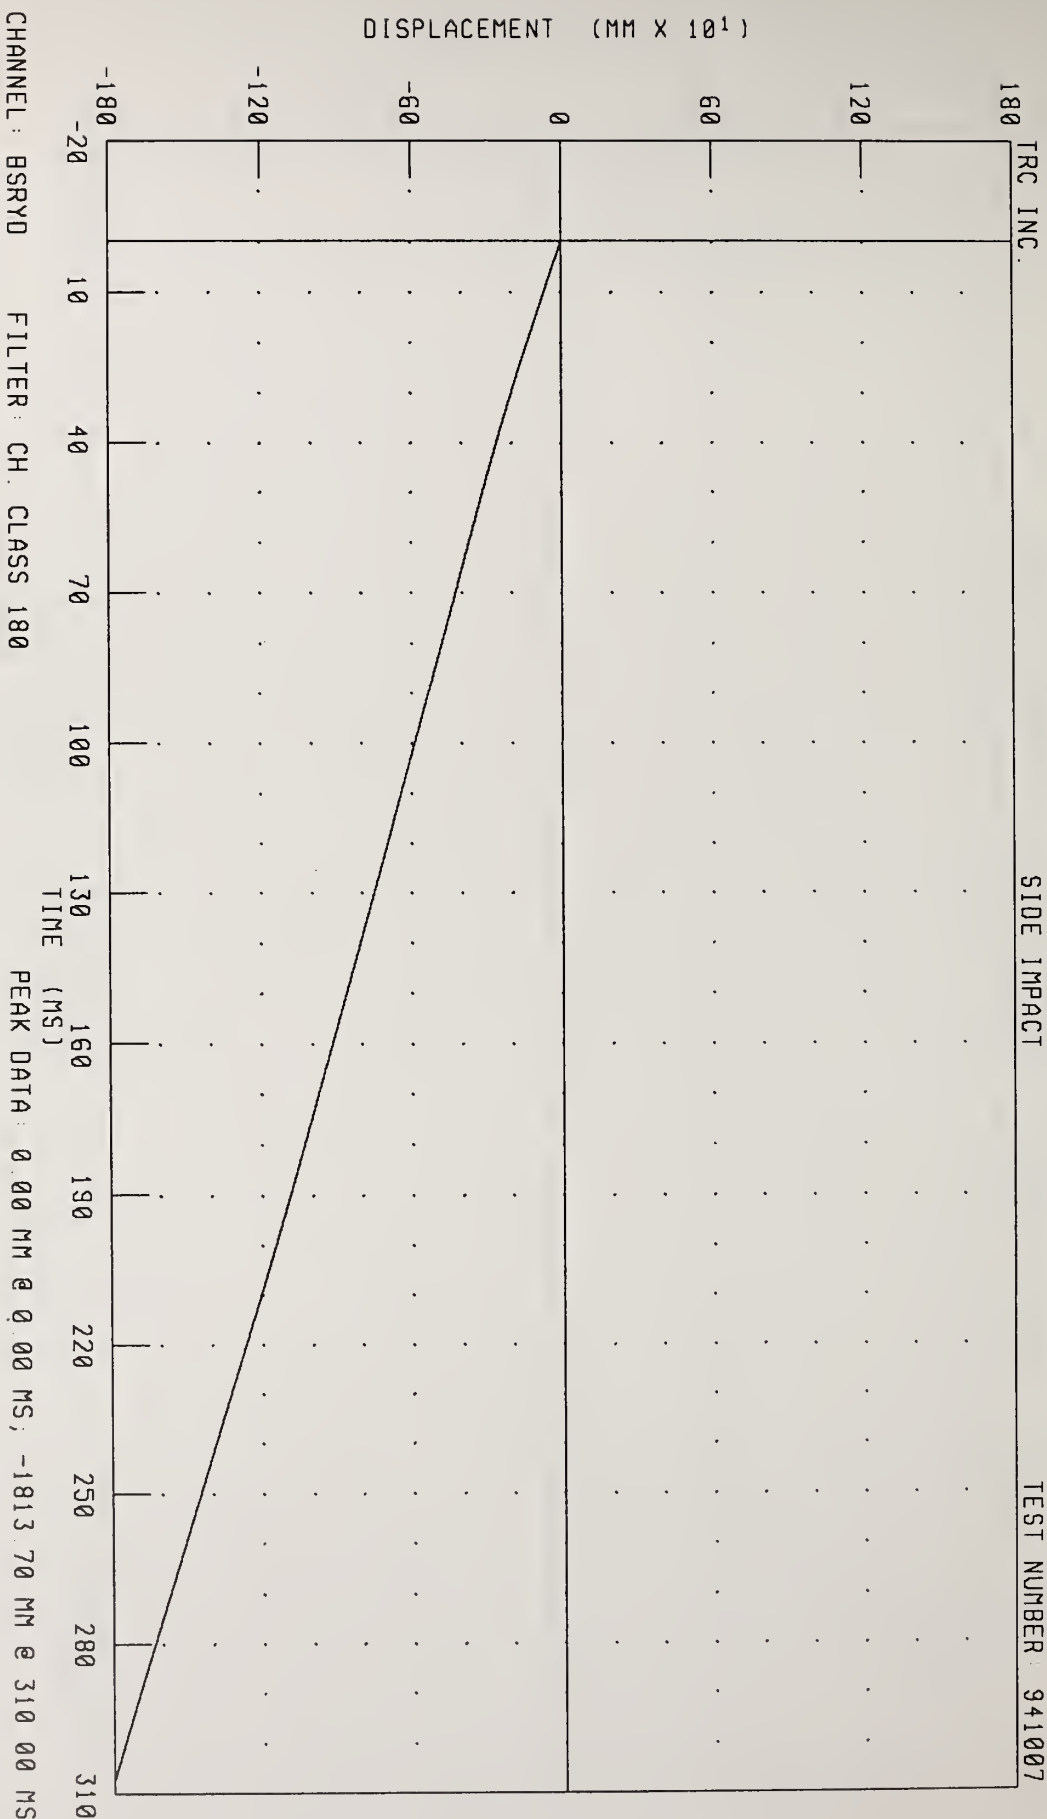


Appendix C

Miscellaneous Test Information



Vehicle Accelerometer Information

No.	Location	Axis	Manufacturer	Model	Serial Number	Orientation (+ Sensing)
1	Vehicle Center of Gravity	X	Endevco	7264	FH41J	Front
		Y	Endevco	7264	CW87H	Left
		Z	Endevco	7264	CJ75H	Up
2	Left Front Sill	X	Endevco	7264	DW12J	Front
		Y	Endevco	7264	CR26HT	Right
3	Right Front Sill	X	Endevco	7264	CH74H	Front
		Y	Endevco	7264	BW77	Left
4	Left Rear Seat	X	Endevco	7264	CP90H	Front
		Y	Endevco	7264	CM27H	Right
5	Right Rear Seat	X	Endevco	7264	AGRF4	Front
		Y	Endevco	7264	DR49JT	Right

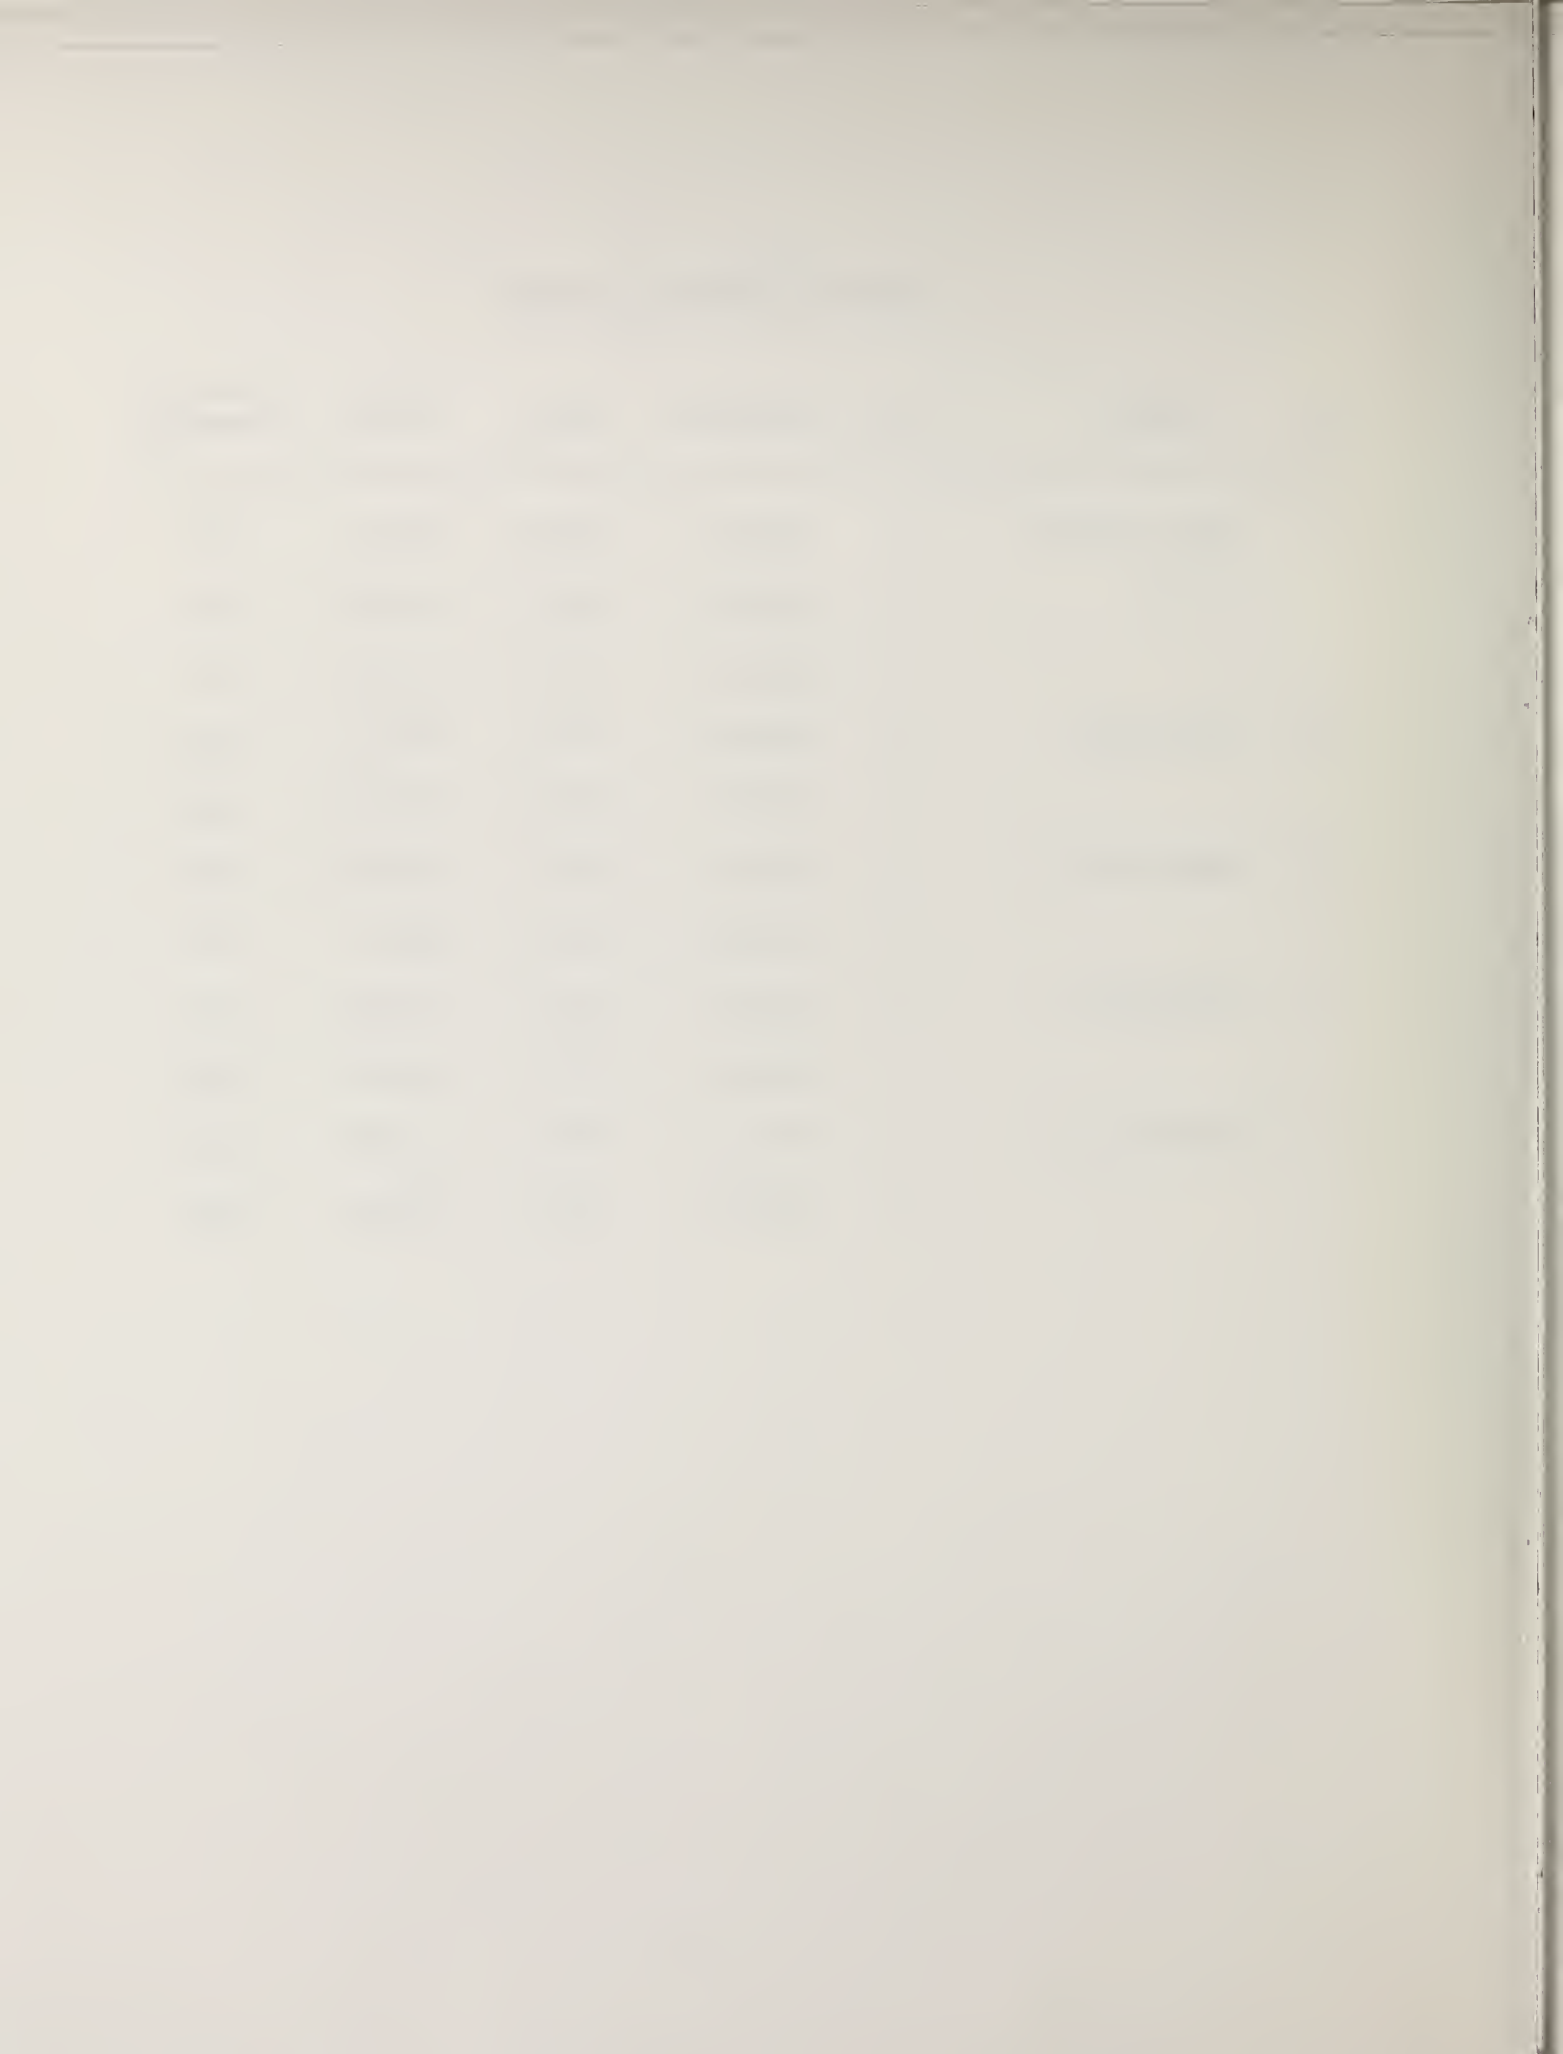

Crabbed Impactor Accelerometer Information

No.	Location	Axis	Manufacturer	Model	Serial Number	Orientation (+ Sensing)
1	Impactor Center of Gravity	X	Endevco	7264	CK65H	Front
		Y	Endevco	7264	CR83H	Left
		Z	Endevco	7264	DK26JT	Up
2	Impactor Left Side Rail	X	Endevco	7264	AT38	Front
		Y	Endevco	7264	BA46	Left

[Faint, illegible title or header text]

[Faint header 1]	[Faint header 2]	[Faint header 3]	[Faint header 4]	[Faint header 5]	[Faint header 6]
[Faint data 1.1]	[Faint data 1.2]	[Faint data 1.3]	[Faint data 1.4]	[Faint data 1.5]	[Faint data 1.6]
[Faint data 2.1]	[Faint data 2.2]	[Faint data 2.3]	[Faint data 2.4]	[Faint data 2.5]	[Faint data 2.6]
[Faint data 3.1]	[Faint data 3.2]	[Faint data 3.3]	[Faint data 3.4]	[Faint data 3.5]	[Faint data 3.6]
[Faint data 4.1]	[Faint data 4.2]	[Faint data 4.3]	[Faint data 4.4]	[Faint data 4.5]	[Faint data 4.6]
[Faint data 5.1]	[Faint data 5.2]	[Faint data 5.3]	[Faint data 5.4]	[Faint data 5.5]	[Faint data 5.6]
[Faint data 6.1]	[Faint data 6.2]	[Faint data 6.3]	[Faint data 6.4]	[Faint data 6.5]	[Faint data 6.6]

Sign Convention

All Dummy, Barrier, And Vehicle Channels:

+X: Forward

+Y: Leftward

+Z: Upward

+Force: Tension

DOT LIBRARY



00302587