



safety

mobility

productivity

USDOT Integrated Corridor Management (ICM) Initiative

Concept of Operations for the I-270 Corridor in Montgomery County, Maryland

March 31, 2008
FHWA-JPO-08-002
EDL Number 14388



U.S. Department of Transportation

Research and Innovative Technology Administration

Federal Transit Administration

Federal Highway Administration

Integrated Corridor Management Program

Maryland I-270 Corridor

Concept of Operations

Stage 1 Final

Submitted to
U.S. Department of Transportation

Submitted by
Maryland Department of Transportation

In association with
Montgomery County
Washington Metropolitan Area Transit Authority
University of Maryland Center for Advanced Transportation Technology

Cooperative Agreement No: DTFH61-06-H-0042

Submission Date: March 31, 2008



Cover Image Credits: Telvent Farradyne Image Library (Bus, Operations Center, Message Sign),
Parsons Brinckerhoff Image Library (MARC Train, Metro Train),
and Google Earth (I-270 Map)

Notice

This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The U.S. Government assumes no liability for the use of the information contained in this document. This report does not constitute a standard, specification, or regulation. The U.S. Government does not endorse products of manufacturers. Trademarks or manufacturers' names appear in this report only because they are considered essential to the objective of the document.

Quality Assurance Statement

The U.S. Department of Transportation (USDOT) provides high-quality information to serve Government, industry, and the public in a manner that promotes public understanding. Standards and policies are used to ensure and maximize the quality, objectivity, utility, and integrity of its information. USDOT periodically reviews quality issues and adjusts its programs and processes to ensure continuous quality improvement.

1. Report No. FHWA-JPO-08-002 EDL Number 14388		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Concept of Operations for the I-270 Corridor in Montgomery County, Maryland			5. Report Date March 31, 2008		
			6. Performing Organization Code		
7. Author(s) Montgomery County Pioneer Site Team			8. Performing Organization Report No.		
9. Performing Organization Name and Address Montgomery County Pioneer Site Team			10. Work Unit No. (TRAIS)		
			11. Contract or Grant No.		
12. Sponsoring Agency Name and Address U.S. Department of Transportation Research and Innovative Technology Administration ITS Joint Program Office 1200 New Jersey Avenue, SE Washington, DC 20590			13. Type of Report and Period Covered		
			14. Sponsoring Agency Code		
15. Supplementary Notes RITA Contact: Brian Cronin FHWA Contact: Dale Thompson FTA Contact: Steve Mortensen					
16. Abstract This document presents the Concept of Operations (ConOps) for an Integrated Corridor Management (ICM) system along the Interstate-270 Corridor in Montgomery County, Maryland. The document offers a user-oriented view of the system concept. It progresses logically from a discussion of characteristics and conditions in the corridor, to an examination of the corridor's transportation operational needs, to identification of an integrated management concept for addressing those needs. It concludes with consideration of a series of operational scenarios. The corridor measures approximately 20 miles in length and consists of a variety of transportation networks, including the Freeway Network (including I-270); the Arterial and Connector Route Network (including MD-355); the MARC Commuter Rail Network; the Metrorail Network; the MTA Commuter Bus Network; the Metrobus Network, and; the Ride On Network.					
17. Key Word ICM, Integrated Corridor Management, Concept of Operations, Con Ops, I-270, Montgomery County, Freeway, Arterial, Transit, Intelligent Transportation Systems, ITS, Parking Facilities, Computer-Aided Dispatch, Automatic Vehicle Location			18. Distribution Statement		
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 126	22. Price

TABLE OF CONTENTS

1. SCOPE AND SUMMARY	5
1.1 INTRODUCTION AND DOCUMENT CONTENTS	5
1.2 ICM CORRIDOR BOUNDARIES, NETWORKS AND STAKEHOLDERS.....	5
1.3 CORRIDOR OPERATING AND INSTITUTIONAL CONDITIONS	7
1.4 NEED AND POTENTIAL FOR INTEGRATED CORRIDOR MANAGEMENT	8
1.5 ICM VISION, GOALS AND OBJECTIVES	10
1.6 ICM OPERATIONAL FRAMEWORK, APPROACHES, AND STRATEGIES.....	12
1.7 ICM CONCEPT OPERATIONAL DESCRIPTION.....	13
1.8 REQUIRED ASSETS AND ICM IMPLEMENTATION ISSUES	14
1.9 I-270 CORRIDOR ICM CONCEPT INSTITUTIONAL FRAMEWORK	16
2. REFERENCES	17
3. EXISTING CORRIDOR SCOPE AND OPERATIONAL CHARACTERISTICS	19
3.1 CORRIDOR BOUNDARIES AND NETWORKS	19
3.2 CORRIDOR STAKEHOLDERS	25
3.3 OPERATIONAL CONDITIONS OF THE I-270 CORRIDOR AND INCLUDED NETWORKS	26
3.4 EXISTING NETWORK-BASED TRANSPORTATION MANAGEMENT/ITS ASSETS	34
3.5 PROPOSED NEAR-TERM NETWORK IMPROVEMENTS	37
3.6 CURRENT NETWORK-BASED INSTITUTIONAL CHARACTERISTICS	43
3.7 REGIONAL ITS ARCHITECTURE REVIEW	46
3.8 CORRIDOR ISSUES AND NEEDS.....	47
3.9 POTENTIAL FOR ICM IN THE I-270 CORRIDOR	49
3.10 I-270 CORRIDOR VISION.....	50
4. ICM SYSTEM OPERATIONAL CONCEPT	51
4.1 CORRIDOR GOALS AND OBJECTIVES.....	51
4.2 ICM FRAMEWORK	55
4.3 ICM APPROACHES.....	56
4.4 APPLICATION OF ICM APPROACHES AND STRATEGIES	59
4.5 ICM CONCEPT ASSET REQUIREMENTS AND NEEDS	63
4.6 COMPARISON OF ICM CONCEPT ASSET REQUIREMENTS WITH CURRENT AND POTENTIAL ASSETS 70	77
4.7 I-270 CORRIDOR CONCEPT OPERATIONAL DESCRIPTION.....	77
4.8 ALIGNMENT WITH REGIONAL ITS ARCHITECTURE	79
4.9 IMPLEMENTATION ISSUES	80
4.10 ICM CORRIDOR INSTITUTIONAL FRAMEWORK	84
4.11 PERFORMANCE MEASURES AND TARGETS	85
5. OPERATIONAL SCENARIOS	91
5.1 DAILY OPERATIONAL SCENARIO	92
5.2 SCHEDULED EVENT SCENARIO	94
5.3 INCIDENT SCENARIO	96
5.4 EVACUATION SCENARIO	102
ICM SUPPLEMENT.....	CONOPS S-1

TABLE OF FIGURES

Figure 3-1. I-270 Montgomery County ICM Corridor	20
Figure 3-2. I-270 ICM Corridor Detector Locations	21
Figure 3-3. I-270 ICM Corridor HAR, DMS, CCTV, and RWIS Locations	22
Figure 3-4. Map of the MARC Brunswick Line	30
Figure 3-5: The Metrorail Network	31

LIST OF TABLES

Table 1-1. I-270 Corridor Stakeholders	6
Table 1-2. Critical Needs of the I-270 Corridor	9
Table 1-3. I-270/Montgomery County Corridor Goals and Objectives for ICM	11
Table 1-4. Proposed ICM Approaches and Strategies for the I-270 Corridor	12
Table 1-5. Additional Required Assets for ICM Implementation	14
Table 3-1. I-270 Corridor Network Characteristics	23
Table 3-2. I-270 Corridor Stakeholders	25
Table 3-3. Average Annual Daily Traffic and Level of Service on I-270	26
Table 3-4. MD-355 Average Annual Daily Traffic	27
Table 3-5. Connector Route Annual Average Daily Traffic	28
Table 3-6. Average Metrorail Weekday Ridership in the I-270 Corridor	32
Table 3-7. Metrobus Average Weekday Boardings per Trip	32
Table 3-8. Average Weekday Ridership on Selected Ride On Routes	33
Table 3-9. Network-Based Transportation Management/ITS Assets	34
Table 3-10. I-270 Corridor Critical Needs	47
Table 4-1. I-270/Montgomery County Corridor Goals and Objectives for ICM	51
Table 4-2. Relationship Between I-270 ICM Corridor Needs and Goals	53
Table 4-3. Proposed ICM Approaches and Strategies for the I-270 Corridor	59
Table 4-4. Relationship between I-270 ICM Operational Strategies and Corridor Goals	60
Table 4-5. I-270 Corridor Market Packages	63
Table 4-6. I-270 Corridor Communications Infrastructure	64
Table 4-7. I-270 Corridor Asset Requirements	65
Table 4-8. I-270 Corridor Market Packages	70
Table 4-9. I-270 Corridor Communications Infrastructure	71
Table 4-10. I-270 Corridor Asset Requirements	72
Table 4-11. Summary of Significant Changes and Additions to the I-270 Corridor	76
Table 4-12. I-270 ICM Implementation Issues	80
Table 4-13. I-270 ICM Baseline Performance Measures and Targets	85
Table 4-14. Sample Potential Performance Measure Targets	87
Table 5-1. Daily Operational Scenario	93
Table 5-2. Scheduled Event Scenario	94
Table 5-3. Minor Traffic Incident Scenario	97

Table 5-4. Major Traffic Incident Scenario	100
Table 5-5. Evacuation Scenario	103
Table S-1 Updated I-270 Corridor Needs	S-3

1. SCOPE AND SUMMARY

1.1 INTRODUCTION AND DOCUMENT CONTENTS

This document presents the Concept of Operations (ConOps) for an Integrated Corridor Management (ICM) system along the Interstate-270 Corridor in Montgomery County, Maryland. The document offers a user-oriented view of the system concept. It progresses logically from a discussion of characteristics and conditions in the corridor, to an examination of the corridor's transportation operational needs, to identification of an integrated management concept for addressing those needs. It concludes with consideration of a series of operational scenarios.

The ConOps is comprised of these major sections:

- Scope and Summary,
- References,
- Existing Corridor Scope and Operational Characteristics,
- ICM System Operational Concept, and
- Operational Scenarios.

This document was prepared jointly for the Federal Highway Administration and Federal Transit Administration, under the Integrated Corridor Management Program (Cooperative Agreement No. DTFH61-06-H-00042). It was prepared by the Maryland Department of Transportation in association with Montgomery County and the Washington Metropolitan Area Transit Authority. The University of Maryland's Center for Advanced Transportation Technology and Telvent Farradyne Inc. assisted with the preparation of this report.

1.2 ICM CORRIDOR BOUNDARIES, NETWORKS AND STAKEHOLDERS

The I-270 Corridor is located in Montgomery County, Maryland just outside Washington, D.C. The corridor measures approximately 20 miles in length and consists of a variety of transportation networks, including:


- The Freeway Network (including I-270),
- The Arterial and Connector Route Network (including MD-355),
- The MARC Commuter Rail Network,
- The Metrorail Network,
- The MTA Commuter Bus Network,
- The Metrobus Network, and
- The Ride On Network.

A map of the I-270/Montgomery County Corridor is presented in

I-270 Montgomery County ICM Corridor

LEGEND

- METROBUS STATION
- MARYLAND RAIL COMMUTER (MARC) STATION
- PUBLIC LIBRARY
- PARK 'N' RIDE LOT
- RIDE-ON ROUTE
- METROBUS OR OTHER OPERATOR ROUTE
- INTERSTATE HIGHWAY
- US HIGHWAY
- MARYLAND STATE HIGHWAY
- MARC TRAIN SERVICE
- ALL DAY SERVICE ROUTE
- RUSH HOURS ONLY ROUTE
- MIDDAY SERVICE ROUTE
- ROUTE TERMINAL
- METROBUS RED LINE
- METROBUS GREEN LINE
- HIKER-HIKER TRAIL

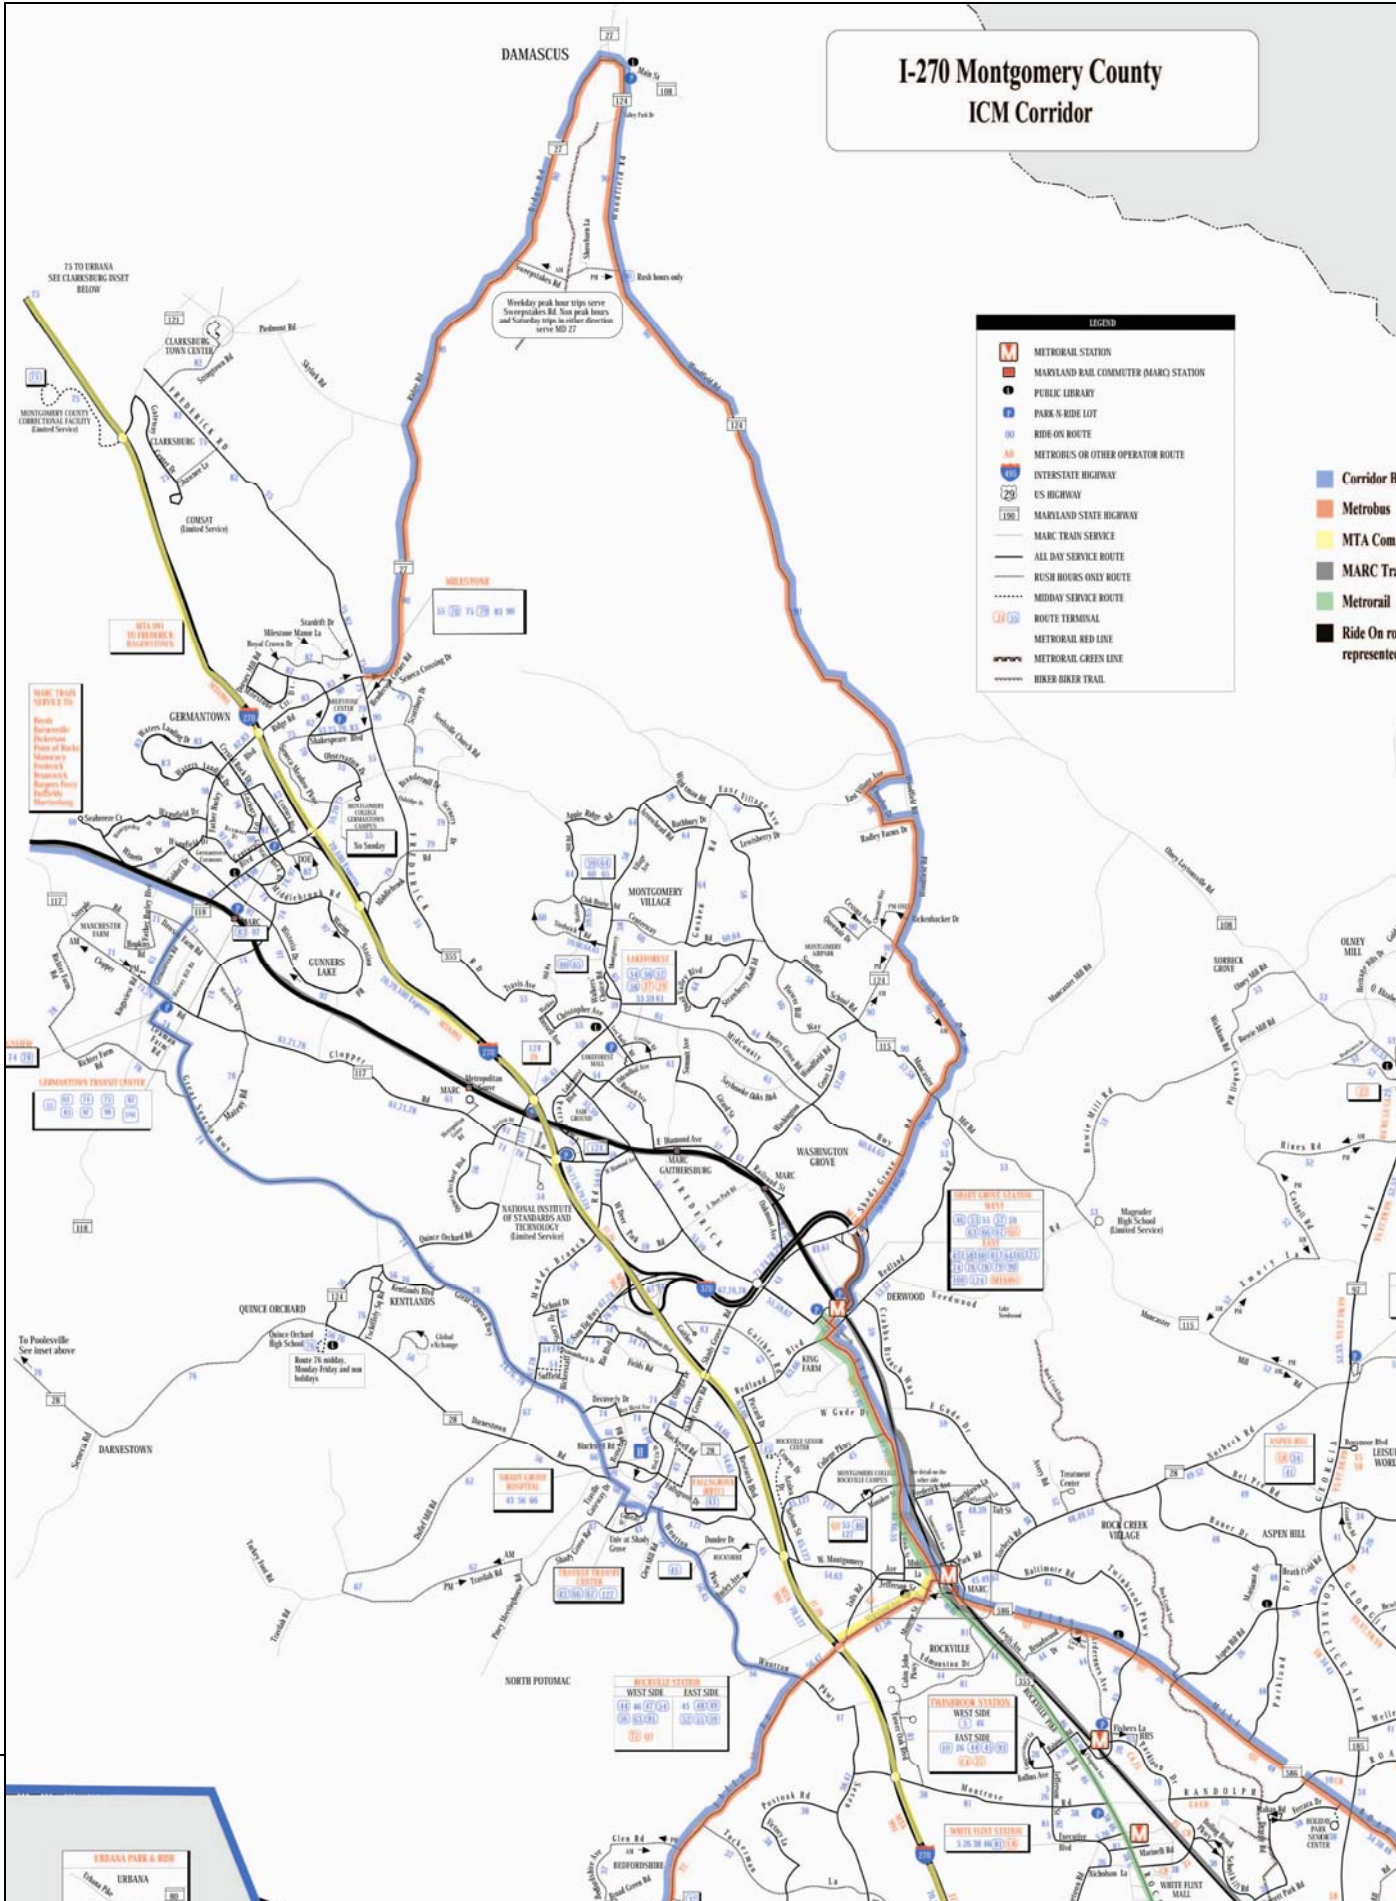

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

MONTGOMERY COUNTY
CORRECTIONAL FACILITY
Limited Service

GAITHERSBURG
MONTGOMERY COUNTY
CORRECTIONAL FACILITY
Limited Service

GERMANTOWN TRANSIT CENTER

To Poolesville
See inset above

URBANA PARK & RIDE
URBANA

DAMASCUS

MIDDLEBURY

NORTH POTOMAC

LEGEND

- METROBUS STATION
- MARYLAND RAIL COMMUTER (MARC) STATION
- PUBLIC LIBRARY
- PARK 'N' RIDE LOT
- RIDE-ON ROUTE
- METROBUS OR OTHER OPERATOR ROUTE
- INTERSTATE HIGHWAY
- US HIGHWAY
- MARYLAND STATE HIGHWAY
- MARC TRAIN SERVICE
- ALL DAY SERVICE ROUTE
- RUSH HOURS ONLY ROUTE
- MIDDAY SERVICE ROUTE
- ROUTE TERMINAL
- METROBUS RED LINE
- METROBUS GREEN LINE
- HIKER-HIKER TRAIL

Corridor R
Metrobus
MTA Com
MARC Tr
Metrorail
Ride On ro
represent

DAMASCUS

MIDDLEBURY

NORTH POTOMAC

LEGEND

- METROBUS STATION
- MARYLAND RAIL COMMUTER (MARC) STATION
- PUBLIC LIBRARY
- PARK 'N' RIDE LOT
- RIDE-ON ROUTE
- METROBUS OR OTHER OPERATOR ROUTE
- INTERSTATE HIGHWAY
- US HIGHWAY
- MARYLAND STATE HIGHWAY
- MARC TRAIN SERVICE
- ALL DAY SERVICE ROUTE
- RUSH HOURS ONLY ROUTE
- MIDDAY SERVICE ROUTE
- ROUTE TERMINAL
- METROBUS RED LINE
- METROBUS GREEN LINE
- HIKER-HIKER TRAIL

Corridor R
Metrobus
MTA Com
MARC Tr
Metrorail
Ride On ro
represent

Figure 3-1 (see Section 3.1). The major boundaries of the corridor include the following:

- Northern Boundary — The Frederick County/Montgomery County Line;
- Southern Boundary — I-495 (Capital Beltway);
- Western Boundary — South to north: River Road, Falls Road, Wooten Parkway, Great Seneca Highway, and the MARC Brunswick Line; and
- Eastern Boundary — South to north: Viers Mill Road, MD-355, Shady Grove Road, Airpark Road, and Woodfield Road.

The corridor is part of the broader Metropolitan Washington Council of Governments (MWCOG) region.

Key stakeholders in the I-270 Corridor are identified in Table 1-1, below:

Table 1-1. I-270 Corridor Stakeholders

Partnering Agencies

Agencies partnering for Phase I of the U.S. DOT’s Discretionary Cooperative Agreement for Integrated Corridor Management include:

- Federal Highway Administration (FHWA)
- Federal Transit Administration (FTA)
- Maryland State Highway Administration (MDSHA)
- Maryland Transit Administration (MTA)
- Montgomery County Department of Public Works and Transportation
- The University of Maryland (UMD)
- Washington Metropolitan Area Transit Authority (WMATA)

Stakeholders

Other agencies with a stake in the outcome of the U.S. DOT’s Discretionary Cooperative Agreement for Integrated Corridor Management of the I-270 Corridor include:

- Bethesda
- City of Gaithersburg
- City of Rockville
- Commercial Vehicle Companies
- CSX Rail
- Event Promoters
- Federal Emergency Management Agency
- Frederick County Department of Public Works and Transportation
- General Public
- Maryland Emergency Management Agency (MEMA)
- Maryland State Police (MSP)

- Maryland Transportation Authority (MdTA)
- Metro Transit Police
- Montgomery County Police
- Montgomery County Fire and EMS
- Montgomery County School Districts
- National Capital Region Transportation Planning Board
- North Bethesda Transportation Management District
- Private Sector Information Service Providers
- Regional Media Outlets
- Towing Industry
- University of Maryland Center for Advanced Transportation Technology
- Virginia Department of Transportation (VDOT)

1.3 CORRIDOR OPERATING AND INSTITUTIONAL CONDITIONS

The I-270 Corridor, also referred to as the Technology Corridor, links significant suburban residential concentrations with the major employment regions of Northern Virginia, downtown Washington, D.C., the Capital Beltway, and along the I-270 Corridor itself. As with most urban areas in the United States, the trend in the Metropolitan Washington, D.C. area has been that development expands outward from the city. However, most commuters in the I-270 Corridor are not heading into Downtown Washington, but to other suburban locations. Because of high-traffic volumes in the corridor, and the impact that incidents even outside the corridor can have on I-270 conditions, congestion has become a monumental problem.

Some of the current operating conditions in the I-270 Corridor are:

- The interstate highway, I-270, runs at full capacity during peak hours.
- The only viable alternative paralleling I-270 is MD-355.
- The Maryland Transit Administration (MTA) provides commuter rail service (MARC) along the I-270. The MARC Brunswick Line serves approximately 2,524 riders during the AM peak and a total of 5,047 riders daily, operating only in peak periods, in the peak direction.
- The WMATA Metrorail Red Line serves commuters in the I-270 Corridor. The Red Line is WMATA's busiest line. Morning peak travel moves predominantly in the direction of downtown Washington, D.C., whereas the afternoon peak moves from Washington towards the Maryland suburbs.
- WMATA's Metrobus provides the much needed east-west link within the I-270 Corridor. Montgomery County runs the Ride On system within the corridor. There is opportunity to add ridership to these bus services.
- The agencies with formal responsibility for operating one or more networks within the I-270 Corridor are:

- Maryland State Highway Administration (MDSHA) — Management of the freeway network and Park-n-Ride facilities along I-270.
- Montgomery County Department of Public Works and Transportation (DPWT) — Management of the county’s arterial network, as well as the Ride On bus service.
- Maryland Transit Administration (MTA) — Operation of MARC train service.
- Washington Metropolitan Area Transit Authority (WMATA) — Operation of Metrorail and Metrobus, and managing parking facilities at stations.
- Maryland State Police — Enforcement, security, and accident investigations on freeways.
- Montgomery County Police — Enforcement, security, and accident investigations on Montgomery County arterials.
- City of Rockville — Management of the arterial network in Rockville.
- City of Gaithersburg – Management of the arterial network in Gaithersburg.
- University of Maryland’s Center for Advanced Transportation Technology (CATT) — Maintenance and operation of the Regional Integrated Transportation Information System (RITIS) prototype.

The partner agencies involved in the Montgomery County I-270 Integrated Corridor Management initiative are represented on the National Capital Region Transportation Planning Board (NCR/TPB), which is the federally-designated metropolitan planning organization (MPO) for the region.

1.4 NEED AND POTENTIAL FOR INTEGRATED CORRIDOR MANAGEMENT

The I-270 the corridor is highly directional and connects most commuters with their work place locations, either in Washington D.C., Northern Virginia, Maryland, or within Montgomery County itself. During rush hour, the commuter volume routinely exceeds capacity. In addition, unplanned events, such as incidents within or outside the corridor, can impact the transportation system, producing large-scale travel delays, secondary incidents, etc. There is a need to expand corridor-wide information sharing to help disseminate reliable and real-time traveler information to the commuters.

The other modes available to the commuters in the corridor are the MARC commuter train, WMATA Metro Rail and bus system and the Montgomery County Ride On bus system. The MARC commuter train makes only eight stops in the corridor. The Metrorail system has many stops serving many commuters, but only extends to Shady Grove, which is roughly halfway down the corridor. Many commuters using Metrorail must either park and ride at the station or take Ride On or Metrobus to the rail stations, thus adding more time to their commutes.

The critical needs of the corridor are summarized in Table 1-2, below.

Table 1-2. Critical Needs of the I-270 Corridor

<p>Incident and Emergency Management</p>
<p>Issue: Non-recurring congestion is a monumental impediment to mobility in the corridor.</p> <p>Needs:</p> <ul style="list-style-type: none"> ● Stakeholder agencies — both highway and transit — need clearly articulated roles, responsibilities, and procedures for coordinated management and response to incidents and conditions in the corridor. ● Agencies need concrete plans for diverting traffic from freeways to arterials. ● Agencies need innovative, synergistic, and multi-modal approaches to managing incidents and congestion. ● Agencies need to detect and verify incidents quickly and efficiently. ● Agencies need mechanisms and procedures for sharing information on incidents and conditions. ● Agencies need tools and procedures that optimize operational decision-making. ● Agencies need metrics for measuring and assessing performance and conditions in the corridor, both on freeways and arterials.
<p>Traffic Signals</p>
<p>Issue: Traffic signals in the corridor are often not optimized for conditions.</p> <p>Needs:</p> <ul style="list-style-type: none"> ● Traffic signals on arterials along the corridor need to be able to respond instantly to changing traffic conditions. ● Traffic signals need to be able to respond to changing conditions both on the affected arterials and adjacent roadways, including I-270. ● Before signal systems are modified, determination is needed regarding optimal signalized responses under alternative scenarios. ● Traffic signal prioritization for emergency vehicles is desirable.
<p>Transit and Commuter Management</p>
<p>Issue: Transit services in the corridor are often inconvenient for rush-hour commuters.</p> <p>Needs:</p> <ul style="list-style-type: none"> ● Commuters need reliable transit information and services. ● Commuters need on-demand access to rail/bus schedules and rail/bus real-time status. ● Commuters need on-demand access to information comparing travel times by automobile and transit in real-time.

- Commuters need to know where available parking spaces in commuter lots are located.
- Commuters need easy and convenient access from commuter lots to Metrorail and MARC stations.
- An infrastructure that encourages unplanned automobile commuter shifts to transit, when conditions warrant, is desirable.
- Commuters desire broader, more integrated usage of “smartcards” in the corridor.
- Use of HOV lanes needs to be made easier and more convenient.

Traveler Information

Issue:

Travelers often do not have sufficient information about roadway, traffic, and transit conditions to make informed travel decisions.

Needs:

- Travelers need access to accurate, reliable, and multi-modal travel information, both pre-trip and en-route.
- Travelers need travel conditions information in sufficient detail that they can make “smart” decisions about staying the course, selecting alternate routes, shifting travel modes, skipping or postponing travel, etc.
- Travelers need information about alternative routes/modes when conditions so dictate.

Infrastructure

Issue:

Infrastructure limitations sometimes impair responsiveness to changing traffic and congestion conditions.

Needs:

- Expanded detection and verification capabilities are needed across all transportation networks.
- Expanded capabilities are needed to deliver traveler information to customers.
- Partner agencies need to be able to assess corridor-specific performance.

1.5 ICM VISION, GOALS AND OBJECTIVES

Vision: In the future, transportation operations within the I-270/Montgomery County corridor function at peak efficiency by optimizing the use of the capacities of the different transportation modes within the corridor. Key technology systems and decision support tools within the corridor are interoperable and real-time information on road and traffic conditions is commonly exchanged among the corridor’s managing partners and stakeholders. Operational strategies within the corridor are routinely adjusted in response to changing corridor conditions. Strategic management of the corridor emphasizes multi-modalism, and commuters have flexible access to real-time transit and parking lot information. Travelers are apprised of current road surface, traffic, and transit conditions — pre-trip and en-route; this information is then used to make informed travel and routing decisions. Performance metrics are employed across the corridor to

assess variations in efficiency and safety benchmarks, refine the existing approaches, and formulate and deploy follow-on operational strategies.

To further this vision, four ICM goals have been identified:

- Optimize mobility, reliability, and safety;
- Strengthen corridor-level decision support;
- Enhance reliable, real-time information to customers; and
- Promote multi-modalism.

Table 1-3, below, specifies the objectives associated with each goal.

Table 1-3. I-270/Montgomery County Corridor Goals and Objectives for ICM

Goals	Objectives
<p>Optimize Mobility, Reliability, and Safety: Achieve the highest practical levels of mobility through the corridor. Maximize mobility and minimize delays associated with incidents and other non-recurring conditions. Make the travel experience more predictable and reliable so that day-to-day fluctuations in travel times are less extreme. Optimized performance, with less volatility and reduced exposure to adverse conditions, will affirmatively impact safety.</p>	<ul style="list-style-type: none"> • Reduce overall trip and person travel-time. • Improve travel predictability and reliability. • Lessen the probability of secondary crashes by responding expeditiously to incidents. • Maximize inter-modal activity. • Empower customers to make intelligent travel choices. • Measure, monitor, and assess performance.
<p>Strengthen Corridor-Level Decision Support: Upgrade the information-exchange infrastructure to more quickly put more comprehensive, fact-based information on incidents and roadway conditions in the hands of responders, traffic managers, and other stakeholders. Furnish tools that support adept decision making resulting in faster response and clearance.</p>	<ul style="list-style-type: none"> • Optimize identification of incidents and adverse conditions. • Enhance the exchange of accurate, timely information among partners. • Emphasize corridor management and decision-making based on data and factual circumstances. • Improve rapid response to changing traffic, incident, and weather conditions.
<p>Enhance Reliable, Real-Time Information to Customers: The precepts here are two-fold: (1) travelers deserve to be informed about roadway/transit conditions and circumstances; and (2) as travelers are kept apprised of conditions, they will be empowered to make intelligent choices and thereby be active agents in optimizing mobility.</p>	<ul style="list-style-type: none"> • Expand and standardize the types of information available to travelers. • Emphasize dissemination of real-time conditions and status data across modes. • Furnish adequate information to travelers so they can make informed decisions on routing, modal shifts, etc.
<p>Promote Multi-Modalism: Promote reductions in the volume of vehicles</p>	<ul style="list-style-type: none"> • Emphasize bus and rail as practical alternatives to roadway travel.

Goals	Objectives
traversing the corridor by making transit and carpooling more attractive to customers. Even for those travelers who loathe to permanently abandon single-occupant vehicle travel, encourage ad hoc shifts to alternative modes as conditions warrant.	<ul style="list-style-type: none"> ● Promote park-and-riding and park-and-carpooling. ● Simplify inter-modal transfers.

1.6 ICM OPERATIONAL FRAMEWORK, APPROACHES, AND STRATEGIES

Five specific ICM approaches, all building on existing initiatives, are anticipated:

- Prototype and deploy the Regional Integrated Transportation Information System (RITIS).
- Optimize traffic signals on arterials.
- Deliver computer-aided dispatch/automatic vehicle location (CAD/AVL) information to transit users.
- Deliver parking space availability information to commuters.
- Measure operations performance.

The specific operational strategies associated with each of the five ICM approaches are shown in Table 1-4, below.

Table 1-4. Proposed ICM Approaches and Strategies for the I-270 Corridor

Prototype and Deploy Enhanced RITIS
<ul style="list-style-type: none"> ● Prepare/update corridor incident response plans. ● Establish publish/subscribe connections with key corridor stakeholders. ● Automate real-time information-sharing among corridor stakeholders. ● Provide real-time, corridor-based traveler information to media and other ATIS providers via the Web and direct data feeds. ● Provide real-time corridor traveler information, including transit, to travelers via the Web, 511, mobile devices, and in-vehicle devices. ● Provide real-time information to agencies to aid in decision support. ● Archive corridor transportation, traffic, transit, and incident response data for performance measurement.
Optimize Traffic Signals on Arterials
<ul style="list-style-type: none"> ● Develop operational strategies, responses, and procedures. ● Enable automated traffic-responsive and traffic-adaptive operation of signals.

<ul style="list-style-type: none"> ● Include enhanced capabilities such as potentially providing priority to Ride On and Metrobus. ● Evaluate performance of the Traffic Signal System and arterial operations through the collection and processing of current information on systems performance.
Deliver CAD/AVL Status Information to Transit Users
<ul style="list-style-type: none"> ● Define CAD/AVL information procedures and protocols. ● Integrate the CAD/AVL system on WMATA buses with the system on Ride On buses. ● Build on the integrated system to provide automated information-sharing on bus and train locations between WMATA and Ride On. ● Use AVL data to furnish real-time transit information to travelers, including bus location, next bus/train arrival time, bus/train schedules, etc. ● Use AVL data for bus schedule adherence evaluation.
Deliver Parking Availability Information to Commuters
<ul style="list-style-type: none"> ● Define parking availability information procedures and protocols. ● Expand ongoing pilot projects in the corridor to additional parking lots. ● Disseminate real-time parking space availability to travelers at remote locations using DMS, mobile phones and other personal information devices, Web sites, etc. ● Publicize these measures to encourage park-and-ride in the corridor.
Measure Operations Performance
<ul style="list-style-type: none"> ● Identify parameters and procedures for assessing performance from CHART and RITIS. ● Expand measures to include other factors (e.g., transit). ● Gather pertinent data and archive in RITIS. ● Analyze data to assess performance. ● Disseminate performance findings to stakeholders.

1.7 ICM CONCEPT OPERATIONAL DESCRIPTION

The proposed operational enhancements to the I-270/Montgomery County Corridor are intended to improve the efficiency by optimizing the use of capacities within the transportation modes and the reliability of travel along the corridor. The daily operation of the corridor will remain very similar to the current operations executed by each stakeholder agency. Each agency’s system will have an interface to RITIS, which will allow the automatic input of relevant data. RITIS, in turn, will automatically provide each agency’s system with information regarding the operational status of the assets from other agencies.

The integration of the I-270 ICM corridor is designed to be done very quickly without requiring major institutional modifications or major construction projects and be deployable within a short period of time. Corridor response plans will be developed by a joint effort among all of the stakeholders and implemented within each agency. RITIS will support the generation of performance measures reports.

RITIS will link to existing (and potentially new) venues for disseminating information to the general public. The information is expected to be more comprehensive, reliable, and timely than are the data currently available. Motorists will be able to make smarter, better-informed decisions both pre-trip and en-route. In particular, travelers will have access to information that may make usage of transit services more attractive to them.

The I-270 Corridor will function as an integrated transportation system to benefit travelers and users.

1.8 REQUIRED ASSETS AND ICM IMPLEMENTATION ISSUES

The I-270 ICM corridor is a mature corridor with various agencies in the corridor having deployed systems for transportation management. Hence, many of the assets required for I-270 specific integrated corridor management (ICM) are already deployed or are in the process of being deployed. The I-270 ICM approach builds on this existing infrastructure and initiatives in the region such as RITIS, which was initially conceived as a metropolitan-wide system, or other initiatives that are progressing without a more corridor-wide focus. Table 1-5, below, shows the additional assets which will be required for a successful ICM implementation. Each item's projected completion date is listed in parentheses.

Table 1-5. Additional Required Assets for ICM Implementation

Network	Stakeholder	Changes and Additions
Freeway Network	Maryland State Highway Administration (MDSHA)	<ul style="list-style-type: none"> ● Additional DMS on I-270 (2010). ● Additional detectors along I-270 to collect volumes, speeds, and travel time (2010). ● Additional CCTV along I-270 (2010). ● Additional two-way communications linkages between Montgomery County and CHART to support video-sharing and other incident-related data (2008). ● Interface with RITIS for providing and extracting real-time information (2007). ● Interface with RITIS for extracting archived data for performance analysis and evaluation (2008). ● Decision-support software (2010). ● Access to a Corridor Simulation Model (2009).

Network	Stakeholder	Changes and Additions
Arterial Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Additional DMS on arterials (2010). ● Additional detectors along arterials to collect volumes, speeds, and travel time (2010). ● Additional CCTV along arterials (2010). ● Additional two-way communications linkages between Montgomery County and CHART to support video-sharing and other incident-related data (2008). ● Decision-support software as part of the signal system upgrade. (Mid-2009) ● Interface with RITIS for providing and extracting real-time information (2008). ● Access to a Corridor Simulation Model (2009). ● Interfaces with existing corridor-wide systems (2008). ● Adaptive signal control system. (Central System, mid-2009; Signal Controllers, 2009-2013, with corridor signals given priority.)
MARC Commuter Rail Network	Maryland Transit Administration (MTA)	<ul style="list-style-type: none"> ● Surveillance of park-n-ride lots at the stations for real-time monitoring of parking availability (2009). ● Parking management software (2009). ● DMS for parking information dissemination (2008). ● Interface with RITIS for providing and extracting real-time information (2008).
Metrorail Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● Surveillance of park-n-ride lots at the five stations for real-time monitoring of parking availability (2009). ● Parking management software (2009). ● DMS for parking information dissemination (2009). ● Interface with RITIS for providing and extracting real-time information (2008).
Metrobus Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● Interface with RITIS for providing and extracting real-time information (2008). ● Integration with Ride On CAD/AVL system (2008). ● CAD/AVL information dissemination system (2009). ● Enhancements to CAD software to identify optimal routes (2010). ● Interface to CAD, including protection/security of sensitive information (2009).

Network	Stakeholder	Changes and Additions
Ride On Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Interface with RITIS for providing and extracting real-time information (2008). ● Information-sharing system with WMATA and MTA (2008). ● CAD/AVL information dissemination system (2008). ● Enhancements to CAD software to identify optimal routes (2009). ● Interface to CAD, including protection/security of sensitive information (2009).

1.9 I-270 CORRIDOR ICM CONCEPT INSTITUTIONAL FRAMEWORK

The goal for institutionalizing an I-270 ICM structure will be to utilize established regional frameworks instead of creating an entirely new structure. Weaving the I-270 ICM initiative into the fabric of the current regional ITS, operations, and management institutional frameworks makes sense from a resource perspective. This will also help integrating the I-270 ICM-related projects into existing planning and funding processes. It will also make use of the synergy between the goals and initiatives of the various regional ITS, operations, and management groups and the I-270 ICM initiative by using the I-270 ICM initiative as a “test bed” for ITS strategies being considered at a broader regional level.

2. REFERENCES

References Specific to the I-270 Corridor

- *2004 Performance of Regional High-Occupancy Vehicle Facilities on Freeways in the Washington Region*, Metropolitan Washington Council of Governments, National Capital Region Transportation Planning Board, July 2005.
- *CHART Business Plan*, Draft Document (Unpublished), Maryland State Highway Administration, Office of CHART and ITS Development, November 2006.
- *CHART Non-Constrained Deployment Plan*, Maryland State Highway Administration, Office of CHART and ITS Development, April 2005.
- *Freeway Incident Traffic Management for I-270*, Maryland State Highway Administration, Office of CHART and ITS Development, May 2006.
- *Montgomery County DPWT Traffic Signal Modernization Project Draft Concept of Operations*, Montgomery County Department of Public Works and Transportation, Siemens ITS, RGA Inc., and T3 Design,C., February 2007.
- *Performance Evaluation and Benefit Analysis for CHART*, Maryland State Highway Administration, Office of CHART and ITS Development, and University of Maryland, Center for Transportation Technology, May 2006.
- *Regional Integrated Transportation Information System (RITIS): Draft Concept of Operations*, University of Maryland, Center for Transportation Technology, and Volpe National Transportation Systems Center, January 2007.
- Maryland Intercounty Connector (ICC), overview and summary information available at <http://www.iccproject.com/>.

General References for Integrated Corridor Management

- *Develop Criteria for Delineating a Corridor*, Report No. FHWA-JPO-06-035, U.S. Department of Transportation, ITS Joint Program Office, April 2006.
- *ICM Implementation Guidance*, Report No. FHWA-JPO-06-042 U.S. Department of Transportation, ITS Joint Program Office, April 2006.
- *ICMS Concept of Operations for a Generic Corridor*, Report No. FHWA-JPO-06-032, U.S. Department of Transportation, ITS Joint Program Office, April 2006.
- *Relationship Between Corridor Management and Regional Management*, Report No. FHWA-JPO-06-036, U.S. Department of Transportation, ITS Joint Program Office, April 2006.
- “ICM Implementation Guide” and other Technical Memoranda available at <http://www.itsa.org/icm.html>.
- “Integrated Corridor Management – Analysis, Modeling and Simulation Sample Data List,” U.S. Federal Highway Administration and Federal Transit Administration, November 2006.

Systems Engineering

- *Building Quality Intelligent Transportation Systems through Systems Engineering*, Mitretek Systems, April 2002.
- *Developing Functional Requirements for ITS Projects*, Mitretek Systems, April 2002.
- *Systems Engineering Guidebook for ITS*, Version 1.1, California Department of Transportation, Division of Research & Innovation, February, 2005.
- *Developing and Using a Concept of Operations in Transportation Management Systems*, TMC Pooled-Fund Study, U.S. Federal Highway Administration, 2004.
- *Systems Engineering Processes for Developing Traffic Signal Systems*, NCHRP Synthesis 307, Transportation Research Board, National Cooperative Highway Research Program, April 2003.

ITS, Operations, Architecture, Other

- “FHWA Rule 940, Intelligent Transportation System Architecture and Standards —Rules and Regulations,” *Federal Register*, Vol. 66, No. 5, January 8, 2001.
- “Developing, Using, and Maintaining an ITS Architecture for Your Region: Regional ITS Architecture Guidance Document,” National ITS Architecture Team, October, 2001.
- *Maryland Statewide ITS Architecture*, Maryland State Highway Administration, Office of CHART and ITS Development, and Telvent Farradyne Inc. April 2005.
- *Metropolitan Washington Regional Intelligent Transportation Systems Architecture Draft Summary Report*, Metropolitan Washington Council of Governments, April 2005.
- *Performance Measures of Operational Effectiveness for Highway Segments and Systems — A Synthesis of Highway Practice*, NCHRP Synthesis 311, Transportation Research Board, National Cooperative Highway Research Program, May 2003.
- *Guide to Contracting ITS Projects*, NCHRP Report 560, Project 03-77, Transportation Research Board, National Cooperative Highway Research Program, 2006.
- National ITS Architecture, Version 5.1, U.S. Federal Highway Administration, available at <http://www.iteris.com/itsarch/>, October 2005.
- *Freeway Management and Operations Handbook*, FHWA-OP-04-003, U.S. Federal Highway Administration, 2003.

3. EXISTING CORRIDOR SCOPE AND OPERATIONAL CHARACTERISTICS

This section describes existing conditions and needs in the I-270/Montgomery County Corridor.

3.1 CORRIDOR BOUNDARIES AND NETWORKS

The Interstate-270 Corridor is located in Montgomery County, Maryland just outside of Washington D.C. The corridor, which measures approximately 20 miles in length, encompasses (1) the I-270 freeway, (2) the arterials adjacent to I-270, (3) public bus routes (both Ride On, operated by Montgomery County, and Metrobus, operated by the Washington Metropolitan Area Transit Authority (WMATA)), (4) subway rail routes (WMATA's Metrorail Red Line), and (5) a commuter rail network (the Maryland Rail Commuter (MARC) Brunswick line).


The I-270 Corridor was originally planned as a commuter corridor for travel between suburban Maryland and Washington, D.C. However, with more businesses relocating to the suburbs, including Rockville and Silver Spring, Maryland and Tysons Corner, Dulles, and Reston, Virginia, the corridor has increasingly functioned as a gateway for travelers to and from the Capital Beltway (I-495), which encircles Washington and connects to other highways and business centers. Also, significant numbers of commuters work at locations along or near the I-270 Corridor itself.

The I-270/Montgomery County Corridor, as defined in this study, is identified in

I-270 Montgomery County ICM Corridor

LEGEND

- METROBUS STATION
- MARYLAND RAIL COMMUTER (MARC) STATION
- PUBLIC LIBRARY
- PARK 'N' RIDE LOT
- RIDE-ON ROUTE
- METROBUS OR OTHER OPERATOR ROUTE
- INTERSTATE HIGHWAY
- US HIGHWAY
- MARYLAND STATE HIGHWAY
- MARC TRAIN SERVICE
- ALL DAY SERVICE ROUTE
- RUSH HOURS ONLY ROUTE
- MIDDAY SERVICE ROUTE
- ROUTE TERMINAL
- METROBUS RED LINE
- METROBUS GREEN LINE
- HIKER-HIKER TRAIL

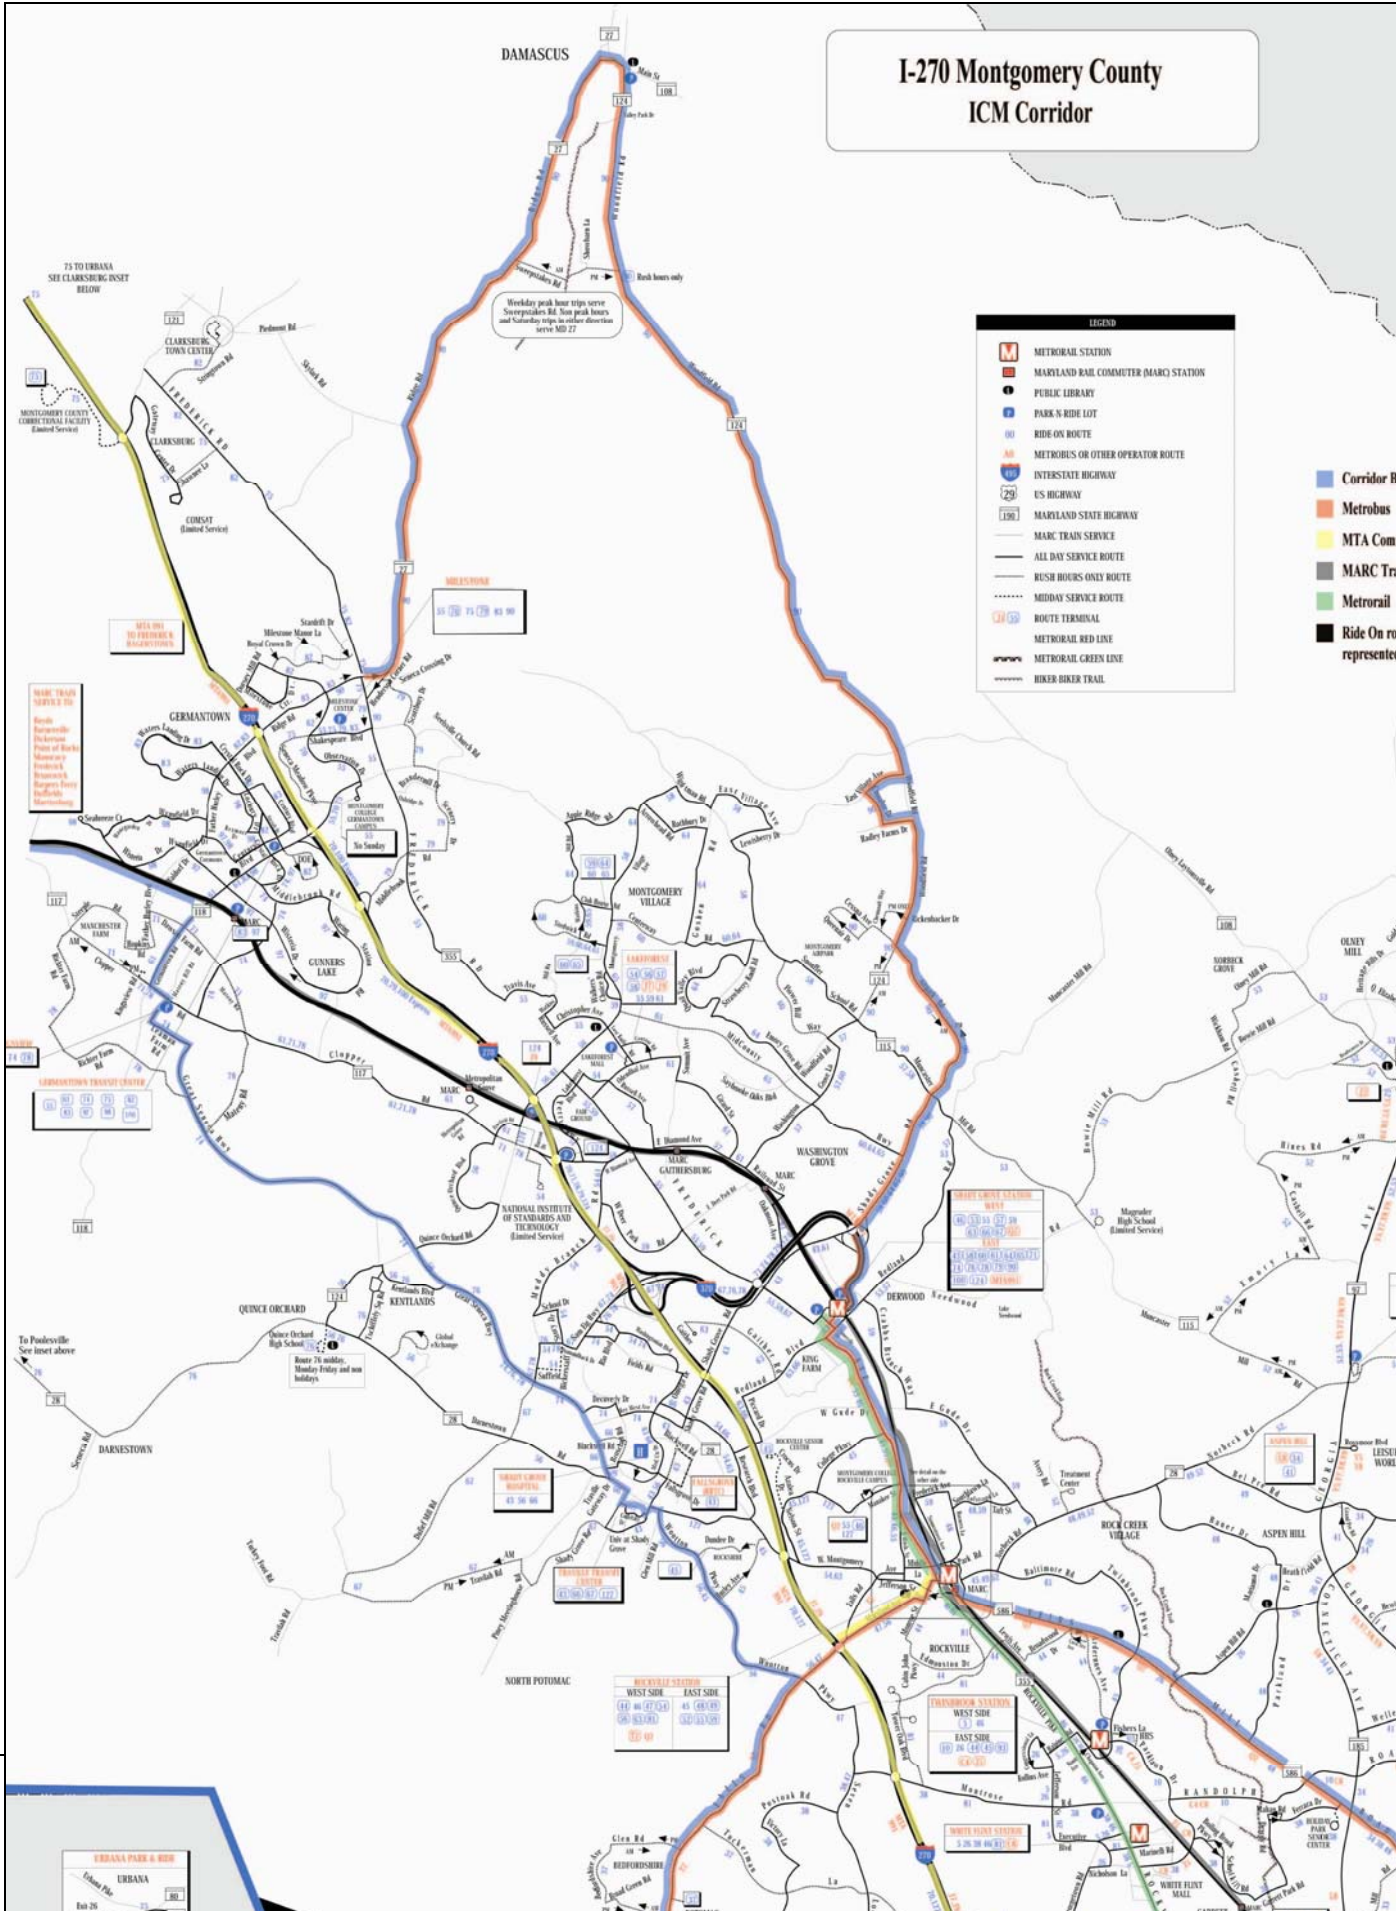

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

MONTGOMERY COUNTY
CORRECTIONAL FACILITY
General Services

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

GERMANTOWN TRANSIT CENTER

To Poolesville
See inset above

URBANA PARK & RIDE
URBANA

DAMASCUS

MILKSPRING

CLARKSBURG

GAITHERSBURG

ROCKVILLE

NORTH POTOMAC

POTOMAC

Weekday peak hour trips serve
Sawyersville Rd. Non peak hours
and Saturday trips in either direction
serve MD 27

Rock hours only

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

ROCKVILLE STATION

WEST SIDE	EAST SIDE
10 44 47 54	45 48 53
56 63 70	57 64 71
77 84	85 92 99

WEST GAITHERSBURG

WEST	EAST
60 67 74 81	82 89 96
97 104 111 118	119 126 133 140

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

75 TO URBANA
SEE CLARKSBURG INSET
BELOW

Figure 3-1. The corridor's boundaries are delineated as follows:

- Northern Boundary — The Frederick County/Montgomery County Line;
- Southern Boundary — I-495 (Capital Beltway);
- Western Boundary — South to north: River Road, Falls Road, Wooten Parkway, Great Seneca Highway, and the MARC Brunswick Line; and
- Eastern Boundary — South to north: Viers Mill Road, MD-355, Shady Grove Road, Airpark Road, and Woodfield Road.

Various ITS devices are crucial to operations, and are located in and around the I-270/Montgomery County Corridor. Figure 3-2 shows the location of detectors in the corridor. Figure 3-3 shows the location of RWIS, HAR, DMS, and SHA's CCTV within the corridor.

The corridor has significant impacts on the regional transportation system that extend well beyond the formally-designated boundaries. For example, a sizable number of commuters travel to and from points outside the corridor's boundaries. Additionally, incidents and delays on I-270 often affect conditions on other roadway networks across the region. The I-270 Corridor is part of the broader National Capital Region Transportation Planning Board (TPB) region.

The networks comprising the I-270 Corridor are identified and described in Table 3-1.

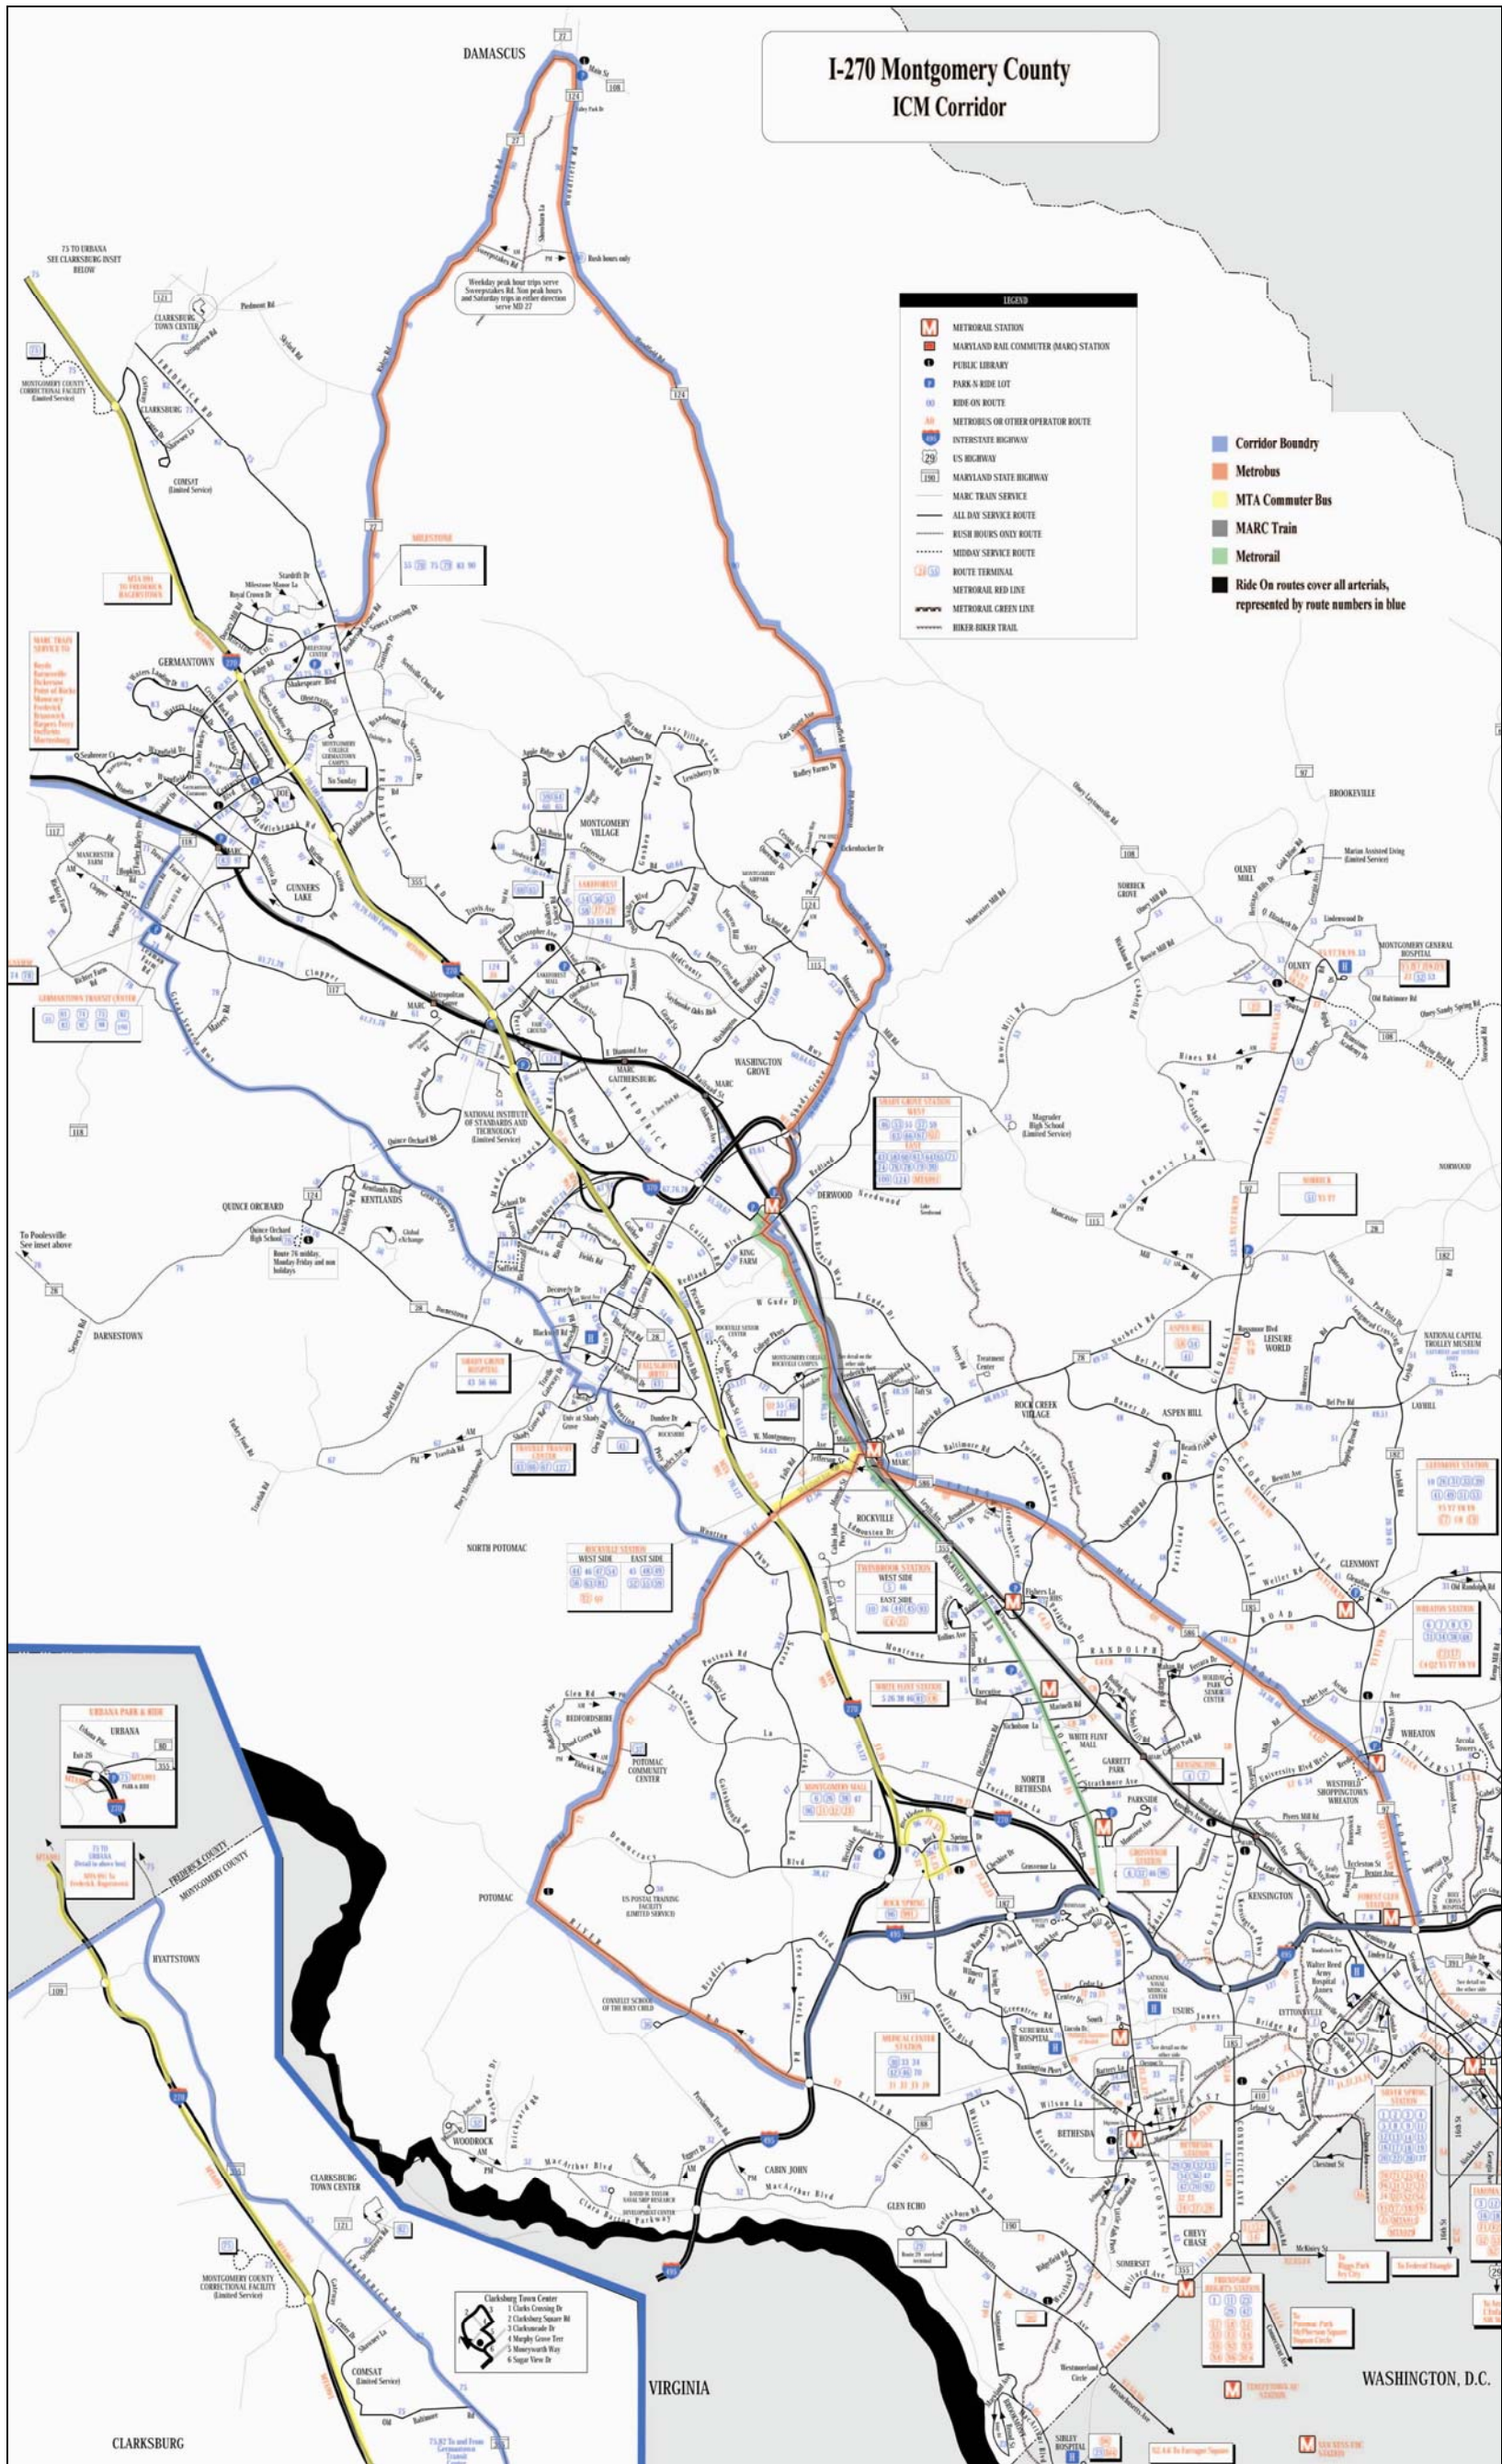


Figure 3-1. I-270 Montgomery County ICM Corridor

Image Source: Montgomery County Department of Public Works and Transportation (DPWT)

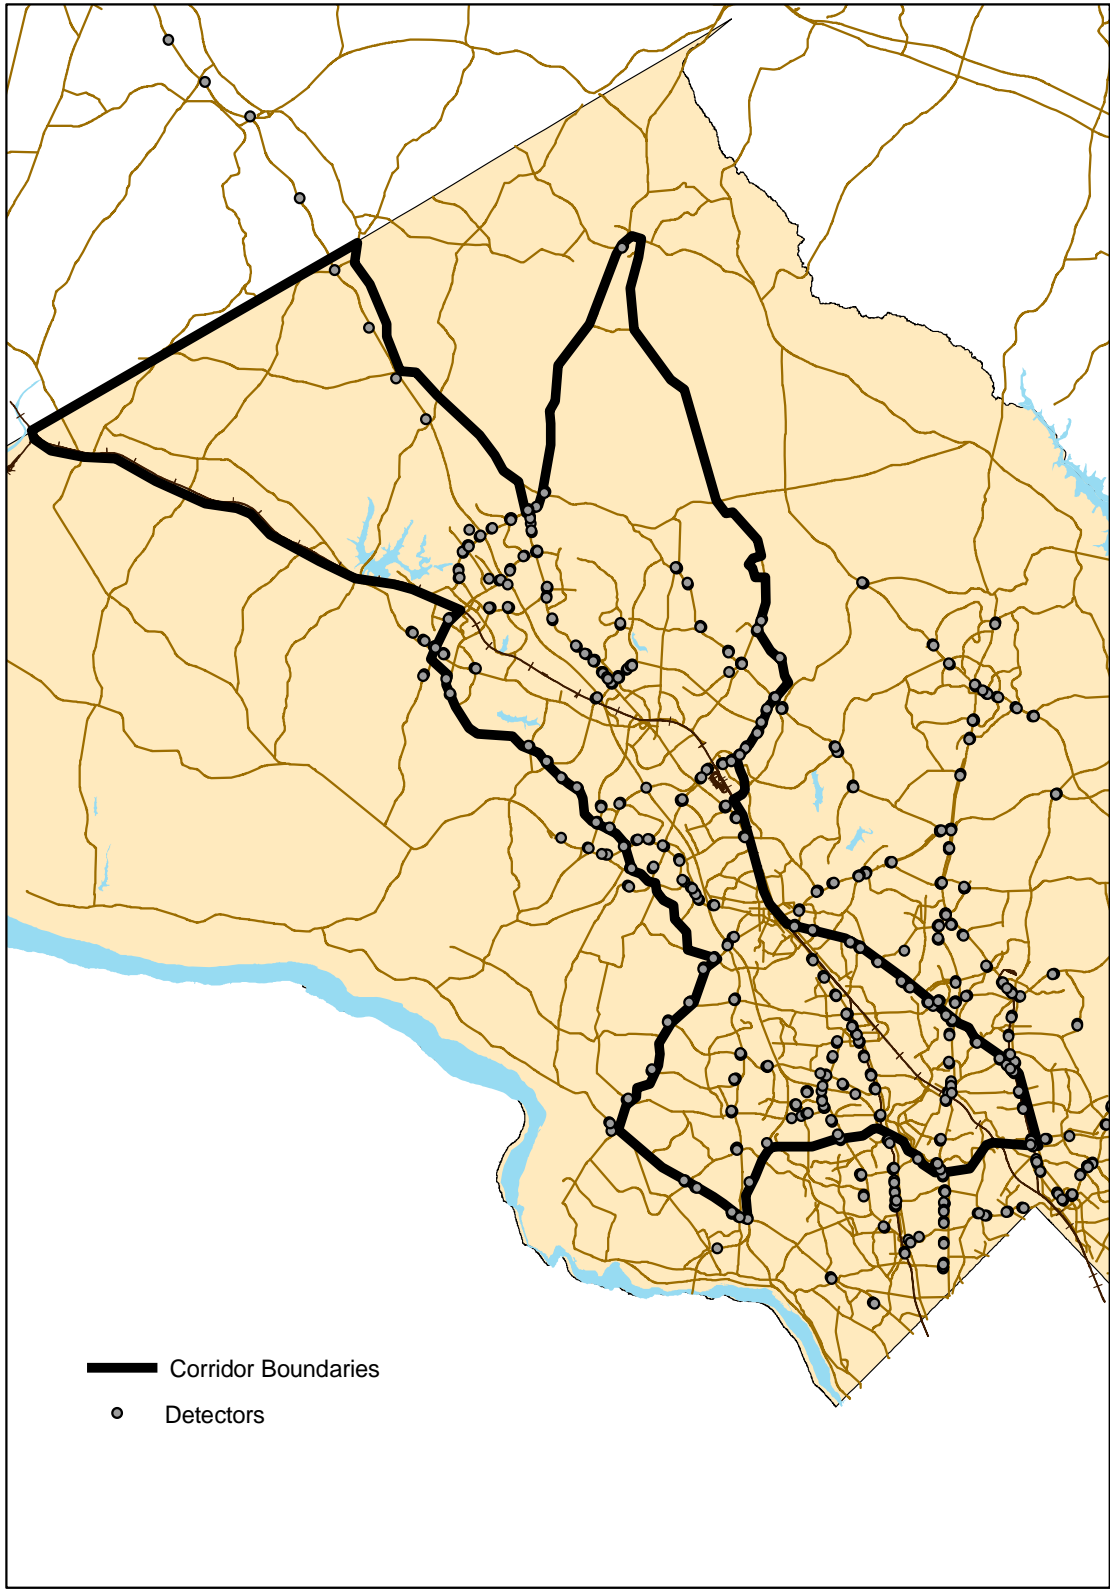


Figure 3-2. I-270 ICM Corridor Detector Locations

Image Source: Montgomery County DPWT

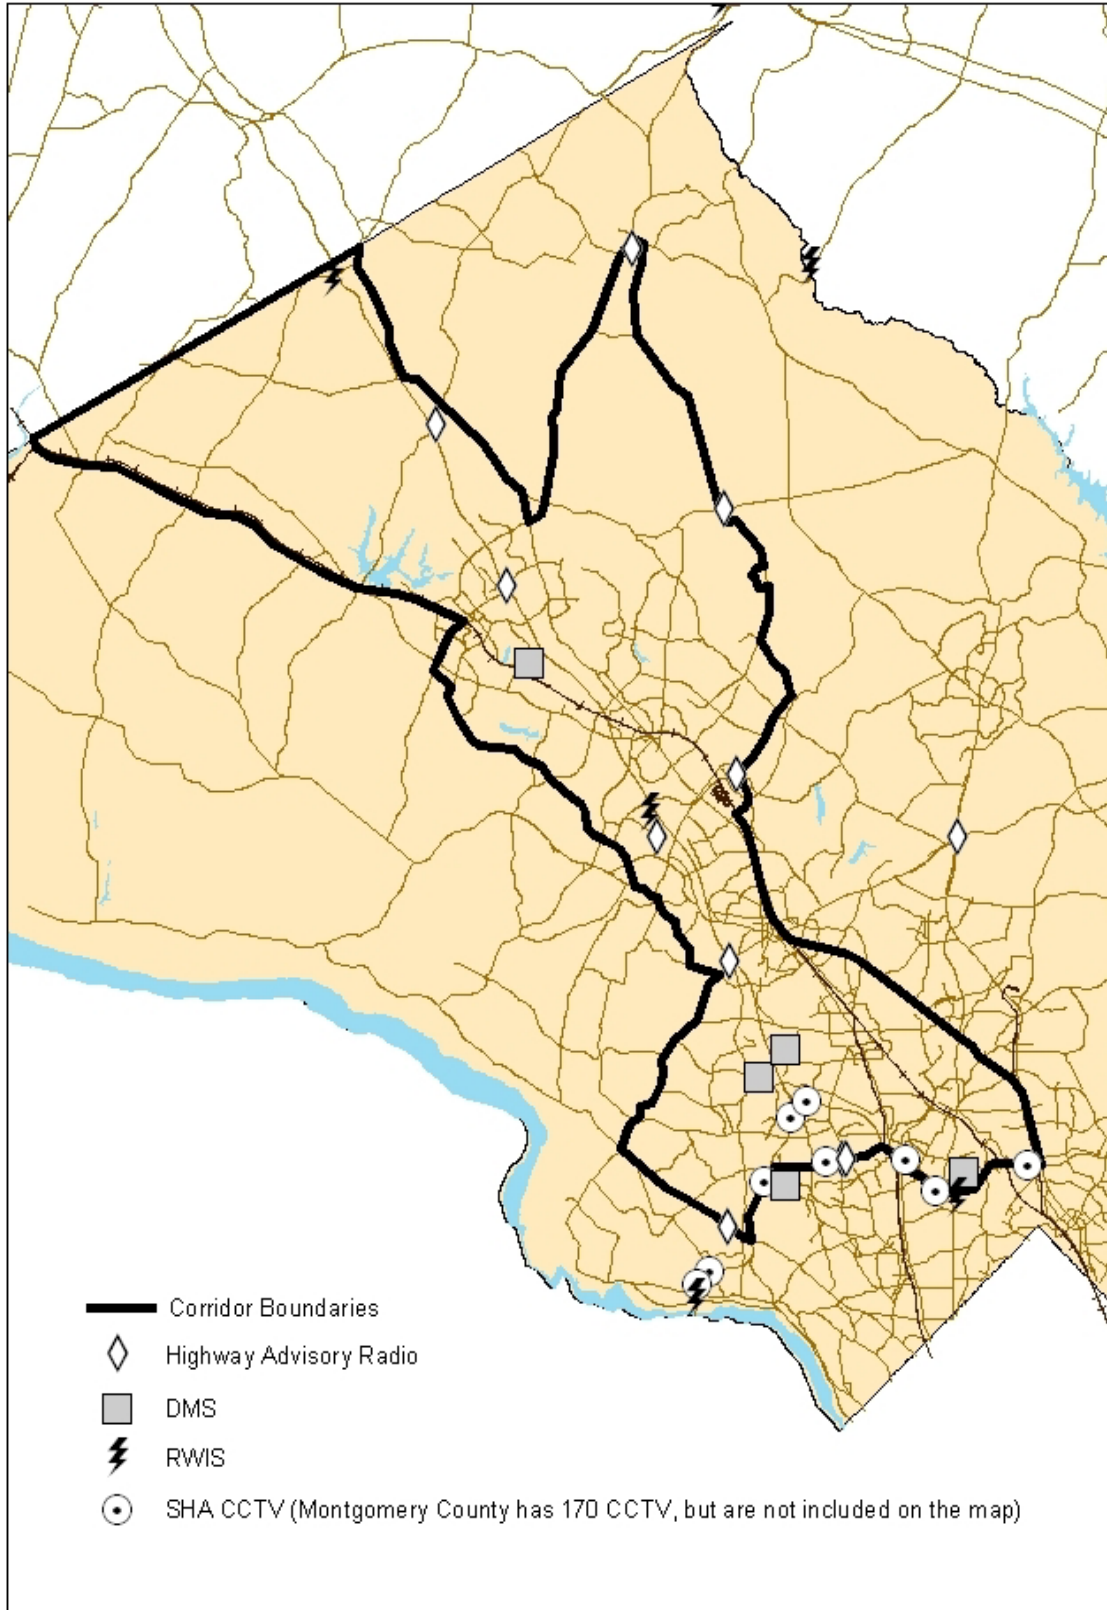


Figure 3-3. I-270 ICM Corridor HAR, DMS, CCTV, and RWIS Locations

Image Source: Montgomery County DPWT

Table 3-1. I-270 Corridor Network Characteristics

Corridor Element	Characteristics
Freeway Network	<ul style="list-style-type: none"> ● The freeway network consists of I-270 from the Frederick/ Montgomery County Line to the Capital Beltway I-495). I-270 is classified as an “urban” interstate. ● The corridor, from north to south, is delineated below: <ul style="list-style-type: none"> ○ The Frederick County Line to MD-121 – Approximately 4 miles; two northbound and southbound general purpose lanes. ○ MD-121 to MD-118 – Approximately 3 miles; two northbound and three southbound general purpose lanes; and one northbound HOV lane. ○ MD-118 to MD-124 – Approximately 4 miles; three northbound and southbound general purpose lanes; one northbound HOV lane; and four southbound general purpose lanes. ○ MD-124 to I-379 – Approximately 2 miles; three northbound and four southbound general purpose lanes; one northbound and southbound HOV lane; and two northbound collector-distributor lanes. ○ I-370 to the Capital Beltway – Approximately 9 miles; three northbound and southbound general purpose lanes; one northbound and southbound HOV lane; and two northbound and southbound collector-distributor lanes.
Arterial Network	<ul style="list-style-type: none"> ● MD-355 is the only arterial that parallels I-270 throughout the I-270/ Montgomery County ICM Corridor. <ul style="list-style-type: none"> ○ In the southern portion of the corridor, MD-355 is a multi-lane signalized arterial. ○ From Gaithersburg north, it is primarily a two-lane rural highway. ● Other north-south routes include the Great Seneca Highway, the Wootton Parkway, Seven Locks Road, and River Road.
MARC Commuter Rail Network	<ul style="list-style-type: none"> ● The Maryland Transit Administration (MTA) provides commuter rail service along the I-270 Corridor. The Maryland Rail Commuter (MARC) offers service from Martinsburg, West Virginia to downtown Washington, D.C. along the Brunswick Line. MARC stations in the corridor are located at: <ul style="list-style-type: none"> ○ Dickerson (parking). ○ Barnesville (parking and connection to Ride On). ○ Boyds (parking). ○ Germantown (parking and connection to Ride On). ○ Metropolitan Grove (parking and connection to Ride On). ○ Gaithersburg (parking and connection to Ride On).

Corridor Element	Characteristics
	<ul style="list-style-type: none"> ○ Washington Grove (parking and connection to Ride On). ○ Rockville (parking and connection to Ride On and Metro). ○ Garrett Park (parking and connection to Ride On).
Metrorail Network	<ul style="list-style-type: none"> ● WMATA’s Red Line serves the I-270 Corridor along MD-355 from Shady Grove to the Capital Beltway and into downtown Washington, D.C. The following Metrorail stations are located in the corridor: <ul style="list-style-type: none"> ○ Shady Grove (parking and connection to Ride On & Metrobus). ○ Rockville (700 parking spacing and connection to Ride On, Metrobus, & MARC). ○ Twinbrook (parking and connection to Ride On & Metrobus). ○ White Flint (parking and connection to Ride On & Metrobus). ○ Grosvenor-Strathmore (parking and connection to Ride On & Metrobus).
Metrobus Network	<ul style="list-style-type: none"> ● Metrobus is WMATA’s regional bus transit network serving the entire Metropolitan Washington, D.C. area. A Metrobus garage is located in Rockville. The following Metrobus routes operate inside the corridor: <ul style="list-style-type: none"> ○ J5 – The J5 Route follows MD-355 from the Twinbrook Metrorail station to the Capital Beltway. ○ J7 and J9 – The J7 and J9 routes are express bus routes running on I-270 from the Lake Forest Transit Center to the Capital Beltway. ○ T2 – The T2 route runs from the Rockville Metrorail station to the Friendship Heights Metrorail station, following Great Falls Road (MD-189) to River Road (MD-190). ○ Q2 – The Q2 route follows MD-355 from the Shady Grove Metrorail station to the Rockville Metrorail station.
Ride On Network	<ul style="list-style-type: none"> ● The Ride On network is Montgomery County’s local bus service. The network is designed to link commuters to other transit services – i.e., Metrorail, Metrobus, and MARC. There are 11 transit centers within the corridor.
MTA Commuter Bus	<ul style="list-style-type: none"> ● The Maryland Transit Administration (MTA) has several commuter bus lines serving Maryland, with one in the I-270 Corridor. The line operates only in the peak direction during the AM and PM rush hours. Buses run at 15 minute headways, picking up passengers outside the corridor, and stopping at the Shady Grove Metro Station and five locations in Rock Spring Business Park.

3.2 CORRIDOR STAKEHOLDERS

Key ICM stakeholders for the I-270 Corridor are identified in Table 3-2, below.

Table 3-2. I-270 Corridor Stakeholders

Partnering Agencies

The following agencies are partnered in the development of the ICM initiative:

- Federal Highway Administration (FHWA)
- Federal Transit Administration (FTA)
- Maryland State Highway Administration (MDSHA)
- Maryland Transit Administration (MTA)
- Montgomery County Department of Public Works and Transportation (DPWT)
- The University of Maryland (UMD)
- Washington Metropolitan Area Transit Authority (WMATA)

Stakeholders

The following entities have potentially important stakes in the outcome of the ICM initiative and have advised and guided the process:

- Bethesda
- City of Gaithersburg
- City of Rockville
- Commercial Vehicle Companies
- CSX Rail
- Event Promoters
- Federal Emergency Management Agency
- Frederick County Department of Public Works and Transportation
- General Public
- Maryland Emergency Management Agency (MEMA)
- Maryland State Police (MSP)
- Maryland Transportation Authority (MdTA)
- Metro Transit Police
- Montgomery County Police
- Montgomery County Fire and EMS
- Montgomery County Public Schools
- National Capital Region Transportation Planning Board
- North Bethesda Transportation Management District

The following stakeholders are responsible for operating one or more networks within the I-270 Corridor:

- Maryland State Highway Administration (MDSHA) — Management of the freeway network.
- Montgomery County Department of Public Works and Transportation (DPWT) — Management of the county’s arterial network, as well as Ride On bus service.
- Maryland Transit Administration (MTA) — Operation of MARC rail service and MTA Commuter Bus.
- Washington Metropolitan Area Transit Authority (WMATA) — Operation of Metrorail and Metrobus, and monitoring and managing parking facilities at stations.
- Maryland State Police — Enforcement, security, and crash investigations on freeways.
- Montgomery County Police — Enforcement, security, and crash investigations on Montgomery County arterials.
- City of Rockville — Management of the arterial network in Rockville.
- City of Gaithersburg – Management of the arterial network in Gaithersburg.
- University of Maryland’s Center for Advanced Transportation Technology (CATT) — Maintenance and operation of the Regional Integrated Transportation Information System (RITIS) prototype.

3.3 OPERATIONAL CONDITIONS OF THE I-270 CORRIDOR AND INCLUDED NETWORKS

3.3.1 The Freeway Network

The I-270/Montgomery County Corridor contains a single interstate highway, I-270. Originally built in the early 1950’s as a four-lane roadway called the Washington National Pike (US-240), the travel route now designated as I-270 has been widened and substantially improved over the years.

Table 3-3, below, identifies average annual daily traffic (AADT) counts and level of service (LOS) for key segments of I-270.

Table 3-3. Average Annual Daily Traffic and Level of Service on I-270

Section of I-270 (from South to North)	2005 AADT	LOS AM Peak Direction	LOS PM Peak Direction
South of MD-187 (East Y Split)	127,000	F	F
North of MD-187B (West Y Split)	126,000	F	F
North of Tuckerman Lane	256,000	F	F
North of Montrose Road	261,000	F	E
North of Falls Road	264,000	F	E
North of MD-28	241,000	F	E

Section of I-270 (from South to North)	2005 AADT	LOS AM Peak Direction	LOS PM Peak Direction
North of Shady Grove Road	219,000	F	F
North of I-370	208,000	F	F
South of MD-124	172,000	F	F
South of Middlebrook Road	164,000	D	F
South of MD-118	130,000	C	D
South of Father Hurley Blvd.	117,000	D	C
South of MD- 121	98,000	C	E
South of MD-121 (ATR0004)	97,000	C	E
North of MD-121	94,000	E	E
South of Frederick County Line	87,000	E	E

3.3.2 The Arterial and Connector Route Network

The I-270/Montgomery County Corridor has a limited number of north-south arterials paralleling the freeway. The only truly viable alternative is MD-355. Other routes providing north-south access in the vicinity include: MD-85 to MD-28 and MD 112/MD-190. These routes, however, do not provide nearly the capacity of, or ease of connection to, I-270 that MD-355 does.

In the southern portion of the corridor, MD-355 is a multi-lane signalized arterial. From Gaithersburg north, it is primarily a two-lane rural highway. MD-355 is characterized as follows:

- Frederick County Line to North of Brink Road — Approximately 6 miles; Rural Major Collector.
- North Brink Road to MD-118 — Approximately 1 mile; Rural Minor Arterial.
- MD-188 to the Washington Capital Beltway — Approximately 15 miles; Urban Principal Arterial.

Within the I-270 Corridor, traffic varies on MD-355 based on the volume of traffic at signalized intersections, I-370, and the Capital Beltway. Traffic also varies due to trip origin and destination points including commercial districts, sources of employment, and residential areas. Table 3-4, below, provides annual average daily traffic (AADT) counts for MD-355.

Table 3-4. MD-355 Average Annual Daily Traffic

MD-355 Segments (from South to North)	2005 AADT
North of I-495 Interchange	55,000
Between I-495 and Old Georgetown Road	54,000
Between Montrose Rd. and Great Falls Road	57,000
Between West Montgomery Avenue and Gude Drive	49,000
Between Gude Drive and Shady Grove Road	48,000

MD-355 Segments (from South to North)	2005 AADT
South of MD-124	36,000
Between MD-124 and MD 118	33,000
South of MD-118	29,000
Between MD-118 and MD-27	37,000
Between MD-27 and MD-121	13,000
Between MD-121 and MD-109	11,000
North of MD-109	9,000

Twelve connector routes link I-270 to MD-355. These routes provide varying levels of service from I-270 to MD-355. The routes also have different numbers of access lanes and very different volumes of traffic. Table 3-5, below, characterizes these routes.

Table 3-5. Connector Route Annual Average Daily Traffic

Arterial Connection	I-270 Exit #	Lanes of Access	2005 AADT
MD-109/Old Hundred Road	22	2	9,000
MD-121/Clarksburg Road	18	2	14,000
MD-27/Father Hurley Blvd/Ridge Road	16	4	25,000
MD-118/Germantown Road	15	4	29,000
Middlebrook Road	13	4	31,000
MD-124/Quince Orchard Road/Montgomery Village Avenue	11	4 and 2	81,000
MD-117/West Diamond Avenue	10	2	44,000
I-370	9	6	76,000
Shady Grove Road	8	4	40,000
West Montgomery Avenue	6	4 and 3	25,000
Great Falls Road	5	4 and 2	29,000
Montrose Road	4	4	63,450
MD-187/Old Georgetown Road	1	4	45,000

3.3.3 The MARC Commuter Rail Network

The Maryland Transit Administration (MTA) provides commuter rail service along the I-270 Corridor. The Maryland Rail Commuter (MARC) Train offers service from Martinsburg, West Virginia into downtown Washington D.C. along the MARC Brunswick Line. The stations and passenger service along the corridor are oriented predominantly towards commuters working in

downtown Washington, D.C., as well as commuters who work in Rockville, Silver Spring, and other Montgomery County locations.

The MARC Brunswick Line serves approximately 2,524 riders during the AM peak and a total of 5,047 riders daily. Rail cars on the MARC trains are generally filled to capacity and demand is high for added service — a need not easily filled since the MARC trains share the track with CSX freight trains. Transfers are available from MARC to Metrorail at the Rockville and Silver Spring stations.

Figure 3-4 shows the route covered by the MARC Brunswick Line. The stations serviced by the Brunswick Line that lie within the I-270 ICM, from NW to SE, are:

- Dickerson
- Barnesville
- Boyds
- Germantown
- Metropolitan Grove
- Gaithersburg
- Washington Grove
- Rockville
- Garrett Park (just outside I-270 ICM corridor)

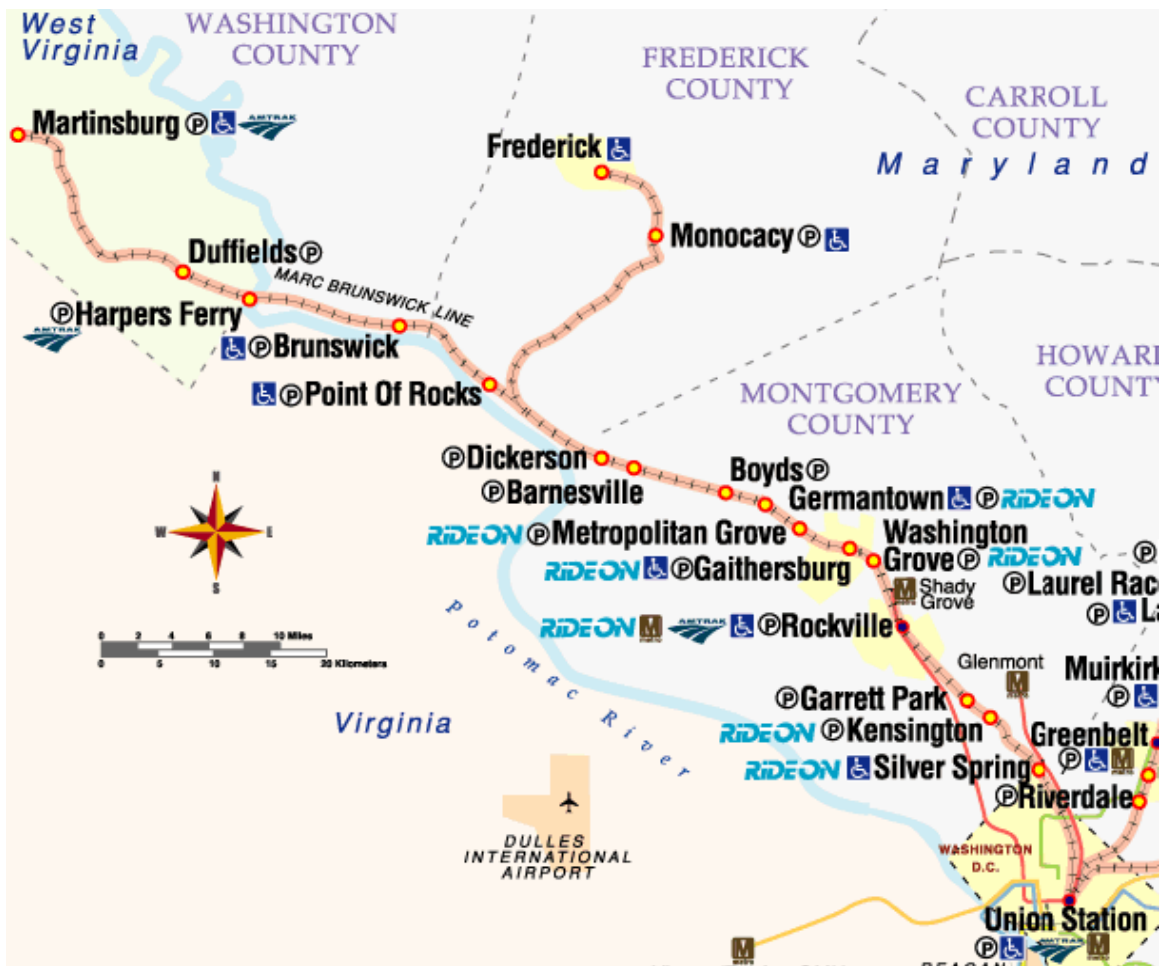


Figure 3-4. Map of the MARC Brunswick Line

Image Source: Maryland Transit Administration

3.3.4 The Metrorail Network

WMATA’s Metrorail network serves the entire Washington, D.C. region. The network consists of five Metro lines, as depicted in Figure 3-5, below.

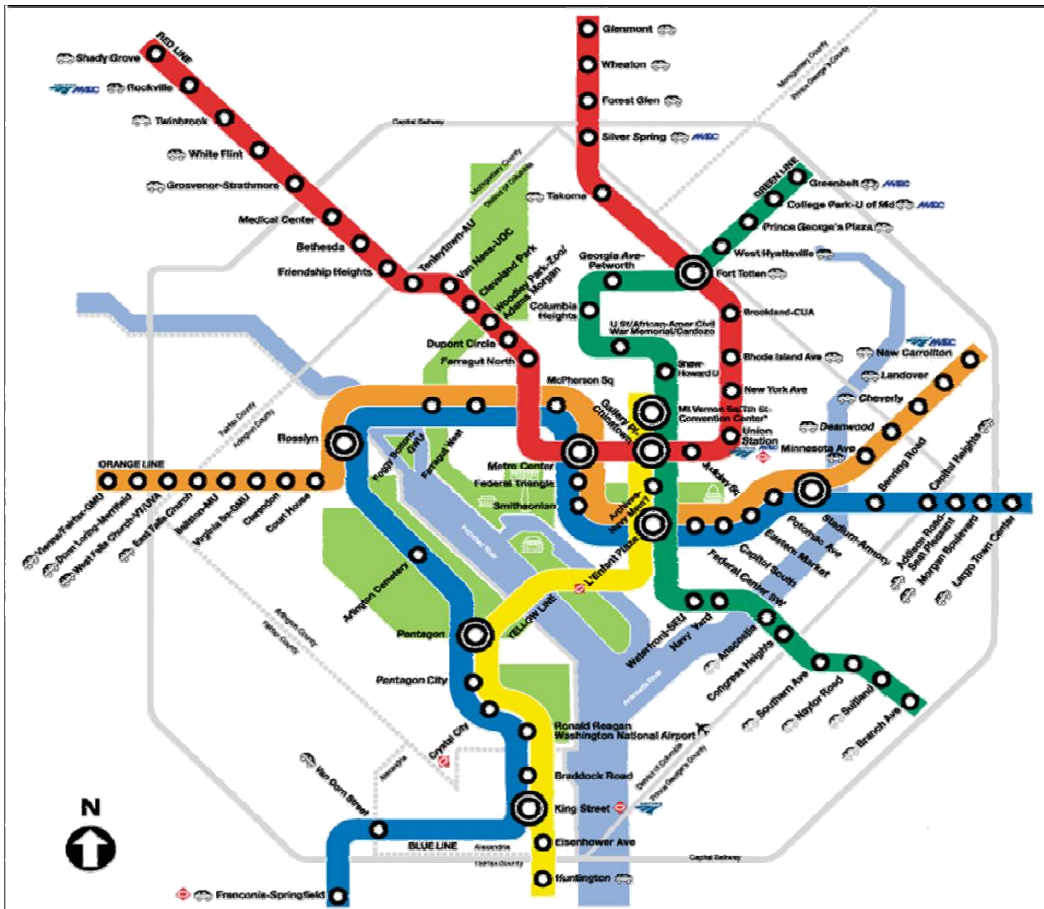


Figure 3-5: The Metrorail Network

Image Source: Washington Metropolitan Area Transit Authority

The Red Line serves commuters in the I-270 Corridor; it runs along MD-355 from Shady Grove to the Capital Beltway and into downtown Washington. Metrorail stations within the corridor include Shady Grove, Rockville, Twinbrook, White Flint, and Grosvenor-Strathmore.

The Red Line is WMATA's busiest line and the only one that does not share its track with another line. Because it is the only subway line serving the area, WMATA runs two routes along the Red Line during the morning and afternoon peaks. One route runs all the way to Shady Grove; the other turns around at the Grosvenor-Strathmore Station to accommodate the higher volumes of riders closer to the city. All Metrorail stations support transfers to Metrobus and Ride On. The Rockville station also serves as a MARC station.

Metrorail travel patterns are consistent with the rest of the corridor. Morning peak travel moves predominantly in the direction of downtown Washington, D.C., whereas the afternoon peak moves from Washington towards the Maryland suburbs. Average weekday ridership for the morning and afternoon peak hours on the Red Line is summarized in Table 3-6.

Table 3-6. Average Metrorail Weekday Ridership in the I-270 Corridor

Station Name	Entry/Exit	Average Weekday				
		AM Peak	AM Off	PM Peak	PM Off	Total
Grosvenor	Entry	3,464	891	796	275	5,428
	Exit	336	549	2,827	1,359	5,072
White Flint	Entry	1,227	713	1,396	344	3,682
	Exit	1,253	598	1,246	579	3,678
Twinbrook	Entry	2,332	853	1,070	275	4,531
	Exit	827	621	1,990	1,029	4,468
Rockville	Entry	2,288	809	894	245	4,237
	Exit	745	646	2,110	760	4,262
Shady Grove	Entry	9,570	1,874	1,514	402	13,360
	Exit	936	1,321	8,027	2,896	13,181

3.3.5 The Metrobus Network

Metrobus is WMATA’s regional bus transit network serving the Metropolitan Washington, D.C. area. Within the I-270 Corridor, Metrobus has four routes that directly service commuters inside the corridor. These routes are:

- J5 — The J5 route follows MD-355 from the Twinbrook Metrorail Station to the Capital Beltway.
- J8/J9 — These express routes run on I-270 from the Lakeforest Transit Center to the Capital Beltway.
- T2 — The T2 route runs from the Rockville Metrorail Station to the Friendship Heights Metrorail Station, following Great Falls Road (MD-189) to River Road (MD-190).
- Q2 — The Q2 route follows MD-355 from the Shady Grove Metrorail Station to the Rockville Metrorail Station.

All four Metrobus routes provide opportunities for transfers to Metrorail and Ride On. Additionally, the Q2 and T2 link to MARC at the Rockville Metrorail Station. Average weekday passengers per trip for each route are provided in Table 3-7, below.

Table 3-7. Metrobus Average Weekday Boardings per Trip

Metrobus Route	3:00am to 5:30am	5:30am to 9:30am	9:30am to 3:00pm	3:00pm to 7:00pm	7:00pm to 3:00am
J5	N/A	17.55	N/A	12.25	N/A
J8/J9	N/A	18.88	23.50	17.97	N/A
T2	N/A	31.67	22.48	26.63	14.29

Metrobus Route	3:00am to 5:30am	5:30am to 9:30am	9:30am to 3:00pm	3:00pm to 7:00pm	7:00pm to 3:00am
Q2	27.13	61.94	70.26	78.98	52.64

3.3.6 The MTA Commuter Bus Network

The MTA Commuter Bus provides long distance service during peak periods parallel to MARC rail lines. Route 991 begins north of Montgomery County and travels south on I-270 during the AM rush. Buses stop at the Rockville Metro station, and again at the Rock Spring Business Park, near I-495. Buses operate only in the peak direction at 15 minute headways. Average daily ridership in April 2007 was 975 passengers. Most buses are operating at capacity, and because there is a “no standing” rule in effect, it’s difficult to accurately measure demand.

3.3.7 The Ride On Network

Ride On is Montgomery County’s local bus service that provides concentrated service within the I-270 Corridor. Bus service emphasizes connections to Metrorail, Metrobus, and MARC. Bus service is also available at key Park-n-Ride lots, including the following:

- Comus Park-n-Ride — Ride On Route 75 (with service to Shady Grove Metrorail Station); located off MD-121, east of I-270.
- Milestone Park-n-Ride — Ride On Routes 55, 70, 75 (all three with service to Shady Grove Metrorail Station), 79 (service to Shady Grove Metrorail Station), 83 (with service to Germantown MARC Station), and 90; located off MD-27, east of I-270.
- Germantown Transit Center — Ride On Routes 68 and 71 (to Shady Grove Metrorail Station); includes MARC service connection; located off MD-118, west of I-270.
- Lake Forest Transit Center — Ride On Routes 54, 56, 59 (all three with service to Rockville Metro Station), 55, 57 (both with service to Shady Grove and Rockville Metrorail Stations), 56, 58, and 62 (all three with service to Shady Grove Metrorail Station); located off MD-124, east of I-270.
- Clopper Road Park-n-Ride — Ride On Route 124 (including express shuttle service to Shady Grove Metrorail Station); located at MD-117 and I-270 Interchange.
- Gaithersburg Park-n-Ride — Ride On Route 124 (including express shuttle service to Shady Grove Metrorail Station); located at MD-124 and I-270 Interchange.
- Montrose Road/MD-355 Park-n-Ride — Ride On Routes 5 (serving Twinbrook, White Flint, and Silver Spring Metrorail Stations), 38 (serving White Flint and Wheaton Metrorail Stations), and 46 (serving Shady Grove, Rockville, Twinbrook, White Flint, and Grosvenor Metrorail Stations); located off Montrose Road, east of I-270.
- Westfield Shoppingtown Park-n-Ride — Ride On Routes 26 (serving Twinbrook Metrorail Station), 35, 38, 47 (serving Rockville and Grosvenor-Strathmore Metrorail Stations), and 96 (serving Grosvenor-Strathmore Metrorail Station); located off Old Democracy Blvd., west of I-270 Spur.

Table 3-8, below, shows average weekday ridership for key Ride On bus routes:

Table 3-8. Average Weekday Ridership on Selected Ride On Routes

Route	Origin	Destination	Weekday Ridership
54	Lakeforest	Rockville Metro Station	2,038
55	Germantown Transit Center	Rockville Metro Station	6,900
56	Lakeforest	Rockville Metro Station	2,364
59	Montgomery Village Center	Rockville Metro Station	3,910
70	Milestone Park and Ride	Bethesda Metro Station	547
71	Kingsview Park and Ride	Shady Grove Station	306
75	Urbana Park and Ride	Shady Grove Station	229
79	Milestone Park and Ride	Shady Grove Station	129
83	Milestone Park and Ride	Germantown Transit Center	697
90	Damascus	Shady Grove Station	860
124	MD-124 Park and Ride	Shady Grove Station	71

3.4 EXISTING NETWORK-BASED TRANSPORTATION MANAGEMENT/ITS ASSETS

The I-270/Montgomery County Corridor consists of a variety of networks operated by different stakeholders. Table 3-9, below, identifies the available ITS infrastructure and assets held by these transportation networks.

Table 3-9. Network-Based Transportation Management/ITS Assets

Network	Stakeholder	Stakeholder Facilities	ITS Infrastructure/ Assets
Freeway Network	Maryland State Highway Administration (MDSHA)	<ul style="list-style-type: none"> Statewide Operations Center (SOC) Traffic Operations Center 3 (TOC-3) MDSHA Maintenance Shops (one located in the I-270 ICM corridor in Gaithersburg) 	<ul style="list-style-type: none"> CHART ATMS Software EORS Software Radio Communications CCTV Cameras (5 existing in corridor) DMS (4 existing, 2 planned) - but not in advance of every cross-network junction. NTCIP¹ protocols used

¹ NTCIP – National Transportation Communications for ITS Protocols – a suite of ITS standards detailing how a central system is to communicate with a field device in a standardized, interoperable manner.

Network	Stakeholder	Stakeholder Facilities	ITS Infrastructure/ Assets
			for DMS communications <ul style="list-style-type: none"> ● HAR (2 existing, 1 planned) ● SHAZAM Beacons (1 existing, 4 planned) ● Loop Detector (ATR) (2 existing) ● Radar Detectors (RTMS) (8 existing, 7 planned) ● RWIS (2 existing) ● Highway Service Patrols (12 vehicles) ● CHART Web site ● Private-Sector Websites
Arterial Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Montgomery County Traffic Management Center ● Montgomery County Technical Center (signal shop) ● Montgomery County Equipment Maintenance Operations Center 	<ul style="list-style-type: none"> ● Montgomery County ATMS Software – controlling CCTV, DMS, HAR ● Montgomery County Traffic Signal System (TSS) – accessible via the ATMS software ● Traffic Signals (793 in total; 194 in the corridor signals) ● CCTV Cameras (47 existing in corridor) ● Traffic Advisory Radio (4 existing) – same as HAR devices ● Loop Detectors (190 counting stations in corridor) ● Government-owned cable television station ● Government-owned traffic monitoring airplane
MARC	Maryland Transit	<ul style="list-style-type: none"> ● MTA MARC 	<ul style="list-style-type: none"> ● MARC Monitor and

Network	Stakeholder	Stakeholder Facilities	ITS Infrastructure/ Assets
Commuter Rail Network	Administration (MTA)	<ul style="list-style-type: none"> Operations Center ● MTA MARC Brunswick Line Stations <ul style="list-style-type: none"> ○ Dickerson ○ Barnesville ○ Boyds ○ Germantown ○ Metropolitan Grove ○ Gaithersburg ○ Washington Grove ○ Rockville ○ Garrett Park 	<ul style="list-style-type: none"> Control System ● Radio Communications ● PA Traveler Announcement System ● LED Traveler Information Display Signs ● Station Security Cameras ● Fare Collection System ● SmarTrip Cards ● GPS-based train location and schedule adherence tracking and alert system underway ● Migration to T1 Ethernet backbone for all field devices
Metrorail Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● WMATA Rail Operations Control Center ● WMATA Metrorail Stations <ul style="list-style-type: none"> ○ Shady Grove ○ Rockville ○ Twinbrook ○ White Flint ○ Grosvenor-Strathmore ● WMATA Rail Yard 	<ul style="list-style-type: none"> ● Platform DMS ● CCTVs at each station ● Biological and chemical detection sensors ● Radio Communications ● PA Traveler Announcement System ● Passenger Information Displays (10 existing) ● CCTV surveillance cameras ● RideGuide ● SmarTrip Cards
Metrobus Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● WMATA Bus Operations Control Center ● WMATA Bus Stops ● WMATA Bus Garage 	<ul style="list-style-type: none"> ● OrbCAD NT ● Mobile Data Terminals (MDT) ● Automatic Passenger Counters ● Automatic Vehicle Location (AVL)

Network	Stakeholder	Stakeholder Facilities	ITS Infrastructure/ Assets
			<ul style="list-style-type: none"> ● Fare Payment System ● Bus Annunciation ● CCTV Surveillance Cameras ● Ride Guide ● SmarTrip Card System
Ride On Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Montgomery County Transit Management Center ● Montgomery County Vehicle Service Park ● Montgomery County Bus Depots 	<ul style="list-style-type: none"> ● Orbital Operating System ● Automatic Vehicle Location (AVL) ● Fare payment system ● Bus Annunciation ● CCTV surveillance cameras on buses; video only recorded but not transmitted in real-time ● 10 DMS signs in selected bus shelters ● SmarTrip Cards ● Signal Priority (planned, see below for further information)

3.5 PROPOSED NEAR-TERM NETWORK IMPROVEMENTS

Near-term network improvements proposed for the I-270 ICM Corridor are summarized below. The improvements are categorized by network type and responsible agency; anticipated timetables and completion dates are also shown, where appropriate:

Freeway — Maryland State Highway Administration (MDSHA)

- Upgrade of the Coordinated Highway Action Response Team (CHART) System Software:
 - Upgrade the video system to support IP-based video, which will allow CCTV video and data from CHART cameras to be distributed via the MDOT T1 Ethernet network to all facilities/centers/agencies connected to the CHART network. The project will completed mid-2009.
 - MDSHA is selecting a contractor to develop a new iteration of the CHART platform, which will provide for additional capabilities, including:
 - A Center-to-Center Module.

- Integration with Smart Parking Systems — Providing information to truck stop and rest areas.
 - Cell Phone Probe Data — Integrating cell phone tracking data for speed and travel time information.
 - Enhanced Data Dissemination — Sharing information with the public through notification services (fax, pager, email, Web-based Real Simple Syndication (RSS), WAP/PDA access, etc.).
 - Diversion Route Management — Providing alternative routing and loadings during incident management.
 - Signal Control — Incorporating arterial signal information and command and control support.
- The Emergency Operations Reporting System (EORS) is MDSHA’s system for collecting and distributing maintenance, construction, and adverse weather operations information across the state. The system is being migrated to a Web-based platform to make it easily accessible to all maintenance shops and other facilities on the MDOT network. The system should be fully operational by early 2009.
- Update of the SHA Freeway Incident Traffic Management (FITM) Plans for the I-270 Corridor:
 - MDSHA has documented operational plans for all closures along major interstate corridors within Maryland — primarily within the Washington D.C. and Baltimore Regions. They include route diversion maps and a traffic management measure for closures at specified segments along the interstates. As such, they typically include routing traffic onto arterial routes and back to the interstate at the next exit.
 - FITM plans along I-270 are being updated with input from Montgomery County DPWT and Maryland State Police. The purpose of this update is to improve the management of heavy backups and delays during major closures on interstates.
 - Montgomery County’s traffic operations team will take account of traffic signal system capabilities and current travel patterns in order to efficiently route traffic around incidents.
 - Eventually, the FITM plans will be based on automated signal timing plans so they can be easily activated upon request by MDSHA CHART and/or Maryland State Police.
 - FITM plans in the I-270 ICM Corridor should be complete by late-2009.
- Increase in Number of Closed-Circuit Television (CCTV) cameras, with an adequate number installed by 2010.
- Increase in Number of Highway Advisory Radio (HAR) stations, with an adequate number installed by 2010.
- Increase in Number of Dynamic Message Signs (DMS), with an adequate number installed by 2010.
- Increase in Number of Freeway Sensors, with an adequate number installed by 2010:
 - SHA has detectors on the I-270 corridor used to feed into CHART.

- MDSHA also has an agreement with Mobility Technologies to deploy additional detectors on the I-270 corridor. Data from these detectors are to be fed to CHART for incident detection purposes; however, the agreement prohibits MDSHA from independently disseminating these data, but instead relies on Mobility Technologies to distribute the data via the Traffic.com Web page or other Traffic.com data dissemination outlets.
- Once in place, data from Mobility Technologies' detectors could become a key element for deploying real-time traffic modeling systems (e.g., as part of current work by MDSHA with the University of Maryland), as well as providing more comprehensive traffic flow information through the Traffic.com web site.
- The Intercounty Connector (ICC) linking I-370 and I-95:
 - MDSHA has won approval to proceed with the design and deployment of this four-lane highway connecting I-370 (which, in turn, connects to I-270) with I-95.
 - This roadway is expected to be a toll-road that provides commuters traveling to the Capital Beltway with an alternative route (around I-270) for reaching the Beltway.
 - The ICC is currently scheduled for completion by 2012.
 - Because decisions to proceed with the ICC project are being made independently of the ICM efforts, and involve state- and county-wide policies and actions, the I-270 ICM plan is not predicated on the funding or existence of the ICC.
- Operational Use of the I-270 Simulator for Incident Management purposes on I-270.
- Design and Deployment of the Regional Integrated Transportation Information System (RITIS)
 - The University of Maryland's CATT Laboratory has taken the lead in developing RITIS. A prototype is operational in the Metropolitan Washington Region, with deployment expanding rapidly in 2008.
 - RITIS will collect data of regional interest and fuse the data into regional information that can be used to enhance regional traveler information and transportation management functions performed by member agencies.
 - This system is intended to improve transportation efficiency, safety, and security through the integration of existing transportation, emergency management, and transit systems.
 - Potential benefits include accelerating and broadening the exchange of regional transportation management information between participating agencies in the corridor.
 - RITIS is intended to enhance communications and the coordination of actions and resources when responding to regional incidents, special events, and extreme congestion.

Arterials — Montgomery County DOT

- Update of the Traffic Signal System:
 - Montgomery County DPWT is in the process of updating the traffic signal system to include an actuated traffic signal strategy. The project will commence

in the summer of 2008 with expedited deployment at the intersections within the I-270 ICM corridor. Note that the capability to download timing plans in response to events taking place on I-270 already exists within the current traffic signal control system. Timing plans for these type of events are either existing or will be developed as a backup plan. The project is expected to finish between 2009 and 2013. Priority will be given to signals in the corridor.

- Increase in signalized intersections on an as-needed basis (the current system has a capacity of 1,500 intersections; 700 are presently on-line).
- Increase in Closed Circuit Television (CCTV) cameras:
 - Plans are underway to procure and deploy additional cameras annually, as budgets permit. Expected rate is 20 cameras per year, with an estimated completion date of 2010.
- Development of a connection to the MDOT network via Montgomery County's Fibernet and the SHA connection to the MIEMSS (Maryland Institute for Emergency Medical Services Systems) network, to be completed in 2007.
- Installation of CapWIN mobile data terminals in the Service Patrol vehicles. Expected completion date of 2008.

Railway/Metro

Maryland Transit Administration's (MTA) Maryland Regional Commuter (MARC) Train:

- Consolidation of communications of equipment along the Brunswick Line in order to communicate data from devices at the stations over the MDOT T1 Ethernet backbone, which substantially parallels the rail. This is to be completed by late 2008.
- MARC GPS train location and schedule adherence tracking and alert system (separate from CSX rail line tracking system). This is currently underway, and is projected to be fully operational by 2008.
- Improved fare collection system, including payment using SmarTrip cards. The project is projected to be completed in late 2008.

Washington Metropolitan Area Transit Authority (WMATA):

For the purpose of this listing of near-term improvements, the two types of transportation modes operated by WMATA (Metrorail and Metrobus) are combined here because these improvements affect both modes.

- Regional Smart Card Concept:
 - The Metropolitan Washington, D.C. area is in the process of expanding WMATA's existing SmarTrip smart card system to include local bus (i.e., Ride On) and commuter rail services (i.e., MARC). No target date has been established, but work will likely begin in 2007 and finish in 2009.
- WMATA Bus Operations Control Center (BOCC):
 - WMATA is currently establishing a new BOCC in Landover, Maryland. This facility will be furnished with twelve (12) control center consoles with radio control, computer, display, input, and associated audio equipment. The BOCC will become operational in December 2008.

- Once the Landover BOCC becomes operational, WMATA intends for the current BOCC in downtown Washington D.C to serve as an emergency dispatch center to be used when the new facility is not accessible.
- Transit Traveler Information:
 - The existing “Ride Guide” system is WMATA’s core application that allows commuters to generate trip planning itineraries using the Web, instead of calling WMATA's traditional in-bound customer service representatives.
 - WMATA partners with the major regional and local transit providers within the D.C. area to provide commuters with a single integrated system that can generate a consolidated trip itinerary across the region, even when the trip involves multiple service providers.
 - All commuters using either WMATA and/or its transit partners’ facilities will benefit directly from the anticipated improvements made to the trip planning system.
- Advanced Parking System:
 - WMATA is testing an advanced parking system at the Glenmont Metro Station, which will potentially serve as a prototype for other Metro parking lots. Project to be completed by 2009.
- CAD/AVL System:
 - Integration of the automatic vehicle location (AVL) system with route schedules so that route schedule adherence can be determined in real-time. This information will be sent from Metrobus vehicles to operators at the BOCC via the Mobile Data Terminals (MDTs). Project to be completed in February 2008.
 - Integration of APC, AVM, and Cubic fare boxes with MDT’s. This information will be sent to the BOCC through the MDT’s. Project to be completed in February 2008.
 - Upgrade of CAD/AVL hardware/software. Project to be completed in February 2008.
 - Development of a transit database that will become the central communications path and data interface for future Metrobus systems. Project to be completed in February 2008.

Bus Service — Ride On:

Representative enhancements planned or underway are summarized below:

- The Transit Office plans to deploy software that allows the rescheduling of routes based on system data. Project to be completed in Fall 2007.
- Real-time data sharing with WMATA. Project to be completed in January 2009.
- Integration of Ride On data with emergency operations and homeland security. This task will be accomplished through RITIS implementation, expected in 2008.
- Deployment of mobile data terminals in the vehicles of on-street supervisors to allow supervisors to monitor and track buses while in their cars for rescue and dispatch. Project to be completed in August 2007.

- Improved fare collection system, including Washington Regional SmarTrip payment. This card will work in conjunction with smart fare boxes to track passenger counts and fares. Project to be completed in April 2007.
- Acquisition of more security cameras for installation in buses. This project is ongoing, with adequate infrastructure to support the ICM implementation expected to be in place by 2008.
- Upgrades to Orbital Corporation’s AVL system to include:
 - Bus stop annunciators.
 - Passenger counts with real-time communications to the central system.
 - A single “sign-on” for drivers to automatically program their route into destination signs.
 - Improved system reports.
 - Improved communications using Wi-Fi data uploads and downloads to the buses while they sit in the yard at night.
 - Project to be completed in July 2009.
- Montgomery County (Ride On) Bus Priority – While the upgrade of the AVL system is a separate project from the upgrade of the signal system, the AVL system upgrade is expected to be done by the summer of 2008, at the time the traffic signal control system upgrade will start. Aside from the pilot project, the first intersections to be equipped with signal priority will be along the MD-355 corridor. Full signal priority to be completed between 2009 and 2013, with priority implementations given to those along the I-270 ICM corridor.

3.6 CURRENT NETWORK-BASED INSTITUTIONAL CHARACTERISTICS

The partner agencies involved in the Montgomery County I-270 Integrated Corridor Management initiative are represented on the National Capital Region Transportation Planning Board (NCR/TPB), which is the federally-designated metropolitan planning organization (MPO) for the region. Over the last 15 years, considerable progress has been made in establishing an institutional framework conducive to ITS and operations within the NCR/TPB structure. In addition, there have been a number of ongoing regional operations coordination initiatives, including the Regional Operations Coordination Committee (ROCC) that, since the late 90's, has been working to improve ITS operations planning and coordination. Most recently, transportation agencies in the region have gotten together to strengthen regional coordination and communications on everyday conditions, management, and major regional transportation incidents through creation of the Metropolitan Area Transportation Operations Coordination (MATOC) Program.

It is clear that the current institutional environment in the region lends itself to supporting the I-270 ICM in the near-term and, more importantly, over the long-term as ICM activities become mainstreamed as part of ongoing regional operations initiatives.

Transportation Planning Board and the Subcommittee on Management, Operations, and Intelligent Transportation Systems

The TPB is housed under the Metropolitan Washington Council of Governments (COG). COG is composed of 21 local governments surrounding the nation's capital, plus area members of the Maryland and Virginia legislatures, the U.S. Senate, and the U.S. House of Representatives. COG provides a focus for action and develops sound regional responses to issues such as the environment, housing, economic development, health and family concerns, human services, population growth, public safety, and transportation. The TPB, as the federally designated MPO for the region, prepares transportation plans and programs that the federal government must approve in order for federal-aid transportation funds to be spent in the Washington, D.C. region. Members of the TPB include representatives of local governments; state transportation agencies; the Maryland and Virginia General Assemblies; the Washington Metropolitan Area Transit Authority; and non-voting members of the Metropolitan Washington Airports Authority (MWAA) and federal agencies.

Within the TPB committee structure, a Coordination Planning Subcommittee on Management, Operations, and Intelligent Transportation Systems (MOITS) is responsible for ensuring that the key elements of management, operations, and ITS are reflected in the metropolitan transportation planning process. The Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (SAFETEA-LU) requires statewide and regional transportation plans to consider "operational and management strategies to improve the performance of existing transportation facilities to relieve vehicular congestion and maximize the safety and mobility of people and goods." Major topics that are relevant to the I-270 ICM institutional infrastructure that will be advanced by the TPB through MOITS within the FY 2008 Unified Planning Work Program (UPWP) for Transportation Planning include:

- **Metropolitan Area Transportation Operations Coordination (MATOC) Program and Related Activities:** Coordinate with member transportation agency efforts to strengthen regional coordination and communications on everyday conditions,

management, and major regional transportation incidents, particularly through the MATOC Program (described in further detail below).

- **Traveler Information:** Coordinate enhancement of the collection, processing, and public delivery of real-time roadway and transit condition information, including potential regional Internet-based and “511” information systems and the Regional Integrated Transportation Information System (RITIS) initiative.
- **ITS Architecture and Transportation Technology Development and Application:** Maintain the regional ITS architecture in accordance with federal regulations and facilitate the use of the regional architecture as guidance for regional MOITS project implementations.
- **Traffic and Transit:** Coordinate with regional transit committees on planning and information exchange for traffic management, bus operations, and advanced technology.
- **Traffic Signals:** Work with member agencies to exchange information and coordinate inter-jurisdictional traffic signal operations.
- **Emergency Coordination:** Facilitate coordination between everyday operations planning and overall regional planning for emergencies.

With regard to the last topic, a significant Transportation Emergency/Security Planning program has been established outside of the TPB’s UPWP funded through U.S. Department of Homeland Security and COG local funding. The specialized needs for transportation involvement in Homeland Security directed preparedness are being addressed by the Regional Emergency Support Function #1 (RESF-1) Transportation Committee in the COG public safety committee structure with coordination and support from the MOITS subcommittee of TPB.

Another significant TPB coordination planning responsibility that relates to the I-270 ICM initiative is the Congestion Management Process (CMP). The regional CMP is a required component of the regional transportation planning process and is intended to address the systematic management of traffic congestion and provision of information on transportation system management of traffic congestion and provision of information on transportation system performance. Components of a CMP include a system for data collection and performance monitoring, strategies for addressing congestion, performance measures, or criteria for identifying when action is needed, and a system for prioritizing which congestion management strategies would be most effective. Under the FY08 UPWP, the TPB will undertake an analysis for development of CMP components of the Constrained Long-Range Plan working in coordination with the Travel Forecasting Subcommittee, Commuter Connections Subcommittee, MOITS Subcommittee, Technical Committee, and the Regional Travel Trends Report and Regional Transportation Data Clearinghouse efforts.

Metropolitan Area Transportation Operations Coordination (MATOC) Program

In late 2006, the states of Maryland and Virginia, and the District of Columbia demonstrated their commitment to coordinate and support regional sharing of transportation systems’ conditions and information management during regional incidents by formally executing an agreement for the establishment and maintenance of the Metropolitan Area Transportation Coordination Program. This commitment to coordinate will be manifested through integration of systems’ technologies, improved procedures and planning, and enhanced accuracy and timeliness of transportation information provided to the public. The MATOC Program is led by a Steering Committee currently comprised of representatives from the District Department of Transportation, Maryland Department of Transportation, Virginia Department of Transportation, and the Washington

Metropolitan Area Transit Authority, with COG as the administrative agent. Development and implementation of the MATOC Program is reflected in the Transportation Improvement Program (TIP) of the TPB.

Currently, the MATOC Steering Committee is working on a contract for the services of a Program Implementation Manager (PIM) and technical support team to initiate formal implementation of the program. The PIM will be focusing on the identification of needs and opportunities for systems integration and enhancements and managing the process by which Steering Committee agencies agree to implement actions needed for systems integration. With regard to regional incidents, the PIM will examine ongoing operations and available operating procedures to identify needs and opportunities for interagency standard operating procedures and managing the process by which the Steering Committee agencies implement actions needed to enhance regional operations coordination processes.

MATOC is the oversight body for important regional initiatives such as the Regional Integrated Transportation Information System (RITIS), which will be leveraged extensively by the I-270 ICM project. RITIS is a data fusion and dissemination system that will compile transportation data from each participating agency, standardize it, and make it available to other participating agencies through each agency's existing transportation management system. RITIS will facilitate communications and coordination during incident response and management. It will also archive data for use in transportation-related studies and performance evaluations. In addition to the I-270 ICM partners, current agency participants include DDOT and VDOT.

Regional Operations Coordination Committee

In 1997, a committee called the Regional Operations Coordination Committee (ROCC) was formed to develop a framework for all participating agencies to conduct coordinated transportation management at the regional level. The ROCC's geographic focus is the Maryland National Capital Region and it includes representatives from transportation (traffic and transit) and public safety agencies in the State of Maryland, Montgomery County, and Prince George's County.

Today, the ROCC continues to meet on a regular basis and has served as the catalyst for accomplishing numerous achievements since its inception. Highlights of these achievements include:

- One of the first activities undertaken by ROCC was the development of a Regional Architecture consistent with the National ITS Architecture. This was done years before Regional ITS Architectures became a federal requirement.
- ROCC played a key role in advancing the construction of a Transportation Management Center (TMC) in Prince George's County, Maryland. The Transportation Response Information Partnership (TRIP) Center has been in operation for a number of years and, because of ROCC, was integrated with the Maryland State Highway Administration and Montgomery County TMC after it became operational.
- ROCC was instrumental in facilitating execution of a formal Management and Operations Coordination Agreement between the Maryland State Highway Administration and Montgomery County Department of Public Works and Transportation. The agreement documents the mutual goal of enhancing transportation management and operations functions by sharing information, coordinating activities, and pooling resources while retaining each agency's autonomy.

- ROCC’s early emphasis on tackling interagency and interdisciplinary operational communications served as the catalyst for the Capital Wireless Information Net (CapWIN) Program. CapWIN has developed a software client for field responders that allows for mobile data communications between public transportation and public safety agencies. This highly successful initiative now has its own Board of Directors and boasts 1000+ monthly users across 50+ agencies representing transportation and public safety disciplines.
- Since September 11, 2001, ROCC has served as the focal point in the development of transportation evacuation plans that expand well beyond the District borders into the State of Maryland.
- The ROCC has sponsored development of a number of operational support “tools” such as: “MOVE-IT” forms (in English and Spanish) to help move vehicles involved in “fender-benders” from travel lanes; revised medical examiner forms that allow the gathering of required information quickly in the event of a fatality so that travel lanes can be opened sooner; incident resource documentation; and a handbook for service patrol operators that facilitates communication with Spanish-speaking travelers requiring motorist assistance.

3.7 REGIONAL ITS ARCHITECTURE REVIEW

The I-270 Corridor is documented and depicted in the Maryland Statewide ITS Architecture, which virtually all the I-270 Corridor stakeholders participated in developing. The MD Architecture is available online at: <http://www.itsmd.org/>. The corridor is also part of the Metropolitan Washington Regional ITS Architecture (MWRITSA), which diagrams macro-level, center-to-center communications among stakeholders in the National Capital Region. Because the MWRITSA relies heavily on input from the MD Architecture, this section concentrates on the Maryland Statewide ITS Architecture.

Planned functionality, as reflected in the MD Architecture, includes the following:

- A regional incident and emergency management operations control center to coordinate with state and local TMCs during emergencies. Since the Architecture was published in 2005, this element, called CapCom, has been reduced in scope to an information-sharing and archiving tool call. The new, broader element that has replaced it is referred to as “RITIS/MATOC.” The Maryland Architecture is currently being updated to reflect these changes.
- The ability of Montgomery County to control and manage traffic signal timing plans.
- CAD/AVL systems for transit vehicles and their respective centers, and for that data to be received by travelers.
- A complex parking information system, by which parking management centers can send parking data to TMCs and ISPs, with the option of implementing a parking reservations system.
- An Archive Management Center that collects transit, traffic, and other data from all stakeholders in the corridor.

The Maryland ITS Architecture Advisory Panel maintains the MD Architecture and provides a conformity form online for users to submit projects for conformity assessment. The Conformity Form and instructions are available online at:

http://www.itsmd.org/index.php?page_id=919.

Conformity Forms are reviewed and archived in support of project conformity to the Architecture and maintaining a repository of necessary Architecture updates. The MD Architecture is currently being updated, with the next version to be published in late 2007. Projects developed as part of the I-270 ICM effort will be submitted to the Maryland ITS Architecture Advisory Panel via the Conformity Form. The projects will then be evaluated for compliance with the Architecture; once designs are finalized, the Maryland Architecture will be updated to reflect those designs.

3.8 CORRIDOR ISSUES AND NEEDS

This section describes the principal issues and needs of the I-270/Montgomery County Corridor. These needs were identified during workshops and discussions involving key stakeholders. Needs were organized and examined by five operational areas, as follows:

- Incident and emergency management,
- Traffic signals,
- Transit and commuter management.
- Traveler information, and
- Infrastructure.

The most important needs identified by stakeholders are summarized in Table 3-10, below.

Table 3-10. I-270 Corridor Critical Needs

Incident and Emergency Management
<p>Issue: Non-recurring congestion is a monumental impediment to mobility in the corridor.</p> <p>Needs:</p> <ul style="list-style-type: none"> • Stakeholder agencies — both highway and transit — need clearly articulated roles, responsibilities, and procedures for coordinated management and response to incidents and conditions in the corridor. • Agencies need concrete plans for diverting traffic from freeways to arterials. • Agencies need innovative, synergistic, and multi-modal approaches to managing incidents and congestion. • Agencies need to detect and verify incidents quickly and efficiently. • Agencies need mechanisms and procedures for sharing information on incidents and conditions. • Agencies need tools and procedures that optimize operational decision-making. • Agencies need metrics for measuring and assessing performance and conditions in the corridor, both on freeways and arterials.
Traffic Signals

Issue:

Traffic signals in the corridor are often not optimized for conditions.

Needs:

- Traffic signals on arterials along the corridor need to be able to respond instantly to changing traffic conditions.
- Traffic signals need to be able to respond to changing conditions both on the affected arterials and adjacent roadways, including I-270.
- Before signal systems are modified, determination is needed regarding optimal signalized responses under alternative scenarios.
- Traffic signal prioritization for emergency vehicles is desirable.

Transit and Commuter Management

Issue:

Transit services in the corridor are often inconvenient for rush-hour commuters.

Needs:

- Commuters need reliable transit information and services.
- Commuters need on-demand access to rail/bus schedules and rail/bus real-time status.
- Commuters need on-demand access to information comparing travel times by automobile and transit in real-time.
- Commuters need to know where available parking spaces in commuter lots are located.
- Commuters need easy and convenient access from commuter lots to Metrorail and MARC stations.
- An infrastructure that encourages unplanned automobile commuter shifts to transit, when conditions warrant, is desirable.
- Commuters desire broader, more integrated usage of “smartcards” in the corridor.
- Use of HOV lanes needs to be made easier and more convenient.

Traveler Information

Issue:

Travelers often do not have sufficient information about roadway, traffic, and transit conditions to make informed travel decisions.

Needs:

- Travelers need access to accurate, reliable, and multi-modal travel information, both pre-trip and en-route.
- Travelers need travel conditions information in sufficient detail that they can make “smart” decisions about staying the course, selecting alternate routes, shifting travel modes, skipping or postponing travel, etc.
- Travelers need information about alternative routes/modes when conditions so dictate.

Infrastructure
<p>Issue:</p> <p>Infrastructure limitations sometimes impair responsiveness to changing traffic and congestion conditions.</p> <p>Needs:</p> <ul style="list-style-type: none"> ● Expanded detection and verification capabilities are needed across all transportation networks. ● Expanded capabilities are needed to deliver traveler information to customers. ● Partner agencies need to be able to assess corridor-specific performance.

3.9 POTENTIAL FOR ICM IN THE I-270 CORRIDOR

The I-270/Montgomery County Corridor consists of the following independent networks:

- Interstate 270, operated by MDSHA.
- MD-355 and other local arterials, operated by DPWT.
- MARC Brunswick Commuter Rail, operated by MTA.
- Metrorail Red Line, operated by WMATA.
- Metrobus, MTA Commuter Bus, and Ride On, operated by WMATA, MTA, and Montgomery County, respectively.

The corridor is exceptionally "directional," connecting most commuters with their work place locations in Washington D.C., Northern Virginia, or Montgomery County itself.

During non-rush hour periods, I-270 often has sufficient capacity. However, during rush hour, the commuter volume routinely exceeds capacity. This is due, in large part, to the fact that traffic cannot leave the corridor (southbound in the morning and northbound in the evening) due to capacity limitations on the Capital Beltway and bottlenecks (reduction of the number of lanes from 6 to ultimately 2) in Frederick County. Commuters entering the corridor from the north do not have many choices in terms of alternate routes. The main roadways are I-270 and MD-355, which run parallel to each other.

Alternatively, commuters can choose to use the MARC commuter train or the WMATA Metro Rail system. Because the MARC commuter train makes only a few stops in the corridor, commuters who do not work directly at those stations need to switch to either Metrorail or bus. The Metrorail system has multiple stops serving many commuters, but it only starts at Shady Grove, which is roughly halfway down the corridor. This means that commuters using Metrorail either drive or bus to the rail stations. Those who drive to the Metro stations must first park before accessing the rail system.

Nearly everyday, unplanned events, notably incidents within or outside the corridor, have profound impacts on transportation conditions in the corridor, frequently producing large-scale travel delays, secondary incidents, etc. Of course, this produces frustration and can impact the area's economic competitiveness, particularly when the congestion in the corridor is perceived as systemic.

The I-270 Corridor stakeholders have worked for many years to address these transportation challenges. These stakeholders have learned that through careful, structured coordination, adverse transportation conditions can often be most effectively and efficiently managed.

3.10 I-270 CORRIDOR VISION

In the future, transportation operations within the I-270/Montgomery County Corridor function at peak efficiency by optimizing use of the capacities of the different transportation modes within the corridor. Key technology systems and decision-support tools within the corridor are interoperable and real-time information on road and traffic conditions is commonly exchanged among the corridor's managing partners and stakeholders. Operational strategies within the corridor are routinely adjusted in response to changing corridor conditions. Strategic management of the corridor emphasizes multi-modalism and commuters have flexible access to real-time transit and parking lot information. Travelers are apprised of current road surface, traffic, and transit conditions — pre-trip and en-route; this information is then used to make informed travel and routing decisions. Performance metrics are employed across the corridor to assess variations in efficiency and safety benchmarks, refine the existing approaches, and formulate and deploy follow-on operational strategies.

4. ICM SYSTEM OPERATIONAL CONCEPT

This section describes the ICM operational concept for the I-270/Montgomery County Corridor.

4.1 CORRIDOR GOALS AND OBJECTIVES

To achieve the corridor-wide vision enunciated in Section 3.10, *I-270 Corridor Vision*, four ICM goals were identified, as follows:

- Optimize mobility, reliability, and safety;
- Strengthen corridor-level decision support;
- Enhance reliable, real-time information to customers; and
- Promote multi-modalism.

These goals emerged from an analysis of corridor needs as documented in Section 3.8, *Corridor Issues and Needs*. The issues and needs were prioritized according to such factors as (1) the level of improvement in transportation conditions that could potentially be realized if the need was addressed, (2) the speed at which the need could reasonably be addressed, and (3) the ease with which the need could be mitigated. Goals intended to address the priority needs were then identified.

Table 4-1, below, defines the four goals and specifies the objectives associated with each.

Table 4-1. I-270/Montgomery County Corridor Goals and Objectives for ICM

Goals	Objectives
<p><i>Optimize Mobility, Reliability, and Safety:</i> Achieve the highest practical levels of mobility through the corridor. Maximize mobility and minimize delays associated with incidents and other non-recurring conditions. Make the travel experience more predictable and reliable so that day-to-day fluctuations in travel times are less extreme. Optimized performance, with less volatility and reduced exposure to adverse conditions, will affirmatively impact safety.</p>	<ul style="list-style-type: none"> • Reduce overall trip and person travel-time. • Improve travel predictability and reliability. • Lessen the probability of secondary crashes by responding expeditiously to incidents. • Maximize inter-modal activity. • Empower customers to make intelligent travel choices. • Measure, monitor, and assess performance.
<p><i>Strengthen Corridor-Level Decision Support:</i> Upgrade the information-exchange infrastructure to more rapidly put comprehensive, fact-based information on incidents and roadway conditions into the hands of responders, traffic managers, and other stakeholders.</p>	<ul style="list-style-type: none"> • Optimize identification of incidents and adverse conditions. • Enhance the exchange of accurate, timely information among partners. • Emphasize corridor management and decision-making based on data and factual circumstances.

<p>Furnish tools to stakeholders to support adept decision-making that results in faster, more efficient response and clearance.</p>	<ul style="list-style-type: none"> ● Improve rapid response to changing traffic, incident, and weather conditions.
<p><i>Enhance the Dissemination of Reliable, Real-Time Information to Customers:</i> The precepts here are two-fold: (1) travelers deserve to be informed about roadway/transit conditions and circumstances; and (2) as travelers are kept apprised of conditions, they will be able to make intelligent choices and thereby become active agents in optimizing mobility.</p>	<ul style="list-style-type: none"> ● Expand and standardize the types of information available to travelers. ● Emphasize dissemination of real-time conditions and status data across modes. ● Furnish adequate information to travelers so they can make informed decisions on routing, modal shifts, etc.
<p><i>Promote Multi-Modalism:</i> Encourage reductions in the volume of vehicles traversing the corridor by making transit and carpooling more attractive to customers. Even for those travelers who are loathe to abandon single-occupant vehicle travel permanently, encourage ad hoc shifts to alternative modes when conditions warrant.</p>	<ul style="list-style-type: none"> ● Emphasize bus and rail as practical alternatives to roadway travel. ● Promote park-and-riding and park-and-carpooling. ● Simplify inter-modal transfers.

Note the keen interrelationships among the four goals and their associated objectives. For instance, the second, third, and fourth goals, if successfully accomplished, will contribute positively to mobility (Goal 1). Similarly, expanded use of alternative travel modes, notably transit (Goal 4), will hinge, in large part, on the ability to communicate timely and reliable transit information to travelers.

Table 4-2, on the following pages, examines the relationships between the corridor needs, identified in Section 3.8, *Corridor Issues and Needs*, and the ICM goals identified above. The needs are organized by the five operations areas previously identified. Additionally, distinctions are drawn between primary and secondary corridor needs. “Primary” needs, those that are asterisked (*), are those needs expected to be addressed in this ICM effort. “Secondary” needs are also important, but are not planned for redress during the initial ICM activities.

Table 4-2. Relationship Between I-270 ICM Corridor Needs and Goals

Corridor Needs	Optimize Mobility, Reliability, and Safety	Strengthen Corridor-Level Decision Support	Enhance Reliable, Real-Time Information to Customers	Promote Multi-Modalism
Incident and Emergency Management				
Stakeholder agencies — both highway and transit — need clearly articulated roles, responsibilities, and procedures for coordinated management and response to incidents and conditions in the corridor.*	●	●		
Agencies need concrete plans for diverting traffic from freeways to arterials.*	●	●	○	●
Agencies need innovative, synergistic, and multi-modal approaches to managing incidents and congestion.*	●	●	●	●
Agencies need to detect and verify incidents quickly and efficiently.*	●	●	○	
Agencies need mechanisms and procedures for sharing information on incidents and conditions.*	●	●	○	
Agencies need tools and procedures that optimize operational decision-making.*	●	●		
Agencies need metrics for measuring and assessing performance and conditions in the corridor, both on freeways and arterials.*	●	○		
Traffic Signals				
Traffic signals on arterials along the corridor need to be able to respond instantly to changing traffic conditions.*	●			
Traffic signals need to be able to respond to changing conditions both on the affected arterials and adjacent roadways, including I-270.*	●			
Before signal systems are modified, determination is needed regarding optimal signalized responses under alternative scenarios.*	●	●		

Corridor Needs	Optimize Mobility, Reliability, and Safety	Strengthen Corridor-Level Decision Support	Enhance Reliable, Real-Time Information to Customers	Promote Multi-Modalism
Traffic signal prioritization for emergency vehicles is desirable.	●			
Transit and Commuter Management				
Commuters need reliable transit information and services.*	●		●	●
Commuters need on-demand access to rail/bus schedules and rail/bus real-time status.*			●	●
Commuters need on-demand access to information comparing travel times by automobile and transit in real-time.*	○		●	●
Commuters need to know where available parking spaces in commuter lots are located.*			●	●
Commuters need easy and convenient access from commuter lots to Metrorail and MARC stations.*				●
An infrastructure that encourages unplanned automobile commuter shifts to transit, when conditions warrant, is desirable.*				●
Commuters desire broader, more integrated usage of “smartcards” in the corridor.*				●
Use of HOV lanes needs to be made easier and more convenient.	●		○	
Traveler Information				
Travelers need access to accurate, reliable, and multi-modal travel information, both pre-trip and en-route.*			●	●
Travelers need travel conditions information in sufficient detail that they can make “smart” decisions about staying the course, selecting alternate routes, shifting travel modes, skipping or postponing travel, etc.*	○		●	○
Travelers need information about	○		●	

Corridor Needs	Optimize Mobility, Reliability, and Safety	Strengthen Corridor-Level Decision Support	Enhance Reliable, Real-Time Information to Customers	Promote Multi-Modalism
-----------------------	---	---	---	-------------------------------

alternative routes/modes when conditions so dictate.*

Infrastructure

Expanded detection and verification capabilities are needed across all transportation networks.*	●	●	○	
Expanded capabilities are needed to deliver traveler information to customers.*	○		●	
Partner agencies need to be able to assess corridor-specific performance.*	●	●	●	○

* = Primary Need	● = Goal Directly Addresses Need	○ = Goal Indirectly Addresses Need
------------------	----------------------------------	------------------------------------

Stakeholders along the corridor were meticulous about distinguishing between primary and secondary needs. The topic of improved car-sharing opportunities is illustrative of these deliberations. HOV lanes are an essential feature of the current I-270 landscape; there are also times during typical rush-hour periods that the lanes are underutilized. Why not, then, identify strategies for increasing HOV-lane usage? The answer is that key decision makers do not perceive much potential for increased HOV utilization, at least in the short-term. For one thing, commuters along I-270 begin and end their trips at different points along and beyond the corridor — unlike other corridors, there are few logical population centers and staging areas on I-270 for the large-scale formulation of carpools. For another, many AM commuters are traveling southward on I-270 and continue on the Capital Beltway — at present, the Beltway has no HOV lanes, so even carpools must often wade through bumper-to-bumper traffic. Additionally, some I-270 commuters find it difficult and stressful to navigate their way out of the HOV lanes when it is time to exit.

For these and other reasons, key I-270 stakeholders concluded that expending significant ICM resources on HOV activities would not be especially productive and counseled against it. Opportunities, conditions, policies (e.g., adoption of HOT lane strategies), etc. could, of course, change in the future and compel reclassification of HOV utilization as a primary need.

4.2 ICM FRAMEWORK

The I-270/Montgomery County Corridor is a mature corridor that is generally well-managed. The corridor — particularly the interstate — is outfitted with a respectable network of detection devices, cameras, and variable message signs. The transportation corridor is unusual in that it does not stretch from a bedrock suburban community into a traditional urbanized region. Rather, it is a highly decentralized corridor that moves commuters to a range of destination centers along the corridor itself, but also to additional wide-ranging destinations in Maryland, Virginia, and Washington, D.C. During rush hour periods, the corridor often functions at the cusp of its capacity limits, with congestion rampant and vehicles plodding along, but no place to go.

With these conditions as a backdrop, the general framework for ICM system deployment in the corridor may be summarized as follows:

- Distinguish corridor optimization from roadway capacity limits and focus the ICM efforts on the former.
- Establish an operations management infrastructure for the corridor. This foundational infrastructure will support near-term operational needs (i.e., those primary needs to be addressed during initial ICM system deployment), but long-term operational needs as well.
- Create this operations infrastructure out of state, regional, and local initiatives already underway.
- Add value to the existing initiatives by enhancing functionality and deploying prototypes in the I-270 Corridor.
- Emphasize realistic, manageable projects that can be implemented quickly and inexpensively and that do not require significant policy or institutional changes.

In other words, the contemplated framework is to build the ICM infrastructure using operations initiatives already underway in and around the I-270 Corridor. These concepts are further elaborated on below.

4.3 ICM APPROACHES

Five specific ICM approaches, all building on existing initiatives in the corridor or the surrounding metropolitan Washington, D.C. region, are anticipated:

- Prototype and deploy the Regional Integrated Transportation Information System (RITIS).
- Optimize traffic signals on arterials.
- Deliver computer-aided dispatch/automatic vehicle location (CAD/AVL) information to transit users.
- Deliver parking space availability information to commuters.
- Measure operations performance.

These approaches are not new or groundbreaking, but instead build on efforts already underway in the corridor, and synthesize these efforts into a cohesive ICM framework that is realistic and effective.

The five approaches are briefly profiled below.

4.3.1 Prototype and Deploy Enhanced RITIS

Status

- A RITIS ConOps is under development for the metropolitan Washington, D.C. region. RITIS exists as a limited prototype in the region, primarily as a Web-based platform with connectivity to four TMCs in the Metropolitan Washington region. RITIS is a data fusion and dissemination system for transportation data. Its primary focus is center-to-center communications during the management of incidents and congested conditions; it also has potential utility as a traveler information tool. In addition to transportation stakeholders in the I-270 Corridor, RITIS will interface with the Department of Homeland Security and other security agencies in the region.

ICM Plan

- Implements a fully-functional, enhanced RITIS prototype in the corridor.

Utility

- Demonstrates RITIS utility and functionality at a sub-regional level.
- Implements RITIS as an information-exchange and decision-support tool for traffic managers, emergency responders, transit managers, security personnel, etc.
- Supports traveler information activities in the corridor.
- Supports assessment of performance by archiving corridor metrics data.

Inputs

- Incident information, transit schedules, detector data, and other key elements from member agencies.

Outputs

- Information sharing policies and procedures.
- Information for agencies concerning corridor-wide incidents, events, conditions, and operations – packaged in accordance with agencies’ needs.
- Traveler information for media and dissemination directly to travelers.
- Data in support of performance measurements.

4.3.2 Optimize Traffic Signals on Arterials

Status

- A Montgomery County Traffic Signals Optimization ConOps has been completed. The physical upgrade is planned to start by the summer of 2008 with a deployment schedule over 4 years. The intersections within the I-270 ICM corridor will be upgraded first with an expected deployment by mid-2009.

ICM Plan

- Adds an automated, condition-responsive capability to traffic signals on arterials in the I-270 Corridor.

Utility

- Traffic signal timings on arterials adjust to accommodate conditions on I-270 and on the surrounding roadways.

Inputs

- Incident information and conditions on adjacent roadways.

Outputs

- Enhanced, adaptive signal timing plans that improve vehicle throughput, both under normal conditions and during incidents.

4.3.3 Deliver CAD/AVL Status Information to Transit Users

Status

- WMATA and Montgomery County are installing AVL on transit buses.
- The primary focus of these efforts is on improved fleet management.

ICM Plan

- Focuses on putting real-time bus status information in the hands of commuters, both pre-trip and en-route.
- The add-on effort extends to rail transit information.

Utility

- Commuters are apprised of next bus locations and estimated arrival times — via the Web, cell phones and PDAs, and on display devices at select locations, such as bus stops.

Inputs

- AVL data from buses.

Outputs

- Bus arrival times posted at bus stops, accessible via the web, cell phones, and PDAs.

4.3.4 Deliver Parking Availability Information to Commuters

Status

- Selected parking lots in the corridor are outfitted with devices that identify parking space availability; this information is currently communicated to travelers over the Web.

ICM Plan

- Extends the capability to key public commuter lots in the corridor.
- Delivers parking space availability information to travelers, pre-trip and en-route.

Utility

- Commuters are apprised of available parking locations — via the web, cell phone and PDA, and on display devices at select locations.

Inputs

- Parking sensor volume data.
- Total parking lot capacity data.
- Algorithm for calculating rate of fill.

Outputs

- Real-time parking availability and estimated time of full capacity, to be transmitted to travelers via the web, cell phone, PDA, and displayed on devices at select locations.

4.3.5 Measure Operations Performance

Status

- Maryland’s CHART program identifies key parameters for assessing performance.
- The RITIS concept includes generating and archiving performance data.

ICM Plan

- Implements key CHART performance metrics in the corridor.
- Employs RITIS to generate and track performance data.
- Interpretation of data is performed by CHART.

Utility

- Key parameters, including travel time reliability, delays, incident severity, incident cleanup and recovery times, transit/parking utilization, etc. are gathered, tracked, analyzed, and reported.

Inputs

- Operations data collected by RITIS, including incident data, response times, clearance times, volumes, speeds, etc.

Outputs

- From CHART, analysis of performance measurement and recommendations on key areas for improvement.

4.4 APPLICATION OF ICM APPROACHES AND STRATEGIES

Table 4-3, below, identifies specific operational strategies associated with each of the five ICM approaches enumerated above. Most of the strategies have been custom-defined specifically for the I-270 Corridor requirements.

Table 4-3. Proposed ICM Approaches and Strategies for the I-270 Corridor

Prototype and Deploy Enhanced RITIS
<ul style="list-style-type: none">• Prepare/update corridor incident response plans.• Establish publish/subscribe connections with key corridor stakeholders.• Automate real-time information-sharing among corridor stakeholders.• Provide real-time, corridor-based traveler information to media and other ATIS providers via the Web and direct data feeds.• Provide real-time corridor traveler information, including transit, to travelers via the Web, 511, mobile devices, and in-vehicle devices.• Provide real-time information to agencies to aid in decision support.• Archive corridor transportation, traffic, transit, and incident response data for performance measurement.
Optimize Traffic Signals on Arterials

<ul style="list-style-type: none"> • Develop operational strategies, responses, and procedures. • Enable automated traffic-responsive and traffic-adaptive operation of signals. • Include enhanced capabilities such as potentially providing priority to Ride On and Metrobus. • Evaluate performance of the Traffic Signal System and arterial operations through the collection and processing of current information on systems performance.
Deliver CAD/AVL Status Information to Transit Users
<ul style="list-style-type: none"> • Define CAD/AVL information procedures and protocols. • Integrate the CAD/AVL system on WMATA buses with the system on Ride On buses. • Build on the integrated system to provide automated information-sharing on bus and train locations between WMATA and Ride On. • Use AVL data to furnish real-time transit information to travelers, including bus location, next bus/train arrival time, bus/train schedules, etc. • Use AVL data for bus schedule adherence evaluation.
Deliver Parking Availability Information to Commuters
<ul style="list-style-type: none"> • Define parking availability information procedures and protocols. • Expand ongoing pilot projects in the corridor to additional parking lots. • Disseminate real-time parking space availability to travelers at remote locations using DMS, mobile phones and other personal information devices, Web sites, etc. • Publicize these measures to encourage park-and-ride in the corridor.
Measure Operations Performance
<ul style="list-style-type: none"> • Identify parameters and procedures for assessing performance from CHART and RITIS. • Expand measures to include other factors (e.g., transit). • Gather pertinent data and archive in RITIS. • Analyze data to assess performance. • Disseminate performance findings to stakeholders.

Table 4-4, below, compares the relationship between the ICM operational strategies, above, and the I-270 Corridor goals previously identified.

Table 4-4. Relationship between I-270 ICM Operational Strategies and Corridor Goals

<i>Strategies</i>	<i>Optimize Mobility, Reliability, and Safety</i>	<i>Strengthen Corridor- Level Decision Support</i>	<i>Enhance Reliable, Real- Time Information to Customers</i>	<i>Promote Multi- Modalism</i>
Prototype and Deploy Enhanced RITIS				

<i>Strategies</i>	<i>Optimize Mobility, Reliability, and Safety</i>	<i>Strengthen Corridor-Level Decision Support</i>	<i>Enhance Reliable, Real-Time Information to Customers</i>	<i>Promote Multi-Modalism</i>
Prepare/update corridor incident response plans.	●			
Establish publish/subscribe connections with key corridor stakeholders.	○	●	○	
Automate real-time information sharing among corridor stakeholders.	○	●		
Provide real-time corridor based traveler information to media and other ATIS providers via Web and direct data feeds.	●	●	●	
Provide real-time corridor traveler information, including transit, to travelers via Web, 511, mobile devices, and in-vehicle devices.	●	●	●	○
Provide real-time information to agencies to aid in decision support.	○	●		
Archive corridor transportation, traffic, transit, and incident response data for performance measurement.	○	●		
Optimize Traffic Signals on Arterials				
Develop operational strategies, responses, and procedures.	●	●		
Enable automated traffic responsive and traffic adaptive operation of signals.	●	○		
Include enhanced capabilities such as potentially providing priority to Ride On and Metrobus.	●			●
Evaluate performance of the Traffic Signal System and arterial operations through collection and processing of current information on system performance.	●	○		
Deliver CAD/AVL Status Information to Transit Users				
Define CAD/AVL information procedures and protocols.			●	●

<i>Strategies</i>	<i>Optimize Mobility, Reliability, and Safety</i>	<i>Strengthen Corridor-Level Decision Support</i>	<i>Enhance Reliable, Real-Time Information to Customers</i>	<i>Promote Multi-Modalism</i>
Integrate CAD/AVL system on the WMATA buses running in the corridor with the Ride On system.	●		○	○
Build on the integrated system to provide automated information sharing about the location of transit buses and rail.	○	●		○
Use AVL data to furnish real-time transit information to travelers, including bus location, next bus/train arrival time, bus/train schedules.	○		●	●
Use AVL data for bus schedule adherence evaluation.	●			
Deliver Parking Availability Information to Commuters				
Define parking availability information procedures and protocols.	●			○
Expand ongoing pilot projects in the corridor to additional parking lots.	○		●	○
Disseminate real-time parking space availability to travelers at remote locations using DMS, mobile phones and other personal information devices, Web sites, etc.	○	○	●	●
Publicize these measures to encourage park- and-ride in the corridor.			○	●
Measure Operations Performance				
Identify parameters and procedures for assessing performance from CHART and RITIS.	●			
Expand measures to include other factors (e.g., transit)	●			○
Gather pertinent data and archive in RITIS.	○			
Analyze data to assess performance.	○	○		
Disseminate performance findings to stakeholders.	●			●

<i>Strategies</i>	<i>Optimize Mobility, Reliability, and Safety</i>	<i>Strengthen Corridor- Level Decision Support</i>	<i>Enhance Reliable, Real- Time Information to Customers</i>	<i>Promote Multi- Modalism</i>
• = Goal Directly Addresses Strategy o = Goal Indirectly Addresses Strategy				

4.5 ICM CONCEPT ASSET REQUIREMENTS AND NEEDS

This section identifies the assets required for a successful implementation of ICM for the I-270 Corridor based on approaches and strategies described in the Section 4.2, *Application of ICM Approaches and Strategies*. Tables in this section list both (1) the existing assets in the corridor, and (2) the planned assets expected to be required in the future for the ICM initiative to function efficiently. The ICM requirements^{fn4} are organized by the following categories:

- Market Packages. The Market Packages represent network systems and identify specific services; they have been extracted directly from the National ITS Architecture. Table 4-5, below, lists the market packages that exist or are planned for the I-270 Corridor.
- Communication Subsystems. Table 4-6 lists the communications-related assets expected to be required for I-270 Corridor ICM implementation. These assets include types of communications (e.g., center-to-field, as identified in the National ITS Architecture), interfaces to systems, and associated ITS standards.
- Corridor Asset Requirements. Table 4-7 lists the assets required for implementation of ICM in the I-270 Corridor. The table contains four columns that address different asset types:
 - o Operational Area: In order to facilitate tracking the assets to specific needs, these assets are categorized into the five operational areas.
 - o Network Subsystems & Technologies: The network subsystems and technologies provide more specific information on the ITS-based requirements, such as specific field devices, hardware, and system functionality.
 - o Information/Data: This column lists the data and other information to be gathered by the network systems, and subsequently shared among the stakeholders and corridor travelers.
 - o Other Operational/Performance Assets: These include the regional/multi-system market packages, policies, agency responsibilities, regional coordination, and other assets that cannot be mapped to specific categories.

Table 4-5. I-270 Corridor Market Packages

Market Packages	
<ul style="list-style-type: none"> • Network/Probe Surveillance • Surface Street Control • Freeway Control • Traffic Information Dissemination • Traffic incident Management 	<ul style="list-style-type: none"> • Emergency Call Taking and Dispatch • Roadway Service Patrols • Transportation Infrastructure Protection • Early Warning • Wide Area Alert • Disaster Response & Recovery

Market Packages	
<ul style="list-style-type: none"> ● Traffic Forecast & Demand Management ● Emissions Monitoring / Management ● Parking Facility Management ● Roadway Closure Management ● Transit Vehicle Tracking ● Transit Fixed Route Operations ● Transit Passenger and Fare Management ● Transit Traveler Information ● ISP Traveler Information (broadcast, interactive, route guidance) ● HAZMAT Management ● Emergency Routing 	<ul style="list-style-type: none"> ● Evacuation & Re-Entry Management ● Disaster Traveler Information ● ITS Data Mart/Warehouse ● Maintenance/Construction Vehicle & Equipment Tracking ● Road Weather Data Collection ● Weather Information Processing and Distribution ● Work Zone Management ● Maintenance & Construction Activity Coordination ● Other (e.g., Asset Management System)

Table 4-6. I-270 Corridor Communications Infrastructure

Communications Subsystems	
<ul style="list-style-type: none"> ● Center-to-Center Communications ● Center-to-Field Communications ● Roadside-to-Vehicle Communications ● Center-to-Vehicle Communications ● ITS Standards for Data Formats and Data-Transfer Functions ● Video Transmission Standards (digital, analog) ● Voice Communications ● Capacity for Data Distribution ● Capacity for Video Distribution 	<ul style="list-style-type: none"> ● Capacity/Frequencies for Voice Communications (including interoperability) ● Interfaces to Network Systems ● Interfaces to Emergency Service Systems (CAD) ● Interfaces to Proprietary/Legacy Systems ● Interfaces to ISPs (data and video export) ● Interfaces to Financial Transaction Network ● Interfaces to Internet ● Security Firewalls

Table 4-7. I-270 Corridor Asset Requirements

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
Incident and Emergency Management	<ul style="list-style-type: none"> ● Automated Incident Detection ● Incident Detection (call-in, other) ● Incident Reporting System (GIS, common display) ● Emergency Vehicle Priority/Preemption (Intersection/Vehicles) ● Service Patrol Vehicles ● Montgomery County Traffic Monitoring Airplane 	<ul style="list-style-type: none"> ● Event/Incident Information <ul style="list-style-type: none"> ○ Location ○ Type ○ Time ○ Number of vehicles ○ Lane closures ○ Responding agencies ● Incident Status/Details ● ETP & ERU Vehicle Location Data ● Maintenance/Construction Events ● Maintenance Vehicle Location ● Incident Response Plans/Guidelines/Teams 	<ul style="list-style-type: none"> ● Response Plans ● Online Decision Support (for selecting response plans) ● Definitions of Responsibilities of Agencies ● Common Policies for Incident Reporting and Response ● Accuracy of Data ● Surveillance Coverage ● Special Event Plans
Traffic Signals	<ul style="list-style-type: none"> ● Traffic Signal Control/Monitoring (TOD schedule) ● Traffic Signal Control/Monitoring (traffic adaptive) 	<ul style="list-style-type: none"> ● Traffic Signal Locations ● Traffic Signal Status (Signal, phasing, timing plans, flashing, preemption, etc.) 	<ul style="list-style-type: none"> ● Ability for Priority Logic at Intersections

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
Transit and Commuter Management	<ul style="list-style-type: none"> ● Parking Surveillance/Occupancy Equipment ● Parking Payment Equipment ● Transit Agency Operations Control Center ● Transit Schedule Performance Monitoring ● Passenger Counting Equipment ● Electronic Fare-Collection Equipment (e.g., SmartCard) ● Transit Public Address System ● Transit Trip Planning System ● Spare Transit Vehicles/Operators ● Transit Priority Equipment (Intersection & Transit Vehicles) ● Train Location and Schedule Adherence Tracking and Alert System 	<ul style="list-style-type: none"> ● Detector Data <ul style="list-style-type: none"> ○ Link volumes ○ Link occupancies ○ Link/spot speeds from RTMS ○ Link travel times ○ Intersection approach volumes ○ Ramp queues ● Average Vehicle Occupancy ● Parking Space Availability ● Parking Fees ● Parking Equipment Status ● Transit Schedules ● Transit Vehicle Location ● Schedule or Headway Status/Deviation ● Transit Vehicle Headways ● Link Travel Times ● Priority Requests ● Next Vehicle Arrival ● Transit Fares ● Average and Real-Time Vehicle 	<ul style="list-style-type: none"> ● Regional Parking Management (MP) ● Multi-Modal Coordination (MP) ● Information Exchange Network/Common displays for data entry/display ● Regional/Sub-Regional ITS Architecture ● Availability of Spare Network Capacity ● Data Aggregation/Storage of Processed Data on RITIS for Subsequent Analysis ● Corridor Models (simulation) ● Common Fare-Collection Technology ● Priority Logic at Intersections

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
		Occupancy <ul style="list-style-type: none"> ● Available Transit Vehicles/Location ● Ridership Data ● Maintenance Data ● Device Status 	
Traveler Information	<ul style="list-style-type: none"> ● DMS on Freeway and Arterials ● Internet Traveler Information ● Telephone-Based ATIS (511) ● Montgomery County Cable Television Station 	<ul style="list-style-type: none"> ● DMS Location/Status ● HAR Location/Status ● Other Traveler Information Devices 	<ul style="list-style-type: none"> ● Vehicle Location Accuracy ● Corridor Agency Websites ● Private Sector Websites
Infrastructure	<ul style="list-style-type: none"> ● ATMS Software ● EORS Software ● RITIS ● Traffic Detectors/Roadway Surveillance/Vehicle Probes ● CCTV (video surveillance) ● Air-Quality Sensors ● Road Weather Information Sensors ● Public Safety CAD 	<ul style="list-style-type: none"> ● Detector Locations ● CCTV Locations ● Electronic Toll/Fare/Parking Equipment ● Video Images/Snapshots ● Video Control ● Contact Lists ● Air Quality ● Road Surface Conditions 	<ul style="list-style-type: none"> ● Regional/Sub-Regional ITS Architecture ● Vehicle Location Accuracy ● Surveillance Coverage ● Special Event Plans ● System Back-Up/Disaster Recovery

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
	<ul style="list-style-type: none"> ● Real-Time Conditions Data Base/Common Displays ● Maintenance Vehicle Location (AVL/GPS) 		

It is informative to note that most of the above-mentioned assets are cross-cutting and there exist several interrelationships between the columns. For instance, roadway monitoring assets listed in the "Network Subsystems and Technologies" column, such as traffic detectors, CCTV, and road weather sensors, provide or generate the traffic characteristics, video detection data, weather data, etc. listed in the "Information/Data" column. Also, the items included in the "Communications Subsystems" table are necessary to technically integrate all of these systems and devices into a corridor-based system. The "Other Performance/Operational Assets" support the corridor-wide policy, coordination, operational, and institutional elements.

The priorities associated with these ICM assets are based on the primary needs and associated ICM corridor approaches addressed in Sections 4.6 and 4.7. For example, roadway monitoring devices that provide data to support the prototyping and deployment of RITIS gain precedence over air-quality monitoring assets, which is a support strategy for performance monitoring.

4.6 COMPARISON OF ICM CONCEPT ASSET REQUIREMENTS WITH CURRENT AND POTENTIAL ASSETS

Building on the discussion in Section 3 about the existing and planned assets in the corridor, Table 4-8, Table 4-9, and Table 4-10 show assets that already exist or are planned for the near-term in the corridor. The following codes are used:

- **Bold text** – The asset is essentially deployed throughout the corridor, except for integration among the corridor stakeholders.
- Underline – The asset is partially deployed within the corridor.
- No Special Marking – The asset has minimal or no planned deployment in the corridor.

Table 4-8. I-270 Corridor Market Packages

Market Packages	
<ul style="list-style-type: none"> • <u>Network/Probe Surveillance</u> • Surface Street Control • Freeway Control • <u>Traffic Information Dissemination</u> • Traffic Incident Management • <u>Traffic Forecast & Demand Management</u> • <u>Emissions Monitoring/Management</u> • <u>Parking Facility Management</u> • <u>Roadway Closure Management</u> • <u>Transit Vehicle Tracking</u> • <u>Transit Fixed Route Operations</u> • <u>Transit Passenger and Fare Management</u> • <u>Transit Traveler Information</u> • ISP Traveler Information (broadcast, interactive, route guidance) • <u>HAZMAT Management</u> • <u>Emergency Routing</u> 	<ul style="list-style-type: none"> • Emergency Call Taking and Dispatch • Roadway Service Patrols • Transportation Infrastructure Protection • <u>Early Warning</u> • <u>Wide Area Alert</u> • <u>Disaster Response & Recovery</u> • <u>Evacuation & Re-Entry Management</u> • <u>Disaster Traveler Information</u> • <u>ITS Data Mart/Warehouse</u> • <u>Maintenance/Construction Vehicle & Equipment Tracking</u> • Road Weather Data Collection • Weather Information Processing and Distribution • Work Zone Management • Maintenance & Construction Activity Coordination • Other (e.g., Asset Management System)

Table 4-9. I-270 Corridor Communications Infrastructure

Communications Infrastructure	
<ul style="list-style-type: none"> ● Center-to-Center Communications ● Center-to-Field Communications ● <u>Roadside-to-Vehicle Communications</u> ● <u>Center-to-Vehicle Communications</u> ● ITS Standards for Data formats and Data-Transfer Functions ● Video Transmission Standards (digital, analog) ● <u>Voice Communications</u> ● <u>Capacity for Data Distribution</u> ● <u>Capacity for Video Distribution</u> 	<ul style="list-style-type: none"> ● <u>Capacity/Frequencies for Voice Communications (including interoperability)</u> ● Interfaces to Network Systems ● <u>Interfaces to Emergency Service Systems (CAD)</u> ● <u>Interfaces to Proprietary/Legacy Systems</u> ● Interfaces to ISPs (data and video export) ● Interfaces to Financial Transaction Network ● Interfaces to Internet ● Security Firewalls

Table 4-10. I-270 Corridor Asset Requirements

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
Incident and Emergency Management	<ul style="list-style-type: none"> ● Automated Incident Detection ● Incident Detection (call-in, other) ● <u>Incident Reporting System (GIS, common display)</u> ● Emergency Vehicle Priority/Preemption (Intersection/Vehicles) ● Service Patrol Vehicles ● Montgomery County Traffic Monitoring Airplane 	<ul style="list-style-type: none"> ● <u>Event/Incident Information</u> <ul style="list-style-type: none"> ○ Location ○ Type ○ Time ○ Number of vehicles ○ Lane closures ○ Responding agencies ● Incident Status/Details ● ETP & ERU Vehicle Location Data ● Maintenance/Construction Events ● <u>Maintenance Vehicle Location</u> ● <u>Incident Response Plans/Guidelines/Teams</u> 	<ul style="list-style-type: none"> ● Response Plans ● Online Decision Support (for selecting response plans) ● Definitions of Responsibilities of Agencies ● <u>Common Policies for Incident Reporting and Response</u> ● Accuracy of Data ● Surveillance Coverage ● Special Event Plans
Traffic Signals	<ul style="list-style-type: none"> ● Traffic Signal Control/Monitoring (TOD schedule) ● Traffic Signal Control/Monitoring (traffic adaptive) 	<ul style="list-style-type: none"> ● Traffic Signal Locations ● Traffic Signal Status (Signal, phasing, timing plans, flashing, preemption, etc.) 	<ul style="list-style-type: none"> ● Ability for Priority Logic at Intersections

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
Transit and Commuter Management	<ul style="list-style-type: none"> ● <u>Parking Surveillance/Occupancy Equipment</u> ● <u>Parking Payment Equipment</u> ● Transit Agency Operations Control Center ● <u>Transit Schedule Performance Monitoring</u> ● <u>Passenger Counting Equipment</u> ● <u>Electronic Fare-Collection Equipment (e.g., SmartCard)</u> ● <u>Transit Public Address System</u> ● <u>Transit Trip Planning System</u> ● <u>Spare Transit Vehicles/Operators</u> ● Transit Priority Equipment (Intersection & Transit Vehicles) ● Train Location and Schedule Adherence Tracking and Alert System 	<ul style="list-style-type: none"> ● <u>Detector Data</u> <ul style="list-style-type: none"> ○ Link volumes ○ <u>Link occupancies</u> ○ Link/spot speeds from RTMS ○ Link travel times ○ Intersection approach volumes ○ Ramp queues ● Average Vehicle Occupancy ● Parking Space Availability ● Parking Fees ● Parking Equipment Status ● Transit Schedules ● <u>Transit Vehicle Location</u> ● <u>Schedule or Headway Status/Deviation</u> ● <u>Transit Vehicle Headways</u> ● Link Travel Times ● Priority Requests ● <u>Next Vehicle Arrival</u> ● Transit Fares ● <u>Average and Real-Time Vehicle</u> 	<ul style="list-style-type: none"> ● Regional Parking Management (MP) ● Multi-Modal Coordination (MP) ● Information Exchange Network/Common displays for data entry/display ● <u>Regional/Sub-Regional ITS Architecture</u> ● <u>Availability of Spare Network Capacity</u> ● Data Aggregation/Storage of Processed Data on RITIS for Subsequent Analysis ● <u>Corridor Models (simulation)</u> ● <u>Common Fare-Collection Technology</u> ● Priority Logic at Intersections

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
		<ul style="list-style-type: none"> • <u>Occupancy</u> • <u>Available Transit Vehicles/Location</u> • Ridership Data • <u>Maintenance Data</u> • <u>Device Status</u> 	
Traveler Information	<ul style="list-style-type: none"> • <u>DMS on Freeway and Arterials</u> • <u>Internet Traveler Information</u> • <u>Telephone-Based ATIS (511)</u> • Montgomery County Cable Television Station 	<ul style="list-style-type: none"> • DMS Location/Status • HAR Location/Status • <u>Other Traveler Information Devices</u> 	<ul style="list-style-type: none"> • Vehicle Location Accuracy • <u>Corridor Agency Websites</u> • <u>Private Sector Websites</u>
Infrastructure	<ul style="list-style-type: none"> • ATMS Software • EORS Software • <u>RITIS</u> • <u>Traffic Detectors/Roadway Surveillance/Vehicle Probes</u> • <u>CCTV (video surveillance)</u> • <u>Air-Quality Sensors</u> • <u>Road Weather Information Sensors</u> • <u>Public Safety CAD</u> 	<ul style="list-style-type: none"> • Detector Locations • CCTV Locations • Electronic Toll/Fare/Parking Equipment • Video Images/Snapshots • Video Control • Contact Lists • <u>Air Quality</u> • <u>Road Surface Conditions</u> 	<ul style="list-style-type: none"> • Regional/Sub-Regional ITS Architecture • <u>Vehicle Location Accuracy</u> • <u>Surveillance Coverage</u> • <u>Special Event Plans</u> • <u>System Back-Up/Disaster Recovery</u>

Operations Area	Network Subsystems and Technologies	Information/Data	Other Operational/Performance Assets
	<ul style="list-style-type: none"> • Real-Time Conditions Data Base/Common Displays • <u>Maintenance Vehicle Location (AVL/GPS)</u> 		

As discussed in the earlier sections of this document, I-270 is a mature corridor. Many of the assets required for ICM are already deployed or are in the process of being deployed. This corroborates the ICM “framework” described previously, which builds on the existing infrastructure and initiatives in the region, such as RITIS. Several initiatives — e.g., the Ride On CAD/AVL system upgrade and the Montgomery County Traffic Signal deployment — are moving forward quite satisfactorily, but without benefit of a corridor-wide focus. ICM is an important opportunity for stakeholders to integrate these deployments for the benefit of the entire I-270 Corridor.

Table 4-11, below, summarizes the key changes and additions to the I-270 Corridor needed to accommodate the ICM plan as conceptualized in this document. Each item’s projected completion date or strategy is included in parentheses.

Table 4-11. Summary of Significant Changes and Additions to the I-270 Corridor

Network	Stakeholder	Changes and Additions
Freeway Network	Maryland State Highway Administration (MDSHA)	<ul style="list-style-type: none"> ● Additional DMS on I-270 (2010). ● Additional detectors along I-270 to collect volumes, speeds, and travel time (2010). ● Additional CCTV along I-270 (2010). ● Additional two-way communications linkages between Montgomery County and CHART to support video-sharing and other incident-related data (2008). ● Interface with RITIS for providing and extracting real-time information (2007). ● Interface with RITIS for extracting archived data for performance analysis and evaluation (2008). ● Decision-support software (2010). ● Access to a Corridor Simulation Model (2009).
Arterial Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Additional DMS on arterials (2010). ● Additional detectors along arterials to collect volumes, speeds, and travel time (2010). ● Additional CCTV along arterials (2010). ● Additional two-way communications linkages between Montgomery County and CHART to support video-sharing and other incident-related data (2008). ● Decision-support software as part of the signal system upgrade. (Mid-2009) ● Interface with RITIS for providing and extracting real-time information (2008). ● Access to a Corridor Simulation Model (2009). ● Interfaces with existing corridor-wide systems (2008). ● Adaptive signal control system. (Central System, mid-

Network	Stakeholder	Changes and Additions
		2009; Signal Controllers, 2009-2013, with corridor signals given priority.)
MARC Commuter Rail Network	Maryland Transit Administration (MTA)	<ul style="list-style-type: none"> ● Surveillance of park-n-ride lots at the stations for real-time monitoring of parking availability (2009). ● Parking management software (2009). ● DMS for parking information dissemination (2008). ● Interface with RITIS for providing and extracting real-time information (2008).
Metrorail Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● Surveillance of park-n-ride lots at the five stations for real-time monitoring of parking availability (2009). ● Parking management software (2009). ● DMS for parking information dissemination (2009). ● Interface with RITIS for providing and extracting real-time information (2008).
Metrobus Network	Washington Metropolitan Area Transit Authority (WMATA)	<ul style="list-style-type: none"> ● Interface with RITIS for providing and extracting real-time information (2008). ● Integration with Ride On CAD/AVL system (2008). ● CAD/AVL information dissemination system (2009). ● Enhancements to CAD software to identify optimal routes (2010). ● Interface to CAD, including protection/security of sensitive information (2009).
Ride On Network	Montgomery County Department of Public Works and Transportation (DPWT)	<ul style="list-style-type: none"> ● Interface with RITIS for providing and extracting real-time information (2008). ● Information-sharing system with WMATA and MTA (2008). ● CAD/AVL information dissemination system (2008). ● Enhancements to CAD software to identify optimal routes (2009). ● Interface to CAD, including protection/security of sensitive information (2009).

4.7 I-270 CORRIDOR CONCEPT OPERATIONAL DESCRIPTION

The proposed operational enhancements to the I-270/Montgomery County Corridor are intended to improve the efficiency and reliability of travel along the corridor. The proposed project emphasizes the structured, routinized, integrated, and more unified sharing of information across stakeholder agencies, with a high level of focus on sharing information with customers. It is anticipated that this approach will enable the corridor to better plan for, and respond to, recurring

and non-recurring congestion; to enable the corridor to function more efficiently and react more effectively to changing traffic and transit conditions — subject, of course, to the physical capacity limits of the corridor’s transportation infrastructure.

The stakeholder agencies within the I-270 Corridor already operate and maintain their assets in an efficient manner, but interagency coordination can be improved. The existing management center facilities operated by each of the stakeholder agencies will be retained as the focal point for managing the stakeholder-specific assets, but a data-exchange software package, RITIS, will be deployed in the corridor. The RITIS system is ultimately going to be deployed in the entire Washington, D.C. metropolitan area, with the I-270 Corridor proposed for initial pilot deployment of the system. RITIS will provide data-collection, data archiving, and data-exchange capabilities, including automated alarm notifications for incidents, etc. Currently, incident notification in the corridor is taking place via non-automated means, such as phone or e-mails. As part of the interagency agreements, each stakeholder agency will retain its ability to initiate new projects, but will coordinate said projects with the other stakeholders.

The daily operation of the corridor under ICM will remain similar to the current operations executed by each stakeholder agency. However, each agency’s system will have an interface to RITIS, which will allow the automatic input of relevant data. RITIS, in turn, will automatically provide each agency’s system with information regarding the operational status of the assets from other agencies. This will be particularly helpful in managing non-recurring conditions because each agency will immediately be aware of problems in the corridor that could potentially affect its operations. In this way, RITIS will act as the coordination system within the corridor, without compromising the operational and response capabilities assigned to each stakeholder agency.

Corridor response plans will be developed by a joint effort among all of the stakeholders and implemented within each agency. Once a notification or an alarm is initiated via RITIS, each agency will follow the agreed-upon corridor response plan and take action on the stakeholder-specific portions of the response plan. The responses executed by each agency will be reported back to RITIS and again disseminated to the other stakeholders. In preparation for real-life situations requiring the use of these corridor response plans, the stakeholder agencies will perform regular exercises to test, analyze, and fine-tune the corridor response plans. The stakeholder agencies will also meet at regular intervals in order to review these response plans based on real-life usage. Additionally, these meetings will provide a forum for assessing whether the performance metrics put in place as part of the ICM project are accurate and adequate. RITIS will support the generation of performance measures reports, which will be provided to the I-270 ICM Executive Steering Committee as well as each stakeholder agency on a regular basis.

As described earlier, the integration of the I-270 ICM corridor is designed to be done very quickly without requiring significant institutional modifications or major construction projects and be deployable within a short period of time. Consequently, the total integration of all systems and the rendering of control of field devices and other assets to a new transportation management facility is not envisioned for this project. Nevertheless, the deployment of RITIS will, in fact, create a real-time interface between all agencies to enable rapid response to changing conditions. Additionally, each stakeholder agency will maintain electronic lists of entities to be contacted during particular responses, in accordance with the corridor’s response plans. Voice, data, video, and information — but not field device control — will be provided to all agencies based on the adopted protocols and standards for the sharing of information and the distribution of responsibilities. Each agency will continue monitoring the travel conditions among its areas of responsibilities; if changing conditions so require, they will notify the other agencies via RITIS and deploy the corridor response plans and strategies.

Operationally, at any point in time, only one corridor response plan will be active, based on the real-world conditions in the corridor. For example, the information on a DMS (e.g., travel time estimates, parking availability data, information on conditions ahead, etc.) could typically be strictly informational. However, when a significant, non-recurring event occurs, instructions might shift from “advisory” to “directional”— e.g., use particular lanes because other lanes are blocked or severely restricted.

RITIS will link to existing (and potentially new) venues for disseminating information to the general public. The information is expected to be more comprehensive, reliable, and timely than are the data currently available. Motorists will be able to make smarter, better-informed decisions, both pre-trip and en-route. In particular, travelers will have access to information that may make usage of transit services more attractive to them — e.g., information on next buses, location of available parking spaces, comparative travel times by automobile versus rail, etc. Additionally, commuters who generally travel by private vehicle will be encouraged to consider transit when conditions grow exceptionally bad.

As envisioned here, the I-270 Corridor will function as an integrated transportation system to benefit travelers and users, even though individual assets will still be managed by the respective stakeholder agencies. From the vantage point of travelers, the corridor will be perceived as a seamless transportation network, providing them with multiple viable alternatives that can be selected according to their own personalized travel circumstances and needs.

4.8 ALIGNMENT WITH REGIONAL ITS ARCHITECTURE

A high-level comparison of the I-270 Corridor ICM concept has been made to the Regional ITS Architecture. The findings are summarized below:

- The 2005 version of the MD Statewide ITS Architecture has a proposed element, CapCom, which would serve as a regional transportation incident and emergency management coordination center. The definition of this concept has changed substantially since 2005 to more closely reflect the proposed RITIS prototype that the I-270 Corridor will implement. The MD ITS Architecture will be updated to reflect the RITIS prototype as currently conceived.
- The ITS Architecture currently has existing capabilities for Montgomery County to control signal timing plans in real-time. Implementing automated condition-responsive capabilities are consistent with the Maryland ITS Architecture.
- Another function of the ITS Architecture is CAD/AVL capabilities for transit centers. The ICM concept includes this capability and expands it to deliver this information to ISPs, RITIS, and travelers.
- The MD ITS Architecture also supports the tracking of parking data and providing information to ISPs and travelers.

Based on current plans, the ICM concept is consistent with the Maryland Statewide ITS Architecture. There are no conflicts, per se; but the RITIS deployment portion of the ICM system does not exist by name in the MD ITS Architecture; functionally, it is a combination of the elements “Archived Data Management Centers“ and “CapCom.”

Assuming the I-270 Corridor concept is approved for deployment, Maryland’s ITS Architecture Conformity Form will be completed and the MD ITS Architecture conformity process will be initiated. It is expected this process will result in updates to the Maryland Statewide ITS

Architecture to reflect the sub-regional ICM concept and RITIS deployment in the I-270 Corridor.

4.9 IMPLEMENTATION ISSUES

Deployment of the I-270 ICM concept is not dependent on major new infrastructure deployments or large-scale institutional changes. Consequently, monumental implementation issues are not anticipated. Nevertheless, some important issues and challenges will need to be addressed. For example, there are "gaps" in the integrated approach to incident management. The proposed solution does not include a centralized approach to decision making and incident response, but via an agreed-upon approach with the RITIS system as the real-time data-exchange tool and via pre-defined roles, responsibilities, and procedures for each I-270 ICM stakeholder agency involved in incident response.

Management and operations, including device control, will remain in the hands of the agency currently responsible for each given function. However, procedures for the real-time exchange of information will need to be defined and improved. Corridor stakeholders will also need to refine and update their corridor response plans.

In order to achieve these goals, an institutional framework allowing the close coordination between agencies will have to be put in place. This institutional framework will need to span all stakeholders and cover all available transportation modes. This will also need to address the determination of authority for decision-making pertaining to transportation-related issues based on location, type of incident, etc. However, the I-270 ICM Steering Committee expects to maintain the current management infrastructure at each agency as it performs its roles and responsibilities. What will change is the way the stakeholders interface in order to improve the travel experiences of the roadway users, as well as providing said users with the travel information necessary to make appropriate decisions.

Table 4-12 highlights the major implementation and integration issues facing the I-270 ICM project and the proposed ICM concept. Additional discussion of some of these issues is offered below.

Table 4-12. I-270 ICM Implementation Issues

Technology Issues	Operational Issues	Institutional Issues
<ul style="list-style-type: none"> ● Integration of data into RITIS <ul style="list-style-type: none"> ○ Development of "translators" to the existing "legacy" systems. ○ Each agency's existing system will require some modification to view RITIS information. ○ Not all participating 	<ul style="list-style-type: none"> ● Development of operational response plans for numerous corridor scenarios and events ● Up-to-date data base of contact personnel and locations ● Updates to network operational parameters (signal timing, transit schedules) ● Identifying available data and other information to be shared between agencies (e.g., personal information on drivers involved in 	<ul style="list-style-type: none"> ● Identification and distribution of responsibilities (e.g., lead, support roles) for the shared ICM activities ● Hosting of ICM hardware ● Organizational and administrative framework/structure that supports ICM operations and

Technology Issues	Operational Issues	Institutional Issues
<p>agencies have the ability to, or do not reliably geo-locate incidents and events.</p> <ul style="list-style-type: none"> ○ Configuration Management. ● Development of a standardized interface into RITIS ● Expanded CCTV coverage ● Expanded DMS coverage ● Expanded Data Collection locations and determination of their placement. ● Creation of a common data collection frequency among all stakeholders. ● Development of a unified approach to message displays on DMS. ● Real-time calculation of Parking Availability at the various parking lots. ● Sizing and managing a Communications System among stakeholders. ● Real-time decision support (i.e., software-based response plan development/selection management tools). 	<p>an incident as input to police CAD)</p> <ul style="list-style-type: none"> ● Policy towards route/modal shifts (i.e., Inform vs. Instruct), and under what scenarios ● Procedures and protocols for identifying route/modal shifts when spare capacity exists on multiple networks ● Policies for implementing route/modal shifts when sufficient spare capacity is not available within the corridor ● Policies for implementing demand/capacity management strategies ● Common policies for incident response & reporting ● Disseminating traveler information in a consistent manner across networks ● Video distribution/censoring policy ● Safety concerns ● Corridor modeling (e.g., evaluate impact of strategies and operating parameters) ● Corridor-wide performance measures and metrics ● Marketing and outreach ● Ongoing operations and maintenance of the ICM system ● Request by some stakeholders to customize and filter RITIS data. 	<p>coordination</p> <ul style="list-style-type: none"> ● Policy arrangements for ICM activities and funding ● ICM funding mechanisms <ul style="list-style-type: none"> ○ It has not yet been determined how RITIS will be funded, operated, and maintained. ● System procurement/implementation approach ● Policies and procedures for data sharing, access rights, filtering, etc. ● Inter-agency liability ● Policies and arrangements with private entities (e.g., parking, ISP, etc.) ● Federal involvement ● Inter-agency agreements documenting the resolution of the various operational, technical, and institutional issues ● Updating the agreements

Notes: Items in bold typeface are operational issues to be addressed in an *Operations Plan and Manual* prior to system implementation.

Technology Issues

The technology issues *italicized in Table 4-12* have already been addressed, albeit at a high level, in this I-270 ICM Concept of Operations. The need for additional surveillance capabilities and information (e.g., freeway off-ramps, additional CCTV coverage, additional DMS coverage at decision points, and parking lot determination of available spaces) has also been identified. The technical details, such as the distribution and actual location of the devices and their respective capabilities, will be addressed during the Requirements and Design stages of the I-270 ICM project. And while the role of purchasing additional field devices will remain with the individual stakeholder agencies, the I-270 ICM stakeholder agencies have recognized and are subscribing to the use of ITS standards as interfaces into the field devices to the extent possible (not all field devices utilized are available with NTCIP interfaces). This understanding will influence future purchasing decisions.

Assuming a common system would be deployed that relies on common interfaces, it will be essential that all data elements exchanged between the different software central systems operated by the I-270 ICM stakeholders be defined in exactly the same way; that there be perfect understanding between the interfaced centers as to the meaning of these data — both status and control information. However, the development of RITIS is going to provide interfaces to the various, diverse software packages, so the use of ITS standards for the RITIS system will be essential. Independent of developing any shared or central components for the network, providers will need to publish event data in a consistent and known format that can be used by all providers (or at least a format that RITIS can translate). RITIS follows XML, NTCIP, traffic management data dictionary, and other industry standards. This standard interface will be based on center-to-center communications protocols such as:

- NTCIP 2306 (XML) standard for the communications suite of protocols,
- TCIP (for transit data),
- TMDD (for traffic data), and/or
- IEEE 1512 standards (for incident data) for application specific data.

RITIS will provide translation back and forth between existing systems and NTCIP standards. The I-270 ICM project will need to develop regional incident naming and classification standards. Agreement on data standards will allow data to be placed in its proper location in a message rather than in the narrative descriptive portion of the message. This will greatly enhance the system usability, and allow for ease of data sorting and filtering. The I-270 ICM stakeholders as well as the developers of the RITIS system do understand that there will likely be interoperability problems, in part due to the fact that the ITS Center-to-Center data dictionaries have overlaps in terms of data elements and messages. This might create problems, if it were not for the fact that RITIS will provide a standard interface to which each of the stakeholder systems will have to comply. Appropriate descriptions of the RITIS standard interface will be provided, including definitions of the utilized data elements, messages, and, very importantly, the dialogs (sequences of how one system is supposed to respond to the requests by another system).

RITIS will include “filters” to avoid releasing sensitive information to non-authorized information outlets. The sharing of video images will be part of the RITIS system in that all connected stakeholders will be able to view the images from all agencies along the I-270 Corridor; however, the control of PTZ commands will remain with the “owning” stakeholder agency.

As noted in the I-270 ICM application, several of the stakeholder agencies have implemented ITS standards such as the NTCIP standard for DMS communications and they will continue requiring the use of those standards. However, those required uses are stakeholder-specific.

Operational Issues

The operational issues must be resolved prior to system implementation if the proposed I-270 ICM strategies are to be applied consistently, efficiently, and in a manner that improves overall corridor performance. The I-270 ICM stakeholders are aware that an *Operations Plan and Manual* needs to be developed during the system design phase. At a minimum, this Operations Plan will address those issues presented in bold type in Table 4-12. This plan will also serve as the basis for the *I-270 ICM Operations and Maintenance Plan* as described in the ICM Implementation Guidance.

Some of these operational issues have already been resolved, as the stakeholders have agreed that decisions for any modal shifts will be placed in the hands of the users; i.e., a motorist will be supplied with the information to make a decision, but not instructed to do so. The exception would be to provide detour information during major incidents that require road closures, or other major events and emergencies.

Providing motorists with effective and accurate information is crucial to the success of the I-270 ICM concept. Some of the technical issues associated with data gathering (e.g., surveillance coverage and types of information) and aggregation have already been noted. The associated operational issue involves the presentation of the information in a consistent manner across networks such that the motorists can make informed decisions regarding travel decisions (e.g., route, mode, and time-of-day). One of the proposed approaches will be the provision of travel conditions at decision points to provide motorists with the decision-making information, particularly travel times using one or another travel mode choice. Another approach includes the continuous provision of a congestion map, which already exists within the CHART software, but which will need to be expanded to include the primary arterials in the I-270 Corridor.

Another key operational issue is the development of operational response plans for numerous corridor scenarios and events, including location(s) of events, severity and impact, associated strategies (e.g., DMS messages, other traveler information displays, system operational parameters), contact personnel and locations, other resources, and implementation rules. The I-270 ICM Response Plans will be developed during I-270 ICM implementation, and then evaluated and updated throughout the project's life. Each stakeholder agency will have these developed I-270 ICM Response Plans available within their agencies and, based on established and agreed-upon threshold parameters and procedures, will initiate these plans.

Institutional Issues

Resolving outstanding institutional issues is an on-going process of coordination and collaboration between corridor stakeholder agencies. However, this process has already been initiated by establishment of the I-270 ICM Executive Steering Committee, the larger I-270 ICM stakeholder meetings, and the development of this ICM ConOps.

The next section describes the proposed institutional framework to support the management, operation, and administration of the I-270 ICM Corridor.

4.10 ICM CORRIDOR INSTITUTIONAL FRAMEWORK

This section describes the proposed institutional framework by which the I-270 ICM concept will be implemented, operated, managed, and maintained. The goal for institutionalizing an I-270 ICM structure will be to utilize established regional frameworks instead of creating an entirely new structure. The benefits of weaving the I-270 ICM initiative into the fabric of the current regional ITS, operations, and management institutional frameworks are significant:

- First and foremost, the I-270 ICM initiative and related operational strategies will become part of broader regional efforts to improve transportation system management and operations. As such, I-270 ICM-related projects can be incorporated into existing planning and funding processes.
- There is considerable synergy between the goals and initiatives of the various regional ITS, operations, and management groups in the National Capital Region (NCR) and the I-270 ICM initiative. The I-270 ICM Corridor can serve as an implementation “test bed” for ITS strategies being considered at a broader regional level. Conversely, those I-270 ICM strategies that are proven effective can be expanded to other corridors throughout the NCR.
- Finally, integrating the I-270 institutional framework with other frameworks in the NCR makes sense from a resource perspective. The partners involved in the I-270 ICM are also already involved in one or more of these other regional transportation initiatives (e.g., MATOC, MOITS, ROCC, etc.).

Establishing an I-270 ICM Institutional Framework

Integrating the I-270 ICM institutional framework within the NCR will require a phased approach:

- In Phase One, the I-270 ICM Organization will continue as currently configured to carry out initial I-270 ICM efforts related to the ConOps development, data collection, and corridor modeling. The Maryland Department of Transportation will continue as the Lead Agency for the I-270 ICM project. The project Executive Committee includes representation of the three Partner Agencies: MDOT, WMATA, and Montgomery County DPWT. Coordination with other regional efforts will take place initially, by making the I-270 ICM initiative a regular agenda item at meetings of MATOC, MOITS, and ROCC. In addition, ITS, operations and management initiatives underway in the NCR, as overseen by these groups, will be part of agenda for regular I-270 ICM Executive Committee meetings. This will ensure close coordination of ITS operations and management strategies being implemented at both the regional and corridor levels. Every effort will be made to leverage existing initiatives to optimize resources and take advantage of successful regional operations and integration initiatives (e.g., the RITIS project).
- In Phase Two, the I-270 ICM will be folded into an existing regional ITS, operations, and management initiative. The current plan is to make the I-270 ICM a formal part of the Regional Operations Coordination Committee (ROCC). The ROCC includes all of the current I-270 ICM Partners and also brings public safety and Prince Georges County transportation and public safety to the table. This will greatly facilitate the logical expansion of successful I-270 ICM strategies to east-west corridors in Montgomery and Prince George’s Counties.

- In Phase Three, the final phase, the concept of Integrated Corridor Management (ICM) (not necessarily I-270 ICM) will be formally institutionalized within the Metropolitan Area Transportation Operations Coordination (MATOC) Program. The lead agencies in MATOC include MDOT, VDOT, DDOT, and WMATA. Eventually, MATOC plans to formally invite local transportation agencies such as County DPWT's to be part of MATOC. As the focus of MATOC is completely consistent with ICM, ICM regional ICM deployment will become a critical deployment strategy for MATOC allowing for successful ICM strategies to be deployed, not only in the NCR, but throughout Maryland, the District, and Commonwealth of Virginia.

I-270 ICM Agency Responsibilities and Staffing

Ultimately, in Phase Three of the ICM institutional framework deployment, the management and operations of ICM initiatives will be a joint effort of all MATOC stakeholders. To accomplish this, the I-270 ICM Executive Steering Committee will work to establish a formal Integrated Corridor Management Subcommittee under MATOC (MATOC-ICMS) which will serve as a central decision-making body for ICM initiatives throughout the region. The MATOC-ICMS will be responsible for establishing the necessary inter-agency and service agreements, budget development, project initiation and selection, corridor operations policies and procedures, and overall administration. It is envisioned the MATOC-ICMS will be the ultimate regional institutional framework built upon the foundation of the I-270 ICM initiative. In the near term, the current I-270 ICM Executive Steering Committee will provide project oversight. Migration to Phase 2 of the I-270 ICM Institutional Framework under ROCC will take place over the course of the next year.

Projects resulting from the I-270 ICM initiative, and ultimately from the MATOC-ICMS, will be incorporated within the existing Metropolitan Area Regional ITS Architecture and will be coordinated through the existing Regional ITS Architecture subcommittee under MOITS. In addition, relevant portions of other regional architectures will be updated to include ICM-related projects.

In the near to mid-term, I-270 ICM partner agencies will provide the operational and technical staff (along with ITS consultants and contractors) to support deployment of ICM strategies in the I-270 Corridor.

4.11 PERFORMANCE MEASURES AND TARGETS

The agencies active in the I-270 Corridor already have in place several performance measurement methods, which will be leveraged on for the overall I-270 ICM project.

Beside maintaining the existing performance measures, which are needed for agency-internal processes, the I-270 ICM stakeholders have identified initial performance measures that will be used to determine the effectiveness of the proposed I-270 ICM framework, strategies, and operations as compared to the stated corridor goals and objectives. These baseline corridor performance measures are identified in Table 4-13. Note that these initial performance measures might be adjusted as new collection methods and processing techniques are deployed because the systems implemented in the corridor evolve and operational experience requires modifications to stakeholder's standard operating procedures (SOPs).

Table 4-13. I-270 ICM Baseline Performance Measures and Targets

Goals	Candidate Performance Measures
Optimize Mobility, Reliability, and Safety	<ul style="list-style-type: none"> ● Average Travel Time under normal conditions. ● Travel Time Index – a ratio of travel times in the peak period or other corridor condition to a target or acceptable travel time (typically free-flow/on-schedule conditions are used). The travel time index indicates how much longer a trip will take during a peak time. ● Buffer Index – this measure expresses the amount of extra "buffer" time needed to be on-time 95 percent of the time (late one day per month). Travelers could multiply their average trip time by the buffer index, and then add that buffer time to their trip to ensure they will be on-time 95 percent of all trips. An advantage of expressing the reliability (or lack thereof) in this way is that a percent value is distance and time neutral.
Strengthen Corridor-Level Decision Support	<ul style="list-style-type: none"> ● Average Delay Per Trip – segregated by incident and event types (e.g., minor and major roadway incident, minor and major transit incident, weather, special event) for the corridor and each network ● Incident Response Times, including: <ul style="list-style-type: none"> ○ Incident Detection Time (time between incident occurrence and incident detection). ○ Incident Response Time (time between incident detection and arrival at incident site). ○ Incident Clearance Time (time between arrival at incident site and incident clearance time). ● Response/Clearance Times for Incidents (involving a single stakeholder). ● Response/Clearance Times for Major Incidents (involving multiple stakeholders). ● Time Required to Channel a Potential Evacuation. ● Number of data exchanges between stakeholders in order to: <ul style="list-style-type: none"> ○ Detect, manage, and clear incidents, including weather-related incidents. ○ Share traveler information display information (both DMS and HAR). ○ Share information about parking space availability.
Enhance Reliable, Real-Time Information to Customers	<ul style="list-style-type: none"> ● Uniformity of messages across DMS's within the corridor. ● Number of "cross-network" messages displayed on all DMS's. ● Corridor-related ATIS Web site hits/511 calls.
Promote Multi-Modalism	<ul style="list-style-type: none"> ● Number of Corridor Customers switching travel modes based on available pre-trip and en-route information (estimation, determined via

Goals	Candidate Performance Measures
	survey) <ul style="list-style-type: none"> ● Average Parking Availability Per Facility Per Time-of-Day
Corridor Perspective	<ul style="list-style-type: none"> ● No specific quantitative measures for this "virtual" goal. ● The performance measures improvements associated with and attributed to the other goals will be a strong indication that this goal has been achieved.

The I-270 ICM project makes each stakeholder agency responsible to collect its data, which is going to get aggregated to a large extent into RITIS. One purpose of RITIS, as described in previous sections, is to archive data and to allow data mining for performance measuring purposes. The University of Maryland's Transportation Center will function as both the provider of the corridor modeler and the developer (and subsequently the maintainer) of RITIS. Therefore, obtained data from the stakeholders will be fed into RITIS from where it can be used in the modeling of the corridor and for subsequent analysis, including determination of performance trends and updating of decision-support parameters. Findings will be provided back to the stakeholders for performance improvements.

Additionally, the stakeholders internally and in conjunction with each other will:

- Establish procedures to achieve the corridor-specific goals that are not specific to a stakeholder agency.
- Establish standard operating procedures (SOPs) that among other things enable individuals to use horizontal communications between staff of different agencies to shorten response times.
- Establish mechanisms to determine funding for maintenance and operations.
- Establish mechanisms to ensure uniformity of traveler information dissemination.
- Meet regularly and right after major events to discuss and critique the coordinated operations.
- Interact and provide input to the expansion of the RITIS system to the entire Washington, D.C. area.

Based on the goals and objectives, the I-270 ICM project also identified "success" targets for some of the performance measures. (Please note that it is assumed that these performance "success" targets might be adjusted once the modeling of the corridor has commenced.) These "Performance Measures Success Thresholds," listed in Table 4-14, provide an indication whether the corridor goals have been achieved.

Table 4-14. Sample Potential Performance Measure Targets

Performance Measure	Sample Performance Measure Success Threshold

Performance Measure	Sample Performance Measure Success Threshold
Average Travel Time (during rush hours)	<ul style="list-style-type: none"> ● Corridor – 45 minutes ● Freeway – 45 minutes ● Freeway HOV – 35 minutes ● Arterials – 70 minutes ● Metrorail (Red Line) – left out because already VERY reliably at 13 minutes, northern part of I-270 Corridor not covered by Metrorail ● Metrobus – will be different for each line ● Ride-On Bus – will be different for each line
Travel Time Index (assuming incidents are on corridor and not on subsequent stretches over which the I-270 ICM project has no influence)	<ul style="list-style-type: none"> ● Corridor daily vs. off-peak – 1.5 ● Corridor Incident vs. peak – 1.7 ● Freeway daily vs. off-peak – 1.5 – influenced by bottleneck outside of corridor boundaries to the north (evening rush hour) and other congested roadways to the south (morning rush hour) ● Freeway incident vs. peak – 1.7 ● Arterials daily vs. off-peak – 1.5 – same problem as freeways ● Arterials incident vs. peak – 1.7 ● Metrorail daily vs. off-peak – 1.0 ● Metrorail incident vs. peak – 1.4 ● Metrobus daily vs. off-peak – 1.4 ● Metrobus arterial incident vs. peak – 1.6 ● Ride On Bus daily vs. off-peak – 1.2 ● Ride On Bus arterial incident vs. peak – 1.4
Buffer Index	<ul style="list-style-type: none"> ● Corridor wide buffer index of 25 percent
Average Delay per Trip (during incidents)	<ul style="list-style-type: none"> ● Corridor – 17 minutes ● Freeway – 15 minutes ● Arterials – 20 minutes ● Metrorail – 10 minutes ● Metrobus – will be different for each line ● Ride-On Bus – will be different for each line
Incident Detection and Response Times	<ul style="list-style-type: none"> ● Freeway – 5 minutes

Performance Measure	Sample Performance Measure Success Threshold
combined	<ul style="list-style-type: none"> ● Arterials – 10 minutes ● Metrorail – 5 minutes ● Metrobus – 10 minutes ● Ride-On Bus – 10 minutes
Incident Clearance Times	<ul style="list-style-type: none"> ● Freeway – 15 minutes ● Arterials – 20 minutes ● Metrorail – 10 minutes ● Metrobus – 20 minutes ● Ride-On Bus – 20 minutes
Average parking availability per facility per time of day	<ul style="list-style-type: none"> ● Zero average availability at end of peak period 95% of the time ● 80% Utilization of currently underutilized parking lots
Multimodal Switch estimated via traveler survey	<ul style="list-style-type: none"> ● 10 percent of travelers switching modes based on traveler information provided during incidents and/or events.
Customer satisfaction as obtained from traveler surveys	<ul style="list-style-type: none"> ● 75 percent overall satisfaction with corridor ● 80 percent satisfaction with corridor traveler information and accuracy

Some of the data identified above will be harder to collect because they require gathering and merging data from different stakeholders, which means coordinating and potentially adjusting collection period starting times and collection frequencies.

The unique and project-specific configuration of the transportation modes in the I-270 Corridor will require that data are collected for certain links. For example, in order to provide a commuter traveling southbound on I-270 towards the Beltway with travel time information, that information will need to be collected from the I-370 interchange to the Beltway in order to display a comparison of the travel time using the Metrorail line from I-370 to the Beltway. Similar displays of travel time comparisons can be provided on other routes.

It is understood that data-collection for these performance measures will need to be identical from the various stakeholders in order to provide meaningful comparisons. Naturally, the data collection methods will have to be different depending on stakeholder, data-collection technology and equipment, and meaningful collection periods. For example, travel times and delays for Metrorail, Metrobus, and Ride On Bus will be collected using the available on-board technologies (AVL in case of Metrobus and Ride On and Block Closed Circuits for Metrorail), while freeway and arterial travel times will be an indirect measure of link speed and distance.

Additionally, parking availability (number of spaces) will be collected by the responsible agencies using the existing parking management systems.

For travel time comparison purposes and travel decision support, the “true” travel times will be calculated for each alternative travel mode. An average parking time for driving to Park-n-Ride lots and for bus/rail mode transfers and wait times will be added, along with the potential impact of any incidents.

An education campaign will be developed and deployed to educate travelers about the travel times and how to make decisions between the travel modes available within the corridor.

5. OPERATIONAL SCENARIOS

Sample representative scenarios for the I-270 ICM Corridor are presented in this section. These scenarios identify how the stakeholder agencies will interact and respond to the described events and assumed conditions. It is understood that these sample scenarios cannot be all-inclusive, but they can provide an understanding of the response operations parameters and protocols.

An underlying assumption for all the scenarios is that the pre-defined response plans on a foundational level were developed and agreed-upon by the involved stakeholder agencies. Naturally, ad-hoc decisions necessitated by particular situations will still be allowed by each of the stakeholder agencies.

Operational scenarios addressed in this chapter include the following:

- Daily operational scenario (e.g., recurring congestion).
- Scheduled event scenario (planned special events or work zone operations).
- Evacuation scenario.
- Incident scenario (roadway and transit incident).
- Major planned special event scenario.

The first scenario represents the condition of recurring congestion that occurs on a daily basis during the work week. The other scenarios address different types of non-recurring congestion such as incidents, planned events, and evacuations. As suggested by the FHWA JPO Concept of Operations Guidelines, the Washington State DOT and Washington State Transportation Center definitions² for recurring and non-recurring congestion have been adopted for the I-270 ICM project:

- **Recurring Congestion:** Congestion caused by routine traffic volumes operating in a typical environment. In layman's terms, it might be thought of as "the congestion present on a normal day if nothing bad has happened on the roadway." In essence, this definition is grounded in the concept of "expected congestion" if no "unusual circumstances" occur. It is dependent on time and location.
- **Non-Recurring Congestion:** Unexpected or unusual congestion caused by an event that was unexpected and transient relative to other similar days.
- **Non-Recurring Congestion can be caused by a variety of factors, including:**
 - Lane blocking accidents and disabled vehicles.
 - Other lane blocking events (e.g., debris in the roadway).
 - Construction lane closures.
 - Significant roadside distractions that alter driver behavior (e.g., roadside construction, electronic signs, a fire beside the freeway).
 - Inclement weather and weather-related events.

² *Measurement of Recurring Versus Non-Recurring Congestion: Technical Report*, Technical Report and Final Report Research Project T2695; Washington State Transportation Center (TRAC); Washington State Transportation Commission, Department of Transportation and in cooperation with U.S. Department of Transportation Federal Highway Administration; October 2003

- Heavier-than-normal vehicle merging movements.
- Significant increases in traffic volume in comparison to "normal" traffic volumes.

The transit-related operational response to roadway-related recurring congestion, incidents, and scheduled events has been considered in the following scenarios. It should be noted that additional scenarios could be created that pertain to transit-generated incidents. Transit-related incidents might be caused by increased demand (e.g., due to an event), disabled transit vehicles, or other outages within the transit infrastructure.

The approach taken in developing these scenarios is to provide a brief description of each scenario and the overall response. A summary table identifies the specific ICM strategies to be deployed and other operational details (e.g., potential DMS messages); and the respective roles (e.g., lead/support) and responsibilities for the stakeholder agencies during each of the scenarios. It needs to be noted that integrated corridor management will always require some degree of "manual" communications between centers (e.g., via phone and radio) and interaction between stakeholders (e.g., meetings to discuss and resolve issues) in addition to the presented I-270 ICM strategies.

5.1 DAILY OPERATIONAL SCENARIO

The following scenario for recurring congestion is an example that is lived out by I-270 commuters daily. For many people, the commute starts from north and east of Frederick, Maryland, where a commuter enters the I-270 Corridor from US-15. After entering the I-270 ICM project boundary, the commuter experiences congestion due to high volume. The DMS's along the corridor display travel times to the various known points along the corridor. Some of the DMS's, specifically those prior to the exits with easy access to Metro stations (Shady Grove, Rockville Center, etc.), additionally show travel time comparisons to indicate how much time it will take to get to the Washington Beltway remaining in the car versus exiting, parking, and taking Metrorail (this information would be turned off once the parking lots are filled). DMS's off I-270 and closer to these Metro stations will also include information about number and location of open parking spots.

There are known points on the corridor that will slow the commute, sometimes to a complete stop, because of traffic entering the main roadway from the arterial roads. This is especially noticed as traffic from the two-lane collector/divider system ("local lanes") that brings traffic from Shady Grove Road, Falls Road, and Montrose Road enter onto I-270 ("express lanes").

At each of those locations the commute slow to stop-and-go or a complete stop.

The last place for congestion before entering the I-495 Capital Beltway is the split where I-270 divides to a southbound path to Virginia, via I-495 and a northbound spur to the I-495 Capital Beltway.

Table 5-1. Daily Operational Scenario

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>The RITIS system, being operational, has no incident information displayed</p> <p>Usual information-sharing between agencies, to include reports to Radio Stations</p> <p>Arterial Traffic Signal activation as appropriate for time-of-day</p> <p>Local transit agencies providing AVL/ Parking information</p> <p>Multi-agency/multi-network incident response teams and service patrols</p>	RITIS	<ul style="list-style-type: none"> • Coordination – ensuring accurate traveler information and the proper coordination shared data between agency systems using a Center-to-Center interface • Providing information to traffic information outlets
	CHART	<ul style="list-style-type: none"> • Monitor freeway sensors and CCTV • Monitor arterial CCTV • Manage/Operate State DMS signage • Operate freeway service patrols
	Montgomery County	<ul style="list-style-type: none"> • Manage signal operations/adjust signal timing • Monitor traffic sensors on traffic arterials • Monitor arterial CCTV • Monitor freeway sensors and CCTV • Manage/Operate county DMS signage
	WMATA Metro Rail and Bus	<ul style="list-style-type: none"> • Monitor rail and bus headways/schedules • Location data for Metro vehicles posted to local displays and intercom system • CAD/AVL data for buses, once operational, posted to local displays and intercom system • Monitor parking availability • Passenger counts
	Ride On Bus	<ul style="list-style-type: none"> • Monitor bus headways/schedules • CAD/AVL data posted to local displays and intercom systems • Monitor parking availability • Passenger counts
	MARC Train	<ul style="list-style-type: none"> • Monitor train headways/schedules • Arrival information posted to local displays • Monitor parking availability • Passenger counts
	Emergency Services	<ul style="list-style-type: none"> • Regular operations/patrols

5.2 SCHEDULED EVENT SCENARIO

The following scenario outlines the typical "planned event," which would have been broadcasted to the motorists and commuters days in advance via DMS, HAR/TAR, Web pages, and other media outlets. Driving southbound from Frederick on I-270 for the morning commute, there is information on the DMS sign in Frederick County that informs motorists that the express lanes between Shady Grove Road and Gude Drive will be under repair until 9 AM. The typical traffic volume on the roadway at that time-of-day emphasizes the need to merge traffic onto the local lanes and to inform motorists to consider taking alternate routes or transit. Before approaching the I-370 interchange, both the SHA and Montgomery County Highway/Traveler Advisory Radio stations are providing details of the repair work including location, duration, and impact. Additionally, the southbound DMS on I-270 close to Middlebrook Road informs motorists of the location, duration, and impact of the repair. All these information devices also inform motorists of alternative modes and routes. The broadcasted option for an alternate route is to exit on to I-370 East towards MD-355, one of the possible alternative routes (another possible alternate route is going west onto Sam Eng Hwy, via Great Seneca Hwy to Darnestown Road back towards I-270; however, for this event it has been decided to route motorists via MD-355).

Taking the exit from I-370 to MD-355, the traffic is already heavy but is flowing because of the already implemented modification to the traffic signal timing on both Shady Grove Road and MD-355.

Prior to exiting from I-370 to Shady Grove Road, a new DMS informs motorists of the option to either proceed towards the Shady Grove Road exit or to remain on I-370 to go towards the Shady Grove Metro station. The parking management system that monitors the parking lots at the Metro stations provides information of the total number of open parking spaces available in the parking lots. From there, either Metrorail or Metrobus may be used by commuters to reach their final destinations. Motorists choosing to use the Metro facilities and transit will reach the entrance of the Metro station where other DMS will provide additional information to speed up the locating of available spaces within the parking lots. The motorists, after parking their cars, head towards the Metro lines using the regional SmartCard, which they will also use to pay for parking upon their return. WMATA, having been informed of the construction event well in advance, has calculated that additional Metrorail vehicles will be needed at the Shady Grove station and increases the number of trains by letting more of the trains that typically turn around at the Grosvenor Station go through to Shady Grove and turn around there.

At each location providing entrance to the Metro system, the parking management system informs the motorists of available parking spaces.

Highway Advisory Radio and local radio information provides information if I-270 is free flowing or congested after the scheduled road repairs. This route can be taken until MD-355 intersects with the I-495 Capital Beltway for those vehicles traveling north to Maryland or, at Rockville, the vehicles can re-enter I-270 at Jefferson Street and again at Montrose Road.

Table 5-2. Scheduled Event Scenario

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>The RITIS system, being operational, has sent information notices to the corridor agencies notifying them of the scheduled repair work; usual information is being sent for all other areas of the corridor</p> <p>Appropriate traveler Information devices (DMS, HAR, 511) are broadcasting/ displaying appropriate messages alerting motorists of the repair work location, duration, impact and alternative routes</p> <p>Usual information sharing between agencies include reports to Radio Stations; the reports include the location, duration, impacts and alternative routes of the scheduled repair</p> <p>Arterial Traffic Signal activation as appropriate for time of day plus optimized timing for additional traffic due to repair work</p> <p>Local transit agencies providing AVL/ Parking information.</p> <p>Multi-agency/multi-network incident response teams and service patrols</p>	RITIS	<ul style="list-style-type: none"> • Coordination – ensuring accurate traveler information and the proper coordination shared data between agency systems using a Center-to-Center interface • Coordinating plans for detour route and detour messages • Provide travel times and travel time comparisons for different travel modes to the stakeholder agencies for display on DMS • Provide transit parking information to other agencies for display on selected DMS • Providing information to traffic information outlets
	CHART	<ul style="list-style-type: none"> • Monitor freeway sensors and CCTV • Manage/Operate State DMS signage <ul style="list-style-type: none"> ▪ Place messages on appropriate DMS signs ▪ Place Messages on HAR • Monitor arterial CCTV • Operate freeway service patrols • Put up work zone signage • Monitor conditions and activities of the incident (including performance measures)
	Montgomery County	<ul style="list-style-type: none"> • Manage signal operations/adjust signal timing • Monitor signal optimization for proper vehicle through-put • Monitor traffic sensors on traffic arterials • Monitor arterial CCTV • Monitor freeway sensors and CCTV • Manage/operate county DMS signage and local traveler information programs
	WMATA Metro Rail and Bus	<ul style="list-style-type: none"> • Monitor rail and bus headways/schedules • Location data for metro vehicles posted to local displays and intercom system • CAD/AVL data for buses, once operational, posted to local displays and intercom system • Monitor parking availability and alert public of open spaces via RITIS • Passenger counts

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
	Ride On Bus	<ul style="list-style-type: none"> • Monitor bus headways/schedules • CAD/AVL data posted to local displays and intercom systems • Monitor parking availability • Passenger counts
	MARC Train	<ul style="list-style-type: none"> • Monitor train headways/schedules • Arrival information posted to local displays • Monitor parking availability • Passenger counts
	Emergency Services	<ul style="list-style-type: none"> • Regular operations/patrols • State Police provide increased enforcement for the work zone

5.3 INCIDENT SCENARIO

5.3.1 Minor Traffic Incident Scenario

The possibility of a traffic incident along the I-270 Corridor can happen at any time with the amount of traffic that flows through the corridor. The following scenario defines the actions taken by the stakeholder agencies when vehicles are involved in a crash that cannot be moved to the shoulder.

Just as the afternoon rush is about to begin, two vehicles traveling northbound on I-270, just past the I-370 exit collide and one vehicle hits the barrier wall and comes to an abrupt stop. The driver of the first vehicle is able to maintain control and eventually brings the vehicle to a stop. The shoulder/emergency lane and the right lane are blocked, with debris in the middle lane. Both vehicles are unable to move to the shoulder lane.

The accident is reported by a cellular call to the Montgomery County 911 Center. Since the 911 Center is co-located with the fire and the transportation management centers within Montgomery County, the emergency agencies are notified almost immediately as the 911 information was added to the CAD/AVL System. The operators within the 911-dispatching unit, as well as the traffic divisions of Montgomery County, are notified and, having access to the CCTV, use the CCTV nearest the crash location to verify the incident.

After verification the police, fire, and emergency rescue teams are dispatched to the scene. Seeing that the vehicles need a wrecker in order to be moved, the responsible dispatcher also informs tow truck operators to get ready for dispatching to the accident scene.

An automatic notification is placed into RITIS via the CAD-connected Montgomery County TMC software and the other corridor agencies receive notification of the accident. Preliminary information is added to the 511 system and to the travel information Web sites. Warning messages are placed on DMS signs leading to the I-270 Corridor, advising motorists to be alert and that delays are possible.

The police dispatch, using the AVL system, locates the nearest patrol car and it arrives on the scene as the Emergency Medical Team does. After confirming that the vehicles do in fact need to be towed, the officer calls the dispatcher who dispatches the already stand-by tow trucks to go to the crash site.

The first arriving officer also uses the patrol car to block the right lane ahead of the wrecked vehicles causing the traffic to slow and merge into the open lanes. The emergency medical team administers first aid and monitors the victims for adverse signs of trauma. The Emergency Road Patrol arrives to set up traffic control upstream of the accident, warning drivers of the problem area by using his flashing light board. The two tow trucks arrive at the scene and each load a vehicle to be removed from the roadway. Each driver is able to ride with the tow trucks to a location of their choosing. The Emergency Medical team leaves the area, followed by the Police. While the response agencies are about to clear the incident scene, the Emergency Road Patrol turns off the emergency flasher and leaves the incident area. Since the traffic volume increased steadily during the incident at the beginning of the afternoon rush hour, the traffic takes quite a long time before resuming to normal flow. The information on the traveler information devices, particularly the DMS and HAR/TAR, are adjusted to change from typical information about an incident to a message indicating worse-than-normal traffic due to the accident conditions.

During the incident, some vehicles utilize the Collector/Divider lanes (i.e., Local Lanes) to get around the crash scene. As the local lanes quickly fill to capacity, the majority of the traffic exits at I-370 and proceeds to detour to either MD-355 or to Great Seneca Hwy (MD-119). The operators at the traffic center in Montgomery County verify the traffic flow and monitor the signal optimization patterns. The cycle lengths are adjusted for the added capacity. Those travelers that detoured on to Great Seneca Hwy return to I-270 at Quince Orchard Road (MD-117) to find traffic free flowing and are able to resume their original commute. The traffic detouring to MD-355 also returns to I-270 at Montgomery Village Avenue (MD-124) to resume their commute as well.

Table 5-3. Minor Traffic Incident Scenario

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>The RITIS system, being operational, creates an incident and notifies the corridor agencies</p> <p>Traveler Information devices (DMS, HAR, 511) are loaded with appropriate messages alerting motorist of the accident and possible delays</p> <p>Notification between agencies to include reports to Radio Stations; these reports will include the location of the crash.</p>	<p>RITIS</p>	<ul style="list-style-type: none"> • Coordination – ensuring accurate traveler information and the proper coordination shared data between agency systems using a Center-to-Center interface • Coordinating plans for detour route and detour messages • Provide travel times and travel time comparisons for different travel modes to the stakeholder agencies for display on DMS • Provide transit parking information to other agencies for display on selected DMS • Providing information to traffic information outlets

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>Arterial Traffic Signal timing plan activation as appropriate for time-of-day plus optimized time for additional traffic due to traffic overflow</p> <p>Local transit agencies providing AVL/ Parking information</p>	CHART	<ul style="list-style-type: none"> • Monitor freeway sensors and CCTV • Manage/Operate State DMS signage <ul style="list-style-type: none"> ▪ Place messages on appropriate DMS signs ▪ Place Messages on HAR • Monitor arterial CCTV • Operate freeway service patrols • Monitor conditions and activities of the incident (including performance measures)
Multi-agency/multi-network incident response teams and service patrols	Montgomery County	<ul style="list-style-type: none"> • Notification of RITIS, and local Fire, EMS and wrecker service • Manage signal operations/adjust signal timing • Monitor signal optimization for proper vehicle through-put • Monitor traffic sensors on traffic arterials • Monitor arterial CCTV • Monitor freeway sensors and CCTV • Manage/Operate county DMS signage and local traveler information programs
	WMATA Metro Rail and Bus	<ul style="list-style-type: none"> • Monitor rail and bus headways/schedules • Location data for metro vehicles posted to local displays and intercom system • CAD/AVL data for buses, once operational, posted to local displays and intercom system • Monitor parking availability and alert public of open spaces via RITIS • Passenger counts
	Ride On Bus	<ul style="list-style-type: none"> • Monitor bus headways/schedules • CAD/AVL data posted to local displays and intercom systems • Monitor parking availability • Passenger counts
	MARC Train	<ul style="list-style-type: none"> • Monitor train headways/schedules • Arrival information posted to local displays • Monitor parking availability • Passenger counts
	Emergency	<ul style="list-style-type: none"> • Regular operations/patrols

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
	Services	<ul style="list-style-type: none"> Local Police provide accident removal and traffic control

5.3.2 Major Traffic Incident Scenario

In the event of a major traffic accident involving several vehicles and multiple response agencies in the I-270 Corridor, the partner agencies will be utilized to maintain travel in the corridor.

Due to fog in the early morning hours and several motorists ignoring the posted DMS messages advising them to reduce speed, a multi-vehicle crash involving commercial vehicles occurs along the southbound I-270 Corridor at the Shady Grove Road interchange. One tractor-trailer carrying a hazardous substance overturns, with a second commercial vehicle damaging the middle overpass support. Several points along the dividing barrier between the north- and south-bound lanes are damaged. Almost immediately a motorist places a cellular call to the 911 Center in Montgomery County; however, the motorist is unable to report the number of personal vehicles involved in the incident.

The 911 operator immediately enters the information into the CAD system which automatically notifies the Police and Fire dispatches co-located within the facility. The Traffic operator verifies the accident using the CCTV along the corridor.

After verification of the incident, the police, fire, and emergency rescue teams are dispatched to the scene. An automatic notification is placed into RITIS via the CAD-connected Montgomery County TMC software and all the stakeholder agencies within the I-270 Corridor receive notification of the accident. Preliminary information is added to the 511 system and to the travel information Web sites. Warning messages are placed on DMS signs leading to the I-270 Corridor, advising motorists to be alert and that delays are probable.

As the first police officer arrives at the scene, she realizes the impact of the crash because of the commercial vehicle carrying the hazardous substance; she notifies the commercial carrier's dispatch center of the severity of the incident. The realization that a hazardous chemical release may be involved escalates the situation and the area is isolated and the Hot Zone is established according to the National Incident Management System. Traffic both north- and south-bound is stopped.

The first Emergency Medical crew arrives and observing multiple injuries, immediately calls for medical support and dispatches a medical helicopter en-route.

The TMC, as directed, activates the Emergency Operations Center, and notifications go out to the appropriate personnel to report to the Emergency Operations Center.

Traffic Detour routes are put into place with notifications sent to the corridor agencies to alert travelers that I-270 is completely closed to vehicular traffic in the southbound direction.

The Metrorail and Metrobus, in conjunction with the Marc Train systems, prepare for increased ridership.

As the incident unfolds, there are three major areas of concern: (1) life and health safety of those involved in the crash; (2) the commercial vehicle containing the hazardous materials; and (3) the structural damage to the overpass and barrier wall.

The duties of the corridor agencies are as follows:

- **RITIS** – Coordinate with the corridor agencies to disseminate information. RITIS will update traveler information systems with the latest information to keep the public up-to-date with the road closure and travel conditions
- **CHART** – Provide traffic management services for the area and long term management of the area for traffic patterns as the incident changes phases.
- **Montgomery County** – Coordinates with state and local agencies to secure the area, provides life safety measures for the injured at the scene, establishes detour routes, and monitors arterial roads for traffic conditions.
- **MDOT** – Provide construction inspection/repair services
- **MARC** – Provide alternate transportation for the corridor, participate in activities that get information out to the public notifying them that I-270 has a long term closure and a possible commuting solution would be to engage in public transportation.
- **Metrorail, Metrobus, and Ride On Bus** – Provide alternate transportation for the corridor with increased routes. Participate in activities that get information out to the public, notifying them that I-270 has a long term closure and a possible commuting solution would be to engage in public transportation.
- **Emergency Services** - Medical will provide services for the injured,
 - Safety Service Patrol will provide traffic control and detour signage,
 - State Police – Will furnish traffic control and area control, and
 - HAZMAT – Containment and Remediation of the hazardous substance.

Table 5-4. Major Traffic Incident Scenario

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>The RITIS system, being operational, creates an incident and notifies the corridor agencies</p> <p>Traveler Information devices (DMS, HAR, 511) are loaded with appropriate messages alerting motorists of the accidents and road closure</p> <p>Notification between agencies to include reports to Radio Stations; these reports include the location of the accident and information encouraging travelers to switch to alternative Transit transportation during corridor closure</p>	RITIS	<ul style="list-style-type: none"> • Coordination – ensuring accurate traveler information and the proper coordination shared data between agency systems using a Center-to-Center interface • Coordinating plans for detour route and detour messages • Provide travel times and travel time comparisons for different travel modes to the stakeholder agencies for display on DMS • Provide transit parking information to other agencies for display on selected DMS • Providing information to traffic information outlets • Public outreach for MARC / Metro availability
<p>Arterial Traffic Signal timing plan activation as appropriate for time of day plus optimized time for additional traffic due to traffic overflow</p>	CHART	<ul style="list-style-type: none"> • Monitor freeway sensors and CCTV • Manage/Operate State DMS signage <ul style="list-style-type: none"> ▪ Place messages on appropriate DMS signs

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>Local transit agencies providing AVL/ Parking information.</p> <p>Multi-agency/multi-network incident response teams and service patrols.</p>		<ul style="list-style-type: none"> ▪ Place Messages on HAR • Monitor arterial CCTV • Establish long term detour routes • Activate Public Information Officer to coordinate information between state and county agencies • Operate freeway service patrols and provide additional patrol shifts if needed in the area • Monitor conditions and activities of the incident (including performance measures)
	Montgomery County	<ul style="list-style-type: none"> • Notification of RITIS, and local Fire, EMS and wrecker services • Activation of the County Emergency Operations Center • Actively manage incident until relieved by higher authority • Establish long term detour routes • Manage signal operations/adjust signal timing • Monitor signal optimization for proper vehicle through-put • Monitor traffic sensors on traffic arterials • Monitor arterial CCTV • Monitor freeway sensors and CCTV • Manage/Operate county DMS signage and local traveler information programs
	WMATA Metro Rail and Bus	<ul style="list-style-type: none"> • Monitor rail and bus headways/schedules • Location data for metro vehicles posted to local displays and intercom system • CAD/AVL data for buses, once operational, posted to local displays and intercom system • Monitor parking availability and alert public of open spaces via RITIS • Passenger counts • Public outreach for availability during corridor closure
	Ride On Bus	<ul style="list-style-type: none"> • Monitor bus headways/schedules • CAD/AVL data posted to local displays and intercom systems • Monitor parking availability

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
		<ul style="list-style-type: none"> • Passenger counts • Public outreach for availability during corridor closure
	MARC Train	<ul style="list-style-type: none"> • Monitor train headways/schedules • Arrival information posted to local displays • Monitor parking availability • Passenger counts • Public outreach for availability during corridor closure
	Emergency Services	<ul style="list-style-type: none"> • Safety Patrol – Regular operations/patrols, set up detour signage, traffic control • State Police – Provide incident management local to the scene • Medical – provide medical services at the accident scene • Local Police provide traffic control • Tow Trucks – remove vehicles

5.4 EVACUATION SCENARIO

A Category 4 Hurricane is approaching the Chesapeake Bay area. It is predicted that the eye will pass directly over the Washington, D.C. area. The governing officials within the entire metropolitan area have issued an evacuation order for the surrounding areas. Local officials have notified the transportation agencies of a pending evacuation order for the region, including the I-270 Corridor.

Based on previous modeling and analyses of such an emergency scenario (performed on a regional, statewide, and multi-state basis), it is well understood that the evacuation order will significantly impact all modes of transportation within the I-270 Corridor; the freeway facility will be the primary route for the evacuation. Rail service to outlying stations combined with bus service from the stations to designated shelters (outside the zone of predicted storm surge) will also need to be provided for those residents who do not own cars.

Evacuation routes, designated shelters, and related emergency procedures have been identified as part of a statewide hurricane evacuation plan. In accordance with the hurricane plan, the Emergency Operations Center (EOC) for Montgomery County is activated for managing the evacuation for routes north through the I-270 Corridor.

Montgomery County is designated the lead for implementing, coordinating, and operating the transportation elements of the evacuation response plan within the I-270 ICM corridor. It will also coordinate the network-specific responses, including the following:

- **Montgomery County:** Activates the EOC to facilitate the evacuation of the I-270 Corridor area. Monitors the signal optimization effort on the arterial and detour routes. Potentially implements and manages transit signal priority parameters that favor the shuttle buses that service the regional rail stations. Manages the county-owned DMS Signs. Coordinates information to RITIS for distribution to the corridor agencies.
- **CHART:** Activates messages as appropriate on the State owned DMS message signs. Sends out safety patrols to pre-determined locations to provide operations assistance and respond to any problems.
- **MARC Train:** Discontinues the normal scheduled service, providing predominately outbound service with reduced headways.
- **WMATA Metro Rail and Bus, and Ride-On Bus:** Discontinues the normal scheduled service, providing shuttle bus service to the rail stations within the corridor. Providing service from outlying stations to designated shelters.

It should be noted that this plan focuses only on the evacuation scenario. Additional plans have been developed for coordinating transportation clean-up and clearance activities (e.g., prioritize and perform emergency repairs); and for re-entry into the evacuated areas.

Table 5-5. Evacuation Scenario

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>Information Sharing and Distribution - The RITIS system, being operational, has sent information notices to the corridor agencies notifying them of the planned evacuation</p> <p>Traveler Information devices (DMS, HAR, 511) are loaded with appropriate messages alerting motorist of alternate evacuation routes</p>	RITIS	<ul style="list-style-type: none"> • Coordination with all agencies using a Center-to-Center interface, ensuring that all are kept up-to-date on all activities and the potential impact on their respective operations. • Coordination, ensuring accurate traveler information, including information on detour routes and revised transit service if applicable. • Providing information to traffic information outlets • Public outreach for MARC / Metro availability
<p>Activation of "special" transit signal priority to accommodate buses serving the Regional Rail stations</p> <p>Signal pre-emption/"best route" for emergency vehicles</p> <p>Multi-agency/multi-network incident response teams and service patrols</p> <p>Promote network shifts (use of freeway or regional rail/shuttle bus for</p>	CHART	<ul style="list-style-type: none"> • Monitor all conditions within corridor (including performance measures) • Set portable DMS to aid in locating detour routes • Provide additional freeway service patrols • Monitor freeway sensors and CCTV • Manager/operate DMS, making changes as appropriate • Suspend State construction projects (if any) on the corridor • Activate Public Information Officer to coordinate information between state and county agencies

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
<p>evacuation)</p> <p>Add transit capacity by adjusting headways and number of transit vehicles (regional rail)</p> <p>Add temporary new transit service (shuttle bus service to regional rail stations, and from outlying stations to shelters)</p> <p>Coordinate scheduled maintenance and construction activities among corridor networks (close down all such activities).</p>		<ul style="list-style-type: none"> Operate freeway service patrols and provide additional patrol shifts if needed in the area
	Montgomery County	<ul style="list-style-type: none"> Lead role in managing traffic throughout the corridor Manage detour routes Monitor traffic sensors/volumes Monitor arterial and detour route CCTV Monitor Signal optimization and manage signal operations to adjust signal timing if needed Manage/operate county owned DMS Provide CHART with requests for message display on freeway DMS Assign appropriate personnel at key sites to oversee operations and to provide consistent Verified public information to emergency management agencies, public information officers, and the media Suspend County sponsored construction activities on the arterials and detour routes.
	WMATA Metro Rail and Bus	<ul style="list-style-type: none"> Provide shuttle bus service to rail stations, and from outlying stations to shelters Add vehicles and trains to accommodate increase in ridership Coordinate with MARC Train for increased ridership Monitor rail and bus headways/schedules CAD/AVL data posted to local displays and intercom systems Monitor parking availability and alert public of open spaces Passenger counts Public outreach for availability during corridor closure
	Ride On Bus	<ul style="list-style-type: none"> Provide shuttle bus service to rail stations, and from outlying stations to shelters Add vehicles to accommodate increase in ridership

ICM Strategies/Other Operational Details	Agency/Entity	Role and Responsibilities
		<ul style="list-style-type: none"> • Coordinate with MARC Train for increased ridership • Monitor bus headways/schedules • CAD/AVL data posted to local displays and intercom systems • Monitor parking availability • Passenger counts • Public outreach for availability during corridor closure
	MARC Train	<ul style="list-style-type: none"> • Monitor train headways/schedules • Arrival information posted to local displays • Monitor parking availability • Passenger counts • Public outreach for availability during corridor closure
	Emergency Services	<ul style="list-style-type: none"> • State Police assume overall lead role working out of EOC

**MARYLAND I-270
CORRIDOR
ICM CONOPS SUPPLEMENT**

MARYLAND I-270 CORRIDOR ICM

CONCEPT OF OPERATIONS

SUPPLEMENTAL MATERIAL

This material updates the I-270 Corridor ICMS Concept of Operations, previously submitted to USDOT on June 19, 2007. It adds two new sections to the document:

- S-1: Updated I-270 Corridor Needs, and
- S-2: Regional Commitment to I-270 ICMS.

The remainder of the ConOps document has not changed.

S-1 UPDATED I-270 CORRIDOR NEEDS

Table S-1, on the following page, updates Table 1-2, Critical Needs of the I-270 Corridor, in the ConOps document (pages 9-10). The identical information appears in Table 3-10 (pages 47-49), and this information is updated as well.

The needs identified in Table S-1 are system-specific, were primarily extracted from the ConOps, and were used in developing system requirements. There is a consistent, traceable relationship between most needs identified in Table S-1 and individual systems requirements. The last column in Table S-1 specifies the system requirements associated with each need of the I-270 Corridor; these individual requirements are detailed in the *System Requirements Specification dated March 31, 2008*.

Table S-1: Updated I-270 Corridor Needs

Need ID	Description	Source	Requirements Satisfying Need
1	Need to expand corridor-wide information sharing to help disseminate reliable and real-time traveler information to commuters.	ConOps § 1.4, p. 8	Q-110-090, Q-110-090-010,
2	Need tools and procedures to assist stakeholder agencies with operational decision-making for improved transportation management within the corridor.	ConOps § 1.4, Table 1-2, p. 9	F-1500, F-1500-030, F-1500-040, F-1500-040-010, F-1500-040-010-010, F-1500-040-010-020, F-1500-040-010-030, F-1500-040-010-040, F-1500-040-010-050
3	Need for traffic signals to be able to respond to changing conditions on affected arterials and adjacent roadways, including I-270, to maintain optimal traffic flow.	ConOps § 1.4, Table 1-2, p. 9	P-1210, F-1210
4	Need on-demand access to information comparing travel times by automobile and transit in real-time to help travelers make better informed travel decisions.	ConOps § 1.4, Table 1-2, p. 9	F-320-010, F-320-020, F-320-020-010, F-320-030
5	Need to provide travelers access to accurate, reliable, and multi-modal travel information, both pre-trip and en-route, to enable travelers to make better informed travel decisions.	ConOps § 1.4, Table 1-2, p. 10	F-300, F-300-010, F-300-020, F-300-030, F-300-040, F-300-050, F-300-060, F-300-060-010, F-300-060-020, F-300-060-030, F-300-060-040, F-300-060-050, F-300-060-060, F-300-060-070, P-300, Q-300

Need ID	Description	Source	Requirements Satisfying Need
6	Need to exchange real-time information on road and transit conditions with the corridor's managing partners and stakeholders to improve transportation management efficiency and traveler information dissemination.	ConOps § 1.5, p. 10	I-900, I-900-010, I-900-010-010, I-900-010-020, I-900-020, I-900-030, I-900-040, I-900-050, I-900-060, I-900-070, I-900-080, I-900-090, I-900-100, I-900-110, I-900-120, I-900-130, I-900-140, I-900-150, I-900-160, I-900-170, I-900-180, I-900-180-010, D-900, F-900, P-900
7	Need to establish connections with key corridor stakeholders to automate data exchanges between the I-270 ICMS and external systems.	ConOps § 1.6, Table 1-4, p. 12	I-900-010, I-900-010-010, I-900-010-020, I-900-020, I-900-030 I-900-040, I-900-050, I-900-060 I-900-070, I-900-080, I-900-090 I-900-100, I-900-110, I-900-120, I-900-130, I-900-140, I-900-150, I-900-160, P-900
8	Need to provide real-time, corridor-based traveler information to the media and other ATIS providers via standards-based and standard data distribution interfaces to facilitate improved access to current transportation information.	ConOps § 1.6, Table 1-4, p. 12	F-310, F-310-010, F-310-020, F-310-030, F-310-040, F-310-040-010, F-310-040-020, F-310-040-030, F-310-040-040, P-310, Q-310
9	Need to provide pre-trip and en-route real-time corridor traveler information to travelers for access to up-to-date transportation information.	ConOps § 1.6, Table 1-4, p. 12	F-300-010, P-300
10	Need to share notification-based information (e.g., incident alerts) that is accessible pre-trip and en-route to provide travelers with real-time access to information impacting the transportation network.	ConOps § 3.5, p. 38	F-300-020, F-300-030, F-300-040, F-300-050, F-300-060, F-300-060-010, F-300-060-020, F-300-060-030, F-300-060-040, F-300-060-050, F-300-060-060, F-300-060-070

Need ID	Description	Source	Requirements Satisfying Need
11	Need to collect transit, traffic, and other transportation data of regional interest from stakeholders in the corridor for use in enhancing regional traveler information and transportation management functions performed by member agencies.	ConOps § 3.5, p. 40, ConOps § 3.7, p. 47	D-100, D-100-010, D-100-020, F-110, F-110-010, F-110-020, F-110-030, F-110-040, F-110-050, F-110-060, F-110-070, F-110-080, Q-110-090
12	Need to fuse collected transportation data into regional information to enhance regional traveler information and transportation management functions performed by member agencies.	ConOps § 3.5, p. 40	F-110-100, F-110-110
13	Need documented policies and procedures for coordinated traffic/transit management and incident management within the corridor to improve safety and overall transportation flow.	ConOps § 4.5, Table 4-7, p. 66	O-1900, O-1900-010, O-1900-020, O-1900-030, O-1900-060, O-1900-050, O-1900-040
14	Need ICMS backup and restore capabilities to minimize system downtime.	ConOps § 4.5, Table 4-7, p. 68	Q-2120
15	Need up-to-date corridor response plans to better plan for, and respond to, recurring and non-recurring congestion and to enable the corridor to function more efficiently and react more effectively to changing traffic and transit conditions.	ConOps § 4.7, pp. 78-79	F-1500-030, F-1500-040, F-1500-040-010, F-1500-040-010-010, F-1500-040-010-020, F-1500-040-010-030, F-1500-040-010-040, F-1500-040-010-050, F-1510 I-1510
16	Need to provide alarm notifications for incidents, etc. to stakeholder systems to improve transportation management operations.	ConOps § 4.7, p. 79	I-900-170
17	Need to define common data collection frequency intervals among all stakeholders for data standardization and timeliness purposes.	ConOps § 4.9, Table 4-12, p. 82	I-900-180, I-900-180-010

Need ID	Description	Source	Requirements Satisfying Need
18	Need a Communications System with sufficient capacity and speed to support real-time data exchanges with stakeholder systems.	ConOps § 4.9, Table 4-12, p. 82	P-910, I-930
19	Need to use common definitions for all data elements exchanged between the different software central systems operated by the I-270 ICM stakeholders so that there is a clear, unambiguous understanding between the interfaced centers as to the meaning of these data.	ConOps § 4.9, p. 83	D-900
20	Need to utilize applicable ITS standards and other pertinent standards to achieve consistency among corridor stakeholder systems and improve overall corridor operations and maintenance efforts.	ConOps § 4.9, p. 83	C-1920-020-030, C-1920-020-020, C-1920-020-010, C-1920-020, C-1920-010, C-1920, C-1920-020-040, C-1920-030, C-1920-020-050, C-1920-050
21	Need to avoid releasing sensitive information to non-authorized information outlets so as not to disrupt transportation management operations or alarm the public unnecessarily.	ConOps § 4.9, p. 84	Q-2100, Q-2100-010, Q-2100-020
22	Need a documented Operations and Maintenance Plan to ensure that ICM strategies are applied consistently, efficiently, and in a manner that improves overall corridor performance.	ConOps § 4.9, p. 84	O-1910, O-1910-010, O-1910-020, O-1910-020-010
23	Need to provide travel conditions at decision points to provide motorists with decision-making information, particularly travel times using one or another travel mode choice.	ConOps § 4.9, p. 84	F-320-020, F-320, F-320-010, F-320-020-010, F-320-030

Need ID	Description	Source	Requirements Satisfying Need
24	Need corridor-level performance measures to determine the effectiveness of the I-270 ICM strategies and operations in comparison to corridor goals and objectives.	ConOps § 4.11, p. 87	F-1700, F-1700-010, F-1700-020, F-1700-040, F-1700-050, F-1700-050-010, F-1700-050-020, F-1700-050-030, F-1700-050-040, F-1700-050-050, F-1700-050-060, F-1700-050-080, F-1700-050-090, F-1700-050-100, F-1700-050-110, F-1700-050-120, F-1700-050-130, F-1700-050-133 F-1700-050-136, F-1700-050-140, F-1700-050-150, F-1700-050-160, F-1700-050-170, F-1700-050-180, F-1700-050-193, F-1700-050-190, F-1700-050-196, F-1700-050-200, F-1700-050-210, F-1700-050-220, F-1700-060, F-1700-070, F-1700-070-010
25	Need to archive data for data mining and performance measuring purposes.	ConOps § 4.11, p. 88	F-1700-020, F-1700-010
26	Need standard operating procedures to improve communications and coordination and shorten response times.	ConOps § 4.11, p. 88	O-1910-020, O-1910-020-010
27	Need to coordinate with corridor stakeholder agencies in utilizing appropriate traveler information devices (DMS, HAR, 511) for broadcasting/displaying appropriate corridor transportation messages.	ConOps § 5.2, Table 5-2, p. 96	F-310-040, F-310-040-010, F-310-040-020, F-310-040-030, F-310-040-040
28	Need to provide travelers with reliable information in getting from one location to another location within the corridor.	ConOps § 1.4, Table 1-2, p. 10	F-330, F-330-010, F-330-020 F-330-030, F-330-040, F-330-040-010, F-330-050, F-330-060
29	Need to log all data exchanges and alarm notifications for audit and evaluation purposes.	I-270 ICMS Project Team	F-900

Need ID	Description	Source	Requirements Satisfying Need
30	Need to provide suggested modifications to messages on traveler information field devices (e.g., DMS, HAR) to owning agencies to ensure accurate corridor-wide information is provided to motorists.	I-270 ICMS Project Team	F-1160, P-1160, F-1170, P-1170, F-1180, P-1180, F-1190, P-1190, F-1200, P-1200
31	Need reporting/query tools for data analysis and research purposes.	RITIS ConOps § 2.6, pp. 31-32	F-1700-050-210, F-1700-040, F-1710, F-1710-010, F-1710-020, F-1710-030, F-1710-040, F-1710-050, F-1710-060, F-1710-070, F-1710-080, F-1710-090, F-1710-100, F-1710-110, F-1710-120, F-1710-130, F-1710-140,
32	Need to exchange data with corridor stakeholder agency systems in a secure manner.	RITIS ConOps § 2.7, p. 32	Q-2110
33	Need to operate in a 24x7 environment, as corridor transportation management needs to operate continuously.	I-270 ICMS Project Team	Q-2130, Q-2130-010, Q-2130-020, Q-2130-030, Q-2130-040, Q-2130-050, Q-2130-060, Q-2130-070, Q-2130-080, Q-2130-090, Q-2130-100, Q-2130-110, I-930
34	Need to automatically notify the System Administrator when a System failure occurs to minimize system downtime.	I-270 ICMS Project Team	P-2140, Q-2140

Need ID	Description	Source	Requirements Satisfying Need
35	Need a secure agency user interface available only to corridor stakeholder agency users for transportation management purposes.	RITIS ConOps § 2.4.1, p. 28	F-2300, Q-2300-010, Q-2300-020, Q-2300-030, Q-2300-040, Q-2300-050, P-2300-060, P-2300-070, F-2300-080, F-2300-090, F-2300-100, F-2300-110, F-2300-120, F-2300-130, F-2300-140, F-2300-150, F-2300-160, F-2300-170, F-2300-180, F-2300-190, F-2300-200, F-2300-210, F-2300-220, F-2300-230, F-2300-240, F-2300-250, F-2300-250-010, O-2300-260, O-2300-260-010, F-2300-270, O-2300-280, C-2300-290
36	Need an easily accessible public user interface for traveler information purposes.	RITIS ConOps § 2.4.2, p. 28	F-2310, Q-2310-010, Q-2310-020, P-2310-030, P-2310-040, F-2310-050, F-2310-060, F-2310-070, F-2310-080, C-2310-090
37	Need a secure System Administration user interface for system configuration and maintenance purposes.	RITIS ConOps Appendix A, Table A-1, p. 43	F-2320, Q-2320-010, Q-2320-020, Q-2320-030, P-2320-040, P-2320-050, F-2320-060, F-2320-070, O-2320-080, O-2320-090, C-2320-100

S-2 REGIONAL SUPPORT FOR MARYLAND I-270 CORRIDOR ICM

Maryland, Virginia, the District of Columbia, the Washington Metropolitan Area Transit Authority (WMATA), and the Metropolitan Washington Council of Governments (MWCOG) recently demonstrated their collective commitment to information-sharing and coordinated incident response by establishing a new regional initiative, the *Metropolitan Area Transportation Coordination (MATOC) Program*. MATOC formalizes important interagency relationships, establishes common regional procedures and protocols, and identifies the Regional Integrated Transportation Information System (RITIS) as the central, automated mechanism for regional information exchange. MATOC is discussed in more detail in Section 3.6 of the ConOps document.

Throughout the ICM Stage 1 process, MATOC members have indicated strong, consistent support for the I-270 ICMS effort. At an upcoming meeting on April 15, 2008, the MATOC Steering Committee expects to review, comment on, and adopt the following resolution:

Metropolitan Area Transportation Operations Coordination **RES/XX-XX**

MATOC Program Steering Committee Resolution

Resolution XX-XX

Short Title: Integrated Corridor Management Endorsement

On April 15, 2008, The Metropolitan Area Transportation Operations Coordination (MATOC) Program Steering Committee approved the following endorsement of the Maryland I-270 Corridor Integrated Corridor Management (ICM) Program:

Resolved:

WHEREAS the states of Maryland and Virginia, and the District of Columbia have demonstrated their commitment to coordinate and support regional sharing of transportation systems' conditions and information management during regional incidents through integration of systems' technologies, improved procedures and planning, and enhanced accuracy and timeliness of transportation information provided to the public; and

WHEREAS the MATOC Program Steering Committee consists of representatives from the District Department of Transportation (DDOT), Maryland Department of Transportation

(MDOT), Virginia Department of Transportation (VDOT), and the Washington Metropolitan Area Transit Authority; and

WHEREAS the Maryland I-270 ICM Program is an initiative sponsored by the U.S. Department of Transportation and led by stakeholder agencies within the I-270 Corridor that is part of the Metropolitan Washington Council of Governments' region; and

WHEREAS the Maryland I-270 ICM Program's Vision includes the application of key technology systems and decision support tools that allow for real-time, multi-modal information sharing; and

WHEREAS the Maryland I-270 ICM System shall be built upon the regional information-sharing foundation known as the Regional Integrated Transportation Information System (RITIS); and

WHEREAS the Maryland I-270 ICM Program directly supports the MATOC Program's commitment to coordinate and support regional sharing of transportation systems' conditions and information management;

Now, therefore, let it be resolved that the MATOC Program Steering Committee formally endorses the Maryland I-270 Program and acknowledges the considerable synergy between its goals and initiatives and those of the MATOC Program.