

THREE DIMENSIONAL FINITE ELEMENT PROGRAM TO PREDICT THE BEHAVIOR OF SOILS AND SUBSTRUCTURE COMPONENTS

PROBLEM STATEMENT

The Florida Department of Transportation (FDOT) has many soil-structure systems: piles, drilled shafts, walls, embankments, culverts, etc., whose behavior is both two/three dimensional, as well as changing over time. Present design methods have been limited to either one-dimensional (e.g., embankments), limit state (e.g., walls) or simple model application (e.g., piles/shafts). Moreover, these methods usually do not consider the nonlinear stress-strain behavior of the soil or rock, or the material creep.

Presently, there exist few finite element codes capable of modeling the soil-structure problems identified. Such codes are expensive (>\$5,000) and limited in scope (i.e., two-dimensional, not three-dimensional, or consolidation, but no creep, etc.).

Recently, FDOT undertook the development of a two/three dimensional coupled (fluid and soil skeleton) large deformation finite element code (PlasFEM) to model Polk County Parkway (State Job No. 99700-3333-119, Contract No. B-9900). PlasFEM had all the features (nonlinear, two/three dimensional, coupled, etc.) to model soil-structure interaction; however, it had no pre-processor and a very crude post-processor.

OBJECTIVES

The purpose of this research was to develop a finite element package (pre- and post-processor with engine) capable of modeling soil-structure interaction problems. This work involved:

- Developing an automatic mesh generator (quadrilaterals and triangles) from multiple connected regions that the user draws to represent his/her problem.
- Modeling the construction process by placing soil in lifts (i.e., layers), by excavating soil in lifts, or by applying surface loads.
- Modeling the fluid flow by identifying the flow boundaries and natural water table in user's drawing.
- Selecting boundary constraints (pins and rollers), as well as soil models (Cam-Clay, Sandler-DiMaggio, etc.) and material parameters, through mouse and popup windows.
- Displaying Pore Pressures, Displacements, and Stresses as a function of time in multiple threaded windows (i.e., pore pressure and effective stresses may be displayed together) after the user analyzes his/her problem.

FINDINGS AND CONCLUSIONS

A pre-processor (PlasGEN) was developed which requires the user to draw the geometry and identify the flow boundaries, water table, construction sequence, and soil models with properties (see example below: embankment constructed on a soft clay layer).

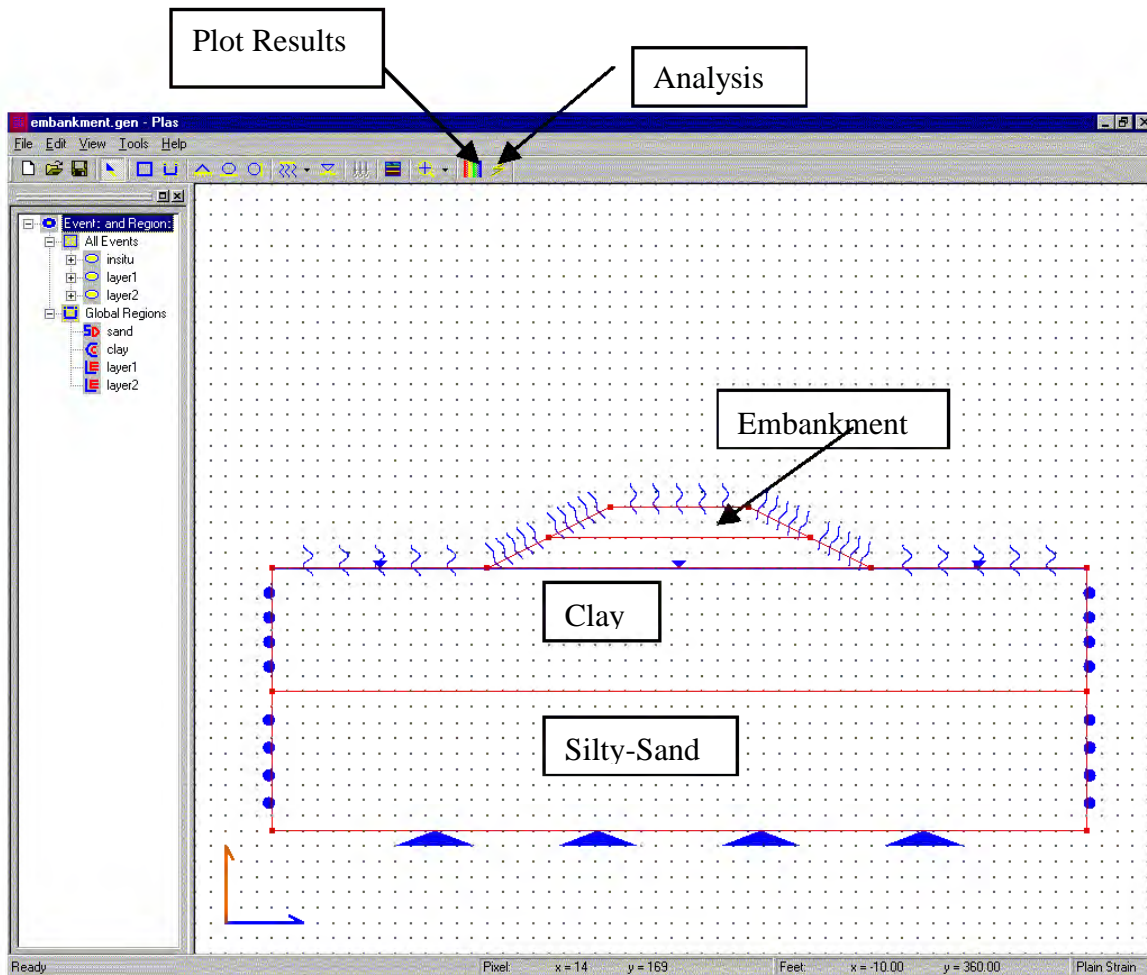


Figure 1. Pre-processor Screen

When the engine icon (Fig. 1--Analysis Icon) is clicked, the developed pre-processor automatically generates the mesh (Figure 2) and writes an ASCII file containing all the input for PlasFEM code which performs the analysis.

Subsequently, by clicking on the post-processor icon (Fig. 1--Plot Results), a post-processor displays the results (soil stresses, pore pressures, displacements, etc.), as shown in Figure 3.

A number of different example sets are presented that show the versatility of the software:

- Excavation behind a sheetpile wall.
- Backfilling around a culvert with surface loading.
- Skin and tip resistance of a drilled shaft in a conventional load test.
- Surcharge loading a soft clay layer with soil and pore pressures and bearing failure.

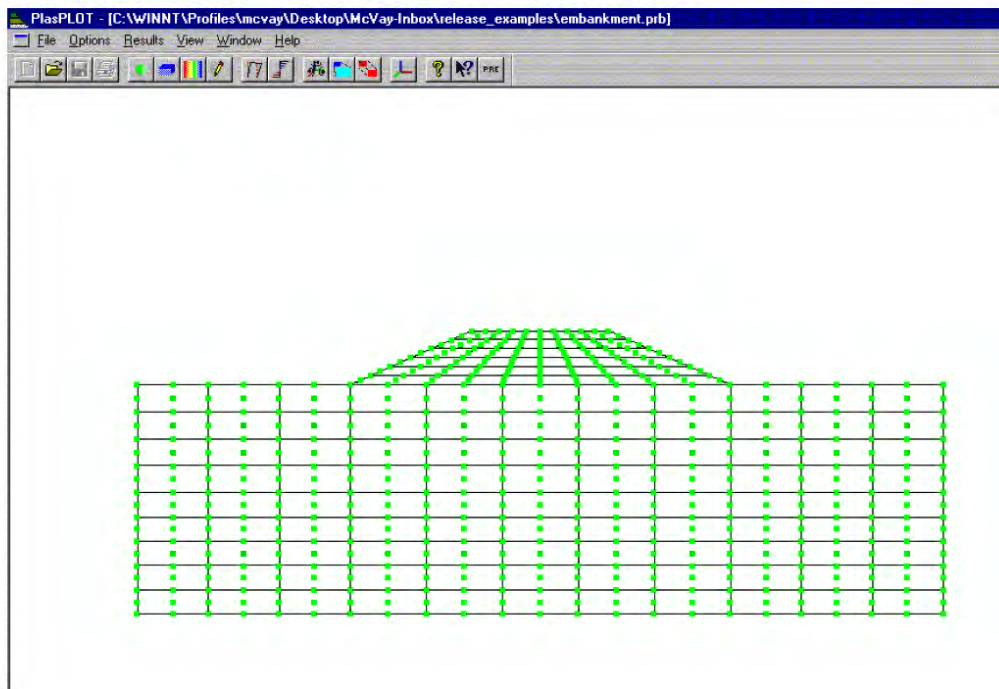


Figure 2. Automatic Mesh Generator.

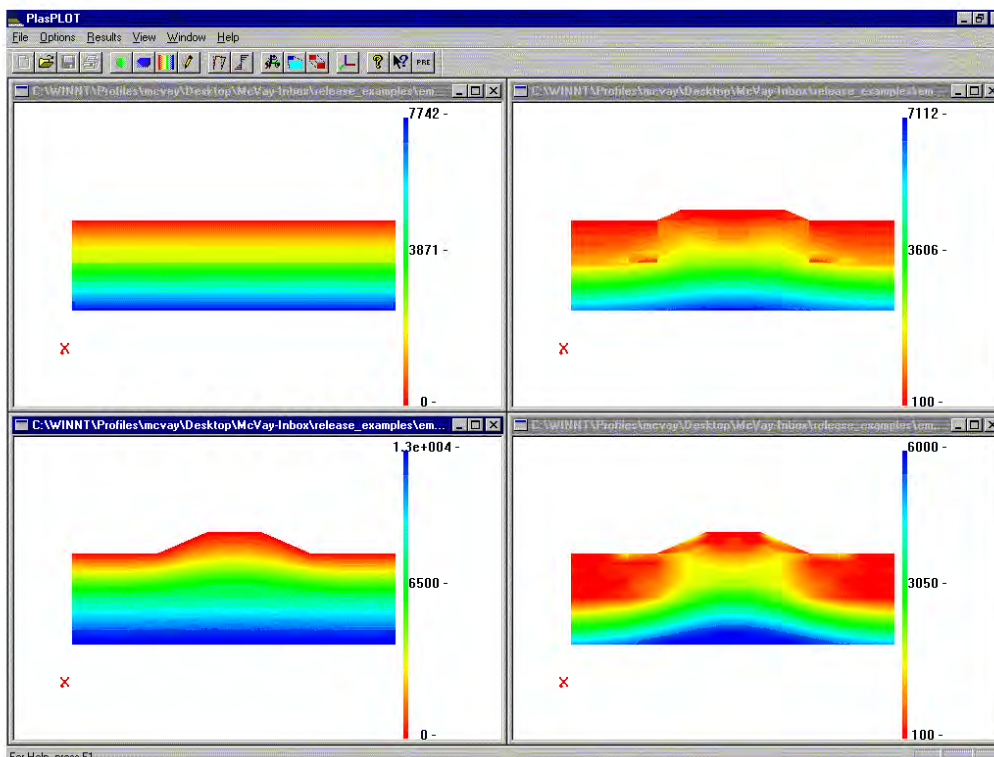


Figure 3. Soil Stresses and Pore Pressures

This research project was conducted by Michael McVay, Ph.D, P.E., at the University of Florida. For more information on the project, contact Peter Lai at (850) 414-4306, peter.lai@dot.state.fl.us