


MOUNTAIN-PLAINS CONSORTIUM

RESEARCH BRIEF | MPC 18-368 (project 382) | September 2018

Seismic Behavior of Steel Bridges with Fatigue-Prone Details

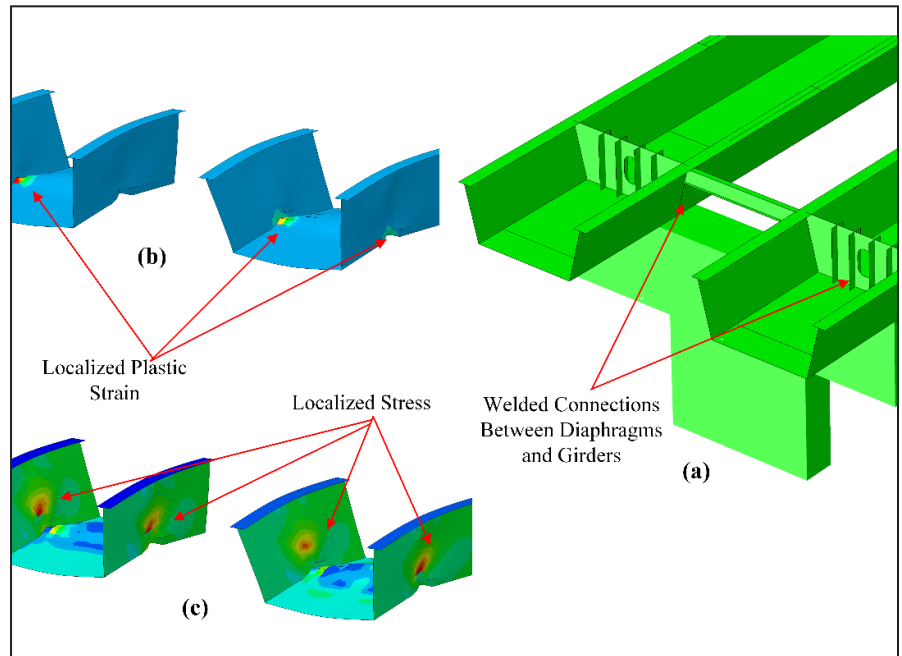

the ISSUE

Steel bridges are vulnerable to earthquake ground motions. One question that is unanswered is, what role does fatigue cracking play in the seismic performance of bridges? This is an important question because many steel bridges, particularly those built before 1970, have shown signs of excessive deterioration and fatigue cracking.

the RESEARCH

In this study, detailed finite element models of a twin-tub girder bridge with a fatigue-prone detail were developed. The bridge was assumed to be located in Denver, CO, and subjected to light daily traffic. The model was then utilized to evaluate the low-cycle fatigue behavior of the bridge when subjected to a suite of ground motions in the presence and absence of a fatigue crack. The Coffin-Manson approach was utilized to evaluate the low-cycle fatigue behavior and calculate the total number of cycles to reach failure. The calculated number of cycles to failure were then compared to the total number of cycles the bridge was subjected to during a given earthquake, which was determined using rainflow counting analysis.



A University Transportation Center sponsored by the U.S. Department of Transportation serving the Mountain-Plains Region. Consortium members:

Colorado State University
North Dakota State University
South Dakota State University

University of Colorado Denver
University of Denver
University of Utah

Utah State University
University of Wyoming



Lead Investigator(s)

Hussam Mahmoud
hussam.mahmoud@colostate.edu
Colorado State University

Research Assistant(s)

Mazin Irfaee, GRA, MS
Emad Hassan, GRA, MS

Project Title

Seismic Behavior of Steel
Bridges with Fatigue-Prone
Details

Sponsors | Partners

Colorado State University
USDOT, Research and
Innovative Technology
Administration

the FINDINGS

The following conclusions can be drawn:

Model without a crack

- The global displacement in the bridge, from all earthquakes, ranged between 1 in and 17 in.
- Normal stresses at piers from all earthquakes ranged between 40 ksi and 60 ksi.
- EQ#5 and EQ#6 resulted in the maximum demand on the bridge as manifested by high stress ranges.
- Seismic loadings caused low-cycle fatigue failure in the bridge.

Model with crack

- Local plastic strain around the crack tip was very minimal, suggesting relief in strain in the presence of a crack.
- The presence of a crack resulted in more flexibility in the bridge model which caused minor reduction in global displacement of about 1%.
- The model with crack showed small values of plastic strain and very high values of stress around the crack tips.

the IMPACT

These results highlight the importance of detailed assessment of the superstructures for bridges in moderate to high seismic regions.

For more information on this project, download the entire report at <http://www.ugpti.org/resources/reports/details.php?id=944>

For more information or additional copies, visit the Web site at www.mountain-plains.org, call (701) 231-7767 or write to Mountain-Plains Consortium, Upper Great Plains Transportation Institute, North Dakota State University, Dept. 2880, PO Box 6050, Fargo, ND 58108-6050.



This publication was produced by the Mountain-Plains Consortium at North Dakota State University. The contents of this brief reflect the views of the authors, who are responsible for facts and the accuracy of the information presented herein. This document is disseminated under the program management of the USDOT, Office of Research and Innovative Technology Administration in the interest of information exchange. The U.S. Government assumes no liability for the contents or use thereof.



NDSU does not discriminate in its programs and activities on the basis of age, color, gender expression/identity, genetic information, marital status, national origin, participation in lawful off-campus activity, physical or mental disability, pregnancy, public assistance status, race, religion, sex, sexual orientation, spousal relationship to current employee, or veteran status, as applicable. Direct inquiries to Vice Provost, Title IX/ADA Coordinator, Old Main 201, 701-231-7708, ndsueoaa@ndsu.edu.