


c:\myfiles\pw_production\dms52216\Std501-1.dgn [USC]
15 September 2016 3:42 PM

STATE	PROJECT	SHEET NUMBER


NOTE:

1. Provide the same type of dowel assemblies and tie bars for joints in plain portland cement concrete pavement as shown for joints in reinforced pavement.
2. See Standard 501-2 for joint and joint sealing details.
3. Lap longitudinal and transverse reinforcement not less than 15 inches.

PAVEMENT THICKNESS (in)	TRANSVERSE JOINT SPACING (ft)
$T < 6$	10
$6 \leq T < 12$	15

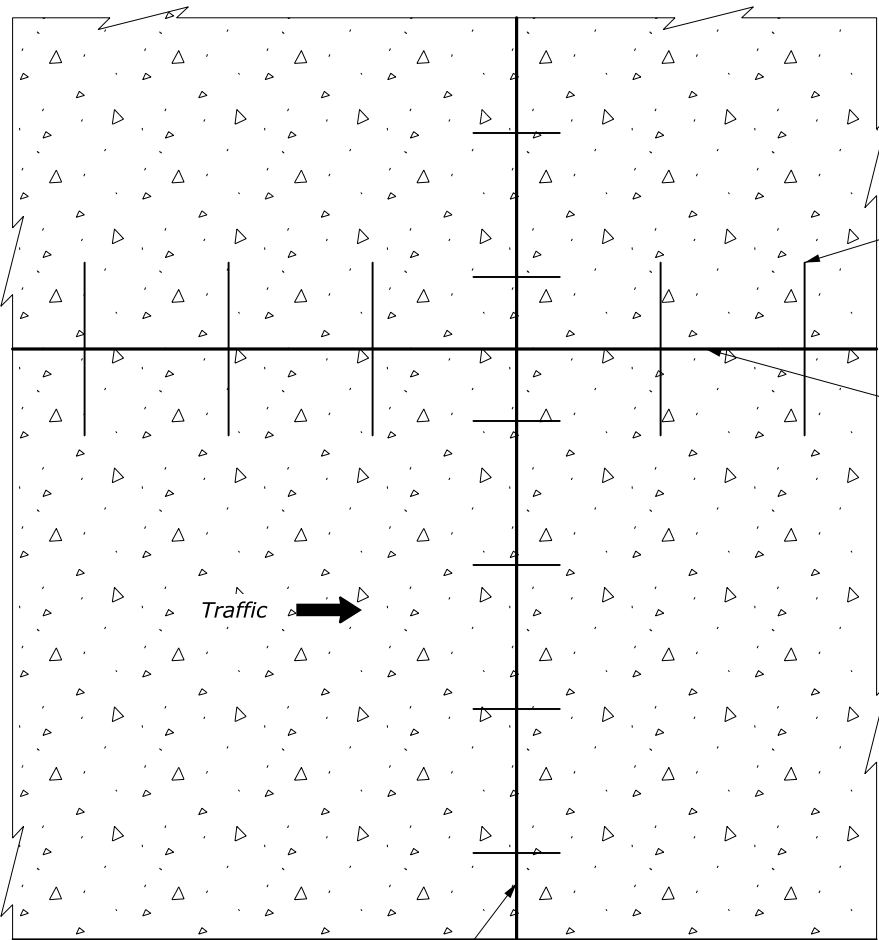


Transverse joint
PLAN

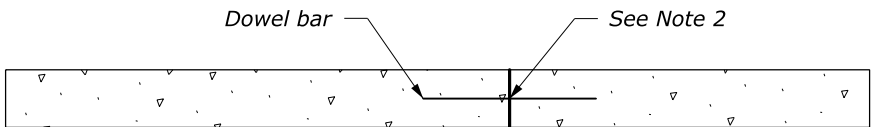


PROFILE

PLAIN MINOR CONCRETE PAVEMENT

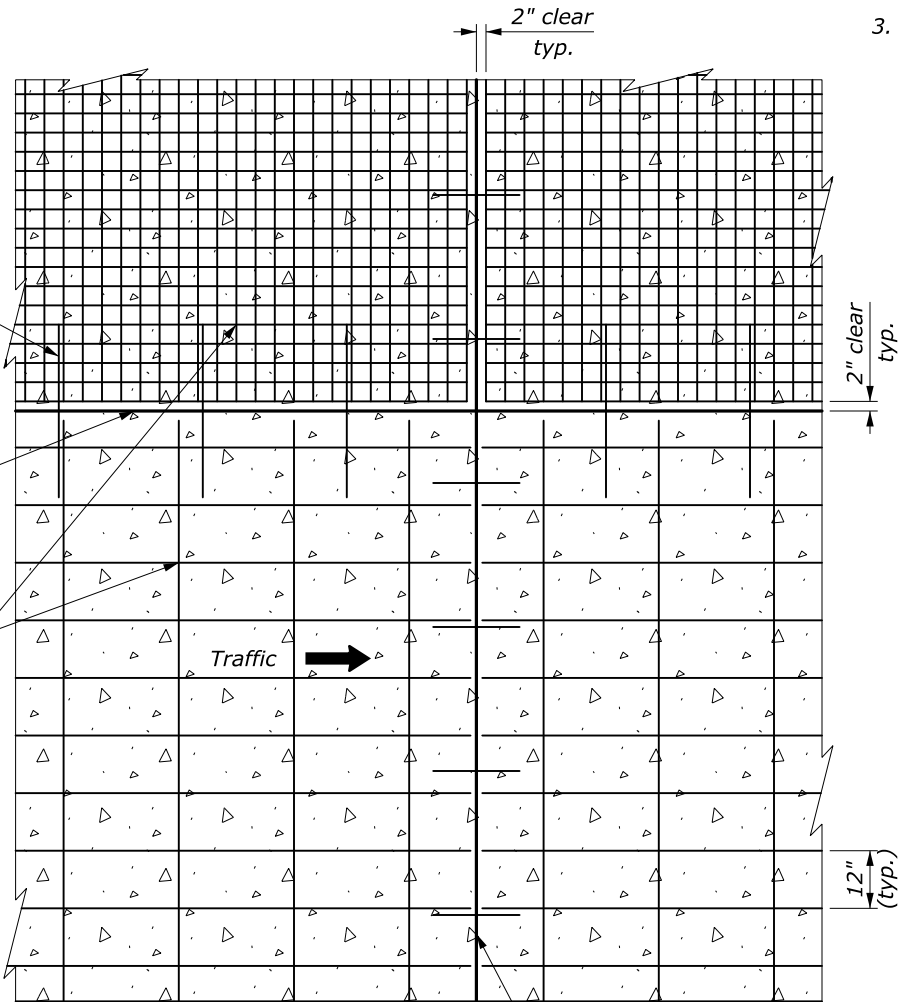

24" (typ.)
2" clear typ.
12" (typ.)
Transverse contraction joint
PLAN

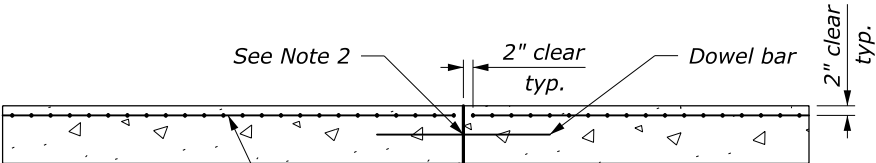

PROFILE

REINFORCED MINOR CONCRETE PAVEMENT

NO SCALE

U.S. DEPARTMENT OF TRANSPORTATION FEDERAL HIGHWAY ADMINISTRATION FEDERAL LANDS HIGHWAY	
U.S. CUSTOMARY STANDARD	
MINOR CONCRETE PAVEMENT	
STANDARD APPROVED FOR USE --/----	STANDARD
REVISED: 9/2016	501-1