



SINGLE POST SIGN

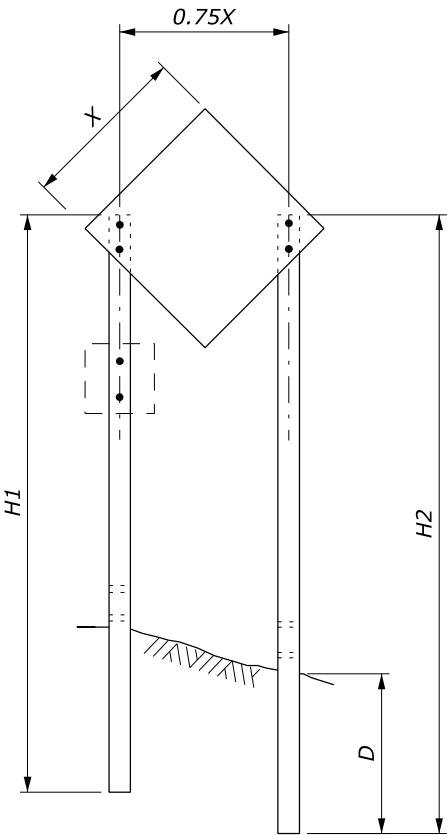


TWO POST SIGN

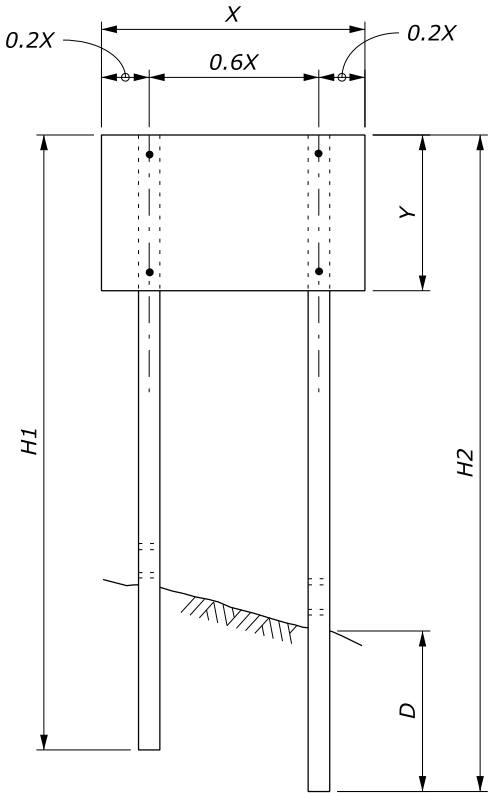


NOTE:

1. Attach sign panels with a minimum of 2 - 6.25 mm Ø bolts per post.
2. H1 and H2 = Overall post length. Select post lengths to fit field conditions.
3. D = Post embedment depth for average soil conditions.
4. In areas where lateral distance is limited, a minimum lateral offset of 600 mm may be used. In areas with curbs, a minimum lateral distance of 300 mm behind the face of the curb may be used.
5. In pedestrian locations, or in areas with obstructed views, use 2.1 m minimum mounting height for main sign and 1.8 m minimum mounting height for secondary sign.
6. Use 2.1 m minimum spacing between posts for sign posts 150 mm x 150 mm or larger.
7. State standards may be used as an alternative if approved by the CO.
8. Dimensions without units are millimeters.

| WOOD POST SELECTION TABLE | | | | | |
|--|-----------|-----------------|----------------|--------|----------------|
| WIDTH "X" | AREA (m2) | NUMBER OF POSTS | POST SIZE (mm) | D (mm) | HOLE SIZE (mm) |
| Diamond ≤ 915 mm Other Shapes ≤ 1220 mm | < 0.9 | 1 | 100 x 100 | 900 | 0 |
| | | 1 | 100 x 150 | 1200 | 40 |
| Diamond ≤ 1220 mm | 0.9 - 1.9 | 1 | 150 x 150 | 1200 | 50 |
| Diamond ≤ 1220 mm Other Shapes ≤ 3.7 m | 0.9 - 1.9 | 2 | 100 x 100 | 900 | 0 |
| | 1.9 - 4.6 | 2 | 100 x 150 | 1200 | 40 |
| > 4 m | 4.6 - 6.0 | 2 | 150 x 150 | 1200 | 50 |
| 3.7 m - 4.9 m | 4.6 - 6.0 | 3 | 100 x 150 | 1200 | 40 |
| > 5 m | 6.0 - 8.9 | 4 | 100 x 150 | 1200 | 40 |
| > 9 m | 6.0 - 8.9 | 3 | 150 x 150 | 1200 | 50 |

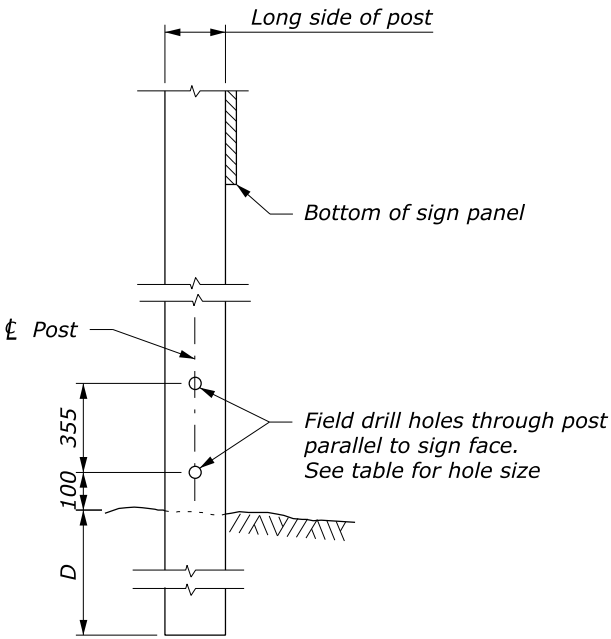

POST DETAIL

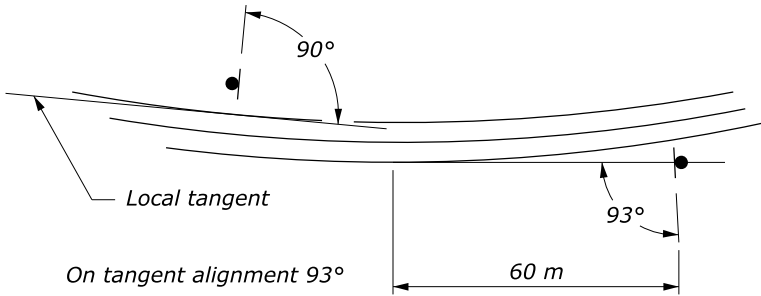

SIGN INSTALLATION ANGLE

NO SCALE