



A JOURNAL OF HIGHWAY RESEARCH



UNITED STATES DEPARTMENT OF AGRICULTURE
BUREAU OF PUBLIC ROADS

VOL. 17, NO. 6

 ∇

AUGUST 1936



A SECTION OF US 10 IN MONTANA

PUBLIC ROADS *** A Journal of Highway Research

Issued by the

UNITED STATES DEPARTMENT OF AGRICULTURE BUREAU OF PUBLIC ROADS

Volume 17, No. 6

August 1936

The reports of research published in this magazine are necessarily qualified by the conditions of the tests from which the data are obtained. Whenever it is deemed possible to do so, generalizations are drawn from the results of the tests; and, unless this is done, the conclusions formulated must be considered as specifically pertinent only to described conditions.

In This Issue Digest of Report on Arkansas Traffic Survey 113 The Cone Method for Determining Absorption by Sand . . . State Motor-Fuel Consumption and Tax Receipts, 1935 135 State Motor-Vehicle Registrations and Receipts, 1935 . . .

THE BUREAU OF PUBLIC ROADS - - - - - - Willard Building, Washington, D. C. - - Federal Office Building, Civic Center, San Francisco, Calif. REGIONAL HEADOUARTERS - - -

DISTRICT OFFICES

DISTRICT	No. 1.	Oregon,	Washington,	and	Montana.		
					Post Office Building,	Portland,	Oreg.

DISTRICT No. 2. California, Arizona, and Nevada.

Federal Office Building, Civic Center, San Francisco, Calif-DISTRICT No. 3. Colorado, New Mexico, and Wyoming.

237 Custom House, Nineteenth and Stout Sts., Denver, Colo.

DISTRICT No. 4. Minnesota, North Dakota, South Dakota, and Wisconsin. 907 Post Office Building, St. Paul, Minn.

DISTRICT No. 5. Iowa, Kansas, Missouri, and Nebraska. Saunders-Kennedy Building, Omaha, Nebr.

DISTRICT No. 6. Arkansas, Louisiana, Oklahoma, and Texas.

Room 502. United States Courthouse, Fort Worth, Tex.

DISTRICT No. 7. Illinois, Indiana, Kentucky, and Michigan. South Chicago Post Office Building, Chicago, Ill. DISTRICT No. 8. Alabama, Georgia, Florida, Mississippi, and Tennessee. Post Office Building, Montgomery, Ala.

DISTRICT No. 9. Connecticut, Maine, Massachusetts, New Hampshire, New Jersey, New York, Rhode Island, and Vermont. 505 Post Office Building, Albany, N. Y.

DISTRICT No. 10. Delaware, Maryland, Ohio, Pennsylvania, and District

Willard Building, Washington, D. C.

DISTRICT No. 11. Alaska.

Room 419, Federal and Territorial Building, Juneau, Alaska. DISTRICT No. 12. Idaho and Utah.

Federal Building, Ogden, Utah.

DISTRICT No. 14. North Carolina, South Carolina, Virginia, and West Virginia.

Montgomery Building, Spartanburg, S. C.

Because of the necessarily limited edition of this publication it is impossible to distribute it free to any person or institutions other than State and county officials actually engaged in planning or constructing public highways, instructors in highway engineering, and periodicals upon an exchange basis. At the present time additions to the free mailing list can be made only as vacancies occur. Those desiring to obtain Public Roads can do so by sending \$1 per year (foreign subscription \$1.50), or 10 cents per single copy, to the Superintendent of Documents, United States Government Printing Office, Washington, D. C.

DIGEST OF REPORT ON ARKANSAS TRAFFIC SURVEY

BY THE DIVISION OF HIGHWAY TRANSPORT, BUREAU OF PUBLIC ROADS

Reported by L. E. PEABODY, Senior Highway Economist

THE Arkansas traffic survey was conducted under a cooperative research agreement between the Bureau of Public Roads and the Arkansas State Highway Commission during the period from April 1934 to June

The survey was undertaken to obtain essential facts regarding the amount, type, and distribution of traffic, to be used as a basis for planning highway development to serve present and future traffic. Included in the full report, which has been published by the State of Arkansas, is a detailed study of the origin and destination of vehicles; a brief summary of facts regarding the movement of passenger cars and busses; an extended analysis of truck and bus transportation at several locations throughout the State; and a discussion of tourist traffic in Arkansas, including the purposes of visiting Arkansas, the type of accommodations used, the number of persons carried, and the average length

Owing to the relative traffic importance of the several systems of highways, the following brief description of their character and functions is given:

State highway system.—Those roads legally designated as under the complete jurisdiction of the State highway

Federal-aid system.—Trunk-line highways and highways connecting county seats upon which the expenditure of Federal-aid funds is concentrated, comprising about 7 percent of the total road mileage.2

U. S. system.—Numbered and marked highways forming an interconnected system of through routes and distinguished by the United States shield marking. These highways have no special legal status and receive no special funds by reason of being designated U. S.

Forest highway system.—Highways under the jurisdiction of the Forest Service (within or appurtenant to

the national forests).

The traffic survey covered over 8,000 miles of road, all of which were on the State highway system. This coverage, amounting to 91 percent of the State highway system, included most U. S. highways and a large portion of Federal-aid and Forest highways as shown in table 1.

Table 1.—Mileage of roads included in the various highway systems, and mileage of each system included in the traffic survey

Highway system	Total mile- age ¹	Miles in- cluded in traffic sur- vey	Percentage of total sys- tem studied
State Federal aid U. S Forest	8, 822 5, 157 2, 740 427	8, 043 5, 063 2, 678 320	91 98 98 98 75

¹ Exclusive of streets in cities of 2,500 or more inhabitants.

² Recent emergency legislation has permitted the expenditure of special Federal road funds under certain conditions on roads other than the Federal-aid system.

AVERAGE TRAFFIC OVER ALL HIGHWAYS STUDIED WAS 369 VEHICLES PER DAY

Actual field operations of counting and classifying traffic began on April 23, 1934, and terminated June 1, 1935. In the analysis of the field records a 24-hour day and a 1-year period were the base units to which all data were adjusted.

Data were collected at 266 locations covering the principal State highways. Most of these were at intersecting highways where the field man could record traffic upon three or more roads from one location. The three types of stations operated and their number

	Number
Key stations	128
Blanket stations	117
Special stations	
Total	266

Key stations, frequently referred to as "regular count stations", were situated at the most strategic control points and were operated uniformly at regular intervals during the period of the survey. Each operation covered a 10-hour period on a staggered schedule from 6 a. m. to 4 p. m. and from 10 a. m. to 8 p. m. with splits in the count at 10 a. m. and 4 p. m. This permitted a continuation series of the 10 a. m. to 4 p. m. section through all operations, which were scheduled to provide two counts for each of the seven days of the week during periods of operation. Sufficient night counts from 10 p. m. to 6 a. m. were obtained to adjust all data to a 24-hour day.

Blanket stations were situated on the less important roads and were operated four times during the survey. Data from them have been adjusted to a 24-hour day

by correlation with the key stations.

Where the extent of traffic coverage was in doubt or in order to extend the coverage beyond a known point, special stations were set up and operated simultaneously with the nearest controlling key station for a

number of days.

The average traffic over all roads surveyed was 369 vehicles per day and traffic ranged from 5,425 vehicles per day on U S 70 between West Memphis, Arkansas and Memphis, Tenn., to zero traffic on several unimproved sections of road in the northeast section of the State. There were three of these sections having no traffic: West of Rector on Ark. 90; south of Tupelo on Ark. 17; and south of Amagon on Ark. 37, where the road was impassable to motor-vehicle traffic during all operations of the traffic stations covering the route.

Figure 1 shows the density of traffic of all vehicles over all highways surveyed. The inner stippled band indicates the 24-hour average daily traffic density and

the outer band the maximum traffic.

All recorded data were adjusted, where necessary, from supplemental information to develop daily average traffic densities over a 1-year period representative of normal conditions. Special notations were made of

¹ The Bureau of Public Roads does not have copies of the full report for general

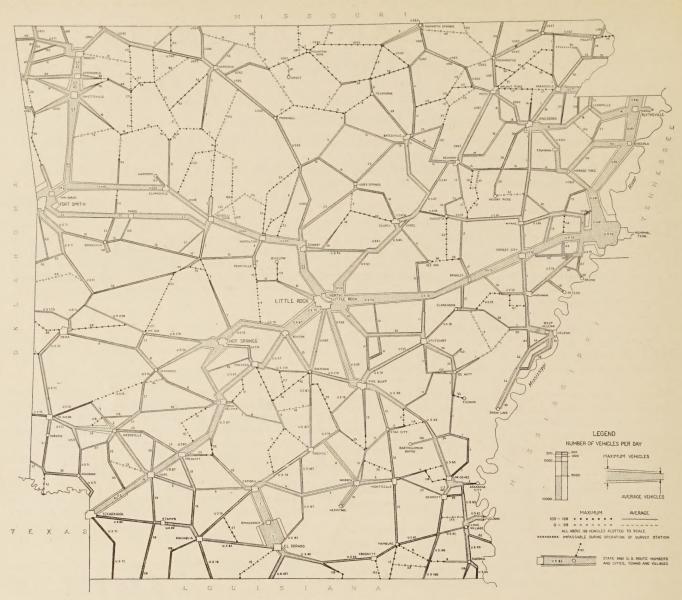


FIGURE 1.—AVERAGE AND MAXIMUM DAILY TRAFFIC DENSITY ON ARKANSAS STATE HIGHWAYS.

highway construction and abnormally affecting traffic, State University. To the north of Fayetteville, at and proper correction was made for them. Trucks Springdale, are located an important winery and canengaged in regular highway maintenance work were ning factory, while farther north there is considerable considered as normal traffic and included with other trucks. A number of special movements were recorded such as the hauling of lumber, oil, cotton, and peaches and other fruits, all of which occupy a regular place in commercial activities and are a part of normal annual traffic.

Between El Dorado and Camden, there was considerable local traffic created by a large paper mill situated south of Camden and by numerous oil wells in the vicinity of Smackover and El Dorado. Between El Dorado and Smackover, most of the travel was in the nature of shuttle traffic in a restricted but highly important oil-producing area. El Dorado also has a number of important lumber mills.

In the vicinity of Fayetteville, all traffic-flow bands center north of Fort Smith, has considerable local ones are explained as follows:

trucks and other contractor's equipment engaged on development in its environs, and is the home of the resort traffic in the region of the Ozark Mountains. of these factors influence traffic in this section of the State, especially on US 71.

Particular mention is given routes Ark. 44, 49, and 85 from Helena to Snow Lake and especially in the vicinity of Elaine. Construction work on dikes and levees along the Mississippi River in this area caused abnormal traffic throughout the entire period of the survey. Consequently, for this section of the highway system the traffic was unusually high, and because of the continuing nature of the work no weighting of the data was made.

MAXIMUM TRAFFIC WAS 143 PERCENT OF AVERAGE TRAFFIC

As may be noted by reference to figure 1 there are a increase in width toward the city. The city of Fayette- number of stub traffic bands some of which end ville is the State's largest and most important trading abruptly for no apparent reason, and several unusual Traffic on Ark. 116 south of Booneville was principally destined to, or returning from, the State Tubercular Sanitorium located 2 miles south of the city. The continuation of Ark. 116 to its junction with US 71 was unimproved and practically impassable.

Included in the surveyed mileage was 6.6 miles of Ark. 153 north of De Witt, serving a rice-growing district. Traffic over this highway was entirely farm to market. The town of De Witt is the trading and marketing center for a rich rural area and all traffic flow bands in the vicinity increase in width toward the city.

Traffic density on Ark. 15 obtained by the survey station at Warren was extended south to Hermitage. It is likely that traffic diminishes somewhat near Hermitage, but the amount could not be obtained from survey data. The section of Ark. 15 south of Hermitage was not studied.

The portion of Ark. 1 between St. Charles and Indian Bay, a distance of 6 miles, was impassable during a considerable period of the year. Improvement of this section would allow traffic from the area around the confluence of the White and Arkansas Rivers to reach Helena, where water terminal facilities exist.

Trucks were classified at all counting stations by type of equipment as single- or dual-unit loading. The single-unit group includes trucks, tractor trucks, and similar vehicles in which the load carried is one unit, whether supported entirely by the truck or with the aid of accessory wheels. The proportions of single-and dual-unit trucks were as follows:

Trucks, including tractor trucks	85. 5
Trucks with trailers or semitrailers (2 or more units)	14. 5
All trucks	100. 0

Single-unit trucks were recorded according to rated capacity and tabulated in three capacity groups—Under 2 tons, from 2 to 5 tons, and 5 tons and over. More than 91 percent of these trucks were under 2 tons capacity, while but 0.1 percent were of 5 tons capacity or over, as shown by the following:

	rescent
Under 2 tons	91. 3
From 2 to 5 tons	8. 6
5 tons and over	. 1
-	
All single-unit trucks	100.0

Vehicles of foreign registration accounted for 18.7 percent of the traffic recorded at all stations, while the importance of interstate travel is illustrated by the fact that foreign vehicles at 42 border stations amounted to 40.6 percent of the total traffic.

The maximum traffic is the average peak load occurring a number of times during the year. It should not be confused with the absolute maximum traffic peak occurring but once a year. In general, the figures used refer to average maximum traffic conditions occurring on week-end periods during the summer.

For all highways studied, the maximum traffic was 143 percent of the average traffic. For 17 sections of highways, the maximum traffic was over 200 percent of the average traffic. An important characteristic of maximum traffic is its relation to the average daily traffic density; as the traffic density increases, the maximum traffic becomes a smaller percentage of the average traffic. This is illustrated in the following tabulation:

Average daily traffic (all vehicles)	Percentage that maxi- mum traf- fic is of average traffic	Average daily traffic (all vehicles)	Percentage that maxi- mum traf- fic is of average traffic
0- 99 100-249 250-499 500-999	180 153 149 144	1,000–1,499 1,500–2,499 2,500 and over	139 131 130

The utility and earning value of a highway are measured in units of travel—vehicle-miles. This term is defined as the movement of one motor vehicle a distance of 1 mile, and the total travel is the product of the average traffic over a particular section and the mileage of the section.

For the State as a whole there were 2,970,000 vehiclemiles of travel daily, and the average traffic over all roads was 369 vehicles per day. Highways in Mississippi County had the most travel, and included 127 miles of highway with an average traffic of 1,184 vehicles per day. All mileages are from the official map of the State Highway Commission as of January 15, 1935, which shows all State highway mileage by type of surface exclusive of streets in cities of 2,500 or more inhabitants. Traffic count data likewise excluded traffic in cities of 2,500 or more inhabitants.

One-third of the total of 75 counties had nearly 60 percent of the total travel, as may be seen in the following distribution of counties based on vehicle-mile determinations:

	Percentage of total travel
Highest 3 counties	14. 1
Highest 10 counties	32. 9
Highest 25 counties	
Lowest 10 counties	4.1

HIGH-TYPE ROADS CARRIED GREATEST TRAFFIC

The traffic data were further segregated and grouped by types of road surfacing and are summarized in table 2.

Table 2.—Mileage of State highways studied, classified by type of road surfacing and average daily traffic

Туре	Mileage of	verage daily traffic
Concrete Asphalt Retread Gravel Graded Unimproved	559 410 5, 167 561	1, 001 780 439 241 109 78
Total	8,043	369

All of the mileage studied in 15 counties had gravel or lower type of surface. Average traffic in these counties ranged from 84 vehicles per day in Marion County to 347 vehicles per day in Sevier County. In Sevier County the traffic was generally uniform, with the highest section averaging 523 vehicles per day on U S 71 between De Queen and Lockesburg. Compared to the averages for the entire State, this section had traffic equivalent to that for either the retread or asphalt group. Saline County had 8.3 miles of gravel roads carrying an average traffic of 751 vehicles per day, and Mississippi County had 28.1 miles with an average traffic of 520 vehicles per day. These figures are comparable with the State average traffic for retread and asphalt surfacing.

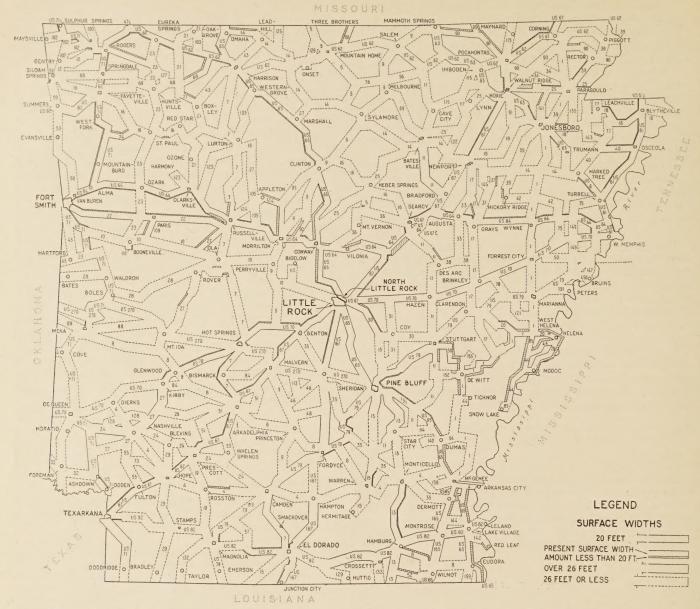


FIGURE 2.—SURFACE WIDTHS OF ARKANSAS STATE HIGHWAYS COVERED BY THE TRAFFIC SURVEY.

Crittenden County showed the highest average traffic for roads with concrete surfaces—2,538 vehicles per day. Woodruff County had the lowest average traffic, or 245 vehicles per day, on its 4.1 miles of concrete road. Columbia, Lawrence, and Lincoln Counties were next in order with average traffic of 327, 356, and 397 vehicles per day, respectively, over an aggregate length of 41.9 miles.

Mississippi County had the highest average traffic for asphalt surfaced highways—1,749 vehicles over 61.6 miles of asphalt surfaced road. Perry County was low with an average traffic of 132 vehicles per day, and Conway County was next with 218 vehicles per day.

Asphalt and concrete surfaced highways of suitable width and thickness are high-type roads, capable of meeting present-day traffic requirements. In Arkansas, these two types were found upon 1,582 miles of surveyed roads, or 20 percent of the total. Average traffic for this mileage amounted to 923 vehicles per day.

Retread surfaces are an intermediate or betterment stage of construction, while gravel roads are usually classified as low type, although their condition and riding qualities may be as good or better than some higher type surfaces.

The traffic survey covered 410 miles of retread surfacing over which traffic ranged from a high of 856 vehicles per day in Pope County to a low of 207 vehicles per day in Pike County. There were no counties that showed traffic on their retread mileage comparable with the average traffic over high-type roads of approximately 920 vehicles per day. But one county, Pope, had traffic on its retread mileage exceeding the State average of 780 vehicles per day for asphalt.

Similarly, comparing the gravel surfacing group with the retread surfacing group, Mississippi and Saline Counties showed traffic on their 36.4 miles of gravel roads in excess of the State average for retread.

A total of 884 miles of graded and unimproved roads was covered by the survey, comprising 11 percent of the total surveyed mileage. Average traffic over these

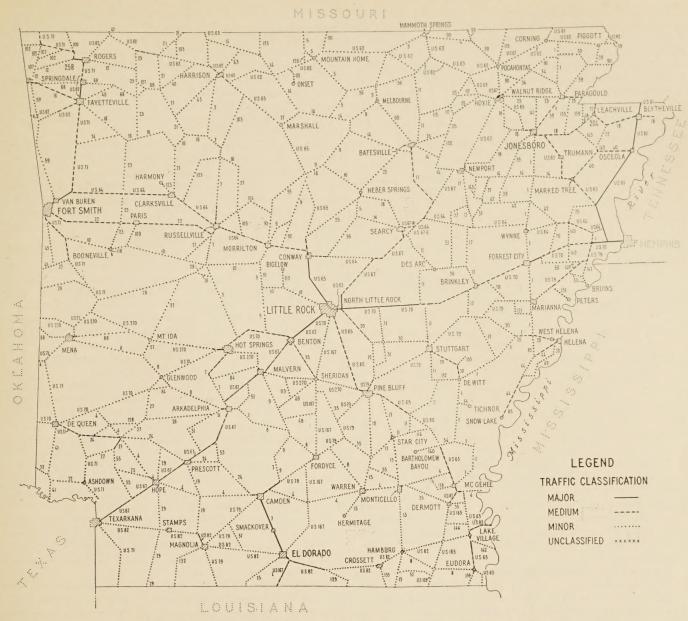


FIGURE 3.—CLASSIFICATION OF STATE HIGHWAYS BY VOLUME OF TRAFFIC CARRIED.

roads amounted to 97 vehicles per day. Graded roads are distinguished from unimproved roads principally by drainage conditions, for the surfaces of each are composed of natural or filled earth and consequently are usually dusty in dry weather and slippery in wet weather. Gravel surfacing is the next higher stage of construction, when required by traffic or to make the road an all-weather highway. Three counties showed average traffic on their graded and unimproved roads greater than the average for gravel in the State as a whole. These counties were: Benton, with 10.8 miles of graded road carrying 387 vehicles per day: Garland, with 24.9 miles of graded road carrying 252 vehicles per day; and Phillips, with 7 miles of unimproved road carrying 388 vehicles per day.

Seven different surface widths were reported on Arkansas State highway routes as shown in table 3. Figure 2 shows the present surface width to scale, together with a symbol indicating the additional width necessary to bring the present pavement width up to 20 feet.

roads amounted to 97 vehicles per day. Graded roads EIGHTY PERCENT OF ALL HIGHWAYS STUDIED CARRIED LESS THAN

Highways in Arkansas have also been classified in this report according to the amount of traffic carried. These classifications are: Major, medium, and minor.

Figure 3 shows the highways covered in the survey that carried 1,500 or more vehicles per day (major classification); those that carried 500 to 1,499 vehicles per day (medium classification); and those that carried under 500 vehicles per day (minor classification). The surveyed mileage on U. S. and State routes is summarized according to the above classifications in table 4.

There were some sections of Arkansas routes 17, 37, and 90 classified as unimproved that were reported as impassable on the days when traffic was counted at these points. These sections are indicated by a special symbol in figure 3. This figure also shows that a large mileage of Arkansas highways was in the minor classification.

Generally roads of major and medium classifications were main routes crossing Arkansas, more particularly

Rock. Ark. 7 between Camden and El Dorado was of major classification. This is the only mileage with major classification not on the U. S. system. All of U.S. 71 between the Missouri Line and Fort Smith was of major or medium classification. U S 61 was the only route in Arkansas that was of major classification for its entire length.

Table 3.—Surface widths of Arkansas State highways covered by the traffic survey

Surface width (feet)	Miles of highway	Percentage of total
Over 26	585 1 5, 143 244 1, 343 2 354 353 21	7. 3 63. 9 3. 0 16. 7 4. 4 4. 4
Total	8, 043	100.0

¹ Includes 4.5 miles that may be more or less than 26 feet.
² Includes 11 miles reported as impassable during survey counts.

Table 4.—Classification of Arkansas State highway mileage covered by traffic survey

Classification	Mileage	Percentage of total
Major Medium Minor	234 1, 336 6, 473	2. 9 16. 6 80. 5
Total	8, 043	100.0

There were long routes in Arkansas that had all or practically all of their mileage in the minor classification. This is true of US 62, which is 344 miles in length including overlaps on other US routes. There were 294 miles on this route with a traffic density of less than 500 vehicles per day. US routes 79, 82, 165, 167, and 270 had most of their mileage in the minor classification.

Most of the mileage on State routes was of minor traffic classification. All of the 238 miles on Ark. 9 and 217 miles on Ark. 14 were of minor classification. About 206 miles of the major classification, or 88 percent were located on U. S. routes.

Traffic on a few sections that are reported to be of medium or minor classification may have had a traffic density of a higher classification at one end of the section, but the average traffic for the whole section was such as to place the particular mileage in the lower classification. An example is Ark. 45, which was of medium traffic classification at Fayetteville but of minor classification at the junction with Ark. 68.

ONE-FOURTH OF STATE HIGHWAY MILEAGE CARRIED NEARLY ONE-HALF OF THE TOTAL TRAFFIC

In each highway system there are concentrations of motor-vehicle traffic on certain roads generally referred to as trunkline highways, and as a result of the concentration of traffic a few routes stand out as the principal lanes of travel (fig. 4).

The most heavily traveled route through Arkansas extends from the Mississippi River bridge near Memphis, Tennessee, to Little Rock via US 70 and thence via US 67 to Texarkana. From the Mississippi River to Little Rock traffic averaged 1,725 vehicles per day.

U S 61, routes from Memphis to Texarkana via Little of which 39 percent was foreign. From Little Rock to Rock, and routes from Eudora to Fort Smith via Little Texarkana traffic averaged 1,137 vehicles per day, of which 36 percent was foreign. On this section at Benton there was a considerable change in density owing to the use of US 70 by traffic going to Hot Springs National Park. The greatest traffic density along the route was recorded between West Memphis and Memphis-5,425 vehicles per day; and the lowest traffic density on this route was southwest of Malvern-

752 vehicles per day.

The most heavily traveled intrastate route was U S 61 from the Missouri State line near Blytheville to West Memphis, over which traffic averaged 1,949 vehicles per day. The section on this route having the least traffic, north from Blytheville to the State line, had 1,452 vehicles per day. This is an especially heavy trucking route, averaging 419 trucks per day or nearly

twice that of any other through route.

The principal highway connecting the two largest cities in Arkansas-Little Rock with a population of 81,679 and Fort Smith with 31,429—is the combination of US 64 and US 65 via Conway, Russellville, and Clarksville. All of this route has high-type surfacing, and over its 151 miles of length traffic averaged 1,106 vehicles per day. Between Russellville and Fort Smith, vehicles can use an alternate route—Ark. 22 with a portion of Ark. 7 and 27 via Dardanelle and This parallel highway is likewise of high-type surfacing with the exception of 3.3 miles between Russellville and Dardanelle. Traffic over this alternate route averaged 805 vehicles per day.

Little Rock is the commercial center of the State and the majority of the principal highways connect with this centrally located city like the spokes of a wheel. Also between Fort Smith and Rogers are concentrations of population which, combined with the interstate importance of route US 71, gave roads in the northwest area considerable traffic. Traffic on US 71 averaged 1,109 vehicles per day between the Missouri State line and Alma (junction of US 71 and US 64). The total traffic on this highway was practically equal to that on US 64 and US 65 between Little Rock and Fort Smith.

US 70 from Benton west to the Oklahoma State line showed unusual variations in average traffic flow that were especially noticeable on the section between Benton and Hot Springs. This section carried an average traffic of 985 vehicles per day, while west of Hot Springs to the State line the traffic was 281 vehicles per day. The city of Hot Springs and Hot Springs National Park receive most of their traffic from the north and east.

The length of all routes illustrated in figure 4 totals 2,019 miles, or 25.1 percent of all roads covered by this survey. Their classification by traffic density groups is shown in table 5.

Table 5.—Classification of principal through routes shown in figure 2 by density of traffic

Vehicles per day	Selected through routes	Percentage of total
Under 250	Miles 190 732 897 200	9. 4 36. 3 44. 4 9. 9
Total	2, 019	100.0

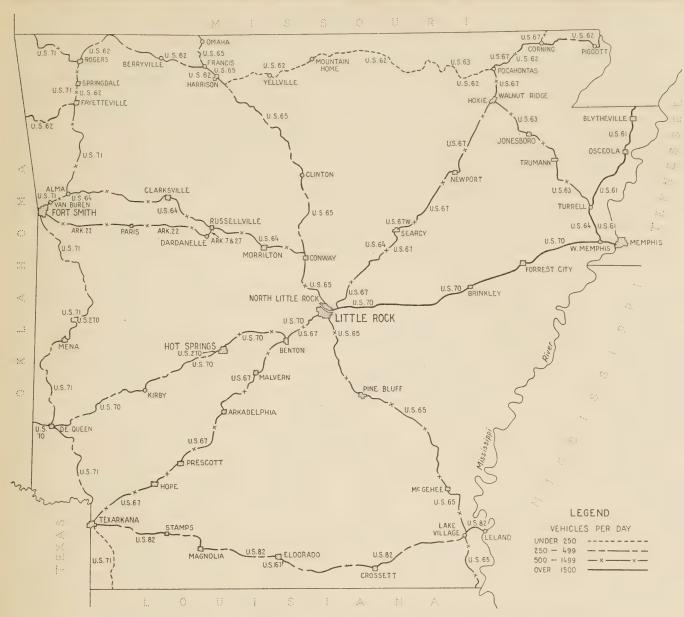


FIGURE 4.—PRINCIPAL THROUGH ROUTES CARRYING THE LARGEST VOLUMES OF TRAFFIC.

From this table it will be seen that approximately 10 percent of the through-route mileage carried a traffic in excess of 1,500 vehicles per day (major classification), and 46 percent carried a traffic of 500 or less vehicles per day (minor classification).

Travel upon the highways shown in figure 4 and listed in table 5 amounted to 1,450,000 vehicle-miles per day, or nearly 49 percent of that upon all roads covered by this survey. Thus, one-fourth of the State highway mileage was carrying about one-half of the total traffic.

Detailed data for a representative sample of truck, bus, and passenger-car traffic were recorded at 25 stations in various parts of the State. These stations were numbered consecutively from 1 to 25.

SPECIAL STUDIES CONDUCTED AT 25 STATIONS

These 25 stations were located on the main thoroughand other principal cities. Stations 1, 3, 8, 10, and 19 above.

were located on U S 67 which traverses the State from northeast to southwest. Stations 2 and 4 were on US 63 and 64, respectively. Stations 5 and 7 were on US 70 between Memphis, Tenn., and Little Rock. Station 6 was on US 79 between Memphis and Pine Bluff. Station 23 was near Fort Smith on Ark. 22, which converges at Russellville with US 64 and thence joins US 65 north of Conway. Stations 9, 12, 13, and 14 were on US 65, which crosses the State from northwest to southeast, and stations 11, 15, and 16 were on US 167 which runs south from Little Rock to El Dorado and the Louisiana border. Station 17 was between El Dorado and Texarkana on US 82, the southernmost east-west highway of the State. Stations 25, 24, 22, 21, 20, and 18 were on US 71, the principal north-south highway in the western part of the State. In the tables that show figures for individual fares of the State and in the vicinity of Little Rock stations, the stations are listed in the order outlined

The information relating to truck, bus, and passenger-car traffic recorded at these 25 stations included the State of registration of each vehicle; its origin and destination on the current trip; the situs of ownership, whether farm or city, the latter class being subdivided into private and company ownership; and the trip classification, whether State, interstate, or trans-State. Information was also obtained regarding the operation of trucks and busses, whether privately operated or operated as contract haulers or common carriers; and the extent of contact of trucks and busses with railroad service, that is, whether they stopped or started at a railroad station. The nature of the load carried, rated capacity, and gross axle and trailer loads of trucks, and the number of passengers carried by busses at the time of questioning, were also recorded.

The difference between the totals in the individual tables results from the fact that every item of information was not obtained for all vehicles. Since the size of the samples used in the tables varies slightly, actual numbers should be used only in connection with those in the analysis in which they occur. Percentages, however, which represent general relations, may be used

without this restriction.

Certain terms that are used in the following tables

are defined as follows:

Trip classifications: State—a trip on which the vehicle did not cross the boundaries of Arkansas; interstate—a trip on which the vehicle had one terminus in Arkansas and crossed the boundaries of the State en route. In some cases both the origin and destination were within the State. Trans-State—a trip on which the vehicle passed through Arkansas en route between

points in other States.

Classes of operation: Private operator—a vehicle operated by its owner or his employee in the pursuit of the owner's private business, as distinguished from the two classes of commercial vehicles engaged in hauling for others for hire; contract hauler—a vehicle that makes special trips when and where desired, at rates agreed upon by the contracting parties; common carrier—a vehicle that followed established routes between fixed points, and operated on a regular schedule at standard published rates.

Capacities of trucks—Manufacturers' rated capacities are sometimes combined into the following groups: Light—1½ tons and under; medium—between 1½ and 3

tons; heavy—3 tons and over.

Nature of load carried: Manufactured products—wholesale deliveries, automobile parts, newspapers, or any other class of manufactured commodities; agricultural products—all unprocessed products of agriculture, including milk, livestock, etc.; mineral products—coal, marble, oil, gasoline, etc.; forest products—lumber, trees, shrubs, etc.; household goods—furniture in moving vans, etc., excluding new furniture which belongs with manufactured products; highway materials—State highway trucks, construction materials, etc.

Definitions of vehicle-units: Trailer—any trailer or semitrailer without distinction as to size or type of unit; single-unit trucks—trucks of which both engine and body were supported by a single chassis; truck-trailer combinations—a motor unit to which full or semitrailer units were attached.

Daily motor traffic at these 25 stations between April carried agricultural products. A greater percentage of 1934 and June 1935 averaged 26,848 vehicles per day, of which 80.2 percent were passenger cars, 18.7 percent trucks, and 1.1 percent busses. An average of only

about one truck per thousand was recorded as making contact with railroad service, the range among individual stations being from one to five trucks per thousand. An average of 29 busses per hundred recorded made contact with railroad service by having one or the other (or both) of their terminals at a railroad station. Busses making such contact varied from 2 to 75 percent of those recorded at individual stations.

Approximately three out of four vehicles of all kinds carried Arkansas registration plates. A greater percentage of trucks and busses than of passenger cars carried such tags. A little less than two out of three vehicles of all types were owned by individuals living in cities, one out of four by city companies, and one out of nine by farmers. Six out of 10 vehicles were engaged in State traffic, almost 3 out of 10 in interstate traffic, and about 1 out of 11 in trans-State traffic.

CLASSIFICATION OF LOADS CARRIED BY TRUCKS DISCUSSED

The classification of single-unit trucks and of trucktrailer combinations according to whether they were loaded or empty at the time of questioning, and according to the designated type of load carried, is presented in table 6.

Sixty-one percent of all trucks recorded at 25 stations were loaded, and 39 percent were empty. Manufactured products comprised the loads of more than one-half of the loaded trucks. One out of 5 of the loaded trucks carried agricultural products and 1 out of 10 carried passengers. Next in importance as truck loads were mineral and forest products, followed by house-hold goods, highway materials, and retail delivery in the order named.

Table 6.—Classification of single-unit trucks and trucks with trailers recorded at 25 stations, by nature of load carried

	Single-unit trucks		Truck-trailer combinations		All trucks		combi-
Nature of load carried	Number	Percentage of grand total	Number	Percentage of grand total	Number	Percentage of grand total	Percentage of nations with one trailer
Commercial commodities: Manufactured products Agricultural products Mineral products, oil Forest products. Retail delivery		12.1	720 82 465	39. 7 12. 8 1. 5 8. 2	10, 423 4, 113 1, 346 1, 189 90		
Total	13, 651	48. 6	3, 510	62. 2	17, 161	50.8	99. 1
Other types of load: Passengers	1, 947 626 560	2. 2	76	1.3	702	2.1	100.0
Total	3, 133	11. 1	165	2.9	3, 298	9.8	100.0
All types of load	16, 784 11, 351			65. 1 34. 9			
Grand total	28, 135	100.0	5, 646	100. 0	33, 781	100.0	99. 2

A greater percentage of truck-trailer combinations than of single-unit trucks carried manufactured products, although the actual number of single-unit trucks carrying this class of commodities was almost four times as great as that of truck-trailer combinations. About the same percentage of each type of trucks carried agricultural products. A greater percentage of single-unit trucks carried mineral products, such as coal, marble, oil, and gasoline, while a much greater percentage of trucks with trailers carried forest prod-

ucts. Only single-unit trucks were recorded as making retail delivery, and there were comparatively few of these. Since the stations at which these traffic samples were taken were usually in the outskirts or entirely outside of commercial centers, the low percentage of retail delivery trucks indicates the infrequency of this type of transportation in outlying areas of Arkansas.

These five groups of products have been combined into a major group, called commercial commodities, as distinguished from other types of loads, such as passengers, used household goods, and State highway trucks. Almost 49 percent of all single-unit trucks and more than 62 percent of trucks with trailers were carrying commercial commodities. The corresponding percentages for all other types of load were about 11 and 3 percent, respectively.

The frequency distribution of busses carrying various numbers of passengers is given in table 7. The average number of passengers carried by busses in each fre-

quency group is also shown.

Table 7.—Classification of busses recorded at 25 stations, by number of passengers carried

Number of passengers	Number of busses	Percentage of total	Cumula- tive per- centage	Average number of passengers
None. 1 to 5 6 to 10. 11 to 15 6 to 20 21 to 25 26 to 30 31 to 35 36 to 40 41 to 45 46 to 50 More than 50	196 564 494 325 252 166 124 61 35 16 18 8	8.7 25.0 21.9 14.4 11.2 7.3 5.5 2.7 1.5 .7 .8 .3	8. 7 33. 7 55. 6 70. 0 81. 2 88. 5 94. 0 96. 7 98. 2 98. 9 99. 7 100. 0	0. 0 3. 0 7. 8 13. 0 17. 6 22. 8 28. 1 33. 0 38. 3 44. 1 49. 1 59. 4
Total	2, 259	100.0		11. 9

Among busses that operated exclusively within the State, there were about three contract-hauler busses, including hired school busses, chartered busses, and the like to every seven common-carrier busses. Comparatively few contract-hauler busses were found in interstate or trans-State traffic, more than 9 out of 10 of these being common carriers.

More than half of the privately owned busses were contract haulers, but only about 4 percent of company owned busses were engaged in this class of operation. The principal business of company owned busses was that of serving the public as common carriers.

EIGHTY-NINE PERCENT OF ALL BUSSES CARRIED 25 PASSENGERS OR LESS

From the average daily density of truck traffic and the average gross weight of trucks recorded at each of the 25 stations, the estimated total gross weight of daily truck traffic, including both single-unit trucks and truck-trailer combinations, have been derived.

These data are presented in table 8.

The average gross weight of all single-unit trucks recorded at the 25 stations was 6,270 pounds. The gross weight of loaded single-unit trucks was 7,390 pounds, and that of empty trucks of this type was 4,550 pounds. The corresponding average gross weights of truck-trailer combinations were 15,040 pounds, 18,320 pounds, and 8,920 pounds, respectively. Thus, loaded trailer combinations weighed about two and one-half times as much as loaded single-unit trucks, and empty trailer combinations about twice as

Table 8.—Estimated total gross weight of daily truck traffic recorded at 25 stations

Sta-		Aver-	Aver-	Estimated gross we	
tion num- ber	Location of station	age daily truck traffic	gross weight per truck	Weight	Per- cent- age of total
1 3 8 8 10 10 10 12 4 4 5 5 7 6 6 23 9 12 13 14 11 15 16 6 17 7 25 24 22 21 20 18	U S 67 and 62 at Corning. U S 67 and Ark. 14 west of Newport. U S 67 northeast of North Little Rock. U S 67 and 70 southwest of Little Rock. U S 67 and 70 southwest of Little Rock. U S 63 and Ark. 9 at Mammoth Springs. U S 64 west of Augusta. U S 70 ast of West Memphis. U S 70 at De Valls Bluff U S 79 at Roe. Ark. 22 east of Ft. Smith. U S 65 and 64 north of Conway. U S 65 and 64 north of Conway. U S 65 and Ark. 13 east of Pine Bluff U S 65 and 165 southeast of McClehee U S 167 rootheast of El Dorado. U S 167 and 82 southeast of El Dorado. U S 167 and 82 southeast of El Dorado. U S 167 and 82 southeast of El Dorado. U S 167 and 82 southeast of El Dorado. U S 167 and 82 southeast of El Dorado. U S 71 and 62 west of Rogers. U S 71 and 64 at Alma. U S 71 southeast of Ft. Smith. U S 71 southeast of Texarkana.	Number 130 102 228 329 320 103 1445 38 988 130 32 196 6398 120 120 189 244 106 28 170 411 471 435 180 65 65	6, 180 6, 680 6, 390 7, 280 7, 180 7, 180 8, 750 11, 140 8, 910 7, 340 7, 670 7, 190 5, 790 6, 430 8, 280 6, 570 7, 160 6, 580 7, 140 6, 410	Pounds 803, 400 681, 360 681, 360 1, 456, 920 2, 329, 600 739, 540 772, 850 331, 360 1, 448, 200 285, 120 285, 120 1, 438, 640 3, 052, 660 1, 358, 910 1, 390, 800 681, 580 231, 840 1, 008, 100 336, 200 3, 094, 470 3, 114, 600 1, 184, 400 443, 520 714, 000 416, 650	2. 2 1. 4. 6 2. 1 2. 1 2. 1 3. 9 3. 9 3. 8 3. 8 3. 8 3. 8 3. 8 3. 8 3. 8 3. 8
	Average or total	5,022	7, 350	36, 910, 120	100,

much as empty single-unit trucks. The average net load of single-unit trucks was 2,840 pounds, and that of trailer combinations was 9,400 pounds, the latter being more than three times as great as the former.

The average gross weights of trucks, according to rated capacity groups were as follows: Loaded single-unit trucks—light, 6,830 pounds; medium, 13,040 pounds; and heavy, 19,880 pounds: Empty single-unit trucks—light, 4,310 pounds; medium, 8,660 pounds; and heavy, 15,740 pounds. These figures indicate that an average net load of 2,520 pounds was carried by light trucks of this type, 4,380 pounds by medium-size trucks, and 4,140 pounds by heavy trucks, the heaviest average net load being carried by medium-size trucks.

DATA ON AXLE LOADS AND TOTAL GROSS LOADS OF TRUCKS ${\bf PRESENTED}$

The total gross weights of single-unit trucks and truck-trailer combinations ranged as follows: From 1,000 to 20,000 pounds for empty single-unit trucks, with a median between 4,000 and 5,000 pounds; from 1,000 to 42,000 pounds for empty truck-trailer combinations, with a median between 8,000 and 9,000 pounds; from 1,000 to 33,000 pounds for loaded singleunit trucks, with a median between 6,000 and 7,000 pounds; and from 2,000 to 67,000 pounds for loaded truck-trailer combinations, with a median between 18,000 and 19,000 pounds. The median group in each series represents the point so chosen that half the number in the series were above and half below it. In each group the presence of a few very heavy trucks was balanced by a larger number in the lighter-weight groups. The greatest average gross weight of loaded single-unit trucks was found among those carrying forest products, and the average gross weight of those

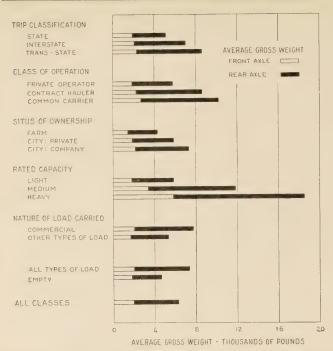


Figure 5.—Average Gross Axle Loads of Trucks Recorded at 25 Stations by Various Classifications.

Average gross axle and total loads of trucks according to trip, operation, and ownership classifications, rated capacity, and nature of load carried, are presented in tables 9 to 12 inclusive. The principal items are also shown graphically in figure 5.

Table 9.—Number and average axle loads of trucks recorded at 25 stations, by various classifications

	, 0 9 0					
			Avera	ge gross lo	oads 1	
Classification	Number	Fron	Front axle Rear axle			
Classification	trucks	Weight	Percentage of total weight	Weight	Percent- age of total weight	Total weight
Trip classification: State Interstate Trans-State.	23, 584 9, 107 1, 210	Pounds 1, 880 2, 070 2, 310	32. 4 29. 0 26. 9	Pounds 3, 930 5, 060 6, 290	67. 6 71. 0 73. 1	Pounds 5, 810 7, 130 8, 600
Total	33, 901	1, 950	31. 1	4, 320	68. 9	6, 270
Class of operation: Private operator Contract hauler Common carrier	28, 763 3, 460 1, 568	1, 870 2, 260 2, 740	32. 5 26. 2 26. 3	3, 890 6, 360 7, 680	67. 5 73. 8 73. 7	5, 760 8, 620 10, 420
Total	33, 791	1, 950	31. 1	4, 320	68. 9	6, 270
Situs of ownership: Farm City—Private City—Company	5, 892 12, 628 15, 313	1, 510 1, 830 2, 210	35. 4 31. 1 30. 1	2, 750 4, 050 5, 140	64. 6 68. 9 69. 9	4, 260 5, 880 7, 350
Total	33, 833	1, 950	31. 1	4, 320	68. 9	6, 270
Rated capacity: Light Medium Heavy	31, 383 2, 395 84	1, 820 3, 460 5, 920	31. 3 29. 3 32. 1	4, 000 8, 340 12, 510	68. 7 70. 7 67. 9	5, 820 11, 800 18, 430
Total	33, 862	1, 950	31. 1	4, 320	68. 9	6, 270
Nature of load carried: Commercial Other types of load	17, 161 3, 298	2, 080 1, 770	26. 7 33. 1	5, 690 3, 580	73. 3 66. 9	7, 770 5, 350
All types of load	20, 459 13, 322	2, 030 1, 820	27. 5 40. 0	5, 360 2, 730	72. 5 60. 0	7, 390 4, 550
Total	33, 781	1,950	31. 1	4, 320	68. 9	6, 270

¹ Represents gross weights of motor trucks, excluding trailers.

Table 10.—Number and average axle loads of trucks recorded at 25 stations on Arkansas highways, by nature of load carried

			Avera	ge gross lo	oads 1	
Nature of load carried	Number	Fron	t axle	Rear		
Availe of total carried	trucks	Weight	Percentage of total load	Weight	Percentage of total load	Total weight
Commercial commodities: Manufactured products. Agricultural products, Mineral products, oil. Forest products. Retail delivery.	10, 423 4, 113 1, 346 1, 189 90	Pounds 2, 130 1, 960 2, 260 1, 930 1, 410	28. 1 25. 0 26. 8 21. 7 38. 2	Pounds 5, 440 5, 880 6, 160 6, 970 2, 280	71. 9 75. 0 73. 2 78. 3 61. 8	Pounds 7, 570 7, 840 8, 420 8, 900 3, 690
Total	17, 161	2, 080	26. 7	5, 690	73. 3	7,770
Other types of load: Passengers	2, 004 702 592	1, 590 1, 810 2, 330	36. 8 28. 1 30. 9	2,740 4,630 5,200	63. 2 71. 9 69. 1	4, 330 6, 440 7, 530
Total	3, 298	1,770	33. 1	3, 580	66. 9	5, 350
All types of loadEmpty	20, 459 13, 322	2, 030 1, 820	27. 5 40. 0	5, 360 2, 730	72. 5 60. 0	7, 390 4, 550
Grand total	33, 781	1,950	31. 1	4, 320	68. 9	6, 270

¹ Represents gross weights of motor trucks, excluding trailers.

			Averag	ge gross lo	ads 1	
Rated capacity	Number	Fron	t axle	Rear axle		
rated tapacity	trucks	Weight	Percent- age of total load	Weight	Percent- age of total load	Total weight
3/4 ton 2	4, 757 644 7, 217 444 41 131 52 7 26	Pounds 1, 390 1, 440 1, 990 2, 860 3, 420 3, 870 4, 760 4, 770 5, 840	47. 3 41. 0 37. 6 37. 0 38. 6 37. 5 40. 5 36. 5 37. 1	Pounds 1, 550 2, 070 3, 300 4, 860 5, 430 6, 450 6, 980 8, 300 9, 900	52. 7 59. 0 62. 4 63. 0 61. 4 62. 5 59. 5 63. 5 62. 9	Pounds 2, 940 3, 510 5, 290 7, 720 8, 850 10, 320 11, 740 13, 070 15, 740
Capacity groups: 4 Light	12, 618 675 26	1, 740 3, 260 5, 840	40. 4 37. 6 37. 1	2, 570 5, 400 9, 900	59. 6 62. 4 62. 9	4, 310 8, 660 15, 740
All capacities	13, 319	1,820	40.0	2, 730	60.0	4, 55

¹ Represents gross weights of motor trucks, excluding trailers.

The average gross total weight of all trucks was 6,270 pounds, or a little more than 3 tons. The average gross weight on the front axles of all trucks was 1,950 pounds, and that on the rear axles was 4,320 pounds, representing 31.1 percent and 68.9 percent of the total, respectively.

The percentage of average gross weight carried by the front axle of trucks, grouped according to rated capacity, was greatest for heavy trucks and least for those of medium capacity. The corresponding percentage for trucks loaded with commercial commodities was smaller than that for those carrying other types of load. The percentages of the average total gross loads carried by front and rear axles were 27.5 and 72.5 percent for loaded and 40 and 60 percent for empty trucks.

² Includes two ¼-ton trucks. ³ Includes two ¾-ton trucks.

⁴ Light, 1½ tons and under; medium, between 1½ and 5 tons; heavy, 5 tons and over.

Table 12.—Number and average axle loads of loaded trucks recorded at 25 stations, by rated capacity

			Avera	ge gross le	oads 1	
Rated capacity	Number	Fron	t axle	Rear axle		
reaction deposity	of trucks	Weight	Percentage of total load	Weight	Percent- age of total load	Total weight
14 ton 2. 1 ton 3. 1 ton 3. 145 tons	271 77	Pounds 1, 390 1, 500 2, 150 3, 160 3, 920 4, 290 5, 710 4, 260 6, 010	39. 4 30. 0 25. 1 26. 3 29. 2 27. 4 32. 6 27. 7 30. 2	Pounds 2, 140 3, 500 6, 400 8, 870 9, 510 11, 370 11, 780 11, 120 13, 870	60. 6 70. 0 74. 9 73. 7 70. 8 72. 6 67. 4 72. 3 69. 8	Pounds 3, 530 5, 000 8, 550 12, 030 13, 430 15, 660 17, 490 15, 380 19, 880
Capacity groups: 7 Light Medium Heavy	18, 765 1, 720 58	1, 880 3, 550 6, 010	27. 5 27. 2 30. 2	4, 950 9, 490 13, 870	72. 5 72. 8 69. 8	6, 830 13, 040 19, 880
All capacities	20, 543	2, 030	27. 5	5, 360	72. 5	7, 39

Represents gross weights of motor trucks, excluding trailers.
Includes one ¼-ton truck.
Includes six ¾-ton truck.
Includes one 1¾-ton truck.
Includes one 2¼-ton truck.
Includes one 7½-ton truck.

7 Light, 11/2 tons and under; medium, between 11/2 and 5 tons; heavy, 5 tons and over.

LIGHT TRUCKS HAD GREATEST TENDENCY TO EXCEED RATED CAPACITY

The greatest average gross weight of trucks classified according to the nature of load carried was found among those which carried forest products, mineral products, such as coal, oil, marble and similar products, and agricultural products. Trucks carrying these three groups of commodities also showed a smaller percentage of the total weight carried by the front axle than that of other groups, indicating that net loads of these commodities were relatively heavier, and that the loaded weight was concentrated principally on the rear axle. Retail delivery trucks and trucks carrying passengers showed a relatively greater proportion of the total gross load carried by the front axle, and trucks carrying manufactured products, including wholesale delivery trucks, as well as household goods and highway materials, were in an intermediate

position.

Average gross weights of trucks, classified according to rated capacity, are shown in tables 11 and 12. For empty trucks, both total and individual axle weights of these groups showed an approximately straight-line increase which varied directly with the increasing rated capacity. The few minor irregularities which appear in these series were caused in part by the small number of trucks in the samples for certain groups. But still another factor must be considered, that is, the inclusion in these samples of trucks of any and all makes, some of which were of light and some of extremely heavy construction, with many gradations between. The majority of trucks in the lowest rated capacity groups were of the lighter makes, and those in the 1½-ton capacity group, also, were principally of this type, while most, if not all, of the trucks of 5-tons capacity or over were of the more heavily built makes. In the intervening group, however, in addition to trucks of moderately heavy construction, there were

producing a composite group which does not conform to any of the types of which it is partly composed.

In the case of loaded trucks there are even more factors affecting the composition of the sample. Here, in addition to the differences between the vehicles themselves, the variation in the nature and weight of loads carried is also involved. Despite these divergent elements, the average total and axle weights of trucks, arranged in increasing order by rated capacity, show a comparatively regular increase, with the exception of the 4-ton capacity group, at which a marked break occurs in each series. This may be ascribed to the fact that the number of trucks in this capacity group is not sufficiently large to give a true average. The inadequacy of this group is shown in the frequency distribution.

Although the net weight of loads carried by individual trucks was not obtained in connection with this survey, it is possible to arrive at an approximate average net weight of loads by subtracting the weight of empty trucks from that of loaded trucks of corresponding rated capacity groups. This method has been followed in obtaining the figures presented in the third column of table 13.

The average net weight of loads increased with increase in rated capacity, but at a lesser rate than the capacity itself, up to the 4- and 5-ton groups, for which the computed average net loads were smaller than those for the 1½- and 2-ton groups, respectively. greatest average net load was carried by 3- and 3½-ton Trucks of light rated capacity carried relatively heavier net loads, and heavy trucks relatively lighter net loads, in comparison with their capacity. The average net load of trucks of all capacities was about 1.1 times the average rated capacity.

Table 13.—Average gross and net loads of trucks of each rated capacity recorded at 25 stations, and ratio to rated capacity

		<u>'</u>					
		ge gross ght 1	Average	Ratio of rated capacity to—			
Rated capacity	y ne		net weight 1	Average loaded weight	Average net weight		
1/2 ton	Pounds 3, 530 5, 000 8, 550 12, 030 13, 430 15, 660 17, 490 15, 380 19, 880	Pounds 2, 940 3, 510 5, 290 7, 720 8, 850 10, 320 11, 740 13, 070 15, 740	Pounds 590 1, 490 3, 260 4, 310 4, 580 5, 340 5, 750 2, 310 4, 140	1:3.5 1:2.5 1:2.9 1:3.0 1:2.6 1:2.5 1:1.9	1:0.6 1:0.8 1:1.1 1:1.1 1:0.9 1:0.9 1:0.8 1:0.3		
Capacity groups: ² Light ³ Medium ⁴ Heavy ⁶	6, 830 13, 040 19, 880	4, 310 8, 660 15, 740	2, 520 4, 380 4, 140	1:3.0 1:2.9 1:2.0	1:1.1 1:1.0 1:0.4		
All capacities 6	7, 390	4, 550	2, 840	1:3.0	1:1.1		

 1 Represents weights of motor trucks, excluding trailers. 2 Light, $1\frac{1}{2}$ tons and under; medium, between $1\frac{1}{2}$ and 5 tons; heavy, 5 tons and

over.

3 Average about 11/8 tons.

4 Average about 21/4 tons.

A verage about 5 tons.
 A verage about 1¼ tons.

SEVEN-EIGHTHS OF ALL LOADED TRUCKS WEIGHED LESS THAN 6 TONS

The frequency distributions of empty and loaded some of the heavier trucks of lighter makes, and a trucks of various capacities, according to average scattering of the lighter trucks of heavy makes, thus total gross-weight groups, are presented in tables 14

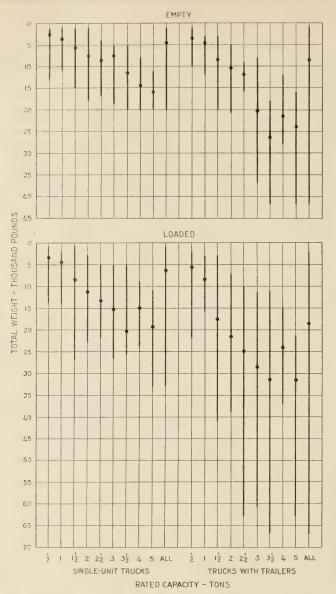


FIGURE 6.—TOTAL GROSS WEIGHTS OF EMPTY AND LOADED SINGLE-UNIT TRUCKS AND TRUCKS WITH TRAILERS OF EACH RATED CAPACITY, SHOWING RANGE AND MEDIAN POINT.

and 15. Figure 6 gives this same information in graphic form, showing the range and median point among weights of trucks of each rated capacity. This figure also includes corresponding information relating to trucks with trailers. In the tables, actual numbers have been converted to the number of trucks per thousand in the sample for each class, respectively, thus making possible general comparisons in each table. These figures can be converted into percentages by placing a decimal point in front of the last digit of each.

GROSS LOADS OF TRUCKS WITH TRAILERS-GENERAL CLASSIFICATIONS

Average gross axle and trailer loads of truck-trailer combinations, according to trip, operation, and ownership classifications, are presented in table 16. Corresponding figures for trucks with trailers which carried loads of various kinds are shown in table 17. A comparison of the relative importance of front axle, rear stations.

Table 14.—Frequency distribution of empty trucks recorded at 25 stations by rated capacity and total weight groups

	Nu	mbe	r of t		s per d cap				amp	le for
Total weight	1 ton 1	1 ton 2	1½ tons	2 tons	2½ tons	3 tons	3½ tons	4 tons	5 tons	All ca-
Pounds			(3) 3 55 155 200 89 24 9 4 1 1 (3) (3) (3)	(3) (3) (3) (3) (4) 7 9 5 4 4 2 (3) (3) (3) (3) (3) (3) (3) (3)	(3) (3) (3) (3) (3) (3) (3) (3) (3) (3)	1 1 1 1 1 1 1 1 1 1 (3) (3) (3) (3) (3) (3) (3)	(3) (3) (3) (3) (3) (3) (3) (3) (3) (3)	(3) (3) (3) (3)	(3) (3) (3) (3) (3) (3) (3) (3) (3) (3)	12 190 236 177 209 98 36 15 9 9 5 4 4 2 2 2 1 1 1 (3) (3)
All weight groups	357	48	542	33	3	10	4	1	2	1,000

¹ Includes two ¼-ton trucks.
² Includes two ¾-ton trucks.

Table 15.—Frequency distribution of loaded trucks recorded at 25 stations, by rated capacity and total weight groups

	Nu	mbe	r of t	ruck rate	s per d car	tho paciti	usan es of	d in	samı	ole for
Total weight	1/2 ton 1	1 ton 2	11/2 tons	2 tons 3	2½ tons 4	3 tons	31% tons	4 tons	5 tons 6	All capacities
Pounds 1,000-1,999 2,000-2,999 3,000-3,999 4,000-4,999 5,000-5,999 6,000-6,999 7,000-7,999 9,000-9,999 11,000-11,999 11,000-11,999 11,000-11,999 11,000-15,999 14,000-16,999 17,000-17,999 18,000-18,999 19,000-19,999 20,000-20,999 20,000-20,999 21,000-21,999 21,000-21,999 22,000-22,999 23,000-23,999 24,000-24,999 25,000-25,999 26,000-25,999 27,000-27,999 28,000-27,999 29,000-27,999 29,000-27,999 29,000-27,999 29,000-27,999 29,000-27,999 29,000-27,999 29,000-29,999 21,000-27,999 25,000-27,999 25,000-27,999 28,000-29,999 21,000-27,999 29,000-29,999 21,000-31,999 21,000-31,999 21,000-31,999	56 12 2 (6) (6) (6) (6) (6) (6) (6) (7) (8)			(e) (f) 1 2 3 4 4 6 6 6 7 5 5 5 4 4 3 2 2 2 1 1 (e) (f) (f) (f) (f) (f) (f) (f) (f) (f) (f		(6) (6) (6) (7) (6) (7) (7) (7) (7) (7) (7) (7) (7) (7) (7				4 4 655 1622 1066 977 888 844 822 74 4 558 84 9 9 5 5 5 5 (e)
All weight groups	276	53	585	57	8	13	4	1	3	1,000

axle, and trailer loads in each of these classifications is shown graphically in figure 7.

Special information with regard to foreign passengercar traffic was obtained at survey stations near the Arkansas border during the regular operations of these

³ Less than one per thousand.

¹ Includes one 34-ton truck. 2 Includes six 34-ton trucks. 3 Includes one 134-ton truck 4 Includes one 24-ton truck 5 Includes one 7½-ton truck

⁶ Less than one per thousand.

The special information was obtained from postcard questionnaires requiring no postage, distributed to foreign passenger-car operators at border stations. The driver was asked to give the following data: (1) Whether trip was for business or pleasure; (2) number of occupants of the car; (3) number of miles driven in Arkansas; (4) number of days stay in Arkansas; (5) type of accommodation used, such as hotels, tourist camps, etc., or "driving through"; and (6) State in which the car was registered.

Approximately 6,500 cards were returned, or 28 percent of those distributed. The number of cards returned ranged from 22 to 39 percent of those distributed at individual stations.

SEVENTY-FIVE PERCENT OF FOREIGN PASSENGER-CAR TRAFFIC ORIGINATED IN FIVE ADJACENT STATES

Table 18 shows the average daily and annual foreign passenger-car traffic at 51 stations located near the Arkansas border.

Foreign passenger-car traffic recorded at these points was used in computing the daily and annual traffic entering and leaving Arkansas. At the 51 stations shown in table 18 a total annual traffic of 2,983,800 foreign passenger cars was estimated to have entered or left Arkansas during the year. Half of this traffic, 1,491,900 vehicles, was assumed to have entered the State.

Since the tourist traffic entering or leaving Arkansas is not concentrated during any period of the year, the foreign passenger-car traffic entering the State was assumed to have had the same seasonal variation as all foreign passenger-car traffic recorded within the State.

The State of registration as determined from license tags provided a means of accurately estimating the volume of foreign passenger-car traffic by State of origin.

The origin of tourist traffic—foreign passenger-car traffic—is summarized by areas in table 19. In figure 8 the areas within the circles show the relative volume of tourist traffic originating in each geographical section.

Table 16.—Number and average axle and trailer loads of trucks with trailers recorded at 25 stations, by various classifications

				Ave	rage gross los	ads		
	Number of		Tru		Tra			
Classification	truck trailer combina- tions	Fron	t axle	Rear	axle		Percentage	Total weight
		Weight	Percentage of total load	Weight	Percentage of total load	Weight	of total load	weignt
Trip classification: State Interstate Trans-State	2, 900 2, 281 476	Pounds 2, 310 2, 360 2, 610	16. 8 14. 7 14. 4	Pounds 6, 260 7, 200 8, 170	45. 6 44. 9 44. 9	Pounds - 5, 170 6, 480 7, 400	37. 6 40. 4 40. 7	Pounds 13, 740 16, 040 18, 180
Total	5, 657	2, 360	15.7	6, 800	45. 2	5, 880	39.1	15, 040
Class of operation: Private operator Contract hauler Common carrier	2, 863 1, 836 951	2, 190 2, 300 2, 960	16. 9 14. 7 14. 9	5, 920 7, 160 8, 750	45. 6 45. 5 43. 9	4, 860 6, 250 8, 220	37. 5 39. 8 41. 2	12, 970 15, 710 19, 930
Total	5, 650	2,360	15.7	6, 800	45. 2	5, 880	39.1	15, 040
Situs of ownership: Farm City—Private City—Company	219 2, 100 3, 335	1, 820 2, 050 2, 590	19. 2 16. 0 15. 4	4, 270 5, 900 7, 530	45. 0 46. 0 44. 8	3, 400 4, 870 6, 680	35. 8 38. 0 39. 8	9, 490 12, 820 16, 800
Total	5, 654	2, 360	15. 7	6, 800	45. 2	5, 880	39.1	15, 040

Table 17.—Number and average axle and trailer loads of trucks with trailers recorded at 25 stations, by nature of load carried

				Ave	erage gross lo	ads		
	Number of		Tru	ıck		Tra	iler	
Nature of load carried	truck trailer combina- tions	Fron	t axle	Rear	axle		D	Total
		Weight	Percentage of total load	Weight	Percentage of total load	Weight	Percentage of total load	weight
Commercial commodities. Manufactured products. Agricultural products. Mineral products, oil Forest products	720 82	Pounds 2, 580 2, 230 2, 360 2, 070	13. 7 11. 9 13. 3 11. 8	Pounds 8, 620 8, 480 8, 050 8, 310	45. 5 45. 3 45. 5 47. 4	Pounds 7, 730 8, 020 7, 300 7, 130	40. 8 42. 8 41. 2 40. 8	Pounds 18, 930 18, 730 17, 710 17, 510
Total	3, 510	2, 440	13. 1	8, 540	45. 7	7, 690	41.2	18, 670
Other types of load: Passengers Household goods Highway materials	57 76 32	2, 000 2, 040 2, 360	23. 6 17. 7 18. 8	4, 050 5, 370 5, 460	47. 6 46. 6 43. 4	2, 450 4, 120 4, 760	28. 8 35. 7 37. 8	8, 500 11, 530 12, 580
Total	165	2, 090	19. 6	4, 930	46.1	3, 670	34. 3	10, 690
All types of load	3, 675 1, 971	2, 420 2, 230	13. 2 25. 0	8, 380 3, 860	45. 7 43. 2	7, 520 2, 830	41. 1 31. 8	18, 320 8, 920
Grand total	5, 646	2, 360	15. 7	6, 800	45. 2	5, 880	39.1	15, 040

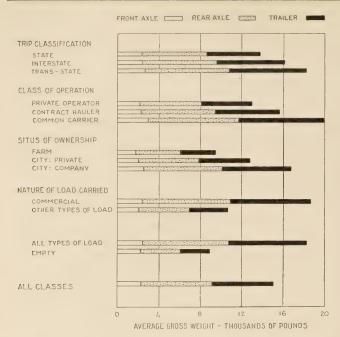


FIGURE 7.—AVERAGE GROSS AXLE AND TRAILER LOADS OF TRUCK-TRAILER COMBINATIONS RECORDED AT 25 STATIONS BY VARIOUS CLASSIFICATIONS.

Except for five States adjacent to Arkansas—Louisiana, Missouri, Oklahoma, Tennessee, and Texas—the census grouping of States was used in figure 8. This grouping of States serves very well and makes possible comparisons with populations of these areas, should this be desired.

The small amount of traffic originating in Mississippi does not justify showing its traffic separately. shortage of desirable crossings over the Mississippi River, a natural traffic barrier, accounts for the small volume of traffic from Mississippi, although there are suitable ferries at Helena and Lake Village. A bridge across the Mississippi River at Vicksburg also tends to divert traffic into Louisiana.

Most of the foreign passenger-car traffic originated in adjacent States. More than 75 percent of total foreign traffic had its origin in the six bordering States. The greatest amount of this traffic from a single geographical area had its origin in Missouri. An estimated total of 293,900 vehicles, or 19.7 percent of total was from that State.

Tennessee with 18.5 percent of the total, or 276,000 vehicles, was second in amount of foreign passengercar traffic found upon Arkansas highways. Much of this movement of traffic from Tennessee was through Memphis. The Memphis bridge is the only one across the Mississippi River along the Arkansas border, and there was a considerable amount of across-theborder movement with a short trip mileage which was balanced by a large amount of long trips across the

Texas, with a comparatively small amount of mileage bordering Arkansas, was the origin of 14 percent, or 208,900 vehicles, of the foreign passenger vehicles estimated to have entered Arkansas. Oklahoma with 12.6 percent and Louisiana with 10.2 percent accounted for the origin of 188,000 and 152,200 vehicles respectively, on Arkansas highways. The percentage of North Central States contributed 7.8 percent, or

Table 18.—Average daily and estimated annual foreign passengercar traffic at 51 stations near the Arkansas border

NE	Clastin management	D	Foreign pa	assenger car
N	Station number	Route	Daily	Annual
N	NE	U S 67	152	55, 50
US 82		U S 63		106, 90
US 71		U S 61 and 70		
US 67		U S 82		
US 712		U S 67		157.70
SW				50, 40
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				50, 40
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
SE Ark 131 27 9, 9 N US 65 93 33, 9 N Ark 47 197 71, 9 N US 71 246 89, 8 W Ark 192 57 20, 8 W Ark 199 317 115, 7 W US 62 87 31, 8 SW Ark 45 25 9, 11 NE Ark 20 86 31, 44 E Ark 20 86 31, 44 E Ark 20 86 31, 44 S Ark 13 36 13, 14 OSE US 65 102 37, 2 OSW Ark 159 68 24, 88 5 US 167 185 67, 5 11 NW Ark 32 32 11, 7 22 W US 70 74 27, 0 0 E Ark 990 44 16, 14 4 N Ark 77 99 36, 14 <t< td=""><td></td><td>U S 61</td><td></td><td>315 40</td></t<>		U S 61		315 40
N US 65 93 33, 93 N Ark 47 197 71, 9 N US 71 246 89, 8 W Ark 102 57 20, 8 W Ark 59 317 115, 7 W US 62 87 31, 8 SW Ark 45 25 9, 1 NE Ark 20 86 31, 4 E Ark 20 86 31, 4 E Ark 31 36 13, 1 0 SE US 65 102 37, 2 0 SE US 167 185 67, 5 11 NW Ark 32 32 11, 7 12 W US 70 74 27, 0 0 E Ark 32 32 11, 7 1 W Ark 32 32 11, 7 2 W US 70 74 27, 0 0 E Ark 99 44 16, 11 4 N Ark 93 7 2, 6 4 N Ark 115 23 8, 4 1 I Ark 115 23 <td>SE</td> <td></td> <td></td> <td>9, 90</td>	SE			9, 90
N	N	U S 65	93	33, 90
W		Ark. 47		71, 90
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		U S 71		
SW US 62 87 31,8 SW Ark. 45 25 9,1 NE Ark. 20 86 31,4 E Ark. 20 86 31,4 S Ark. 13 36 13,1 0 SE US 65 102 37,2 0 SW Ark. 159 68 24,8 5 US 167 185 67,5 11 NW Ark. 32 32 11,7 22 W US 70 74 27,0 0 E Ark. 90 44 16,1 31 E Ark. 25 236 86,1 44 N Ark. 90 44 16,1 41 N Ark. 77 99 36,1 42 N Ark. 15 23 8,4 41 N Ark. 15 23 8,4 42 N Ark. 33 7 2,6 6 N Ark. 33 7 2,6 6 N Ark. 33 7 2,6				
SW Ark 45 25 9, 11 NE Ark 20 86 31, 44 E Ark 20 86 31, 44 S Ark 13 36 13, 14 O SE U S 65 102 37, 2 0 SW Ark 159 68 24, 88 5 U S 167 185 67, 5 11 NW Ark 32 32 11, 7 12 W U S 70 74 27, 0 0 E Ark 90 44 16, 14 3 E Ark 90 44 16, 14 4 N Ark 77 99 36, 14 4 N Ark 77 99 36, 14 4 N Ark 115 23 8, 44 4 N Ark 93 7 2, 6 4 N Ark 5 23 8, 44 5 NE Ark 115 23 8, 44 5 NE Ark 21 37 13, 5 9 Ark 21 37 13, 5 9 Ark 22 38 48 6 Ark 28				
Ark 20				9, 10
S	NE			31, 40
0 SE U S 65 102 37, 28 0 SW Ark 159 68 24, 8 5 U S 167 185 67, 5 11 NW Ark 32 32 11, 7 12 W U S 70 74 27, 0 0 E Ark 90 44 16, 11 3 E Ark 25 236 86, 14 4 N Ark 97 99 36, 14 4 N Ark 115 23 8, 41 2 N Ark 33 7 2, 6 6 N Ark 33 7 2, 6 6 N Ark 5 23 8, 4 99 Ark 100 115 42, 0 99 Ark 100 115 42, 0 6 Ark 28 18 6, 9 5 U S 270 68 24, 8 6 Ark 88 19 6, 9 8 W Ark 4 26 9, 5 10 U S 71 55 20, 1 44 U S 79 119 43, 4 45 Ark 132				
08 SW Ark. 159 68 24,8 5.5 US 167 185 67,5 11 NW Ark. 32 32 11,7 22 W US 70 74 27,0 06 E Ark. 90 44 16,1 31 E Ark. 25 236 86,1 44 N Ark. 11.5 23 8,4 42 N Ark. 11.5 23 8,4 43 E Ark. 11.5 23 8,4 44 N Ark. 11.5 23 8,4 45 NE Ark. 93 7 2,6 66 N Ark. 5 23 8,4 45 NE Ark. 21 37 13,5 45 NE Ark. 100 115 42,0 40 Ark. 28 18 6,0 5 US 270 68 24,8 6 Ark. 88 19 6,9 8 W Ark. 4 26 9,5 10 US 71 55 20,1 11 Ark. 29 90 38 12 Ark. 132 50 18,2 14 US 79 119 34 15 Ark. 133 48 17,5 16 Ark. 133 <td></td> <td></td> <td></td> <td></td>				
55 US 167. 185 67,5 21 NW Ark 32. 32 11,7 22 W US 70. 74 27,0 0 E Ark 99. 44 16,11 3 E Ark 25. 236 86,14 4 N Ark 115. 23 8,4 4 N Ark 115. 23 8,4 2 N Ark 115. 23 8,4 2 N Ark 93. 7 2,6 6 N Ark 93. 7 2,6 6 N Ark 10. 115 42,0 90 Ark 100. 115 42,0 10 Ark 28. 18 6,6 6 Ark 28. 19 6,9 6 Ark 28. 19 6,9 8 W Ark 4. 26 9,5 10 US 71 55 20,1 11 Ark 29. 90 32,8 44 US 77 55 20,1 14 </td <td></td> <td></td> <td></td> <td></td>				
12 W U S 70 74 27, 00 0 E Ark 90 44 16, 11 13 E Ark 25 236 86, 14 44 N Ark 115 23 8, 44 1.1 Ark 115 23 8, 44 2 N Ark 115 23 8, 44 2 N Ark 93 7 2, 66 6 N Ark 5. 23 8, 44 15 NE Ark 100 115 42, 90 99 Ark 100 115 42, 90 6. Ark 28 18 6, 6 6. Ark 88 19 6, 9 8 W Ark 4 26 9, 5 90 US 71 55 20, 11 1 Ark 29 90 32, 8 11 Ark 29 90 32, 8 12 Ark 132 50 18, 2 12 Ark 133 3 14 15 Ark 15 3 1, 1				67, 5
0 E	1 NW	Ark. 32	32	11, 70
3E Ark. 25. 236 86, 14 4d N Ark. 77. 99 36, 14 1.1 Ark. 115. 23 8, 44 2.2 N Ark. 93. 7 2, 6 46 N Ark. 55. 23 8, 44 45 NE Ark. 21. 37 13, 5 45 NE Ark. 100. 115 42, 0 90. Ark. 28. 18 6, 6 6. Ark. 88. 19 6, 9 8 W Ark. 4. 26 9, 5 90 US 71. 55 20, 18 11 Ark. 29. 90 32, 18 12 Ark. 132. 50 18, 2 14 US 79. 119 43, 4 15 Ark. 15. 3 1, 1 16 Ark. 132. 50 18, 2 19 Ark. 133. 48 17, 5 19 Ark. 133. 48 17, 5 10 US 165. 80 29, 2 14 NE US 165. 80 29, 2	2 W	U S 70		27, 00
Ark Ark 77 99 36, 11				
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	2 N	Ark. 93	7	2, 60
99	6 N			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$				
$\begin{array}{cccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		Ark. 88		
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	8 W	Ark. 4		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		U S 71		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
99 Ark. 133 48 17,5 5		Ark. 15	3	1, 10
00. US 165. 80 29, 2 31 SE. Ark. 142. 9 3, 3 44 NE US 82. 128 46, 7 77. Ark. 4. 8 2, 9				12, 80
33 SE Ark. 142 9 3, 3 44 NE US 82 128 46, 7 77 Ark. 4 8 2, 9		Ark. 133		
14 NE US 82 128 46,7 77 Ark. 4 8 2,9	3 SE	Ark. 142		
77				
Total				2, 9
	Total		8, 175	2, 983, 80

¹ Annual traffic estimated by multiplying daily average by 365; individual station stimates of annual traffic adjusted to the nearest 100 vehicles.
² Station 20 was located near the Texas line; station 22 was located near Fort Smith.

Table 19.—Origin of foreign passenger-car traffic in Arkansas

Geographical area	Estimated annual traffic	Percentage distribu- tion
Louisiana Missouri Oklahoma Tennessee Texas New England States Middle Atlantic States East North Central States West North Central States except Missouri South Atlantic States East South Central States except Missouri Mountain States East South Central States except Missouri States East South Central States except Missouri States East South Central States except Tennessee	152, 200 293, 900 188, 000 276, 000 6, 000 25, 400 16, 500 32, 800 49, 200 37, 300	10. 2 19. 7 12. 6 18. 5 14. 0 4 1. 7 7. 8 5. 8 2. 2 3. 3 1. 1 2. 5
Other ¹ Total	3,000	100.0

¹ Includes cars from Canada, Mexico, Panama, Puerto Rico, and Hawaii.

total and the number of vehicles originating in other areas are shown in table 19.

Excepting Tennessee and the East North Central States, the territory east of the Mississippi was not a

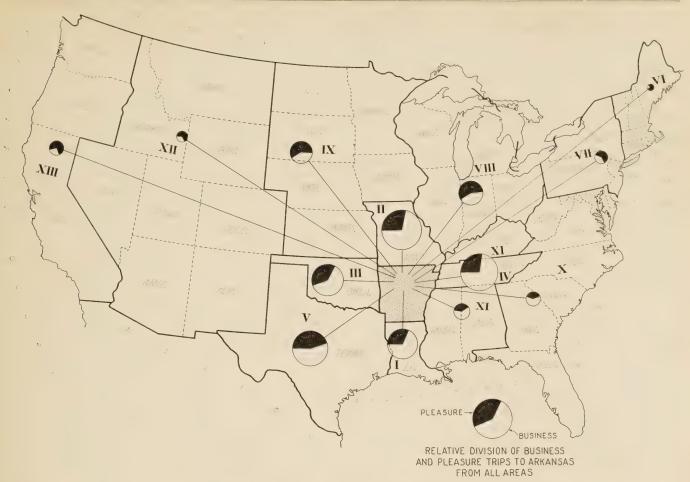


FIGURE 8.—ORIGIN OF FOREIGN PASSENGER-CAR TRAFFIC IN ARKANSAS.

116,400 vehicles. The remaining territory east of the California has the second largest motor-vehicle registra-Mississippi River was responsible for less traffic than tion of any State in the Union. that of the East North Central States.

A little less than 6 percent of the foreign passenger cars that used Arkansas highways originated in the West North Central States (except Missouri), and about 59 percent of all cars from this area had their origin in Kansas.

Distance is not always the reason for a small amount of traffic from a particular State, as illustrated by the fact that California contributed 97 percent of the 37,300 foreign passenger cars that had their origin in the Pacific States.

California as in the eight Mountain States. However, tions is to be announced in the near future.

Slightly more than 0.2 percent of the foreign passenger cars had their origin outside of the continental United States, or were government cars which could not be distributed by areas of origin. These cars carried licenses from Canada, Mexico, Panama, Puerto Rico, and Hawaii.

HIGHWAY RESEARCH BOARD TO MEET IN DECEMBER

The Sixteenth Annual Meeting of the Highway Research Board of the National Research Council will be held in Washington, D. C., on November 18–20, More than twice as many cars had their origin in 1936. A program of reports on research investiga-

THE CONE METHOD FOR DETERMINING ABSORPTION BY SAND

BY THE DIVISION OF TESTS, BUREAU OF PUBLIC ROADS

Reported by D. O. WOOLF, Associate Materials Engineer

THE NEED for an accurate method of determining the absorption of water by aggregates has been recognized ever since the design of concrete mixtures was approached on the basis of scientific principles. Only a portion of the water used in mixing concrete is needed for the complete hydration of the cement. The rest is necessary to lubricate the mix so that it may be placed uniformly and without undue difficulty. Some of this lubricating water may be absorbed by the aggregates, but the remainder, the so-called "free" water, dilutes and weakens the cement paste. Consideration of the strength of the resulting concrete must involve the amount of this diluting water, and a knowledge of the amount of water absorbed by the aggregates is necessary to determine the net water content available for the cement. The determination of the bulk specific gravity and from this the bulk volume and weight of the aggregates required for a given yield of concrete also necessitates a determination of the amount of absorbed

Methods of determining the water absorption of fine aggregate by means of a simple yet reasonably accurate test have been given considerable attention during the past several years and a number of methods have been devised. The majority of the procedures so far suggested are based on the observed behavior of sand grains in the presence of free moisture. Extensive study by the Bureau of Public Roads has disclosed that most of these methods are either liable to furnish inaccurate results or require such great care and are so sensitive to nominally uncontrolled variables that their use in routine testing is not warranted.

After reviewing briefly the various procedures that have been suggested, this report discusses the so-called "cone method" which has been developed by the writer after considerable study of this problem.

VISUAL INSPECTION AND KEROSENE METHODS REVIEWED

Probably the first method used for determining the condition usually known as "saturated and surfacedry", when the permeable pore spaces in the sand grains are filled with water without any moisture adhering to the surfaces of the grains, was by simple visual inspection. The procedure is simply to spread the sand out on a smooth surface and permit it to air dry, with or without artificial circulation. The sample is stirred frequently to insure uniform drying, and the end point is determined by noting when the sand appears to be surface-dry and free-flowing. The difference in the weight of sand in the saturated and surface-dry condition and the oven-dry weight is termed the absorption and is expressed as a percentage of the oven-dry weight.

This method has been considered capable of furnishing consistent results when used by a single operator but considerable doubt has been expressed as to the ability of different operators to check each other's results since the end point depends entirely on the operator's judgment. The development of a method with the end point based on measurable features was

considered advisable.

In 1917, A. S. Rea presented a method of determining the so-called "apparent" specific gravity of non-homogeneous fine aggregates. This value for specific gravity, more properly called the "bulk" specific gravity, is defined as the ratio of the weight in air of a given volume of a permeable material (including both permeable and impermeable voids normal to the material) at a stated temperature to the weight of an equal volume of distilled water at the same temperature.² An accurate determination of this value requires that the permeable voids in the material under test be filled with water or some other substance, or that the voids be sealed against the entrance of water by some method before the volume of the displaced water is determined. Rea accomplished this by coating the sand grains with kerosene before determining the

volume of the test sample.

It is apparent that if the bulk specific gravity can be determined by this kerosene method, the absorption of the material tested can also be determined. By means of a slight change, the method was later adapted to determine the absorption of fine aggregate.3 In this method, duplicate 500-gram samples of oven-dried sand are placed in 500-milliliter volumetric flasks. A small amount of kerosene is added to one flask and the flask shaken to distribute the kerosene over all the sand grains. It is intended that the kerosene shall coat each sand grain to prevent absorption of water. The volume of a normal salt solution 4 required to fill the flask is then found. The excess kerosene floats on the top of the salt solution. A measured quantity of water is added to the second flask and the sand permitted to absorb water for a definite length of time. The volume of water required to fill the flask is then determined. The absorption is computed from the difference between the volume of water required to fill the flask containing the untreated sand and the volume of salt water required to fill the flask containing the kerosene-coated sand.

Although this method appears to be satisfactory in theory, a number of difficulties developed in actual practice. The most troublesome feature is found when sand containing clay or other fine particles is tested. Much of this fine material adheres to the globules of surplus kerosene and floats on the salt water. Shaking the flask or stirring the liquid seems to promote the formation of an emulsified liquid containing kerosene, salt water, clay or other fine particles, and air. A clean line of demarcation between the salt water and kerosene is seldom found, and in many cases only an approximate measurement of the amount of salt water required to fill the flask can be made.

For accurate determinations the test can be made only on thoroughly clean sand containing little if any fine particles. Reports from a number of different

¹ Proceedings, American Society for Testing Materials, vol. 17, pt. II, p. 257.

² Standard Definition E 12-27, American Society for Testing Materials. Book of Standards, 1933, p. 1252.

³ Proceedings, American Society for Testing Materials, vol. 20, pt. I, pp. 301-302

⁴The higher density of the normal salt solution gives a better separation of the kerosene than would be obtained with the use of water.

laboratories occasionally have shown negative values for tests made by this method. The writer is of the opinion that rolling and shaking the flask to remove surplus kerosene and entrapped air also tends to remove the kerosene film from the sand grains, allowing the sand to absorb water. This absorption, together with the flotation of fine particles by the kerosene emulsion, may cause the volume of salt water to exceed that of the fresh water, and a negative result is obtained.

OTHER METHODS DISCUSSED

In 1929 J. C. Pearson suggested 5 a new method of determining the absorption by sand. In this method a 200-gram sample of dry sand is placed in an Erlenmeyer flask and water added drop by drop until the finer grains adhere to the sides of the flask after thorough shaking. The weight of the flask and contents is then found; the sand is further dampened by several drops of water; and the sample is dried until the sand grains no longer adhere to the flask. The weight of flask and contents is again determined, and the average weight of the moistened sand is used in computing the absorption. This method has one major defect in that sufficient time for the complete absorption of the added water is not permitted. Consequently, the method may furnish results lower than the true absorption of the material under test.

In 1933, the American Society for Testing Materials adopted as tentative a method 6 for determining the absorption by sand. This method is based on Pearson's titration method. In the test, a sample of sand is thoroughly saturated with water, and then dried to a surface-dry condition as determined by visual examination. A 500-gram sample is taken from this saturated and surface-dry sand, and placed in a 1-quart glass jar. Water is added to the sample, drop by drop, with thorough shaking until the sand grains just tend to adhere to the sides of the jar. The weight of the sample is then found, and the sample dried to constant weight. The results of this method are in effect largely dependent on the accuracy of the operator's judgment that the sample is in a saturated and surface-dry condition. If drying of the sample is stopped exactly when the sand becomes surface-dry, the addition of one or two drops of water will indicate the end point; if the sample is dried past the surface-dry condition, the addition of one or two drops of water may indicate a false end point unless sufficient time is permitted for the absorption of the added water.

Chapman has suggested that the saturated and surface-dry condition of sand can be determined from the change in color of the material when uniformly dried, and Graf and Johnson 8 have stated their belief that this condition can be determined by drying sand for several days over calcium chloride. It is doubted that the exact point of change in color can be precisely and repeatedly determined, or that desiccation will

not r move some of the absorbed water.

In addition to the methods that have already been described, Myers 9 has presented a review and discus-

ion of a number of methods based on gravimetric, displacement, dilution, colorimetric, and electrical-resistance principles. Many of these methods are primarily concerned with the determination of the free moisture in the aggregate, the accuracy of which depends upon placing the sand initially in a saturated and surface-dry condition by visual inspection.

Since none of the available methods were considered to combine the desirable characteristics of simplicity, ease of performance, and accuracy, an effort was made to devise a better method. Attention was first given to the possibility of mixing the sand with a material of known density and determining the density of the two substances combined. A number of oils and plastic materials were tried, but the method proved unsuccessful when sands containing finely divided particles were used. Recourse was then made to the method based on Rea's kerosene test for specific gravity, and tests conducted to find a substitute for kerosene that would furnish better results. None of the materials used gave any better results than kerosene, and further work along this line was abandoned.

DEVELOPMENT OF CONE METHOD DESCRIBED

An attempt was then made to use a very simple procedure. It was known that moist sand containing free water could be formed into shapes by light pressure and that dry sand could not. This characteristic has long been utilized in foundries in making molds for the casting of metal objects. If this feature could be used in a method of test it might prove a satisfactory means of determining the saturated and surface-dry condition of sand. Preliminary tests were made using a small, hollow, metal cone which was available. The sand was placed loosely in the cone and compacted by tamping it lightly with a metal rod having a flat face 1 inch in diameter. It was found that if the sand was dry the material would slump when the cone was removed, but if the sand contained free moisture the cone of sand would retain its form.

Further tests were made using right truncated cones having base angles of approximately 45°, 60°, 70°, and 80°. Samples of sand were immersed in water for 24 hours, drained, and dried to a free-flowing condition by a current of warm air. As the sand approached a surface-dry condition, tests were repeatedly made with each of the cones to determine the point at which the sand would slump when lightly tamped in the cone and the cone removed. The 45° and 60° cones did not prove practical. These angles were not sufficiently different from the natural angle of repose of the sand. and a definite slump was seldom obtained, especially when the sand contained clay.

The 80° cone gave a sharp point of slump, but a microscopic examination of the sand disclosed the presence of an appreciable amount of free water. The 70° cone also gave a definite point of slump. Microscopic examination of the sand at this point failed to show any evidence of free moisture, and it is believed that the use of the 70° cone determines the condition of the sand which is very close to that of the desired "saturated and surface-dry" material. The addition of a few drops of water to the test sample in the above condition caused the sand to retain its form after removal of the 70° cone. thus indicating the presence of free moisture.

There seems to be considerable divergence of opinion as to the reason for the cohesion developed by moist

⁵ A Simple Titration Method for Determining the Absorption of Fine Aggregates by J. C. Pearson. Rock Products, vol. 32, no. 10, p. 64, May 11, 1929.

⁶ Method C 95-33 T: Tentative Test for Absorption by Aggregates for Concrete (laboratory determiningtions).

⁷ Discussion of Comparison of Methods of Determining Moisture in Sands. Proceedings, American Concrete Institute, vol. XXV, p. 261 (1929).

⁸ Study of Methods for Determining Moisture in Sand, by S. H. Graf and R. H. Johnson. Proceedings, American Society for Testing Materials, vol. 30, pt. I, p. 578 (1930).

<sup>(1930).
§</sup> Free Moisture and Absorption of Aggregates, by Bert Myers, in Report on Significance of Tests of Concrete and Concrete Aggregates, Committee C-9, American Society for Testing Materials, 1935.

sand. P. G. Nutting ¹⁰ has stated that surface tension, vapor tension, atmospheric pressure, and internal (adsorption) pressure are the forces involved in causing the observed cohesion and resistance to deformation of moist sand. This cohesional force increases with the amount of water present up to a maximum and then falls to zero with complete wetting.

Nutting further states that silica will adsorb a film of water from 50 to 100 molecules deep and that in coarse sand this water may amount to 1 milligram per gram of sand. However, this film of adsorbed water can be removed from sand grains only by extended desiccation or heating to a high temperature. The presence of this adsorbed water cannot be held the sole cause of the cohesion in damp sand since it is present in sand dried

at 100° C. as well.

Other physicists do not agree with these views. It has been stated by one authority that absorbed water cannot be distinguished from adsorbed water, and that whether the water and the sand are physically or chemically combined, the cohesion of moist sand is caused only by the presence of water on the surface of the sand grains. Another has stated that adsorbed moisture is present in moist sand in very small amounts as a monomolecular film, but that this water behaves as free water and joins with any other moisture present in binding the sand grains together when the damp sand is compacted. That the monomolecular film of adsorbed water can by itself produce the cohesion of sand is doubted.

In general, the opinion seems to be that whatever the nature of the water in damp sand, a change in the cohesiveness of sand may be taken as an indication of a change in the condition of the sand from one in which free moisture exists on the surfaces of the grains to one in which no free moisture is present. Free moisture is here considered as that which causes the bulking of Whether or not adsorbed moisture is present in the noncohesive sand seems to be a moot point. It seems to be generally agreed that the amount of this adsorbed water is so small, compared to the total "absorption" determined by this test, that it can have no practical effect on either the bulk specific gravity or the net water-cement ratio. The test is considered to be a logical if possibly an empirical method of determining a usable value by means of a readily standardized procedure.

PROCEDURE FOLLOWED IN MAKING CONE TEST OUTLINED

On the basis of the preliminary tests, a method for determining the absorption by sand was formulated as follows:

A 1,000-gram sample of sand shall be placed in a pan and covered with water for a period of at least 3 hours. The sample shall then be drained, placed in a large enamelware pan, and exposed to a gentle current of warm air. The sand shall be stirred frequently to insure uniform drying. When the sand appears to be approaching a surface-dry condition, trial determinations with the cone shall be started. A sheet metal cone with top and bottom diameters of 1½ and 3½ inches, respectively, and a height of 2½ inches, shall be placed in the pan and filled with sand which shall be lightly tamped 25 times with a 12-ounce metal rod having a flat face 1 inch in diameter. The cone shall then be

lifted vertically. If the sand does not slump, free moisture is still present, and the drying shall be resumed. Trials with the cone shall be continued at frequent intervals until the sand slumps upon removal of the cone. This indicates that the sand has reached a surface-dry condition and the weight of the sample shall be determined. To insure that the sand has not been dried too much, a few drops of water shall be mixed with the sand, and the cone test repeated. Under these conditions, free water should be present, and the cone of sand should not slump. The weight of the sample shall again be determined, and the sample ovendried to constant weight. The percentage of absorption shall be computed from the average of the two weights of the dampened sand and from the oven-dry weight.

Figure 1 shows the method of tamping the sand in the cone, a cone of a sand containing free moisture, and a slumped cone of the same sand after the material

had reached a surface-dry condition.

In making the cone test, the following features should be observed:

1. The sample should be stirred frequently to obtain uniform drying.

2. The first trial for slump should find the sample

with free moisture present.

3. Successive trials should be made at frequent intervals. The practice in the laboratory of the Bureau is to dry the sample under artificial circulation of air. As the sand approaches the surface-dry condition, drying is continued for definite lengths of time and trial determinations made at more and more frequent intervals. Under closely controlled conditions, ½-minute drying periods are used immediately prior to determination of the point of slump.

4. The metal cone should be lifted vertically. If it is not carefully removed, the sand cone may be struck

and caused to slump prematurely.

One criticism of the cone method which has been made is that the test result obtained is influenced by the surface area of the sand grains. To investigate this, a series of tests was made with the cone method on several different gradings of five different sands. In preparing each set of test samples, a large amount of sand was separated into different sizes by sieving, and a series of samples definitely graded from coarse to fine was obtained. If the cone method results were influenced by the surface area of the material, it would be expected that the test value would be increased with change in the grading from coarse to fine. As shown in table 1, however, the percentage of absorption decreased slightly with increase in fineness for each sand. These results indicate that the larger grains have a somewhat higher ratio of volume of permeable voids to volume of grain than is found in finer sand. The greater absorption of the larger grains may explain the usual results of the accelerated soundness test for sand in which the coarser material shows the greater loss.

To shorten the time required for drying the sample, a warm air blower was devised. An 8-inch electric fan was mounted so that the blades rotated in a horizontal plane 24 inches above the table surface, and a sheet-metal tube 12 inches long was fastened to the wire guard around the fan blades. A series of electric resistance coils, drawing 1,250 watts, was mounted in the tube, and a three-speed rheostat was placed in the field circuit of the fan motor. The test sample was placed beneath the opening in the tube and a gently

Journal, Washington Academy of Sciences, vol. 17, no. 8, p. 185, Apr. 19, 1927.







FIGURE 1.—Steps in Performing the Cone Test on Sand. Left; Tamping Moist Sand in the Cone. Upper Right; This Sand Cone Retained Its Shape Indicating the Presence of Free Moisture. Lower Right; This Sand Cone Slumped, Indicating That the Material Had Reached a Surface-Dry Condition.

moving current of warm air blown on it. With this apparatus the drying of a sample could be accomplished in about 1 hour.

Table 1 .- Comparison between grading of test samples and percentages of absorption

VARIOUS GRADINGS USED 1

					Grad	ling				
Item	No. 1	No. 2	No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	No. 9	No. 10
Sieve no. 4	Per- cent 2 24 46 80 95 100	Per- cent 0 25 47 80 95 100	Per- cent 0 14 30 73 93 100	Per- cent 1 12 27 70 90 97	Per- cent 0 8 17 60 85 100	Per- cent 1 8 17 60 85 95	Per- cent 0 0 4 45 75 100	Per- cent 0 0 4 45 75 93	Per- cent 0 0 0 40 70 100	Per- cent 0 0 40 70 90

ABSORPTION BY VARIOUS GRADINGS OF DIFFERENT SANDS

	Per-	Per- cent			Per-				
River sand no. 1	1.19		 1.19		1.17		1.15		1.14
River sand no. 2 2						1.7		1.6	
Pit sand no. 1			 	1.9				1.7	
Pit sand no. 2			 	1.8				1.5	
Pit sand no. 3		. 4	 	. 4				. 3	

Values are percentages retained on the various sieves.
 Each value is the average of two tests.

COOPERATIVE ABSORPTION TESTS ON SANDS PERFORMED BY SEVERAL LABORATORIES

Following the establishment of a presumably satisfactory method of test, a large number of tests was made by different operators in the laboratory. Typical values for absorption are given in table 2. The results of these tests were considered so promising that it was decided to submit this method to a number of other

Table 2.—Results of cone absorption tests on various sands

Sample number	Location	Fine- ness modu- lus	Absorp- tion	Mineralogical compo- sition '
34810 34897 34901 34902 34904 34913 34922 34927 34927 34845 34808 34808 34808 34808 34808 34808 34903 34923 34923 34942 34942 34942 34942 34942 34942 34943 34942 34943 34944 34944 34944 34944 34948	Potomac River, D. C	2. 83 2. 85 2. 84 2. 81 2. 96 2. 87 2. 76 2. 86 2. 87 3. 00 2. 82 2. 81 3. 27 2. 53 2. 60 2. 88 2. 87 3. 03 2. 64 2. 87 3. 03 2. 64 2. 87 3. 05 2. 66 2. 87 3. 05 2. 66 2. 87 3. 05 2. 66 2. 87 3. 05 3. 05	Percent 1.4 1.2 1.2 1.2 1.2 1.5 1.3 1.4 .05 .8 8.7 2.4 1.8 1.8 1.8 1.8 1.7 .4 2.2 2.7 1.4 1.9 1.7 .6 1.7 .9 2.1 1.3 1.3 1.3 1.4 1.9 1.7 .6 1.7 .9 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3	Q, S, C. Q, S, C. Q, C, S. Q, S, C. Q, S, C. Q, C. Limestone sand. S, Sl, Sh, Q, L. L, Q, Sh, S. S, Sh, Sl, Q, L. L, Q, Sh, S. S, L, Q, C. S, Sl, Sh, Q, C, L. Q, F, G, C, L. L, S, Q, Sh, G. Q, S, Sh, Sl, L, Q, C. Limestone sand. Do. Q, S, C, M. Q, S, C, M. Q, S, C, M. Q, S, C, Q, S, G. Limestone sand. Q, S, G. Limestone sand. Limestone sand. Q, S, C, M. Q, S, C, M. Q, S, C, M. Q, S, C, M. Q, S, C, S, Q, S, G. Limestone sand. Limestone sand. Limestone sand. Limestone sand. Q, Sc, Gn. Limestone sand.

¹ Explanation of symbols used:

C=Chert F=Feldspar G=Granite

Gn=Gneiss L=Limestone M=Mica

Sh=Shale Sl=Slate

laboratories for their criticisms. Several laboratories were accordingly invited to cooperate with the Bureau in an investigation of methods of determining absorp-

The following laboratories cooperated in the tion. investigation:

> Duquesne Slag Products Co. Indiana State Highway Commission. Iowa State Highway Commission. Michigan State Highway Department. National Crushed Stone Association. National Sand and Gravel Association. Pennsylvania Department of Highways. Portland Cement Association. Rhode Island State Board of Public Roads. Virginia Department of Highways. West Virginia State Road Commission. Bureau of Public Roads.

In this series of cooperative tests, each laboratory was requested to make five tests by each of four different methods on each of six different samples of fine aggregate. The methods are included in those previously described, and are designated in the tables and figures that follow by the following numbers:

- Kerosene method.
 A. S. T. M. Tentative Method C 95-33 T.
 Cone method.
- 4. Visual inspection method.

The samples of fine aggregate used in these tests were obtained by the Bureau, mixed thoroughly, and suitable portions of each sent to the cooperating laboratories. Effort was made to obtain sands having a considerable range in absorption, and the samples selected were as shown in table 3.

Table 3.—Sands used in cooperative tests

Sand	Source	Mineralogical composition
1	Massachusetts	Quartz, granite, diorite, rhyolite, feldspar, sandstone. Limestone, sandstone, quartz, chert. Quartz. Quartz, feldspar, chert. Quartz, feldspar, granite, slate. Limestone (crushed stone sand).

The results of this series of cooperative tests are shown in tables 4, 5, and 6, and figures 2, 3, and 4. Tests were made in one laboratory by three different operators, and the results for this laboratory are shown in table 4. The individual results for each of the other laboratories are shown in table 5 and the average values for each laboratory, sand, and method are grouped together to permit ready comparison in

Figure 2 gives the average value obtained by all laboratories for each sand by each method of test. With the exception of sand number 3, the values obtained by the use of the kerosene method are considerably lower than those for the other test methods. This may have been caused by the removal of a portion of the kerosene from the sand grains when the flask was shaken to free the excess kerosene, or it may have been caused by the retention of a portion of the sample by the floating kerosene. In either case the result would be the same in that an excessive quantity of salt water would be added to the flask. This would of course decrease the difference between the volumes of fresh and salt water and would furnish a low value for the percentage of absorption. The average values for the cone method were found to be slightly higher than those for the tentative A. S. T. M. or visual inspection methods, but the difference in results was marked only in the case of the stone sand sample, number 6.

Table 4.—Individual test results of percentage of absorption for laboratory no. 1

										35.0			
Sand	Test		ator	M 0	ethod perato	2, or		ethod			ethod perat		
		1	2	1	2	3	1	2	3	1	2	3	
	11	Per- cent 0. 1 . 2 . 1 . 0 . 0	Per- cent 0.3 .3 .1 .3 .3	Per- cent 0. 6 . 7 . 8 . 8 . 9	Per- cent 0. 6 . 7 . 8 . 8	Per- cent 0.8 .6 .7 .8 .7	Per- cent 0. 8 . 7 . 8 . 9 . 7	Per- cent 0. 8 . 8 . 8 . 8	Per- cent 0.8 .8 .8 .9	Per- cent 0. 6 .7 .7 .7 .8 .9	Per- cent 0. 6 .7 .8 .8	Per cen 0.	
	Average	. 1	. 3	.8	. 7	. 7	.8	.8	. 8	.7	. 7		
2	1	.5	.8	1. 5 1. 7 1. 6 1. 7 1. 4	1. 4 1. 6 1. 5 1. 7 1. 6	1. 8 1. 9 1. 7 1. 8 2. 0	1. 6 1. 7 1. 7 1. 7 1. 7	1.6 1.7 1.8 1.8 1.7	1. 9 1. 8 1. 8 2. 0 2. 0	1.5 1.7 1.6 1.7 1.7	1.5 1.5 1.6 1.6	1. 1. 1. 2.	
	Average	.3	. 7	1.6	1. 6	1.8	1. 7	1.7	1.9	1.6	1.5	1.	
3	1	.2	.1 .2 .1 .2 .1	.2 .2 .2 .3	.1 .2 .1 .1	.2 .2 .2 .2 .1	.2 .3 .3 .3	.2 .2 .2 .3 .2	.2 .3 .3 .2	9	.1 .2 .1 .1		
	Average	. 2	. 1	. 2	2.1	. 2	; .3	. 2	. 2	.2	. 1		
L	\begin{pmatrix} 1 \\ 2 \\ 3 \\ 4 \\ 5 \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \	.2	.1 .2 .0 .0	.7 .7 .7 .7	.7 .5 .7 .5	.8 .5 .6 .6	.7 .7 .6 .6	.7 .7 .6 .6	.7	.7	.7 .5 .6 .6		
	Average	. 1	. 1	.7	. 6	. 6	.7	.7	.7	.7	. 6		
5	1	.0	.3 .2 .3 .1	.6 .7 .7 .7	.7 .6 .7 .8	.8 .6 .7 .7	.7 .6 .7 .7	.7	.8 .7 .7 .7	.6	.6 .6 .7	1.	
	Average	. 0	. 2	.7	.7	. 7	. 7	. 7	.7	.7	. 6		
3	1 2 3 4 5	.6 .7 .0 .4	.8 .7 .8 .4 .7	1. 5 1. 6 1. 5 1. 2 1. 6	1. 3 1. 2 1. 2 1. 6 2. 1		1.8 1.6 1.5 1.9 1.7	1. 9 1. 6 1. 5 2. 0 1. 3		1.3 1.8 1.4 1.1 1.7	1.3 1.1 1.4 1.4 1.7		
	Average	. 3	.7	1.5	1, 5		1.7	1.7		1.5	1.4		

Table 5.—Individual test results on percentage of absorption USING METHOD 1

						Labo	ratory	7 no.				
Sand	Test	2	3	4	5	6	7	8	9	10	11	12
1	1	Pct. 0. 25 . 70 1. 02 . 55 . 47	Pct. 1. 20 1. 10 . 85 . 55	Pct. 0.38 .79 .55 .82 .24	Pct. 0.52 .80 .7 .5	. 28	Pct. 0.80	Pct. 0.33 .40 .37 .25 .32	Pct. 0.70 .70 .73 .65		Pct.	Pct. 0. 15 Tr 21
2	1	1. 97 . 81 . 60 1. 33 . 60	. 80 . 65 . 80 . 10 . 30	. 77 . 55 . 38 . 58 . 62	. 95 . 67 . 9 . 7 1. 0	. 48 . 50 . 58		. 75 . 60 . 62 . 82 . 70	1. 02 1. 15 . 99 1. 09 1. 06	. 93		
3	1 2 3 4 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	. 55 . 53 . 47 . 75 . 47	1.00 .90 .80 .50	.12 .15 .20 .21 .22	.42 .42 .4 .8	. 20 . 28 . 28		.17 .27 .17 .15	. 28 . 30 . 30 . 31 . 28	. 40 . 23 . 20 . 15 . 25		. 04
4	1 2 3 4 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	. 50 . 63 . 32 . 20 . 35	1. 00 . 65 . 90 . 50	.00 .00 .05 .1	.00 .42 .00 .5	.03		. 22 . 25 . 07 . 05 . 05	. 40 . 43 . 40 . 43 . 39			. 14 (1) (1)
5	1	. 37 . 35 . 32 . 25 . 25	1. 10 1. 35 . 85 1. 15 1. 05	. 23 . 20 . 12 . 26 . 12	.50 .75 .5 .6	. 33		. 30 . 22 . 20 . 22 . 22	. 45 . 43 . 40 . 41 . 40	. 55		(1) . 07 . 12
6	1 2 3 4 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	1. 49 1. 46 1. 68 1. 26 1. 50	. 25 . 15 . 75 . 35 . 45	.77 .75 .85 .75 .45	. 52 . 95 . 5 . 7	. 38 . 58 . 63		1. 92 1. 71 1. 65 2. 08 1. 88	1. 16 1. 13 1. 13 1. 10 1. 0 0	. 93 1. 05		. 51

¹ Negative value obtained.

Table 5.—Individual test results on percentage of absorption—
Continued

US	INC	· M	\mathbf{E} .T	H	OD S

			0.5	A. 1 CI	MET		orator	y no.				
Sand	Test	2	3	4	5	6	7	8	9	10	11	12
1	1 2 3 4 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	Pct. 0.77 1.10 .77 .67 .86	Pct. 0.91 .87 1.02 1.00 .88	Pct. 0.60 .58 .68 .66	Pct. 0.3 .5 .3 .4 .5	Pct. 0.64 .66 .69 .90 .78	Pct. 0.72 .87 .68 .55 .64	Pct. 0. 91 .86 1. 02 . 96 . 90	Pct. 0.54 .49 .46 .46	Pct. 0.40 .23 .22 .20 .17	Pct. 0.76 .79 .83 .75 .80	Pct. 0. 45 . 40 . 43
2		. 87 1. 36 1. 18 . 99 . 90	1. 69 1. 61 1. 55 1. 61 1. 64	1. 48 1. 12 1. 42 1. 32 1. 40	.5 .6 .7 .5	1. 95 2. 41 2. 12 1. 66 2. 25	1. 86 1. 90 1. 84 1. 87 1. 74	1. 56 1. 50 1. 46 1. 56 1. 56	1. 11 1. 13 1. 09 1. 11 1. 19	1. 31 1. 24 1. 40 1. 37 1. 20		1. 21 1. 22 1. 18
3	$\begin{cases} \frac{1}{2} & & \\ \frac{2}{3} & & \\ \frac{4}{5} & & \\ \end{cases}$. 23 . 91 . 85 . 73 . 61	. 25 . 27 . 24 . 22 . 27	. 16 . 28 . 34 . 40 . 22	.6 .3 .3	.10 .12 .08 .01 .08	.10 .10 .10 .10	. 15 . 30 . 30 . 15 . 15	.12 .08 .12 .17 .10	. 16 . 18 . 15 . 16		. 16
4		. 46 1. 02 . 48 . 81 . 67	. 90 . 83 . 69 . 55 . 59	. 62 . 42 . 74 . 68 . 80	.3 .2 .5 .5	.61 .74 .76 .56	. 61 . 56 . 64 . 57 . 53	. 45 . 50 . 40 . 50 . 50	. 47 . 44 . 40 . 42 . 40	. 61 . 57 . 55 . 59 . 54		. 54
5		. 48 . 87 1. 10 . 91 . 57	.74 .76 .62 .65 .69	. 68 . 48 . 70 . 38 . 52	.6 .6 .4 .3	. 89 . 84 . 85 . 93 . 79	. 50 . 51 . 57 . 56 . 56	. 60 . 50 . 50 . 60 . 50	.42 .45 .38 .38	. 49 . 53 . 42 . 51 . 47		.44
6	\begin{cases} \begin{pmatrix} 1 & \\ 2 & \\ 3 & \\ \\ \\ 5 & \end{pmatrix} \end{pmatrix}	1. 29 1. 31 1. 59 1. 35 1. 30	1. 41 1. 55 1. 41 1. 38 1. 52	1. 09 1. 21 1. 10 1. 04 1. 17	.4 .4 .4 .2 .2	. 98 . 75 . 71 1. 08 . 90	1. 50 1. 35 1. 43 1. 14 1. 19	1. 47 1. 26 1. 27 1. 37 1. 27	. 95 1. 07 1. 03 . 96 1. 11	1. 43 1. 27 1. 51 1. 41 1. 35		. 89 . 75 . 81
			US	ING	MET	TOH	3					
1	\begin{cases} \begin{pmatrix} 1 & \\ 2 & \\ 3 & \\ 4 & \\ 5 & \end{pmatrix} \end{pmatrix}	1. 38 1. 47 1. 90 . 59 . 61	0. 92 . 70 . 72 . 66 . 81	0.77 .82 .79 .76 .83	0. 6 . 7 . 6 1. 3 1. 0	0. 90 . 86 . 90 . 93 . 86	0.72 .77 .76 .80 .80	0. 84 . 85 . 92 . 91 . 88	0.78 .79 .75 .81 .79	0. 45 . 59 . 58 . 62 . 54	0. 78 . 76 . 75 . 78 . 79	0. 72 . 75 . 76
2	$\begin{cases} 1\\2\\3\\\vdots\\5 \end{cases}$	2. 05 1. 75 2. 08 2. 46 2. 43	1. 62 1. 63 1. 49 1. 49 1. 56	1. 64 1. 46 1. 47 1. 62 1. 67	1.3 .8 .8 1.5 1.5	1. 60 1. 67 1. 57 1. 35 1. 74	1. 57 1. 52 1. 66 1. 70 1. 57	1. 72 1. 62 1. 59 1. 69 1. 62	1. 54 1. 57 1. 55 1. 57 1. 61	1. 10 1. 05 1. 27 1. 24 1. 30	1, 58 1, 52 1, 56 1, 49 1, 72	1. 43 1. 34 1. 47
3	$\begin{cases} 1 & & \\ 2 & & \\ 3 & & \\ 4 & & \\ 5 & & \\ \end{cases}$. 98 . 58 . 66 . 65 . 65	. 27 . 19 . 25 . 24 . 29	. 24 . 19 . 22 . 17 . 17	.3 .5 .5 .6	. 24 . 15 . 21 . 19 . 19	. 25 . 22 . 25 . 18 . 20	. 25 . 22 . 25 . 22 . 27	. 18 . 22 . 23 . 18 . 22	. 10 . 14 . 14 . 14 . 12		.17 .15 .21
4	$ \begin{cases} 1 \\ 2 \\ 3 \\ 4 \\ 5 \end{cases} $. 69 1. 31 . 16 . 36 . 60	. 53 . 62 . 44 . 62 . 59	. 57 . 58 . 62 . 59 . 50	.4 .9 .5 .7	. 59 . 53 . 45 . 48 . 52	.78 .76 .70 .76 .66	. 72 . 72 . 67 . 70 . 72	. 59 . 60 . 61 . 62 . 63			. 57 . 51 . 56
5	$\begin{cases} 1 \\ \frac{2}{3} \\ \frac{1}{5} \\ \end{cases}$. 27 . 15 . 21 . 39 . 47	.71 .66 .65 .71	.77 .75 .66 .66	.8 .6 1.1 1.3	. 63 . 70 . 65 . 60	. 55 . 62 . 68 . 61 . 65	. 80 . 75 . 75 . 80 . 80	. 69 . 73 . 68 . 70 . 72	. 57 . 59 . 58 . 57 . 55		.75 .77 .80
8	$\begin{cases} 1 & & \\ \frac{2}{3} & & \\ \frac{4}{5} & & \\ \end{cases}$	1. 68 2. 20 2. 30 2. 25 2. 20	1. 60 1. 75 1. 60 1. 75 1. 62	1. 99 1. 68 1. 80 1. 55 1. 62	1.3 1.1 1.0 1.8 1.4	1. 27 1. 42 1. 45 1. 22 1. 18	1. 76 1. 57 1. 77 1. 97 2. 00	2. 02 2. 04 1. 84 1. 94 2. 06	1. 54 1. 98 1. 55 1. 41 1. 61	1. 25 1. 16 1. 18 1. 10 1. 12		1. 11 1. 09 1. 21
			US	ING	MET	HOL) 4					
	(1	0.98	0. 71	0. 61	1. 2	0. 65	0. 69	0.40	0. 70	0.39	0. 79	0. 32
1	2 3 4 5 5 6 7 9	. 93 1. 43 . 81 . 87	. 76 . 89 . 77 . 68	. 65 . 58 . 68 . 64	1.1	. 66 . 67 . 64 . 67	. 75 . 60 . 56 . 30 . 56 . 50 . 58 . 50	. 40 . 40 . 29 . 50	. 76 . 73 . 71 . 71	. 37 . 47 . 36 . 51	. 77 . 81 . 73 . 74	. 40
2	$\begin{cases} \frac{1}{2} \\ \frac{1}{3} \\ \frac{1}{5} \end{cases}$	1. 39 1. 64 1. 79 1. 91 1. 24	1. 61 1. 52 1. 56 1. 51 1. 57	1. 32 1. 50 1. 19 1. 38 1. 39			1. 30 1. 58 1. 52 1. 53	1. 41 1. 25 1. 28 1. 45 1. 45	1. 40 1. 37 1. 33 1. 42 1. 36			1. 10 . 99 1. 05
4	1 2 3 4 5 5 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6	. 50 . 48 . 63 . 26 . 25	. 20 . 23 . 22 . 22 . 31	. 22 . 20 . 35 . 20 . 16	1.1 1.2 .6 .5	. 09 . 08 . 18 . 15 . 12	. 18 . 17 . 23 . 19 . 16	. 10 . 13 . 15 . 13 . 13	. 22 . 24 . 21 . 22 . 23	. 13 . 10 . 11 . 14 . 11		. 13

Table 5.—Individual test results on percentage of absorption—Continued

USING METHOD 4-Continued

Sand	Test		Laboratory no.											
	1000	2	3	4	5	6	7	8	9	10	11	12		
4	1 2 3 4 5	Pct. 0.83 .71 .78 .86 1.02	Pct. 0. 56 . 52 . 56 . 43 . 56	Pct. 0. 52 . 66 . 56 . 50 . 58	1. 0 . 9 . 4 . 4	. 50	Pct. 0.60 .49 .53 .55 .49	. 35	Pct. 0.70/ .67 .67 .65 .60	Pct. 0.48 .54 .52 .40 .50	Pct.	Pct. 0.42 .36 .36		
5	$\begin{cases} 1 \\ 2 \\ 3 \\ 4 \\ 5 \\ \end{cases}$	1. 59 1. 07 1. 77 1. 84 1. 43	. 54 . 59 . 59 . 58 . 59	. 57 . 72 . 50 . 53 . 59		. 44 . 46 . 51 . 49 . 48	. 66 . 58 . 61 . 65 . 65	. 55 . 60 . 58 . 50 . 45	. 75 . 69 . 75 . 77 . 71	. 41 . 39 . 34 . 34 . 40		. 33 . 40 . 40		
6	\begin{cases} \begin{cases} 1 &	1. 33 1. 43 1. 70 1. 45 1. 45	1. 42 1. 35 1. 45 1. 33 1. 40	1. 21 . 99 1. 25 1. 17 1. 12	1.3 1.3 .7 .9		1. 20 1. 74	1. 59 1. 54 1. 61 1. 63 1. 48		1. 22 1. 16 1. 16 1. 11 1. 15		. 50 . 57 . 59		

Table 6.—Average values for percentage of absorption of various sands, determined by various methods in various laboratories

Sand	Method					I	aboi	rator	У					Av
Sand	Method	1	2	3	4	5	6	7	8	9	10	11	12	er
1	1	0.2	Pct. 0. 60 . 83 1. 11 1. 00	0. 93 . 94 . 76	. 6	0.6	0. 26 . 73 . 89	0. 80 . 69 . 77	0.33 .93 .88	0. 67 . 50 . 78	0.41 .24 .55	.77	0. 18	0.4
2	1	1.7	2, 15	. 53 1. 62 1. 56 1. 55	1. 4 1. 6	1.2	2. 08 1. 59	1.84	1. 53 1. 65	1. 13 1. 57	1. 30 1. 19	. 66 1. 62 1. 58 1. 61	1, 20 1, 41	1. 4
3	$\begin{cases} 1 \\ 2 \\ 3 \\ 4 \end{cases}$.2	. 55 . 67 . 70 . 42		.2	.5 .4 .5	.08	.10	. 18 . 21 . 24 . 13	. 29 . 12 . 21 . 22	. 25 . 16 . 13 . 12	. 21	.10 .14 .18 .12	.2
1	1 2 3 4	.1 .6 .7	. 40 . 69 . 62 . 84	. 76 . 71 . 56 . 53	.0 .6 .6	.2 .4 .7	. 07 . 65 . 51 . 52	. 58 . 73 . 53	.13 .47 .71 .39	.41 .43 .61	. 52 . 57 . 56 . 49	.36 .61 .65	. 53	. 6
5	1	.1 .7 .7	. 31 . 79 . 30 1. 54	1. 10 . 69 . 69 . 58	.2 .6 .7	.6 .5 .9	. 86		. 23 . 54 . 78 . 54	. 42 . 40 . 70 . 73	. 62 . 48 . 57 . 38	.79	. 10 . 45 . 77 . 38	. 6
3	1 2	1. 5 1. 7	2.11	. 39 1. 45 1. 66 1. 39	1.1	1.3	. 88 1. 31	1. 32 1. 82	1.33 1.98	1. 02 1. 63	1.40 1.16	. 79 1. 67 1. 42 1. 48	. 82 1. 14	1. 1

CONE METHOD FOUND TO GIVE MOST CONSISTENT RESULTS

It is possible that the extreme angularity of the stone sand was the determining factor in causing the higher value in the cone test than in the A.S.T.M. or visual inspection tests. It is also possible that there may have been some cementing of the particles by the dust present in the material. On the other hand, the dust present in the stone sand may have had such an affinity for moisture that the A.S.T.M. and visual inspection tests continued to show water present although the larger portion of the sample was only partially saturated. This would account for the lower values obtained by the use of these two methods.

In figure 3, the percentage deviation of the average result for each laboratory from the average for all laboratories is given for each method. Each value is an average for all six sands, except that the reported value for laboratory 7 for the kerosene method (no. 1) is for one sand only. These values show that the cone method (no. 3) furnished test results that were most nearly duplicated by different laboratories. Using

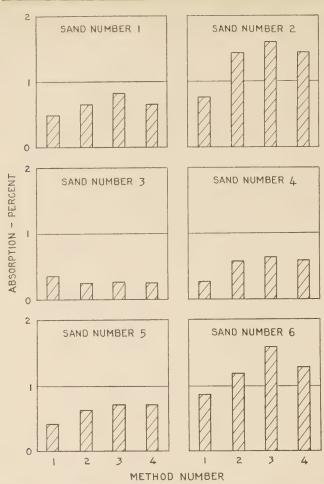


FIGURE 2.—AVERAGE RESULTS OBTAINED BY ALL LABORA-TORIES WITH EACH METHOD FOR DETERMINING THE AB-SORPTION BY SAND.

the cone method, only 1 laboratory (no. 2) showed a marked deviation from the average, and 8 of the 12 laboratories had deviations of 15 percent or less. The average deviation for all laboratories was 17 percent.

The visual inspection method appears to be the second most accurate. Three laboratories showed wide variations from the average but six had variations of 15 percent or less. The average deviation was 24 percent. The tentative A. S. T. M. method (no. 2) gave about the same average variation (26 percent) as the visual inspection method, but only two laboratories had deviations of 15 percent or less, while seven laboratories showed deviations of 16 to 30 percent. The kerosene method was the least accurate of those under consideration. Only two laboratories showed deviations of less than 30 percent and results deviating from the average by over 50 percent were found in four laboratories. The average deviation for the kerosene method was 47 percent.

The deviations within a given laboratory as shown in figure 4 indicate that concordant results are usually obtained by the use of the tentative A. S. T. M., cone, and visual inspection methods. In most cases the kerosene method failed to furnish results agreeing with each other to a satisfactory degree.

In considering the entire series of tests, the cone method appears to be the most satisfactory means of determining the absorption by sand. It furnishes more concordant results between different laboratories than

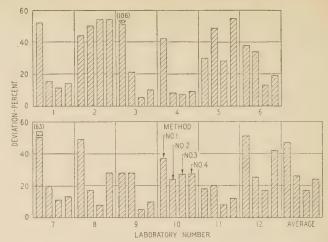


FIGURE 3.—DEVIATION OF AVERAGE RESULTS FOR EACH LABORATORY FROM AVERAGE FOR ALL LABORATORIES. VALUES ARE AVERAGES FOR ALL SANDS.

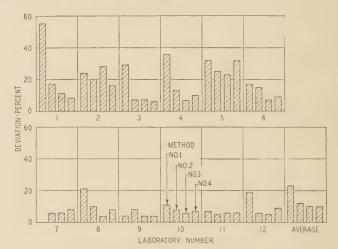


FIGURE 4.—AVERAGE DEVIATION OF INDIVIDUAL RESULTS OBTAINED IN EACH LABORATORY FROM AVERAGE RESULTS FOR THAT LABORATORY.

any of the other methods under consideration, and permits an operator to check his own work with an average variation of less than 10 percent. The average values for percentage of absorption found by this method agree very closely with those of the tentative A. S. T. M. and visual inspection methods. The tenative A. S. T. M. and visual inspection methods give very good agreement between the results of tests made by a single operator and fair agreement between the results of different laboratories. The kerosene method is found to give low and very erratic results and further use of this method is not recommended.

The cone method has been adopted by the American Association of State Highway Officials for use in their standard method of test for specific gravity and absorption of fine aggregate. It has also been adopted tentatively by the Joint Committee on Methods of Test for Specific Gravity of Aggregates of Committees C-9 and D-4, A. S. T. M., for use in connection with the committees' recommendations regarding the unification of the various society methods for determining specific gravity. These recommendations are now before the two committees for consideration.

¹¹ Method T-84, American Association of State Highway Officials Book of Standard Specifications for Highway Materials and Methods of Sampling and Testing, 1935.

MOTOR-FUEL CONSUMPTION, 1935

[Preliminary figures, compiled for calendar year from reports of State authorities †]

State		ate per lon	Date of rate	Gross amount	subject to	Net amount on which	Amount taxed at		t taxed at ed rates	Approxima taxed for use 3	te amount r highway	Per- cent-
	On Jan. 1	On Dec. 31	change	assessed for taxation	refund of entire tax	tax was earned	full rate 2	Rate per gallon	Amount	1935	1934	age change
AlabamaArizona	Cents 6 5	Cents 6 5		1,000 gattons 172,474 78,359	1,000 gallons	1,000 gallons 172, 474 67, 323	1,000 gallons 172,474 67,323	Cents	1,000 gallons	1,000 gallons *172, 474 67, 323	1,000 gallons *154,977 60,565	+11.3 +11.1
Arkansas. California. Colorado Connecticut.	6½ 3 4 2	6½ 3 4 3	Oct. 1	78, 359 131, 784 1, 464, 458 174, 796 269, 909	124, 321 22, 472 6, 128	67, 323 131, 784 1, 340, 137 152, 324 263, 781	120, 294 1, 340, 137 152, 324 263, 781		11, 490	*131, 784 1, 340, 137 152, 324 263, 781	\$ 119, 680 1, 198, 655 143, 290 248, 658	(6) +11.8 +6.3 +6.1
Delaware Florida Georgia Idaho Illinois	3 7 6 5 3	4 7 6 5	July 1	45, 085 256, 609 264, 617 70, 310 1, 069, 242	2, 137 	42, 948 256, 609 264, 617 63, 958 1, 015, 019	42, 948 256, 609 264, 617 63, 743 1, 015, 019	21/2	7 215	42, 948 *256, 609 *264, 617 63, 743 1, 015, 019	39, 514 *235, 698 *239, 435 57, 300 970, 874	+8.7 +8.9 +10.5 +11.2 +4.5
Indiana Iowa. Kansas Kentucky Louisiana.	4 3 3 5 5	3 3 5 5		504, 867 421, 765 295, 308 201, 324	32, 857 35, 276	472, 010 386, 489 295, 308 201, 324	472, 010 386, 489 295, 308 201, 324			472, 010 386, 489 295, 308 *201, 324	438, 743 374, 998 283, 876 *184, 369	+7.6 +3.1 +4.0 +9.2
Maine Maryland Massachusetts Michigan	4 4 3 3	4 3 3 3		186, 201 119, 821 217, 665 608, 021 809, 472	12, 815 23, 788 41, 485	186, 201 119, 821 204, 850 584, 233 767, 987	186, 201 114, 532 203, 072 584, 233 767, 987	1 3	8 5, 289 9 1, 778	*186, 201 114, 532 204, 850 584, 233 767, 987	*178, 434 110, 924 195, 663 566, 735 698, 681	+4. 4 +3. 3 +4. 7 +3. 1 +9. 9
Minnesota. Mississippi Missouri. Montana Nebraska	3 6 2 5 4	3 6 2 5 5	(12)	429, 486 140, 808 512, 654 95, 739 222, 584	54, 785 14, 304 18, 346 3, 419	374, 701 140, 808 498, 350 77, 393 219, 165	374, 701 123, 291 498, 350 77, 393 219, 165	1 		374, 701 123, 291 498, 350 77, 393 *219, 165	361, 512 112, 666 478, 764 73, 271 *214, 257	+3.6 +9.4 +4.1 +5.6 +2.3
Nevada	4 4 3 5	4 4 3 5		26, 209 73, 903 621, 031 62, 881	2, 163 1, 911 13 26, 569 4, 894	24, 046 71, 992 594, 462 57, 987	24, 046 71, 992 594, 432 57, 987	2	14 30	24, 046 71, 992 594, 432 57, 987	22, 355 68, 641 567, 727 51, 134	+7. 6 +4. 9 +4. 7 +13. 4
New York North Carolina North Dakota Ohio	3 6 3 4 4	6 3 4 4	Apr. 1	1, 537, 475 312, 012 112, 446 15 1, 014, 925 314, 558	33, 569 10, 829 16 14, 965	1, 495, 863 312, 012 78, 877 1, 004, 096 299, 593	1, 495, 863 305, 579 78, 877 965, 240 299, 593	1	11 6, 433 15 38, 856	1, 495, 863 305, 579 78, 877 965, 240 299, 593	1, 464, 242 273, 686 75, 390 910, 214 270, 432	+2. 2 +11. 7 +4. 6 +6. 0 +10. 8
Oregon Pennsylvania Rhode Island South Carolina	5 3 2 6	5 4 2 6	July 1	183, 005 1, 171, 439 114, 754 143, 014	21, 812 8, 621	161, 193 1, 171, 439 106, 133 143, 014	160, 434 1, 171, 439 106, 133 143, 014	1	17 759	160, 434 *1, 171, 439 106, 133 *143, 014	144, 917 *1, 113, 629 102, 834 *128, 646	+10.7 +5.2 +3.2 +11.2
South Dakota Tennessee Texas Utah Vermont	7 4 4 4	7 4 4 4		112, 634 216, 395 934, 453 69, 396 51, 388	98, 511	112, 634 216, 386 835, 942 69, 396 51, 388	97, 415 216, 386 835, 942 69, 396 51, 388		18 15, 219	97, 415 *216, 386 835, 942 *69, 396 *51, 388	89, 245 *201, 627 791, 005 *62, 858 *48, 550	+9. 2 +7. 3 +5. 7 +10. 4 +5. 8
Virginia	5 4 4	5 5 4 4		288, 036 274, 691 159, 120 442, 436	15, 867 22, 090 6, 015 36, 527	272, 169 252, 601 153, 105 405, 909	272, 169 252, 601 153, 105 405, 909			272, 169 252, 601 153, 105 405, 909	249, 540 239, 187 142, 393 384, 981	+9.1 +5.6 +7.5 +5.4
Wyoming	2	2		48, 241 112, 539	796 556	47, 445 111, 983	47, 445 111, 983			*47, 445 111, 983	*44, 111 103, 129	+7.6 +8.6
Total	{Weigh (app	ted aver	age rate cents.	}17, 160, 339	811, 060	16, 349, 279	16, 251, 693		97, 586	16, 264, 961	15, 292, 012	+6.4

¹ A more accurate analysis of motor-fuel consumption during 1935 will be issued later. The amounts tabulated as "subject to refund" represent, for the majority of States, the amounts on which refunds were paid or allowed during the year, rather than the amounts of fuel subject to refund which were purchased or consumed during the year. The adjustments necessary in order to tabulate the amounts of such fuel actually consumed during the year have not been made on this table.

² In the case of States in which the tax rate changed during the year, amounts taxed at both the old and the new rate are included.

³ 13 States do not provide for exemptions or refunds for nonhighway uses. The amounts entered for these States, indicated by stars, include both highway and nonhighway uses.

amounts entered for these States, indicated by state, nonhighway uses.

4 Within 300 feet of border tax rate is same as that of adjacent State. Gallons taxed at 2 cents, 1,836,000; at 4 cents, 9,084,000; at 5 cents, 570,000.

5 Estimated by State.

6 As the 1935 figures represent both highway and nonhighway use they are not comparable with the 1934 figures. The percentage increase, based on the net amount taxed, was 4.9 percent. In obtaining the nation-wide percentage increase this slight discrepancy was neglected.

7 Motor fuel used in aviation.
 8 3 cents per gallon refunded on nonhighway uses.
 1 cent per gallon refunded on motor fuel used in vehicles licensed to operate exclusively in cities.
 10 1½ cents per gallon refunded on motor fuel used in interstate aviation. Amount

10 ½/2 cents per gallon refunded on motor fuel used in interstate aviation. Amount not reported.
 11 5 cents per gallon refunded on nonhighway uses.
 12 Tax rate 4 cents per gallon to Mar. 1, 5 cents to Sept. 20, 4 cents to Nov. 26, and 5 cents thereafter.
 13 Prior to July 1 nonhighway uses were exempted from initial payment of the tax. Beginning July 1 refundes were allowed.
 14 1 cent per gallon refunded, prior to July 1, on motor fuel used in pleasure boats.
 15 Does not include 63,535,000 gallons of liquid fuel (kerosene, fuel oil, etc.) taxed at 1 cent per gallon but not subject to the 3-cent tax on motor-vehicle fuel.
 16 Prior to Mar. 10, agricultural uses were exempted from initial payment of the tax. Beginning Mar. 10 refunds were allowed.
 17 4 cents per gallon refunded on motor fuel used in aviation.
 18 2 cents per gallon refunded on nonhighway uses.

STATE MOTOR-FUEL TAX RECEIPTS, 1935

[Compiled for calendar year from reports of State authorities †]

				1								
	Tax rate	per gallon		Receipts fro	om taxation o	of motor fuel	Other	receipts in co	onnection v	vith motor-	fuel tax	
State	On Jan.	On Dec.	Date of rate change	Gross re- ceipts	Refunds paid	Net re- ceipts	Distribu- tors' and dealers' licenses	Inspection fees 2	Fines and pen- alties	Miscella- neous re- ceipts ³	Total	Net total receipts
	Cents	Cents										
Alabama	6	6		\$10, 269, 346		\$10, 269, 346	\$75	\$43,691			\$43,766	\$10, 313, 11
Arizona	5 6½	5 6½		3, 833, 502 8, 193, 647	\$555, 618 441	3, 277, 884 8, 193, 206	250	68, 118	\$464	\$583	714 68, 701	3, 278, 59 8, 261, 90
ArkansasCalifornia	3	3		43, 701, 052	3, 729, 647	39, 971, 405	12, 550	00, 110		φυσου	12, 550	39, 983, 95
Colorado Connecticut	4	4		6, 814, 599	3, 729, 647 805, 066	6, 009, 533						6,009,53
Connecticut	2	3	Oct. 1	5, 730, 777	112, 654	5, 618, 123	53, 721			2, 760	53, 721 5, 387	5, 671, 84
Delaware Florida	3 7	4	July 1	1, 550, 441 17, 865, 732	74, 009	1, 476, 432 17, 865, 732	2, 627 31, 240			2, 700	31, 240	1, 481, 81 17, 896, 97
Georgia	6	6		15, 771, 723		15, 771, 723	01, 210					15, 771, 72
[daho	5	. 5		3, 469, 195	346, 451	3, 122, 744	415		21	1, 117	1, 553	3, 124, 29
Illinois	3	3		31, 698, 969	1, 638, 805 1, 314, 282 1, 058, 282	30, 060, 164		322, 271 398, 482	2, 947		325, 218	30, 385, 38 19, 262, 31
Indiana	4 3	4 3		20, 178, 070 12, 606, 917	1, 314, 282	18, 863, 788 11, 548, 635	49 116	390, 402		367	398, 531 483	19, 262, 31
Kaneae	3	3		8, 830, 647	1,000,202	8, 830, 647	5, 215	84, 533		40, 795	130, 543	8, 961, 19
Kentucky	5	5		9, 835, 518		9, 835, 518			400		400	9, 835, 91 9, 416, 96
Louisiana	5 4	5 4		9, 345, 458	150 670	9, 345, 443 4, 572, 566		4 71, 047	479 230	31	71, 526 261	9, 416, 96
Maine	4	4		4, 731, 244 8, 808, 402	158, 678 530, 377	8, 278, 025			250	31	201	8, 278, 02
Massachusetts	3	ŝ		18, 056, 530	722, 440	17, 334, 090						4, 572, 82 8, 278, 02 17, 334, 09
Michigan	3	3		24, 030, 000	1. 244, 558	22, 785, 442	4, 330			789	5, 119	22, 790, 56 11, 362, 25
Minnesota	3	3 6		12, 770, 262	1, 643, 552 856, 102	11, 126, 710	986 195	234, 562		(5)	235, 548 195	11, 362, 25
Mississippi Missouri	6 2	2		8, 368, 277 10, 025, 641	296, 233	7, 512, 175 9, 729, 408	195	105, 585	10, 308	(*)	115, 893	7, 512, 37 9, 845, 30
Montana	5	5		4, 740, 461	296, 233 895, 919	3, 844, 542						3, 844, 54
Nebraska	4	5	(6)	9, 860, 659	148, 473 86, 331	9, 712, 186		95, 514	1, 034		96, 548	9, 808, 73 962, 04
New Hampshire	4 4	4		1, 048, 175 2, 944, 615	86, 331 76, 449	961, 844 2, 868, 166	174		22		196	962, 04 2, 868, 16
New Jersey	3	3		18, 341, 548	7162, 088	18, 179, 460	25, 642				25, 642	18, 205, 10
New Mexico	5	5		3, 104, 009	244, 713	2, 859, 296	18, 309				18, 309	2 877 60
New York	3	4	Apr. 1	57, 659, 473	1, 407, 769 385, 994	56, 251, 704					59, 541	56, 311, 24
North Carolina North Dakota	6	6		18, 745, 078 3, 329, 689	385, 994	18, 359, 084 2, 322, 611	776	782, 457		5, 474	787, 931 776	19, 147, 01 2, 323, 38
Ohio 8	4	4		40, 760, 442	1,007,078 1,591,656	39, 168, 786	365				365	39, 169, 15
Oklahoma	4	4		12, 430, 214	556, 291	11, 873, 923			3, 228		3, 228	11, 877, 15 7, 942, 85
Oregon	5	5	July 1	9, 059, 398	1, 120, 955	7, 938, 443				4, 410 2, 196	4, 410	7, 942, 85
Oregon Pennsylvania Rhode Island	3 2	4 2	July 1	40, 706, 631 2, 259, 538	157, 038	40, 706, 631 2, 102, 500	2 704		13	2, 196	2, 209 3, 704	40, 708, 84 2, 106, 20
South Carolina	6	6		8, 717, 032	132, 888	8, 584, 144	0, 101				0, 101	8, 584, 14
South Dakota	4	4		4, 505, 370	304, 376	4, 200, 994		114, 425			114, 425	4, 315, 41
rennessee	7 4	7		14, 966, 020	4 041 000	14, 966, 016						14, 966, 01
rexas Utah	4 4	4 0		37, 640, 751 2, 713, 678	4, 041, 930	33, 598, 821 2, 713, 678	580		74	7, 264	7, 264 663	33, 606, 08 2, 714, 34
Vermont	4	4		2, 048, 561		2, 048, 561					84	2, 048, 64
Virginia	5	5		14, 133, 860	793, 355	13, 340, 505						13 340 50
Virginia Washington West Virginia	5 4	5		13, 661, 809	1, 104, 501	12, 557, 308	10, 692				11,071	12, 568, 37
Wisconsin	4	4		6, 341, 406 17, 509, 969	245, 743 1, 438, 762	6, 095, 663 16, 071, 207	7, 278	178, 540			7, 278 178, 540	12, 568, 37 6, 102, 94 16, 249, 74
Wyoming	4	$\hat{4}$		1, 929, 650	1, 100, 102	1, 929, 650	2, 262	170,040			2, 262	1, 931, 91
District of Columbia	$\hat{2}$	$\hat{2}$		2, 208, 323	11, 114	2, 197, 209					-, -02	2, 197, 20
	(Weighted	O WORD CO)									
Total	rate	(approxi-	}	647, 852, 308	31, 000, 637	616, 851, 671	241, 101	2, 499, 225	19, 683	65, 786	2, 825, 795	619, 677, 46
		3.8 cents	1-4	, 00=, 000	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	3,002,011	,	,,	20,000	00, 700	_, 020, 100	-10,011, 10

¹ Previous tables were based on the reported earnings or assessments of the calendar ear. The amounts given in this table represent actual collections of the calendar

Previous tables were based on the reported earnings or assessments of the calendar year. The amounts given in this table represent actual collections of the calendar year.
 Inspection fees are imposed in Florida, Nevada, North Dakota, Oklahoma, South Carolina, and Tennessee, but the receipts from these fees were not reported.
 Includes fees for motor-fuel carrier permits, refund or exemption permits, interest on deposits, and miscellaneous unclassified receipts.
 Includes inspection fees on kerosene. Amount not reported.
 A special tax of 3 cents per gallon in Hancock County and 2 cents per gallon in Harrison and Jackson Counties is imposed for sea-wall protection. The receipts from these taxes were \$133,954 in 1935. These receipts are distributed back to the respective counties.

⁶ Tax rate 4 cents to Mar. 1; 5 cents to Sept. 20; 4 cents to Nov. 26; and 5 cents there-

⁶ Tax rate 4 cents to Mar. 1; 5 cents to Sept. 20; 4 cents to Nov. 26; and 5 cents thereafter.

⁷ Although refund law became effective on July 1, no refunds were actually paid until November. Prior to July 1 the law provided for exemptions rather than refunds for nonmotor-vehicle use.

⁸ Amounts tabulated include proceeds of 1-cent tax on all liquid fuels, including kerosene and fuel oil. Gross receipts from this tax, \$10,676,819; refunds, \$92,266; net receipts, \$10,584,553. Amount paid on nonmotor-vehicle fuels not reported separately.

STATE MOTOR-VEHICLE REGISTRATIONS, 1935

[Compiled from reports of State authorities for registration year, except as otherwise noted]

Passenger motor vehicles			Registered	l motor veh	icles, private	e and com	mercial 1	Other reg		Publicly vehicles, county, r pal	State, nunici-	10044.4.1	Year's ch motor-v registra	ehicle
Alabama Oct. 1–Sept. 30 242, 676 203, 687 203, 376 311 38, 989 5, 586 604 1, 118 2225, 782 16, 944 7.5 Arizona Jan 1–Dec. 31 103, 123 88, 138 85, 188 17, 964 28, 968 901 1, 187 22, 96, 989 90. 901 1, 187 22, 96, 989 90. 901 1, 187 22, 96, 989 90. 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 1, 187 22, 989 90. 901 901 901 901 901 901 901 901 901 901	State	1935 registration period		Passeng	ger motor vel	hicles	Motor					motor ve-		
Arisanas Jan. 1-Dec. 31. 103, 122 85, 158 85, 158 2. 17, 964 2, 835 366 1, 878 32 96, 586 6, 386 6.8 Arisanass do 20, 714 917, 924 117, 924 117, 924 117, 924 117, 924 117, 924 117, 924 117, 925 117, 924 117, 924 117, 925 117, 925 117, 924 117, 925 117, 924 117, 925 117, 924 117, 925 117, 925 117, 924 117, 925 117, 925 117, 925 117, 924 117, 925 117, 92			motor ve-	Total	biles (including		tractor trucks,	and semi-				nicles	or de-	centage
Total	Arizona Arkansas. California Colorado. Connecticut. Delaware Florida. Georgia Idaho Illinois. Indiana. Iowa Kansas. Kentucky Louisiana. Maine. Maryland. Massachusetts. Michigan Minnesota. Michigan Minnesota. Mississippi Missouri. Montana. Nebraska Nevada. New Hampshire 13. New Hampshire 14. New York. North Carolina. North Dakota. Ohio. Oklahoma. Oregon. Pennsylvania. Rhode Island. South Carolina.	Jan. 1-Dec. 31	103, 122 207, 429 2, 151, 501 284, 578, 837 56, 560 356, 244 394, 096 118, 266 1, 525, 817 850, 650 699, 016 553, 106 699, 016 553, 106 1, 239, 431 1, 266, 369 149, 767 268, 824 406, 189 34, 858 117, 154 888, 292 245, 230, 962 456, 152 164, 217 1, 712, 051 1, 745, 401 1, 745, 401 1, 745, 401 1, 745, 401 1, 745, 401 1, 745, 401 1, 745, 401 1, 385, 555 453, 660 241, 617 754, 037 68, 998 171, 464	\$5, 158 167, 322 1, 897, 593 256, 148 313, 605 46, 868 299, 045 328, 017 717, 883 304, 063 209, 426 6143, 086 297, 050 684, 679 1, 112, 148 152, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 550 114, 170 347, 135 277, 983 650, 970 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 516, 375 1, 25, 049 309, 867 1, 125, 049 309, 867 1, 125, 049 301, 248 202, 179 385, 043 212, 312 623, 893 55, 405 153, 854	85, 158 167, 086 1, 897, 593 256, 148 312, 671 46, 868 299, 045 327, 645 96, 778 1, 340, 340 716, 994 618, 487 473, 038 209, 426 142, 961 1296, 148 680, 157 1, 112, 148 620, 891 152, 983 650, 141 114, 170 346, 859 27, 878 27, 878 27, 878 27, 878 27, 1510, 837 2, 024, 043 397, 772 135, 366 1, 541, 097 129, 669 206, 140 152, 280 309, 447 1, 124, 295 87, 956 72, 380 324, 626 335, 003 211, 668 623, 352 55, 405	236 (4) 934 (4) 372 117 117 (1) 889 (4) 470 125 902 4,522 (4) 241 409 (9) 276 105 (4) 5,025 375 449 71 (4) 5,035 5,538 500 144 60 420 754 463 102 553	17, 964 40, 107 253, 908 28, 430 62, 232 9, 692 257, 199 66, 079 21, 371 185, 477 132, 767 80, 529 80, 068 43, 613 43, 613 43, 613 43, 613 43, 613 43, 613 43, 613 43, 613 44, 613 45, 686 115, 819 35, 542 59, 054 6, 875 224, 866 18, 245 306, 919 57, 931 28, 780 170, 943 42, 584 229, 264 18, 428 229, 761 26, 781 27, 783 142, 684 28, 761 26, 784 28, 761 26, 784 28, 761 26, 785 17, 787 18, 931 42, 031 42, 031 42, 031 42, 031 42, 031 42, 031 42, 031 42, 031 42, 031 42, 031 44, 031 45, 034 46, 0376 68, 657 29, 305 130, 144	2, 835 9, 398 95, 233 968 3, 992 1, 863 11, 256 10, 823 12, 925 14, 439 43, 013 6 50, 244 4, 045 (8) 9, 196 8, 846 1, 750 24, 260 809 22, 256 2, 256	3,56 4,25 8,880 901 2,021 2,54 979 9,52 4,07 4,568 3,197 1,435 1,379 3,107 1,435 1,379 3,07 1,435 1,379 3,07 1,07 2,07 3,07 3,07 3,07 3,07 3,07 3,07 3,07 3	1, 878 1, 342 20, 541 (e) 3, 189 912 4, 8002 (f) 7, 930 (f) 7, 930 (g) 7, 4, 478 (g) 1, 181 7, 930 (g) 7, 4, 478 (g) 1, 185 5, 226 4, 585 1, 937 1, 855 5, 60 (g) 12, 2017 1, 885 5, 723, 880 9, 861 5, 406 4, 928 3, 971 (g) 1, 111 (g) 1, 073 6, 250 13, 252 13, 352 14, 111 (g) 1, 073 6, 250 13, 252 14, 1034 (g) 15, 222 16, 708 18, 1034 (g) 18, 111 (g) 18, 111 (h) 18,	1 876 197 83 121 6 723 53 53 52 71 8 8 674 16 1,079 100 337 30 180 129 283	96, 586 198, 091 2, 006, 255 274, 231 354, 142 54, 215 335, 205 376, 993 108, 863 1, 456, 241 803, 271 666, 440 528, 664 332, 177 244, 007 178, 995 332, 892 785, 392 1, 148, 336 697, 672 174, 934 322, 892 32, 330 113, 134 82, 900 2, 273, 686 439, 351 156, 203 1613, 265 477, 292 272, 102 1, 681, 202 142, 394 169, 975 336, 313 1, 312, 152 101, 926 77, 921 373, 908 422, 238 223, 155 709, 359 64, 990 163, 070	6, 536 9, 338 145, 246 10, 347 21, 695 2, 345 21, 039 17, 103 9, 403 69, 576 24, 442 15, 492 29, 472 21, 709 24, 817 2, 170 21, 70 20, 236 24, 492 24, 819 24, 819 24, 819 24, 819 21, 134 2, 656 21, 376 24, 442 29, 321 11, 325 26, 556 21, 376 24, 492 23, 651 24, 529 24, 829 24, 829 24, 829 24, 829 24, 829 24, 829 24, 820 24, 849 62, 233 33, 885 9, 296 64, 199 65, 203 33, 885 9, 296 69, 952 4, 880 3, 592 11, 647 31, 422 44, 678 35, 500 8, 394	6. 8 4. 7 7. 2 3. 8 6. 1 4. 3 6. 3 4. 5 8. 6 4. 8 5. 9 4. 9 4. 9 4. 7 10. 2 3. 8

¹ Wherever possible, transfers and reregistrations, publicly owned vehicles, and vehicles not for highway use (farm tractors, etc.) have been eliminated from these

² A complete segregation of motor busses from other vehicles is not available. The figures given below represent common-carrier busses in most cases, although in some States contract busses and contract school busses are included. In a number of cases city busses are not included, rural and interurban carriers only being given. Where no busses are tabulated, the busses are included with automobiles, except as noted otherwise.

no busses are tabulated, the busses are included with accomposite, see otherwise.

3 Previous tables have included Federal vehicles. As no figures on Federal vehicles have been made available since 1931, this information has been omitted from this table. Figures on other publicly owned vehicles are incomplete. Some States give State-owned vehicles only; others exclude certain classes, such as fire apparatus and police vehicles, from registration.

4 Included with motor trucks.

5 Included with private and commercial registrations.

6 Includes 46,250 light trailers licensed without charge.

7 Includes unknown number of Federal vehicles.

E Trailers of 1,000 pounds capacity or more prohibited on highways, although permitted in cities under city licenses. Tractor-semitrailers registered as trucks. Light trailers permitted but not registered.
9 Light trailers only; heavy trailers included with motor trucks.
10 Registration transfers, approximately 163,000 passenger and 14,000 freight, de-

Registration transfers, approximately 163,000 passenger and 14,000 freight, deducted.
 Of these vehicles, approximately 1,300 are included with private and commercial registrations.
 Registration required every 3 years; these are 1935 registrations only.
 Although registration year was extended to Mar. 31, 1936, figures tabulated are for the c-lendar year 1935.
 Registration reported as follows: Gross weight 4,000 pounds or less, 270,899; over 4,000 pounds. 25,569; bus registrations (including ambulances and hearses) 644; motorcycles, 1,393. Figures tabulated represent an approximate classification based on fully classified figures reported for 1934.
 Eight delivery trucks included with passenger cars.
 Figures tabulated ars for the calendar year 1935.
 Trucks, tractors, and trailers are registered for the period from July 1 to June 30. Figures tabulated ars for the calendar year 1935.

STATE MOTOR-VEHICLE RECEIPTS, 1935

[Compiled from reports of State authorities for registration year, except as otherwise noted]

		ice ges, col- rs 3	(a) (b) (c) (c) (c) (d) (d) (d) (d) (d) (d) (d) (d) (d) (d	
		service charges, local col- lectors 3		_
	170	Other miscella- neous receipts	84, 734 34, 734 34, 734 72, 726, 917 116, 330 116, 330 117, 330 118, 330 119, 342 120, 988 120, 988 120, 988 120, 988 130, 988 130, 988 140, 988 150, 988 160, 130 170, 130 180,	
	Transfer	or reregis- tration fees	\$296, 570 \$20, 570 \$20, 570 \$40, 102 \$40, 203 \$40,	
s receipts		Fines and penalties	\$11, 177 \$1, 252 \$7, 390 \$7, 390 \$7, 390 \$7, 390 \$1, 531 \$1, 530 \$1, 530 \$1, 530 \$1, 530 \$1, 530 \$2, 675 \$3, 682 \$3, 682 \$3	
Miscellaneous receipts		Certificates of title	\$65, 226 140, 196 185, 552 1704, 651 1704, 651 170	
Mis	Opera-	tors' and chauffeurs' permits	2, 27, 273 827, 273 834, 400 115, 143 116, 143 116, 143 121, 243 121, 243 131, 243 140, 400 140, 400 141, 213 141, 243 151, 243 151, 243 151, 243 151, 243 152, 240 152, 240 152, 240 153, 243 154, 254 154,	
		Dealers licenses and plates	€ \$3.57,77,878 \$3.50,879,77,778 \$3.50,879,77,78,78,78,78,78,78,78,78,78,78,78,78,	
		Total	\$15, 917 1.85, 917 1.85, 917 1.85, 917 1.85, 918 3.06, 985 3.06, 985 3	
	Total registration	fees, all vehicles	\$3. 511, 864 \$2. 356, 862 \$1. 568, 982 \$1. 688, 982 \$1. 688, 982 \$1. 581, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 131, 864 \$1. 132, 864 \$1	
- Loos		Motor- cycles	12	
Poristration food	other vehicles	Trailers and semi- trailers	\$55.97 \$55.97	
	Motor	trucks, tractor trucks, etc.	\$325,807 \$325,807 \$383,532 \$383,532 \$383,532 \$383,532 \$383,532 \$383,532 \$383,532 \$480,907 \$380,8	
tion fees	hicles	Motor busses 2	\$46, 437 (a) \$56, 437 (b) \$6, 403 (c) \$6, 403 (d) \$15, 403 (e) \$6, 403 (e) \$6, 403 (f) \$6, 789 (f) \$6	
ehicle registration fees	Passenger motor vehicles	Auto- mobiles (including taxicabs)	\$25,000 \$25	
Motor-veh	Passenger	Total	\$\frac{8.326}{8.326},009 \$\frac{1.297}{2.526},009 \$\frac{1.297}{2.526},	
		Total 1		
	Total re-	tion and other fees	\$3, 527, 781 \$4, 527, 781 \$5, 525, 672 \$2, 206, 930 \$2, 206, 930 \$1, 011, 520 \$1, 011, 520 \$1	
	1095 warnictwotton nami		Oct. 1-Sept. 30 Jan. 1-Dec. 31. do d	
	***************************************	Drand	Alabama Arizona Arkansas California Colorado Connecticut Delaware Delaware Connecticut Delaware Hidabo Illinois Indiana Indian	

No segregation of registration fees by type of vehicle was available in Alabama, Mississippi, New Hampshire, and Tenessee. In three cases the fotal in ofor-reficle registration fees include those of rainfers and motor-cycles except in the case of new Hampshire. Dealers licenses in Alabama and Tennessee are also included a tended at a fagures for registration fees of busses are incomplete (see preceding table, note 2). Where no fees are tabulated, the fees of busses are included with those of automobiles, except as noted otherwise.

In the majority of cases these charges are collected or deducted by the county or local officers who issue registrations. In the majority of cases these charges are included in the registration and other fees as listed. In a few cases estimates were made on the basis of registration figures. In the case of Oklahoma no estimate could be made with registration fees.

Included with registration fees.

Included with registration fees.

Included spire fees of motor trucks.

Includes \$253,801 in \$1 assessments on motor-vehicle registrations for old-age pension fund.

Tractor-semitrallers registered as trucks. Light trailers bermitted in cities under city licenses. Tractor-semitrallers registered as trucks. Light trailers permitted but not registered.

¹⁰ Fees of light trailers only; fees of heavy trailers included with those of motor trucks.

¹¹ Registration fees are collected by counties, and State does not maintain complete record. Figures given are estimates supplied by State.

¹² Although registration year was extended to Mar. 31, 1936, figures tabulated are for the calendar year

over 4,000 pounds, Figures tabulated 1935.
Included with fees of motor trucks.

19 Data not sufficient for estimate.

10 Data not sufficient for estimate.

11 Data not sufficient for estimate.

12 Registration fees reported as follows: Gross weight 4,000 pounds or less, \$1,354,405, 18,805,909, bus registrations (including ambulances and hearses), \$86,125; motorcycles, \$4,410, represent an approximate classifieation based on fully classified figures reported for 1934.

12 Figures tabulated are for the calendar year 1935.

13 Figures, tractors, and trailers are registered for the period from July 1 to June 30. are for the calendar year 1935.

14 Trucks, tractors, and trailers are registered for the period from July 1 to June 30. are for the calendar year 1935.

Figures tabulated

			1936 AND 1937 FUNDS	936 AND	1937	FUNDS					
				AS OF JU	JULY 31, 1936	36					
			COMPLETED		UNDER	ER CONSTRUCTION		APPROV	APPROVED FOR CONSTRUCTION	NOI	RAI ANCE OF
STATE	APPORTIONMENT	Estimated Total Cost	Federal Aid	Miles	Estimated Total Cost	Federal Aid	Miles	Estimated Total Cost	Federal Aid	Miles	FUNDS AVAIL ABLE FOR NEW PROJECTS
Alabama Arizona Arkansas	\$ 5,208,287 3,564,709 4,275,929	# 1, 1446, 066	41,166,429	81.1	\$ 78,130 594,942	\$ 39,065 453,504	गं • 02	4,98,69 \$69,800	4 53,400	9.0	\$ 5,135,822 1,895,088 4,275,929
California Colorado Connecticut	9,508,671 4,575,144 1,582,913	1,065,965	460.086 980.097	35.0	7,161,950	4,075,850 783,593 541,780	152.5 37.0 15.0	2,029,553	1,169,576	55.3 39.4	3,654,171
Delaware Florida Georgia	3,315,558	52,544 518,283 208,961	26,272 259,142 104,480	17.9 17.9	387,204	193,602	25.6 18.4	1.262.214	36,539	1.9	2,769,195 1,720,100
Idaho Illinois Indiana	3,065,304 10,325,922 6,184,258	670,814 1,056,012 1,828,021	390,698	101.4	1,553,371	3,645,424	88.8 107.0	1,649,998	547.159 824.999	28.8	1,200,003
Jows Kansas Kentucky	6,466,628 6,631,085 4,611,955	1,174,488 1,046,298 1,529,997	559,244 522,833 761,272	151.8 292.5 98.8	5,500,019 4,022,952 677,381	2,593,019	397.8	1,991,258	207,360	281.5	3,107,005
Louisiana Maine Maryland	3,557,930 2,177,197 2,050,870	616,385 715,690	308,192 357,047	23.4	1,943,614	971,807	4.79	572,566	286,283	15.7	1,991,648
Massachusetts Michigan Minnesota	3,485,364 7,668,768 6,849,307	1,932,435	964,720	84.8	6,876,619	303,691	5.1	273,066 273,066 5,549,438 647,417	2,774,719	156.8	3,045,140
Mississippi Missouri Montana	4,387,636 7,601,200 5,122,333	1,809,227	903,383	295.8	4,418,472 2,315,689	2,209,236	123.8 202.4	3,138,984	1,569,381	198.0	4,387,636 2,919,200
Nebraska Nevada New Hampshire	5,167,930 3,189,479 1,218,750	1,111,261 676,290 259,282	555,551 582,264 126,620	113.5	1,657,754	848,239 979,012	155.7	2,164,543	1,082,271	152.5	2,681,869 1,502,725 766,908
New Jersey New Mexico New York	3,352,469 3,990,023 12,306,710	87,925 1,017,857 83,800	43,962 618,877 41,900	95.1	2,030,222 2,163,562 11,824,789	1,015,111 1,337,949 5,846,162	28.9	1,321,388	574,164	10.4	1,719,232 2,033,198
North Carolina North Dakota Obio	5,879,466 3,918,269 9,131,204	122,172	361,002	107.7	2,951,390 191,740 6.286,768	1,474,300	333.3	697,345	335,057	8.17	3,709,107 3,817,063
Oklahoma Oregon Pennsylvania	5,884,927 4,089,711 10,695,448	1,133,122 624,112 297,941	595,455 378,566 148,702	20.6	2,727,373	733.175 1,582,189 3,649,735	32.7	1,719,779 685,192	901,990 405,177 1,115,230	29.0	3,654,306 1,723,778 5,781,781
Rhode Island South Carolina South Dakota	1,218,750 3,381,337 4,078,647	505,570	277,204	34.3	263,175	120,968 430,113	17.4 120.8	3,469,273	1,574,750	291.7	1,218,750
Tennessee Texas Utah	5,268,270 15,548,821 2,826,960	688,196 5,787,287 847,098	343,526 2,883,240 606,206	30.9 320.2 62.4	1,129,863 7,815,774 961,875	564,932 3,896,915 690,250	11.8 104.2	351,561 1,170,192 263,588	175,781 571,295 184,095	55.5	4,184,031 8,197,371
Vermont Virginia Washington	1,218,750 4,559,200 3,904,738	300,055 243,995 861,209	149,362	14.9 10.8 25.0	899,621 2,447,933 2,320,438	1,223,976	7.98	1,312,873	173,325	12.7	2,978,409
West Virginia Wisconsin Wyoming	2,716,754 6,090,504 3,121,972	87,161 943,634 2,045,492	43,581 471,640 1,249,184	34.0 24.0 213.0	945,630 4,209,668 478,644	472,803 2,047,548 278,990	139.2 61.6	2,075,957 1,078,274	274,872 923,099 663,186	200.4	1,9 25 ,498 2,648,217 930,612
District of Columbia Hawaii	1,218.750				167,855	231,167	8.2				987,583
TOTALS	243,750,000	140,555,183	21,873,037	3,066.0	120,283,273	61,713,674	0.987,4	45,105,616	22,603,537	2,280.8	137,559,752

CURRENT STATUS OF UNITED STATES WORKS PROGRAM HIGHWAY PROJECTS

(AS PROVIDED BY THE EMERGENCY RELIEF APPROPRIATION ACT OF 1935)

AS OF JULY 31, 1936

Calle V Land	minute of the contract of the		COMPLETED		UND	UNDER CONSTRUCTION		APPROVED	ED FOR CONSTRUCTION	NC	BALANCE OF
OLAID	ALTORITONMENT	Estimated Total Cost	Works Program Funds	Miles	Estimated Total Cost	Works Program Funds	Miles	Estimated Total Cost	Works Program Funds	Miles	ABLE FOR NEW PROJECT'S
1	\$ 4,151,115	-	,		\$ 3,383,581	* 3,383,581	105.3	\$ 146.537	# 496.537	22.1	\$ 270.997
Arizona	2,569,841	973.034	\$ 927,032	64.5	1,934,751	1,398,534	125.2	231,669	125,927	11.0	
Arkansas	3,352,061		951,881	70.3	1,847,687	1,831,705	217.5	497,673	495,568	68.2	72,907
California	7,747,928		923,426	85.0	5,757,833	5,610,317	145.7	1.94,135	1,031,013	17.0	183,172
Connecticut	3,395,263	795.613	795, 222	80.09	1,234,958	1,234,958	36.3	51,830	51,830	0.41	1,313,253
	1,410,109		2,332	7	390,994	969,280	2.2	211,80/	211,337	3.2	834,097
Delaware Florida	2 507 114	109.11	109.77	14.0	411,131	411,151	36.6	1/4,295	145,453	13.5	206,125
Georgia	1 088 a67		02,020	2.4	6,151,560	6,113,499	0.0	100,007	169,602	, , ,	2 070 7
1.1-1	777 200 6		142 140	7 72	1 717 653	1 657 760	2 423	117 150	251,1(4	16.5	2,010,125
ano	R Kall no		1 101 764	0.00	6 769 210	00/1/201	121.5	620,027	500,000	2	20.00
Indiana	4.941.255		181.141	200	1 827 LS2	4.626.370	2020	106 5R5	106 585	1 100	26. 8EG
lowa	4,991,664		640,850	122,1	3.067.082	2,958,918	239.3	1.001.979	967.386	82.9	524.510
Kansas	4,994,975		404.692	77.5	4.296.581	4.296.095	283.6	293,269	283,944	13.4	10.2
Kentucky	3,726,271		407,582	82.0	1,973,913	1,973,913	203.7	597.137	597.137	月	747.63
Louisiana	2,890,429				1,186,675	1,031,517	8.49	1.9年,年	1,711,897	109.9	147.01
Maine	1,676,799	310,933	310,933	14.3	1,079,997	1,079,450	2.94	217,004	217,004	6.6	69,41
Maryland	1,750,738		21,145	1.1	328,517	328,517	12.3	1,026,583	863,243	26.3	537,83
Massachusetts	3,262,885				117,754	117,754	1.1	1,320,493	1,320,493	8.9	1,824,63
Michigan	6,301,414		992,050	55.1	5,181,621	5,121,591	229.2	53,000	53,000	3.5	134,77
micools	5,277,145		1,142,543	261.9	3,591,608	3,115,583	9.844	1,269,692	893,227	197.4	125,79
Mississippi	5.457.552	178,812	178,104	18.3	2,762,932	2,759,505	177.5	161,912	161,912	11.8	358,03
Montana	2,012,026		1,032,014	401.1	3,510,49	3,516,449	288.0	862,926	859,918	£0.5	72,402
	7 970 770		1,002,073	040	201020	201,626,5	120.6	Low oal.	lion out		58,37
Nebraska Nevada	2,244,074	1.080.050	1 051 050	17.0	4, (35,016	2, (59,041	292.5	452,974	452,974	51.9	550,658
New Hampshire	945,225	63,802	62.520	2,50	361.141	347.753	13.4	178.1467	175.075	C	359.877
New Jersev	3,129,805				2,158,920	2,158,920	18.4	136.333	136.333	1.4	834.552
New Mexico	2,871,397		1,004,960	93.9	1,160,488	1,160,488	72.6	262,129	262,129	16.2	143.820
New York	11,046,377		743,037	7.8	9,957,475	9,556,520	154.1	263,000	263,000	4.7	483,719
North Carolina	4,720,173		272,901	7.42	3,135,676	3,103,087	209.5	040,970	589,887	4°6€	754.298
orth Dakota	2,867,245		243,587	1,2.6	1,036,920	1,034,711	124.1	1.287.674	1.287.674	126.6	301,272
Ohio	7.670,815		399,620	4.3	3,959,803	3,931,978	75.5	1,879,605	1,768,906	141.0	1,570.310
Oklahoma	4,580,670		347,641	37.7	2,284,571	2,281,066	195.3	1,104,077	1,103,556	134.9	848,408
Oregon	3,038,642	423,14	421,269	20.1	2,332,611	2,241,719	119.9	539.972	261,372	26.2	114,282
	2,271,121		410 520	11.5	1, (80, (65	1,740,831	64.9	1,078,504	1,078,504	67.2	6,206,34
Rhode Island	202,500		140,528	D 10	840,81/	846,81/	17.4	holi and	100	7,7	1,85
South Dakota	2.05,001,2		567 178	15.0	1,0//102/	1,040,451	151.0	201 OF	100 DE	7.00	514,6/6
Tennessee	4,192,460		254.922	7.7	2.240.658	2.240.658	96.8	599.051	599.051	25.9	1.097.82
Техаз	11,989,350		3,251,462	378.9	8,606,508	7.845.757	4.669	987,870	841,609	39.6	50.52
tah	2.067.154		519,031	7.94	1,008,648	966,358	86.1	396,884	306,128	26.7	275,536
Vermont	924,306	213,437	200,691	6.5	777,835	659,233	14.9	30,109	466'82	寸 .	35,387
Virginia Washington	2,092,007	1,025,956	983,063	385.1	1,705,990	1,693,624	560.6	653,865	640,119	8.00° 10°	335,86
Wast Virginio	2.241.412	a .		24.5	1 222 201	1,000,022		671 367	671 215	10.6	220 202
isconsin	4.823.884		488.739	51.1	4 727 729	110 668		וכלייול	215,477	15.0	ייייני
Wyoming	2,219,155	256,351	256,348	14.2	1,796,937	1,796,919		24.654	54,653	7.27	111,23
District of Columbia	964.646	724,656	700,626	0.9	251,210	216,234					32,636
Hawaii	926,033	95,330	80,570	1.3	246,645	541,611					303,852
	_										

			BALANCE OF	FUNDS AVAIL. ABLE FOR NEW PROJECTS	# 142,355 158,371 24,081	321,048 1,136,939 1,554,233	298,239	554,222 2,472,512 232,822	614,113	839,259 195,147	2,284,839 673,895 1,277,787	1,001,477 267,960 128,345	130,189 201,418 467,582	2,282,366	2,190,538 1,154,420 4,626,513	1,524,412	45,583 1,131,080 1,572,397	2,906,393 262,129 452,899	194,212 1,654,304 1,654,474	1,784,227 896,518 392,801	1,545	55,103,003
PROJECTS				Grade Crossings Protect- ed by Signals or Other- wise	11 29			161	900	44 =	80	~ ≈	22			2	29	149	0 60			505
OJE			NUMBER	Grade Crossing Struc- tures Re- construct- ed				44 PF	0 r	m 0	-		-	2	4-0	1 2	-		22			5+1
PR(JCTION	Z	Grade Crossings Eliminated by Separa- Tion or Relocation	8 1 22	-	800	12 22	27	12	4 1	13.	10	9	14 17	2 7 2	11	10 28	182	+ 1C+	2	380
CROSSING	(99)	APPROVED FOR CONSTRUCTION		Works Program Funds	\$ 704,414 63,832 1,653,103	719,617	340,039	90,000 2,589,904 501,186	1,643,863	1,560,001	334,460	286,260	1,280,515	542,110 637,866 635,770	889,535 667,297 0.038,598	1,402,699	570,875	2,929,520	74,992 634,609 639,941	1,320,424	158,369	34,080,630
ADE	AC1 OF 1933)	APPRO		Estimated Total Cost	# 704,414 86,220 1,655,792	79,677	340,039	96,366 2,589,904 824,914	1,657,471	1,608,180	334,460	286,260 1,534,151	1,280,515	542,110 647,939 636,050	905,934 667,297	1,402,699	571,285	2,982.735	76,786 675,769 639,941	1,320,424 627,191	215,430	35,304,665
GR				Grade Crossings Protect- ed by Signals or Other- wise							1.0						2	2	-			12
E			NUMBER	Grade Crossing Struc- tures Re- construct- ed	5	# =	at	127	1	- 0	2000	M+4	- "	210	× ~	196	- 5	12	2 2 9	25		156
RA SERA	S. C.	NO	Z	Grade Crossings Eliminated by Separa- tion or Relocation	32 10 22	£6 16	171	な神に	142	12	12 72	31 22	65	10 m	ಸನ∓	22 22 25	7 62	111	4 22 1	25.	mm	1065
	31, 1936	UNDER CONSTRUCTION		Works Program Funds	\$ 3.178.723 986.483 1,501,881	6,714,198 964,639 78,774	1,738,801	936,692	3,312,197 4,518,794 2,153,617	814,208 573,818 414,161	1,591,534 5,601,677	1,953,738 4,349,324	1,946,376 379,746	1,159,350	1,649,075	1,675,196	1,358,001	534,900	295,975 1,312,742 1,762,207	438,108 2,594,410 325,011	409,259	101,013,967
S WORKS	NOVIDED BY THE EMERGENCY RELIEF AS OF JULY 31,	r.		Estimated Total Cost	*3,178,725 1,002,163 1,505,139	6,946,051 964,639 78,774	143,486 1,741,112 276,256	936,692	3,417,483	814,208 574,409 414,161	1,591,534	1,953,738 4,362,626	1,946,376	1,159,350 693,593 9,699,184	1,649,075	1,987,879	1,368,967	534,900	297,333	438,108 2,594,410 325,013	423,907	102,666,711
STATES				Grade Crossings Protect- ed by Signals or Other- wise							60											ю
STA				Grade Crossing Struc- tures Re- construct- ed		2	1		2		1	^		-	~	=		-	m ~			19
F UNITED				Grade Crossings Eliminated by Separa- tion or Relocation	12	9		# #	₽ ₽	-	rv#	σ	- t	9		20 ↔ 1v	#	10	211	~ ~ ~ ~ ~		131
		COMPLETED		Works Program Funds	# 9,124 47,412 394,996	451,116 529,989	15,489	93,565 84,015	25,500	60,504	489,625	674, 892	199,361	272,505	94,809	402,404 36,709 10,836	77.597	312,659	164,678	211,231		5,802,400
ATUS O				Estimated Total Cost	# 9.124 47.412 396.873	466,411 550,989	15,489	93,565 84,015	26,763	60,837	489,625	574.892	199,361 306,096	272,505	94,809	402,404 36,709 10,836	777.597	312,659	164,673 172,632 230,418	211,231		5,842,169
CURRENT STATUS				AFFORTIONMENT	# 4,034,617 1,256,099 3,574,060	7,486,362 2,631,567 1,712,684	418,239 2,827,883 4,895,949	1,674,479 10,307,184 5,111,096	5,600,679 5,246,258 3,672,387	3,213,467 1,426,861 2,061,751	4,210,833 6,765,197 5,395,441	3,241,475 6,142,153 2,722,327	3,556,441	3,983,826 1,725,286 13,577,189	4,823,958 3,207,473 8,439,897	5,004,711 2,334,204 11,483,613	699, 691 3, 059, 956 3, 249, 086	3,903,979 10,855,982 1,230,763	729,857 3,774,287 3,095,041	5,022,683	410,804 453,703	196,000,000
CUR			112 4 25-3	STATE	Alabama Arizona Arkansas	California Colorado Connecticut	Delaware Florida Georgia	Idaho Illinois Indiana	lowa Kansas Kentucky	Louisiana Maine Maryland	Massachusetts Michigan Minnesota	Mississippi Missouri Montana	Nebraska Nevada New Hampshire	New Jersey New Mexico New York	North Carolina North Dakota Ohio	Oklaboma Oregon Pennsylvania	Rhode Island South Carolina South Dakota	Tennessee Texas Utah	Vermont Virginia Washington	West Virginia Wisconsin Wyoming	Dist. of Columbia Hawaii	TOTALS

PUBLICATIONS of the BUREAU OF PUBLIC ROADS

Any of the following publications may be purchased from the Superintendent of Documents, Government Printing Office, Washington, D. C. As his office is not connected with the Department and as the Department does not sell publications, please send no remittance to the United States Department of Agriculture.

ANNUAL REPORTS

Report of the Chief of the Bureau of Public Roads, 1924. 5 cents.

Report of the Chief of the Bureau of Public Roads, 1927.

Report of the Chief of the Bureau of Public Roads, 1928. 5 cents.

Report of the Chief of the Bureau of Public Roads, 1929. 10 cents.

Report of the Chief of the Bureau of Public Roads, 1931. 10 cents.

Report of the Chief of the Bureau of Public Roads, 1933, 5 cents,

Report of the Chief of the Bureau of Public Roads, 1934.

Report of the Chief of the Bureau of Public Roads, 1935. 5 cents.

DEPARTMENT BULLETINS

No. 583D . . Reports on Experimental Convict Road Camp, Fulton County, Ga. 25 cents.

No. 1279D . . Rural Highway Mileage, Income, and Expenditures, 1921 and 1922. 15 cents.

TECHNICAL BULLETINS

No. 55T . . . Highway Bridge Surveys. 20 cents.

No. 265T . . . Electrical Equipment on Movable Bridges. 35 cents.

MISCELLANEOUS PUBLICATIONS

No. 76MP . . The Results of Physical Tests of Road-Building Rock. 25 cents. Federal Legislation and Regulations Relating to Highway Construction. 10 cents.

Supplement No. 1 to Federal Legislation and Regulations Relating to Highway Construction.

No. 191 Roadside Improvement. 10 cents.

The Taxation of Motor Vehicles in 1932. 35 cents.

An Economic and Statistical Analysis of Highway-Construction Expenditures. 15 cents.

Single copies of the following publications may be obtained from the Bureau of Public Roads upon request. They cannot be purchased from the Superintendent of Documents.

SEPARATE REPRINT FROM THE YEARBOOK

No. 1036Y . . Road Work on Farm Outlets Needs Skill and Right Equipment.

TRANSPORTATION SURVEY REPORTS

Report of a Survey of Transportation on the State Highway System of Ohio (1927).

Report of a Survey of Transportation on the State Highways of Vermont (1927).

Report of a Survey of Transportation on the State Highways of New Hampshire (1927).

Report of a Plan of Highway Improvement in the Regional Area of Cleveland, Ohio (1928).

Report of a Survey of Transportation on the State Highways of Pennsylvania (1928).

Report of a Survey of Traffic on the Federal-Aid Highway Systems of Eleven Western States (1930).

A complete list of the publications of the Bureau of Public Roads, classified according to subject and including the more important articles in Public Roads, may be obtained upon request addressed to the U. S. Bureau of Public Roads, Willard Building, Washington, D. C.

CURRENT STATUS OF UNITED STATES PUBLIC WORKS ROAD CONSTRUCTION

AS PROVIDED BY SECTION 204 OF THE NATIONAL INDUSTRIAL RECOVERY ACT (1934 FUNDS) AND BY THE ACT OF JUNE 18, 1934 (1935 FUNDS)

AS OF JULY 31, 1936

									11111										_
IDS AVAILABLE ROJECTS	1935 Public Works Funds	\$56,622 49,905 19,172	56,988 44,149 141,924	93,165	27,659 142,207 31,887	114,352	175,043 46,846 448,407	178,471 91,320 314,558	44,909 2,488 65,725	19,905 35,698 25,396	205,818 102,853 50,488	91,607 528,390 128,893	263,076 107,468 298,943	155,985	142,389 109,277 228	11,350 272,184 36,866	99,329 39,985 62,666	51,348 9,619	6,288,373
BALANCE OF FUNDS AVAILABLE FOR NEW PROJECTS	1934 Public Works Funds	\$ 6,167 7,447 102,981	18,105 43,099 36,119	284 56,300 276,520	26,776 97,774 55,974	40,201 10,217	16,635 21,803 82,420	118,022 40,113 145,218	54,088 88,505 50,846	48,371 22,598 4,888	112,410 167,593 143,988	172,997 124,955 59,285	16,060 73,888 252,887	109,125 184,341	88,780	121 110,157 3,825	68,830 40,888 20,702	8,885	3,231,867
	Mileage	2.9 1.1		1.1	7.41	3.3	6.4 3.4	3.6	ο'∓.	6.5	¥. 52.	16.7	3.2	2.9	7.1	.2.9	Cl **		144.2
APPROVED FOR CONSTRUCTION	1935 Public Works Funds	* 453,670 49,945	820	52,205 15,955 85,519	37,043 19,740 134,587	47,440 5,140 176,365	72,999	114,280 28,925 64,328	34,895 108,538	98,740 5,250 6,482	303,276	205,439 195,253 52,706	6,250 25,041 276,282	189,68	19,868 500 31,762	5,299 24,235 146,596	89,815 41,376 28,905	23,433	3,427,876
APPROVED	1934 Public Works Funds	\$ 9,241	40,533	218,756	42,905 44,638	9,000	56,549		16,437	23.736	107,208	100,071 26,322 27,376	34,552	11,408 18,974	32,292	56,178			917,324
	Mileage	35.2	6. 4	12.2 115.4	4.7 52.8 44.7	14.5	17.1	2.9 39.5 13.2	65.9 19.5 28.4	37.1	5.8	20.9 98.8 24.3	2.1 6.4 47.2	35.9	16.9 11.9 4,4	27.8	25.9	5.5	971.3
RUCTION	1935 Public Works Funds	\$ 646,015 12,500 61,965	290,015	56,002 437.733 1,340,534	425,402 2,156,062 896,582	389,800 106,757 331,140	248,948	816,339 814,348 333,564	1,057,996 1,485,324 323,489	273,550	1,585,161 33,710 1,279,899	260,710 723,779 1,003,640	422,163 305,644 753,541	641,929 496,345	733,910 532,648 156,741	93,611 202,770 115,530	801,733	84,699	24,775,589
UNDER CONSTRUCTION	1934 Public Works Funds	\$ 160,296		569.377	1,040,808	68,553	138,621	1,896,850	336,141 937,703 64,459	70,773	616,884	212,961 74,977 95,950	67,007 64,950 456,292	121,449	124,174	3,922	84,932 7,300 11,728		8,621,454
	Estimated Total Cost	* 806,311 12,500 62,020	1,293,183	56,002 468,781 1,957,935	429,790 3,303,516 1,166,876	412,102 210,397 776,141	401,032 7,234 846,904	2,713,189 872,325 395,722	1,463,103 2,681,061 460,934	536,363	1,784,114 50,695 2,547,170	473,671 851,765 1,117,240	490,905 466,132 1,303,427	785.787 585,788	953,882 952,895 202,180	123,085 221,840 121,628	942,272 129,060 17,579	120,199	37,099,523
7.	Mileage	739.3 543.0 618.0	759.6	128.3 296.7 694.3	196.8 619.3 143.8	1,215.5	236.1 193.1 128.2	112.4 728.8 1,633.2	678.1 1,431.8 1,029.9	1,006.2	81.5 762.8 802.1	1,329.1 2,030.0	804.0 462.4 1,011.3	89.1 589.0 1,511.6	2,774.2	137.6 587.6 302.4	196.1 619.2 1,035.9	20.8	34,232.0
red	1935 Public Works Funds	\$,103,535 2,579,530 3,296,968	7,584,383 3,441,857 859,239	815,188 2,114,489 2,480,466	1,787,381 6,603,392 4,025,907	4,681,121 5,005,778 3,196,455	2,466,942 1,657,506 114,205	2,241,385 5,517,976 4,713,102	2,402,426 4,577,390 3,380,520	3,572,168 1,989,191 937,585	1,126,624 2,805,137 9,845,914	4,283,185 1,491,544 6,679,773	3,993,691 2,659,661 8,262,022	1,014,572 1,876,355 2,458,767	3,406,825 11,648,828 1,943,960	837,747 3,266,198 2,907,420	1,289,459 4,781,158 2,165,179	837,795	165,508,162
COMPLETED	1934 Public Works Funds	* 8,203,670 5,204,513 6,636,112	15,589,249 6,831,431 2,789,088	1,818,804 5,175,534 9,026,532	4,416,568 16,387,551 9,777,926	10,055,660 9,971,849 7,087,455	5,616,786 3,337,541 3,150,380	4,582,227 12,696,114 10,495,068	6,584,009 11,154,098 7,324,443	7,709,817 4,499,583 1,904,951	6,126,421 5,625,342 21,548,282	9,036,263	9,133,731 5,968,059 18,147,273	1,998,708 5,217,183 5,718,722	8,368,445 23,829,962 4,162,416	1,863,531 7,232,702 6,098,252	4,321,372 9,676,693 4,468,896	1,909,584	381,229,355
	Total Cost	\$,14,723,002 8,989,074 10,902,752	29,429,219 11,177,865 4,061,019	2,676,358 8,656,787 12,168,863	6,615,368 23,808,620 14,449,277	15,333,141 15,313,097 11,092,789	8,704,663 5,222,823 4,850,828	7,467,342 19,737,477 16,078,567	11,867,417 16,791,927 11,378,085	12,547,646 6,771,659 2,973,832	7.756.836 8,654,309 38,031,567	14,541,762 7,760,885 23,778,287	14,099,927 9,532,136 27,745,680	3,148,010 7,336,705 8,751,168	12,678,279 37,334,470 7,123,928	3,032,919 11,445,708 9,244,404	5,872,312 15,253,645 6,843,611	2,602,372	599,105,932
NMENTS	Act of June 18, 1934 (1935 Fund)	* 4, 259, 842 2, 641, 935 3, 428, 049	7,932,206 3,486,006 1,454,868	923,395 2,661,343 5,113,491	2,277,486 8,921,401 5,088,963	5,118,361 5,117,675 3,818,311	2,963,932 1,711,586 1,810,058	3,350,474 6,452,568 5,425,551	3,540,227 6,173,740 3,769,734	3,964,364 2,302,356 969,462	3,220,879 2,941,700	4,840,941 2,938,967 7,865,012	4,685,180 3,097,814 9,590,788	1,014,572 2,770,954 3,047,643	4,302,991 12,291,253 2,132,691	948,007 3,765,387 3,106,412	2,280,335 4,941,837 2,287,712	973,842	200,000,000
APPORTIONMENTS	Sec. 204 of the Act of June 16, 1933 (1934 Fund)	\$ 8,370,133 5,211,960 6,748,335	15,607,354 6,874,530 2,865,740	1,819,088 5,231,834 10,091,185	4,486,249 17,570,770 10,037,843	10,055,660 10,089,604 7,517,359	5,828,591 3,369,917 3,564,527	6,597,100 12,736,227 10,656,569	6,978,675 12,180,306 7,439,748	7,828,961 4,545,917 1,909,839	6,346,039 5,792,935 22,330,101	9,522,293 5,804,448 15,484,592	9,216,798 6,106,896 18,891,004	1,998,708 5,459,165 6,011,479	8,492,619 24,244,024 4,194,708	1,867,573 7,416,757 6,115,867	4,474,234 9,724,881 4,501,327	1,918,469	394,000,000
	STATE	Alabama Arizona Arkansas	California Colorado Connecticut	Delaware Florida Georgia	Idaho Illinois Indiana	Iowa Kansas Kentucky	Louisiana Maine Maryland	Massachusetts Michigan Minnesota	Mississippi Missouri Montana	Nebraska Nevada New Hampshire	New Jersey New Mexico New York	North Carolina North Dakota Ohio	Oklahoma Oregon Pennsylvania	Rhode Island South Carolina South Dakota	Tennessee Texas Utah	Vermont Virginia Washington	West Virginia Wisconsin Wyoming	District of Columbia	TOTALS



