

1  
2

# Mobility21

A USDOT NATIONAL  
UNIVERSITY TRANSPORTATION CENTER

Carnegie Mellon University



THE OHIO STATE UNIVERSITY



3  
4  
5

6

## Improving Access and Equity via Shared Automated Mobility in U.S. Public Transportation Systems

8

9

10

Costa Samaras, 0000-0002-8803-2845

11

12

## FINAL RESEARCH REPORT

Contract # DTRT12GUTC11

13

14

15

16

17

18

19

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. This document is disseminated under the sponsorship of the U.S. Department of Transportation's University Transportation Centers Program, in the interest of information exchange. The U.S. Government assumes no liability for the contents or use thereof.

1 **ABSTRACT**

2 As automated transportation progresses, public transit agencies may address the equitable  
3 implications of integrating autonomous vehicles and shuttles into current transit systems. Capital  
4 and operating expenses for automated mobility modes handled by public transportation agencies  
5 are unknown at this point given the limited number of pilots and deployments. This study  
6 evaluated transit systems in various cities to identify opportunities for equitable improvement  
7 through shared automated mobility. We identified locations of unmet transit demand among the  
8 transit-dependent population and prioritized them for future service via shared autonomous  
9 vehicles (SAVs) or shared autonomous electric shuttles. Based on current transit and technology  
10 costs, we estimated levelized operating costs for first- and last-mile service in a transit system.  
11 The study examines transit services in four U.S. cities: New York City, New York, Chicago,  
12 Illinois, Pittsburgh, Pennsylvania, and Minneapolis-St. Paul, Minnesota. The results suggest that  
13 it is possible to operate SAVs and shuttles at a lower cost than buses as part of a public transit  
14 system under particular transit demand situations. The sensitivity study identified the critical  
15 factors to consider while developing new transportation services with shared autonomous  
16 mobility. SAVs were the most cost-effective mode of transportation for expanding transit  
17 coverage in Minneapolis-St. Paul and Pittsburgh. However, there were instances in Pittsburgh,  
18 New York City, and Chicago where shuttles outperformed SAVs, notably when ridership  
19 demand surpassed SAV capacity limits, required larger SAV fleets. This study eventually  
20 identified the characteristics of transit systems that are most conducive to the integration of  
21 SAVs and shuttles into an existing public transit system.

22

23 **1 MOTIVATION**

24 Emerging mobility solutions aim to shift from a human-driven vehicle ecosystem to a computer-  
25 driven environment through the deployment of on-road autonomous technologies (Litman  
26 2018a). Autonomous vehicles (AVs) have the potential to provide a variety of societal benefits,  
27 including fewer crashes (Anderson et al. 2014; Fagnant and Kockelman 2018; Greenblatt and  
28 Saxena 2015; Harper et al. 2016; Metz and Metz 2018), less congestion (Fagnant and Kockelman  
29 2018; Greenblatt and Saxena 2015; Metz and Metz 2018), reduced vehicle emissions (Fagnant  
30 and Ko (Fagnant and Kockelman 2018). Automobile manufacturers are progressively equipping  
31 their vehicles with partially automated features, while policymakers are developing rules to

1 facilitate the deployment of highly automated vehicles. However, widespread deployment of  
2 privately-owned AVs introduces new hazards, hence creating a barrier to acceptance (Bezai et al.  
3 2020). According to one report, assessing safety through on-road testing might take hundreds of  
4 years to eliminate uncertainties (Kalra 2017). As a result, authorities are attempting to build a  
5 flexible regulatory framework that can accommodate these risks and so support the technology's  
6 successful adoption.

7

8 Until recently, research has focused on privately owned AVs; now, more  
9 studies investigating shared autonomous mobility systems with a variety of use cases are  
10 beginning to surface. SAVs are often used as an umbrella term to describe minivans, low-speed  
11 shuttles, and other light-duty vehicles equipped with automated driving systems that have  
12 different use cases. For example, some studies have assessed SAVs providing service as  
13 robotaxis: light-duty vehicles with 4-6 passenger capacity and equipped with an automated  
14 driving system. Study reports assess the impacts of robotaxis as a replacement for all privately  
15 owned vehicles in a city (Fagnant and Kockelman 2018; Spieser et al. 2014) . Case studies for  
16 this replacement scenario have looked at different cities around the world and found road and  
17 cost efficiencies. These studies help to prove that the positive benefits of AVs are especially  
18 achievable when AVs are shared, but the replacement scenario would require swift and  
19 substantial regulatory and traveler behavior changes which are not realistic. Other studies have  
20 explored the first and last mile use case where SAVs are dropping off or picking up passengers at  
21 their homes and transporting them to nearby transit or rail stations (Gurumurthy et al. 2020; Shan  
22 et al. 2021; Shen et al. 2017). Finally, studies also look at low-speed electric autonomous shuttles  
23 as a shared autonomous mobility solution (Berschet et al. 2017; Coyner et al. 2021; Smart  
24 Columbus 2021; U.S. Department of Transportation 2017). Shuttles operate at lower speeds and  
25 their predictability reduces risks that act as a barrier for private autonomous vehicles. They also  
26 hold a greater number of people than traditional cars (National Center for Transit Research and  
27 Polzin 2016; U.S. Department of Transportation 2017). Some pilot programs for shuttles include  
28 service to the existing public transit system (Smart Columbus 2021; The Swiss Transit Lab 2018)  
29 in the form of first-mile, last-mile transit access. Overall, these studies and pilot programs further  
30 galvanize the positive benefits of shared autonomous mobility solutions over privately owned

1 vehicles but uncertainty in costs and lack of information around equity impacts of AVs hinder  
2 progress towards a regulatory path for widespread deployment.

3  
4 Costs related to operating shared autonomous vehicles are a significant factor in decision-making  
5 regardless of whether the business is managed publicly or privately. Numerous studies have been  
6 conducted too far to assess the operational expenses of automated vehicles and shuttles in a  
7 range of sharing scenarios. Automated taxis (Bauer et al. 2018; Bösch et al. 2018; Fagnant and  
8 Kockelman 2018) and autonomous vehicle ride-sharing (Fulton et al. 2020; Narayanan et al.  
9 2020) were the more prevalent scenarios in the existing literature, with reported costs ranging  
10 from \$0.11/km to \$1.03/km in \$2019. The variance in results could be explained by the fact that  
11 many studies exclude overhead, parking, maintenance, and cleaning from their analyses, hence  
12 exaggerating the benefits of SAVs (Narayanan et al. 2020). Additionally, these findings are  
13 constrained since automated technology is still in development, and so the associated costs vary  
14 over time and between investigations. A substantial body of literature exists on the topic of  
15 integrating shared automated mobility into public transportation. One research that examined  
16 demand-responsive transit using SAVs revealed prices ranging between \$0.19 and \$0.30 per  
17 kilometer (Litman 2018). Another study discovered that employing SAVs for public transit first  
18 and last-mile service costs \$0.39/km (Moorthy et al. 2017). Finally, studies are constrained by  
19 their focus on single cities for case studies. By examining shared automated mobility costs in a  
20 single city at a time, there is potential to misinterpret shared automated mobility capabilities.  
21 Because transit systems in the United States and around the world are so dissimilar, one cannot  
22 assume that the same operational scenarios and operating expenses would apply to a different  
23 system. Additionally, as previously noted, because various studies assessed different components  
24 and distinct scenarios, it is hard to objectively compare one study's findings to another. While  
25 standardizing assessments may not be appropriate at this stage of shared automated mobility  
26 research, examining multiple systems using the same method can aid in understanding what is  
27 achievable with SAVs.

28  
29 Shared automated mobility is still evolving to provide pragmatic data for future transportation  
30 policymaking, but is still wrestling with unknown technology prices, fleet sizing, and vehicle

1 repositioning, among other issues. Prior research on shared autonomous shuttles has not  
2 examined transit demands within a system or the equity implications of the technology.

3

#### 4 1.1 RESEARCH QUESTIONS

5 The purpose of this study is to assess the economic viability of expanding equitable  
6 transportation coverage using shared automated mobility options. We begin by identifying  
7 priority service regions in a transit system using transit gap analysis techniques that integrate  
8 transit coverage and equity analysis. According to the sociodemographic characteristics of a  
9 census block group, priority service regions have both unmet transit requirements and equity  
10 concerns. We then conduct a cost-benefit analysis of operating shared autonomous vehicles and  
11 electric autonomous shuttles as part of a public transit system using the priority service areas. We  
12 explore the following questions:

- 13 1. Can different sized cities and agencies use shared automated mobility to cost-  
14 effectively improve public transit coverage?
- 15
- 16 2. Are there any unique characteristics for cities that are best suited to improve  
17 transit access with SAVs or shared autonomous shuttles?
- 18

## 19 2 DATA SOURCES & METHODS

20 Four cities were chosen for this study to capture different size cities and public transportation  
21 systems in the various geographic regions in the United States. The American Public  
22 Transportation Association public transportation system rankings were used to select the transit  
23 systems. MTA New York City Transit and Chicago Transit Authority were selected as the two  
24 largest transit agencies in the U.S. (American Public Transit Association et al. 2017). The Port  
25 Authority of Allegheny County in Pittsburgh, PA, and MetroTransit in Minneapolis-St. Paul,  
26 MN were selected as public transit agencies that serve smaller metropolitan areas (Port Authority  
27 of Allegheny County 2016). Data from the U.S. Census Bureau and Environmental Protection  
28 Agency (EPA) provided demographic details about the transit-dependent, low-income, and  
29 minority populations in each census block group to determine transit need. The American  
30 Community Survey is a demographic survey program administered by the U.S. Census Bureau

1 that includes population and vehicle ownership data (U.S. Census Bureau 2017).  
2 Sociodemographic data at the CBG level is available through EJSCREEN from the EPA (U.S.  
3 Environmental Protection Agency 2014). Transit stops, routes, and service frequency data from  
4 the standardized General Transit Feed Specification were used to determine the transit supply  
5 score for each census block group. The transit coverage score is determined using the transit  
6 supply score and transit need score revealing current service available to the transit-dependent  
7 population. A subset of census block groups was prioritized for service improvement based on  
8 the lowest transit coverage score and greater than average low-income or minority population.  
9 These priority CBGs are used as origin points for calculating route distances to the nearest bus  
10 stop with adequate transit service, then used as inputs for cost analysis. Finally, we estimate a  
11 range of costs in the form of levelized cost per vehicle kilometer traveled (VKT) and levelized  
12 cost per passenger-kilometer traveled (PKT) for the three modes: shuttles, SAVs, and buses.  
13 Levelized costs for operating each mode in each city are estimated across multiple scenarios to  
14 provide insight into the cost efficiency of different transit planning futures. Due to the  
15 uncertainty of shared autonomous mobility, sensitivity analysis is also performed to account for a  
16 range of AV operating costs and uncover the most important parameters influencing shared  
17 automated mobility operational feasibility.

18

## 19 2.1 Transit Coverage Analysis

20 Transit coverage is a measure using transit supply and transit need in a system as detailed in the  
21 Transit Capacity and Quality of Service Method (TQSM) (Kittelson & Associates, Inc. et al.  
22 2013). Census block group (CBG) level data is used throughout the study because smaller, low-  
23 income, or minoritized communities are overlooked at more aggregate levels of geographic  
24 analysis (U.S. Environmental Protection Agency 2016). Transit need in a census block group is  
25 defined by zero-vehicle ownership data from the American Community Survey which represents  
26 the transit-dependent population in this study. Although the transit-dependent population consists  
27 of many types of riders, zero-vehicle households are a sufficient proxy to capture the population  
28 since certain demographic data is not available for a precise count of the transit-dependent  
29 population in every city. The transit-dependent population density per CBG was determined by  
30 dividing the population value by the net land area, then normalized to ensure a direct comparison  
31 between transit-dependent population and the transit supply found in the next step.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27

Transit supply is then determined using an approach from Jiao et al. and the TQSM observing three service measures in each CBG: the number of transit stops, transit service hourly frequency, and number of routes. Transit riders will typically walk a quarter mile to a transit stop (Federal Highway Administration 2013) thus stops within a quarter-mile or 400 m radius of a CBG were included in the count of transit stops serving the census block group. The transit stop count, service frequency, and transit route count for each CBG were normalized then aggregated into a transit supply score for each CBG. The transit supply was calculated as

$$S_i = \frac{\sum t_i}{a_i} + \frac{\sum r_i}{a_i} + f_i \quad (1)$$

where  $S_i$  is the supply score for any CBG  $i$ ,  $t_i$  is the total number of transit stops,  $a_i$  was the net acreage,  $r_i$  was the total number of routes, and  $f_i$  was the frequency of service or average bus per hour. The supply inputs were not weighted because any configuration of transit supply can satisfy the specific needs of a CBG. Finally, the transit coverage scores for each census block group  $i$  ( $C_i$ ) based on the transit-dependent population was

$$C_i = S_i - P \quad (2)$$

(Jiao and Dillivan 2013; Kittelson & Associates, Inc. et al. 2013). Since transit coverage is a relative measure, CBGs in the bottom 5% of transit coverage scores were considered to have low transit coverage in each city. This threshold systematically captures the most extreme cases of low transit coverage.

Sociodemographic information creates a decision-making framework to prioritize new service to CBGs where improving transit access will also improve transit equity. US EPA's EJSCREEN dataset provides low-income and minority population data at the CBG level. Minority households are defined by the EPA as the percent or number of minority individuals that are non-white, including multiracial individuals, in a census block group (U.S. Department of Transportation 1964). Households are designated as low-income when the household income is less than or equal to twice the federal poverty level (U.S. Environmental Protection Agency

1 2014). When a CBG had greater than average low-income population, greater than average  
2 minority population, or both, it was given an equity designation.

3

## 4 2.2 Cost Analysis of Autonomous Mobility Solutions

5

6 In order to assess the cost-efficiency of each mode we constructed three scenarios to frame the  
7 study:

- 8 1. Bus: The base-case mode adds a transit stop in a priority CBG centroid which is served  
9 by one or many conventional diesel buses connecting a priority CBG to an established  
10 transit stop with service to the central business district. The study assumes a 40-foot bus  
11 with an average bus capacity of 40 passengers.
- 12 2. Shared Autonomous Vehicles (SAVs): The first alternative mode operates as one or a  
13 fleet of autonomous vehicles traveling from the priority CBG to transit stop with service  
14 to the central business district. Sedans and minivans are the standard vehicles used in AV  
15 testing, so this study used four-passenger gasoline SAVs to serve each priority CBG.
- 16 3. Electric Autonomous Shuttles: The second alternative mode uses electric shuttles to serve  
17 priority CBGs with service to the nearest stops with service to the central business  
18 district. Capital and operating costs were used to compute separate estimates of direct  
19 costs for the implementation of a 12-passenger electric autonomous shuttle.

20

21 For each mode, OSRM calculated the distance for service originating in the centroid of a priority  
22 CBG then traveling to the nearest transit stop. The routes represent a fixed service extension into  
23 CBG with unmet transit need. Every priority CBGs underwent cost efficiency analysis for each  
24 transit mode using levelized costs. The following equation represents the calculation of the  
25 levelized costs for each mode

$$26 \quad \text{Levelized Cost per Vehicle Kilometer Traveled} = \frac{\sum c_c + \sum c_o}{d} + c_e \quad (4)$$

27 where  $c_c$  is the total annualized capital cost to acquire the shuttle, SAV, or bus. The summation  
28 for  $c_c$  accounts for the cost of the shuttle and charger for the shuttle mode scenario. Operating  
29 costs or  $c_o$ , comprises of the annual operator wages, fringe benefits, insurance, and annualized



1 maintenance costs. The route annual revenue kilometers were captured in  $d$ , and  $c_e$  was the  
2 energy cost per kilometer for each mode of transportation. Parameter values are shown in Table  
3 2.1 and parameterize for Monte Carlo simulation in Table 2.2. Next, the cost per passenger  
4 kilometer traveled was calculated for each mode using

5

$$6 \quad \text{Levelized Cost per Passenger-Kilometer Traveled} = \frac{c_0 + c_c + d(c_e)}{p} \quad (5)$$

7

8 where  $p$  represents annual passenger-kilometers as detailed in Table 2.1 and Table 2.2. In each  
9 city, we derived the levelized operating costs for SAVs, shuttles, or bus in every priority CBG  
10 and determined the subsequent most cost-efficient mode. CBG-level analysis considers the  
11 ridership demand of an individual CBG and provides a higher resolution of levelized costs to  
12 uncover the most cost-effective routes. CBG mode analysis. Ultimately the results offer insight  
13 into operating shared autonomous mobility integrated with an existing public transit system.

14

15 Table 2.1 details point estimates for operating costs, energy costs, operator pay, and maintenance  
16 costs related to each mode. Annualized costs were calculated using a 6% discount rate from the  
17 state of Pennsylvania Department of Transportation bond rate (Port Authority of Allegheny  
18 County 2016), and an estimated ten years of use based on the average ten years of use for transit  
19 vehicles (Hughes-Cromwick et al. 2017). Capital purchase costs of electric autonomous shuttles  
20 (Local Motors 2018), gasoline SAVs (Chen et al. 2016), and conventional diesel buses (Colorado  
21 Department of Transportation 2018) were annualized. The annualized cost of wireless electric  
22 chargers for autonomous shuttle charging were also included (Nicholas 2019; Sierra Club 2016).  
23 Operator wages for bus are based on the national average city bus driver hourly wage (U.S.  
24 Bureau of Labor Statistics 2018) and fringe benefits are calculated as 31.4% of compensation  
25 according to the U.S. Bureau of Labor Statistics (U.S. Bureau of Labor Statistics 2019). While  
26 autonomous vehicles are expected to operate without a driver in the future, public or shared  
27 service may still include personnel for safety or to help differently abled riders. Alternatively,  
28 autonomous mobility operators may hire remote operators to monitor trips. Thus, operators will

1 pay some sort of wages and fringe benefits; Wadud et al, estimated autonomous mobility will  
 2 result in a 60% reduction in operator pay and wages (Wadud 2017). The estimated savings in  
 3 wages and benefits are captured in Table 2.1 for both SAESs and SAVs.

4

5 Table 2.1: Point estimate inputs for calculating \$/VKT and \$/PKT by transit mode. All values are \$2019  
 6 and used for transit standard cost analysis and CBG-level cost analysis.

| Parameters                            | Mode of Transit |        |         | Reference   |
|---------------------------------------|-----------------|--------|---------|---|
|                                       | Shuttle         | SAV    | Bus     |   |
| Operator Wages (\$/hour)              | 11.10           | 11.10  | 27.76   | (Hughes-Cromwick 2019; Wadud 2017)  |
| Fringe Benefits (\$/hour)             | 3.36            | 3.36   | 8.41    | (Hughes-Cromwick 2019; Wadud 2017)  |
| Insurance (\$/km)                     | 0.10            | 0.20   | 0.18    | (Port Authority of Allegheny County 2016; American Auto Association 2017; American Public Transit Association 2020) |
| Maintenance Cost (\$/km)              | 0.39            | 0.32   | 0.89    | (Fagnant and Kockelman 2015; Sierra Club 2016)  |
| Acquisition (Capital Costs (\$))      | 238,095         | 70,000 | 300,000 | (Chen et al. 2016; Colorado Department of Transportation 2018; Local Motors 2018)                                   |
| Annualized Acquisition Cost (\$/year) | 32,349          | 10,130 | 43,417  | (Hughes-Cromwick et al. 2017; Port Authority of Allegheny County 2016)  |
| Annualized Charger Acquisition Cost   | 24,796          | --     | --      | (Nicholas 2019; Sierra Club 2016)   |

7

8 Energy costs for each mode found in Table 2.1 are based on 2019 data from the Energy  
 9 Information Administration (EIA) (U.S. Energy Information Administration 2019). The EIA  
 10 reported average diesel costs at \$0.56/liter in 2019, so the median diesel price per kilometer was

1 derived from a 1.69 km/L fuel efficiency for diesel buses (U.S. Department of Energy 2018). We  
2 used a gasoline fuel efficiency of 14.87 kilometers per liter (km/L) and a national average of  
3 \$0.59 per liter for SAVs. Operator hourly pay for the conventional diesel bus was determined by  
4 the annual salary and revenue hours for operators reported by the APTA wage rate database  
5 (Hughes-Cromwick 2019) as shown in Table 2.1. Operator hourly pay is reduced by 60% for  
6 electric autonomous shuttles and SAVs to account for the potential operating cost savings  
7 (Wadud 2017). Insurance costs per mile for electric autonomous shuttles and SAVs were drawn  
8 from operation expenses outlined by the APTA (Hughes-Cromwick et al. 2017). Liability and  
9 casualty costs are 2% of operating expenses which was used to derive the insurance cost per  
10 kilometer for shuttles (similar to demand response costs) and buses (Port Authority of Allegheny  
11 County 2016). This value was used to determine the insurance cost per kilometer for electric  
12 autonomous shuttles, as they would be categorized as a form of shared-ride transit service.  
13 Insurance costs for all three modes can be found in Table 2.1 as well as maintenance costs. AAA  
14 reported insurance costs of \$0.20/km for vehicles that were used for SAVs. Maintenance costs  
15 for electric autonomous shuttles came from a report by the Sierra Club (Sierra Club 2016) and  
16 the SAV maintenance cost per kilometer was estimated in a study by Fagnant and Kockelman  
17 (Chen et al. 2016).

18

### 19 2.3 Monte Carlo Simulation and Sensitivity Analysis

20

21 We address the uncertainty of costs with Monte Carlo Simulation. The simulation model  
22 parameterized the values in Table 2.1, which can be seen in Table 2.2. Triangular distributions of  
23 annual distance represent the range of annual revenue kilometers to serve one CBG in a city.  
24 Like annual distance, annual passenger-kilometers represents the range of passenger-kilometers  
25 traveled yearly to and from the CBG. Annual distance and passenger-kilometers values in Table  
26 2.2 have best and west case scenarios for annual distances, passengers, and operating costs.  
27 When there is a greater annual distance, annual passenger-km, capital costs, and energy costs  
28 drive down costs, resulting in a best-case scenario for analysis. Conversely, lower annual  
29 passenger-km, annual distance, and operating hours are included in the pessimistic scenario  
30 because it would increase \$/VKT and \$/PKT. Base values for capital and energy costs come

1 from the point estimates detailed in Table 2.1. Sensitivity analysis was performed using Sobol’s  
 2 sequence in the SALib Python package to estimate the main and total effects for each parameter.

3

4 Table 2.2: Monte Carlo Simulation Parameters Pittsburgh, PA used as an example.

| Parameters                               | Probability Distribution | Pessimistic | Base    | Optimistic |
|--|--------------------------|-------------|---------|------------|
| Annual Distance                          | Uniform                  | 18,000      | 71,000  | 111,000    |
| Annual Passenger-KM                      | Triangular               | 131,000     | 160,000 | 317,000    |
| Annual operating hours                   | Uniform                  | 1,700       | 3,000   | 5,000      |
| Electric Charger (\$/year)               | Triangular               | 40,000      | 14,000  | 9,5000     |
| Bus Fuel Costs-Diesel (\$/kilometer)     | Triangular               | 0.35        | 0.33    | 0.3        |
| SAV Fuel Costs-Gasoline (\$/kilometer)   | Triangular               | 0.1         | 0.07    | 0.05       |
| Shuttle Electricity costs (\$/kilometer) | Triangular               | 0.07        | 0.05    | 0.02       |
| Shuttle Capital Cost (\$/year)           | Triangular               | 39,000      | 32,000  | 26,000     |
| SAV Capital Cost (\$/year)               | Triangular               | 12,000      | 10,000  | 8,000      |
| Bus Capital Cost (\$/year)               | Triangular               | 52,000      | 43,000  | 35,000     |

5

## 6 2.4 Multi-City Comparison

7 To better understand the conditions favorable for integrating shared automated mobility with  
 8 public transit, we looked at factors that lead to operability. Transit supply and sociodemographic  
 9 data for each city’s lowest transit coverage CBGs were compiled then compared patterns in  
 10 service amongst priority CBGs that determined candidacy for new service. Transit dependent  
 11 individuals who are also low income and minority provides insight into the US transit dependent  
 12 population and strengthen the case for improving service by prioritizing equity. Cost-efficiency  
 13 analysis in each city more accurately captures the range of operating costs for shared  
 14 autonomous modes. By comparing mean levelized costs in each city we can identify a variety of  
 15 scenarios where SAVs or shuttles can operate at lower costs than buses and vice versa.  
 16 Sensitivity analyses tell us what parameters are most important in each city. We look at the  
 17 results in each city to determine the most important parameter for all the or for certain subsets of  
 18 transit systems.

## 19 3 RESULTS AND DISCUSSION

### 20 3.1 New York City, NY

21

1 Combining transit coverage and transit equity analysis uncovers areas in a system with critical  
2 unmet transit need. Figure 3.1 highlights the low-income or minority population by CBG as  
3 defined by the EPA in purple for New York City. The minority population represents 63% of any  
4 CBG on average, however, the percentage increased to 82% for CBGs with the lowest transit

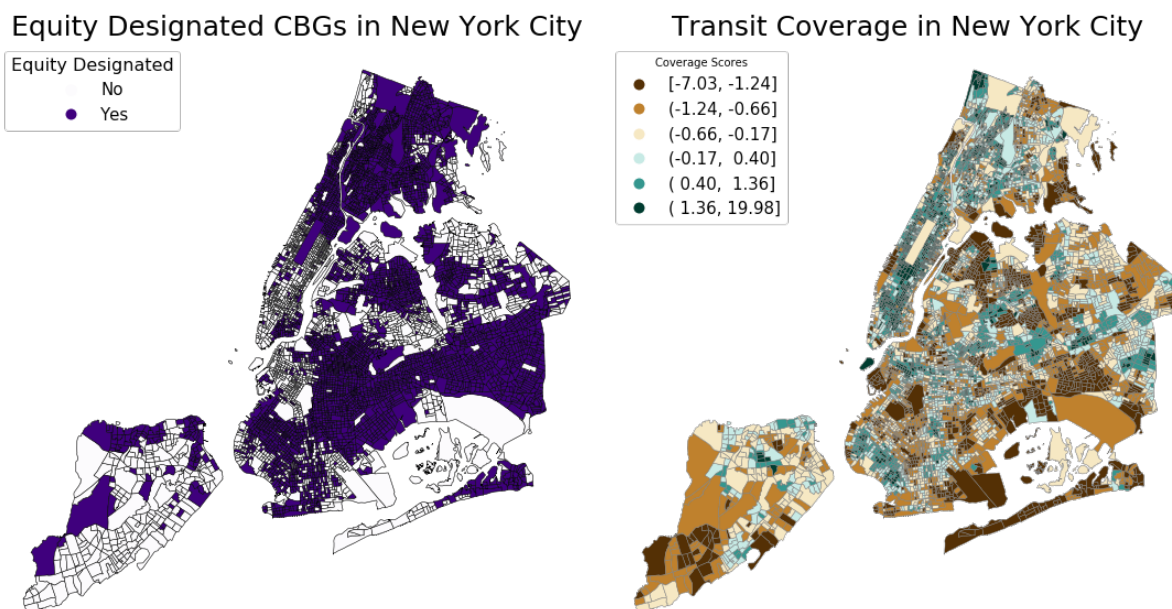


Figure 3.1: MTA New York City Transit Authority transportation system. Maps from left to right: (left) Equity designated census block groups in the city show the census block groups that have a greater than average low-income and/or minoritized population. (right) Shows the transit coverage scores in the MTA New York City system. The darker brown color represents census block groups with lower transit coverage scores with darker turquoise represents higher transit coverage scores.

5 coverage score. The low-income population also increased in CBGs with low transit coverage.  
6 On average, the low-income population accounts for 37% of the total population in any New  
7 York City CBG and increased to 49% for low transit coverage CBGs. In New York City, 205  
8 census block groups were prioritized in this study for new transit service. Most priority census  
9 block groups did provide some service although inadequate when compared to the rest of the  
10 system. Priority census block groups in New York City had the most access to transit of all the  
11 cities. Riders in priority census block groups could access 4 transit stops that connected to 7  
12 routes with service approximately every 15 minutes. In contrast, service in higher transit  
13 coverage CBGs had a markedly different experience; on average, high transit coverage CBGs  
14 have access to 30 stops with service every 8 minutes that connects riders to 11 routes. Level of

1 service metrics in New York City, even in low transit coverage census block groups may be  
2 perceived as adequate in another system. However, 52% of the city's population live in zero car  
3 households, a larger proportion than the other cities. Thus, lack of service considerably limits  
4 individuals in low transit coverage CBGs from job, education, and social opportunities and  
5 diminishes transit equity in New York City.

6

7 Adding service in NYC exposed the higher limits of shared autonomous mobility operability.  
8 Transit dependent and choice riders in priority CBGs would experience more transit access with  
9 the addition of the transit stop to provide service to and from the priority CBG and a nearby  
10 transit stop. Updated metrics for each CBG on average showed access to 4 additional stops with  
11 service frequency approximately every 6 minutes, an access to one additional route. Transit  
12 coverage increased an average of 13% across all the priority CBGs. More specifically, thirteen of  
13 the 205 priority CBGs were identified as locations where 1, 2 or 4 shuttle fleets could provide  
14 cost-efficient service. Shuttles could travel route distances between 0.58 and 5.27 km, for a range  
15 of 35,000 to 133,000 annual revenue kilometers. Annual ridership ranged from 30,000 to 1.26  
16 million passengers which suggests that shared, autonomous shuttles can handle high passenger  
17 densities in urban cities. Levelized costs for shuttles ranged from \$1.63/VKT to \$1.90/VKT, and  
18 levelized cost per passenger kilometer traveled was much lower at \$0.22/PKT on average but  
19 could cost as low as \$0.02/PKT and up to \$0.67/PKT. Total annual operating cost for shuttle  
20 service per CBG served was \$409,000 with transit coverage increasing by 24% in these CBGs,  
21 which is greater than the average transit coverage improvement seen by all the priority CBGs.  
22 We will later compare New York City and other cities to see if the same characteristics hold  
23 when assessing operational cost efficiency in smaller transit systems.

24

25 For the New York City transit system, the bus had the lowest average VKT, and 192 of the 205  
26 priority CBGs were found to be served by a bus in the most cost-efficient manner. Bus levelized  
27 costs were found to be \$0.17/PKT and \$3.04/VKT on average. Cost per passenger kilometer  
28 traveled resulted in a range from \$0.03/PKT to \$0.35/PKT while cost per vehicle kilometer  
29 traveled ranged from \$2.89/VKT to \$3.26/VKT. Buses can handle a wider range of annual  
30 distances as CBGs service needs as this study found bus service for annual distances between

1 87,000 and 134,000 km. The annual passenger demand capacity is larger than both SAVs and  
2 shuttle with the ability to serve 290,000 to 1.26 million passengers annually. Some of the CBGs  
3 may benefit from a more complete service addition because bus fleets ranged from 1 to 5 buses.  
4 CBGs with bus service reported an average of 13% improvement in transit coverage at lower  
5 costs than the other modes and \$622,000 to operate annually. The buses are best for high  
6 passenger demand that would result in larger SAV and shuttle fleet sizes for the same service.

7  
8 Surprisingly, SAVs were not cost-efficient providing insight into condition constraints for SAV  
9 service. Levelized cost per vehicle kilometer traveled for SAVs had an average of \$1.20/VKT,  
10 with a range from \$1.14/VKT to \$1.28/VKT. The mean levelized cost per passenger kilometer  
11 traveled was \$0.07/PKT with a range from \$0.01/PKT to \$0.46/PKT per passenger kilometer  
12 traveled. SAV fleet size was high with 4 SAVs per CBGs on average and up to a 17-vehicle fleet  
13 to serve one CBG. With such a large fleet, the savings from lower capital costs are lost as well as  
14 the associated cost inefficiency.

15

### 16 3.2 Chicago, IL

17

18 In Chicago, 118 census block groups were the final candidates prioritized for analysis. When  
19 comparing our prioritized census block group to the average CBGs in Chicago, there are  
20 differences in sociodemographic composition as well as public transit level of service as shown  
21 in Figure 3.2: (left) Map of transit coverage by CBG in Chicago, IL. Transit coverage combines transit  
22 need and transit supply scores to identify census block groups with low transit coverage. The lower and  
23 upper values in the legend represent the range of transit coverage scores in each quantile. Darker colors  
24 show extremes with dark blue indicating more than sufficient coverage to match demand, and dark  
25 brown is the lowest transit coverage signifying insufficient transit access for the transit-dependent  
26 population. (right) Map of low income or minority population by census block in purple.. The low-  
27 income population in the average Chicago census block group was found to be 37% and the  
28 minority population was reported to be approximately 57%. However, in our priority CBGs the  
29 low-income population and minority population increases to 51% and 79% respectively. An  
30 average census block group had service every ten minutes by 4 routes that could be accessed

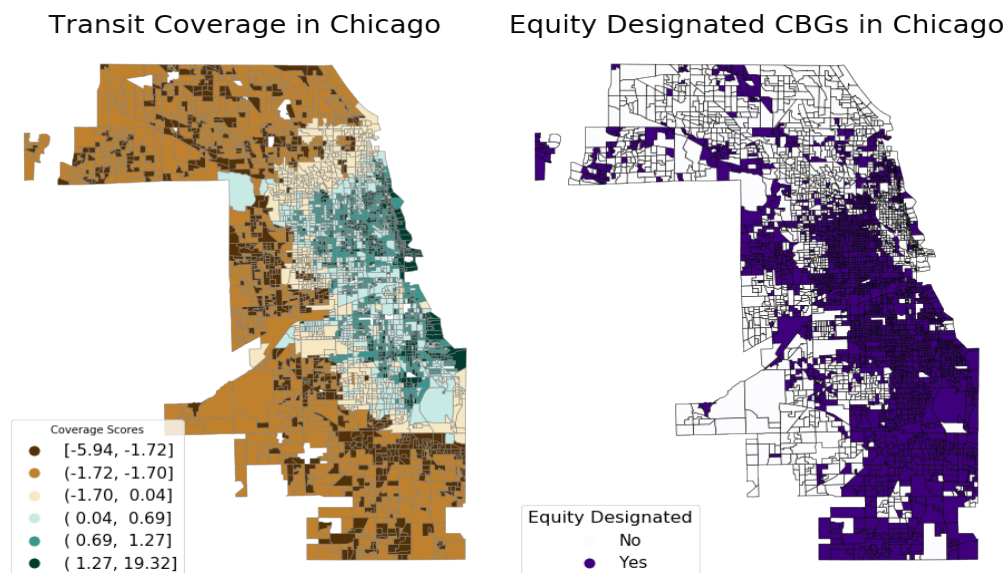


Figure 3.2: (left) Map of transit coverage by CBG in Chicago, IL. Transit coverage combines transit need and transit supply scores to identify census block groups with low transit coverage. The lower and upper values in the legend represent the range of transit coverage scores in each quantile. Darker colors show extremes with dark blue indicating more than sufficient coverage to match demand, and dark brown is the lowest transit coverage signifying insufficient transit access for the transit-dependent population. (right) Map of low income or minority population by census block in purple.

1 from one of 43 stops in or within a quarter-mile walking distance of that CBG. Public transit  
 2 service in the priority CBGs was mostly non-existent; most did not have a transit stop within a  
 3 quarter mile radius of the CBGs, thus no route service nor service frequency.

4

5 New transit service to the priority CBGs via shared automated mobility could address latent  
 6 demand for the nearly 30,000 transit-dependent riders residing in these neighborhoods. Transit  
 7 coverage was mostly non-existent in the final 118 priority CBGs; results from adding one stop  
 8 showed an improvement in coverage up to 60%. Transit dependent riders in priority CBGs now  
 9 have access to stops in nearby CBGs with as many as 40 stops, with pick and drop off at the  
 10 priority CBG at least every 30 minutes. Route distance ranged from 1.8 km to 12.4 km one-way,  
 11 for 186,000 to 238,000 passengers per year per CBG. When comparing each mode for cost-  
 12 efficiency, levelized costs for SAV were surprisingly the highest on average. SAVs operating in  
 13 Chicago CBGs had a mean levelized cost of \$1.25/VKT and \$0.07/PKT. On average, one CBG  
 14 in Chicago needed 10 SAVs to provide adequate service, which contributes to the higher



1 operating cost. Thus, SAVs are economically inefficient to improve transit coverage and equity  
2 in Chicago. However, in two of the 118 CBGs shuttles could provide service at a lower cost than  
3 buses and SAVs. The levelized operating costs for the most cost-efficient shuttle service were  
4 \$1.63/VKT and \$0.38/PKT on average. The route distances were on the lower end with shuttle  
5 traveling 2.6 and 6.6 km for an annual distance of 114,000 and 140,00 km. CBGs served by  
6 shuttles had a passenger demand reported as 43,000 and 149,000 riders, equivalent to 573,000  
7 and 770,000 passenger kilometers. Transit coverage improved by 24% with the electric,  
8 autonomous shuttle fleet in each CBG for an average total operating cost around \$248,000  
9 annually. Analyses for additional service to the priority CBGs provide insight into mode cost  
10 efficiency and suitability in large, metropolitans like Chicago.

11

### 12 3.3 Pittsburgh, PA

13

14 Approximately 78% of the transit-dependent population overlaps with the priority CBGs  
15 accounting for over 120,000 transit-dependent riders who are also low-income or minority  
16 households. CBGs with low-transit coverage and shown in Figure 3.3 had higher percentages of  
17 low-income and minority populations when compared to the county average. Minority  
18 populations in low-transit coverage CBGs averaged 46% while the county average was only 23  
19 percent. Fifty-five percent of low-transit coverage CBGs were also low-income, while the county  
20 average is 32 percent.

21

22 Table 3.1 shows the levelized cost per kilometer traveled (\$/VKT), levelized cost per passenger-  
23 kilometer (\$/PKT) traveled, and total costs for all modes in each city. In four of the five priority  
24 CBGs analysis reported SAVs as the most cost-efficient mode to improve transit coverage in  
25 Allegheny County, PA. The model estimated 1 or 2 SAVs could provide adequate first and last  
26 mile service to each CBG. Route distances were higher than the large metropolitan cities: the  
27 SAV would travel between and 4.3 and 7 km each way. Annual passenger load ranged from  
28 6,500 to 16,000 riders traveling up to 195,000 revenue kilometers per year. Operating an SAV  
29 under these conditions costs between from \$1.12 to \$1.82 per VKT and \$0.30 to \$2.25 per PKT.  
30 Total annual operating costs for each CBG were \$125,000 on average.

1

2 One CBG was better suited for shuttle service in the Pittsburgh and surrounding region. One  
3 shuttle best served the 5.2 km route in the system equal to 36,000 km per year to and from this  
4 CBG. Approximately 30,000 passengers could be served annually from this added service. The  
5 shuttle service cost \$2.63/VKT and \$0.36/PKT. The transit coverage improved by 40% for total  
6 annual operating cost of \$114,000.

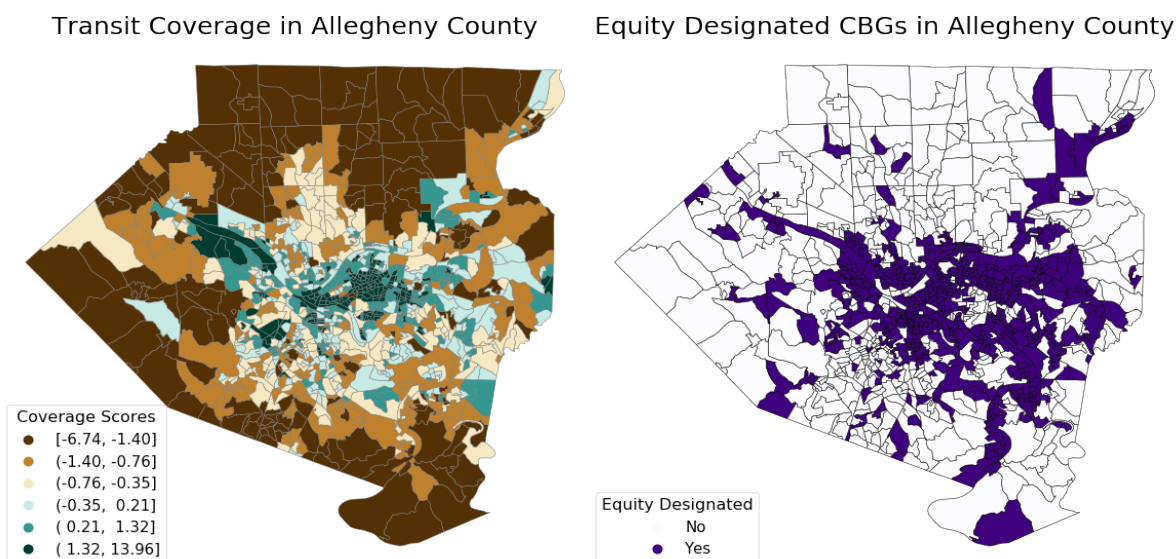



Figure 3.3: (*left*) Map of transit coverage by CBG in Pittsburgh, PA. Transit coverage combines transit need and transit supply scores to identify census block groups with low transit coverage. The lower and upper values in the legend represent the range of transit coverage scores in each quantile. Darker colors show extremes with dark blue indicating more than sufficient coverage to match demand, and dark brown is the lowest transit coverage signifying insufficient transit access for the transit-dependent population. (*right*) Map of low income or minority population by census block in purple.

7 3.4 Minneapolis And St. Paul, MN

8

1 Minneapolis-St. Paul metropolitan transit system analysis starts by examining the  
2 sociodemographic profile. MetroTransit is the public transit system that serves the Minneapolis-  
3 St. Paul with 125 routes and 12,633 transit stops for buses, light rail, and commuter trains. Figure  
4 3.4: (left) Map of transit coverage by CBG in Minneapolis-St Paul, MN. The lower and upper values in the  
5 legend represent the range of transit coverage scores in each quantile. Darker colors show extremes  
6 with dark blue indicating more than sufficient coverage to match demand, and dark brown is the lowest  
7 transit coverage. (right) Map of low income or minority population by census block in purple. Low-  
8 income, minority census blocks are defined as having a larger percentage of minority residents than the  
9 city average. shows a map of transit coverage by CBG in Minneapolis-St Paul, MN. Census block  
10 groups that are shades of blue represent sufficient transit coverage to demand and dark brown  
11 represents CBGs with the lowest transit coverage. The lowest transit coverage scores ranged  
12 from signifying insufficient transit access for the transit-dependent population. Our CBG

Transit Coverage in Minneapolis-St. Paul Metro

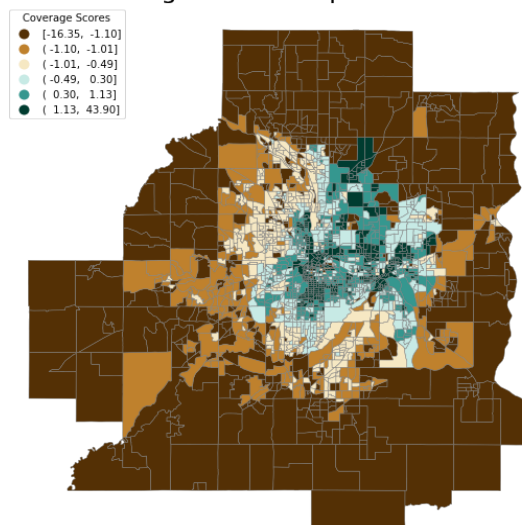

Equity Designated CBGs in Minneapolis-St. Paul Metro

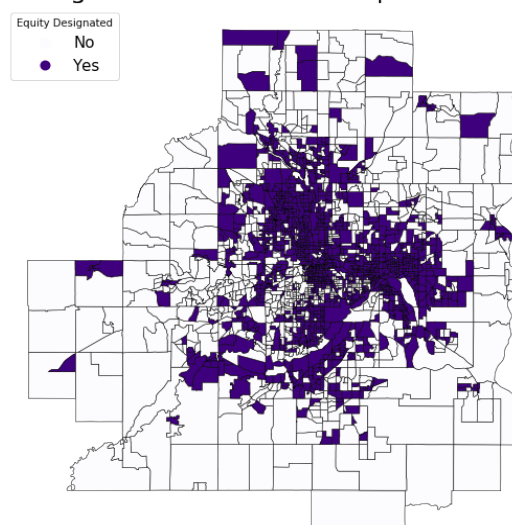


Figure 3.4: (left) Map of transit coverage by CBG in Minneapolis-St Paul, MN. The lower and upper values in the legend represent the range of transit coverage scores in each quantile. Darker colors show extremes with dark blue indicating more than sufficient coverage to match demand, and dark brown is the lowest transit coverage. (right) Map of low income or minority population by census block in purple. Low-income, minority census blocks are defined as having a larger percentage of minority residents than the city average.

13 analysis found that the transit-dependent population accounts for 12% of the total population.  
14 Seventy-eight percent of the transit-dependent population were also identified as low-income or  
15 minority households. The proportion of lower-income and minority populations in equity  
16 designated CBGs was higher than the county average as shown in Figure 3.4: (left) Map of transit

1 coverage by CBG in Minneapolis-St Paul, MN. The lower and upper values in the legend represent the  
2 range of transit coverage scores in each quantile. Darker colors show extremes with dark blue indicating  
3 more than sufficient coverage to match demand, and dark brown is the lowest transit coverage. (right)  
4 Map of low income or minority population by census block in purple. Low-income, minority census  
5 blocks are defined as having a larger percentage of minority residents than the city average..  
6 Minneapolis-St. Paul, like the other cities, also had higher than average low-income and minority  
7 populations in the census block groups with the lowest transit coverage scores.

8

9

10 Assessing cost-efficiency along with sensitivity analysis in Minneapolis-St. Paul provided more  
11 insight into SAVs operability when integrated with public transit. The mean levelized costs per  
12 vehicle kilometer traveled for shuttles, SAVs, and buses were \$1.99/VKT, \$1.26/VKT, and  
13 \$3.28/VKT, respectively. Levelized cost per passenger-kilometer traveled had a mean value of  
14 \$2.11/PKT, \$1.35/PKT, and \$3.50/PKT for shuttles, SAVs, and buses, respectively. Unlike the  
15 other cities, all eight priority CBGs in Minneapolis-St. Paul were best served by SAVs in terms  
16 of cost-efficiency. Service to the transit system did not require a fleet, one SAV was capable of  
17 traveling a route distance between 1.65 km and 7.5 km in the Minneapolis St Paul transit system,  
18 equal to 67,000-91,000 km traveled annually. The passenger capacity ranged from 8,600 to  
19 21,000 passengers annually for up to 204,000 passenger-km traveled annually. CBGs transit  
20 coverage increased up to 43% for no more than \$195,000 per census block group to operate  
21 annually.

22

### 23 3.5 Comparative Analysis

24

25 One goal of a multi-city analysis is to identify the prevalent characteristics that make  
26 autonomous vehicles and shuttles feasible in public transportation systems of varying sizes.  
27 Examining levelized operating costs and the subsequent sensitivity analysis between each city  
28 revealed transit system conditions favorable for first and last-mile service via shared automated  
29 mobility. The analysis starts with examining sociodemographic data because it offers a  
30 compelling argument regarding equity for additional service. Table 3.1 shows that over 70% of

1 the transit-dependent population in each city lives in CBGs with high proportions of low-income,  
 2 minority populations, and low transit coverage. Our findings suggest that many transit-dependent  
 3 riders are also low-income, minority, or both. Regarding transit coverage, Minneapolis-St. Paul,  
 4 Pittsburgh, and Chicago follow similar spatial patterns where transit coverage is highest in the  
 5 center of the city and decreases once beyond city boundaries (see Figure 3.3: *(left)* Map of transit  
 6 coverage by CBG in Pittsburgh, PA. Transit coverage combines transit need and transit supply scores to  
 7 identify census block groups with low transit coverage. The lower and upper values in the legend  
 8 represent the range of transit coverage scores in each quantile. Darker colors show extremes with dark  
 9 blue indicating more than sufficient coverage to match demand, and dark brown is the lowest transit  
 10 coverage signifying insufficient transit access for the transit-dependent population. *(right)* Map of low  
 11 income or minority population by census block in purple. and Figure 3.4: *(left)* Map of transit coverage  
 12 by CBG in Minneapolis-St Paul, MN. The lower and upper values in the legend represent the range of  
 13 transit coverage scores in each quantile. Darker colors show extremes with dark blue indicating more  
 14 than sufficient coverage to match demand, and dark brown is the lowest transit coverage. *(right)* Map of  
 15 low income or minority population by census block in purple. Low-income, minority census blocks are  
 16 defined as having a larger percentage of minority residents than the city average.). New York City  
 17 similarly has high transit coverage in the Manhattan borough which contains the central business  
 18 district, but high transit coverage continues into most boroughs and low transit coverage was  
 19 observed in small clusters and around county line boundaries. Once we identified the priority  
 20 CBGs eligible for new service, census block groups in Minneapolis-St. Paul and New York City  
 21 were mostly clustered in certain parts of the city whereas Pittsburgh census block groups were  
 22 spread out. As discussed in the data and methods section, sociodemographic data were used to  
 23 determine transit demand with an emphasis on improving equity. The differences in the spatial  
 24 distribution of transit demand imply that in some systems one fleet could potentially serve the  
 25 cluster instead of assigning one transit vehicle to a priority CBG as done in this study.  
 26 Additionally, when transit demand is scattered and cannot be serviced with one fleet, costs are  
 27 still lower than conventional transit service modes.

28

29 Table 3.1: Summary data for comparative analysis.

| City | New York City | Chicago | Minneapolis - St. Paul | Pittsburgh |
|------|---------------|---------|------------------------|------------|
|------|---------------|---------|------------------------|------------|

|   |             |             |           |           |
|---|-------------|-------------|-----------|-----------|
| Transit Dependent Population                  | 4,390,000   | 795,000     | 218,000   | 157,000   |
| Percent of Total Population Transit Dependent | 52%         | 15%         | 7%        | 12%       |
| Average CBG Low-Income Population             | 37%         | 37%         | 28%       | 32%       |
| Average Priority CBG Low-Income Population    | 49%         | 51%         | 38%       | 46%       |
| Average CBG Minority Population               | 63%         | 57%         | 17%       | 23%       |
| Average Priority CBG Minority Population      | 82%         | 79%         | 25%       | 36%       |
| <hr/>   |             |             |           |           |
| <i>Shuttle</i>                                |             |             |           |           |
| Mean Levelized Cost per VKT                   | \$1.73      | \$1.83      | \$1.99    | \$2.45    |
| Mean Levelized Cost per PKT                   | \$0.11      | \$0.10      | \$2.11    | \$1.39    |
| Mean Total Cost per CBG                       | \$1,050,000 | \$869,000   | \$179,000 | \$168,000 |
| <i>SAV</i>                                    |             |             |           |           |
| Mean Levelized Cost per VKT                   | \$1.20      | \$1.25      | \$1.26    | \$1.35    |
| Mean Levelized Cost per PKT                   | \$0.08      | \$0.07      | \$1.35    | \$0.88    |
| Mean Total Cost per CBG                       | \$1,934,000 | \$1,563,000 | \$125,000 | \$135,778 |
| <i>Bus</i>                                    |             |             |           |           |
| Mean Levelized Cost per VKT                   | \$3.04      | \$3.18      | \$3.28    | \$3.62    |
| Mean Levelized Cost per PKT                   | \$0.20      | \$0.18      | \$3.50    | \$2.29    |
| Mean Total Cost per CBG                       | \$612,000   | \$495,940   | \$295,000 | \$271,000 |
| <hr/>   |             |             |           |           |
| Cost-Efficient Shared Autonomous Mode         | Shuttle     | Shuttle     | SAV       | SAV       |
| Total System Transit Coverage Improvement     | 13%         | 24%         | 18%       | 315%      |
| <hr/>   |             |             |           |           |

1

2 Next, we compared levelized costs and used sensitivity analysis to make inferences about the  
 3 factors that influence the operability SAVs and shuttles in different transit scenarios. Overall,  
 4 findings from our sensitivity analysis suggest annual revenue kilometers, annual passenger-

1 kilometers traveled, and fleet size are the most influential parameters when SAVs or shuttles are  
2 integrated into a transit system. We look at these results to explore the service conditions that are  
3 best for shuttles and SAVs. Figure 3.5: Four graphs depicting aggregate ranges for service domains of  
4 shared automated mobility. Together, the figures highlight the feasibility for shuttles and SAVs to  
5 address a transit needs where adding buses are an inefficient use of resources. (a) Graph showcasing the  
6 range of route distances served by each mode. (b) Graph showing the service range in revenue  
7 kilometers traveled (VKT in this study) for each mode. (c) Annual passengers served by each mode. (d)  
8 Service range in terms of annual passenger kilometers traveled (PKT in this study) for each mode.  
9 illustrates the service ranges aggregated for each mode.

10

11 In Figure 3.5: Four graphs depicting aggregate ranges for service domains of shared automated  
12 mobility. Together, the figures highlight the feasibility for shuttles and SAVs to address a transit needs  
13 where adding buses are an inefficient use of resources. (a) Graph showcasing the range of route  
14 distances served by each mode. (b) Graph showing the service range in revenue kilometers traveled  
15 (VKT in this study) for each mode. (c) Annual passengers served by each mode. (d) Service range in terms  
16 of annual passenger kilometers traveled (PKT in this study) for each mode., we see that SAVs are best  
17 suited for the lower end of transit demand. When annual ridership is less below 21,000  
18 passengers and the annual distance is less than 130,000 km SAVS remain cost efficient. This  
19 corroborates with our previous findings detailed in the Pittsburgh and Minneapolis analysis  
20 where priority census block groups were lower density in comparison to the density in Chicago  
21 and New York. Further, SAVs were only cost efficient when 1 or 2 vehicle fleets could serve one  
22 CBG. Interestingly, SAVS were not suitable for lower route distances, where shuttles and buses  
23 could still provide service as shown in Figure 3.5: Four graphs depicting aggregate ranges for service  
24 domains of shared automated mobility. Together, the figures highlight the feasibility for shuttles and  
25 SAVs to address a transit needs where adding buses are an inefficient use of resources. (a) Graph  
26 showcasing the range of route distances served by each mode. (b) Graph showing the service range in  
27 revenue kilometers traveled (VKT in this study) for each mode. (c) Annual passengers served by each  
28 mode. (d) Service range in terms of annual passenger kilometers traveled (PKT in this study) for each  
29 mode.a. The results suggest that SAVs are the most cost-efficient mode to improve transit  
30 coverage and equity for lower density areas with unmet demand. Shuttles, however, travel up to  
31 1.26 million passenger kilometers and still outcompete buses in certain census block gups as

1 shown in Figure 3.5: Four graphs depicting aggregate ranges for service domains of shared automated  
2 mobility. Together, the figures highlight the feasibility for shuttles and SAVs to address a transit needs  
3 where adding buses are an inefficient use of resources. (a) Graph showcasing the range of route  
4 distances served by each mode. (b) Graph showing the service range in revenue kilometers traveled  
5 (VKT in this study) for each mode. (c) Annual passengers served by each mode. (d) Service range in terms  
6 of annual passenger kilometers traveled (PKT in this study) for each mode.d. This may be influenced  
7 by fleet size; shuttles could operate in one, two, or four shuttle fleets and remain cost-efficient  
8 thus carrying more passengers at a lower cost than one bus. Overall shuttles in our comparative  
9 analysis proved as an intermediate step, provide coverage where SAVs did not provide enough  
10 service and demand was too low for buses.

11

12 Finally, shared automated mobility was not appropriate in every situation. While SAVs and  
13 shuttles were more cost efficient than buses in Minneapolis-St. Paul and Pittsburgh, for many  
14 priority CBGS in NYC and Chicago, buses were still the most cost-efficient. Our analysis  
15 supports studies that caution against replacing all public transportation with robotaxis. There are



- 1 certain conditions where it is still most cost-efficient to add transit access with more
- 2 conventional modes like bus. However, this study shows that shared automated mobility
- 3 provides a cost-effective alternative to connect neighborhoods to existing transportation services.

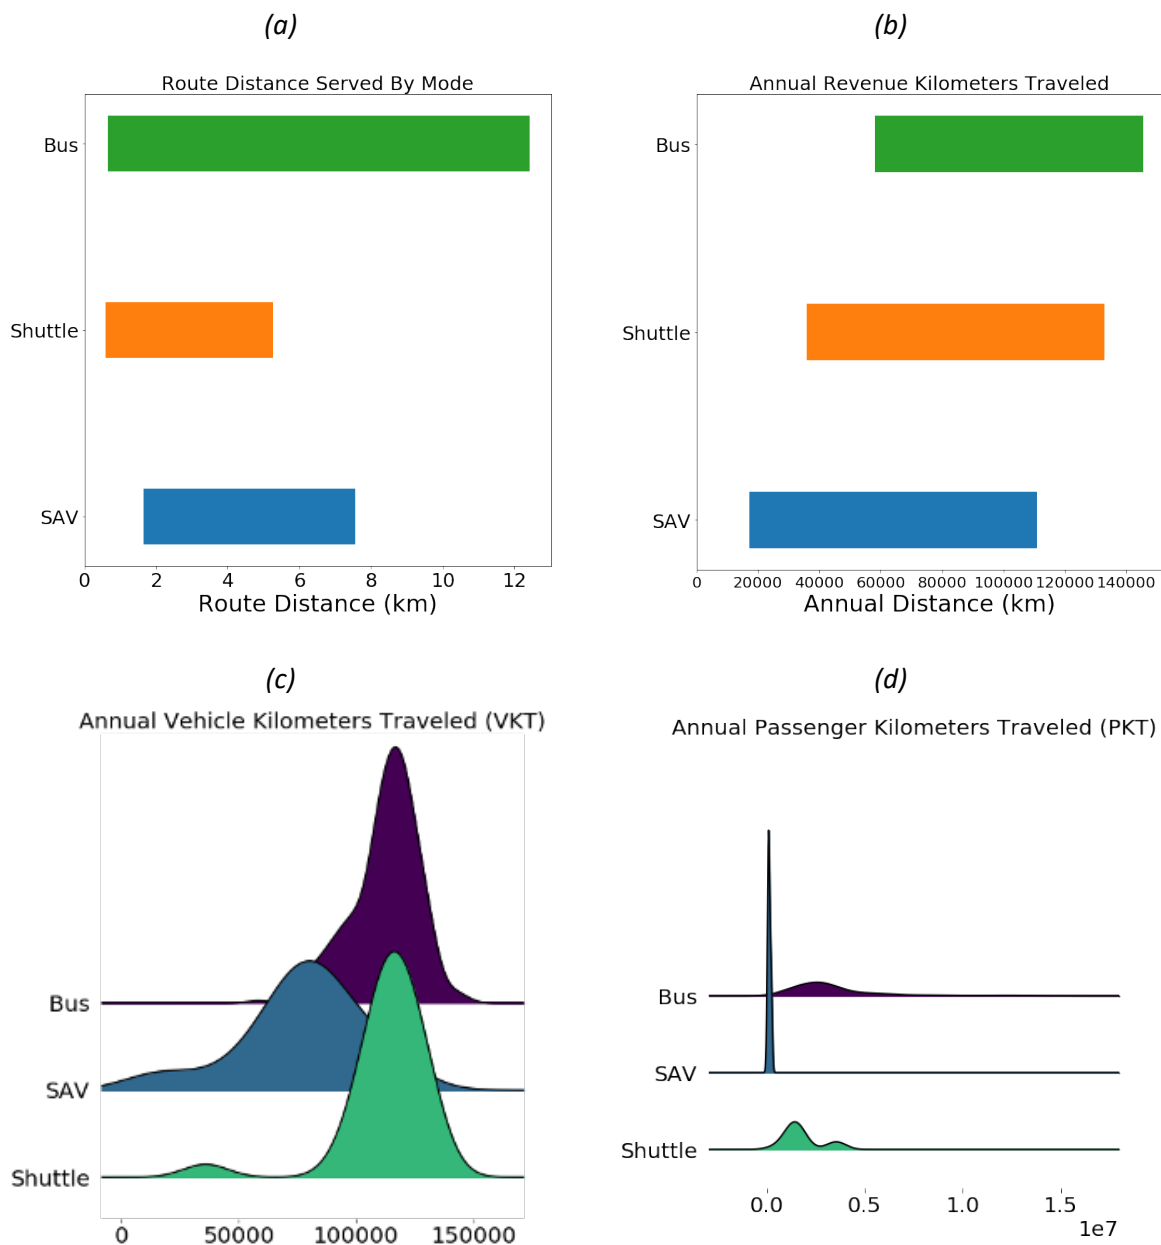


Figure 3.5: Four graphs depicting aggregate ranges for service domains of shared automated mobility. Together, the figures highlight the feasibility for shuttles and SAVs to address a transit needs where adding buses are an inefficient use of resources. (a) Graph showcasing the range of route distances served by each mode. (b) Graph showing the service range in revenue kilometers traveled (VKT in this study) for each mode. (c) Annual passengers served by each mode. (d) Service range in terms of annual passenger kilometers traveled (PKT in this study) for each mode.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30

#### 4 CONCLUSIONS

Autonomous shuttles and SAVs offer a potential new transit mode that agencies can use to improve transit coverage equitably and cost-efficiently. This study compares transit systems in different cities to address research gaps regarding improving equity through shared automated mobility. This study also aims to reveal transit system characteristics that are best for SAVs and shuttles to operate when integrated into a public transit system. First, prioritizing low-income, minority, and transit-dependent populations is advantageous to these riders and the agencies that provide transit service to them. Riders will benefit from increased service with more options to pursue educational, vocational, and social opportunities. Transit equity is a goal that is increasingly pursued in policy and planning therefore transit agencies benefit when equity in their transit system increases. Additionally, any equity and access improvements further transit systems in federal regulation compliance.

Second, our study provided insight into service parameters that lead to the cost-efficient operation of shared automated mobility in different public transit systems. In New York City, there were ten CBGs identified as locations for shuttle service. On average these CBGs experienced a 13% improvement in transit access and costs \$1.1 million per CBG on average. In the second largest system, Chicago, two census block groups were most cost-efficiently served by shuttles with a mean cost of \$869,000 per CBG for service. One of the mid-sized cities in this study, Minneapolis-St. Paul saw an 18% improvement in transit access for CBGs served by a small SAV fleet. On average adding SAV service in this city cost approximately \$179,000 per CBG. Finally, Pittsburgh was compared to our other cities and had the greatest increase in transit coverage at 315% for SAV service in 4 CBGs. New service for Pittsburgh cost approximately \$168,000 per CBG. The findings indicate that SAVs and shuttles are not cost-efficient in certain high-density service scenarios, mostly due to increased fleet size. Another consideration worth mentioning, although not included in the study, is larger fleet sizes utilizing road resources thus contributing to congestion in areas that are already grappling with the issue. In contrast, CBGs that are suitable for SAVs or shuttles can operate at substantially lower costs than buses with smaller fleet sizes, namely less than 4 shuttles and less than 2 SAVs. Sensitivity analysis

1 revealed the most important parameters for consideration in future transit planning and policy of  
2 shared autonomous mobility. SAVs and shuttles can be constrained to certain service metrics to  
3 improve transit coverage equity and to remain a cost-efficient complement to existing transit  
4 service.

5

## 6 **5 REFERENCES**

- 7 American Auto Association. 2017. "Your Driving Costs."  
8 American Public Transit Association. 2020. *APTA Factbook*. 52. American Public Transit  
9 Association.  
10 American Public Transit Association, M. Hughes-Cromwick, M. Dickens, D. Grisby, and A.  
11 Guzzetti. 2017. *2017 Public Transportation Fact Book*.  
12 Bauer, G. S., J. B. Greenblatt, and B. F. Gerke. 2018. "Cost, Energy, and Environmental Impact  
13 of Automated Electric Taxi Fleets in Manhattan." *Environmental Science & Technology*.  
14 American Chemical Society. <https://doi.org/10.1021/acs.est.7b04732>.  
15 Berschet, T., W. Boorn, N. Kleshinski, K. Kratoville, and J. Lempke. 2017. "Feasibility of  
16 Electric Autonomous Shuttles in Easton." 24.  
17 Bösch, P. M., F. Becker, H. Becker, and K. W. Axhausen. 2018. "Cost-based analysis of  
18 autonomous mobility services." *Transport Policy*, 64: 76–91.  
19 <https://doi.org/10.1016/j.tranpol.2017.09.005>.  
20 Chen, T. D., K. M. Kockelman, and J. P. Hanna. 2016. "Operations of a shared, autonomous,  
21 electric vehicle fleet: Implications of vehicle & charging infrastructure decisions."  
22 *Transportation Research Part A: Policy and Practice*, 94: 243–254.  
23 <https://doi.org/10.1016/j.tra.2016.08.020>.  
24 Colorado Department of Transportation. 2018. "Overview of Transit Vehicles." Colorado  
25 Department of Transportation.  
26 Coyner, K., J. Good, and S. Blackmer. 2021. *Low-Speed Automated Vehicles (LSAVs) in Public*  
27 *Transportation*. 26056. Washington, D.C.: Transportation Research Board.  
28 Fagnant, D. J., and K. Kockelman. 2015. "Preparing a nation for autonomous vehicles:  
29 opportunities, barriers and policy recommendations." *Transportation Research Part A:*  
30 *Policy and Practice*, 77 (Supplement C): 167–181.  
31 <https://doi.org/10.1016/j.tra.2015.04.003>.  
32 Fagnant, D. J., and K. M. Kockelman. 2018. "Dynamic ride-sharing and fleet sizing for a system  
33 of shared autonomous vehicles in Austin, Texas." *Transportation*, 45 (1): 143–158.  
34 <https://doi.org/10.1007/s11116-016-9729-z>.  
35 Federal Highway Administration. 2013. "Pedestrians and Transit - Safety." Accessed October 9,  
36 2021. [https://safety.fhwa.dot.gov/ped\\_bike/ped\\_transit/ped\\_transguide/ch4.cfm](https://safety.fhwa.dot.gov/ped_bike/ped_transit/ped_transguide/ch4.cfm).  
37 Fulton, L., A. Brown, and J. Compostella. 2020. "Generalized Costs of Travel by Solo and  
38 Pooled Ridesourcing vs. Privately Owned Vehicles, and Policy Implications."  
39 <https://doi.org/10.7922/G2WD3XTK>.  
40 Gurumurthy, K. M., K. M. Kockelman, and N. Zuniga-Garcia. 2020. "First-Mile-Last-Mile  
41 Collector-Distributor System using Shared Autonomous Mobility." *Transportation*

- 1        *Research Record*, 2674 (10): 638–647. SAGE Publications Inc.  
2        <https://doi.org/10.1177/0361198120936267>.
- 3        Hughes-Cromwick, M. 2019. “Public Transportation Wage Rate Database.” *American Public*  
4        *Transportation Association*. Accessed July 30, 2021. [https://www.apta.com/research-](https://www.apta.com/research-technical-resources/transit-statistics/public-transportation-wage-rate-database/)  
5        [technical-resources/transit-statistics/public-transportation-wage-rate-database/](https://www.apta.com/research-technical-resources/transit-statistics/public-transportation-wage-rate-database/).
- 6        Hughes-Cromwick, M., M. Dickens, D. Grisby, and A. Guzzetti. 2017. *2017 Public*  
7        *Transportation Fact Book*. 50. American Public Transit Association.
- 8        Jiao, J., and M. Dillivan. 2013. “Transit Deserts: The Gap between Demand and Supply.”  
9        *Journal of Public Transportation*, 16 (3). <http://dx.doi.org/10.5038/2375-0901.16.3.2>.
- 10       Kittelson & Associates, Inc., P. Brinckerhoff, KFH Group, Inc., Texas A&M Transportation  
11       Institute, Arup, Transit Cooperative Research Program, Transportation Research Board, and  
12       National Academies of Sciences, Engineering, and Medicine. 2013. *Transit Capacity and*  
13       *Quality of Service Manual, Third Edition*. Washington, D.C.: Transportation Research  
14       Board.
- 15       Litman, T. 2018. *Evaluating Public Transit Benefits and Costs: Best Practices Guidebook*. 1–  
16       141. Victoria Transport Policy Institute.
- 17       Local Motors. 2018. “Olli Specifications.” *Local Motors*. Accessed December 19, 2018.  
18       <https://localmotors.com/meet-olli/>.
- 19       Moorthy, A., R. De Kleine, G. Keoleian, J. Good, and G. Lewis. 2017. “Shared Autonomous  
20       Vehicles as a Sustainable Solution to the Last Mile Problem: A Case Study of Ann Arbor-  
21       Detroit Area.” *SAE International Journal of Passenger Cars - Electronic and Electrical*  
22       *Systems*, 10 (2). <https://doi.org/10.4271/2017-01-1276>.
- 23       Narayanan, S., E. Chaniotakis, and C. Antoniou. 2020. “Shared autonomous vehicle services: A  
24       comprehensive review.” *Transportation Research Part C: Emerging Technologies*, 111:  
25       255–293. <https://doi.org/10.1016/j.trc.2019.12.008>.
- 26       National Center for Transit Research, and S. E. Polzin. 2016. “Implications to Public  
27       Transportation of Emerging Technologies.” 23. [https://doi.org/10.5038/CUTR-NCTR-RR-](https://doi.org/10.5038/CUTR-NCTR-RR-2016-10)  
28       [2016-10](https://doi.org/10.5038/CUTR-NCTR-RR-2016-10).
- 29       Nicholas, M. 2019. “Working Paper: Estimating electric vehicle charging infrastructure costs  
30       across major U.S. metropolitan areas.” The International Council on Clean Transportation.  
31       Port Authority of Allegheny County. 2016. “PAAC Performance Review Report.”
- 32       Shan, A., N. H. Hoang, K. An, and H. L. Vu. 2021. “A framework for railway transit network  
33       design with first-mile shared autonomous vehicles.” *Transportation Research Part C:*  
34       *Emerging Technologies*, 130: 103223. <https://doi.org/10.1016/j.trc.2021.103223>.
- 35       Shen, Y., H. Zhang, J. Zhao, and J. Zhao. 2017. “Simulating the First Mile Service to Access  
36       Train Stations by Shared Autonomous Vehicle.”
- 37       Sierra Club. 2016. “Zero Emission Bus Factsheet.” Accessed November 9, 2018.  
38       [https://www.sierraclub.org/sites/www.sierraclub.org/files/sce/new-jersey-](https://www.sierraclub.org/sites/www.sierraclub.org/files/sce/new-jersey-chapter/Handouts/VW_Zero_Emission_Bus_Factsheet.pdf)  
39       [chapter/Handouts/VW\\_Zero\\_Emission\\_Bus\\_Factsheet.pdf](https://www.sierraclub.org/sites/www.sierraclub.org/files/sce/new-jersey-chapter/Handouts/VW_Zero_Emission_Bus_Factsheet.pdf).
- 40       Smart Columbus. 2021. “Self-Driving Shuttles.” *Smart Columbus*. Accessed September 4, 2020.  
41       <https://smart.columbus.gov/projects/self-driving-shuttles>.
- 42       Spieser, K., K. Treleaven, R. Zhang, E. Frazzoli, D. Morton, and M. Pavone. 2014. “Toward a  
43       Systematic Approach to the Design and Evaluation of Automated Mobility-on-Demand  
44       Systems: A Case Study in Singapore.” *Road Vehicle Automation, Lecture Notes in*  
45       *Mobility*, 229–245. Springer, Cham.

- 1 The Swiss Transit Lab. 2018. “Route 12.” *Route 12*. Accessed November 25, 2018.  
2 <https://www.swisstransitlab.com/en/route-12>.
- 3 U.S. Bureau of Labor Statistics. 2018. “Bus Drivers: Occupational Outlook Handbook.”  
4 Accessed October 12, 2018. [https://www.bls.gov/ooh/transportation-and-material-](https://www.bls.gov/ooh/transportation-and-material-moving/bus-drivers.htm)  
5 [moving/bus-drivers.htm](https://www.bls.gov/ooh/transportation-and-material-moving/bus-drivers.htm).
- 6 U.S. Bureau of Labor Statistics. 2019. *Employer Costs for Employee Compensation - June 2019*.  
7 12.
- 8 U.S. Census Bureau. 2017. “American FactFinder.” Accessed December 12, 2018.  
9 <https://factfinder.census.gov/faces/nav/jsf/pages/searchresults.xhtml?refresh=t>.
- 10 U.S. Department of Energy. 2018. “Alternative Fuels Data Center: Maps and Data - AFV  
11 Acquisitions by Regulated Fleets (by Fleet Type).” Accessed November 11, 2018.  
12 <https://afdc.energy.gov/data/10310>.
- 13 U.S. Department of Transportation. 1964. *Title VI Requirements and Guidelines for Federal  
14 Transit Administration Recipients*. 53.
- 15 U.S. Department of Transportation, U. S. 2017. “Low-Speed Automated Shuttles Foundational  
16 Research.”
- 17 U.S. Energy Information Administration. 2019. “U.S. Total Refiner Petroleum Product Prices.”  
18 Accessed August 26, 2020. [https://www.eia.gov/dnav/pet/pet\\_pri\\_refoth\\_dcu\\_nus\\_a.htm](https://www.eia.gov/dnav/pet/pet_pri_refoth_dcu_nus_a.htm).
- 19 U.S. Environmental Protection Agency. 2016. “Technical Guidance for Assessing  
20 Environmental Justice in Regulatory Analysis.”
- 21 U.S. Environmental Protection Agency, O. 2014. “Technical Documentation for EJSCREEN.”  
22 *US EPA. Policies and Guidance*. Accessed February 25, 2020.  
23 <https://www.epa.gov/ejscreen/technical-documentation-ejscreen>.
- 24 Wadud, Z. 2017. “Fully automated vehicles: A cost of ownership analysis to inform early  
25 adoption.” *Transportation Research Part A: Policy and Practice*, 101: 163–176.  
26 <https://doi.org/10.1016/j.tra.2017.05.005>.
- 27