


LOAD RATINGS
FOR
STANDARD BRIDGES

Final Report

For

TR-713

December 2016



TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. IHRB Project TR-713	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle LOAD RATINGS FOR STANDARD BRIDGES		5. Report Date December 2016	
		6. Performing Organization Code	
7. Author(s) Andrea L. Ryan, P.E. http://orcid.org/0000-0003-2634-4330		8. Performing Organization Report No. Enter any/all unique alphanumeric report numbers assigned by the performing organization, if applicable.	
		9. Performing Organization Name and Address Stanley Consultants, Inc. 225 Iowa Ave Muscatine, IA 52761	
12. Sponsoring Agency Name and Address Iowa Highway Research Board Iowa Department of Transportation 800 Lincoln Way Ames, IA 50010		10. Work Unit No.	
		11. Contract or Grant No.	
15. Supplementary Notes		13. Type of Report and Period Covered Final Report	
		14. Sponsoring Agency Code IHRB Project TR-713	
16. Abstract Bridge standard designs are load rated to evaluate of the capacity of the bridges to carry vehicle loads. The resulting ratings are tabulated by bridge type. The following bridge standards are load rated: H30-94, J24-87, J30C-87, J24-06, J30-06, J40-06, J44-06, RS40-04 and RS40-10. The following vehicles are evaluated: Special Hauling Vehicles (SU4, SU5, SU6, and SU7) at the operating level, Legal Trucks (Types 4, 3S3A, 3-3, 3S3B and 4S3) at the operating level, and HS20-44 truck at the inventory and operating level. The rating procedure utilizes Load Factor methodology and LARS Bridge software. Load rating results listed are in compliance with the 2011 AASHTO Manual for Bridge Evaluation, second edition.			
17. Key Words		18. Distribution Statement No restrictions.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 16	22. Price N/A

ENGINEERING STUDY
IOWA HIGHWAY RESEARCH BOARD
PROJECT TR-713

FINAL REPORT

LOAD RATING FOR STANDARD BRIDGES

IOWA DEPARTMENT OF TRANSPORTATION
AMES, IOWA 50010

DECEMBER 2016

TABLE OF CONTENTS

Acknowledgement.....4

Introduction.....5

Summary Ratings

 H Series.....9

 J Series.....10

 RS Series.....17

ACKNOWLEDGEMENT

Project TR-713 was sponsored by the Iowa Highway Research Board and the Iowa Department of Transportation. The Iowa Highway Research Board approved expenditures to conduct the engineering study. The engineering determinations for this project were conducted by Stanley Consultants, Inc.

DISCLAIMERS

Federal and state laws prohibit employment and/or public accommodation discrimination on the basis of age, color, creed, disability, gender identity, national origin, pregnancy, race, religion, sex, sexual orientation or veteran's status. If you believe you have been discriminated against, please contact the Iowa Civil Rights Commission at 800-457-4416 or Iowa Department of Transportation's affirmative action officer. If you need accommodations because of a disability to access the Iowa Department of Transportation's services, contact the agency's affirmative action officer at 800-262-0003.

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the Iowa Department of Transportation.

INTRODUCTION

- Load Rating: Evaluation of the capacity of a bridge to carry vehicle loads
- Standard Bridge: Bridge built according to standards issued by the Iowa Department of Transportation
- Inventory Rating: Load level which can safely utilize the bridge for an indefinite period of time
- Operating Rating: Absolute maximum permissible load level for the bridge

A load rating states the load in tons which a vehicle can impose on a bridge. Changes in guidelines, standards, and customary uses of bridges require analyses of bridges to be updated and reevaluated.

In this report, nine secondary and primary bridge standards for three types of bridges are rated utilizing Load Factor methodology and LARS Bridge software:

<u>Precast Beam</u>	<u>Reinforced Concrete Slab</u>	<u>Rolled Steel Beam</u>
H30-94	J24-87	RS40-04
	J30C-87	RS40-10
	J24-06	
	J30-06	
	J40-06	
	J44-06	

The ratings apply only to those bridges which:

- (1) are built according to the applicable bridge standard plans,
- (2) have no structural deterioration or damage, and
- (3) have no added wearing surface in excess of one-half inch integral wearing surface.

Reinforced concrete slab bridges are rated for the following loads: operating level for special hauling vehicles (SHV) SU4, SU5, SU6, and SU7, and operating level for legal trucks (Types 4, 3S3A, 3-3, 3S3B and 4S3). Inventory and operating level ratings for HS20 were completed and reported as HS Ratings for HR-239 Phase IV report and are included in the tables below. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings of J-Standards.

Precast beam bridges and rolled steel beam bridges are rated for the following loads: operating level for SHV (SU4, SU5, SU6, and SU7), operating level for legal trucks (Types 4, 3S3A, 3-3, 3S3B and 4S3), and inventory and operating levels for HS20.

The Inventory and Operating Ratings for HS20 are based on the standard AASHTO HS20-44 loading.

Load ratings listed in this report are in compliance with the 2011 AASHTO Manual for Bridge Evaluation, second edition.

Summary sheets contain any additional qualifications for interpreting the load ratings.

In agreement with the FHWA and to comply with FHWA policy, the Load Factor Ratings for the RS40-10 and the J-06 are valid for all bridges built before December 31st 2014. After that date, the bridges will need to be rated LRFR. Any bridge from this standard that is required to be re-rated, identified through inspection, shall be re-rated LRFR.

The proper use and application of these bridge ratings requires due consideration and evaluation by a qualified engineer of all relevant factors affecting these ratings. Anyone using any part of these bridge ratings assumes sole responsibility for their proper application.

References:

Manual for Bridge Evaluation, 2nd edition

prepared by Highway Subcommittee on Bridges and Structures
publ. American Association of State Highway and Transportation
Officials, Washington, D.C. , 2011.


Standard Specifications For Highway Bridges, 17th ed.

as amended by Interim Specifications ,
prepared by Highway Subcommittee on Bridges and Structures
publ. American Association of State Highway and Transportation
Officials, Washington, D.C. , 2000.

IOWA LEGAL TRUCKS DIAGRAMS


Straight Truck (Type 4)

Total Wt. = 54.5 Kips
(27.25 Tons)




Truck + Semi-trailer (Type 3S3A)

Total Wt. = 80 Kips
(40 Tons)

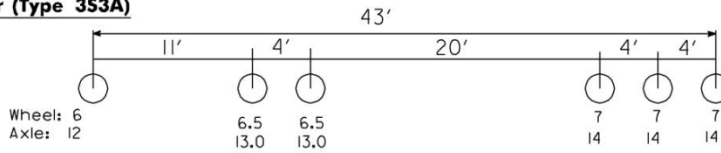


Truck + Trailer (Type 3-3)

Total Wt. = 80 Kips
(40 Tons)

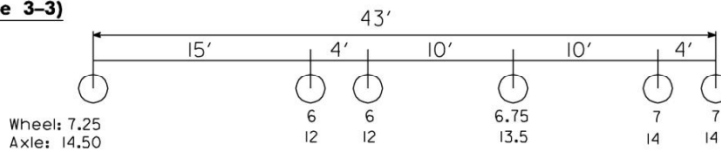


Truck + Semi-trailer (Type 3S3B)

Total Wt. = 90 Kips
(45 Tons)

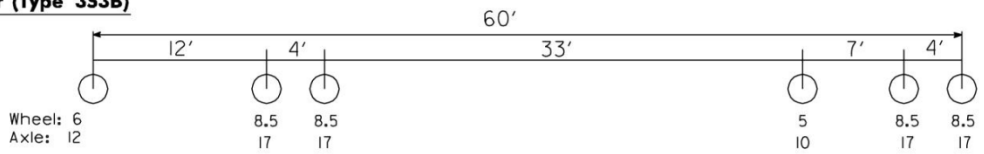


Truck + Semi-trailer (Type 4S3)


Total Wt. = 96 Kips
(48 Tons)

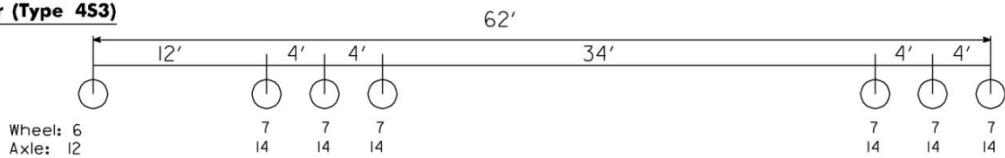


SPECIAL HAULING VEHICLES DIAGRAMS

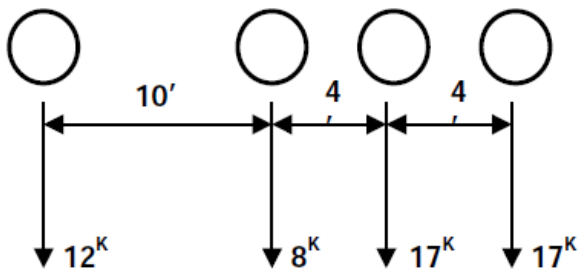


SU4 TRUCK
GVW = 54 KIPS

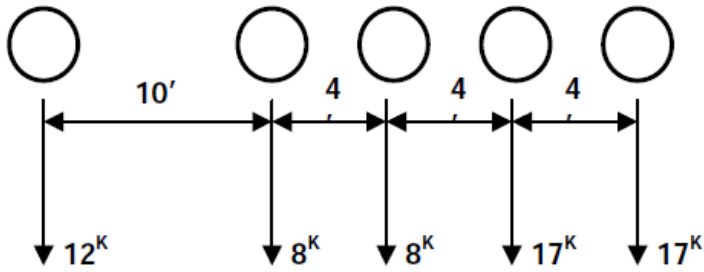

SU5 TRUCK
GVW = 62 KIPS

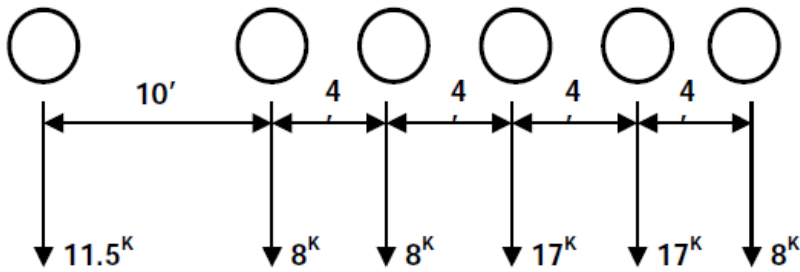

SU6 TRUCK
GVW = 69.5 KIPS

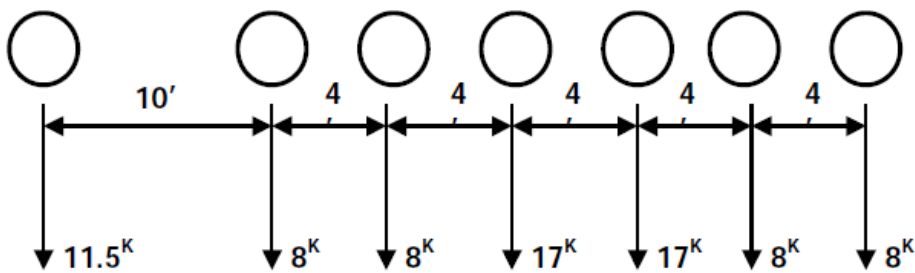

SU7 TRUCK
GVW = 77.5 KIPS

Precast Beam Bridge (H Series) Rating Summary 2016

Summary for Iowa DOT Precast Concrete Beam Bridges

H30-94 Standards (Issued 1994)

H30-94 Pretensioned Prestressed Concrete Beam Bridge Standards Load Rating Summary

2'-8" High Barrier Rail

Ratings are in TONS

Bridge Length	HS20-INV	HS20-OP	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
126'-4"	47.1	78.5	66.5	71.0	71.5	74.1	68.5	112.6	108.1	123.7	122.7
138'-10"	49.1	81.9	67.7	72.9	73.6	76.6	70.0	113.1	111.0	124.5	125.5
151'-4"	42.4	78.6	66.5	71.0	71.6	74.1	68.5	112.6	108.1	123.8	122.7
163'-10"	45.7	76.2	65.7	69.7	70.2	72.4	67.5	108.4	103.3	123.4	120.8
176'-4"	46.6	77.7	68.0	71.7	72.1	74.2	69.6	108.4	104.1	128.6	124.5
188'-10"	44.6	81.3	72.0	75.6	76.0	78.0	73.6	111.6	107.3	137.2	131.6
201'-4"	48.6	82.2	73.6	76.9	77.3	79.2	75.1	111.1	105.6	140.8	134.1
213'-10"	43.7	82.6	74.5	77.6	78.0	79.7	75.9	108.2	102.2	143.3	135.6
226'-4"	43.3	86.5	78.6	81.7	82.1	83.8	80.0	112.6	106.6	151.8	142.9
243'-0"	43.3	89.7	82.5	85.4	85.7	87.2	83.8	113.4	107.3	152.7	146.4

2'-5" High Open Rail

Ratings are in TONS

Bridge Length	HS20-INV	HS20-OP	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
126'-4"	47.4	79.0	66.9	71.4	72.0	74.6	68.9	113.3	108.7	124.4	123.4
138'-10"	49.4	82.3	68.1	73.3	74.0	77.0	70.4	113.7	111.7	125.2	126.2
151'-4"	43.0	79.1	66.9	71.5	72.0	74.6	68.9	113.3	108.8	124.5	123.5
163'-10"	46.0	76.7	66.2	70.2	70.6	72.9	67.9	109.1	104.0	124.2	121.6
176'-4"	46.9	78.2	68.4	72.2	72.6	74.7	70.1	109.2	104.8	129.5	125.4
188'-10"	45.2	81.9	72.6	76.2	76.6	78.6	74.2	112.4	108.1	138.2	132.6
201'-4"	49.3	82.8	74.1	77.5	77.9	79.7	75.6	111.9	106.3	141.9	135.1
213'-10"	44.4	83.2	75.1	78.2	78.6	80.3	76.5	109.0	103.0	144.4	136.6
226'-4"	44.0	87.2	79.2	82.3	82.7	84.4	80.6	113.4	107.4	153.0	144.0
243'-0"	44.1	90.4	83.2	86.0	86.4	87.9	84.5	114.3	108.2	153.8	147.5

- Note: 1. Ratings were calculated using 1/2" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 30 feet.

Slab Bridge (J Series) Rating Summary 2016

Summary for Iowa DOT Standard Concrete Slab Bridges

J24-87

J30C-87

J24-06

J30-06

J40-06

J44-06

J24-87 Standards (Issued 1987)

J24-87 Slab Bridge Standards Load Rating Summary

2'-8" High Barrier Rail

Ratings are in TONS, except as noted*

Built with Flat Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 31.5	HS 52.6	67.6	74.8	77.7	84.7	71.6	110.0	128.2	117.3	125.3
87'-6"	HS 31.1	HS 52.0	69.6	76.3	78.5	84.2	73.1	109.1	125.8	126.6	136.7
100'-0"	HS 32.6	HS 54.5	74.2	80.8	83.4	88.5	77.3	116.3	135.7	133.1	138.1
112'-6"	HS 33.8	HS 56.4	78.7	84.9	87.9	92.5	81.4	124.0	144.2	141.7	139.9
125'-0"	HS 35.4	HS 59.1	84.5	90.7	92.9	97.2	87.4	133.5	149.6	139.6	138.5

Built with Sloped Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 27.8	HS 46.4	61.5	68.0	70.7	77.1	65.2	100.1	114.4	106.7	114.1
87'-6"	HS 27.6	HS 46.1	63.7	69.8	71.8	77.0	66.9	97.8	112.8	115.8	125.0
100'-0"	HS 29.2	HS 48.8	68.4	74.5	76.8	81.6	71.2	105.2	122.7	122.7	127.3
112'-6"	HS 30.4	HS 50.7	72.7	78.5	81.2	85.4	75.3	112.5	130.8	128.5	126.9
125'-0"	HS 32.2	HS 53.7	78.8	84.5	86.5	90.5	81.4	122.4	137.1	128.0	127.0

*Multiply tabulated value by 1.8 to obtain rating in TONS

2'-5" High Open Rail

Ratings are in TONS, except as noted*

Built with Flat Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 31.6	HS 52.8	67.8	75.0	77.9	85.0	71.9	110.3	128.9	117.6	125.7
87'-6"	HS 31.2	HS 52.1	69.9	76.5	78.7	84.5	73.4	109.8	126.6	127.1	137.2
100'-0"	HS 32.7	HS 54.6	74.4	81.1	83.7	88.9	77.6	117.0	136.6	133.6	138.6
112'-6"	HS 33.9	HS 56.6	78.9	85.2	88.2	92.9	81.8	124.9	145.3	142.7	141.0
125'-0"	HS 35.5	HS 59.3	84.8	91.0	93.3	97.6	87.8	134.5	150.7	140.7	139.6

Built with Sloped Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 27.9	HS 46.6	61.7	68.3	70.9	77.3	65.4	100.4	115.1	107.1	114.4
87'-6"	HS 27.7	HS 46.3	63.9	70.0	72.0	77.3	67.2	98.5	113.6	116.3	125.5
100'-0"	HS 29.4	HS 49.0	68.6	74.8	77.1	81.9	71.6	106.0	123.6	123.2	127.8
112'-6"	HS 30.5	HS 51.0	73.0	78.8	81.5	85.8	75.6	113.4	131.9	129.6	128.0
125'-0"	HS 32.3	HS 53.9	79.1	84.9	86.9	90.9	81.8	123.4	138.3	129.1	128.1

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note: 1. Ratings were calculated using 1/2" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 24 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.

J30C-87 Standards (Issued 1987)

J30C-87 Slab Bridge Standards Load Rating Summary

2'-8" High Barrier Rail

Ratings are in TONS, except as noted*

Built with Flat Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 31.6	HS 52.8	69.5	76.8	79.8	87.0	73.6	113.0	132.8	120.5	128.8
87'-6"	HS 31.3	HS 52.2	71.5	78.3	80.6	86.5	75.1	112.9	130.2	130.0	140.4
100'-0"	HS 32.8	HS 54.7	76.0	82.8	85.5	90.8	79.2	120.2	140.2	136.5	141.5
112'-6"	HS 33.9	HS 56.6	80.6	87.0	90.1	94.8	83.4	128.2	149.1	146.5	144.6
125'-0"	HS 35.5	HS 59.3	86.4	92.7	95.1	99.4	89.3	137.7	154.3	144.0	142.9

Built with Sloped Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 27.9	HS 46.6	61.8	68.3	71.0	77.4	65.6	100.5	115.3	107.2	114.5
87'-6"	HS 27.8	HS 46.4	64.0	70.1	72.1	77.4	67.2	98.7	113.8	116.4	125.6
100'-0"	HS 29.4	HS 49.0	68.7	74.9	77.2	82.0	71.6	106.1	123.8	123.3	127.9
112'-6"	HS 30.5	HS 50.9	73.1	78.9	81.6	85.9	75.7	113.6	132.1	129.8	128.2
125'-0"	HS 32.4	HS 54.0	79.2	85.0	87.0	91.0	81.9	123.7	138.6	129.4	128.4

*Multiply tabulated value by 1.8 to obtain rating in TONS

2'-5" High Open Rail

Ratings are in TONS, except as noted*

Built with Flat Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 31.7	HS 52.9	69.6	77.0	80.0	87.2	73.7	113.3	133.3	120.8	129.1
87'-6"	HS 31.3	HS 52.3	71.7	78.5	80.8	86.7	75.2	113.4	130.8	130.4	140.7
100'-0"	HS 32.8	HS 54.8	76.2	83.1	85.7	91.0	79.4	120.7	140.9	136.8	141.9
112'-6"	HS 34.0	HS 56.8	80.8	87.2	90.4	95.1	83.7	128.9	149.9	147.0	145.4
125'-0"	HS 35.6	HS 59.5	86.7	93.0	95.4	99.7	89.6	138.5	155.2	144.9	143.7

Built with Sloped Bottom Option:

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
75'-0"	HS 28.0	HS 46.7	61.9	68.5	71.2	77.6	65.6	100.8	115.8	107.5	114.8
87'-6"	HS 27.8	HS 46.5	64.2	70.3	72.3	77.6	67.4	99.2	114.4	116.7	126.0
100'-0"	HS 29.5	HS 49.2	68.9	75.1	77.4	82.2	71.7	106.7	124.5	123.7	128.3
112'-6"	HS 30.6	HS 51.1	73.3	79.1	81.8	86.1	75.9	114.3	132.9	130.6	129.0
125'-0"	HS 32.4	HS 54.2	79.4	85.2	87.3	91.3	82.1	124.5	139.5	130.2	129.2

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note: 1. Ratings were calculated using 1/2" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 30 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.

J24-06 Standards (Issued 2006)

J24-06 Slab Bridge Standards Load Rating Summary

2'-8" High Open Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.6	HS 42.7	67.4	74.5	77.7	83.9	71.4	95.7	106.5	116.4	124.2
80'-0"	HS 25.0	HS 41.7	62.5	68.9	71.3	77.2	66.1	99.9	114.9	109.3	118.8
90'-0"	HS 24.5	HS 40.9	62.2	68.0	69.8	74.8	65.2	94.7	109.4	115.2	123.4
100'-0"	HS 24.8	HS 41.4	63.4	68.9	70.5	74.9	66.4	105.4	122.9	122.9	127.4
110'-0"	HS 24.5	HS 40.8	64.0	69.2	71.1	75.0	66.4	104.0	125.7	116.2	118.8
120'-0"	HS 25.9	HS 43.2	67.7	72.8	74.1	77.6	70.1	111.4	126.2	123.5	122.7
130'-0"	HS 26.5	HS 44.3	70.3	75.2	77.5	81.0	72.6	117.1	126.3	123.8	122.8
140'-0"	HS 28.2	HS 47.0	74.9	79.7	81.4	84.7	77.1	126.0	126.9	124.8	123.6
150'-0"	HS 27.7	HS 46.2	73.4	77.8	78.7	81.7	75.6	121.8	118.6	117.4	116.8

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note:
1. Ratings were calculated using $\frac{1}{2}$ " integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 24 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.
 4. Rail height has changed since Phase IV ratings. HS20 ratings will vary slightly from tabulated values.

J30-06 Standards (Issued 2006)

J30-06 Slab Bridge Standards Load Rating Summary

2'-10" High Barrier Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.3	HS 42.3	67.5	74.7	77.9	84.1	71.6	96.0	106.9	116.5	124.4
80'-0"	HS 24.8	HS 41.3	62.6	69.0	71.4	77.3	66.1	100.3	115.3	109.5	119.0
90'-0"	HS 24.3	HS 40.5	62.3	68.1	69.9	74.8	65.2	94.9	109.6	115.3	123.5
100'-0"	HS 24.6	HS 41.0	63.5	69.0	70.6	74.9	66.4	105.6	123.2	123.0	127.6
110'-0"	HS 24.2	HS 40.4	64.1	69.3	71.2	75.0	66.4	104.1	125.9	116.3	118.9
120'-0"	HS 25.6	HS 42.8	67.8	72.9	74.1	77.7	70.1	111.6	126.4	123.7	123.0
130'-0"	HS 26.3	HS 43.9	70.4	75.3	77.6	81.1	72.6	117.3	126.4	124.1	123.1
140'-0"	HS 27.9	HS 46.6	75.0	79.8	81.5	84.8	77.1	126.1	127.1	125.2	123.9
150'-0"	HS 27.4	HS 45.8	73.5	78.0	78.8	81.8	75.8	121.9	118.8	117.7	117.1

*Multiply tabulated value by 1.8 to obtain rating in TONS

2'-8" High Open Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.6	HS 42.7	67.6	74.8	78.0	84.5	71.8	96.4	107.4	116.8	124.6
80'-0"	HS 25.0	HS 41.7	62.7	69.2	71.6	77.5	66.4	100.7	115.8	109.8	119.3
90'-0"	HS 24.5	HS 40.9	62.4	68.3	70.1	75.1	65.6	95.4	110.2	115.7	123.9
100'-0"	HS 24.8	HS 41.4	63.7	69.3	70.9	75.3	66.7	106.3	124.1	123.5	128.1
110'-0"	HS 24.5	HS 40.8	64.4	69.6	71.5	75.4	66.7	104.6	126.9	116.8	119.4
120'-0"	HS 25.9	HS 43.2	68.1	73.2	74.5	78.1	70.4	112.1	127.0	124.7	124.0
130'-0"	HS 26.5	HS 44.3	70.7	75.7	77.9	81.5	72.9	117.8	127.1	125.2	124.2
140'-0"	HS 28.2	HS 47.0	75.3	80.2	81.9	85.2	77.6	126.7	127.8	126.4	125.1
150'-0"	HS 27.7	HS 46.2	73.9	78.4	79.3	82.3	76.1	122.7	119.5	119.0	118.4

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note:
1. Ratings were calculated using $\frac{1}{2}$ " integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 30 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.
 4. Rail height has changed since Phase IV ratings. HS20 ratings will vary slightly from tabulated values.

J40-06 Standards (Issued 2006)

J40-06 Slab Bridge Standards Load Rating Summary

2'-10" High Barrier Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.3	HS 42.3	67.8	75.0	78.2	84.9	71.9	96.8	107.9	117.1	124.9
80'-0"	HS 24.8	HS 41.3	62.9	69.4	71.8	77.7	66.6	101.2	116.4	110.1	119.6
90'-0"	HS 24.3	HS 40.5	62.6	68.5	70.3	75.3	65.7	95.9	110.8	116.0	124.2
100'-0"	HS 24.6	HS 41.0	63.9	69.4	71.0	75.4	66.9	106.7	124.5	123.7	128.3
110'-0"	HS 24.2	HS 40.4	64.5	69.8	71.7	75.6	66.9	104.8	127.4	117.1	119.7
120'-0"	HS 25.6	HS 42.8	68.2	73.4	74.7	78.3	70.6	112.3	127.3	125.0	124.6
130'-0"	HS 26.3	HS 43.9	70.9	75.8	78.1	81.7	73.1	118.1	127.4	125.8	124.7
140'-0"	HS 27.9	HS 46.6	75.5	80.4	82.1	85.4	77.7	127.0	128.1	127.0	125.7
150'-0"	HS 27.4	HS 45.8	74.2	78.7	79.5	82.5	76.4	123.0	119.8	119.7	119.0

*Multiply tabulated value by 1.8 to obtain rating in TONS

2'-8" High Open Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.6	HS 42.7	67.9	75.1	78.3	85.2	72.1	97.1	108.2	117.3	125.1
80'-0"	HS 25.0	HS 41.7	63.0	69.5	71.9	77.9	66.6	101.6	116.8	110.3	119.8
90'-0"	HS 24.5	HS 40.9	62.8	68.7	70.5	75.5	65.9	96.4	111.4	116.3	124.6
100'-0"	HS 24.8	HS 41.4	64.1	69.7	71.3	75.7	67.1	107.3	125.2	124.0	128.7
110'-0"	HS 24.5	HS 40.8	64.7	70.0	71.9	75.8	67.1	105.2	128.2	117.5	120.1
120'-0"	HS 25.9	HS 43.2	68.5	73.7	75.0	78.6	70.9	112.7	127.8	125.4	125.4
130'-0"	HS 26.5	HS 44.3	71.1	76.1	78.4	82.0	73.4	118.5	127.9	126.6	125.6
140'-0"	HS 28.2	HS 47.0	75.8	80.7	82.5	85.8	77.9	127.5	128.6	127.9	126.6
150'-0"	HS 27.7	HS 46.2	74.5	79.0	79.9	82.9	76.7	123.6	120.4	120.7	120.0

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note:
1. Ratings were calculated using $\frac{1}{2}$ " integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 40 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.
 4. Rail height has changed since Phase IV ratings. HS20 ratings will vary slightly from tabulated values.

J44-06 Standards (Issued 2006)

J44-06 Slab Bridge Standards Load Rating Summary

2'-10" High Barrier Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.3	HS 42.3	67.8	75.1	78.3	85.0	71.9	97.0	108.0	117.2	125.0
80'-0"	HS 24.8	HS 41.3	63.0	69.5	71.8	77.8	66.6	101.4	116.6	110.2	119.7
90'-0"	HS 24.3	HS 40.5	62.7	68.5	70.4	75.3	65.7	96.1	111.0	116.1	124.4
100'-0"	HS 24.6	HS 41.0	63.9	69.5	71.1	75.5	66.9	106.9	124.7	123.8	128.4
110'-0"	HS 24.2	HS 40.4	64.6	69.9	71.8	75.7	67.1	104.9	127.7	117.2	119.8
120'-0"	HS 25.6	HS 42.8	68.3	73.5	74.8	78.4	70.7	112.5	127.5	125.2	124.8
130'-0"	HS 26.3	HS 43.9	71.0	75.9	78.2	81.8	73.2	118.3	127.6	126.1	125.0
140'-0"	HS 27.9	HS 46.6	75.6	80.5	82.2	85.6	77.7	127.2	128.3	127.3	126.0
150'-0"	HS 27.4	HS 45.8	74.3	78.8	79.7	82.6	76.4	123.2	120.0	120.0	119.3

*Multiply tabulated value by 1.8 to obtain rating in TONS

2'-8" High Open Rail

Ratings are in TONS, except as noted*

Bridge Length	HS20-INV*	HS20-OP*	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
70'-0"	HS 25.6	HS 42.7	68.0	75.2	78.5	85.4	72.1	97.4	108.5	117.5	125.3
80'-0"	HS 25.0	HS 41.7	63.1	69.6	72.0	78.0	66.7	101.9	117.1	110.4	120.0
90'-0"	HS 24.5	HS 40.9	62.9	68.7	70.6	75.6	65.9	96.6	111.6	116.5	124.7
100'-0"	HS 24.8	HS 41.4	64.2	69.7	71.3	75.7	67.1	107.5	125.4	124.2	128.8
110'-0"	HS 24.5	HS 40.8	64.8	70.1	72.0	75.9	67.2	105.3	128.4	117.6	120.2
120'-0"	HS 25.9	HS 43.2	68.5	73.7	75.0	78.7	70.9	112.9	127.9	125.6	125.6
130'-0"	HS 26.5	HS 44.3	71.2	76.2	78.5	82.1	73.6	118.7	128.0	126.9	125.9
140'-0"	HS 28.2	HS 47.0	75.9	80.8	82.6	85.9	78.1	127.6	128.8	128.2	126.9
150'-0"	HS 27.7	HS 46.2	74.6	79.1	80.0	83.0	76.7	123.7	120.5	121.0	120.3

*Multiply tabulated value by 1.8 to obtain rating in TONS

- Note:
1. Ratings were calculated using 1/2" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 44 feet.
 3. Refer to HR-239 Phase IV report for assumptions used for HS20 ratings.
 4. Rail height has changed since Phase IV ratings. HS20 ratings will vary slightly from tabulated values.

Rolled Steel Beam Bridge (RS Series) Rating Summary 2016

Summary for Iowa DOT Rolled Steel Beam Bridges

RS40-10 Standards (Issued 2010)

RS40-10 Rolled Steel Beam Bridge Standards Load Rating Summary

2'-10" High Barrier Rail

Ratings are in TONS

Bridge Length	HS20-INV	HS20-OP	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
160'-0"	47.7	79.4	78.5	82.6	83.2	85.7	80.3	98.3	101.0	95.7	94.7
180'-0"	49.5	82.5	75.8	79.3	79.9	82.0	77.4	111.5	109.2	104.5	103.4
200'-0"	51.6	86.0	79.5	82.9	83.4	85.3	81.1	114.7	109.8	116.4	114.8
220'-0"	52.7	87.9	86.9	90.3	90.8	92.7	88.4	121.2	116.2	127.9	126.0
240'-0"	52.0	86.7	99.4	102.9	103.4	105.3	101.0	128.1	126.7	135.6	133.6
260'-0"	57.7	96.2	94.3	97.4	97.8	99.6	95.7	124.7	120.4	160.2	153.4
280'-0"	54.7	91.1	95.0	97.9	98.3	99.9	96.3	123.0	118.9	155.1	148.7
300'-0"	55.0	91.7	99.4	102.2	102.5	104.2	100.7	126.5	122.5	156.6	150.7
320'-0"	54.7	91.2	100.6	103.2	103.6	105.1	101.8	126.0	122.4	153.9	148.4
340'-0"	52.3	87.1	109.3	111.9	112.3	113.8	110.5	134.6	131.1	162.5	156.8

- Note: 1. Ratings were calculated using ½" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 40 feet.

RS40-04 Standards (Issued 2004)

RS40-04 Rolled Steel Beam Bridge Standards Load Rating Summary

2'-10" High Barrier Rail

Ratings are in TONS

Bridge Length	HS20-INV	HS20-OP	SU4	SU5	SU6	SU7	Type 4	Type 3S3A	Type 3-3	Type 3S3B	Type 4S3
160'-0"	37.1	61.8	54.1	56.9	57.4	59.1	55.4	85.7	81.8	93.2	92.0
180'-0"	38.2	63.6	56.6	59.2	59.6	61.1	57.8	85.1	81.4	94.1	93.2
200'-0"	39.2	65.4	58.9	61.4	61.8	63.2	60.1	85.0	81.2	102.0	100.8
220'-0"	40.7	67.8	62.1	64.5	64.8	66.1	63.2	86.4	82.6	98.0	97.0
240'-0"	41.5	69.2	63.5	65.8	66.1	67.3	64.5	85.7	82.5	108.1	106.6
260'-0"	38.8	64.6	59.7	61.6	61.9	63.0	60.5	78.9	76.1	101.3	97.0
280'-0"	39.8	66.4	61.6	63.5	63.7	64.8	62.5	79.7	77.1	100.6	96.4
300'-0"	40.8	67.9	63.4	65.1	65.3	66.4	64.2	80.5	77.9	99.6	95.8

- Note: 1. Ratings were calculated using ½" integral wearing surface deducted from the slab thickness as shown on the standard plans.
 2. Nominal roadway width is 40 feet.
 3. RS40-04 ratings were provided by the Iowa DOT.