

Connecting South Dakota and the Nation

South Dakota

Department of Transportation
Office of Research



U.S. Department
of Transportation
Federal Highway
Administration

SD2016-01-F



Methodology for Load Rating Double-Tee Bridges

Study SD2016-01

Final Report

Prepared by

**Department of Civil & Environmental Engineering
South Dakota State University
Brookings, SD 57007**

May 2019

DISCLAIMER

The contents of this report, funded in part through grant(s) from the Federal Highway Administration, reflect the views of the authors who are responsible for the facts and accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the South Dakota Department of Transportation, the State Transportation Commission, or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

The South Dakota Department of Transportation provides services without regard to race, color, gender, religion, national origin, age or disability, according to the provisions contained in SDCL 20-13, Title VI of the Civil Rights Act of 1964, the Rehabilitation Act of 1973, as amended, the Americans With Disabilities Act of 1990 and Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, 1994. Any person who has questions concerning this policy or who believes he or she has been discriminated against should contact the Department's Civil Rights Office at 605.773.3540.

ACKNOWLEDGEMENTS

This work was performed under the direction of the SD2016-01 Technical Panel.

Bob Longbons	Project Manager	Dirk Rogers	Highway Superintendent
Aaron Breyfogle	Former Project Manager	Doug Kinniburgh	SDDOT LGA
Cody Axlund	Bridge Inspec. Eng.	Marc Hoelscher	Federal Highway Admin.
Brenda Forman	Executive Director of SDAC	Steve Myer	Clark Engineering
Brian Anderson	Sales Manager of Forterra	Don Hammond	Brosz Engineering, Inc.
Brian Jenner ..	SD Project Engineer of Forterra		
David Coley	Bridge Management Engineer		

This study was jointly funded by the South Dakota Department of Transportation (SDDOT) and the US Department of Transportation (USDOT) through the Mountain Plains Consortium (MPC) - University Transportation Center (UTC). Their support and guidance are greatly appreciated.

The authors are thankful to Brian Anderson and Brian Jenner of Forterra Pipe & Precast, LLC. for providing shop drawings of double-tee bridges, Don Hammond of Brosz Engineering, Inc. and Steve Myer of Clark Engineering for sharing inspection reports, Corr Construction Services, Inc. for providing the girder test specimens, and GeoTek Engineering & Testing Services, Inc. for technical services. The assistance and valuable feedback are greatly appreciated from the following persons: Bob Longbons of the Research Office at the SDDOT, and Zachary Gutzmer of South Dakota State University.

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. SD2016-01-F	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle Methodology for Load Rating Double-Tee Bridges	5. Report Date 05/23/2019	6. Performing Organization Code
	8. Performing Organization Report No.	
7. Author(s) Sandip Rimal, Brian Kidd, Mostafa Tazarv, Junwon Seo, and Nadim Wehbe	9. Performing Organization Name and Address South Dakota State University Crothers Engineering Hall/Box 2219 Brookings, SD 57007	
12. Sponsoring Agency Name and Address South Dakota Department of Transportation Office of Research 700 East Broadway Avenue Pierre, SD 57501-2586	10. Work Unit No.	11. Contract or Grant No. 311284
	13. Type of Report and Period Covered Final Report Jan. 2016 – May 2019	
14. Sponsoring Agency Code		
15. Supplementary Notes		
16. Abstract <p>The most common type of bridge on South Dakota local roads is a precast prestressed double-tee (DT) girder bridge. More than 700 DT bridges are currently in-service in South Dakota. Structural detailing, aging, traffic volume, and environmental conditions affect the structural performance, integrity, and capacity of DT bridges. When a bridge is affected by one or more of the aforementioned parameter(s), the estimation of the bridge safe live load is necessary to ensure the safety of the traveling public and to prevent excessive bridge damage and collapse. Load rating of damaged bridges is challenging mainly because of a lack of information regarding the capacity and live load distribution of damaged components. In the present study, quantitative definitions were first proposed to identify all damage types and condition states specific to double-tee girders. Subsequently, more than 370 inspection reports on South Dakota double-tee girder bridges were reviewed to determine the frequency of damage types and condition states, bridge span length, bridge number of spans, girder depth, and bridge skew conditions. The statistical database was then used to identify double-tee bridge candidates for field and strength testing. Using the database, ten double-tee bridges were identified suitable for field testing and then were inspected for further evaluation. Subsequently, two bridges were selected for field testing. Girder distribution factors (GDFs) and dynamic load allowance (<i>IM</i>) were measured. The field test results showed that the AASHTO LRFD specifications can be used to estimate the moment and shear GDFs for South Dakota double-tee girder bridges with a longitudinal joint damage condition state 3 or less. For the calculation of moment and shear GDFs for a South Dakota double-tee girder bridge with a longitudinal joint damage condition state 4, GDFs were proposed to be the greater of (a) the factor for the exterior girders, (b) the</p>		

factor for the interior girders, and (c) 0.6. Furthermore, AASHTO LRFD specifications can be used for the estimation of IM for damaged double-tee girders with no further modification. An accurate estimation of the capacity of damaged double-tee girders was critical in this project for a safe load rating. To verify the available moment and shear capacity estimation methods, two 45-year old double-tee girders, one 50-ft (15.24-m) long and another 30-ft (9.14-m) long, were extracted from a bridge located in Nemo Road, SD, and were strength tested at the Lohr Structures Laboratory at South Dakota State University. A four-point loading configuration was selected for the strength testing. Data was collected and the methods were validated. The verified methods were then utilized to calculate the shear and moment capacities of 23 different double-tee sections, which have been used in South Dakota. Based on the statistical, experimental, and analytical studies, a load rating methodology was proposed for damaged double-tee girder bridges in which the rating may be performed similarly to the LRFR method that currently used in practice. Nevertheless, it was recommended to modify the capacity (C) and live load components (LL and IM) of the load rating equation accounting for different damage types and condition states.

17. Keywords Load Rating, Double-Tee Bridges, Visual Damage, Field Testing, Strength Testing		18. Distribution Statement No restrictions. This document is available to the public from the sponsoring agency.	
19. Security Classification (of this report) Unclassified	20. Security Classification (of this page) Unclassified	21. No. of Pages 232	22. Price

TABLE OF ACRONYMS

Acronym	Definition
AASHTO	American Association of State Highway and Transportation Officials
ADTT	Average Daily Truck Traffic
ASTM	American Society for Testing and Materials
BRM	Bridge Management Software
CS	Condition State
DOT	Department of Transportation
DT	Double-Tee Girder / Bridge
FHWA	Federal Highway Administration
ft	Foot/Feet
GDF	Girder Distribution Factor
hr	Hour/Hours
IM	Dynamic Load Allowance
in.	Inch/Inches
kip	1000 Pounds
ksi	kip per square inch
lb	Pound/Pounds
LRFD	Load and Resistance Factor Design
LRFR	Load and Resistance Factor Rating
LVDT	Linear Variable Different Transformer
m	Meter
min	Minute/Minutes
MPC	Mountain Plains Consortium
MPa	Mega Pascal
mm	Millimeter, Meter / 1000
NCHRP	National Cooperative Highway Research Program
SD	State of South Dakota, USA
SDDOT	South Dakota Department of Transportation
sec	Second
SDSU	South Dakota State University

1 EXECUTIVE SUMMARY

1.1 Introduction

The most common type of bridge on South Dakota local roads is a precast prestressed double-tee girder bridge. More than 700 double-tee bridges are currently in-service in South Dakota. The local transportation system carries millions of dollars of agricultural products to market, connects people, and provides access to farms, state parks, and recreational sites.

Several types of damage with different condition states have been reported for double-tee bridges. When a bridge is damaged, the estimation of its safe live load is a challenge due to a lack of information on the capacity and live load transfer mechanism for the damaged components.

1.2 Problem Description

Structural detailing, aging, traffic volume, and environmental conditions affect the load carrying capacity of bridges. When a bridge is affected by one or more of these parameters, the estimation of the bridge safe live loads is necessary to ensure the safety of the traveling public and to prevent excessive bridge damage and collapse. This process is usually referred to as “load rating”.

Load rating of a bridge requires accurate estimation of damaged member capacities and the knowledge of live load distribution and demands. The literature and current specifications are lacking a systematic method to include the damage of bridge components in load rating equations. The same issue exists for double-tee bridges. The main goal of the present study was to develop a methodology for safe load rating of double-tee bridges when their girders are damaged.

1.3 Research Work

To achieve the project goal, quantitative definitions were proposed to identify all damage types and condition states specific to South Dakota double-tee bridges. Subsequently more than 370 inspection reports and the state Bridge Management database were reviewed to determine the frequency of damage types and condition states, bridge span length, bridge number of spans, girder depth, and bridge skew conditions. The statistical database was then used to identify double-tee bridge candidates for field and strength testing. Ten double-tee bridges were identified as suitable for field testing and were inspected for further evaluation. Subsequently two bridges were selected for field testing. Girder distribution factors (GDFs) and dynamic load allowance (IM) were measured during the field testing of the two bridges.

To verify the available moment and shear capacity estimation methods, two 45-year old double-tee girders, one 50-ft (15.24-m) long and another 30-ft (9.14-m) long were extracted from a bridge located on Nemo Road, SD, and were strength tested at the Lohr Structures Laboratory at South Dakota State University. A four-point loading configuration was selected for the strength testing. The measured data was used to validate the capacity estimation methods. Subsequently, the verified methods were utilized to calculate the shear and moment capacities of all 23 different double-tee sections, which have been used in South Dakota.

1.4 Research Findings

Based on the review of the inspection reports, the most common damage type found on double-tee girders is the cover deterioration. Most of double-tee bridges in the state are single span with a span length of 40 ft (12.19 m) to 60 ft (18.3 m). Double-tee girders with a depth of 23 in. (584 mm) are more

common than 30-in. (762-mm) deep girders. Furthermore, non-skewed double-tee bridges have been used more often than skewed bridges.

The field testing of the two double-tee bridges revealed that current AASHTO LRFD specifications are sufficient to determine the bridge live load parameters if the girder-to-girder joint damage has a condition state of 3 or less. A conservative recommendation was proposed for the joints with damage condition state 4.

The strength testing of salvaged double-tee girders provided sufficient information to validate the shear and moment capacity estimation methods, which were used in an extensive analytical study to reduce girder capacity based on damage type and condition state.

Based on the statistical, experimental, and analytical studies, a methodology was proposed for damaged double-tee bridges in which the load rating can be performed similarly to the LRFR method that is currently used in practice. Nevertheless, it was recommended to modify the capacity (C) and live load components (LL and IM) of the load rating equation accounting for different damage types and condition states. Condition factors were proposed for all different double-tee sections that have been used in the state.

1.5 Recommendations

Based on the findings of this study, the research team offers the following recommendations.

1.5.1 Recommendation 1: General

The guidelines as detailed in Appendix C should be adopted for the load rating of damaged double-tee girder bridges.

In general, the load rating of damaged double-tee girder bridges is performed similarly to the LRFR method, but the capacity and the live load parameters should be modified as recommended below.

1.5.2 Recommendation 2: Capacity Modification

The guidelines as detailed in Section C.2.2 of Appendix C should be adopted to modify the girder capacities accounting for different damage types and condition states.

The moment and shear capacities of a damaged double-tee girder at strength limit states should be reduced using the proposed condition factors (φ_c) for South Dakota double-tee sections. At service limit states, the bridge concrete and reinforcing steel mechanical properties as recommended should be used in the load rating equation.

1.5.3 Recommendation 3: Demand Modification

The guidelines as detailed in Section C.2.3 of Appendix C should be adopted to modify the live load parameters accounting for different girder-to-girder damage condition states.

If double-tee bridge has a longitudinal joint damage condition state 3 or less, the AASHTO LRFD can be simply followed to determine the live load parameters. Recommendations were provided for longitudinal joint damage condition state 4.

2 PROBLEM DESCRIPTION

The most common types of bridge on South Dakota local roads are precast prestressed double-tee girder bridges with two typical girder depths of 23 in. (584 mm) and 30 in. (762 mm). More than 700 of these bridges are currently in-service in the state. The South Dakota local transportation system plays a significant role in the state economy and welfare by carrying millions of dollars of agricultural products to market, connecting people, and providing access to farms, state parks, and recreational sites.

Several types of damage with varying severity have been reported on South Dakota double-tee bridges. Figure 2.1 shows a few damage types for these bridges. It is critical to understand and quantify the effect of each damage type and its severity (condition state) on the capacity and live load transfer mechanism for double-tee bridges.



(a) Stem Cover Deterioration



(b) Stem Reinforcement Exposure



(c) Girder-to-Girder Damage



(d) Flange Cover Deterioration

Figure 2.1 – Typical Damage of Double-Tee Bridges

Structural detailing, aging, traffic volume, and environmental conditions such as a high number of freeze-thaw cycles and the use of de-icing agents may significantly affect the load carrying capacity of a bridge. These factors are specifically important for double-tee bridges located in South Dakota since (1) SDDOT funded projects showed that conventional double-tee girder longitudinal joint detailing is not adequate for long-term performance (Wehbe et al., 2016; Tazarv et al., 2018), (2) more than 75% of these bridges

are 20 years or older (Bohn et al., 2017), and (3) more than 100 freeze-thaw cycles are annually recorded in the state (Haley, 2011). These parameters expedite double-tee bridge deterioration.

When a bridge is affected by one or more of the aforementioned parameters, the evaluation of load carrying capacity of the bridge, commonly referred to as “load rating”, is necessary to ensure the safety of the traveling public and to prevent excessive bridge damage and collapse. Load rating of a bridge requires an accurate estimation of the capacity of the damaged members and the knowledge of live load distribution and demands. The literature and current specifications are lacking a systematic method to include the damage of bridge components when performing a load rating. A methodology is needed to relate the double-tee bridge component damage to the load rating parameters.

3 RESEARCH OBJECTIVES

Following are the main research objectives.

3.1 Identify Methods of Load Rating

Review nationally recognized standards for visual and analytical techniques on load rating bridges.

An extensive review of the literature, guidelines, and specifications was performed to identify methods of load rating, to evaluate current capacity estimation methods for damaged concrete sections, to categorize different damages and their condition states, and to understand the live load distribution when the members are damaged.

3.2 Experimental Programs

Develop a testing plan to investigate the in-place structural integrity of double tee bridges with varying amounts of visible distress.

Successful load rating of double-tee bridges requires accurate estimation of demands and capacities. The live load demand, distribution, and their analytical models can be established using field testing of double-tee bridges with different configurations (e.g. different span lengths, number of girders, girder geometry, and damage of girder-to-girder joints since it will affect the load distribution based on the study by Wehbe et al., 2016). Two double-tee bridges, one 34-years old and another 38-years old, were field tested using a 50-kip dump truck to determine their live load distribution factors and dynamic load allowance. Both bridges had a girder-to-girder joint damage with condition state 3.

The shear and moment capacities of double-tee bridges, however, cannot be determined through field testing. Furthermore, the inspection of in-service double-tee bridges has indicated different damage types and condition states, which may have significant adverse effects on the shear and moment capacities of the girders. It was critical to establish reliable methods for the estimation of the double-tee girder capacities including different damage types. Laboratory strength testing was performed on two 45-year old salvaged double-tee girders, one 30-ft long and another 50-ft long. These girders had severe damages such as exposure of tendons and loss of stem concrete. The information collected was used to verify the moment and shear capacity estimation methods for damaged double-tee girders.

3.3 Develop Load Rating Methodology for Damaged Double-Tee Bridges

Develop a methodology for engineers and highway superintendents in South Dakota to evaluate the structural integrity of double-tee bridges and estimate load limits through visual inspection.

Based on the analytical and experimental studies performed in this project, a methodology was developed for load rating of damaged double-tee bridges. The method is generally the same as the LRFR method currently used in practice, but the capacity and live load parameters should be modified accounting for different damage types and condition states.

4 TASK DESCRIPTIONS

The research work presented in this report was comprised of 18 tasks. This chapter presents a description of activities performed in each task. Each section of this chapter covers one task of the project.

4.1 Meet with Technical Panel

Task 1: Meet with the technical panel to review project scope and work plan.

A kick-off meeting was held with the technical panel on January 31, 2017 to discuss the scope and the work plan for the entire project. The meeting minutes were recorded and was submitted in the first progress report.

4.2 Perform Literature Review

Task 2: Review literature nationwide pertaining to load rating bridges using visual inspections and instrumentation.

An extensive literature review was conducted under this task to (1) identify methods that incorporate element damage in load rating, (2) quantify damage and categorize damage state for bridge components, (3) summarize capacity estimation methods for damaged girders, and (4) collect results of field testing from past studies. Refer to Chapter 5 of this report for in-depth discussion.

4.3 Review Bridge Inventory

Task 3: From bridge inventory data supplied by SDDOT, summarize the prevalence of distress types and severity on double-tee bridges in South Dakota.

SDDOT provided an extensive database of double-tee bridge inspection photographs in April 2017. More than 370 inspection reports were collected from Brosz Engineering and Clark Engineering. New definitions were proposed to systematically categorize double-tee bridge damages and condition states. The inspection database was comprehensively reviewed to identify the frequency of each damage type using the proposed damage types and condition states. The most common number of spans, span length, girder depth, and the skew angles were identified through the statistical review of the bridge database. Refer to Chapter 6 of this report for in-depth discussion.

4.4 Proposed Preliminary Load Rating Method

Task 4: Propose a methodology to associate load ratings with visible distress type and severity.

A methodology was preliminarily proposed to relate the double-tee girder visual damage to the load rating parameters, specifically the girder capacity and live load distribution factors.

The capacity estimation method for damaged members was initially adopted from the literature. These methods were verified after testing of two salvaged girders as part of this project. Subsequently, different condition factors (ϕ_c) were generated for each damage type and condition state using the verified capacity estimation methods.

Damage of girder-to-girder longitudinal joints in double-tee bridges changes the load path thus the demand. Therefore, the demand parameters of the load rating equations should be modified to account for the longitudinal joint damage. After field testing two double-tee bridges as part of this project,

guidelines were proposed to modify the live load parameters of double-tee bridges with different longitudinal joint damage condition states.

When both capacity and demand parameters of the load rating method are known, the bridge can be safely load rated. Chapter 11 of this report discusses the final proposed methodology.

4.5 Assess Need of Salvaged Girder Strength Testing

Task 5: Assess the need for load testing girders removed from an existing double-tee bridge to more accurately associate load ratings with visual inspections.

The accurate estimation of moment and shear force capacities for old or damaged double-tee girders is essential in this project since load rating of bridges depends on the girder capacity. The configuration of girders, concrete and reinforcement mechanical properties, and the amount of prestressing forces alter the capacity of a prestressed member. Load testing of salvaged double-tee girders provides insights into these parameters. Two 45-year old salvaged double-tee girders were tested in this project. Refer to Chapter 8 of this report for in-depth discussion.

4.6 Develop Field Testing Program

Task 6: Develop a field experiment plan that proposes bridges to be tested, instrumentation, load test vehicle(s), and procedures for load testing and visual inspection.

The inspection database generated under Task 3 was used to identify bridge candidates for field testing. Five criteria were used to identify field test bridge candidates. Ten double-tee bridges were identified as potential candidates for field testing. All ten bridges were inspected in May 2018 and two bridges were selected for field testing. Chapter 7 of this report includes in-depth discussion of the field testing program.

4.7 Submit Technical Memorandum No. 1 and Panel Meeting

Task 7: Submit a technical memorandum and meet with the project technical panel to present the results of Tasks 2-6 and obtain approval for the field experiment plan.

The research team met with the project technical panel on Oct. 12, 2017 to present the findings of the project, and to obtain their feedback and approval for the proposed testing plans. A technical memorandum summarizing the findings of Tasks 2 to 6 was submitted on Oct. 31, 2017. Copies of the presentation slides and the report were uploaded to the SDDOT FTP research site.

4.8 Prepare Field Test Bridges

Task 8: Upon approval of the plan by the technical panel, install instrumentation at the selected bridges, providing the technical panel at least two weeks' notice to allow them to observe the installation. (A member of the SDDOT or local authority must be on site during all activities on bridge sites.)

In the Task 7 panel meeting, it was discussed and approved that the research team would field test only two double-tee bridges selected by the technical panel. Furthermore, the technical panel approved performing the field testing after the laboratory tests (Tasks 11 and 12) when the weather condition was better suited for testing. Based on the field inspection and the site conditions, the research team recommended bridges 51-090-012 and 42-165-153 for field testing. A video conference was held on June 12, 2018 in which the technical panel selected the recommended candidates for field testing and also approved the revised testing plans, which were specifically developed for the selected bridges.

The bridges in Lincoln and Moody counties were instrumented according to the approved testing plans on July 11 and 17 (2018), respectively.

4.9 Perform Inspection and Field Testing

Task 9: Perform visual inspections and load testing at selected bridge sites, providing the technical panel at least two weeks' notice to allow them to observe the testing.

Each selected bridge was extensively inspected at the day of the field testing and a damage map was developed for each bridge. The bridge in Lincoln County (42-165-153) was tested on July 11, 2018, and the bridge in Moody County (51-090-012) was tested on July 17, 2018. Both bridges were tested according to the approved testing plans. Refer to Chapter 7 of this report for the details of the field testing plans.

4.10 Post-Process Field Test Data

Task 10: Analyze field testing results and develop recommendations for load ratings on tested bridges.

Strain data collected from the two double-tee bridge field tests was processed. The girder moment and shear distribution factors and the dynamic load allowance were established for each bridge. The processed data was then used to refine the preliminary load rating method discussed under Task 4. Refer to Chapter 7 of this report for in-depth discussion of the processed data and the recommendations.

4.11 Perform Strength Testing of Salvaged Girders

Task 11: Perform load testing on salvaged girders for an existing double-tee bridge.

The research team was informed that Pennington County, SD, was replacing two double-tee bridges (52-313-265 and 52-319-268) in the summer of 2017. The contractor was contacted and two bridges were inspected. Of the two bridges, one 50-ft long and one 30-ft long double-tee girders were selected for strength testing at SDSU and were delivered to the Lohr Structures Laboratory on Aug. 18, 2017. Both girders were instrumented and tested (50-ft girder was tested on Feb. 13, 2018 and 30-ft girder was tested on April 17, 2018) according to the approved testing plans. Refer to Chapter 8 of this report for in-depth discussion.

4.12 Post Process Strength Test Data

Task 12: Analyze load testing results on salvaged girders to develop recommendations for ultimate capacities and load ratings.

The measured data from the two salvaged girder strength tests was processed including the force-deflection relationships, support reactions, strain profiles, and relative displacements at various locations. The findings were then used to validate the preliminary load rating method discussed under Task 4. Refer to Chapter 8 of this report for in-depth discussion.

4.13 Submit Technical Memorandum No. 2 and Panel Meeting

Task 13: Submit a technical memorandum and meet with the project technical panel to present the results of Task 8-12.

A video conference was held on Oct. 11, 2018 in which the findings of Tasks 8 to 13 were presented. The second technical memorandum including the field and laboratory test plans and measured data was

prepared and submitted to SDDOT on Oct. 19, 2018. Copies of the presentation slides and the report were uploaded to the SDDOT FTP research site.

4.14 Refine Proposed Load Rating Method

Task 14: Using data from the experiments, refine the method that associates bridge load ratings to visual distress and describe the method's applicability and expected accuracy.

The data collected from the literature and the salvaged double-tee girder testing was used to refine the capacity calculation method of damaged double-tee girders. A comprehensive analytical study was performed to develop shear and moment condition factors for damaged double-tee girders. Condition states were generated for all 23 double-tee sections that have been used in the state. Chapter 9 presents the complete description of the work done under this task.

4.15 Submit Technical Memorandum No. 3 and Panel Meeting

Task 15: Submit a technical memorandum and meet with the project technical panel to present the results of Task 14.

The third technical memorandum including the findings of Task 14 was prepared and submitted to SDDOT on December 7, 2018. A video conference was then held on Feb. 20, 2019 to discuss progress. Copies of the presentation slides and the report were uploaded to the SDDOT FTP research site.

4.16 Finalize Proposed Load Rating Method

Task 16: Develop a guidance document briefly summarizing the work performed in this study and presenting techniques to estimate structures' load rating through visual inspection.

A methodology was proposed in Task 4 to load rate distressed double-tee bridges. The data from field and laboratory testing was then used to refine the load rating method. In summary, the capacity components of the load rating equation will be modified using condition factors, and the demand components of the equation will be adjusted based on the condition state of double-tee girder-to-girder longitudinal joints. Refer to Chapter 11 regarding the proposed load rating method.

4.17 Prepare Final Report

Task 17: In accordance with Guidelines for Performing Research for the South Dakota Department of Transportation, prepare a final report and executive summary of the research methodology, findings, conclusions, and recommendations.

The present report is a comprehensive final report prepared by the research team according to the SDDOT guidelines. The report documents all aspects of the project and lists the recommendations proposed for load rating of damaged double-tee girder bridges.

4.18 Make Executive Presentation

Task 18: Make an executive presentation to the SDDOT Research Review Board at the conclusion of the project.

The research team made an executive presentation to the SDDOT Research Review Board on June 4, 2019.

5 LITERATURE REVIEW

The American Society of Civil Engineers (ASCE) rated the USA's 614,387 bridges with a C+ grade meaning they are in a fair condition but require attention (ASCE Infrastructure Report Card, 2017). ASCE reported 40% of the nation's bridges are at least 50-years old, the average age of the U.S. bridges, currently 43 years, is increasing, and many are approaching the end of their design life. The Federal Highway Administration (FHWA) reported that 25% of the nation's bridges need repair, rehabilitation, or total replacement (FHWA-ABC, 2017), with 13% being structurally deficient and 12% obsolete. FHWA estimated that \$12.8 billion is annually needed to maintain the U.S. bridges in service while the backlog of rehabilitation projects is \$123 billion. Our nation faced an historic period of bridge construction 50 years ago. Today, we face another historic period but now the challenge is to repair and reconstruct those bridges.

Approximately 188 million trips are taken per day across the deficient bridges in the USA (ASCE Infrastructure Report Card, 2017). Because of the lack of sufficient funding to fully restore all distressed bridges, proper measures should be devised to accurately estimate the safe service loads of bridges to prevent catastrophic events. One example is the collapse of the I-35W Mississippi River bridge in Minneapolis, Minnesota on August 1, 2007, which showed that deficient bridges can jeopardize the public safety thus their serviceability should be properly evaluated.

Bridges are required to be visually inspected every two years according to the FHWA Bridge Inspector's Reference Manual (2012). There are generally two methods to quantitatively evaluate the condition state of bridge components: (1) FHWA method with a scale of "0" to "9" in which "9" means the component is in an excellent condition and "0" means the component is significantly damaged and is out of service, and (2) method presented in the AASHTO Manual for Bridge Element Inspection (2013) in which four different condition states (Good, Fair, Poor, and Severe) are considered for bridge elements.

Bridge inspection is important to collect condition information on each bridge element. Accurate knowledge of bridge conditions helps to identify needed maintenance, repair, and replacement. Based on the inspection results, load rating might be needed, which is to estimate the safe live load capacity of a bridge based on existing structural conditions, material properties, and loads and traffic conditions at the bridge site. Load rating is usually carried out on aged or distressed bridges, or those that encounter higher loads than design loads. Load rating improves the safety of a bridge by posted limitations.

Literature including national specifications, manuals, and guidelines was reviewed to identify inspection methods, load rating methods, bridge element damage types and condition states, and the capacity of aged and distressed elements. A summary of the findings is presented herein.

5.1 Bridge and Bridge Element Inspection

Frequent bridge inspections are needed to monitor the condition of bridges and their elements for proper maintenance and possible repair or replacement. Several States Department of Transportation (DOTs) including SDDOT (BSCM, 1998) have developed inspection manuals for bridges. In addition to state manuals, two nation-wide inspection manuals are available for bridge engineers to produce consistent reports across the nation: (1) the Bridge Inspector's Reference Manual (2012) by FHWA and the National Highway Institute (NHI), and (2) the Manual for Bridge Element Inspection (2013) by AASHTO. The former provides a 10-scale condition rating (Table 5.1) for bridge components including decks, superstructures, substructures, channels, and culverts. The latter provides four different condition states (Good, Fair, Poor,

and Severe) for different bridge elements. One example of the AASHTO rating guide for prestressed girders is presented in Table 5.2.

Of the two manuals and the rating methods discussed above, the AASHTO Manual for Bridge Element Inspection (2013) is better suited for double-tee bridges since (1) element-level condition states are needed for successful evaluation of double-tee bridges, and (2) the damage of a double-tee bridge can be inclusively described with four condition states to be incorporated later as the input to AASHTO load rating methods (see Sec. 5.3). The FHWA 10-scale rating can be used for double-tee bridges but it is more involved and may not affect the outcome of the load rating.

Table 5.1 – FHWA Component Condition Rating

Code	Description
N	NOT APPLICABLE
9	EXCELLENT CONDITION
8	VERY GOOD CONDITION - no problems noted.
7	GOOD CONDITION - some minor problems.
6	SATISFACTORY CONDITION - structural elements show some minor deterioration.
5	FAIR CONDITION - all primary structural elements are sound but may have minor section loss, cracking, spalling, or scour.
4	POOR CONDITION - advanced section loss, deterioration, spalling, or scour.
3	SERIOUS CONDITION - loss of section, deterioration, spalling, or scour have seriously affected primary structural components. Local failures are possible. Fatigue cracks in steel or shear cracks in concrete may be present.
2	CRITICAL CONDITION - advanced deterioration of primary structural elements. Fatigue cracks in steel or shear cracks in concrete may be present or scour may have removed substructure support. Unless closely monitored it may be necessary to close the bridge until corrective action is taken.
1	"IMMINENT" FAILURE CONDITION - major deterioration or section loss present in critical structural components, or obvious vertical or horizontal movement affecting structure stability. Bridge is closed to traffic but corrective action may put bridge back in light service.
0	FAILED CONDITION - out of service; beyond corrective action.

Table 5.2 – AASHTO Damage Types and Condition States for Prestressed Girders

Defect Types	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Delamination/Spall/ Patched Area (1080)	None	Delaminated. Spall 1 in. or less deep or 6 in. or less in diameter. Patched area that is sound.	Spall greater than 1 in. deep or greater than 6 in. diameter. Patched area that is unsound or showing distress. Does not warrant structural review.	The condition warrants a structural review to determine the effect on strength or serviceability of the element or bridge; OR a structural review has been completed and the defects and the defects impact strength or serviceability of the element or bridge.
Exposed Rebar (1090)	None	Present without measurable section loss.	Present with measurable section loss, but does not warrant structural review.	The condition warrants a structural review to determine the effect on strength or serviceability of the element or bridge; OR a structural review has been completed and the defects and the defects impact strength or serviceability of the element or bridge.
Exposed Prestressing (1100)	None	Present without section loss.	Present with section loss, but does not warrant structural review.	The condition warrants a structural review to determine the effect on strength or serviceability of the element or bridge; OR a structural review has been completed and the defects and the defects impact strength or serviceability of the element or bridge.
Cracking (1110)	Width less than 0.004 in. or spacing greater than 3 ft. Insignificant cracks or moderate-width cracks that have been sealed.	Width 0.004 – 0.009 in. or spacing 1.0 – 3.0 ft. Unsealed moderate-width cracks or unsealed moderate pattern (map) cracking.	Width greater than 0.009 in. or spacing less than 1 ft. Wide cracks or heavy pattern (map) cracking.	The condition warrants a structural review to determine the effect on strength or serviceability of the element or bridge; OR a structural review has been completed and the defects and the defects impact strength or serviceability of the element or bridge.
Efflorescence/Rust Staining (1120)	None	Surface white without build-up or leaching without rust straining.	Heavy build-up with rust staining.	The condition warrants a structural review to determine the effect on strength or serviceability

				of the element or bridge; OR a structural review has been completed and the defects and the defects impact strength or serviceability of the element or bridge.
Damage	Not applicable	The element has impact damage. The specific damage caused by the impact has been captured in condition state 2 under the appropriate material defect entry.	The element has impact damage. The specific damage caused by the impact has been captured in condition state 3 under the appropriate material defect entry.	The element has impact damage. The specific damage caused by the impact has been captured in condition state 4 under the appropriate material defect entry.

From: AASHTO Manual for Bridge Element Inspection (2011) – Section 3.3.1.6. The crossed out text indicates the revision by AASHTO.

5.2 Load Rating

Load rating is performed to determine the safe live load capacity of bridges. Load rating depends on several factors including:

- existing structural conditions,
- element material properties,
- applied loads and traffic conditions.

Load rating of bridges can be carried out through experimental or analytical methods according to the AASHTO Manual for Bridge Evaluation (2011). Experimental load rating is done by load testing a bridge but keeping the bridge in the linear-elastic range. Analytical methods include: (i) allowable stress rating (ASR), (ii) Load Factor Rating (LFR), and (iii) Load and Resistance Factor Rating (LRFR). ASR was the first generation of the analytical load rating utilizing unfactored loads and allowable stresses. When design codes were upgraded with the Load Factor method, the load rating was also upgraded to LFR in which loads were factored. The current design method for bridges is based on Load and Resistance Factor Design (LRFD). LRFR is a load rating methodology based on LRFD.

The result of an analytical load rating method is a number. A number equal to or greater than unity means the bridge is safe and serviceable under the live load included in the rating. A number less than one indicates that the bridge is not safe thus a load limit should be posted.

All three loading rating methods are currently allowed by the AASHTO Manual for Bridge Evaluation (2011). Of the three, LRFR was selected by the project technical panel to be used in this study since it conforms to current AASHTO design methods. A brief summary of LRFR is presented herein.

5.2.1 Load and Resistance Factor Rating (LRFR)

LRFR is the current method for load rating of bridges consistent with current AASHTO LRFD bridge design specifications (2014). LRFR is performed in three load levels: (1) design live loads, (2) legal loads, and (3) permit loads.

5.2.1.1 Design Load Rating

Design load rating is the first level of the evaluation of bridges based on the HL-93 Loading and LRFD design specifications to check whether a bridge meets the current code requirements or not. If not, legal or permit load rating should be carried out.

5.2.1.2 Legal Load Rating

Legal load rating is the second level of the assessment of bridges. It provides a single safe live load capacity for a specific truck type according to AASHTO or state legal loads. The results of this load rating can be used for load posting or bridge strengthening.

5.2.1.3 Permit Load Rating

Permit load rating checks the safety and serviceability of bridges, which is the third level rating applied only to bridges having sufficient capacity for the AASHTO legal load. For example, the permit load rating is performed for overweight trucks.

5.2.1.4 LRFR Load-Rating Equation

Load rating of a bridge using the LRFR method is calculated through:

$$RF = \frac{C - (\gamma_{DC})DC - (\gamma_{DW})(DW) \pm (\gamma_P)(P)}{(\gamma_{LL})(LL + IM)} \quad (\text{Eq. 5.1})$$

For the Strength Limit State:

$$C = \varphi_c \varphi_s \varphi R_n \quad (\text{Eq. 5.2})$$

$$\varphi_c \varphi_s \geq 0.85 \quad (\text{Eq. 5.3})$$

For the Service Limit State.

$$C = f_R \quad (\text{Eq. 5.4})$$

where,

RF = Rating factor,

C = Capacity,

f_R = Allowable stress specified in the LRFD code,

R_n = Nominal member resistance,

DC = Dead load effect due to structural components and attachments,

DW = Dead load effect due to wearing surface and utilities,

P = Permanent loads other than dead loads,

LL = Live load effect,

IM = Dynamic load allowance,

γ_{DC} = LRFD load factor for structural components and attachments,

γ_{DW} = LRFD load factor for wearing surface,

γ_P = LRFD Load factor for permanent loads other than dead loads = 1.0,

γ_{LL} = Evaluation live load factor,

φ_c = Condition factor,

φ_s = System factor,

φ = LRFD resistance factor.

The load rating is performed at each applicable limit state and load effect with the minimum value as the governing rating factor. Tables 5.3 to 5.7 present some of the LRFR parameters. Complete information can be found in the AASHTO Manual for Bridge Evaluation (2011).

Table 5.3 – Limit States and Load Factors for Load Rating

Bridge Type	Limit	Dead Load,	Dead Load	Design Load	Design Load	Legal	Permit
	State	Load,	Load	Inventory	Design Load	Load	Load
		γ_{DC}	γ_{DW}	γ_{LL}		γ_{LL}	γ_{LL}
Prestressed Concrete	Strength I	1.25	1.5	1.75		Table 2.4	-
Prestressed Concrete	Strength II	1.25	1.5	-		-	Table 2.5
Prestressed Concrete	Service III	1	1	0.8		1	-
Prestressed Concrete	Service I	1	1	-		-	1

Table 5.4 – Generalized Live Load Factors (γ_{LL})

Traffic Volume	Load Factor for Routine Commercial	Load Factor for Specialized Hauling
(One direction)	Traffic: Type 3, Type 3S2, Type 3-3 and Lane Loads	Vehicles: NRL, SU4, SU5, SU6, and SU7
Unknown	1.8	1.6
ADTT \geq 5000	1.8	1.6
ADTT = 1000	1.65	1.4
ADTT \leq 100	1.4	1.15

Table 5.5 – Permit Load Factors

Permit Type	Frequency	Loading Condition	DF(a)	ADTT (one direction)	Load Factor by Permit Weight(b)	Load Factor by Permit Weight(b)
					Up to 100 kips	\geq 150 kips
Routine or Annual	Unlimited Crossings	Mix with traffic(other vehicles may be on the bridge)	Two or more lanes	>5000	1.8	1.3
Routine or Annual	Unlimited Crossings	Mix with traffic(other vehicles may be on the bridge)	Two or more lanes	1000	1.6	1.2
Routine or Annual	Unlimited Crossings	Mix with traffic(other vehicles may be on the bridge)	Two or more lanes	<100	1.4	1.1
					All Weights	All Weights
Special or Limited Crossing	Single-Trip	Escorted with no other vehicles on the bridge	One Lane	N/A	1.15	1.15
Special or Limited Crossing	Single-Trip	Mix with traffic(other vehicles may be on the bridge)	One Lane	>5000	1.5	1.5
Special or Limited Crossing	Single-Trip	Mix with traffic(other vehicles may be on the bridge)	One Lane	1000	1.4	1.4

Special or Limited Crossing	Single-Trip	Mix with traffic(other vehicles may be on the bridge)	One Lane	<100	1.35	1.35
Special or Limited Crossing	Multiple-Trips(less than 100 crossings)	Mix with traffic(other vehicles may be on the bridge)	One Lane	>5000	1.85	1.85
Special or Limited Crossing	Multiple-Trips(less than 100 crossings)	Mix with traffic(other vehicles may be on the bridge)	One Lane	1000	1.75	1.75
Special or Limited Crossing	Multiple-Trips(less than 100 crossings)	Mix with traffic(other vehicles may be on the bridge)	One Lane	<100	1.55	1.55

(a) DF=LRFD distribution factor. When one-lane distribution factor is used, the built-in multiple presence factor should be divided out.

(b) For routine permits between 100 kips and 150 kips, interpolate the load factor by weight and ADTT value. Use only axle weights on the bridge.

Table 5.6 – Condition Factor (ϕ_c)

Structural Condition of Member	ϕ_c
Good or Satisfactory	1
Fair	0.95
Poor	0.85

Table 5.7 – System Factor (ϕ_s)

Superstructure Type	ϕ_s
Welded Members in Two-Girder/Truss/Arch Bridges	0.85
Riveted Members in Two-Girder/Truss/Arch Bridges	0.9
Multiple Eyebar Members in Truss Bridges	0.9
Three-Girder Bridges with Girder Spacing 6 ft	0.85
Four-Girder Bridges with Girder Spacing \leq 4 ft	0.95
All Other Girder Bridges and Slab Bridges	1
Floorbeams with Spacing $>$ 12 ft and Noncontinuous Stringers	1
Redundant Stringer Subsystems between Floorbeams	0.85

Load factors are amplifying factors used in design equations to increase loads. Live load factors provide uniform and acceptable level of reliability for load rating. Live load factors in the AASHTO Manual for Bridge Evaluation (2011) are based on the traffic data available for the site. Dynamic load allowance (IM) is used to increase the applied static force effect to account for the dynamic interaction between the bridge and moving vehicles. Both live load factor and dynamic load allowance vary in each level of load rating.

5.2.2 Material Mechanical Properties for Old Bridges

According to the AASHTO Manual for Bridge Evaluation (2011), Tables 5.8 to 5.10 can be used when properties of bridge materials are unknown. For prestressed concrete, the concrete compressive strength in Table 5.8 can be increased by 25 percent.

Table 5.8 – Minimum Compressive Strength of Concrete by Year of Construction

Year of Construction	Compressive Strength, f_c , ksi
Prior to 1959	2.5
1959 and Later	3

Table 5.9 – Yield Strength of Reinforcing Steel

Type of Reinforcing Steel	Yield Strength, f_y , ksi
Unknown steel constructed prior to 1954	33
Structural grade	36
Billet or intermediate grade, Grade 40, and unknown steel constructed during or after 1954	40
Rail or hard grade, Grade 50	50
Grade 60	60

Table 5.10 – Tensile Strength of Prestressing Strand

Year of Construction	Tensile Strength, f_{pu} , ksi
Prior to 1963	232
1963 and Later	250

5.3 Field Testing of Bridges

The behavior of existing bridges can be investigated through two types of field testing: (1) long-term health monitoring, and (2) live load testing. The long-term health monitoring is used to record live load structural response (e.g. to random truck passage and wind gusts) and to monitor the bridge stiffness degradation to identify the deteriorating components. Live load (truck) testing is to determine the live load response and the safe live load capacity of bridges. For load testing, loading may be static or dynamic by changing the speed of the test vehicle. The results of static and dynamic field testing for a bridge can be used to determine “load distribution factors” and “dynamic load allowance” specific to the test bridge (e.g. Seo et al. 2015).

5.3.1 Classification of Load Tests

Load testing is the observation of performance of a bridge under a controlled and predetermined load without affecting the bridge serviceability and performance. Generally, there are two types of load testing for bridges: (1) diagnostic test, and (2) proof test. Diagnostic tests are performed to evaluate the response of a bridge under the applied loads. The load transfer mechanism of the test bridge can be determined by installing strain and deflection sensors on structural members. Proof tests are carried out to determine the maximum safe live load capacity of the test bridge. It is the only way to verify the serviceability of distressed and aged bridges.

5.3.2 Type of Load Tests

Load testing can be further classified into either static or dynamic load testing. Static load testing is done using stationary or a slow-moving load (e.g. a truck passing the bridge with a speed of 5 mph) while a dynamic load test is performed using a time-varying load (e.g. a truck with a speed of 55 mph). Dynamic load allowance (IM) can be determined using these tests. Diagnostic load tests can be either static or dynamic but proof load tests are usually performed with static loads.

5.3.3 Benefits of Load Tests

Load tests provide sufficient data to determine the safe live load capacity of old or distressed bridges. For some bridges, response of bridge members cannot be analytically determined because of a lack of sufficient information or detailing. Retrofitted or strengthened bridges cannot also be accurately load rated using analytical methods due to the unknown behavior of the various elements of the repaired bridge. In these cases, load testing can provide more realistic safe live load capacities than analytical methods.

5.3.4 Load Test Measurements

Various devices are usually used to measure strains, deflections, rotations, and dynamic characteristics of a bridge. Electrical resistance gauges, strain transducers or acoustic strain gauges can be utilized to measure strains of the test bridge. Linear Variable Differential Transformers (LVDT) can be used to measure relative deflections. Mechanical tilt meters installed on girder webs can measure rotations. Accelerometers can also be used in dynamic tests to determine dynamic characteristics of the test bridge such as modal frequencies, mode shapes, and damping ratios.

Before any field testing, a preliminary model can be developed to identify critical locations to place sensors. The use of strain transducers are required as the minimum for field testing; however, other devices can be installed to collect more information.

5.3.5 Bridge Load Testing in Literature

Several studies have performed bridge load testing such as Nowak et al. (1996), Phares et al. (2005), Qiao (2012), Setty (2012), Schiff et al. (2006), Sanayei et al. (2015), Seo et al. (2015), and Hogan et al. (2016). Of these, the study by Setty (2012) was selected and summarized herein to serve as an example.

Setty (2012) performed load testing on a 43-year old bridge three 47.83-ft equal-span prestressed concrete box beam bridge (Fig. 5.1) with a 15-degree skew. The bridge deck consisted of solid box girders with a height of 21 in. and a width of 36 in. Twenty seven 3/8-in. diameter strands were used in each girder. Exterior beam concrete spalling, exposure of shear reinforcement and prestressing strands, and corrosion of exposed steel were reported in a pretest inspection.

Strain gauges and string potentiometers were installed at two sections of the bridge as shown in Fig. 5.2, which were selected to measure the maximum positive and negative moments in the west span. Thirty six strain gauges and 16 string potentiometers were utilized. Four three-axle loaded trucks were placed over the bridge in eight different positions as shown in Fig. 5.3 as static testing. For dynamic testing, the heaviest truck available in the test was used with two speeds of 10 and 35 mph.

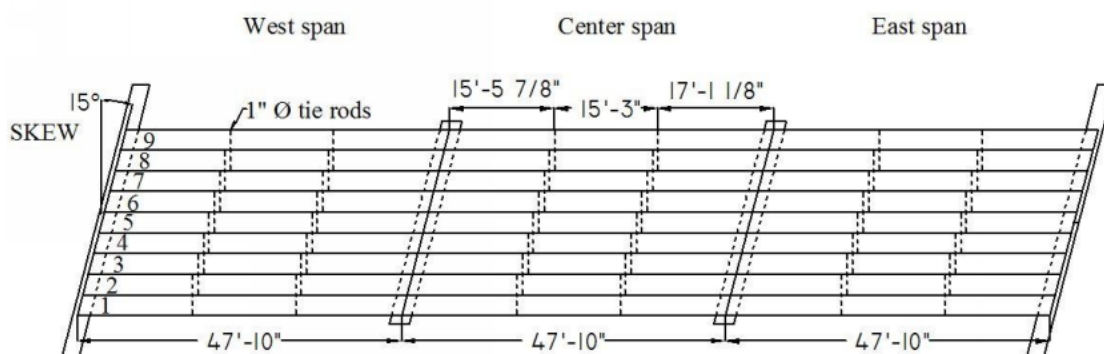


Figure 5.1 – Plan View of Test Bridge (Setty, 2012)

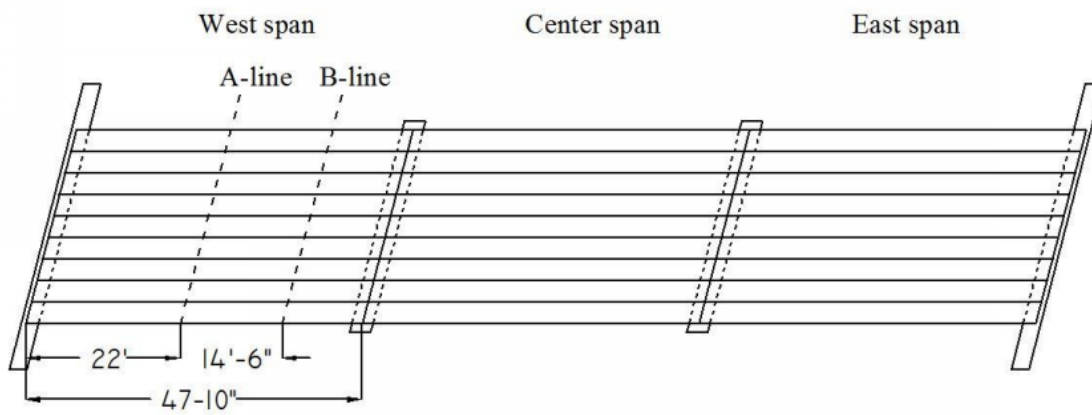


Figure 5.2 – Sensor Locations (Setty, 2012)



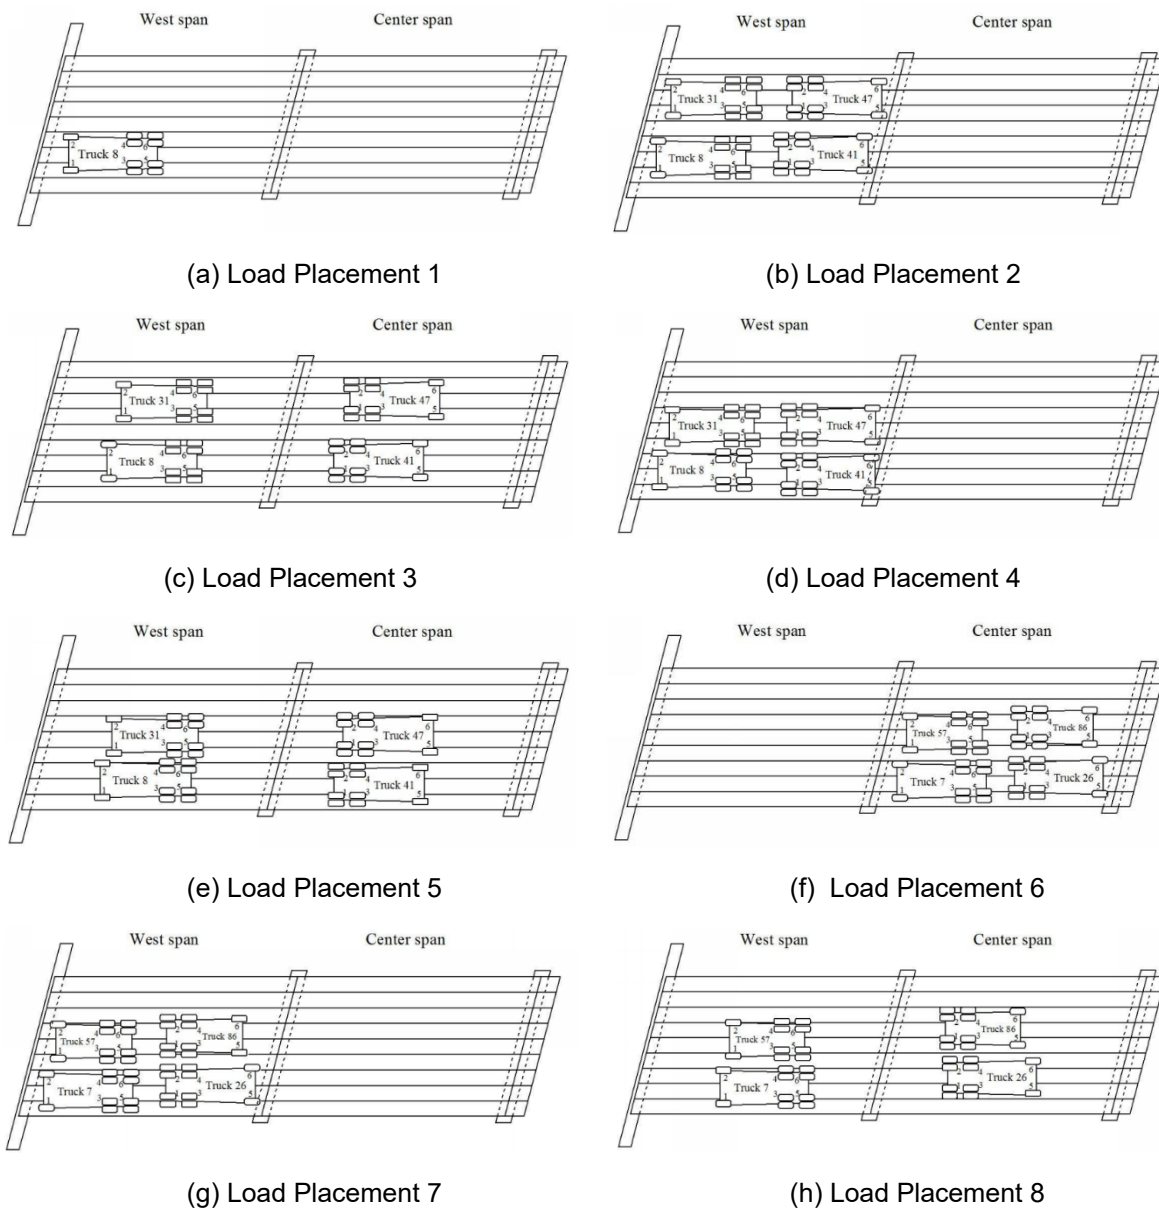


Figure 5.3 – Placement of Trucks for Static Testing (Setty, 2012)

Dynamic load allowance (referred to as DLA in this study) was calculated using the maximum static and dynamic deflections. Figure 5.4 shows the A-Line dynamic response history for beam 8 (Fig. 5.1) with a speed of 10 and 35 mph, respectively. It can be seen that the increase in the truck speed did not affect the maximum deflections. Figure 5.5 shows the maximum static and dynamic deflections for all beams. The dynamic load allowance calculated using the measured data was 1.10, which was less than the AASHTO LRFD value of 1.33 indicating that the AASHTO requirement was conservative.

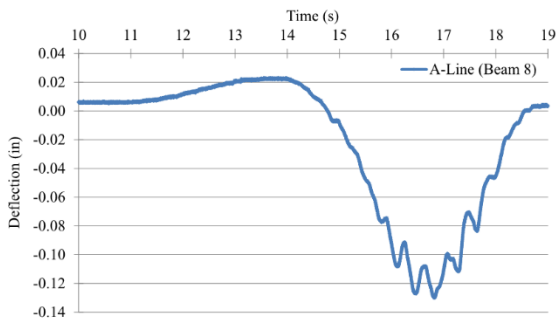

(a) Dynamic Deflection (10 mph)

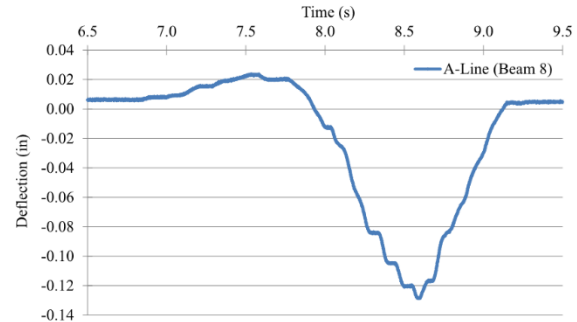

(b) Dynamic Deflection (35 mph)

Figure 5.4 – A-Line Dynamic Response for Beam 8 (Setty, 2012)

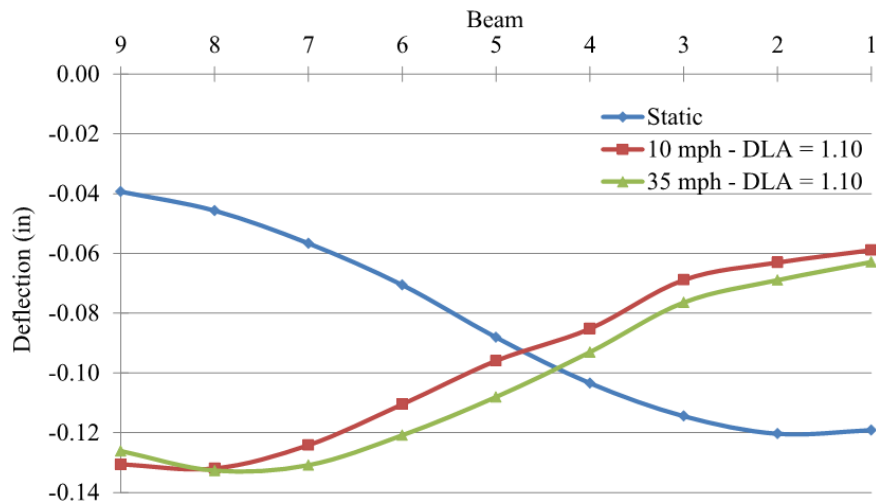


Figure 5.5 – Dynamic and Static A-Line Deflections (Setty, 2012)

5.4 Damage Type and States for Bridge Elements

The AASHTO Manual for Bridge Element Inspection (2013) listed possible damages for different bridge elements. Each element and damage has a specific identification number in this manual. For example, the common damage seen in prestressed girders are:

- Delamination/Spall/Patched Area (1080)
- Exposed Rebar (1090)
- Exposed Prestressing (2200)
- Cracking (1110)
- Efflorescence/Rust staining (1120)
- Damage (7000)

This AASHTO manual also provides four damage states per damage type, which are usually defined using qualitative measures. For example, if the concrete spalling is less than 1-in. deep or 6-in. in diameter, the damage condition state is “Fair”. When an exposed bar has measurable section loss without any warrant of structural review (which means a load rating is not required), the condition state is “Poor”.

The AASHTO Manual for Bridge Element Inspection (2013) has been selected as the baseline to define damage types and condition states for double-tee bridges. However, the definitions were revised to be more quantitative rather than qualitative as discussed in next chapter.

5.5 Capacity of Aged Members

The nominal capacity of bridge members is calculated using the AASHTO LRFD (2014) methods. For example, the nominal flexural resistance for a prestressed flanged section is taken as:

$$M_n = A_{ps}f_{ps}\left(d_p - \frac{a}{2}\right) + A_s f_s \left(d_s - \frac{a}{2}\right) - A'_s f'_s \left(d'_s - \frac{a}{2}\right) + 0.85f'_c (b - b_w)h_f \left(\frac{a}{2} - \frac{h_f}{2}\right) \quad (\text{Eq. 5.5})$$

where

M_n = The nominal moment capacity.

A_{ps} = The area of prestressing steel (in.²).

f_{ps} = The average stress in prestressing steel at nominal bending resistance (ksi).

d_p = The distance from extreme compression fiber to the centroid of prestressing tendons (in.).

A_s = The area of nonprestressed tension reinforcement (in.²).

f_s = The stress in the mild steel tension reinforcement at nominal flexural resistance (ksi).

d_s = The distance from extreme compression fiber to the centroid of nonprestressed tensile reinforcement.

A'_s = The area of compression reinforcement (in.²).

d'_s = The distance from extreme compression fiber to the centroid of compression reinforcement (in.).

f'_c = The specified compressive strength of concrete at 28 days, unless another age is specified (ksi).

b = The width of the compression face of the member; for a flange section in compression.

b_w = The web width or diameter of a circular section (in.).

β_1 = The stress block factor specified in AASHTO LRFD Article 5.7.2.2.

h_f = The compression flange depth of an I or T member (in.).

a = $c\beta_1$; The depth of equivalent stress block.

$$f_{ps} = f_{pu} \left(1 - k \frac{c}{d_p}\right) \quad (\text{Eq. 5.6})$$

where

f_{pu} = The specified tensile strength of prestressing strand (ksi).

$$k = 2(1.04 - \frac{f_{py}}{f_{pu}}) \quad (\text{Eq. 5.7})$$

c = The distance between neutral axis and compression face as defined in Eq. 5.8.

f'_s = The stress in the mild steel compression reinforcement at nominal flexural resistance (ksi).

$$c = \frac{A_{ps}f_{pu} + A_s f_s - A'_s f'_s}{0.85f_c \beta_1 b + k A_{ps} \frac{f_{pu}}{d_p}} \quad (\text{Eq. 5.8})$$

where, b is the width of compression flange.

AASHTO LRFD (2014) does not recognize any methods for the capacity estimation of damaged members. However, these methods might be valid for distressed members if sectional and material properties are modified to include the damage. In an attempt to verify the AASHTO capacity estimation methods for salvaged girders, five studies were selected from the literature in which full-scale bridge girders including one 48-year old 53-ft long double-tee girder were tested to failure (Table 5.11). It can be seen that using the measured material properties (with no sectional property modifications since the damage was not significant in these specimens), the calculated moment capacity was only 5.6% different than the measured moment capacity for all girders on average indicating that current AASHTO methods are valid for aged girders. Nevertheless, full-scale strength testing of damaged double-tee girders is needed to verify these equations for girders with significant damages (Refer to Ch. 8).

Table 5.11 – Measured and Calculated Flexural Capacities of Salvaged Bridge Girders

Reference	Section Type	Age (yr)	Span (ft)	Girder Damage Type	Width (ft)	Depth (in.)	f'_c (ksi)	f_y (ksi)	Measured Moment (k-ft)	Calculated Moment (k-ft)
Shenoy et al. (1991)	Box	27	54	Minor concrete cracking and spalling	36	27	7.1	150	936.9	987.21
Halsey et al. (1996)	Inverted Tee	40	29	Minor deterioration at the girder edges	12	12	11.79	260	353	339
Labia et al. (1997)	Box	20	70	No apparent damage	48	33	5.5	270	2520	2836
Eder et al. (2010)	I	50	45	Longitudinal cracks along post-tensioning tendons	16	40	9.8	150	1356	1500
Pettigrew et al. (2016)	Double-Tee	48	53	Deteriorated and exposure of rebar at some location	84	28	5.6	278	1134.6	1144

It is worth mentioning that the LRFR method in the AASHTO Manual for Bridge Evaluation (2011) uses three general condition factors to account for deterioration (Table 5.12). These factors are for whole superstructure not bridge elements. However, this method might be a viable technique to include the effect of damage types and condition states in the capacity calculation of double-tee girders. The modified capacity could then be used in load rating of damaged double-tee bridges.

Table 5.12 – AASHTO LRFR Condition Factors

Structural Condition of Member	Superstructure Condition Rating in NBI Format	ϕ_c
Good or Satisfactory	6 or higher	1.0
Fair	5	0.95
Poor	4 or lower	0.85

6 DAMAGE CATEGORIZATION FOR DOUBLE-TEE GIRDERS

Damage types and condition states for different bridge components were defined in the AASHTO Manual for Bridge Element Inspection (2015) and the South Dakota Bridge System Code Manual (BSCM, 1998). One example of damage type and condition states for prestressed girders according to the AASHTO manual was presented in Table 5.2. The AASHTO and SDDOT definition of condition states are general and mainly qualitative rather than quantitative. Nevertheless, more specific definition is needed to successfully relate visual distresses to load rating parameters.

6.1 Proposed Damage Types and Condition States for Double-Tee Girders

In an attempt to minimize deviation from current codes, the damage types and condition states for double-tee bridges were adopted from those presented in the AASHTO Manual for Bridge Element Inspection (2015) and the South Dakota Bridge System Code Manual (1998) for prestressed girders. Quantitative definitions were proposed for damage condition states specific to double-tee girders (Tables 6.1 and 6.2). One set of definitions was specific to the double-tee stem (Table 6.1) and another set of the definitions was for the double-tee flange (Table 6.2). This was done since the damage of the stem and flange may affect the shear and moment capacities in different ways.


Figure 6.1 shows samples of damage types and condition states observed for double-tee bridges located in South Dakota. The identification of the damage types and condition states is expected to be straightforward with minimal variations when a bridge is inspected by different inspectors since the proposed definitions are mainly quantitative.

Table 6.1 – Damage Types and Condition States for Prestressed Double-Tee Girder Stem

Damage Type	Condition States		Condition States	
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion.
Exposed Transverse Rebar	None	Minor corrosion of the reinforcement with minimal section loss.	Severe corrosion of only one leg of transverse reinforcement.	Severe corrosion of all legs of transverse reinforcement in a section.
Exposed Longitudinal Prestressing	None	50% section loss due to corrosion in the extreme tendon.	100% section loss due to corrosion in the extreme tendon.	Section loss due to corrosion in the two or more tendons.
Cracking	Insignificant cracks or moderate-width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.

Table 6.2 – Damage Types and Condition States for Prestressed Double-Tee Girder Top Flange

Damage Type	Condition States		Condition States	
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area/Aberration	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion.
Exposed Rebar	None	Minor corrosion of the outer layer of reinforcement with minimal section loss.	Severe corrosion of only the outer layer of reinforcement.	Severe corrosion of the outer and inner layers of reinforcement.
Cracking	Insignificant cracks or moderate width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.
Girder-to-Girder Longitudinal Joint Deterioration	None	Minimal deterioration, no sign of leakage.	Discrete signs of seepage along the joint, minor corrosion of steel plates.	Seepage along the joint, severe corrosion of steel plates.

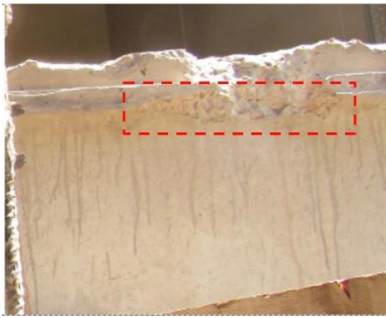

(a) Stem Cover Deterioration (CS-2)



(b) Stem Cover Deterioration (CS-3)



(c) Stem Cover Deterioration (CS-4)




(d) Flange Cover Deterioration (CS-2)



(e) Flange Cover Deterioration (CS-3)



(f) Flange Cover Deterioration (CS-4)

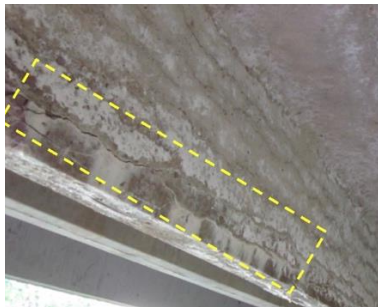

(g) Stem Cracking (CS-2)


N/A



(i) Stem Cracking (CS-4)



(j) Flange Cracking (CS-2)

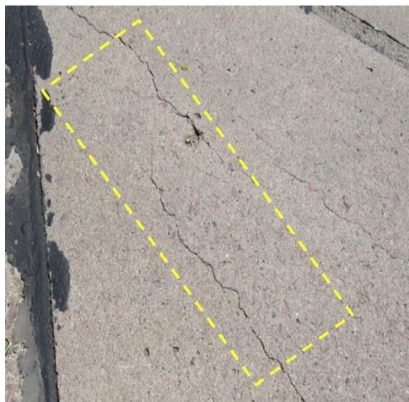

(k) Flange Cracking (CS-3)


N/A

(l) Flange Cracking (CS-4)

Figure 6.1 – Sample Damage Types and Conditions States for Prestressed Double-Tee Girders



(m) Flange Girder to Girder Longitudinal Deterioration (CS-2)

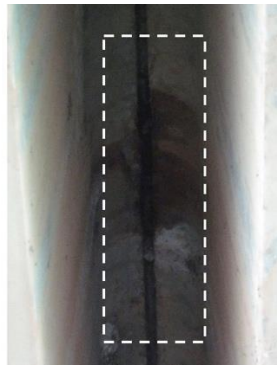

(n) Flange Girder to Girder Longitudinal Join Deterioration (CS-3)

N/A

(o) Flange Girder to Girder Longitudinal Joint Detrioration (CS-4)



(p) Stem Exposure of Strand (CS-2)

N/A

(q) Stem Exposure of Strand (CS-3)

N/A

(r) Stem Exposure of Strand (CS-4)



(s) Stem Exposure of Transverse Rebar (CS-1)/Stem Cover Deterioration CS (4)




(t) Stem Exposure of Transverse Rebar (CS-2)



(u) Stem Exposure of Transvers Rebar (CS-3)



(v) Flange Exposure of Rebar (CS-1) & Flange Cover Deterioration (CS-4)

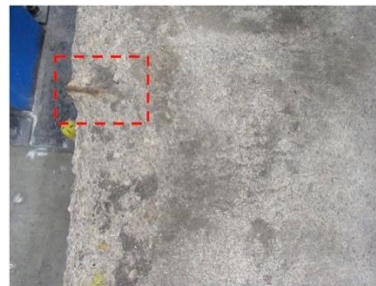

(w) Flange Exposure of Rebar (CS-2)

N/A

(x) Flange Exposure of Rebar (CS-3)

Figure 6.1 – Continued

6.2 Damage Location

It is important to identify the location of each damage for successful load rating. Table 6.3 presents a matrix for double-tee bridge damages to be prepared by the field inspector for an accurate load rating.

Table 6.3 – Damage Matrix for Prestressed Double-Tee Girder Bridges

Component	Damage Type	Damage Location	Condition State
Stem of Girder	Cover Damage	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.1)
Stem of Girder	Exposed Transverse Rebar	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.1)
Stem of Girder	Exposed Longitudinal Prestressing	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.1)
Stem of Girder	Cracking	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.1)
Flange of Girder	Cover Damage	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.2)
Flange of Girder	Exposed Rebar	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.2)
Flange of Girder	Cracking	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.2)
Girder to Girder Joint	Longitudinal Joint Deterioration	0, 0.25L or 0.5L	1, 2, 3, or 4 (Table 6.2)

Note: L is the bridge span length

6.3 Frequency of Damages for South Dakota Double-Tee Bridges

The South Dakota Department of Transportation (SDDOT) provided an extensive database of double-tee bridge inspection photographs. An access to Bridge Management database (BrM) was also provided. In addition, more than 375 inspection reports were collected from Brosz Engineering and Clark Engineering.

The inspection database was comprehensively reviewed to identify the frequency of each damage for South Dakota double-tee bridges using the proposed damage types and condition states (Tables 6.1 and 6.2). Tables 6.4 and 6.5 present a summary of the findings of the evaluation. It can be seen that the most frequent double-tee stem damages are the cover deterioration and the cracking. Furthermore, the most common double-tee flange damages are the cover deterioration and the girder-to-girder longitudinal joint deterioration.

Table 6.4 – Frequency of Damage for South Dakota Double-Tee Girder Stem

Damage Type	Condition States	Condition States	Condition States	Condition States	Total
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/Spall/Patched Area	100	75	29	34	238
Exposed Transverse Rebar	3	1	0	0	4
Exposed Longitudinal Prestressing	4	2	1	1	8
Cracking	35	28	17	3	83

Table 6.5 – Frequency of Damage for South Dakota Double-Tee Girder Top Flange

Damage Type	Condition States	Condition States	Condition States	Condition States	Total
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/Spall/Patched Area/Aberration	118	70	15	21	224
Exposed Rebar	1	1	0	0	2
Cracking	46	17	10	3	76
Girder-to-Girder Longitudinal Joint Deterioration	1	16	82	0	99

6.4 Frequency of Number of Spans and Span Length

Table 6.6 presents the frequency of the span length and the number of spans for South Dakota double-tee bridges, which their geometry was available in the inspection database. It can be seen that the most common double-tee bridges in South Dakota are single-span with a span length of 40 ft (12.19 m) to 60 ft (18.3 m).

Table 6.6 – Frequency of Span Length and Number of Spans for South Dakota Double-Tee Bridges

Girder Span Length (ft)	Number of Spans		Number of Spans		Number of Spans	
	One	Two	Three	Four	Five	
10 to 20	0	1	2	0	0	
20 to 30	36	1	14	0	1	
30 to 40	37	4	32	1	0	
40 to 50	68	10	30	0	0	
50 to 60	64	4	26	0	1	
60 to 70	36	2	4	0	0	
70 to 80	2	0	0	0	0	
80 to 90	1	0	0	0	0	
90 to 100	3	0	0	0	0	
100 to 110	1	0	0	0	0	

Note: 1 ft = 0.3048 m.

6.5 Frequency of Girder Depth

Table 6.7 presents the frequency of the girder depth for South Dakota double-tee bridges for which data was available in the inspection database. It can be seen that the 23-in. (584-mm) deep double-tee girders have been used more often than 30-in. (762-mm) deep double-tee girders in this sample.

Table 6.7 – Frequency of Girder Depth for South Dakota Double-Tee Bridges

Girder Depth, in. (mm)	Number of Bridges	Percentage
23 (584)	137	65%
30 (762)	74	35%

Note: The total number of double-tee bridges in which their depth was available in inspection reports was 211.

6.6 Frequency of Skewed Double-Tee Bridges

Table 6.8 presents the frequency of skewed double-tee bridges for which data was available. It can be seen that non-skewed bridges have been used more frequently than skewed bridges in this sample.

Table 6.8 – Frequency of Skewed Double-Tee Bridges in South Dakota

Girder End Geometry	Number of Bridges	Percentage
Non-Skewed	100	70%
Skewed	42	30%

Note: The total number of double-tee bridges in which their skew angle was available in inspection reports was 142.

All of the findings of the statistical analysis presented in this chapter were used to identify candidates for field and strength testing.

7 FIELD TESTING OF DOUBLE-TEE BRIDGES

Field testing is an important tool to evaluate the performance of old or deteriorated bridges. This is especially important because bridge live loads have been increasing in design codes (Nowak and Saraf, 1996). Furthermore, 25% of the nation's 600,000 bridges need rehabilitation, repair, or total replacement due to component deteriorations (FHWA-ABC, 2017). Field testing of old or distressed bridges provides insight on (1) how live loads are transferred through different elements, (2) whether a deficient bridge should be posted, repaired, or replaced, (3) what is the safe live load carrying capacity of a bridge, and (4) the accuracy of analytical modeling methods.

The most common type of bridge on South Dakota local roads is a prestressed precast double-tee girder bridge. More than 700 of these bridges are currently in service in South Dakota. In this study, field testing was performed to determine the live load distribution factors and dynamic load allowance factors specific to South Dakota double-tee bridges.

7.1 Selection of Bridge Candidates for Field Testing

As was discussed in the previous chapter, SDDOT and two bridge engineering firms provided double-tee bridge inspection reports. The inspection database was reviewed to identify the prevalence of damage, span length, and other parameters. The following criteria were used to identify bridge candidates for field testing:

1. The girder-to-girder longitudinal joints of bridge candidates should be deteriorated since this has the greatest effect on the live load distribution and demands in a double-tee bridge. More than 90 out of 375 double-tee bridges were identified exhibiting this type of damage (Table 6.5). The condition state for this damage type for 82 of these bridges were "Poor" (or CS-3). No bridge was found with longitudinal joints that had a damage CS-4.
2. The bridge candidate should be single-span, and the span length should be between 40 ft (12.2 m) to 60 ft (18.3 m) because this is the most common span length of the state double-tee bridges (Sec. 6.4).
3. The girder depth of bridge candidates can be either 23 in. (584 mm) or 30 in. (762 mm). However, at least one 23-in. (584-mm) deep girder bridge should be tested because they are more common than 30-in. (762-mm) deep girder bridges (65% versus 35%, Sec. 6.5).
4. The bridge candidate should be non-skewed, since 70% of the state double-tee bridges are non-skewed (Sec. 6.6).
5. Bridge candidates should be close to SDSU and a SDDOT facility.

Based on the above mentioned criteria, 10 double-tee bridges (Table 4.1) were identified as potential candidates for field testing. All ten bridges (refer Appendix A for photographs) were inspected and a summary of the findings is presented in the table. Out of the 10 candidates, the SDDOT technical panel selected two bridges, Bridge 42-165-153 and 51-090-012, for field testing, which are highlighted in table.

Table 7.1 – Double-Tee Bridge Candidates for Field Testing

Bridge ID	County	Span Length and Depth	Damage Type and Condition State	Age, Yr.
31024230	Hanson, SD	40.8 ft (12.4 m) Seven 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Minor water leakage between deck units (with a condition state of Poor).	36
34075220	Hutchinson, SD	43 ft (13.1 m) Seven 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Light staining from leakage between longitudinal joints, spalling, and delamination. Only one longitudinal joint had water leakage after rain (with a condition state of Poor).	37
34140033	Hutchinson, SD	100 ft (30.5 m) 3 span Eight 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Severe water leakage between all longitudinal joints after rain with minor corrosion of steel plates (with a condition state of Poor).	39
42104110	Lincoln, SD	46 ft (14.02 m) Seven 30-in. (762-mm) Deep Girders	<i>Non-skewed, girders have transverse diaphragms,</i> Spalling of stem concrete cover (condition state not available), exposure of stem transverse reinforcement (with a condition state of Severe), and leakage of girder-to-girder joints (with a condition state of Poor).	35
42130065	Lincoln, SD	45.8 ft (13.9 m) Six 30-in. (762-mm) Deep Girders	<i>Non-skewed,</i> Spalling of both stem and flange concrete cover (with a condition state of Fair and Good, respectively), and leakage of girder-to-girder joints (with a condition state of Poor).	40
42165153	Lincoln, SD	42 ft (12.8 m) Seven 30-in. (762-mm) Deep Girders	<i>Non-skewed,</i> Spalling of stem concrete cover (with a condition state of Fair), and leakage of girder-to-girder joints (with a condition state of Poor).	34
51008010	Moody, SD	50 ft (15.24 m) Six 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Spalling with exposed rebar, efflorescence and water staining between the deck units due to leaking of the joints.	40
51090012	Moody, SD	50 ft (15.24 m) Eight 23-in. (584-mm) Deep Girders	<i>Non-skewed,</i> Water leakage between all deck units, stains from minor corrosion of steel plates in longitudinal joints (with a condition state of Poor), concrete spalling (with a condition state of Fair).	38
51140067	Moody, SD	51.2 ft (15.6 m) Seven 23-in. (584-mm) Deep Girders	<i>Skewed bridge, girders have transverse diaphragms,</i> Minor water leakage between deck units but with no sign of corrosion of steel plates (with a condition state of Poor).	8
51142060	Moody, SD	50 ft (15.24 m) Six 23-in. (584-mm) Deep Girders	<i>Posted bridge, non-skewed,</i> Staining and water leakage between the all deck units.	40


Note: The bridge age was by 2018.

7.2 Description of Double-Tee Field Test Bridges


This section presents the site location, geometry, and observed damage for each selected field test bridge.

7.2.1 Description of 30-in. (762-mm) Deep Double-Tee Girder Bridge

Bridge 42-165-153 is a single-span 34-year old structure with a span length of 42 ft (12.8 m) and a girder depth of 30 in. (762 mm). The bridge is located in Lincoln County, SD on Barlett Avenue, 1.3 miles south of Canton, SD (Fig. 7.1). Figures 7.2 to 7.3 show the photographs of the bridge, and Fig. 7.4 shows the observed damage of the bridge girder-to-girder joints in a plan view.

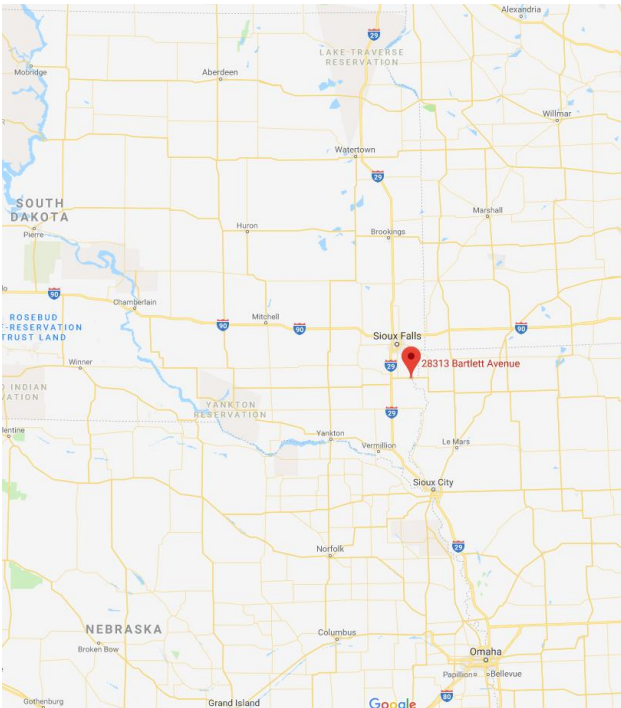

(a) Bridge Location in the State of South Dakota

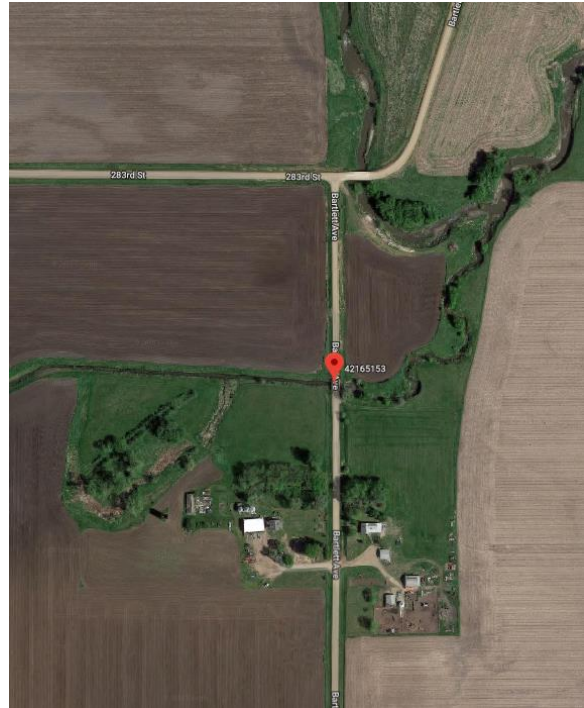

(b) Aerial View

Figure 7.1 – Bridge 42-165-153 Located in Lincoln County, SD



(a) Alignment Facing North



(b) Alignment Facing South


Figure 7.2 – Top View of Bridge 42-165-153




(a) Efflorescence in Joint



(b) Spalling at bottom of Stem, G4

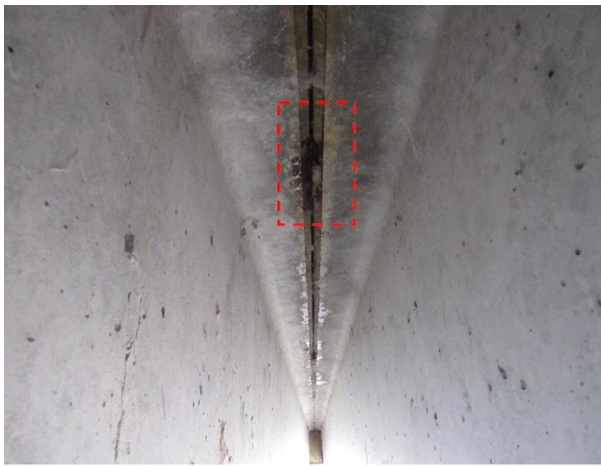

(c) Corrosion of Steel Plate

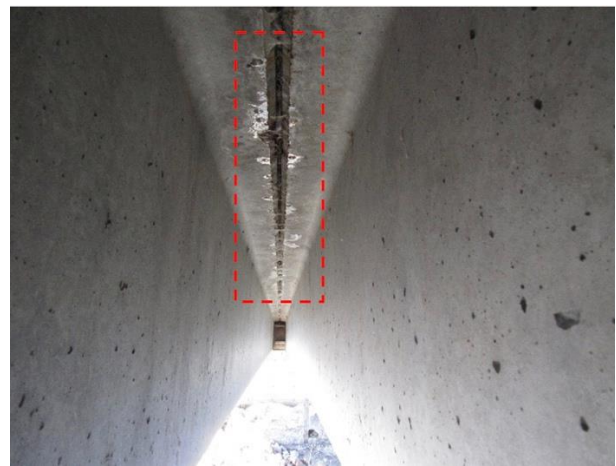

(d) Leakage in Joint



(e) Underneath of Bridge

Figure 7.3 – Observed Damage of Field Test Bridge 42-165-153


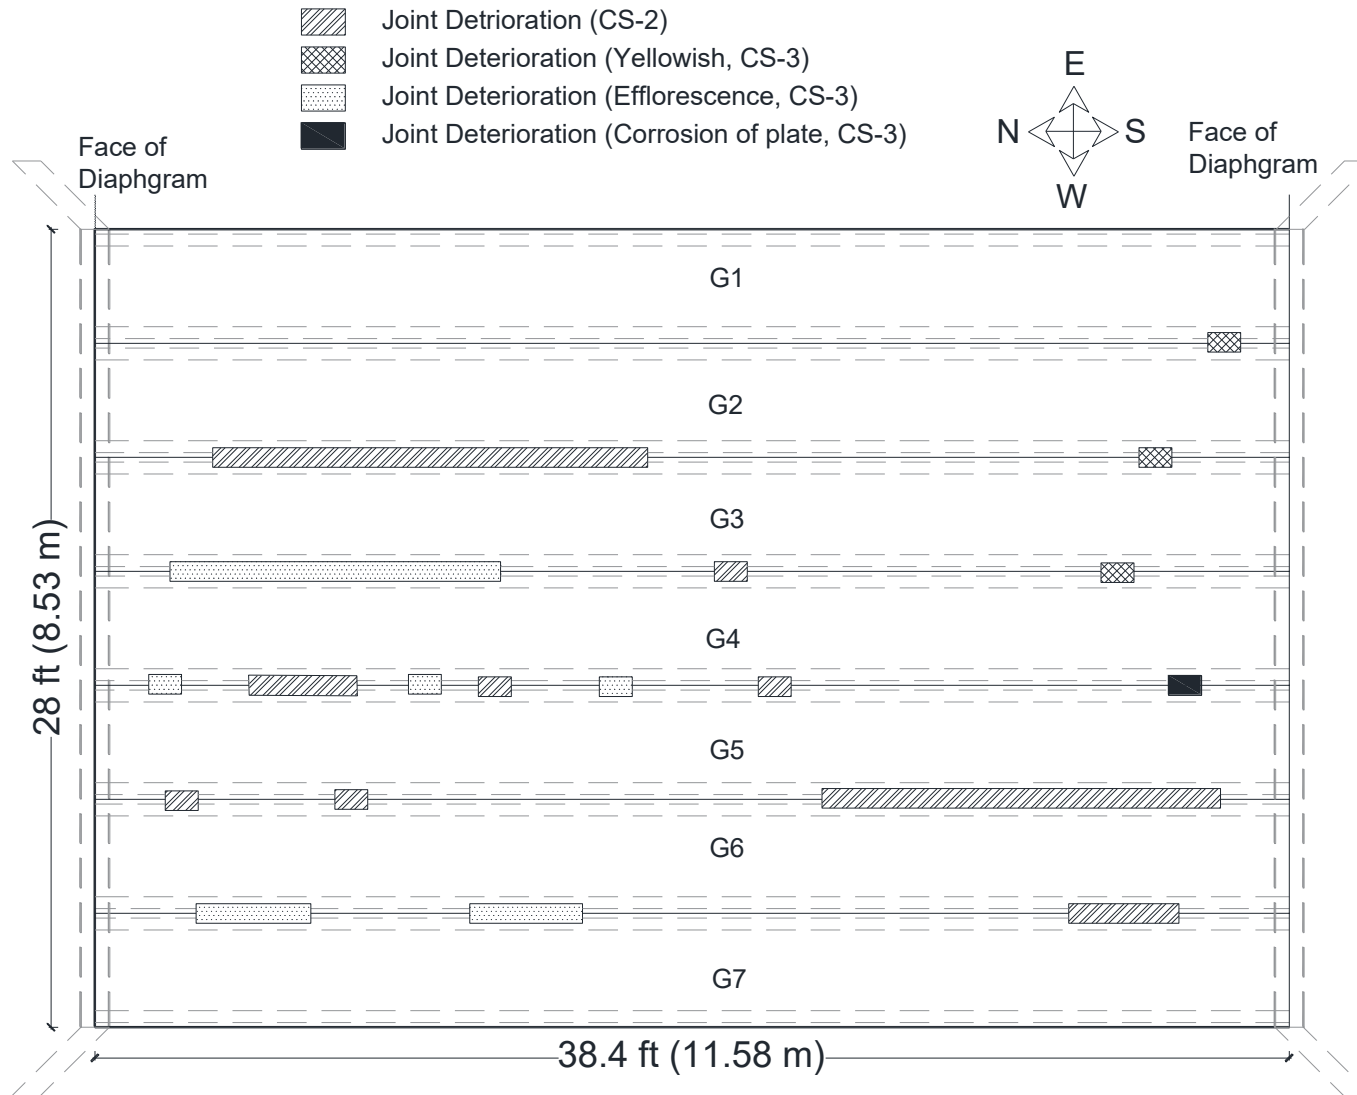


Figure 7.4 – Observed Longitudinal Joint Damage of Field Test Bridge 42-165-153

7.2.2 Description of 23-in. (584-mm) Deep Double-Tee Girder Bridge

Bridge 51-090-012 is a single-span 38-year old structure with a span length of 50 ft (15.24 m) and a girder depth of 23 in. (584 mm). The bridge is located in Moody County, SD on 475th Avenue, 1.8 miles north and 12 miles west of Ward, SD. Figures 7.5 through 7.7 show the photographs of the bridge and Fig. 7.8 shows the observed damage of the bridge girder-to-girder joints in a plan view.

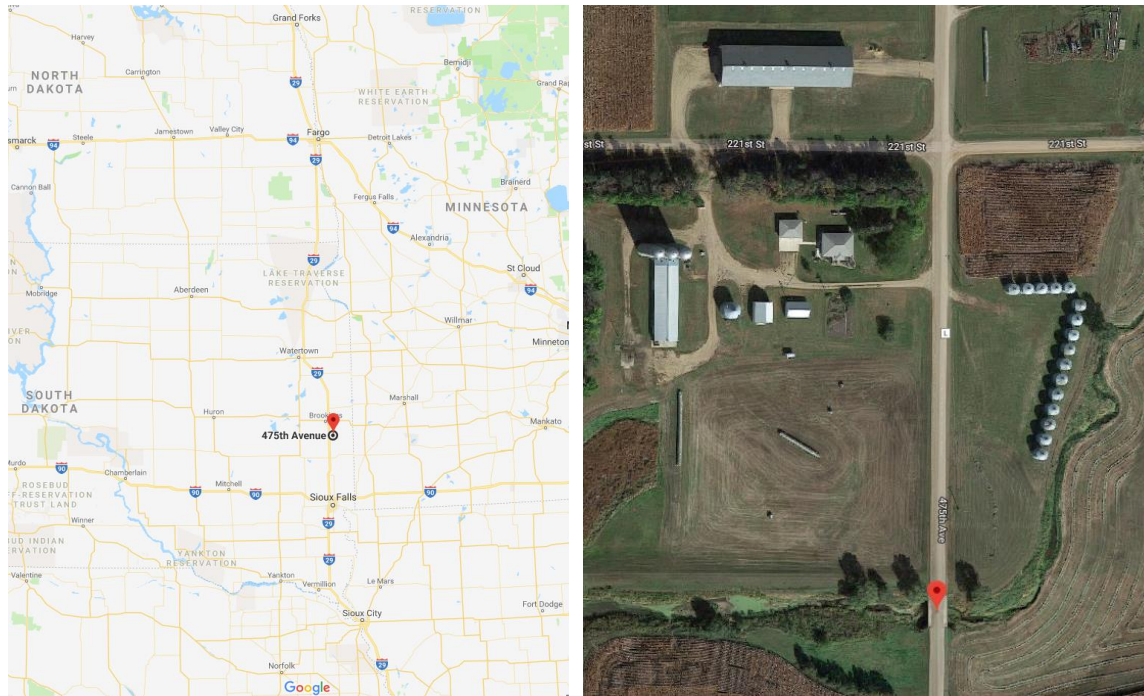

(a) Bridge Location in the State of South Dakota

(b) Aerial View

Figure 7.5 – Bridge 51-090-012 Located in Moody County, SD



(a) Alignment Facing North



(b) Alignment Facing South


Figure 7.6 – Top View of Bridge 51-090-012



(a) Underneath of Bridge



(b) Stains from Minor Corrosion of Steel Plates

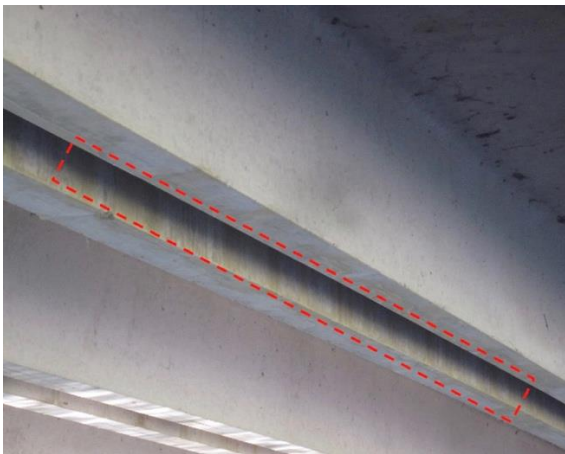

(c) Sign of Water Leak b/w Deck Units



(d) Concrete Spalling at Railing

Figure 7.7 – Observed Damage of Field Test Bridge 51-090-012

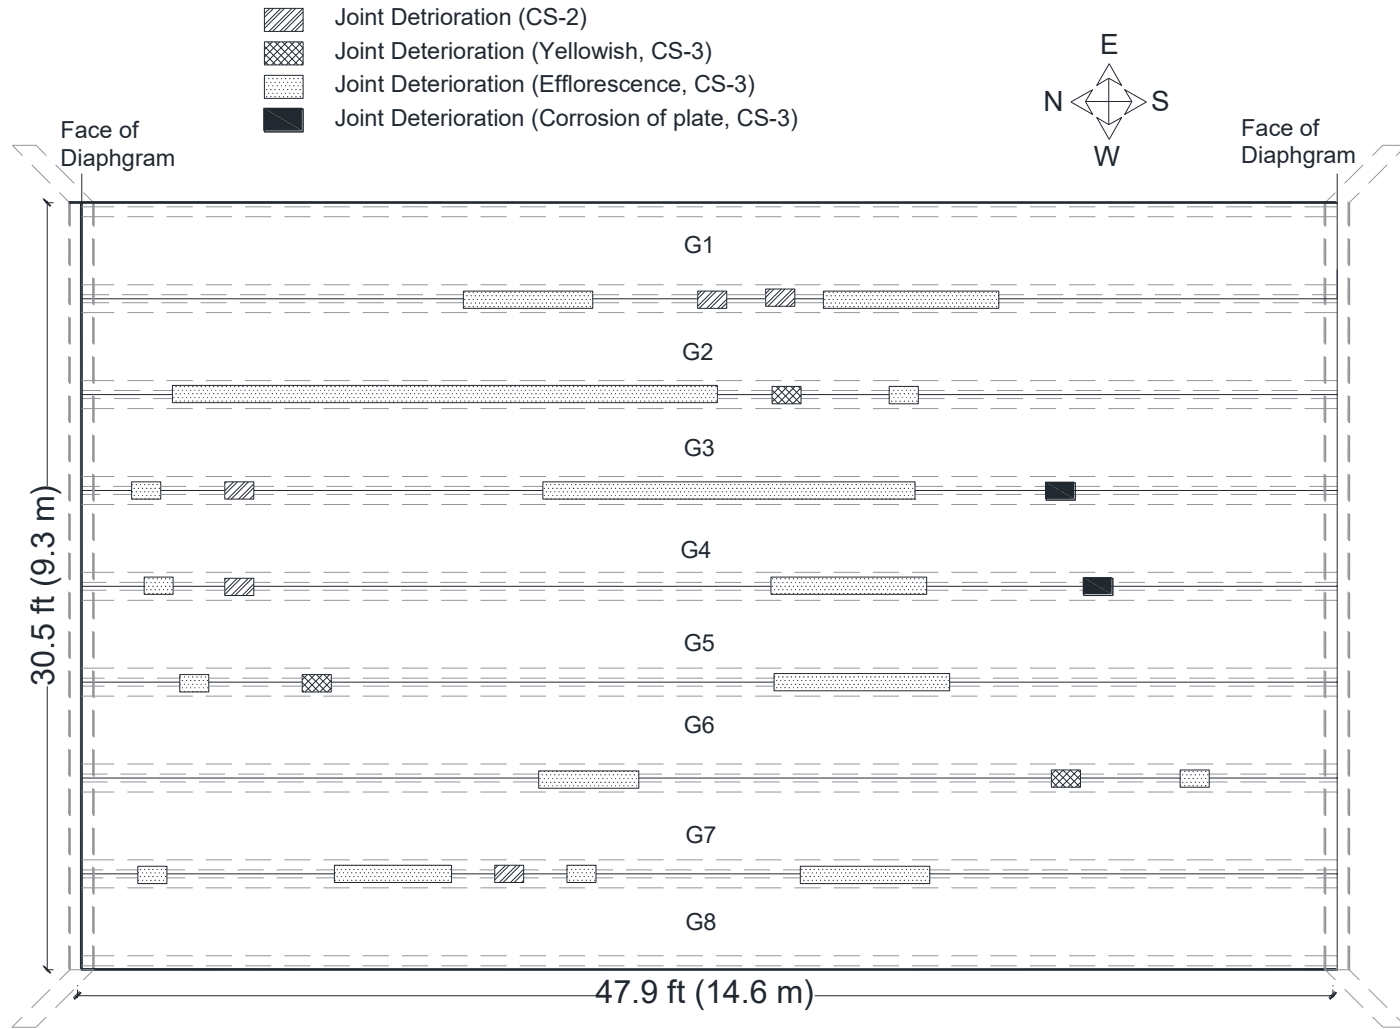


Figure 7.8 – Observed Longitudinal Joint Damage of Field Test Bridge 51-090-012

7.3 Field Testing Protocols for Double-Tee Bridges


This section presents field test loading protocols used to measure static and dynamic response of the test bridges, and to determine the girder load distribution factors and the dynamic load allowance factors. The test truck type and speed, loading paths, and the testing matrix were discussed herein.

7.3.1 Field Test Truck

Both bridges were tested using a dump truck similar to SD Legal Truck Type 3 (Fig. 7.9). The test truck, which was loaded with dry sands, had a total weight of 49.98 kips (222.32 kN). The front axle weight was 16.78 kips (74.6 kN) and each rear axle weight was 16.6 kips (71.6 kN). The transverse axle spacing between the front tires was approximately 7 ft (2.1 m) and the transverse axle spacing between the centers of the rear tires was approximately 6 ft (1.8 m). The spacing between the front and the closest rear wheels was approximately 16 ft (4.9 m).



(a) Test Truck Used in Field Testing

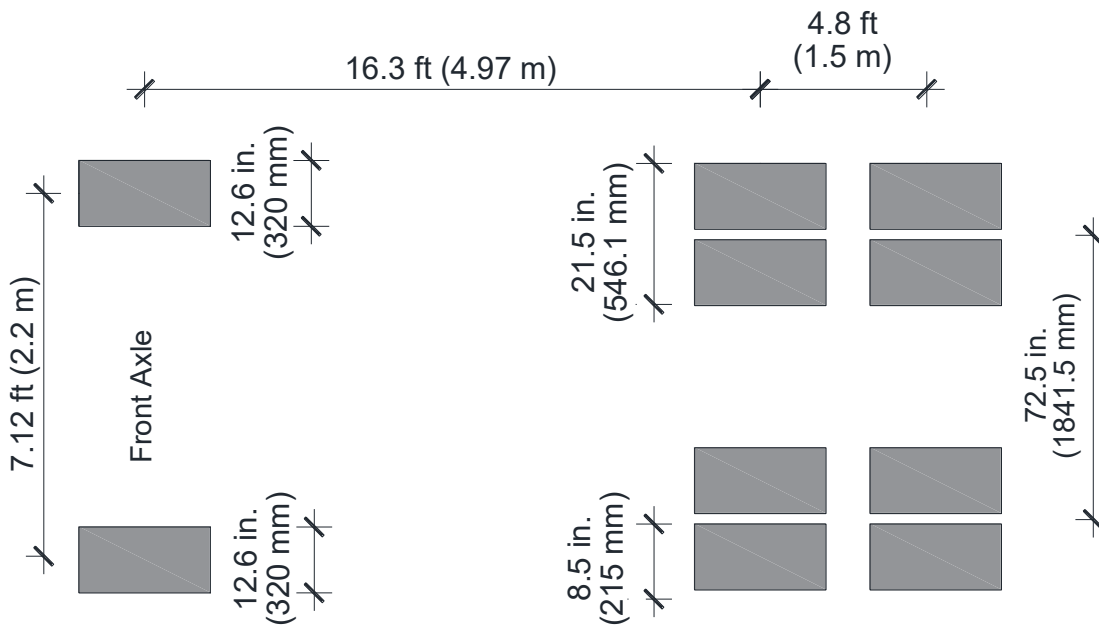

(b) Test Truck Axle Spacing



(c) Test Truck Axle Weight Distribution

Figure 7.9 – Field Test Truck

7.3.2 Test Truck Speed

For bridge field testing, a truck speed of 5 mph (miles per hour, or 8.05 kph) or less is usually considered a “static” test, and a truck speed of 55 mph (88.51 kph) is considered a “dynamic” test (Chajes et al., 2000). The same speed was initially adopted in the present study for the static and dynamic testing of the two bridges. After the dynamic testing of the 30-in. (762-mm) deep double-tee girder bridge for shear responses, the speed of the dynamic tests for the flexural responses was reduced to 35 mph (56.33 kph) due to the site conditions (gravel roads) and the safety of the crew and the bridge. The data collected from the static tests was used to calculate the girder distribution factors and the data obtained from the dynamic tests was used to calculate the dynamic load allowance.

The truck driver was instructed to drive at the specified speed on specified load paths as discussed in the next section. The paths were marked on the bridge. Data was collected just before the test truck hit the bridge and ended when the truck had completely passed the bridge.

7.3.3 Field Testing Loading Paths

A proper selection of load paths is essential for successful field testing. The bridge geometry such as the width and the number of girders affects the selection of load paths. For field testing of double-tee bridges in the present study, five different paths were selected as shown in Fig. 7.10 and 7.11 to investigate the load transfer mechanism in both bridges. These paths were selected in a way that any girder of the test bridge is loaded at least once. All five paths were marked on the bridge with spray paint as shown in Fig. 7.12 and 7.13. The testing was repeated twice per path to minimize the measurement errors.

The exterior paths, Paths A and E, had a 2-ft (0.61-m) clearance from the railing per the AASHTO requirements for the calculation of live load distribution factors for the exterior girders. Due to a narrower width of the gravel road compared to the width of the test bridges, only static tests could be performed on the exterior paths.

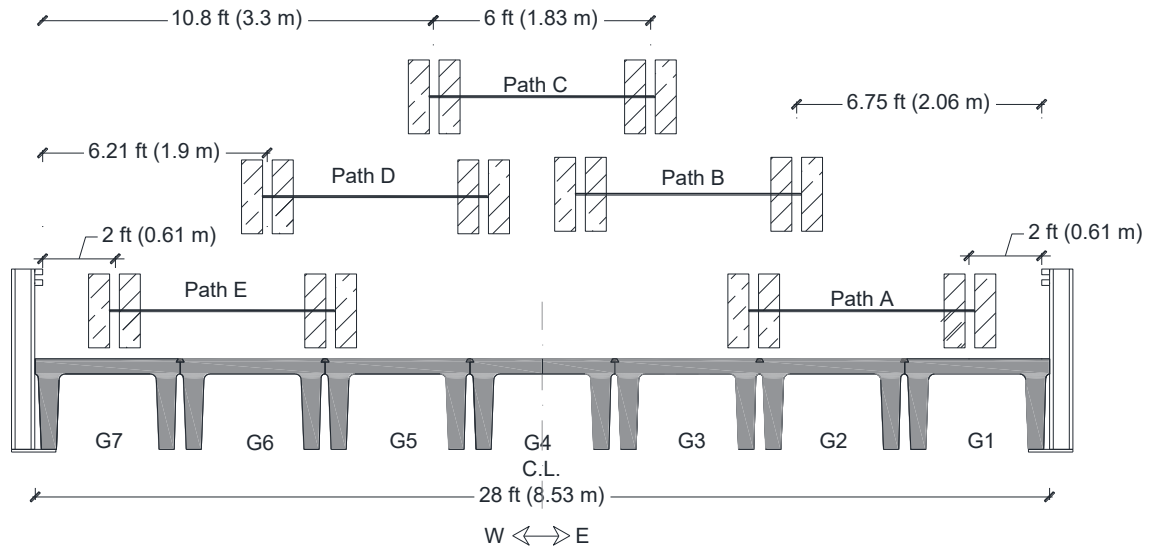


Figure 7.10 – Field Test Truck Paths for 30-in. (762-mm) Deep Double-Tee Girder Bridge

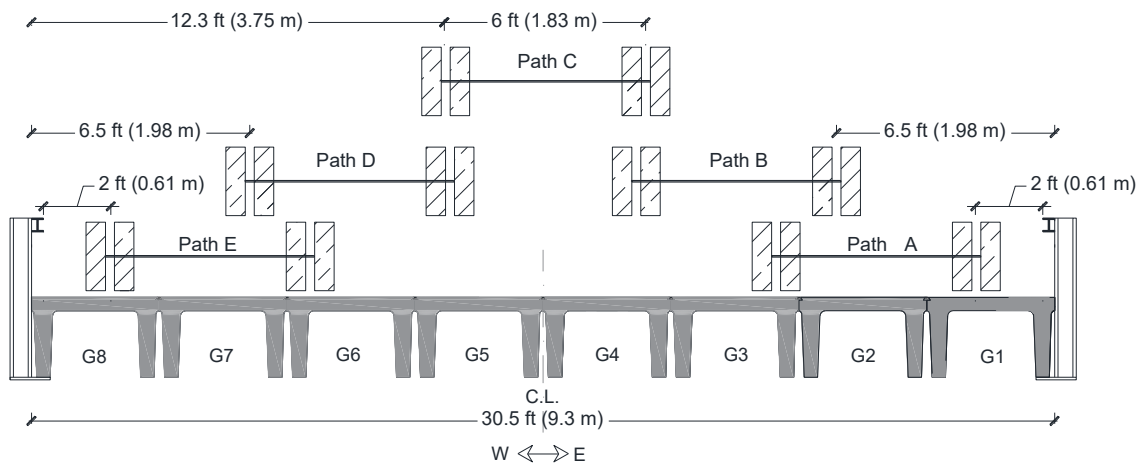


Figure 7.11 – Field Test Truck Paths for 23-in. (584-mm) Deep Double-Tee Girder Bridge

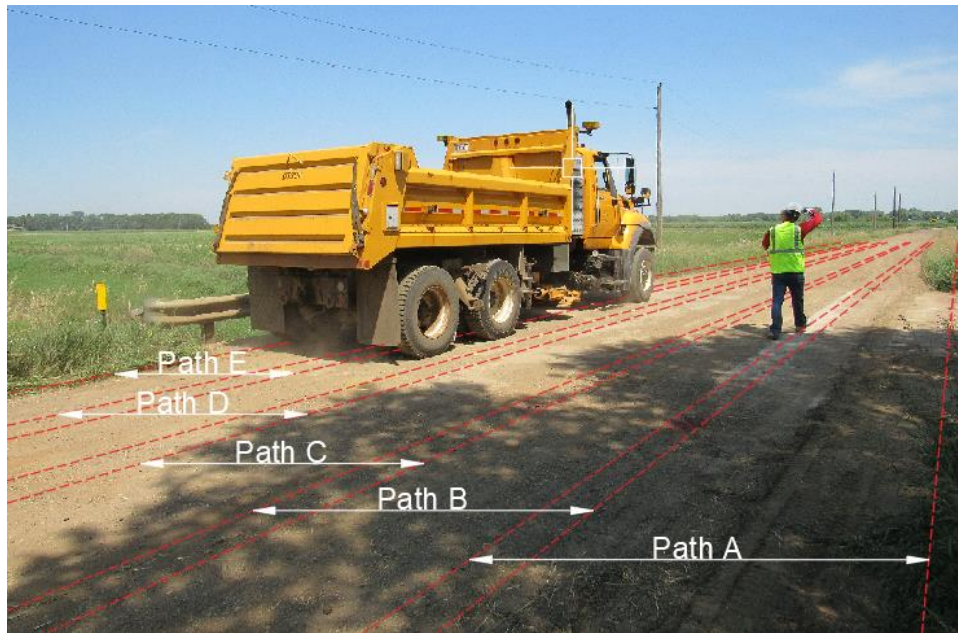


Figure 7.12 – Photograph of Truck Paths for 30-in. (762-mm) Deep Double-Tee Girder Bridge

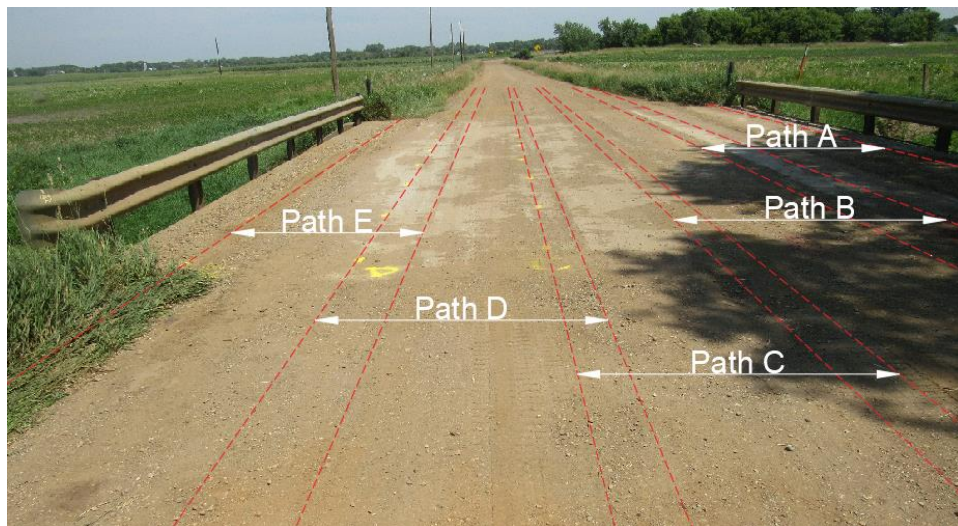


Figure 7.13 – Photograph of Truck Paths for 23-in. (584-mm) Deep Double-Tee Girder Bridge

7.3.4 Bridge Field Testing Matrix

Tables 7.2 and 7.3 respectively present the field test matrices designed to obtain the flexural and shear response of the 30-in. (762-mm) deep double-tee girder bridge. Table 7.4 presents the field test matrix for measuring the flexural response of the 23-in. (584-mm) deep double-tee girder bridge. In these test matrices, letters “A, B, C, D and E” refer to the five different loading paths, and the term “St” refers to the static testing and the term “Dy” refers to the dynamic testing. For example, “A-St-1” under the “Test ID” column refers to the first run of the static test on Path A, while “B-Dy-2” refers to the second run of the dynamic test on Path B.

Due to instrumentation limitations, the 30-in. (762-mm) deep double-tee girder bridge was tested once for flexural response (gauges at the midspan) and another time for shear response (gauges close to one of the abutments). The 23-in. (584-mm) deep double-tee girder was tested only for the flexural response. The next section discusses the field testing instrumentation plans.

Table 7.2 – Field Test Matrix Measuring Flexural Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge

Test No.	Test ID	Path	Loading Type	Truck	Run No.	Measured Speed, mph (kph)
T1	A-St-1	A	Static	SD Type 3	1	5 (8)
T2	A-St-2	A	Static	SD Type 3	2	5 (8)
T3	B-St -1	B	Static	SD Type 3	1	5 (8)
T4	B-St -2	B	Static	SD Type 3	2	5 (8)
T5	B-Dy-1	B	Dynamic	SD Type 3	1	35 (56)
T6	B-Dy-2	B	Dynamic	SD Type 3	2	35 (56)
T7	C-St-1	C	Static	SD Type 3	1	5 (8)
T8	C-St-2	C	Static	SD Type 3	2	5 (8)
T9	C-Dy-1	C	Dynamic	SD Type 3	1	35 (56)
T10	C-Dy-2	C	Dynamic	SD Type 3	2	34.5 (55)
T11	D-St-1	D	Static	SD Type 3	1	5 (8)
T12	D-St-2	D	Static	SD Type 3	2	5 (8)
T13	D-Dy-1	D	Dynamic	SD Type 3	1	33.5 (54)
T14	D-Dy-2	D	Dynamic	SD Type 3	2	34.5 (55)
T15	E-St-1	E	Static	SD Type 3	1	5 (8)
T16	E-St-2	E	Static	SD Type 3	2	5 (8)

Note: This test was performed after to the shear response test (next table). No dynamic test was performed on Paths A & E due to site conditions. A speed gun was used to measure the test truck speed.

Table 7.3 – Field Test Matrix Measuring Shear Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge

Test No.	Test ID	Path	Loading Type	Truck	Run No.	Measured Speed, mph (kph)
T21	A-St-1	A	Static	SD Type 3	1	5 (8)
T22	A-St-2	A	Static	SD Type 3	2	5 (8)
T23	B-St-1	B	Static	SD Type 3	1	5 (8)
T24	B-St-2	B	Static	SD Type 3	2	5 (8)
T25	B-Dy-1	B	Dynamic	SD Type 3	1	55 (88)
T26	B-Dy-2	B	Dynamic	SD Type 3	2	55 (88)
T27	C-St-1	C	Static	SD Type 3	1	5 (5)
T28	C-St-2	C	Static	SD Type 3	2	5 (5)
T29	C-Dy-1	C	Dynamic	SD Type 3	1	51 (82)
T30	C-Dy-2	C	Dynamic	SD Type 3	2	55 (88)
T31	D-St-1	D	Static	SD Type 3	1	5 (8)
T32	D-St-2	D	Static	SD Type 3	2	5 (8)
T33	D-Dy-1	D	Dynamic	SD Type 3	1	55 (88)
T34	D-Dy-2	D	Dynamic	SD Type 3	2	57 (92)
T35	E-St-1	E	Static	SD Type 3	1	5 (8)
T36	E-St-2	E	Static	SD Type 3	2	5 (8)

Note: This test was performed prior to the flexural response test (previous table). No dynamic test was performed on Paths A & E due to site conditions. A speed gun was used to measure the test truck speed.

Table 7.4 – Field Test Matrix Measuring Flexural Response of 23-in. (584-mm) Deep Double-Tee Girder Bridge

Test No.	Test ID	Path	Loading Type	Truck	Run No.	Measured Speed, mph (kph)
T1	A-St-1	A	Static	SD Type 3	1	3 (4.8)
T2	A-St-2	A	Static	SD Type 3	2	3 (4.8)
T3	B-St-1	B	Static	SD Type 3	1	3 (4.8)
T4	B-St-2	B	Static	SD Type 3	2	3 (4.8)
T5	B-Dy-1	B	Dynamic	SD Type 3	1	36.7 (59)
T6	B-Dy-2	B	Dynamic	SD Type 3	2	35 (56)
T7	C-St-1	C	Static	SD Type 3	1	3 (4.8)
T8	C-St-2	C	Static	SD Type 3	2	3 (4.8)
T9	C-Dy-1	C	Dynamic	SD Type 3	1	36.5 (59)
T10	C-Dy-2	C	Dynamic	SD Type 3	2	35.6 (57)
T11	D-St-1	D	Static	SD Type 3	1	5 (8)
T12	D-St-2	D	Static	SD Type 3	2	5 (8)
T13	D-Dy-1	D	Dynamic	SD Type 3	1	29 (47)
T14	D-Dy-2	D	Dynamic	SD Type 3	2	29 (47)
T15	E-St-1	E	Static	SD Type 3	1	5 (8)
T16	E-St-2	E	Static	SD Type 3	2	5 (8)

Note: No dynamic test was performed on Paths A & E due to site conditions. A speed gun was used to measure the test truck speed.

7.4 Instrumentation Plans

This section presents the instrumentation plans used for the field testing of the two double-tee bridges. Only surface-mount strain transducers produced by Bridge Diagnostics, Inc. (BDI Model ST350) were used.

7.4.1 Instrumentation of 30-in. (762-mm) Deep Double-Tee Girder Bridge

For the 30-in. (762-mm) deep double-tee girder bridge, both static and dynamic tests were performed to measure shear and flexural response of the bridge. For the shear response test, 24 strain gauges were installed 30 in. (762 mm) from the face of the south end diaphragm (Fig. 7.14 to 7.16). Pairs of strain gauges were installed at a 15.7-degree angle from the horizon 21 in. (533 mm) from the bottom of the stem (Fig. 7.16). To help with installation, a longitudinal line was drawn at a height of 21 in. (533 mm) from the bottom of stem and other two lines were drawn at 15.7 degrees from the longitudinal line. The two inclined lines met at a point 30 in. (762 mm) away from the south end diaphragm, as shown in Fig. 7.17.

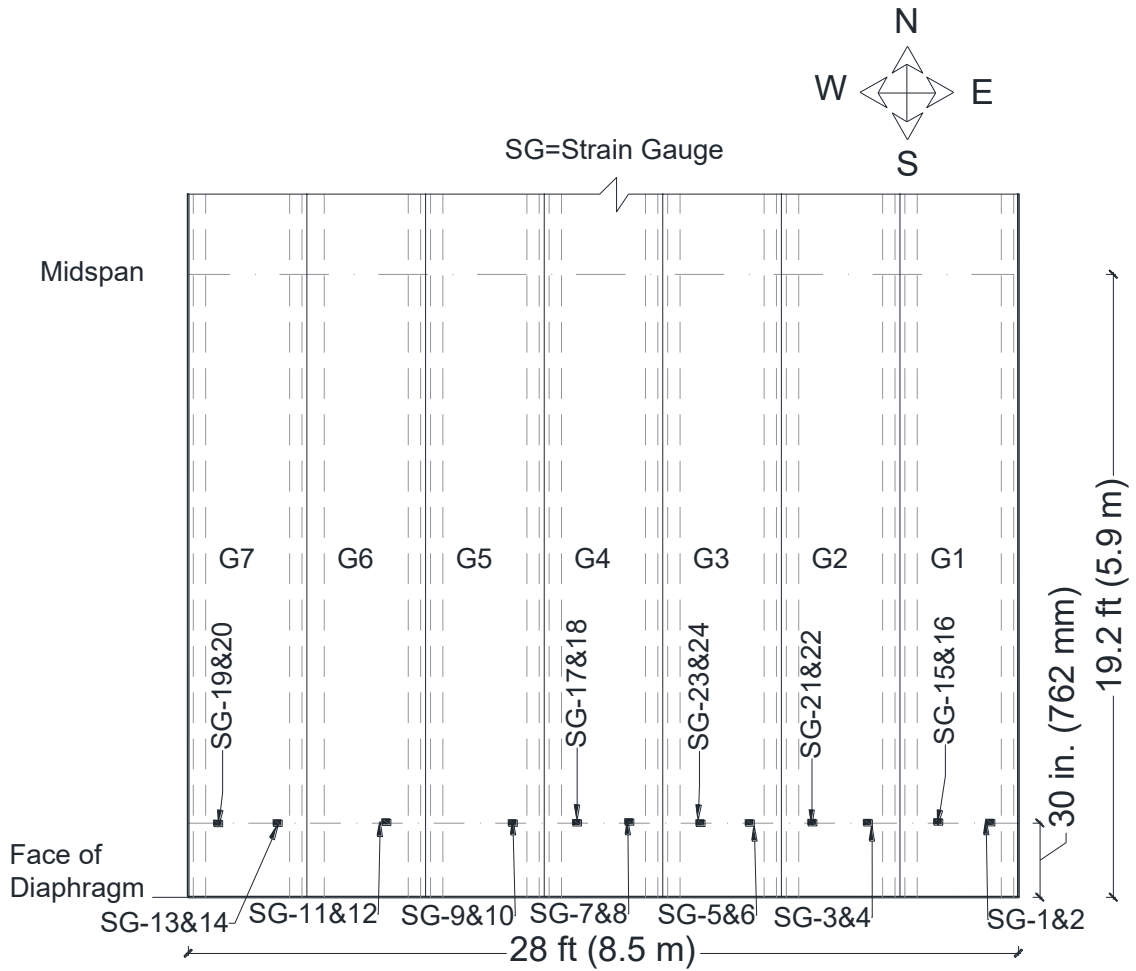


Figure 7.14 – Strain Gauge Instrumentation Plan for Shear Response of 30-in. Deep Double-Tee Girder Bridge – Plan View

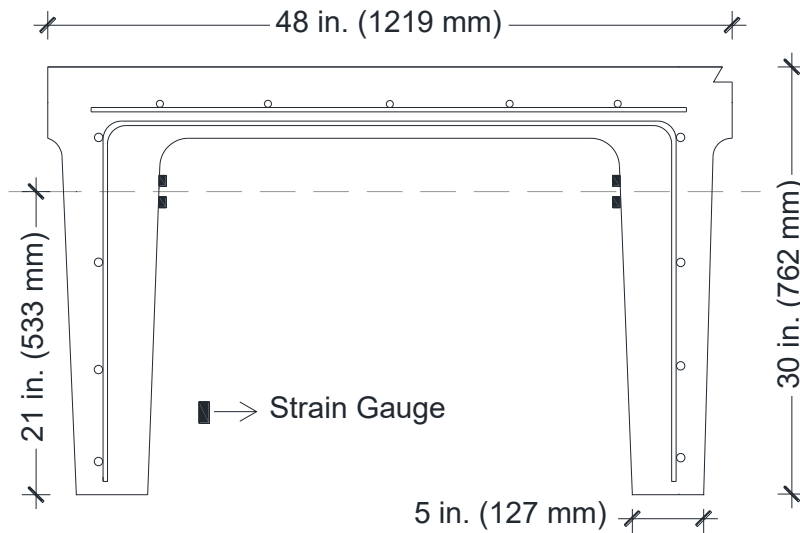


Figure 7.15 – Girder Strain Gauge Instrumentation Plan for Shear Response of 30-in. Deep Double-Tee Girder Bridge – Section View


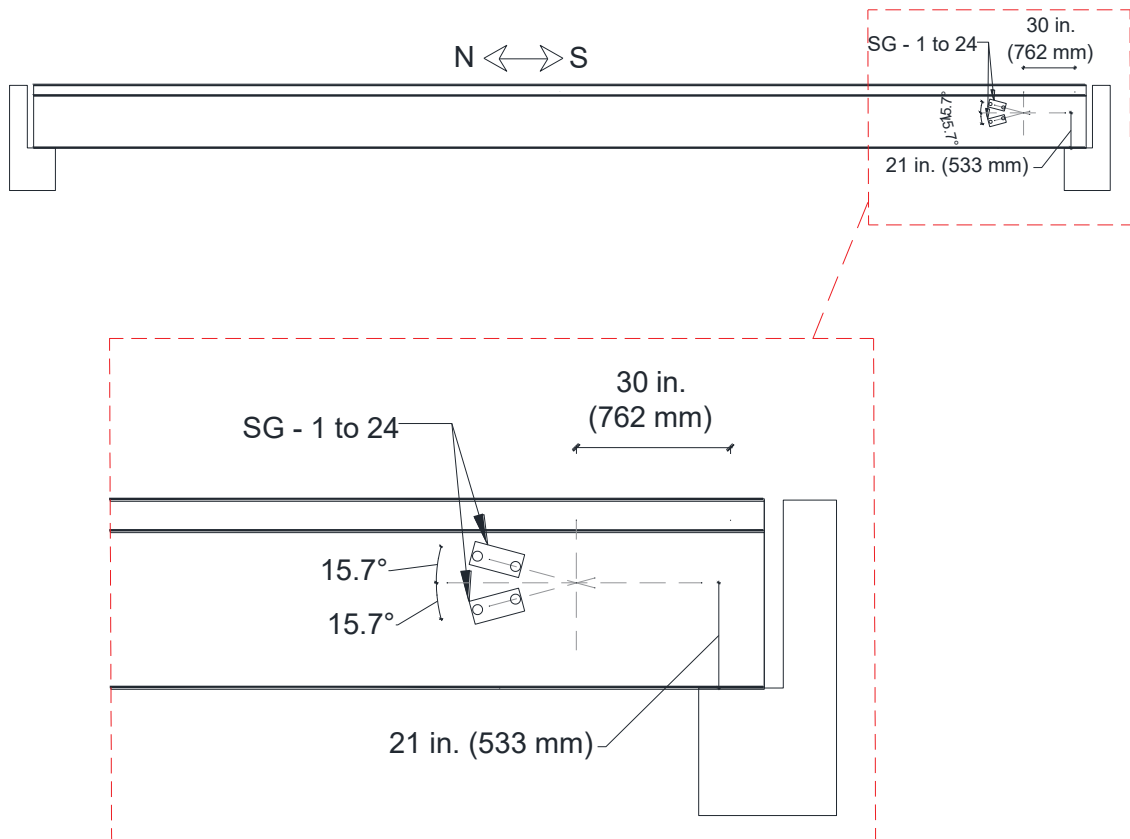


Figure 7.16 – Girder Strain Gauge Instrumentation Plan for Shear Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge – Elevation View



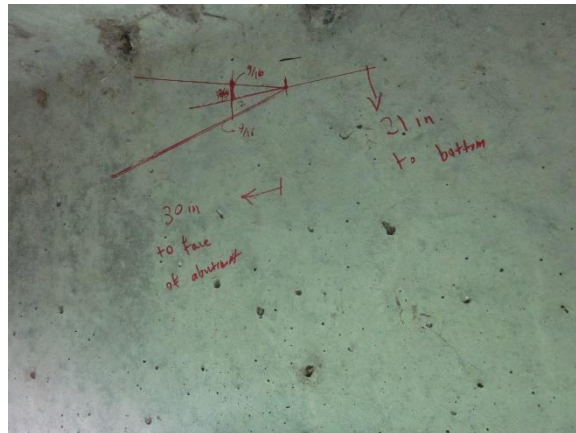

(a) Lines for Gauge Installation

(b) Strain Gauge Installation

Figure 7.17 – Strain Gauge Installation for Shear Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge

After the completion of the shear tests, the strain gauges were removed. Subsequently, 14 strain gauges, each with a 12-in. (305-mm) extension, were installed at the bottom of all stems at the midspan as shown in Fig. 7.18 to 7.20. When the stem bottom face was damaged or the railing connection was at the midspan (Fig. 7.21), the strain gauge (SG-1, SG-8, and SG-14) was installed at the stem side at a distance of 1.25 in. (31 mm) from the bottom of the stem.

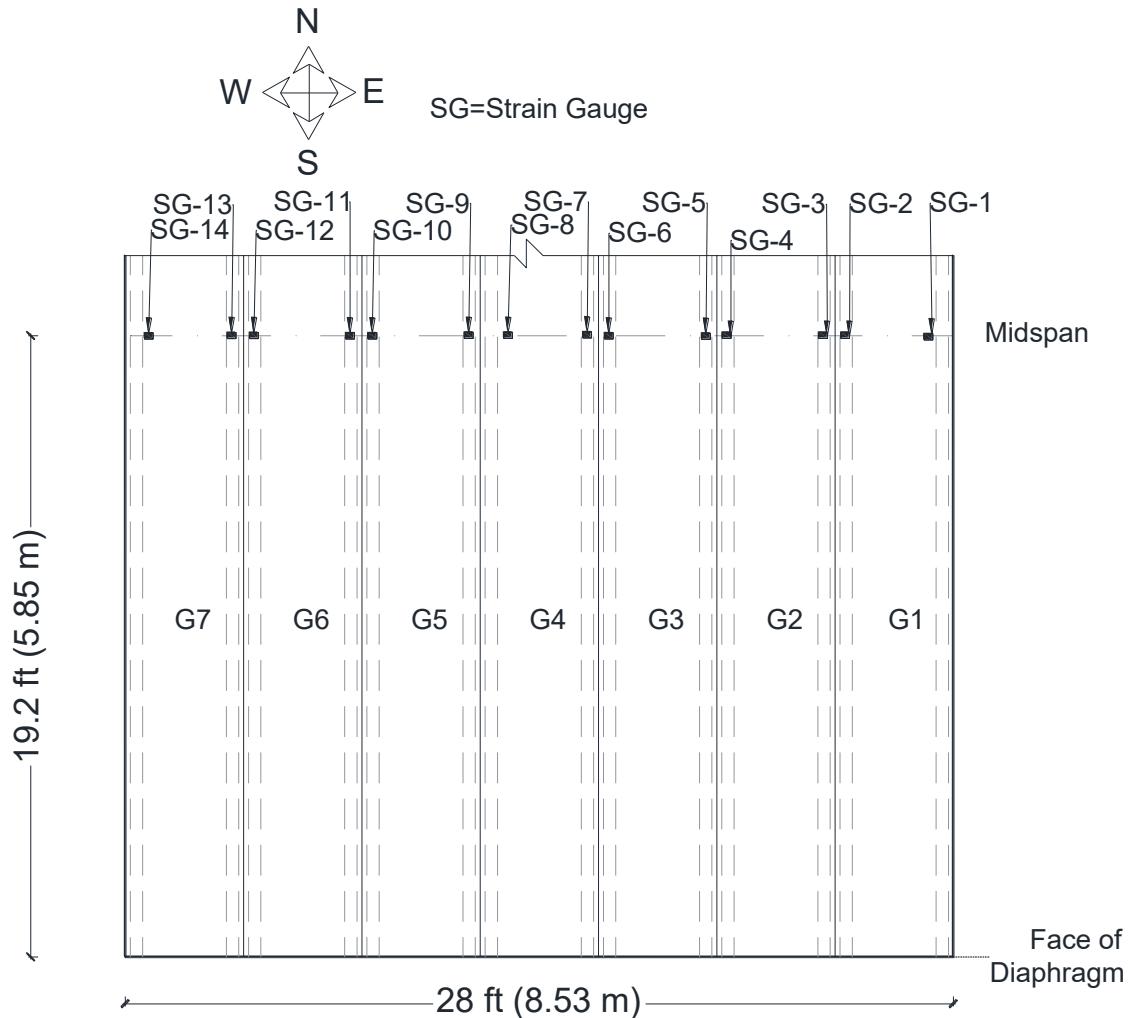


Figure 7.18 – Strain Gauge Instrumentation Plan for Flexural Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge – Plan View

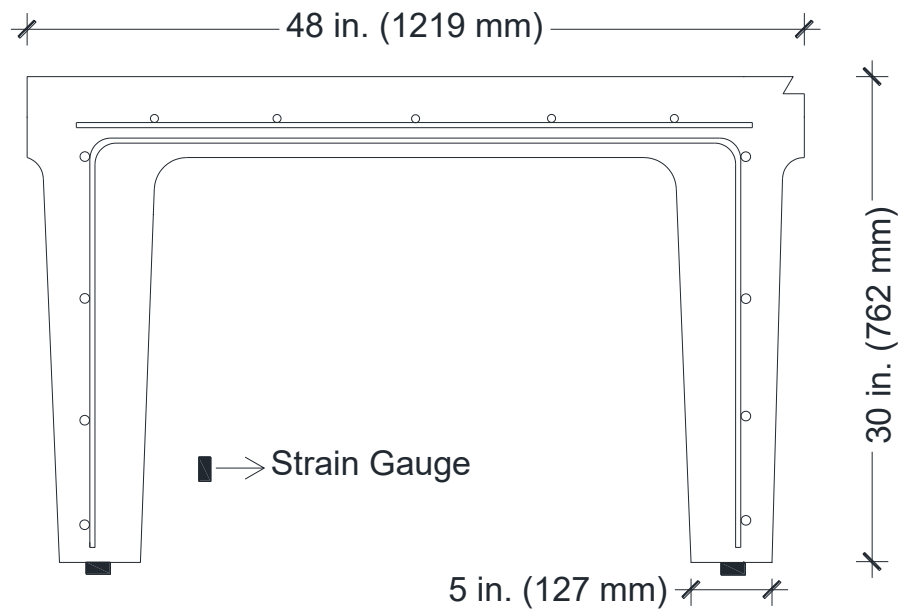


Figure 7.19 – Girder Strain Gauge Instrumentation Plan for Flexural Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge – Section View

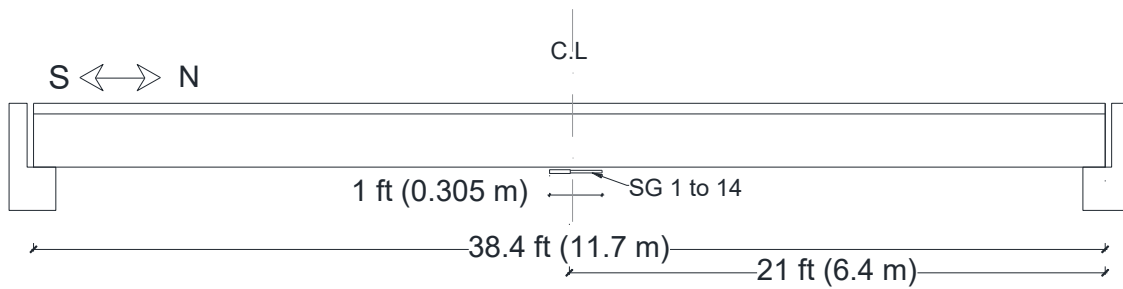


Figure 7.20 – Girder Strain Gauge Instrumentation Plan for Flexural Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge – Elevation View



(a) Installation of Strain Gauges with Extension



(b) Strain Gauges at Side due to Railing



(c) Strain Gauges on Stem Side due to Damage



(d) Bridge Underneath View

Figure 7.21 – Strain Gauge Installation for Flexural Response of 30-in. (762-mm) Deep Double-Tee Girder Bridge

7.4.2 Instrumentation of 23-in. (584-mm) Deep Double-Tee Girder Bridge

The instrumentation plan for the 23-in. (584-mm) deep double-tee girder bridge was initially the same as the 30-in (762-mm) deep double-tee girder bridge. However, after the shear testing of the first bridge, the measured strains were close to or within the uncertainty range of the strain sensors. Furthermore, the shear girder distribution factors were significantly lower than those from the AASHTO (as discussed under the results). Therefore, the shear test was excluded and only the flexural response test was performed for the 23-in. (584-mm) deep double-tee girder bridge. Figures 7.22 to 7.24 show the instrumentation plans for the flexural response testing of the 23-in. (584-mm) deep double-tee girder bridge. Twenty four strain gauges each with a 12-in. (305-mm) extension were installed at the midspan of the bridge (Fig. 7.25) to measure the flexural response. For some of the girders, additional strain sensors were installed at the inside of the stem at a distance of 15 in. (381 mm) from the stem bottom (Fig. 7.23 and 7.25) to obtain the strain profiles. As was discussed before, both static and dynamic tests were carried out to measure the girder distribution factors and dynamic load allowance.

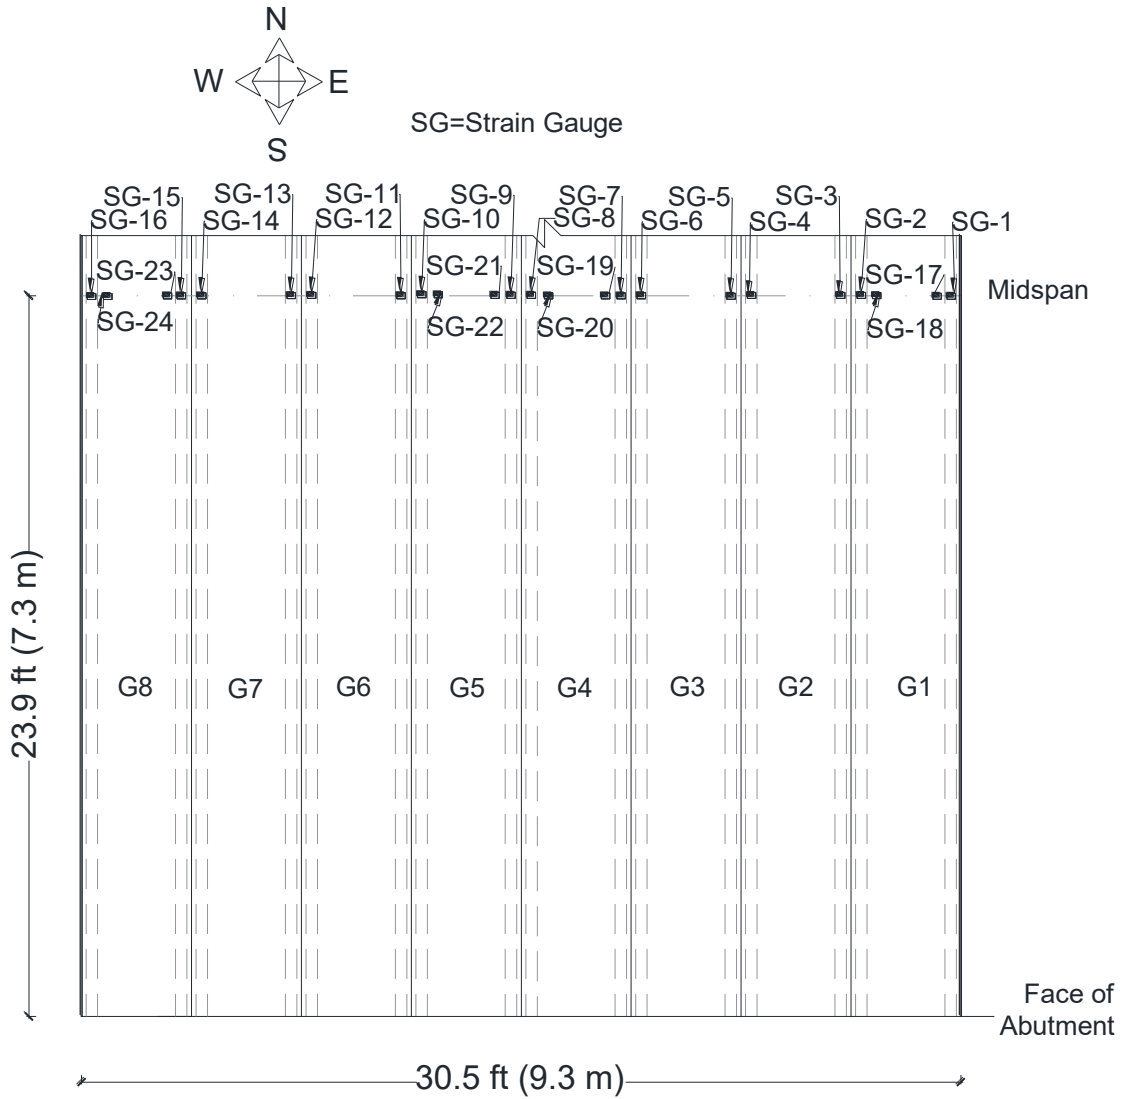


Figure 7.22 – Strain Gauge Instrumentation Plan for Flexural Response of 23-in. (584-mm) Deep Double-Tee Girder Bridge – Plan View

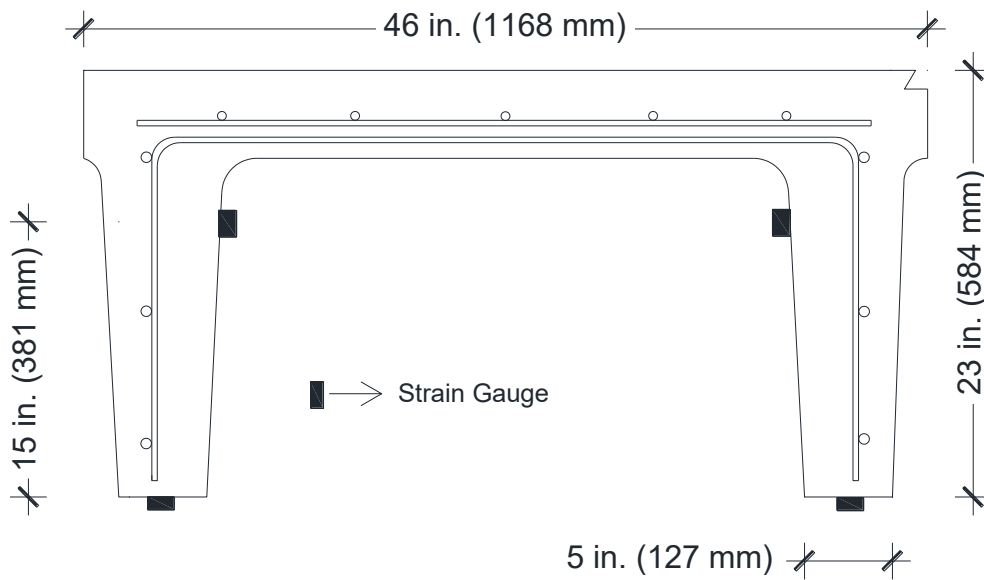


Figure 7.23 – Girder Strain Gauge Instrumentation Plan for Flexural Response of 23-in. (584-mm) Deep Double-Tee Girder Bridge – Section View

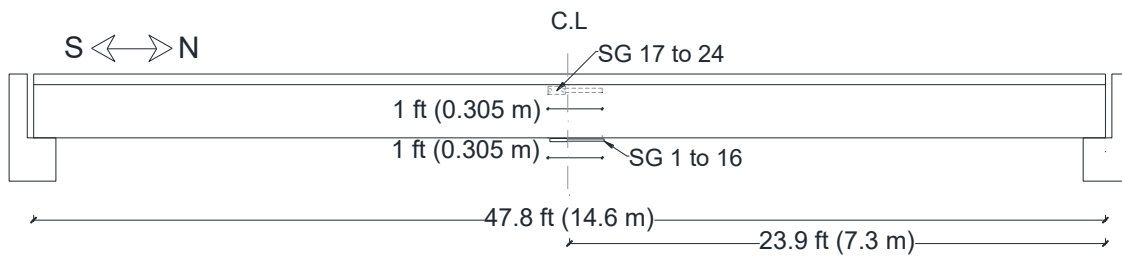


Figure 7.24 – Girder Strain Gauge Instrumentation Plan for Flexural Response of 23-in. (584-mm) Deep Double-Tee Girder Bridge – Elevation View



(a) Installation of Strain Gauges with Extension



(b) Strain Gauges at Stem Bottom Face



(c) Strain Gauges at Top and Bottom of Stem



(d) Field Work Using Snooper Truck

Figure 7.25 – Strain Gauge Installation for Flexural Response of 23-in. (584-mm) Deep Double-Tee Girder Bridge

7.5 Double-Tee Bridge Field Test Results

Strain data was recorded using a 128-channel data acquisition system with a reading rate of 256 points per second. The measured strains, live load distribution factors, and dynamic load allowance per bridge were processed and a summary of the results is presented herein.

7.5.1 Field Test Results for 30-in. (762-mm) Deep Double-Tee Girder Bridge

Both shear and flexure tests were performed for the 30-in. (762-mm) deep double-tee girder bridge.

7.5.1.1 Shear Response Field Test Results

For the shear tests, 24 strain gauges were installed at a distance of 30 in. (762 mm) from the south end diaphragm of the bridge, and both static and dynamic tests were carried out. The test truck was driven across the bridge twice per path to minimize errors.

7.5.1.1.1 Measured Shear Strains

Figure 7.26 shows the maximum measured shear strains for each run of the field testing for the 30-in. (762-mm) deep double-tee girder bridge. Similarly, Fig. 7.27 shows the maximum measured shear strains but for each path, which were the average of the two runs. In both charts, the x-axis is the girder number and the y-axis is the strain in micro-strain ($\mu\epsilon$). The maximum shear strains were calculated according to Eq. 7.1 using the uniaxial strains measured by the two shear strain sensors (Hughes et al., 2006). It can be seen that the loaded girders per run or path showed the highest shear strains compared to the not-loaded girders in that run or path. It was found that the peak measured strains per sensor were very small (less than 10 micro-strain) within the error range of the strain sensors used in the tests. Therefore, the shear strains thus the shear girder distribution factors may not be reliable. That is the shear response test was not performed in the field testing of the 23-in. (584-mm) deep double-tee girder bridge.

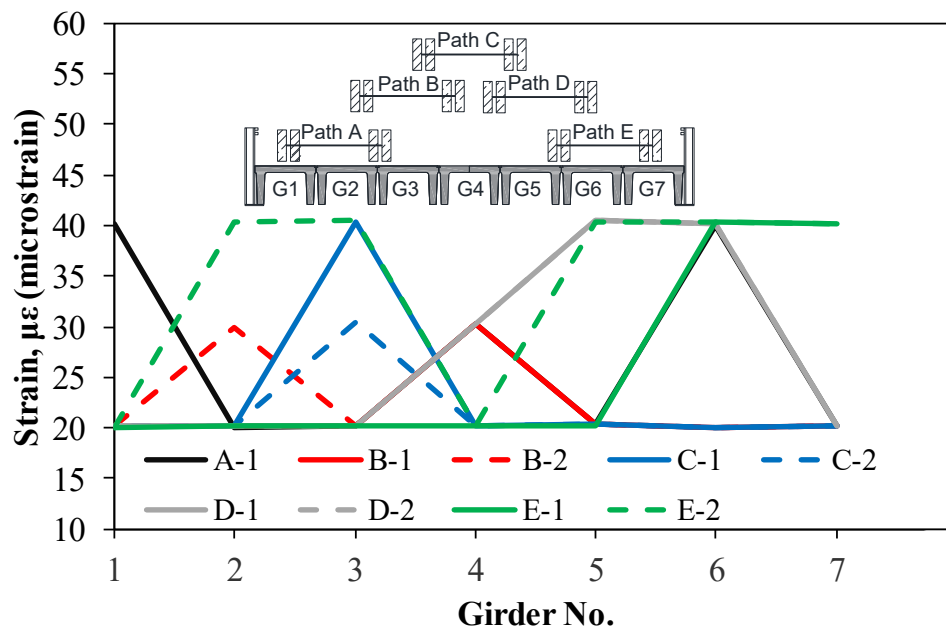


Figure 7.26 – Maximum Measured Shear Strains for Each Girder in Each Run of 30-in. (762-mm) Deep Double-Tee Girder Bridge

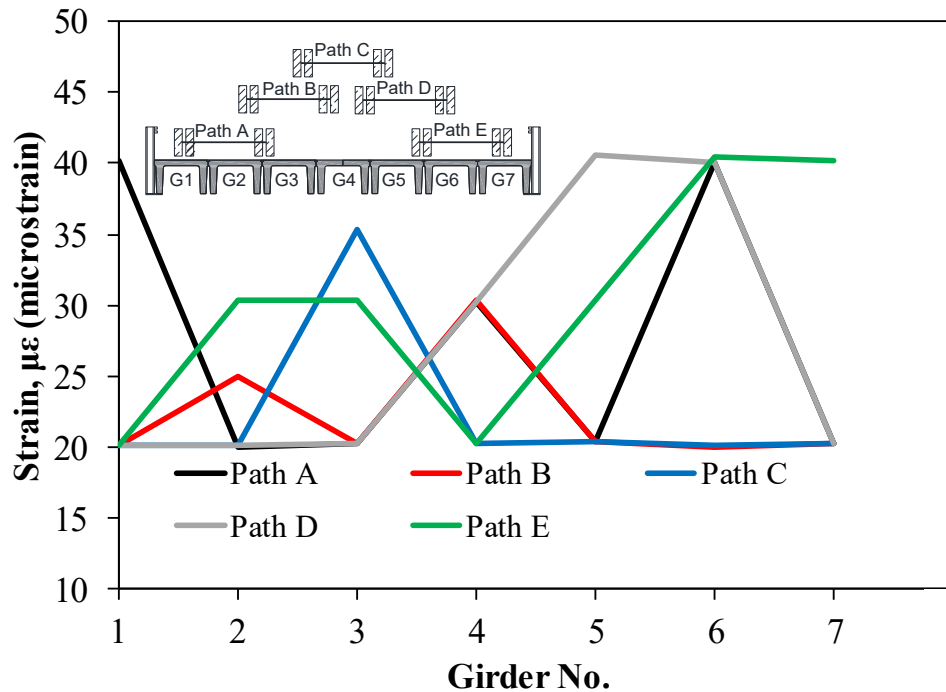


Figure 7.27 – Maximum Measured Shear Strains for Each Girder in Each Path of 30-in. (762-mm) Deep Double-Tee Girder Bridge

$$\gamma = \frac{\varepsilon_1 - \varepsilon_2}{\sin(2\alpha)} \quad (\text{Eq. 7.1})$$

where,

γ = The shear strain,

ε_1 = The measured uniaxial strain in one of the strain sensors,

ε_2 = The measured uniaxial strain in the second strain sensor,

α = The angle between the two strain sensors.

7.5.1.1.2 Measured Shear Girder Distribution Factors

The shear girder distribution factor (GDF) is the ratio of the girder maximum shear strain (γ) to the sum of the maximum shear strains for all girders (Eq. 7.2 from Hughs et al., 2006).

$$GDF_i = \frac{\gamma_i}{\sum_{i=1}^k \gamma_i} \quad (\text{Eq. 7.2})$$

where the k is the total number of girders in the test bridge.

Table 7.5 presents the shear GDFs for the 30-in. (762-mm) deep double-tee girder bridge and Fig. 7.28 shows a graphical illustration of the values in the table. It can be seen that the measured shear GDFs are significantly lower than those calculated according to the AASHTO LRFD (2012) for this bridge.

Therefore, the AASHTO shear GDFs can be used for 30-in. (762-mm) deep double-tee girder bridges in which their girder-to-girder joints are deteriorated with a condition state of 3 or less.

Table 7.5 – Shear Girder Distribution Factors for 30-in. (762-mm) Deep Double-Tee Girder Bridge

Load Paths / Girder Number	G1	G2	G3	G4	G5	G6	G7
Path A	0.13	0.15	0.15	0.17	0.15	0.18	0.07
Path B	0.13	0.16	0.13	0.19	0.13	0.13	0.13
Path C	0.13	0.13	0.23	0.13	0.13	0.13	0.13
Path D	0.11	0.10	0.11	0.16	0.21	0.21	0.11
Path E	0.09	0.14	0.14	0.10	0.14	0.19	0.19
Maximum GDF per Girder	0.13	0.16	0.23	0.19	0.21	0.21	0.19
AASHTO GDF per Girder	0.60	0.52	0.52	0.52	0.52	0.52	0.60

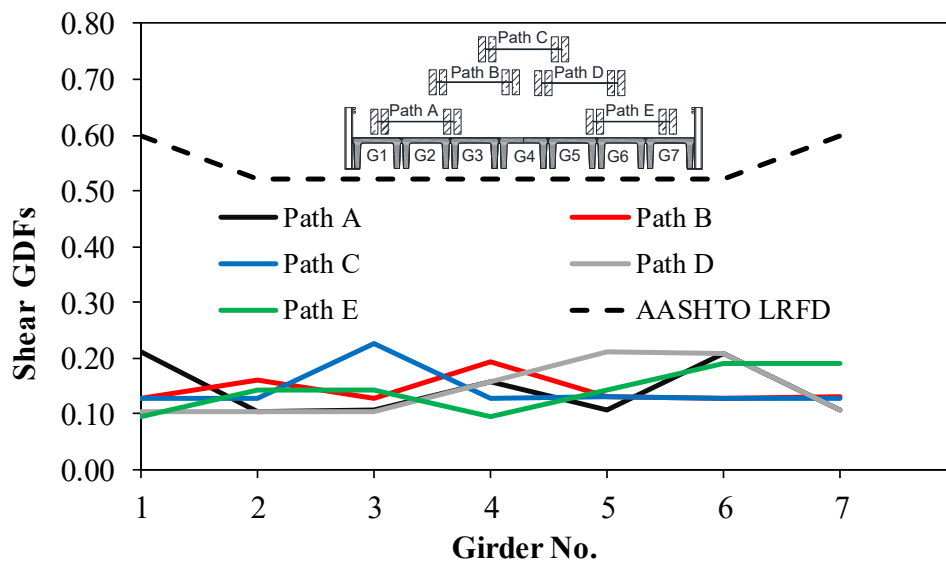


Figure 7.28 – Shear Girder Distribution Factors for 30-in. (762-mm) Deep Double-Tee Girder Bridge


7.5.1.2 Flexural Response Field Test Results

Since for a simply supported bridge under various live loads the maximum bending moment usually happens at the midspan, 14 strain sensors were installed at the bottom face of all stems for the 30-in. (762-mm) deep double-tee girder bridge as discussed in Sec. 7.4. A summary of the flexural test results is presented herein.


7.5.1.2.1 Measured Flexural Strains

Figure 7.29 shows the measured tensile strains for each girder of the 30-in. (762-mm) deep double-tee bridge. The x-axis shows the truck front tire position and y-axis is the average strains of the two stems per girder in micro-strain ($\mu\epsilon$). The x-axis was limited to the sum of the bridge span length (42 ft, or 12.8 m) plus the truck length (21.2 ft, or 6.5 m) resulting in 63.2 ft (19.3 m). Due to a malfunctioning of the data acquisition system, the data for SG-1 to SG-8 during the Path A testing was lost, that is Path A was not included in the figure. Nevertheless, since the bridge is symmetric, the response of Path E might be valid for Path A. It can be seen that the loaded girders exhibited the largest strains, and the strains were maximum where the rear axles of the truck were close to the bridge midspan.


Figure 7.30 shows the measured flexural tensile strains for the 30-in. (762-mm) deep double-tee girder bridge in the bridge transverse direction. It can be seen that the flexural strain demands were highest for the exterior girders. Consistent results were observed in each run of each path.

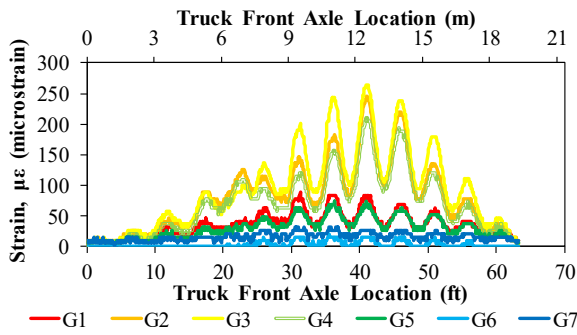


(a) Girder Midspan Strains in First Run of Path B

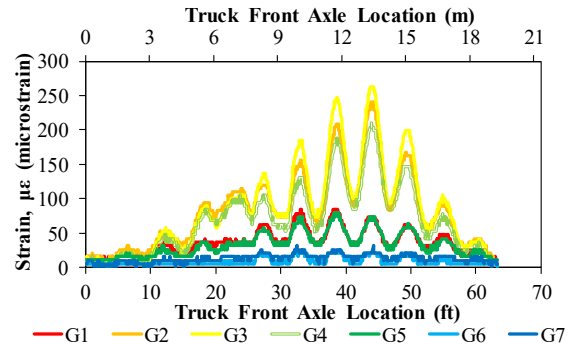


(b) Girder Midspan Strains in Second Run of Path B

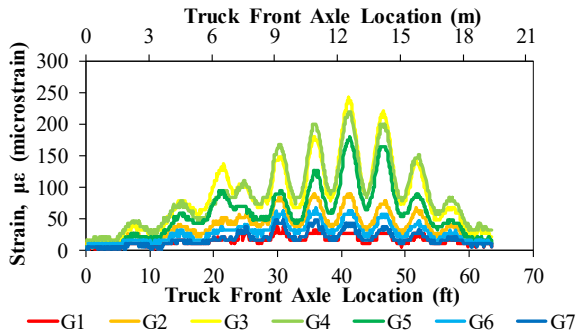


(c) Girder Midspan Strains in First Run of Path C

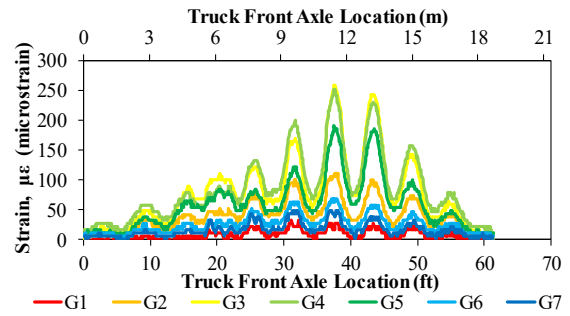


(d) Girder Midspan Strains in Second Run of Path C

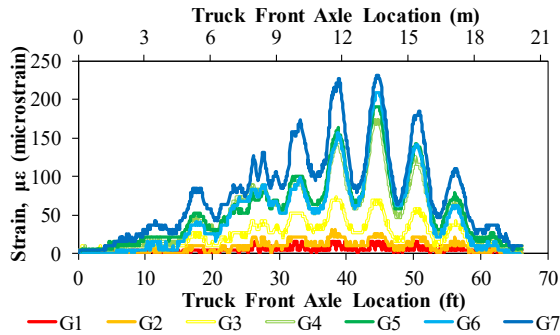


(e) Girder Midspan Strains in First Run of Path D

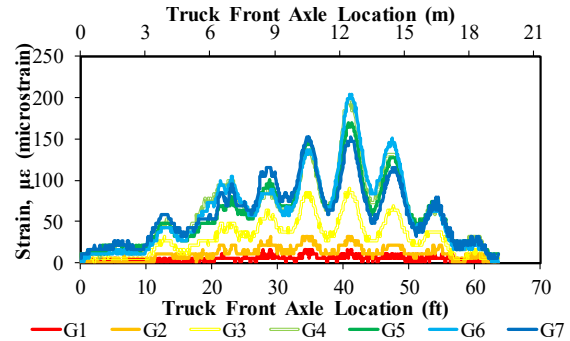

(f) Girder Midspan Strains in Second Run of Path D

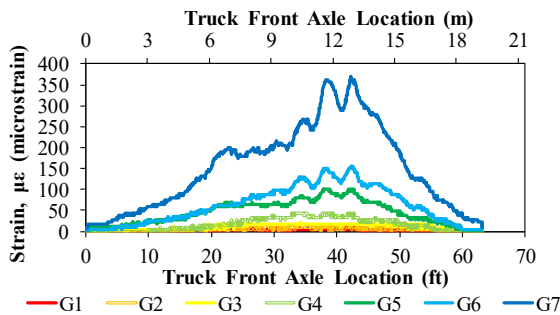


(g) Girder Midspan Strains in First Run of Path E

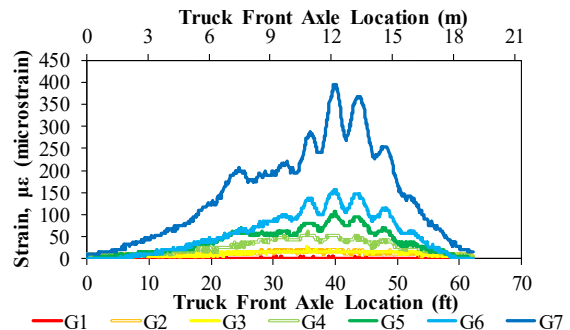


(h) Girder Midspan Strains in Second Run of Path E

Figure 7.29 – Measured Flexural Tensile Strains for 30-in. (762-mm) Deep Double-Tee Girder Bridge in Longitudinal Direction

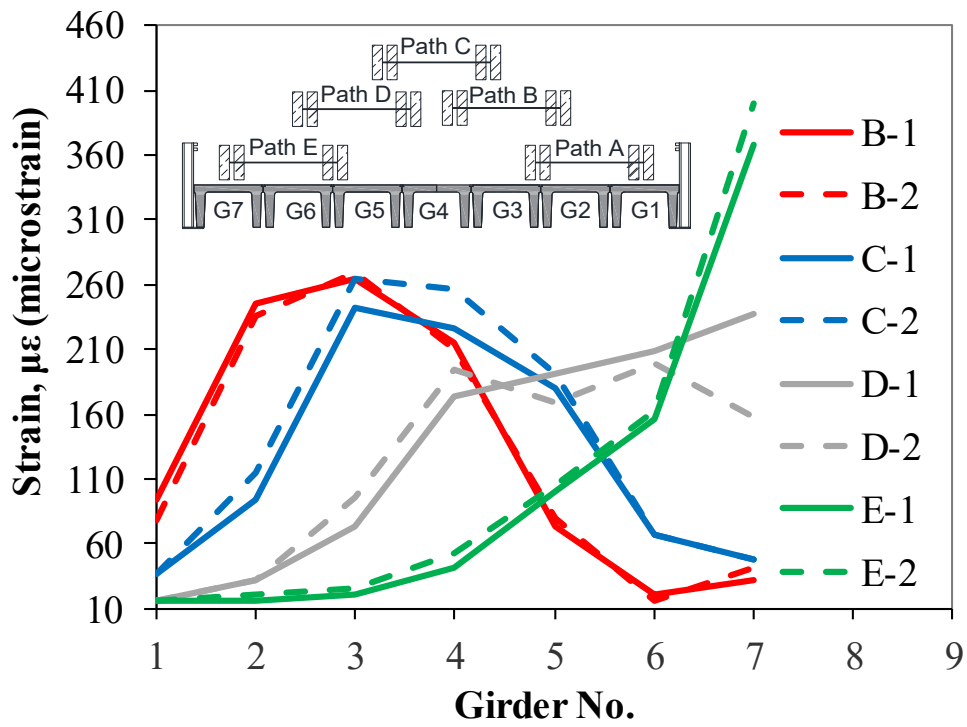

(a) Maximum Measured Flexural Tensile Strains for Each Girder in Each Run

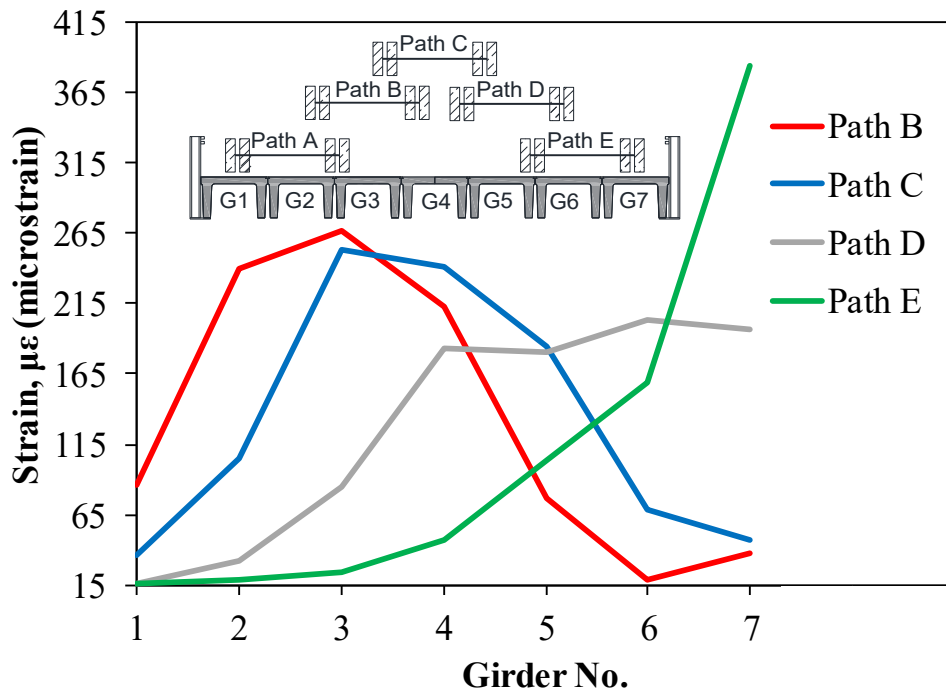

(b) Maximum Measured Flexural Tensile Strains for Each Girder in Each Path

Figure 7.30 – Measured Flexural Tensile Strains for 30-in. (762-mm) Deep Double-Tee Girder Bridge in Transverse Direction

7.5.1.2.2 Measured Moment Girder Distribution Factors

The moment girder distribution factor is defined as the ratio of the girder maximum flexural tensile strain (ε) to the sum of the maximum flexural tensile strains for all girders (Hughes et al., 2006) as follows:

$$GDF_i = \frac{\varepsilon_i}{\sum_{i=1}^k \varepsilon_i} \quad (\text{Eq. 7.3})$$

where k is the total number of girders in the test bridge.

Table 7.6 presents the moment GDFs for the 30-in. (762-mm) deep double-tee girder bridge, and Fig. 7.31 is a graphical illustration of the values in the table. The calculated moment GDFs per the AASHTO LRFD requirements are also included. It can be seen that the loaded girders per path had the highest moment GDFs compared to the not-loaded girders in that path. The exterior girders showed the largest moment GDFs in this bridge. Furthermore, all measured moment GDFs were equal to or lower than those calculated using the AASHTO LRFD. Therefore, the AASHTO moment GDFs can be used for 30-in. (762-mm) deep double-tee girder bridges in which their girder-to-girder joints are deteriorated with a condition state 3 or less.

Table 7.6 – Moment Girder Distribution Factors for 30-in. (762-mm) Deep Double-Tee Girder Bridge

Load Paths / Girder Number	G1	G2	G3	G4	G5	G6	G7
Path A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Path B	0.09	0.26	0.28	0.23	0.08	0.02	0.04
Path C	0.04	0.11	0.27	0.26	0.20	0.07	0.05
Path D	0.02	0.04	0.09	0.20	0.20	0.23	0.22
Path E	0.02	0.02	0.03	0.06	0.14	0.21	0.51
Maximum GDF per Girder	0.09	0.26	0.28	0.26	0.20	0.23	0.51
AASHTO GDF per Girder	0.52	0.38	0.38	0.38	0.38	0.38	0.52

Note: Strain data for Path A was lost due to DAQ malfunctioning.

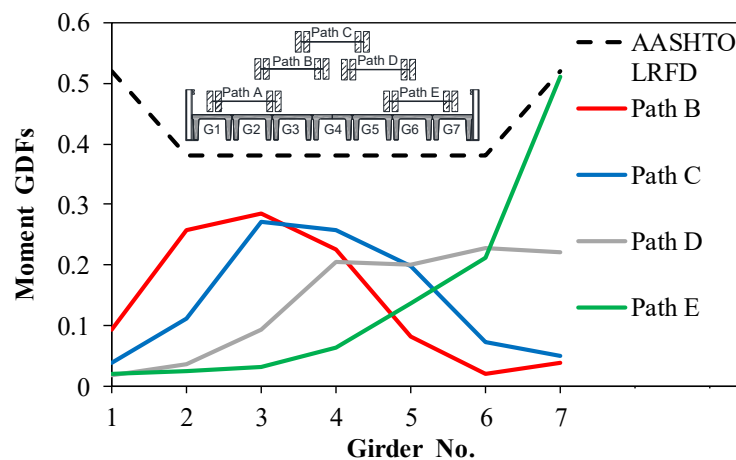


Figure 7.31 – Moment Girder Distribution Factors for 30-in. (762-mm) Deep Double-Tee Girder Bridge

7.5.1.2.3 Measured Dynamic Load Allowance


The initial truck speed selected for dynamic testing was 55 mph (88.5 kph) but it was reduced to 35 mph (56.3 kph) for the safety of the crew and the bridge. The intention of the dynamic tests was to determine how the bridge would respond to a dynamic load and to evaluate the dynamic load allowance (IM) needed for load rating.

According to AASHTO MBE (2011), the dynamic load allowance is determined using the maximum dynamic strain and the corresponding maximum static strain for vehicles on the same path or transverse position on the bridge (Eq. 7.4). Table 7.7 presents the measured static and dynamic strains during flexural response testing of the 30-in. (762-mm) deep double-tee girder bridge. The measured IM is also included in the table. Figure 7.32 shows the measured static and dynamic strains in Paths B, C, and D, both in transverse and longitudinal directions of the bridge. Note that no dynamic test was performed on Paths A and E due to the bridge and road geometries. It can be seen that the maximum measured dynamic load was 7.2%, which is significantly lower than that required by the AASHTO LRFD for this bridge, which is 33%. Therefore, the AASHTO LRFD required dynamic load allowance can be used for 30-in. (762-mm) deep double-tee girder bridges in which their girder-to-girder joints are deteriorated with a condition state 3 or less.


$$IM = \frac{\text{Dynamic Strain} - \text{Static Strain}}{\text{Static Strain}} \quad (\text{Eq. 7.4})$$

Table 7.7 – Measured Static and Dynamic Strains and Dynamic Load Allowance (IM) for 30-in. (762-mm) Deep Double-Tee Girder Bridge


Girder Number	Path B	Path B	Path C	Path C	Path D	Path D
	Static Strain (µε)	Dynamic Strain (µε)	Static Strain (µε)	Dynamic Strain (µε)	Static Strain (µε)	Dynamic Strain (µε)
1	87	55	37	52	16	29
2	241	199	105	102	31	42
3	267	285	253	240	84	87
4	212	210	241	218	184	197
5	77	98	185	167	180	185
6	18	26	68	63	204	214
7	37	66	47	66	197	218
Maximum Strain (µε)	267	285	253	240	204	218
Dynamic Load Allowance	6.9%	6.9%	0%	0%		7.2%
IM by AASHTO	33%	33%	33%	33%	33%	33%

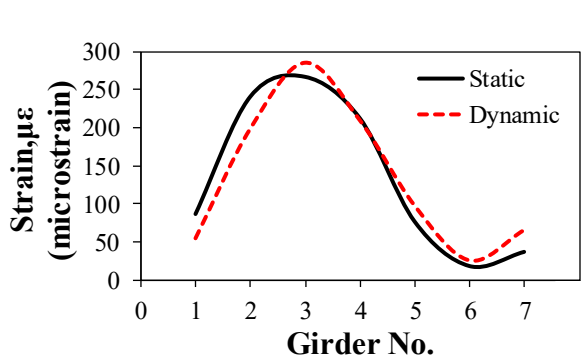


(a) Strains in Path B in Transverse Direction

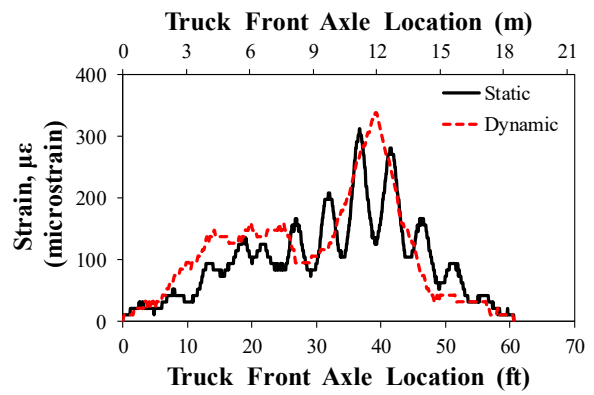


(b) Strains in Path B in Longitudinal Direction

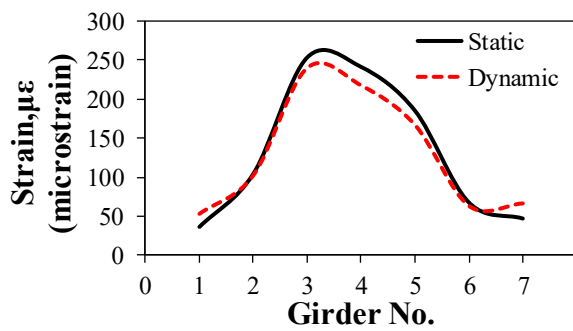


(c) Strains in Path C in Transverse Direction

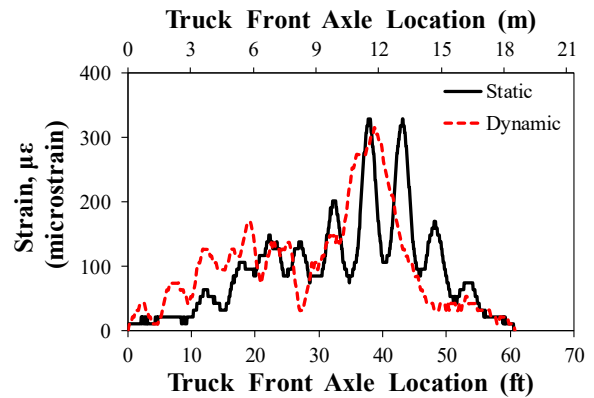

(d) Strains in Path C in Longitudinal Direction

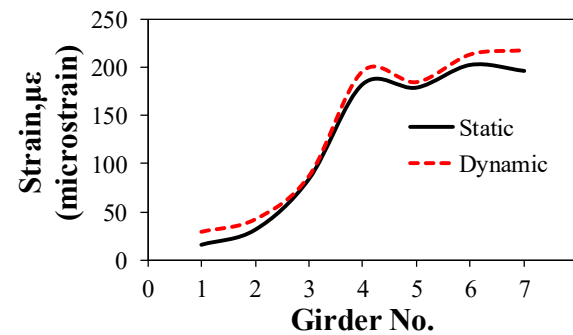

(e) Strains in Path D in Transverse Direction

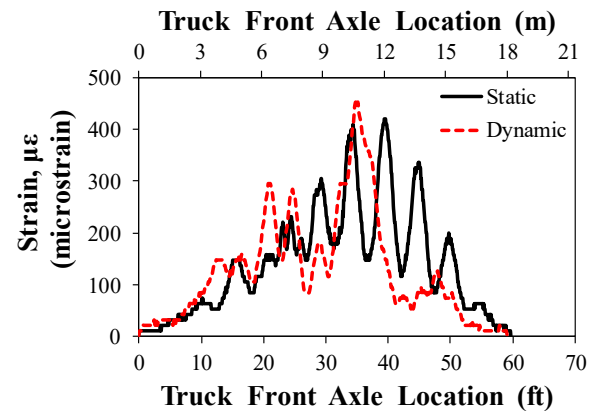

(f) Strains Path D in Longitudinal Direction

Figure 7.32 – Measured Static and Dynamic Strains for 30-in. (762-mm) Deep Double-Tee Girder Bridge

7.5.2 Field Test Results for 23-in. (584-mm) Deep Double-Tee Girder Bridge

Only the flexural test was performed for the 23-in. (584-mm) deep double-tee girder bridge. This section presents a summary of the experimental findings.


7.5.2.1 Flexural Response Field Test Results

The 23-in. (584-mm) deep double-tee girder bridge had eight girders in which at least one strain sensor was installed on each stem. Refer to Sec. 7.4.2 for details of the instrumentation plan.


7.5.2.1.1 Measured Flexural Strains

Figure 7.33 shows the measured tensile strains for each girder of the 23-in. (584-mm) deep double-tee bridge. The x-axis shows the truck front tire position and y-axis is the average strains of the two stems per girder in micro-strain ($\mu\epsilon$). The x-axis was limited to the sum of the bridge span length (50 ft, or 15.24 m) plus the truck length (21.2 ft, or 6.5 m) resulting in 71.2 ft (21.74 m). It can be seen that the loaded girders exhibited the largest strains, and the strains were maximum where the rear axles of the truck were close to the bridge midspan.


Figure 7.34 shows the measured flexural tensile strains for the 23-in. (584-mm) deep double-tee girder bridge in the bridge transverse direction. It can be seen that the flexural strain demands were highest for the exterior girders. Consistent results were observed in each run of each path.

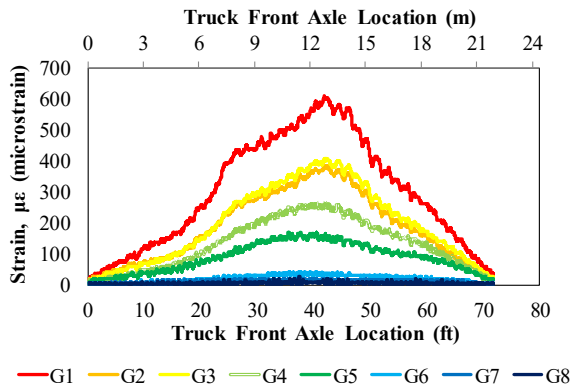


(a) Girder Midspan Strains in First Run of Path A

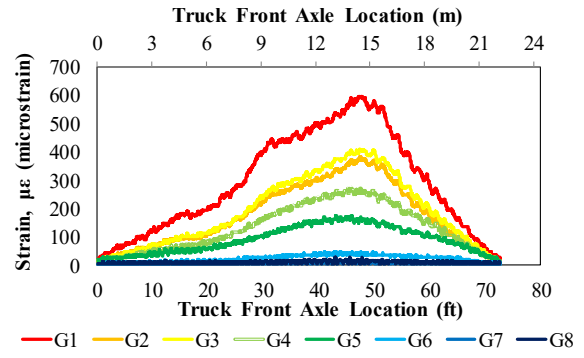


(b) Girder Midspan Strains in Second Run of Path A

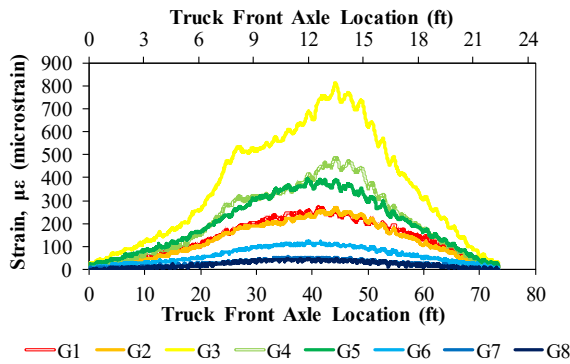


(c) Girder Midspan Strains in First Run of Path B

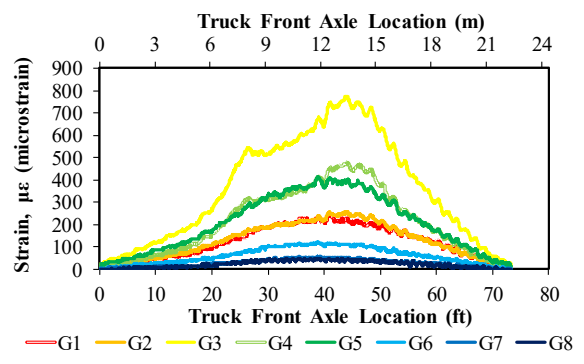

(d) Girder Midspan Strains in Second Run of Path B

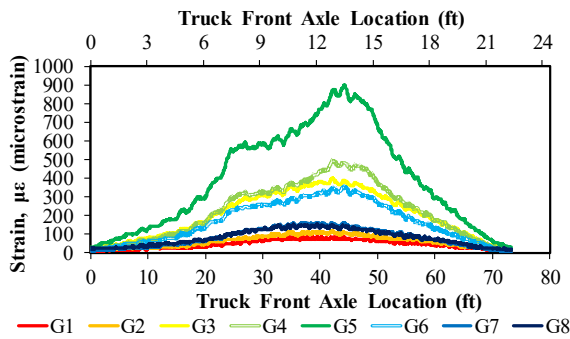


(e) Girder Midspan Strains in First Run of Path C

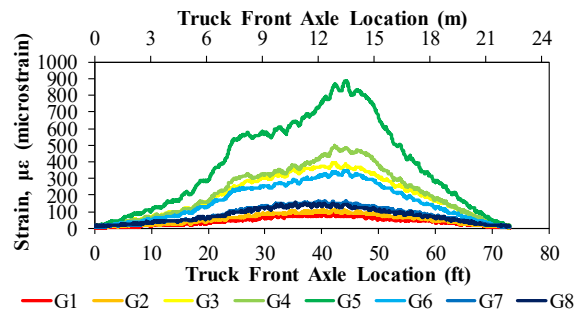


(f) Girder Midspan Strains in Second Run of Path C


Figure 7.33 – Measured Flexural Tensile Strains for 23-in. (584-mm) Deep Double-Tee Girder Bridge in Longitudinal Direction

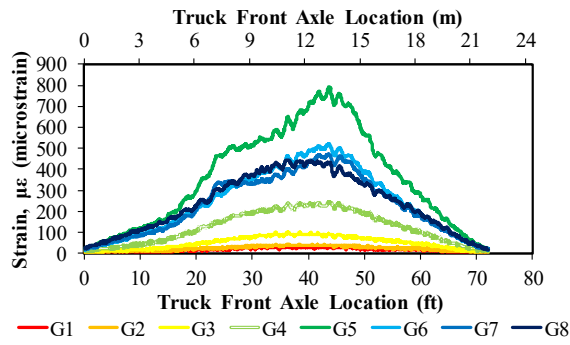


(g) Girder Midspan Strains in First Run of Path D

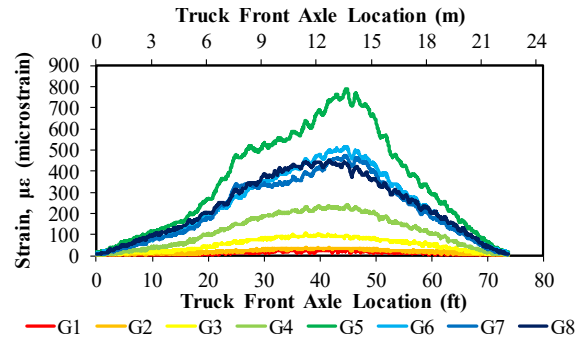

(h) Girder Midspan Strains in Second Run of Path D

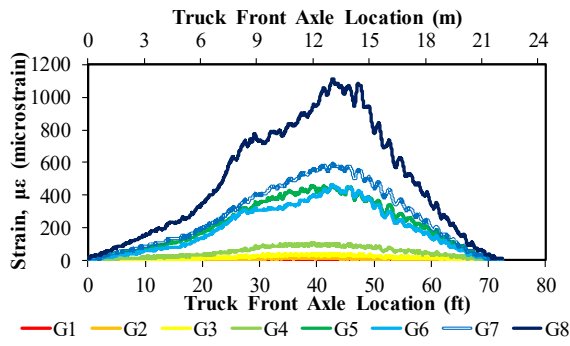


(i) Girder Midspan Strains in First Run of Path E

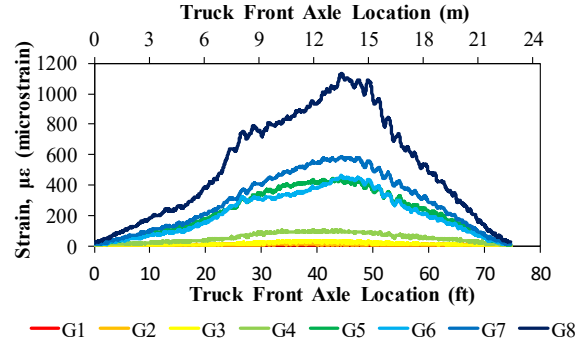


(j) Girder Midspan Strains in Second Run of Path E

Figure 7.33 – Continued

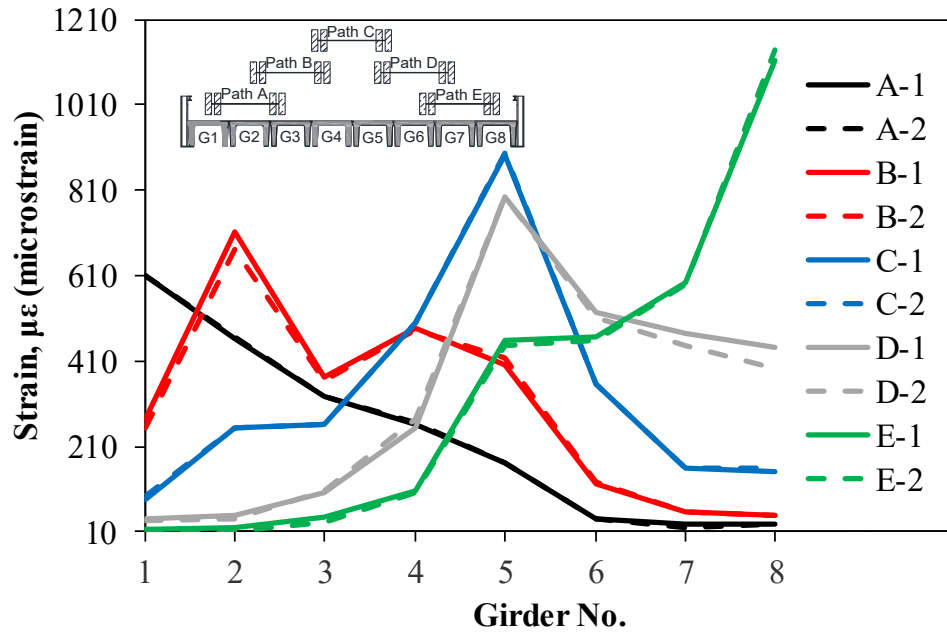

(a) Maximum Measured Flexural Tensile Strains for Each Girder in Each Run

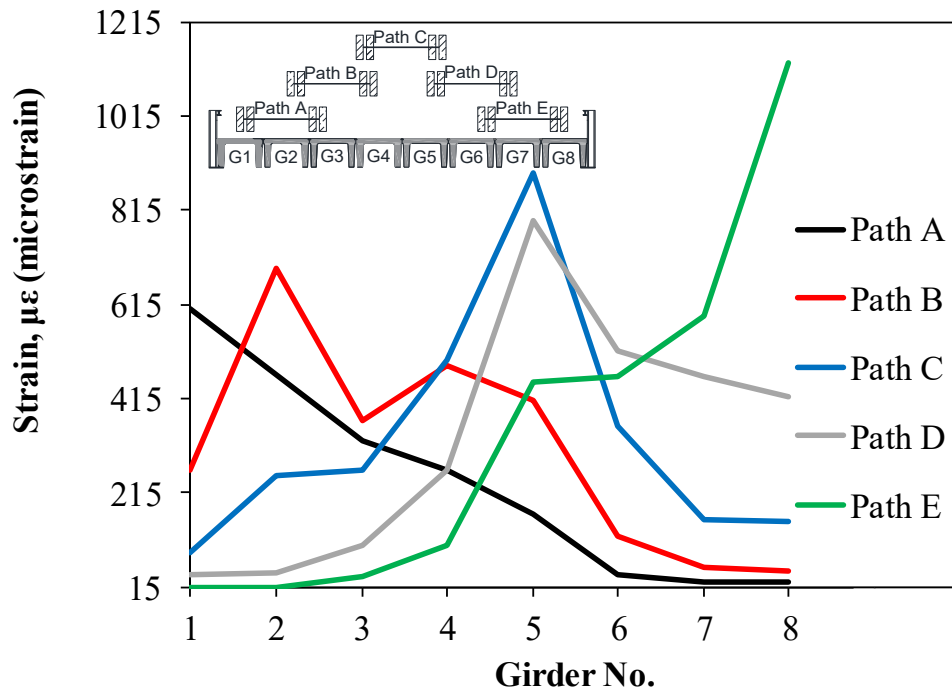

(b) Maximum Measured Flexural Tensile Strains for Each Girder in Each Path

Figure 7.34 – Measured Flexural Tensile Strains for 23-in. (584-mm) Deep Double-Tee Girder Bridge in Transverse Direction

7.5.2.1.2 Measured Moment Girder Distribution Factors

The moment girder distribution factors were estimated using Eq. 7.3. Table 7.8 presents the measured moment GDFs for the 23-in. (584-mm) deep double-tee girder bridge, and Fig. 7.35 is a graphical illustration of the values in the table. The calculated moment GDFs per the AASHTO LRFD requirements are also included. It can be seen that the loaded girders per path had the highest moment GDFs compared to the not-loaded girders in that path. The exterior girders shows the largest moment GDFs in this bridge. All measured moment GDFs were equal to or lower than those calculated using the AASHTO. Therefore, the AASHTO moment GDFs can be used for 23-in. (584-mm) deep double-tee girder bridges in which their girder-to-girder joints are deteriorated with a condition state 3 or less.

Table 7.8 – Moment Girder Distribution Factors for 23-in. (584-mm) Deep Double-Tee Girder Bridge

Load Paths / Girder Number	G1	G2	G3	G4	G5	G6	G7	G8
Path A	0.32	0.24	0.17	0.14	0.09	0.02	0.01	0.01
Path B	0.11	0.28	0.15	0.20	0.17	0.05	0.02	0.02
Path C	0.03	0.09	0.10	0.19	0.34	0.13	0.06	0.06
Path D	0.01	0.02	0.04	0.10	0.30	0.20	0.17	0.16
Path E	0.01	0.01	0.01	0.04	0.16	0.16	0.21	0.40
Maximum GDF per Girder	0.32	0.28	0.17	0.20	0.34	0.20	0.21	0.40
AASHTO GDF per Girder	0.438	0.33	0.33	0.33	0.33	0.33	0.33	0.438

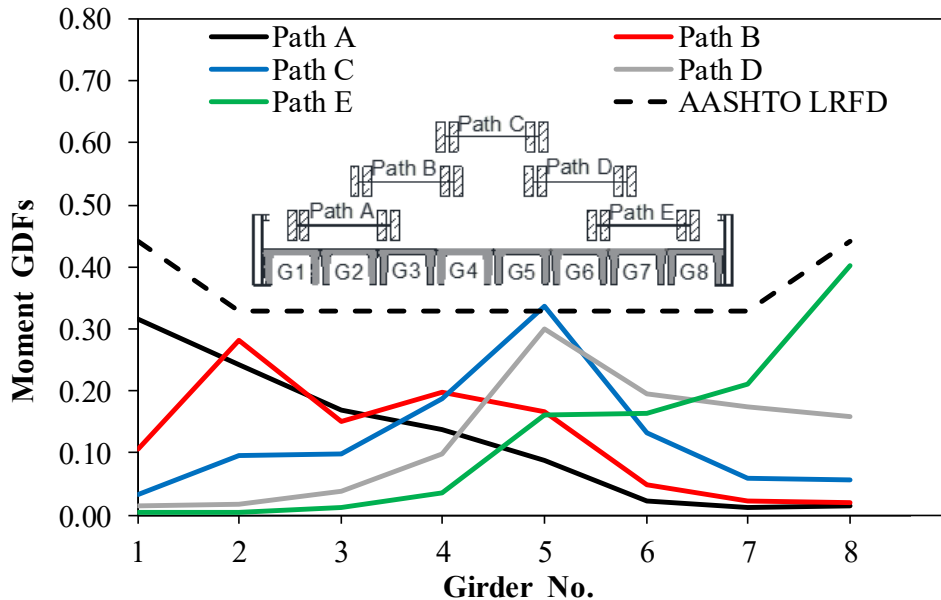



Figure 7.35 – Moment Girder Distribution Factors for 23-in. (584-mm) Deep Double-Tee Girder Bridge

7.5.2.1.3 Measured Dynamic Load Allowance


Equation 7.4 was used to estimate the dynamic load allowance. Table 7.9 presents the measured static and dynamic strains during flexural response testing of the 23-in. (5842-mm) deep double-tee girder bridge. The measured IM is also included in the table. Figure 7.36 shows the measured static and dynamic strains in Paths B, C, and D, both in transverse and longitudinal directions of the bridge. No dynamic test was done on Paths A and E due to the bridge and road geometries. It can be seen that the maximum measured dynamic load was 6.2%, which is lower than that required by the AASHTO LRFD for this bridge, which was 33%. Therefore, the AASHTO LRFD required dynamic load allowance can be used for 23-in. (584-mm) deep double-tee girder bridges in which their girder-to-girder joints are deteriorated with a condition state 3 or less.

Table 7.9 – Measured Static and Dynamic Strains and Dynamic Load Allowance (IM) for 23-in. (584-mm) Deep Double-Tee Girder Bridge


Girder Number	Path B	Path B	Path C	Path C	Path D	Path D
	Static Strain ($\mu\epsilon$)	Dynamic Strain ($\mu\epsilon$)	Static Strain ($\mu\epsilon$)	Dynamic Strain ($\mu\epsilon$)	Static Strain ($\mu\epsilon$)	Dynamic Strain ($\mu\epsilon$)
1	262	223	89	105	39	45
2	691	233	253	115	45	42
3	368	734	263	380	103	103
4	485	517	498	498	262	254
5	410	505	896	933	793	817
6	123	157	355	402	517	509
7	58	76	158	195	461	458
8	47	76	155	210	418	444
Maximum Strain ($\mu\epsilon$)	691	734	896	933	793	817
Dynamic Load Allowance	6.2%	6.2%	4.1%	4.1%	3.0%	3.0%
IM by AASHTO	33%	33%	33%	33%	33%	33%

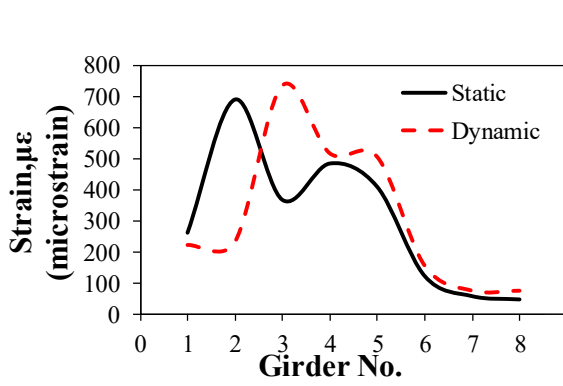


(a) Strains in Path B in Transverse Direction

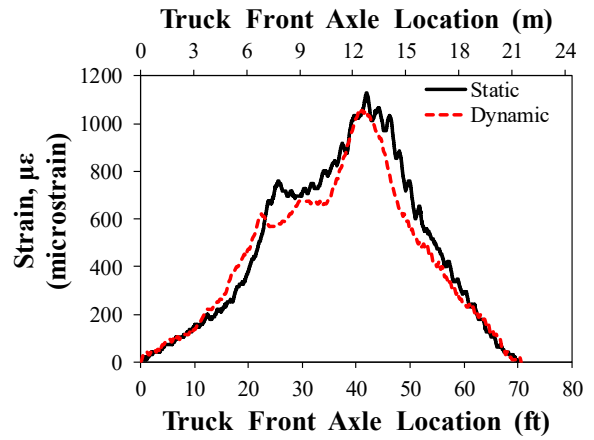


(b) Strains in Path B in Longitudinal Direction

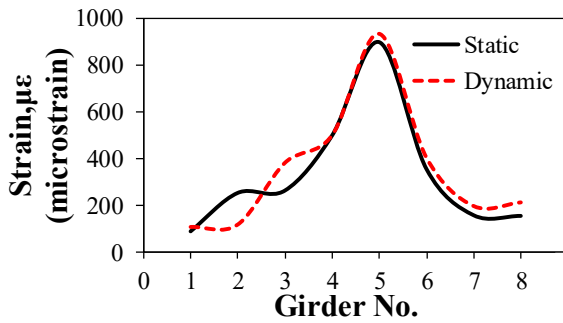


(c) Strains in Path C in Transverse Direction

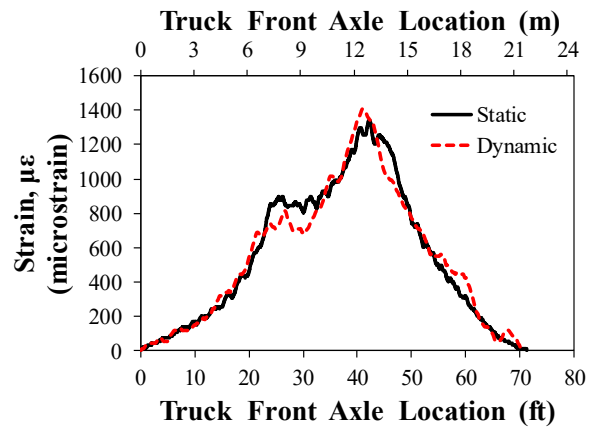

(d) Strains in Path C in Longitudinal Direction

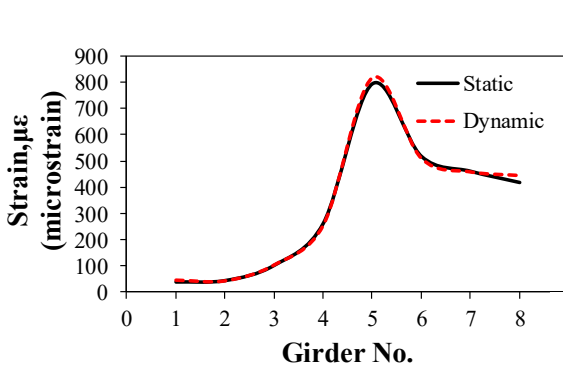

(e) Strains in Path D in Transverse Direction

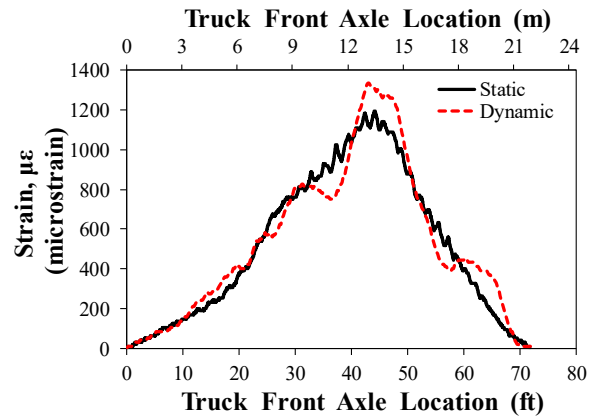

(f) Strains in Path D in Longitudinal Direction

Figure 7.36 – Measured Static and Dynamic Strains for 23-in. (584-mm) Deep Double-Tee Girder Bridge

7.6 Summary

Two double-tee bridges, one with 30-in. (762-mm) depth girders and another with 23-in. (584-mm) deep girders, were field tested to investigate their live load transfer mechanisms. Both bridges had deteriorated longitudinal joints with a damage condition state 3. Both bridges were tested for flexural response but only the bridge with the 30-in. (762-mm) deep girders was tested to obtain shear demands. The test data showed that the measured shear and moment girder distribution factors and the dynamic load allowance were equal to or lower than those calculated per the AASHTO LRFD requirements. Therefore, the AASHTO LRFD procedures can conservatively be used for the estimation of live loads for any South Dakota double-tee bridge with a girder-to-girder damage condition state 3 or less.

7.7 Recommendations for Live Load Estimation of Damaged Double-Tee Girder Bridges

Based on the field test findings and engineering judgment, the following guidelines are recommended for the live load estimation of double-tee girder bridges with deteriorated longitudinal joints. It is believed that other types of girder damage do not alter the live load distribution.

1. To calculate moment or shear GDFs for a SD double-tee girder bridge with a longitudinal joint damage condition state 3 or less, follow the AASHTO LRFD specifications.
2. To calculate moment or shear GDFs for a SD double-tee girder bridge with a longitudinal joint damage condition state 4, GDF is the greater of (a) the factor for the exterior girders, (b) the factor for the interior girders, and (c) 0.6.
3. To calculate the dynamic load allowance (IM), follow the AASHTO LRFD specifications.

During the time of the present project, no double-tee bridge was found in which its girder-to-girder joint was severely damaged (condition state 4). Therefore, no test was performed on such a bridge. Recommendation No. 2 is based on the fact that for a SD double-tee bridge with a typical girder width of 46 in. (1.17 m) to 48 in. (1.22 m) and a design truck with a transverse axle spacing of 6 ft (1.83 m), each girder can resist no more than 50% of the truck weight assuming that girders will act as individual members (completely unzipped) when the condition state of the longitudinal joints is 4. A 0.6 factor (10% more than 50%) was recommended for extra safety. Furthermore, in this case, any girder acts as an exterior girder because it is not connected to its adjacent girders. The recommendation ensures a conservative and safe live load estimation for the damaged double-tee bridges located in South Dakota.

8 STRENGTH TESTING OF 45-YR OLD SALVAGED DOUBLE-TEE GIRDERS

The South Dakota Department of Transportation (SDDOT) currently allows precast double-tee girder bridges on local roads since they are economical and fast in construction. The design service life of bridges is 75 years. However, many of double-tee bridges are deteriorating, need repair, or replacement after only 40 years of service (Mingo, 2016). Load rating of distressed bridges requires accurate estimation of capacities and demands. Using the test data from the literature, it was shown in Chapter 5 that the AASHTO LRFD methods of capacity estimation are accurate for aged girders with minor distresses. However, there was no test data on severely damaged aged girders (damage prior to testing) in the literature to verify the AASHTO capacity equations.

Strength testing of salvaged double-tee girders was needed to validate the capacity estimation methods available in the AASHTO or different references. Two 45-year double-tee girders extracted from the Nemo Road Bridge (Bridge 52-319-268) in Pennington County, SD, were selected for strength testing. This section presents a description of the salvaged girders, test setup, loading protocol, instrumentation plan, and strength test results of these girders.

8.1 Description of Salvaged Girders

Two double-tee bridges (Fig. 8.1) close to Rapid City, SD, for which replacement funds became available, were inspected to select girders for lab test. Girders of the Nemo Road Bridge (ID 52-313-265, built in 1972) had more apparent damage compared to those of Norris Peak Road Bridge (ID 52-319-268, built in 1972). Therefore, one 30-ft (9.14-m) long double-tee girder and one 50-ft (15.24-m) long double-tee girder (Fig. 8.2), each 23-in. (584-mm) deep, were selected and extracted from this bridge (Fig. 8.3). The variation in the girder length was to investigate different failure modes. A short and damaged girder may fail in shear even though it was designed for a flexural failure. The two salvaged girders were delivered to the Lohr Structures Laboratory at South Dakota State University (SDSU).




(a) Bridge 52-313-265 (Nemo Road)

(b) Bridge 52-319-268 (Norris Peak Road)

Figure 8.1 – Double-Tee Girder Bridges Inspected for Strength Testing



(a) Bridge 52-313-265 (Nemo Road)

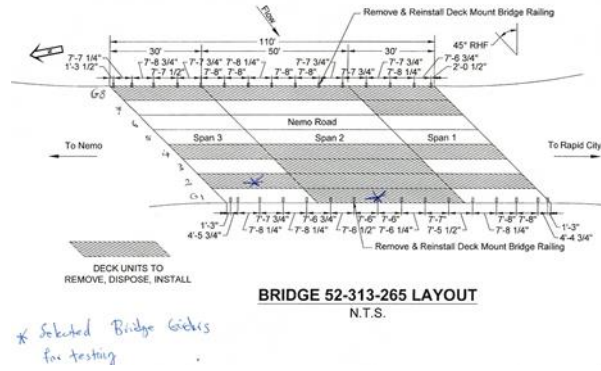

(b) Selected Girders



(c) Selected 30-ft (9.14-m) Long Girder – Underneath View



(d) Selected 30-ft (9.14-m) Long Girder – Top View



(e) Selected 50-ft (15.24-m) Long Girder



(f) Midspan Close-up View of Selected 50-ft (15.24-m) Long Girder

Figure 8.2 – Selected Salvaged Double-Tee Girders for Strength Testing



Figure 8.3 – Extraction and Transportation of Salvaged Double-Tee Girders

Table 8.1 presents a summary of the girder damage according to the definitions presented in Chapter 6 and Fig. 8.4 shows damage of the salvaged girders. The 50-ft (15.24-m) long salvaged girder was 23-in. (584-mm) deep and 45-in. (1143-mm) wide with a 45-degree skew. It had concrete diaphragms at both ends. The flange was 5-in. (127-mm) thick and the stem was 18-in. (457-mm) deep. The prestressing strands for this girder were harped at a distance of $0.2L$ from each end, where L is the girder length. Seven 0.5-in. (12.7-mm) diameter uncoated low-relaxation ASTM A416 Grade 270 (1862 MPa) tendons were utilized in each stem of this girder. It is worth mentioning that in addition to the original damage (Table 8.1), this girder was further cracked at the midspan during unloading from the truck during transportation to SDSU (Fig. 8.4d).

The 30-ft (9.14-m) long salvaged girder had the same geometry as that in the 50-ft (15.24-m) long girder. However, it had concrete diaphragm at only one girder end. Furthermore, only four 0.5-in. (12.7-mm) diameter uncoated low relaxation ASTM A416 Grade 270 tendons were utilized per stem of this girder, all with a straight profile with no harp.

Table 8.1 – 45-Year Salvaged Double-Tee Girders Extracted from Bridge 52-319-268

Girder Depth, in. (mm)	Girder Length, ft (m)	As-received Girder Damage Type and Condition State
23 (584)	30 (9.14)	Spalling of stem concrete cover (with a condition state of Severe, Fig. 8.4a), exposure of stem transverse reinforcement (with a condition state of Severe, Fig. 8.4a & c), and leakage of girder-to-girder joints (with a condition state of Poor).
23 (584)	50 (15.24)	Deterioration of concrete cover (with condition state of severe, Fig. 8.4b), exposure of transverse rebar (with a condition state of Severe, 8.4f), exposure of longitudinal prestressing (with a condition state of Severe, Fig. 8.4f), and leakage of girder-to-girder joints (with a condition state of Poor).



(a) Stem Cover Deterioration for 30-ft (9.14-m) Girder



(b) Stem Cover Deterioration for 50-ft (15.24-m) Girder



(c) Flange Cover Deterioration of 30-ft (9.14-m) Girder



(d) Damage of 50-ft (15.24-m) Girder during Unloading



(e) Reinforcement Exposure of 30-ft (9.14-m) Girder



(f) Exposure of Strands and Transverse Bars on Stem of 50-ft (15.24-m) Girder

Figure 8.4 – As-received Damage of Salvaged Girders Selected for Strength Testing

8.2 Strength Test Setup for Salvaged Double-Tee Girders

Figures 8.5 to 8.9 show the strength test setup for the salvaged girders. Concrete reaction blocks were used as abutments, which were positioned in a skewed configuration to match with the girder skew angle and to balance the loads in the two stems. The height of the south end abutment was slightly shorter than the north end to accommodate load cells. A point load was applied to a spreader beam at the girder centerline at its midspan using a hydraulic actuator. The load was then split in two point loads equally spaced from the girder midspan to form a four-point loading configuration. The loading plates were 20-in. (508-mm) long and 10-in. (254-mm) wide simulating the AASHTO truck wheel areas.

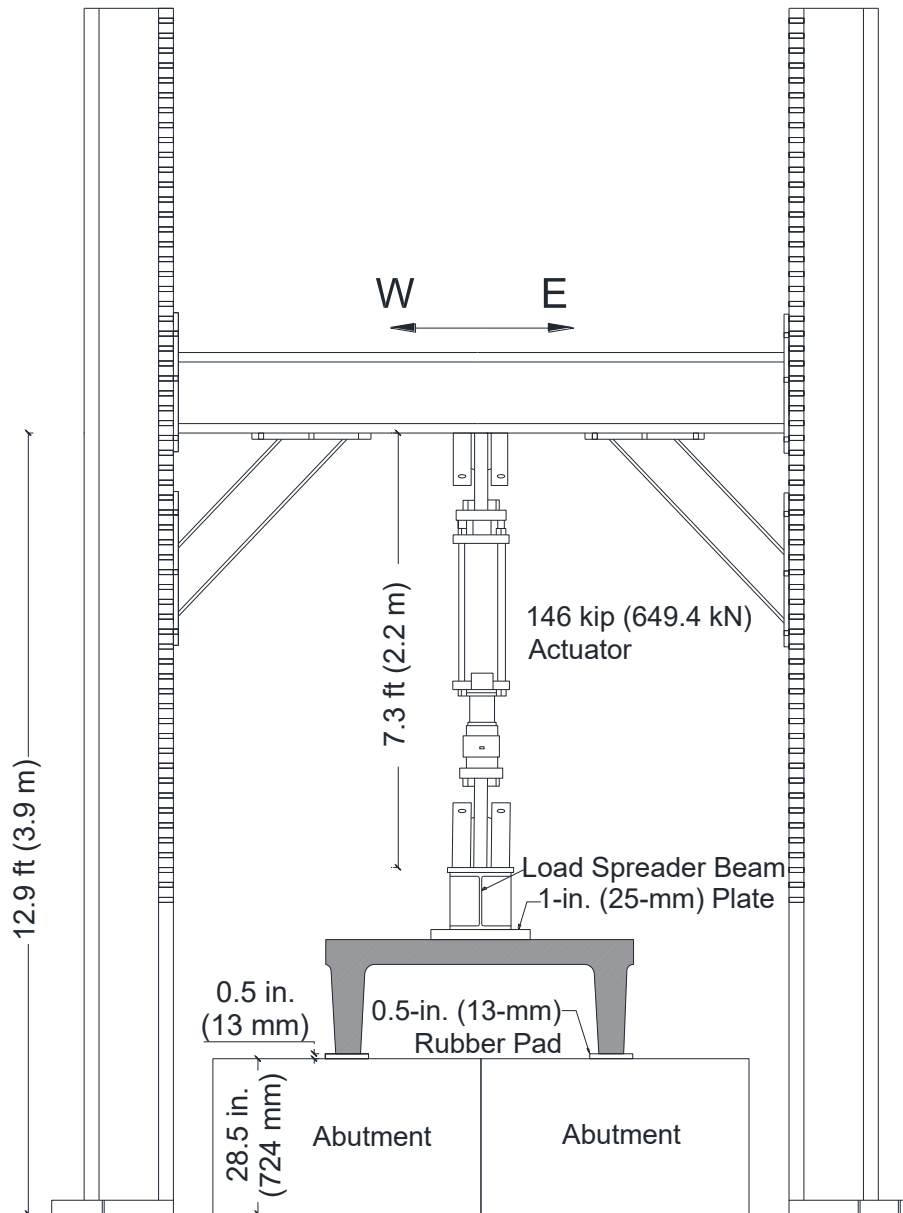


Figure 8.5 – Strength Test Setup for Salvaged Girders – Section View

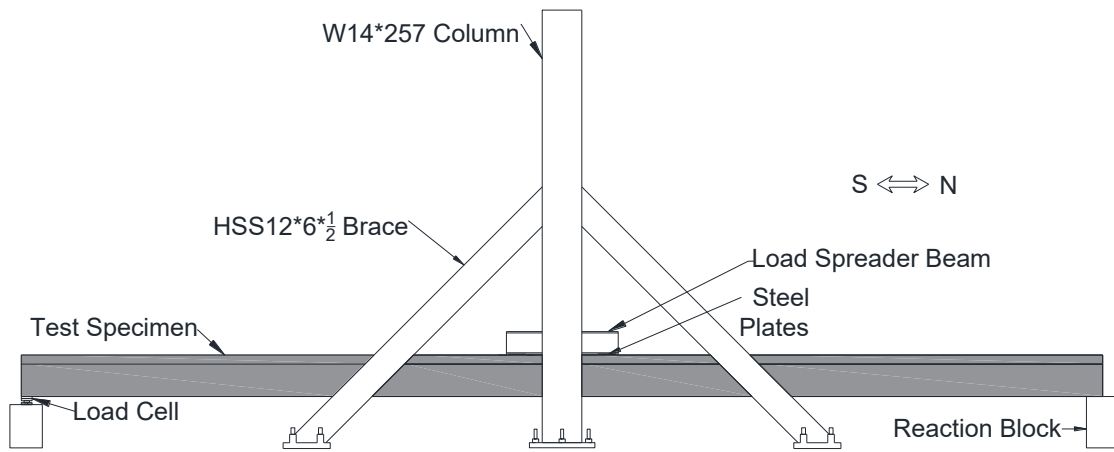


Figure 8.6 – Strength Test Setup for Salvaged Girders – Elevation View

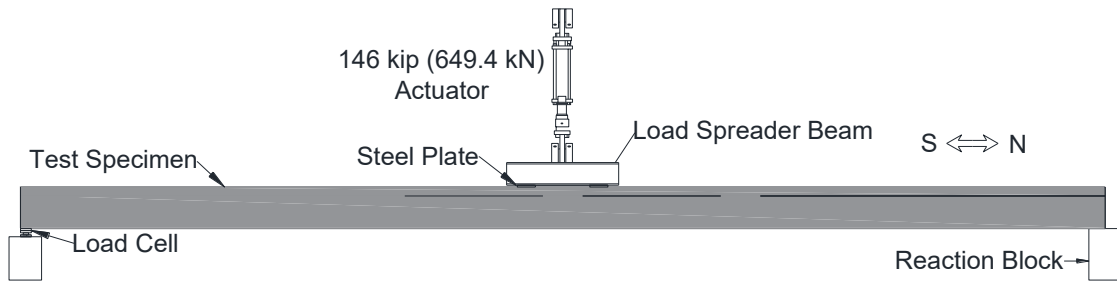


Figure 8.7 – Strength Test Setup for Salvaged Girders – Elevation View without Test Frame

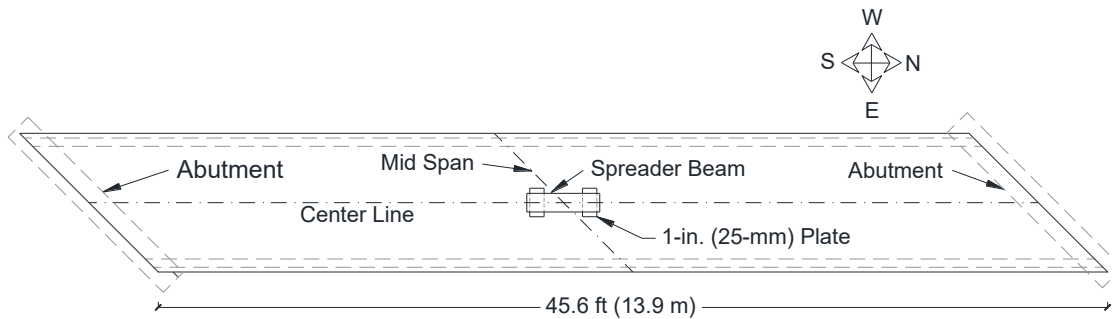


Figure 8.8 – Point Loads in Plan View of 50-ft (15.24-m) Long Girder

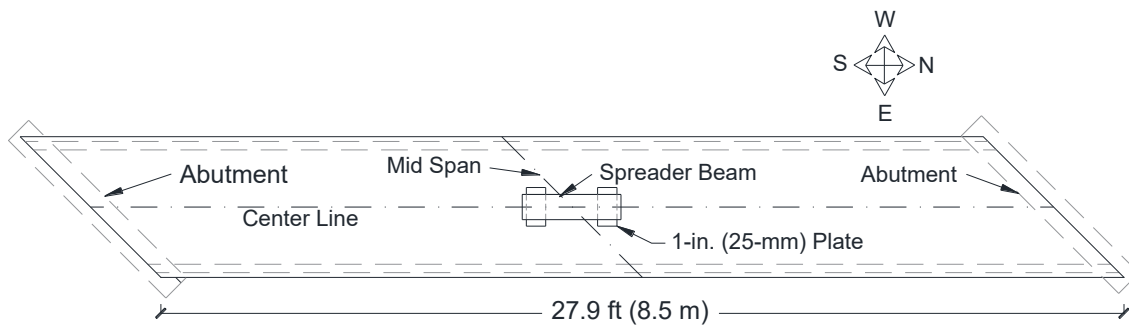


Figure 8.9 – Point Loads in Plan View of 30-ft (9.14-m) Long Girder

8.3 Loading Protocol for Strength Testing of Salvaged Girders

Strength testing was performed on both girders to determine their capacities. Both girders were tested under a monotonic loading using a 146-kip (649-kN) actuator with a displacement rate of 0.007 in/sec (0.178 mm/sec).

8.4 Instrumentation Plan

8.4.1 50-ft (15.24-m) Long Girder

Sensors used for the strength testing of the 50-ft (15.24-m) long girder consisted of strain gauges, linear variable differential transformers (LVDTs), load cells, and string potentiometers (string pots). Table 8.2 presents a summary of the sensor types and locations. Details of the instrumentation plan are presented in the following sections.

Table 8.2 – Sensors Used in Strength Testing of 50-ft (15.24-m) Long Girder

Sensor Name		Identification	Location
Concrete Strain Gauge (CSG)	CSG-1	PMFLA-60-2LJRTA	Flange, 9.12 ft (2.8-m) away from the south end
Concrete Strain Gauge (CSG)	CSG-2	PMFLA-60-2LJRTA	Flange, 9.12 ft (2.8-m) away from the south end
Concrete Strain Gauge (CSG)	CSG-3	PMFLA-60-2LJRTA	Flange, 9.12 ft (2.8-m) away from the south end
Concrete Strain Gauge (CSG)	CSG-4	PMFLA-60-2LJRTA	Flange, midspan
Concrete Strain Gauge (CSG)	CSG-5	PMFLA-60-2LJRTA	Flange, midspan
Steel Strain Gauge (SSG)	SSG-1	YFLA-2-5LJC	Stem, midspan exposed tendons
Steel Strain Gauge (SSG)	SSG-2	YFLA-2-5LJC	Stem, midspan exposed tendons
Steel Strain Gauge (SSG)	SSG-3	YFLA-2-5LJC	Stem, midspan exposed tendons
Steel Strain Gauge (SSG)	SSG-4	YFLA-2-5LJC	Stem, midspan exposed tendons
Horizontal LVDT (H)	H-1	LVDT 1.2	Stem, 9.12 ft (2.8-m) away from the south end
Horizontal LVDT (H)	H-2	LVDT 1.1	Stem, 9.12 ft (2.8-m) away from the south end
Horizontal LVDT (H)	H-3	LVDT 1.3	West stem of girder, midspan
Horizontal LVDT (H)	H-4	LVDT 2.4	East side of flange, midspan
Vertical LVDT (V)	V1	LV-4	West stem of girder, near to the south end support
Vertical LVDT (V)	V2	LV-3	East stem of girder, near to the south end support
Longitudinal Rotation LVDT (LR)	LR-1	LVDT 2.1	Underneath the flange, midspan
Longitudinal Rotation LVDT (LR)	LR-2	LVDT 1.4	Above the flange, midspan
String POT (SP)	SP-1	2	West stem, midspan
String POT (SP)	SP-2	3	East stem, midspan
String POT (SP)	SP-3	1	Between SP-1 & SP-2
Load Cell (LC)	LC-1	100 kips(444.8 kN)	West stem of girder, south end support
Load Cell (LC)	LC-2	100 kips(444.8 kN)	East stem, south end support

8.4.1.1 Strain Gauges

Figure 8.10 shows the strain gauge installation plan for the 50-ft (15.24-m) long girder. Five concrete strain gauges and four steel strain gauges were installed on the girder to measure strains in concrete and steel, respectively. Three concrete strain gauges were installed at $0.2L$ away from the south end of the girder (Fig. 8.10b) and two concrete strain gauges were used at the girder midspan (Fig. 8.10c). Furthermore, one LVDT was installed on the top of the girder flange to estimate the concrete strains. It was not possible to use concrete strain gauges in this location due to a severe damage of the flange concrete. Four steel strain gauges were installed in the exposed strands at the girder midspan (Fig. 8.10c to e and Fig. 8.11).

For the installation of concrete strain gauges, 2-in. (50-mm) wide, 5-in. (127-mm) long, and 2-in. (50-mm) deep pockets were formed (Fig. 8.12a), one gauge was placed in each pocket in the longitudinal direction of the girder, the pockets were filled with a non-shrink grout, and then the grout was cured for seven days.

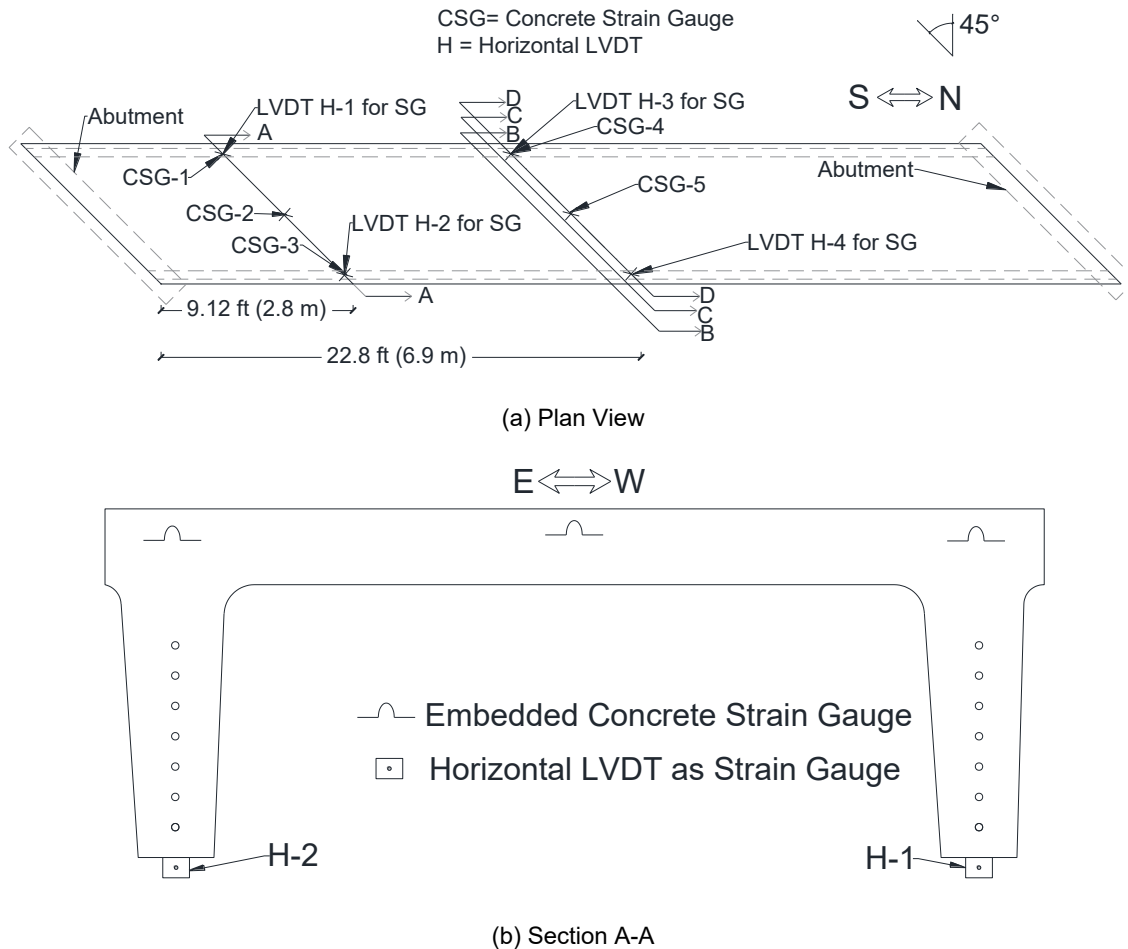



Figure 8.10 – Strain Gauge Instrumentation Plan for 50-ft (15.24-m) Long Girder



(c) Section B-B



(d) Section C-C

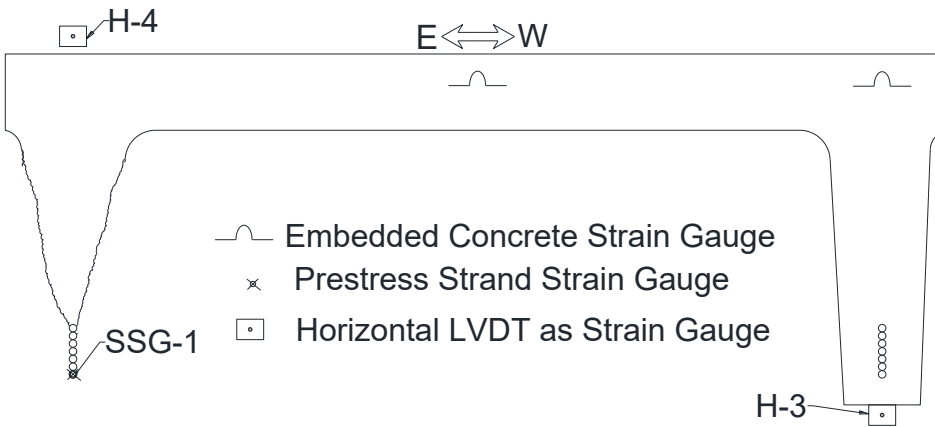


(e) Section D-D

Figure 8.10 – Continued



Figure 8.11 – Installation of Steel Tendon Strain Gauges

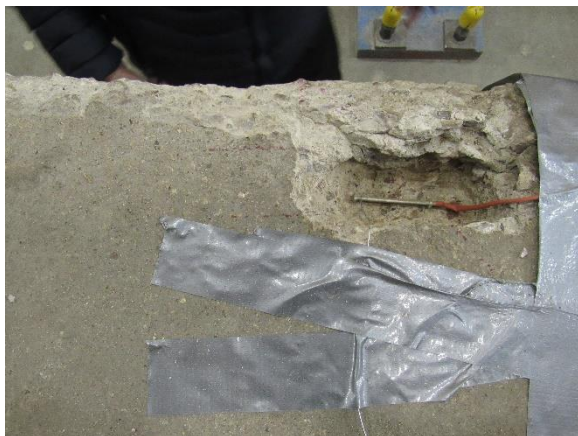

(a) Forming Pockets – Top Deck View



(b) After Pouring Grout

Figure 8.12 – Installation of Concrete Strain Gauges

8.4.1.2 Linear Variable Differential Transformers (LVDTs)

Figure 8.13 shows the LVDT installation plan used in the strength testing of the 50-ft (15.24-m) long girder. Five LVDTs were installed to measure the horizontal displacements to be converted to the concrete strains (e.g. Fig. 8.14a). Two vertical LVDTs were used to measure the rubber bearing pad compressions and then to obtain the net midspan deflections (Fig. 8.14b). Furthermore, two horizontal LVDTs were installed at the midspan to measure the girder longitudinal rotations and curvatures (Fig. 8.14c & d).

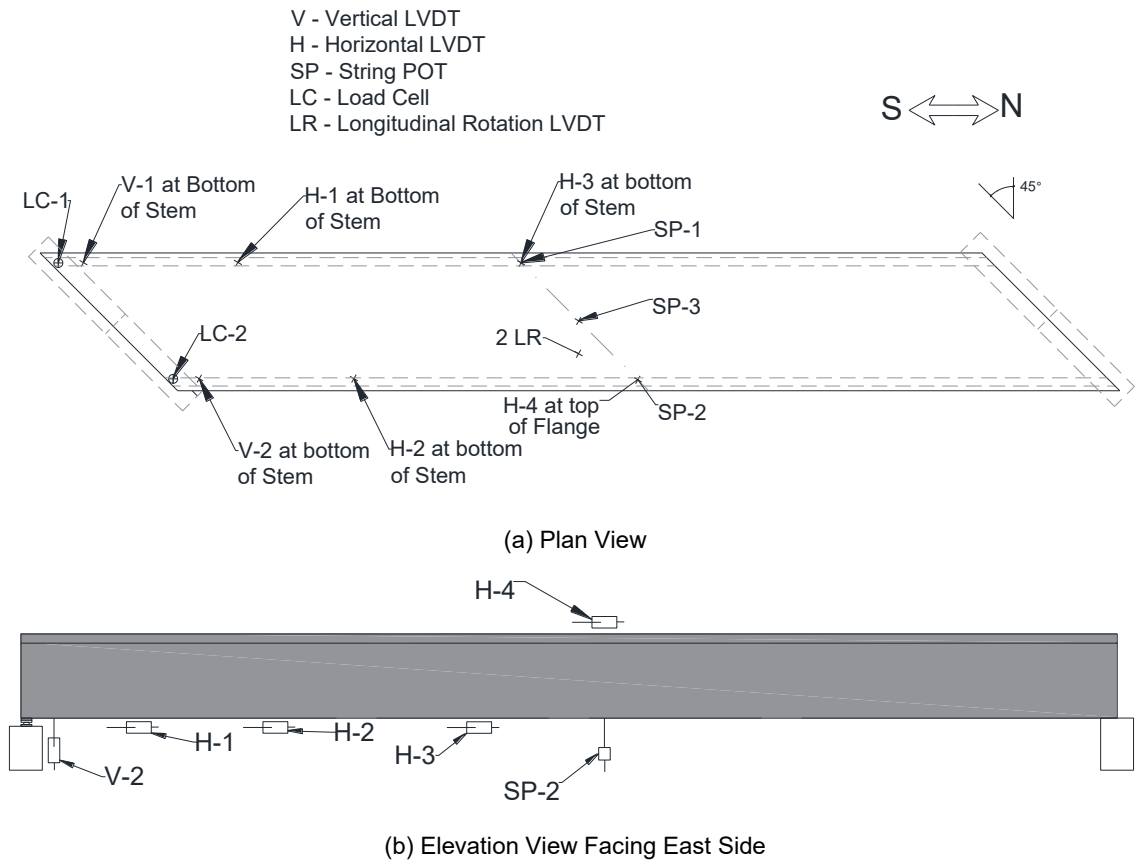


Figure 8.13 – 50-ft (15.24-m) Long Girder Instrumentation Plan including Displacement and Load Sensors



(a) LVDT as Concrete Strain Gauge



(b) Vertical LVDT



(c) LVDT underneath Flange for Rotations



(d) LVDT on top of Flange for Rotations

Figure 8.14 – Installation of LVDTs on 50-ft (15.24-m) Long Girder

8.4.1.3 Load Cells

The end reactions of each stem were measured using a 100-kip (444.8-kN) load cell placed at the girder south end (Fig. 8.13 & 8.15). The load cells were placed between the steel plates for an adequate bearing. An elastomeric rubber bearing pad was placed between the top steel plate and the girder to allow free rotations.

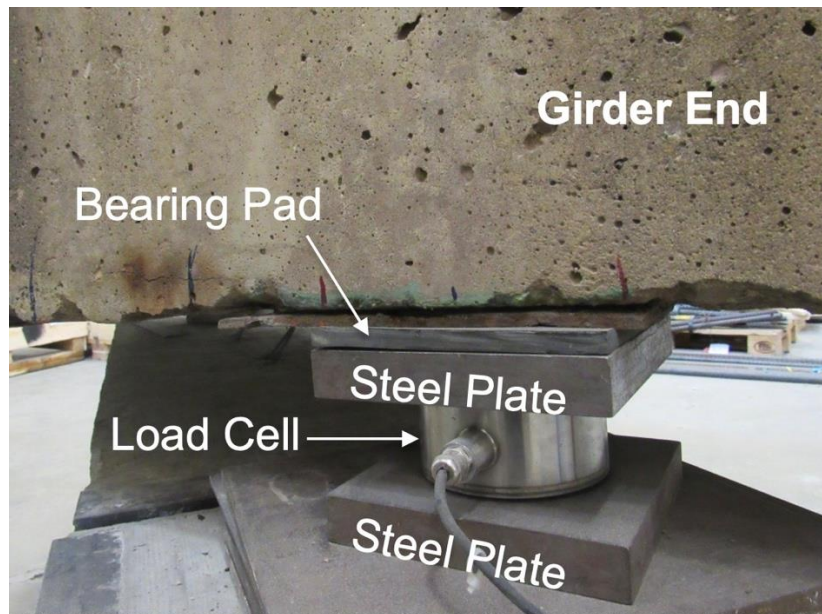


Figure 8.15 – Load Cell Installation at Girder South End

8.4.1.4 String Pot

Three string pots were installed at the midspan to measure the girder deflections (Fig. 8.16). These sensors were placed in a configuration matching the girder skew angle (Fig. 8.13a).



Figure 8.16 – String Pot Installation at Midspan of 50-ft (15.24-m) Long Girder

8.4.1.5 Data Acquisition System

The sensor data was collected using a 128-channel data acquisition system (Vishay Precision Group, Model 7000, Fig 8.17).

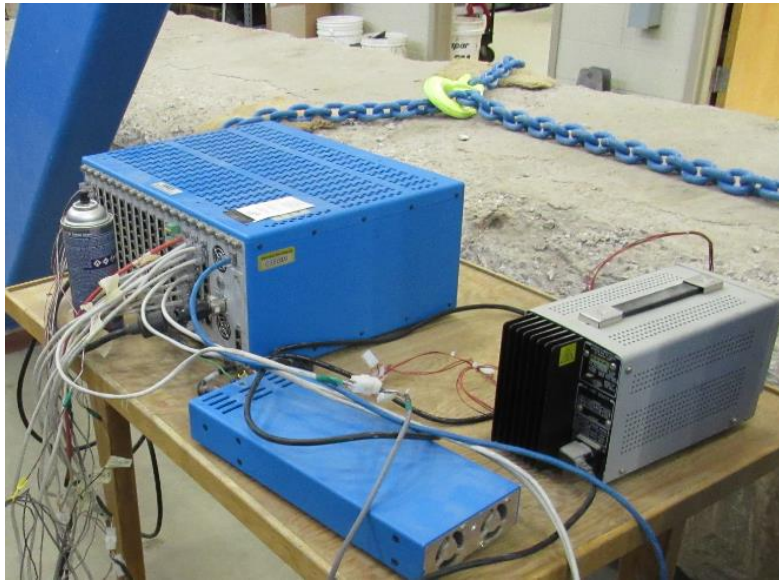


Figure 8.17 – Data Acquisition System

8.4.2 30-ft (9.14-m) Long Girder

Sensors used for the strength testing of the 30-ft (9.14-m) long girder consisted of strain gauges, LVDTs, load cells, and string pots. Table 8.3 presents a summary of the sensor types and locations. Details of the instrumentation plan are presented in the following sections.

Table 8.3 – Sensors Used in Strength Testing of 30-ft (9.14-m) Long Girder

Sensor Name		Identification		Location
Concrete Strain Gauges (CSG)	CSG-1	PMFLA-60-2LJRTA	At 5.6 ft (1.7-m). from the south end (flange)	
Concrete Strain Gauges (CSG)	CSG-2	PMFLA-60-2LJRTA	At 5.6 ft (1.7-m). from the south end (flange)	
Concrete Strain Gauges (CSG)	CSG-3	PMFLA-60-2LJRTA	At 5.6 ft (1.7-m). from the south end (flange)	
Concrete Strain Gauges (CSG)	CSG-4	PMFLA-60-2LJRTA	At mid span of girder(flange)	
Concrete Strain Gauges (CSG)	CSG-5	PMFLA-60-2LJRTA	At mid span of girder(flange)	
Concrete Strain Gauges (CSG)	CSG-6	PMFLA-60-2LJRTA	At mid span of girder(flange)	
Horizontal Linear Variable Differential Transformer (H)	H-1	LVDT 2.1	At 5.6 ft (1.7-m) from the south end (stem)	
Horizontal Linear Variable Differential Transformer (H)	H-2	LVDT 1.4	At 5.6 ft (1.7-m) from the south end (stem)	
Horizontal Linear Variable Differential Transformer (H)	H-3	LVDT 2.2	At mid span of east stem of girder (stem)	
Horizontal Linear Variable Differential Transformer (H)	H-4	LVDT 1.2	At mid span of east stem of girder (stem)	
BDI Strain Transducer	BDI-1	6795	At 5.6 ft (1.7-m) from the south end (west stem)	
BDI Strain Transducer	BDI-2	6792	At 5.6 ft (1.7-m) from the south end and above BDI-1 (west stem)	
BDI Strain Transducer	BDI-3	6793	At 5.6 ft (1.7-m) from the south end (east stem)	
BDI Strain Transducer	BDI-4	6781	At 5.6 ft (1.7-m) from the south end and above BDI-3 (east stem)	
Vertical LVDT (V)	V1	LV-4	Near to the south end support (west stem)	
Vertical LVDT (V)	V2	LV-3	Near to the south end support (east stem)	
Longitudinal Rotation LVDT (LR)	LR-1	LVDT 1.3	Underneath of the flange at midspan	
Longitudinal Rotation LVDT (LR)	LR-2	LVDT 1.1	Over the flange at midspan	
String POT (SP)	SP-1	3	At mid span (west stem)	
String POT (SP)	SP-2	2	At mid span (east stem)	
String POT (SP)	SP-3	1	Between SP-1 & SP-2	
Load Cell (LC)	LC-1	100 kips (444.8 kN)	South end support (west stem)	
Load Cell (LC)	LC-2	100 kips (444.8 kN)	South end support (east stem)	

8.4.2.1 Strain Gauges

Figure 8.18 shows the strain gauge installation plan for the 30-ft (9.14-m) long girder. Six concrete strain gauges were installed to measure the flange concrete strains. Three of which were installed at a distance of $0.2L$ from the south end and the remaining were installed at the girder midspan.

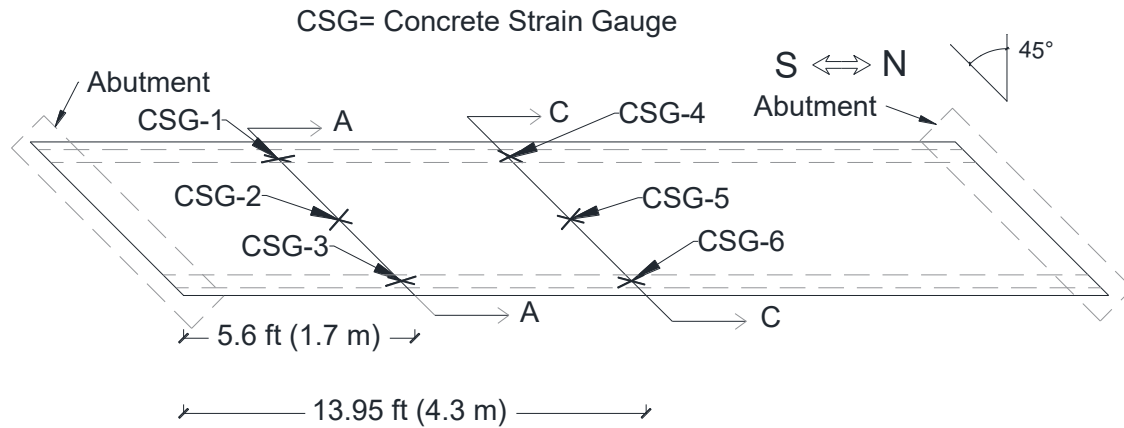



Figure 8.18 – Strain Gauge Instrumentation Plan for 30-ft (9.14-m) Long Girder

8.4.2.2 Surface-Mount Strain Transducers

Four surface-mount strain transducers produced by Bridge Diagnostics, Inc. (BDI, Model ST350), two per stem, were installed at a distance of $0.2L$ from the girder south end (Fig. 8.19). Two sensors on the east stem had an extension of 12 in. (304 mm) (Fig. 8.19a) while the other two on the west stem has no extension measuring the strains over a 3-in. (76-mm) length (Fig. 8.19b). This was done to practice the sensor installation and to evaluate the performance of these sensors before field testing. Note the field testing (Chapter 7) was performed after the laboratory testing.



(a) BDI with Extension at East Stem.

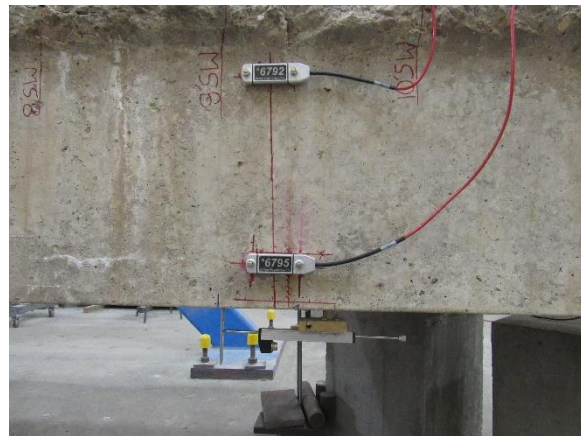

(b) BDI without extension at West Stem.

Figure 8.19 – Installation of BDI Sensors on 30-ft (9.14-m) Long Girder

8.4.2.3 Linear Variable Differential Transformers (LVDTs)

Figure 8.20 shows the LVDT installation plan used in the strength testing of the 30-ft (9.14-m) long girder. Four LVDTs were installed to measure the horizontal displacements to be converted to the

concrete strains. Two vertical LVDTs were used to measure the rubber bearing pad compressions and then to obtain the net midspan deflections. Two horizontal LVDTs were installed at the midspan to measure the girder longitudinal rotations and curvatures.

V - Vertical LVDT
 H - Horizontal LVDT
 SP - String POT
 LC - Load Cell

LR - Longitudinal Rotation LVDT
 BDI - Bridge Diagnostic Inc. Sensor

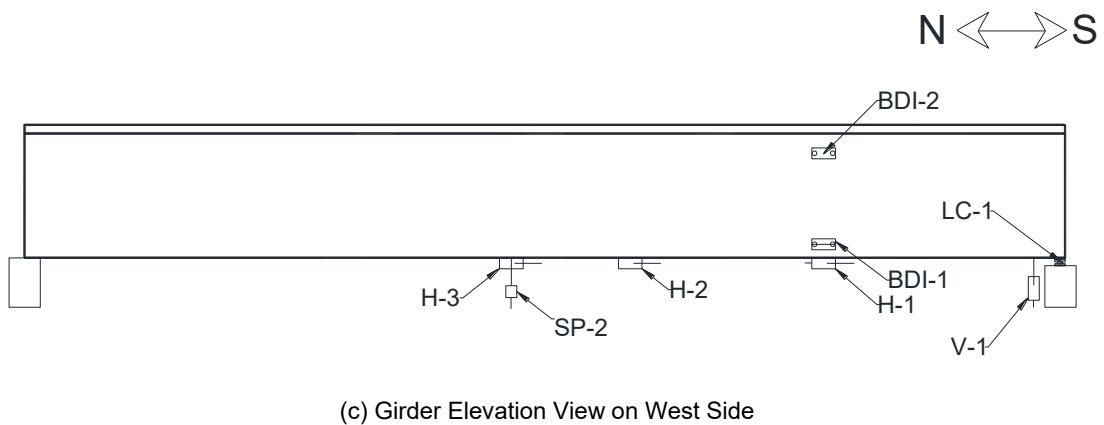
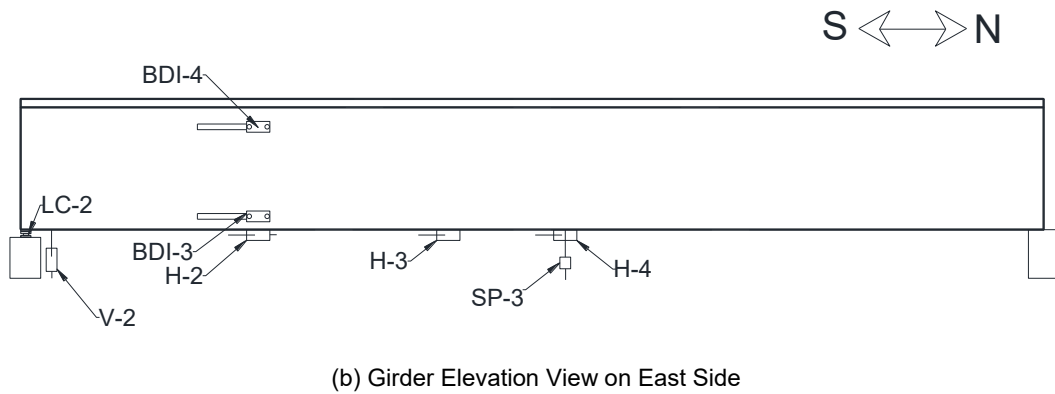
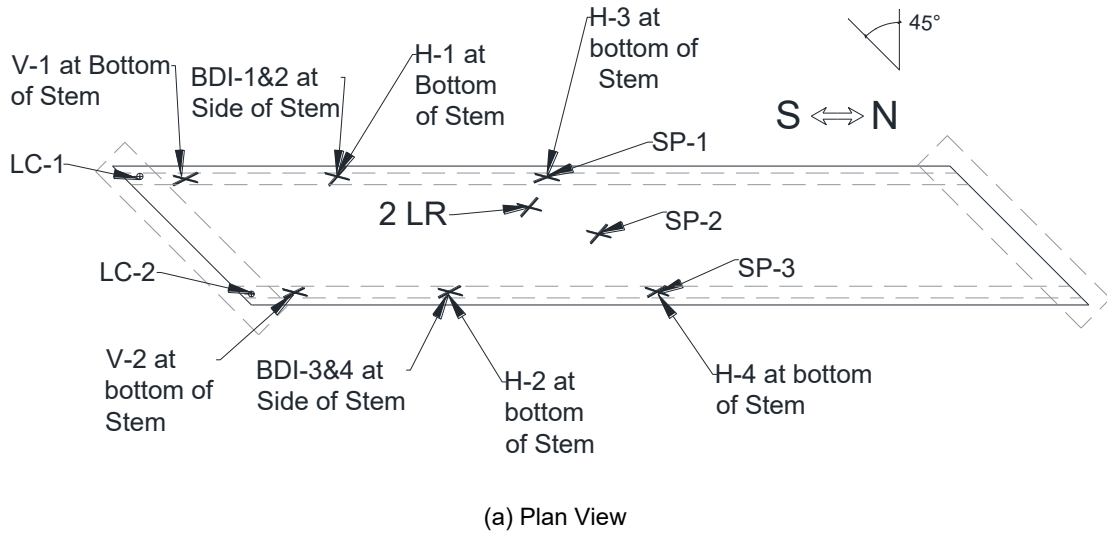


Figure 8.20 – 30-ft (9.14-m) Long Girder Instrumentation Plan including Displacement and Load Sensors

8.4.2.4 Load Cells

Two 100-kip (444.8-kN) load cells were installed under each stem at the south end to measure the stem reactions (Fig. 8.20a).

8.4.2.5 String Pot

Three string pots were installed at the girder midspan, two at each stem and one at the flange, to measure the girder deflections (Fig. 8.20a & Fig. 8.21). It was noticed that the middle string pot (SP-2) was not working properly. Therefore, its data was excluded in the post-processing.



Figure 8.21 – String Pot Installation at Midspan of 30-ft (9.14-m) Long Girder

8.4.2.6 Data Acquisition System

The sensor data was obtained using a 128-channel data acquisition system (Fig 8.17).

8.5 Material Properties

This section presents the material properties of concrete, reinforcing steel bars, and steel tendons used in the girders. The properties of the non-shrink grout used under the loading plates are also included.

8.5.1 Properties of Girder Concrete

Even though the design compressive strength for concrete was available in a shop drawing for similar girders (5000 psi, [34.5 MPa]), core samples were collected after the strength testing to evaluate the actual concrete strength. Note both salvaged girders were severely damaged prior to the testing. The actual shop drawing for these salvaged girders could not be found.

Figure 8.22 shows a sample core, which was obtained following ASTM C42 (2003), and the test setup, which was in accordance to ASTM C39 (2012). Table 8.4 presents a summary of the results. The concrete compressive strength for the 50-ft (15.24-m) long girder stem and flange was 3.15 ksi (21.7

MPa) and 1.92 ksi (13.2 MPa), respectively. Both strengths were significantly lower than that specified in shop drawings found for South Dakota double-tee girders.

Unfortunately, concrete in the 30-ft (9.14-m) long girder was severely deteriorated thus no samples could be obtained (all samples crushed during coring). The only core sample that was extracted from this girder had a short height that was not acceptable by ASTM C42 (2003). Due to a lack of test data, the compressive strength of the 30-ft (9.14-m) long girder is assumed to be the same as that in the 50-ft (15.24-m) long girder.



(a) Coring at Stem of 50-ft Long Girder



(b) Core Sample



(c) Sample in Compressive Machine



(d) Sample Failure

Figure 8.22 – Concrete Coring and Testing for Salvaged Girders

Table 8.4 – Concrete Compressive Strength Cored from 50-ft (15.24-m) Long Girder

Core Sample From	Core Diam. in. (mm)	Sample Length in. (mm)	Core Area in ² (mm ²)	Peak Force, lb (N)	Comp. Strength, psi (MPa)	Aspect Ratio	Correction Factor (ASTM C39)	Modified Strength, psi (MPa)	Average Strength, psi (MPa)
Stem	2.75 (70)	5.01 (127)	5.94 (3832)	19200 (85406)	3230 (22.3)	1.82	1	3230 (22.3)	3150 (21.7)
Stem	2.75 (70)	5.02 (127)	5.94 (3832)	17930 (79757)	3020 (20.8)	1.83	1	3020 (20.8)	3150 (21.7)
Stem	2.75 (70)	2.57 (65)	5.94 (3832)	21820 (97060)	3670 (25.3)	0.93	0.87	3190 (22)	3150 (21.7)
Flange	2.75 (70)	4.78 (121)	5.94 (3832)	13770 (61252)	2320 (16)	1.74	0.97	2250 (15.5)	1920 (13.2)
Flange	2.75 (70)	4.8 (122)	5.94 (3832)	18790 (83582)	3160 (21.8)	1.75	0.98	3090 (21.3)	1920 (13.2)
Flange	2.75 (70)	2.92 (74)	5.94 (3832)	10750 (47818)	1810 (12.5)	1.06	0.88	1590 (10.9)	1920 (13.2)

8.5.2 Properties of Prestressing Strands

The 50-ft (15.24-m) girder had seven tendons per stem, which were harped at a distance of $0.2L$ from each end of the girder while the 30-ft (9.14-m) girder had only four straight tendons per stem. The prestressing steel used in the two salvaged girders were uncoated seven-wire ($A_{sp} = 0.196 \text{ in}^2$ [126 mm²]) low-relaxation strands meeting the ASTM A416 requirements. Tendons were not tested in this study but Table 8.5 presents the strand specified mechanical properties according to ASTM A416.

Table 8.5 – Specified Mechanical Properties of Salvaged Girder Prestressing Strands

Properties	0.5-in. (12.7-mm) Strands (ASTM A416)
Yield Strength, f_y , ksi (MPa)	258 (1779)
Ultimate Strength, f_u , ksi (MPa)	285 (1965)
Strain at Break	7.4%
Modulus of Elasticity, E , ksi (MPa)	29000 (200000)


8.5.3 Properties of Reinforcing Steel Bars

According to shop drawings of typical double-tee girders, transverse and longitudinal reinforcing steel bars used in the salvaged girders should conform to the requirements of ASTM A615 Grade 60. After girder testing, the reinforcement pattern was inspected and sample bars were collected for tensile testing. It was found that the transverse reinforcement of the test girders was one size larger than that found in the shop drawing (No. 5 (16-mm) bars instead of No. 4 (13-mm) bars).

All extracted samples were tested according to the requirements of ASTM E8 (2016). Figure 8.23 shows one sample of the extracted bar test specimen, Fig. 8.24 shows the measured stress-strain relationships, and Table 8.6 presents a summary of the measured mechanical properties for the reinforcing steel bars used in the girders.




(a) Bar in Tensile Test Machine

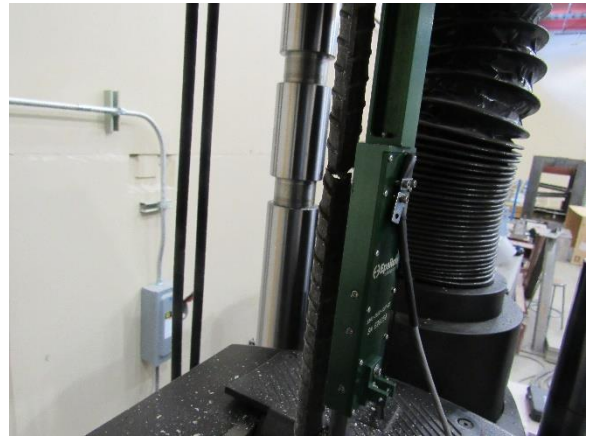


(b) Bar Failure

Figure 8.23 – Tensile Testing of Steel Bars Extracted from Salvaged Girders

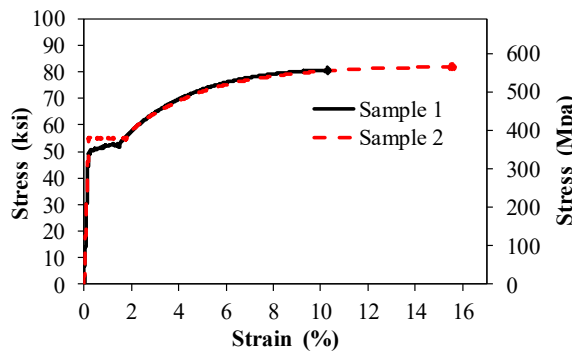

(a) Transverse No. 5 (16-mm) Bar

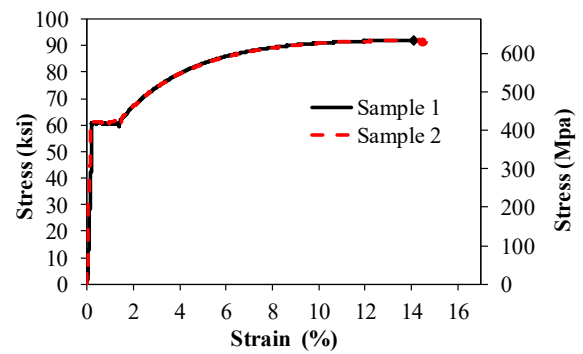

(b) Longitudinal No. 5 (16-mm) Bar

Figure 8.24 – Measured Stress-Strain Relationships for Steel Bars Extracted from Salvaged Girders

Table 8.6 – Measured Mechanical Properties of Steel Bars Extracted from Salvaged Girders

Transverse Bars		Longitudinal Bars	
Bar Size	No. 5 (16 mm)	Bar Size	No. 5 (16 mm)
Bar Spacing, in. (mm)	4 (101)	Bar Spacing, in. (mm)	8 (202)
Yield Strength, f_y , ksi (MPa)	52.5 (362)	Yield Strength, f_y , ksi (MPa)	60 (413.7)
Ultimate Strength, f_u , ksi (MPa)	81.3 (560)	Ultimate Strength, f_u , ksi (MPa)	92 (634)
Strain at Initiation of Strain Hardening, %	1.8	Strain at Initiation of Strain Hardening, %	1.4
Strain at Peak Stress, %	12.9	Strain at Peak Stress, %	14.5

Note: All values are the average of two tests.

8.5.4 Properties of Elastomeric Neoprene Bearing Pads

Mingo (2016) tested a 6-in. (152-mm) by 6-in. (152-mm) by 3/8-in. (9.5-mm) elastomeric neoprene bearing pad in compression to obtain its force-displacement relationship (Fig. 8.25). The same bearing pads were used in the present study. The stiffness of the linear region of the force-displacement relationship was 1128 kip/in (306.2 kN/mm).

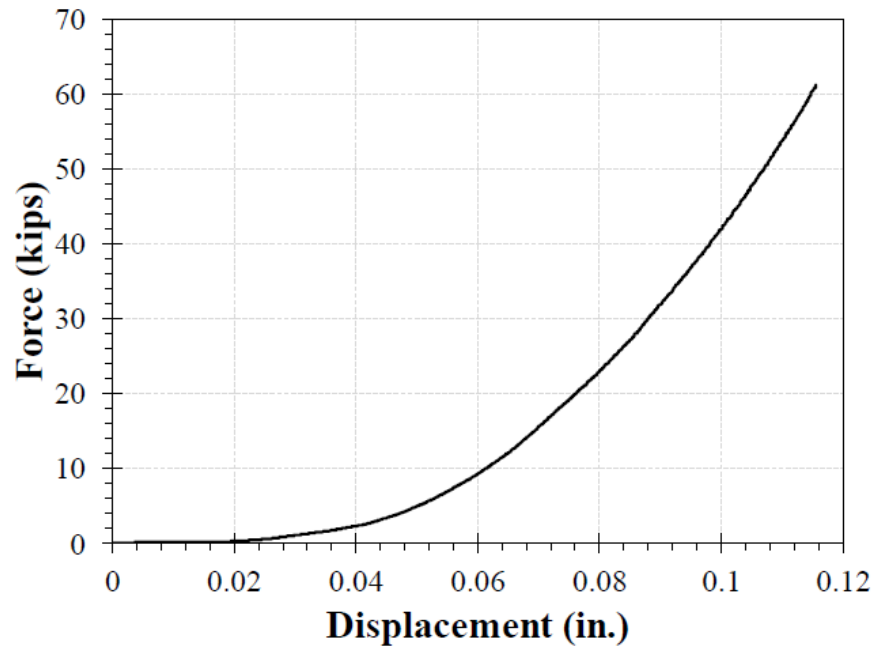


Figure 8.25 – Measured Force-Displacement Relationship for Rubber Bearing Pad (Mingo, 2016)

8.6 Salvaged Girder Test Results

This section includes the experimental results of the two salvaged girders. The 50-ft (15.24-m) long girder was tested on February 13, 2018 and the 30-ft (9.14-m) long girder was tested on April 17, 2018.

8.6.1 Strength Testing Results for 50-ft (15.24-m) Long Girder

8.6.1.1 Observed Damage

The 45-year old girder had several damages prior to testing (Fig. 8.4). As was mentioned in Sec. 8.1, this girder was cracked at the midspan during unloading from the delivery truck. The first flexural crack was observed at the midspan at a 24.9-kip (110.7-kN) load as shown in Fig. 8.26 (marked as Run No. 78). New flexural cracks developed at the midspan at higher loads (Fig. 8.26b) and the concrete spalled at the north support (Fig. 8.26c). Finally, the girder failed at the midspan in a brittle manner (Fig. 8.26d). It was concluded from the analytical study (Sec. 8.7) that the girder failure was due to the failure of the flange concrete.



(a) First Flexural Crack at Midspan



(b) Extension of Flexural cracks



(c) Concrete Spalling at Support



(d) Brittle Failure at Midspan

Figure 8.26 – Observed Damage of 50-ft (15.24-m) Long Girder during Strength Testing

8.6.1.2 Force-Deflection Relationship

Figure 8.27 shows the measured force-deflection relationship for the 50-ft (15.24-m) long double-tee girder. Loads equivalent to the AASHTO Service I Limit State and the AASHTO Strength I Limit State are also included in the figure. The first crack of the girder was at an actuator force of 24.9 kips (110.7 kN), which was 35% lower than the load equivalent to the AASHTO Service I Limit State. The failure mode of this girder was the compressive failure of the flange concrete at the midspan at a 5.4 in. (137 mm) of deflection. It was a brittle failure with no sign or warning while the girder was designed as a flexural member. It is clear that the girder did not meet the AASHTO requirements.

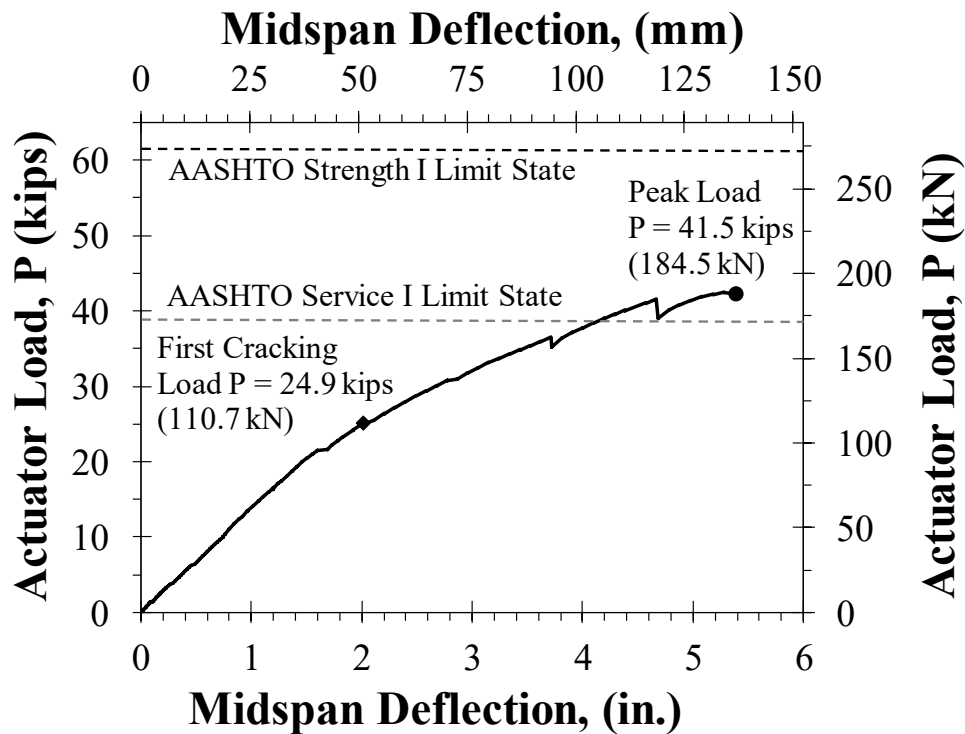


Figure 8.27 – Measured Force-Deflection Relationship for 50-ft (15.24-m) Long Girder

8.6.1.3 Support Reactions

Figure 8.28 shows the measured south end stem reactions of the 50-ft (15.24-m) long girder at the peak load. It can be seen that the east stem resisted 81% more load than the west stem. The east stem was severely damaged (exposure of steel tendons) prior to delivery to the test lab.

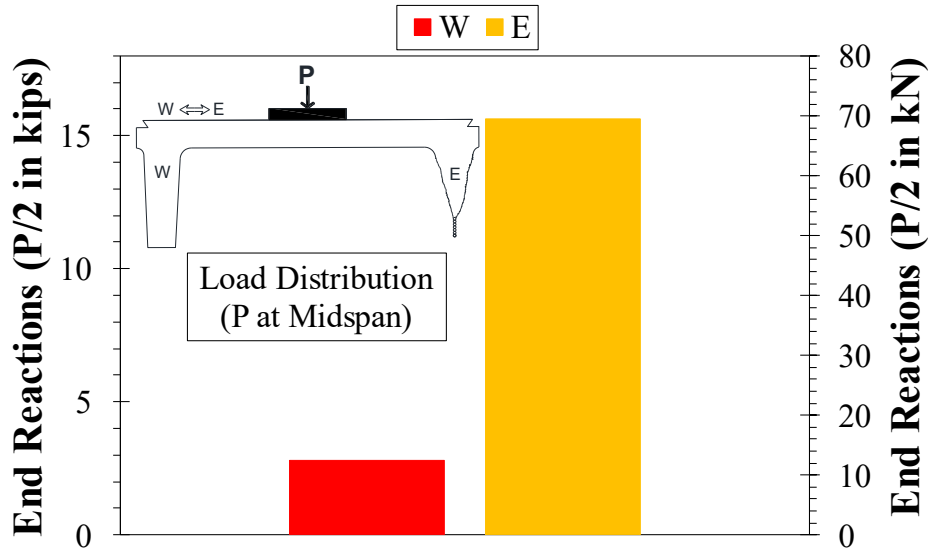


Figure 8.28 – South End Support Reactions for 50-ft (15.24-m) Long Girder at Peak Load

8.6.1.4 Strain Profiles

Five concrete strain gauges (CSG) were installed on the girder flange as discussed in Sec. 8.4.1.1. Furthermore, one LVDT was installed as CSG-6 since a concrete strain gauge could not be installed due to the extent of the damage at this location. Figure 8.29 shows the applied load versus the measured concrete strains. It can be seen CSG-3 and CSG-6 show the highest strains compared to CSG-1 and CSG-4 because they were measuring the flange concrete strains of the east stem, which transferred higher loads to the supports.

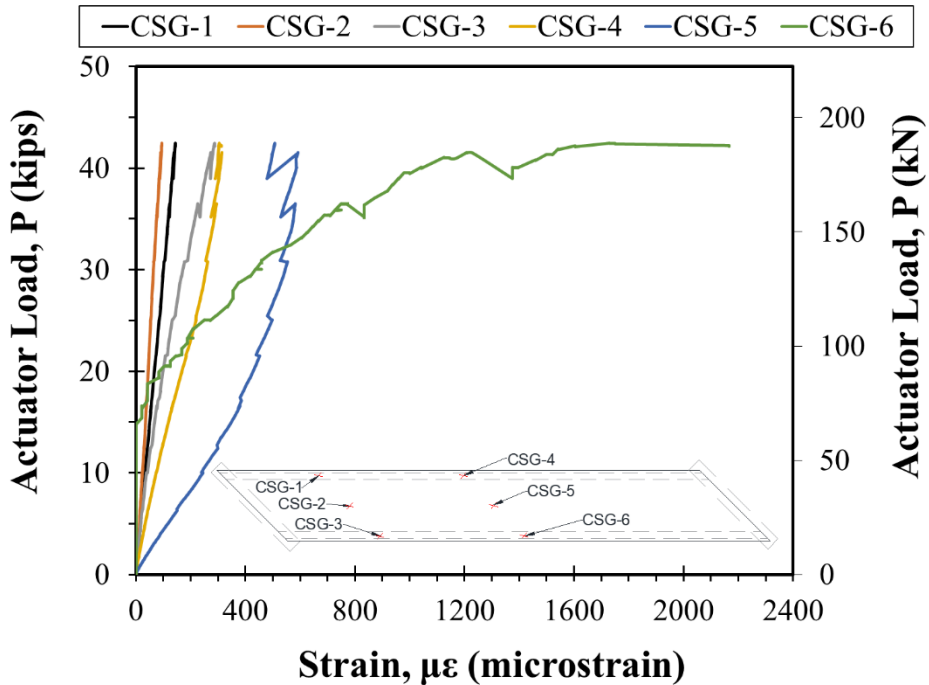


Figure 8.29 – Measured Concrete Strains for 50-ft (15.24-m) Long Girder

LVDTs were also installed either at the bottom face of the stems right below the concrete strain gauges or at the top of the deck right above the steel tendon strain gauges to develop strain profiles. Figure 8.30 shows the measured and calculated (from Statics) strain profiles for the 50-ft (15.24-m) long girder at the actuator peak load. It can be seen that the calculated strains are not in good agreement with the measured strains, probably due to the extent of the damage.

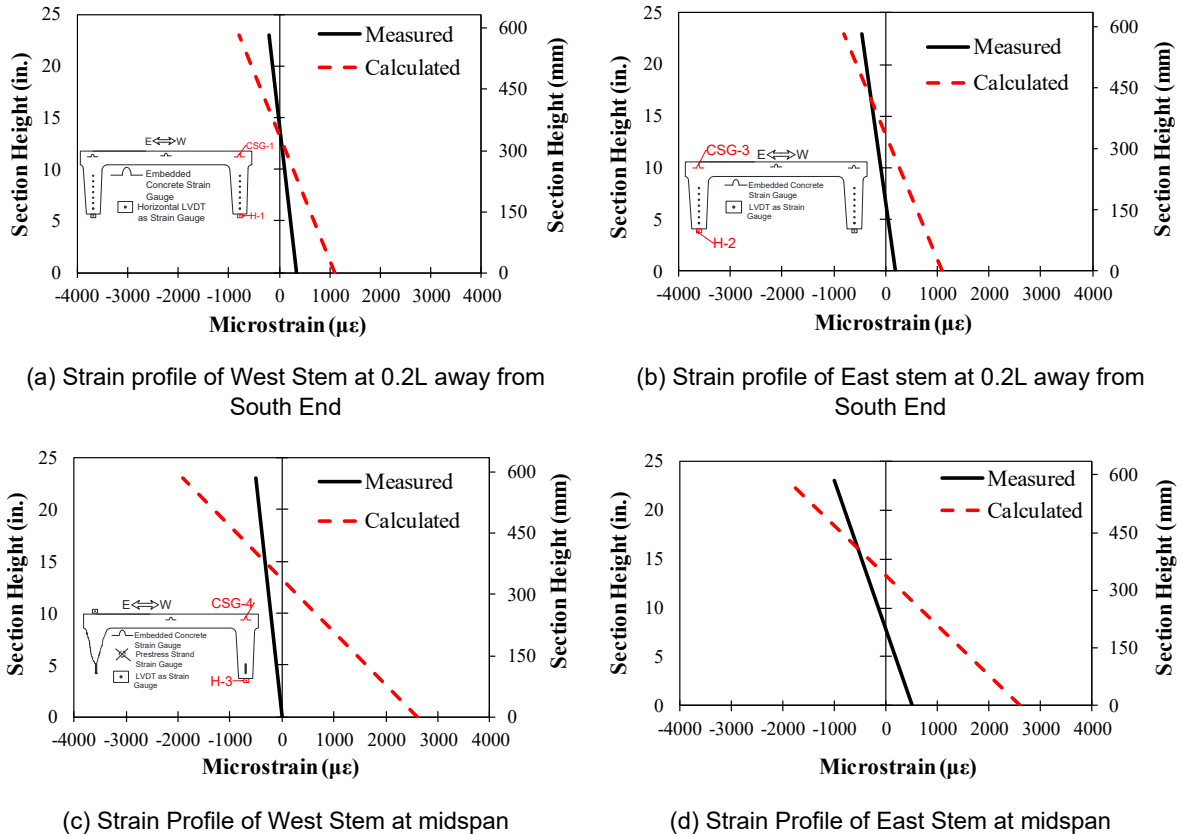


Figure 5.30 – Measured and Calculated Strain Profiles for 50-ft (15.24-m) Long Girder at Peak Load

8.6.1.5 Rotations

Figure 8.31 shows the rotations of the girder measured in the longitudinal direction at the midspan (LR in Fig. 8.13). The rotations were measured using two LVDTs, one was installed at the top of the deck (LR-2) and another was installed underneath the flange (LR-1). The maximum rotation was 0.19 degrees at the peak load of 41.9 kips (186.4 kN).

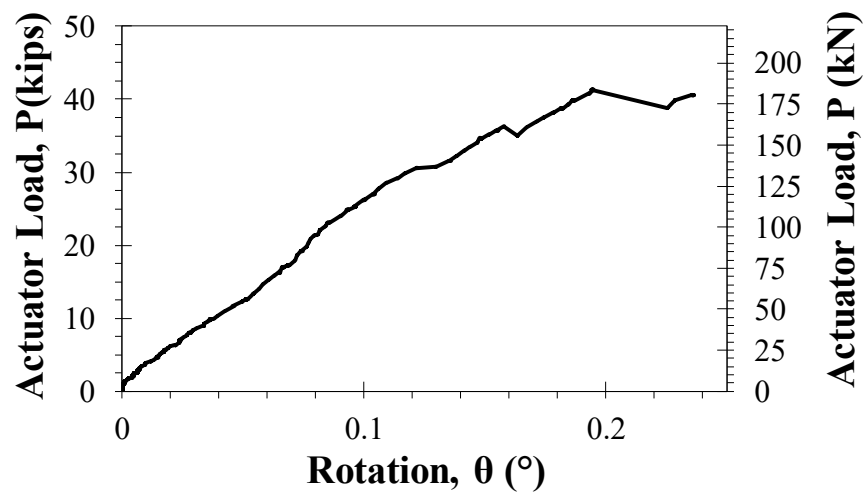


Figure 8.31 – Measured Flange Longitudinal Rotations for 50-ft (15.24-m) Long Girder

8.6.2 Strength Testing Results for 30-ft (9.14-m) Long Girder

The results of strength testing on the 30-ft (9.14-m) girder is discussed herein.

8.6.2.1 Observed Damage

The 45-year old girder had several damages prior to testing (Fig. 8.4). The north end of the girder had more prior-to-testing apparent damage than the south end. That is probably why the first crack occurred near the north end (Fig. 8.32a, marked as Run No. 34), 10 ft (3.05 m) away from the midspan at an actuator load of 15.3 kips (68.06 kN). The first flexural crack was observed at a distance of 5 ft (1.5 m) from the midspan at a 22.41-kip (99.68-kN) load as shown in Fig.8.32b (marked as Run No. 47). The width of cracks extended and new cracks formed at higher loads (Fig. 8.32c & d). Finally, the girder failed in flexure at the midspan (a major flexural crack as marked in Fig. 8.32e), which was a ductile failure.



(a) First Shear Crack at North End




(b) Flexural Crack Near to Midspan



(c) Shear Crack Near North End



(d) Extension of Crack Width

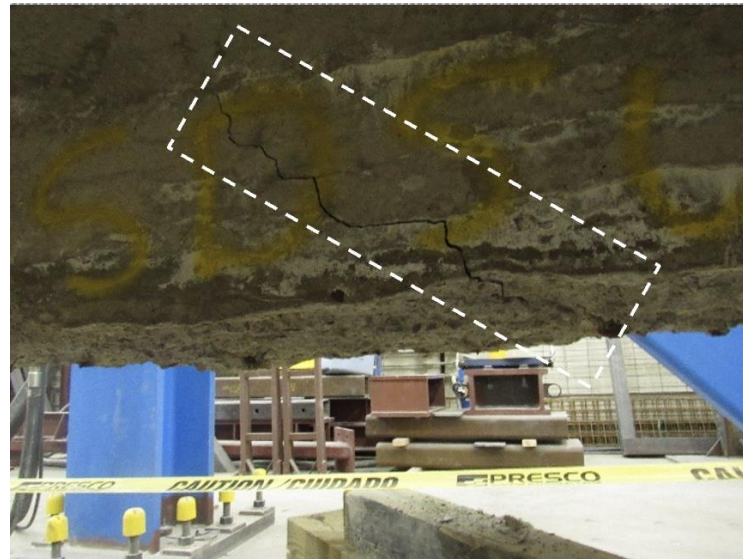

(e) A Major Flexural Crack at Midspan– Stem inside View

Figure 8.32 – Observed Damage of 30-ft (9.14-m) Long Girder during Strength Testing

8.6.2.2 Force-Deflection Relationship

Figure 8.33 shows the measured force-deflection relationship for the 30-ft (9.14-m) long double-tee girder. Loads equivalent to the AASHTO Service I and Strength I Limit States were also included in the figure. The first crack of the girder was at a force of 15.3 kips (68.1 kN), which was 44% lower than the load equivalent to the AASHTO Service I Limit State. This girder failed at a 2.3-in. (58-mm) deflection with a major flexural crack at the midspan. It is clear that the girder did not meet the AASHTO requirements.

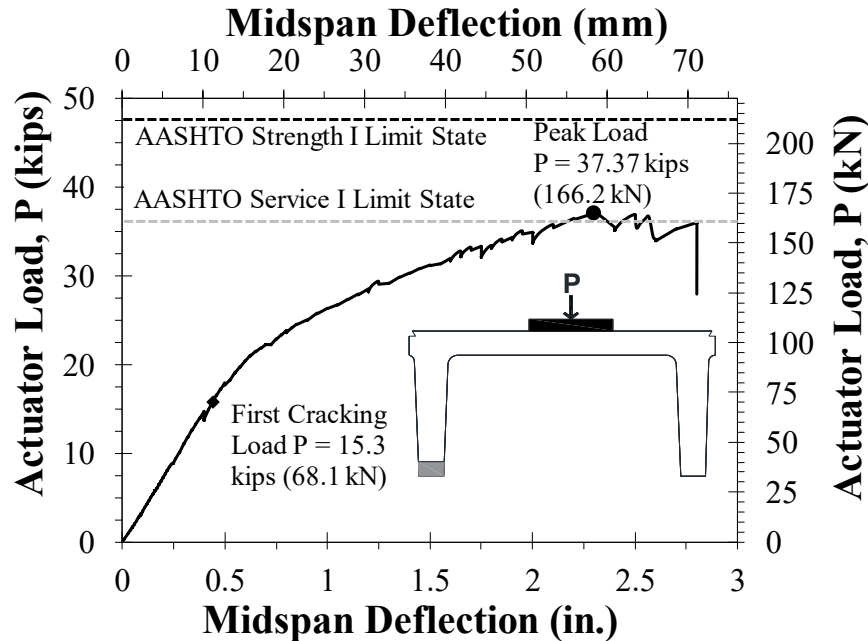


Figure 8.33 – Measured Force-Deflection Relationship for 30-ft (9.14-m) Long Girder

8.6.2.3 Support Reactions

Figure 8.34 shows the measured south end stem reactions of the 30-ft (9.14-m) long girder at the peak load. It can be seen that east stem resisted 37.8% more load than the west stem.

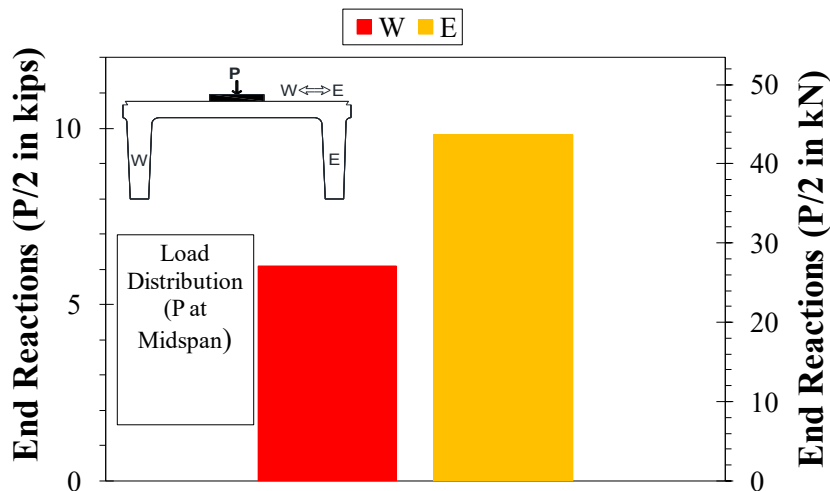


Figure 8.34 – South End Support Reactions for 30-ft (9.14-m) Long Girder at Peak Load

8.6.2.4 Strain Profiles

Six concrete strain gauges (CSG) were installed at the girder flange as discussed in Sec. 8.4.2.1. Figure 8.35 shows the applied load versus the measured concrete strains. An approximately linear behavior can be recognized for all gauges. The gauges at the girder midspan (CSG-4 to 6) exhibited the largest strains.

In addition to CSGs, LVDTs and surface-mount strain transducers were used at different depth of the stems to develop strain profiles. Refer to Sec. 8.4.2 for the instrumentation plan. Figure 8.36 shows the measured and calculated strain profiles for the 30-ft (9.14-m) long girder. Similar to the 50-ft (15.24-m) long girder, the calculated strains did not match well with the measured data probably due to the extent of the girder damage and the type of strain sensors used. Strain profiles are usually obtained using embedded concrete and steel strain gauges. Nevertheless, this could not be achieved in the present study to preserve the salvaged girders as received and to avoid further damage. Some of the strains were measured using LVDTs. This strain measuring method was found unreliable.



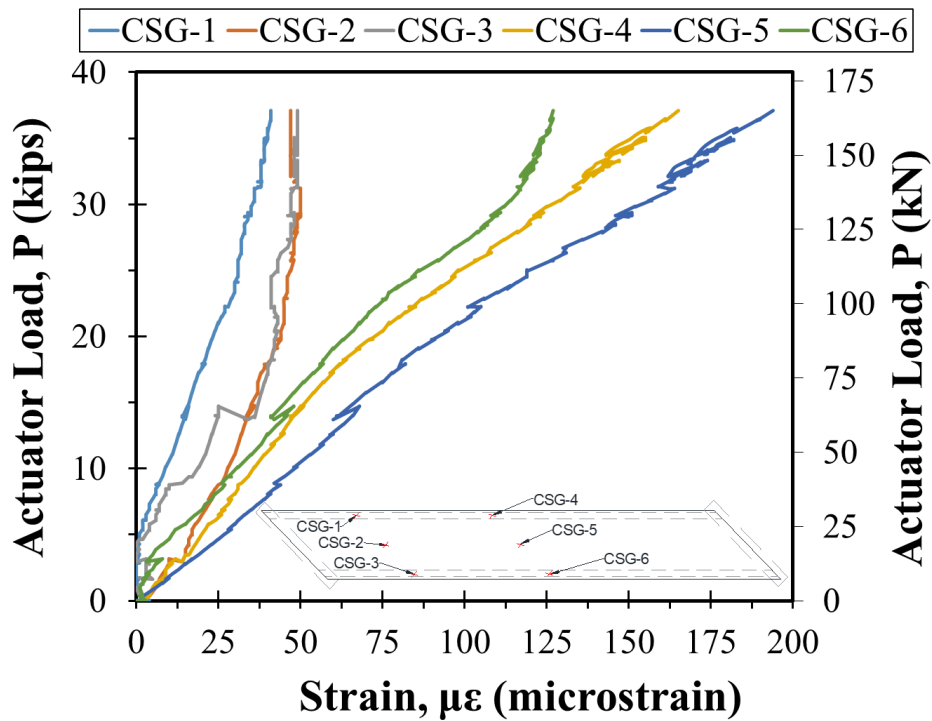



Figure 8.35 – Measured Concrete Strains for 30-ft (9.14-m) Long Girder

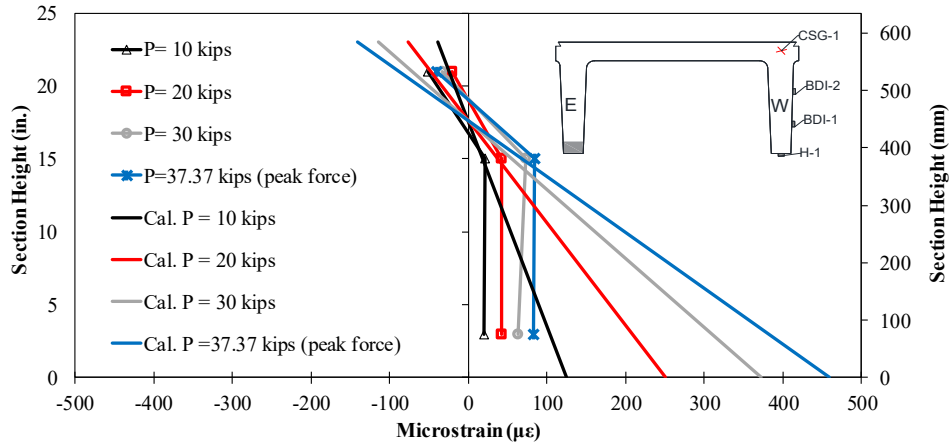


(a) Strain Profile of West Stem at 0.2L away from South End at Various Load

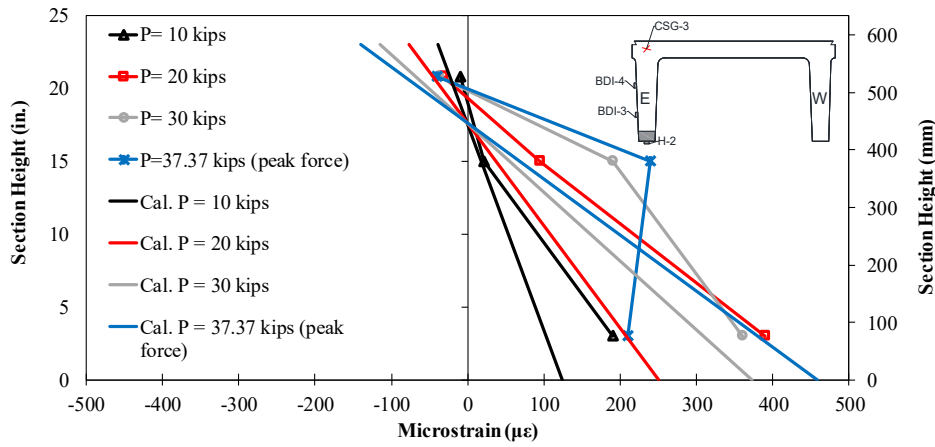

(b) Strain Profile of East Stem at 0.2L away from South End at Various Load

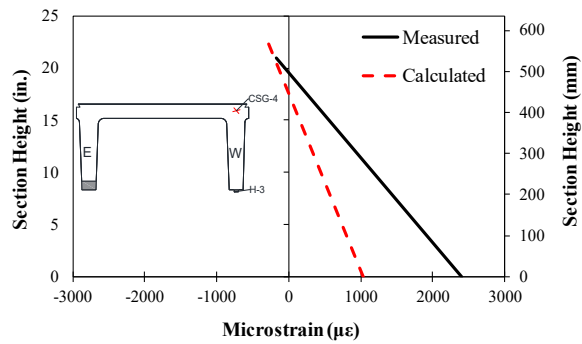

(c) Strain Profile of West Stem at Midspan at Peak Load

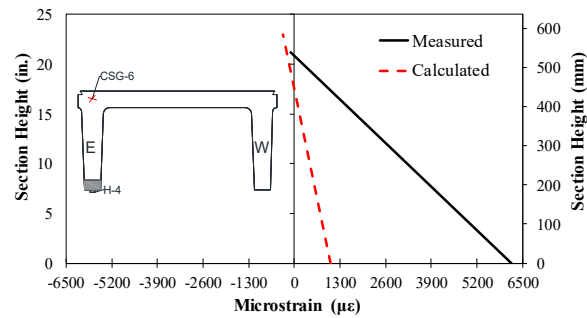

(d) Strain Profile of East Stem at Midspan at Peak Load

Figure 5.36 – Measured and Calculated Strain Profiles for 30-ft (9.14-m) Long Girder

8.6.2.5 Rotations

Figure 8.37 shows the rotations of the girder measured in the longitudinal direction at the midspan (LR in Fig. 8.16). The rotations were measured using two LVDTs, one was installed at the top of the deck (LR-2) and another was installed underneath the flange (LR-1). The maximum rotation was 0.03 degrees at the peak load of 37.37 kips (166.2 kN).

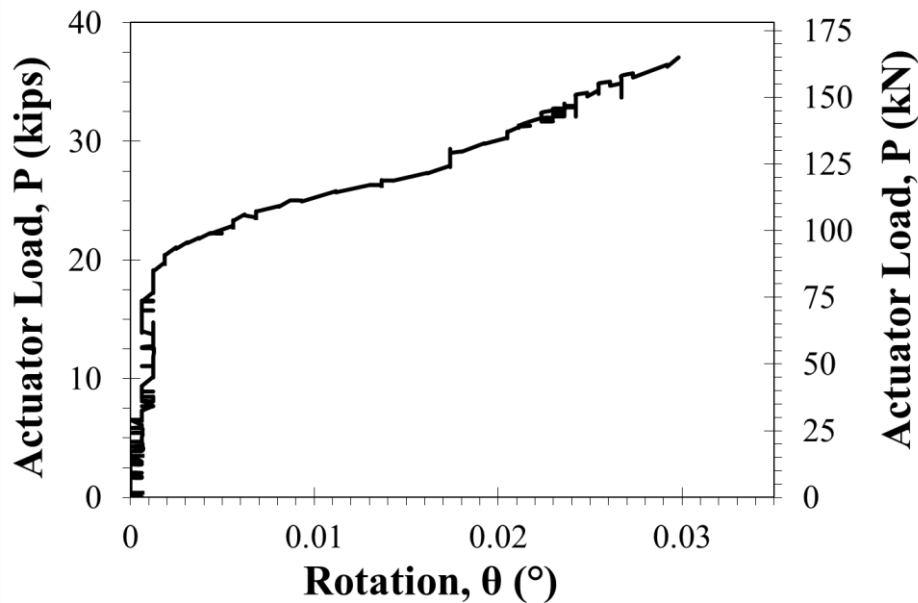


Figure 8.37 – Measured Longitudinal Rotations for 30-ft (9.14-m) Long Girder

8.6.2.6 Decompression Test

Accurate estimation of prestressing losses is important for the analysis and design of prestressed or posttensioned concrete members. Decompression tests have been carried out in some studies (Pessiki et al., 1996; Osborn et al., 2012) to estimate the tendon stress losses. This test is done by loading the

member until the first flexural crack is developed, unloading the specimen to install a long strain gauge crossing the flexural crack at the extreme tensile face, and then loading the specimen to reopen the crack. The measured load and strain data can be used to identify the cracking load (and also the cracking moment). Subsequently, Eq. 8.1 can be used to determine the actual (or effective) prestressing forces of the section.

$$f = -P \left(\frac{1}{A_c} + \frac{e \cdot y_t}{I_g} \right) + \frac{M \cdot y_t}{I_g} \quad (\text{Eq. 8.1})$$

where

- f = The stress at the tensile face of the section (zero at the crack),
- P = The section effective prestressing force,
- A_c = The cross-sectional area at the crack location,
- e = The eccentricity of the prestressing force at the crack location,
- y_t = The distance between the neutral axis and the tensile face of the section,
- I_g = The section moment of inertia at the crack location,
- M = The moment in the member due to the cracking load.

This test was performed on the 30-ft (9.14-m) long girder to estimate the prestressing losses. The girder was monotonically loaded using a small displacement increment until a crack was observed on the stem of the girder. Subsequently, the girder was unloaded and reloaded until the initial crack redeveloped at the same location (5 ft [1.52 m] away from the girder centerline on the east side). Due to the time limitation, no strain gauge was installed at the cracked section but a narrow displacement increment was used to determine the load before and after forming the crack. The load prior to cracking was 15.3 kips (68.1 kN) and after observing the crack was 22.41 kips (99.7 kN). For this girder, A_c was 353.72 in² (228206 mm²), e was 6.27 in. (159 mm), y_t was 6.73 in. (171 mm), and I_g was 13964 in.⁴ (5812255627 mm⁴). The estimated prestressing loss for the 45-yr old 30-ft (9.14-m) girder was estimated to be between 52.4% and 70.4%. This is a significant stress loss and must be included the shear and moment capacity calculation of damaged double-tee girders. Further discussion of the topic can be found in Sec. 9.3.

8.7 Capacity Calculation for Damaged Double-Tee Girders

This section presents methods to calculate the capacity of the two salvaged girders tested in the present study. The experimental data from the literature is also included to further validate the capacity calculation methods.

Table 8.7 presents a summary of the parameters used for the capacity calculation of the two girders. One method to calculate the moment capacity of a reinforced concrete or a prestressed section is through a moment-curvature analysis. SAP2000 (2018) was used to perform this analysis in the present study. Moment capacity can also be calculated using Equations 8.2 through 8.5 presented below (from AASHTO LRFD, 2012).

Table 8.7 – Parameters Used in Capacity Calculation of Salvaged Girders

Parameters	Notation	50-ft (15.24 m) Long Girder	30-ft (9.14 m) Girder
Area of Tendons	A_{ps}	2.75 in ² (1774 mm ²)	1.57 in ² (1013 mm ²)
Stress in Tendons	f_{ps}	246.6 kips (1096.9 kN)	238.9 kips (1062.7 kN)
Distance from extreme compression fiber to the centroid of tendons	d_p	18.45 in. (468 mm)	11 in. (279 mm)
Area of Tensile Steel	A_s	No tensile steel	No tensile steel
Stress in Tensile Steel	f_s	N/A	N/A
Stress in Compression Reinforcement	f'_s	60 ksi (413.7 MPa)	60 ksi (413.7 MPa)
Distance from extreme compression fiber to the centroid of tensile steel.	d_s	N/A	N/A
Area of Compression Reinforcement	A'_s	1.23 in. ² (793 mm ²)	1.23 in. ² (793 mm ²)
Distance from extreme compression fiber to the centroid of compression reinforcement	d'_s	4 in. (101 mm)	2.9 in. (73 mm)
Compressive strength of concrete	f'_c	1.92 ksi (13.24 MPa) for Flange	1.92 ksi (13.24 MPa) for Flange
Width of the section	b	60 in. (1524 mm)	61 in. (1529 mm)
Web width	b_w	10 in. (254 mm)	10 in. (254 mm)
Stress block factor	β	0.8	0.8
Compression flange depth	h_f	3.81 in. (97 mm)	4 in. (97 mm)
Effective web width	b_v	10 in. (254 mm)	10 in. (254 mm)
Effective shear depth	d_v	16.8 in. (427 mm)	9.77 in. (248 mm)
Area of shear reinforcement within a distance s.	A_v	0.61 in. ² (39355 mm ²)	0.61 in. ² (39355 mm ²)
Spacing of transverse reinforcement	s	5 in. (127 mm)	5 in. (127 mm)

$$M_n = A_{ps}f_{ps}\left(d_p - \frac{a}{2}\right) + A_s f_s \left(d_s - \frac{a}{2}\right) - A'_s f'_s \left(d'_s - \frac{a}{2}\right) + 0.85f'_c(b - b_w)h_f \left(\frac{a}{2} - \frac{h_f}{2}\right) \quad (\text{Eq. 8.2})$$

where

M_n = The nominal moment capacity,

A_{ps} = The area of prestressing steel (in.²),

f_{ps} = The average stress in prestressing steel at nominal bending resistance (ksi),

d_p = The distance from extreme compression fiber to the centroid of prestressing tendons (in.),

A_s = The area of nonprestressed tension reinforcement (in.²),

f_s = The stress in the mild steel tension reinforcement at nominal flexural resistance (ksi),

d_s = The distance from extreme compression fiber to the centroid of nonprestressed tensile reinforcement,

A'_s = The area of compression reinforcement (in.²),

d'_s = The distance from extreme compression fiber to the centroid of compression reinforcement (in.),

f'_c = The specified compressive strength of concrete at 28 days, unless another age is specified (ksi),

b = The width of the compression face of the member; for a flange section in compression,

b_w = The web width or diameter of a circular section (in.),

β_1 = The stress block factor specified in AASHTO LRFD Article 5.7.2.2,

h_f = The compression flange depth of an I or T member (in.),

a = $c\beta_1$; The depth of equivalent stress block.

$$f_{ps} = f_{pu} \left(1 - k \frac{c}{d_p}\right) \quad (\text{Eq. 8.3})$$

where

f_{pu} = The specified tensile strength of prestressing strand (ksi).

$$k = 2 \left(1.04 - \frac{f_{py}}{f_{pu}}\right) \quad (\text{Eq. 8.4})$$

c = The distance between neutral axis and compression face as defined in Eq. 5.5.

f'_s = The stress in the mild steel compression reinforcement at nominal flexural resistance (ksi).

$$c = \frac{A_{ps}f_{pu} + A_s f_s - A'_s f'_s}{0.85f_c \beta_1 b + k A_{ps} \frac{f_{pu}}{d_p}} \quad (\text{Eq. 8.5})$$

where,

b = The width of compression flange.

The shear capacity can also be calculated using the AASHTO methods:

$$V_n = V_c + V_s + V_p \quad (\text{Eq. 8.6})$$

$$V_c = 0.316\beta \sqrt{f'_c} b_v d_v \quad (\text{Eq. 8.7})$$

$$V_s = \frac{A_v f_y d_v \cot \theta}{s} \quad (\text{Eq. 8.8})$$

where

V_p = Component in the direction of the applied shear of the effective prestressing force; positive if resisting the applied shear,

b_v = The effective web width,

d_v = The effective shear depth,

A_v = The area of shear reinforcement within a distance s (in.²),

s = The spacing of transverse reinforcement measured in a direction parallel to the longitudinal reinforcement (in.),

β = The factor indicating ability of diagonally cracked concrete to transmit tension and shear,

θ = The angle of inclination of diagonal compressive stresses.

8.7.1 Calculated Capacities of 50-ft (15.24-m) Long Girder

The 50-ft (15.24-m) long girder failed in a brittle manner at the midspan with a load of 41.9 kips (186.4 kN). Table 8.8 presents the calculated capacities of this girder including all damages. The calculated shear and moment capacities for this girder at the failure section were 65.4 kips (290.9 kN) and 846.41 kip.ft (1148 kN.m), respectively. The equivalent calculated load carrying capacities (a point load at the midspan, $P_{calculated}$) were respectively 130.8 kips (581.8 kN) and 82.74 kips (368.05 kN) based on the shear and moment capacities. Therefore, this girder did not fail under the shear or bending at the failure section.

In an attempt to find the failure mode of the 50-ft (15.24-m) girder using analytical tools, it was assumed that the stems do not contribute to the shear capacity of the girder due to the extent of the stem damage at the midspan (Fig. 8.4f). Therefore, the shear capacity of this girder at the midspan

consists of only the shear capacity of the flange concrete (as a slab). Using Eq. 8.7, the flange shear capacity was estimated as 19.9 kips (88.52 kN) equivalent to a calculated load carrying capacity (a point load at the midspan, $P_{calculated}$) of 39.93 kips (177.6 kN), which was only 4.7% lower than the measured peak load. Therefore, the 50-ft (15.24-m) long girder failed by the shear failure of the flange concrete, which is a brittle failure. It is worth mentioning that this finding was used in the calculation of the capacity modification factors, when the stem had exposed tendons.

Table 8.8 – Calculated Shear and Moment Capacities for Salvaged Double-Tee Girders

Salvaged Girder	Shear Capacity	Moment Capacity	Failure Load, P , kips (kN)
50-ft (15.24-m) Long	$V_n = 65.4$ kips (290.9 kN) for Section; Equivalent $P = 130.8$ kips (581.8 kN)	$M_n = 685.13$ k-ft (928.9 kN-m) using M- Φ Analysis; Equivalent $P = 66.9$ kips (297.6 kN)	$P_{calculated} = 39.93$ (177.6)
	$V_n = 19.9$ kips (88.52 kN) for Flange Only; Equivalent $P = 39.93$ kips (177.6 kN)	$M_n = 688.67$ k-ft (933.72 kN-m) using AASHTO; Equivalent $P = 67.3$ kips (299.4 kN)	$P_{measured} = 41.9$ (186.4) (4.7% difference)
30-ft (9.14-m) Long	$V_n = 64.7$ kips (287.8 kN) for Section; Equivalent $P = 129.4$ kips (575.6 kN)	$M_n = 223.58$ k-ft (303.5 kN-m) using M- Φ Analysis; Equivalent $P = 35.89$ kips (159.65 kN)	$P_{calculated} = 35.89$ (159.6)
		$M_n = 278$ k-ft (377.3 kN-m) using AASHTO; Equivalent $P = 44.6$ kips (198.4 kN)	$P_{measured} = 37.37$ (166.2) (3.9% difference)

8.7.2 Calculated Capacities of 30-ft (9.14-m) Long Girder

The 30-ft (9.14-m) long girder failed in a ductile manner at the midspan with a load of 37.37 kips (166.23 kN). Table 8.8 also presents the calculated capacities of this girder including all damages. The calculated shear and moment capacities for this girder at the failure section were 64.7 kips (287.8 kN) and 223.58 kip.ft (303.5 kN.m), respectively. The equivalent calculated load carrying capacities (a point load at the midspan, $P_{calculated}$) were respectively 129.4 kips (575.6 kN) and 35.89 kips (159.65 kN), which is 3.9% higher than measured load. Therefore, the 30-ft (9.14-m) long girder failed by the flexural failure of the section, which is a ductile failure.

8.7.3 Summary of Capacity Calculation Methods for Salvaged and Damaged Girders

Based on the experimental findings of the present study and some other test data collected from the literature, the proposed capacity calculation methods for salvaged or damaged girders was further verified. Table 8.9 presents a summary of the analysis. It can be inferred that the available methods can estimate the capacities of damaged girders with a reasonable accuracy. The error between the calculated and the measured peak loads was not more than 13% in all cases.

Overall, it is recommended to use a moment-curvature analysis in the calculation of moment capacity for damaged girders by including the damage in the analytical model. The shear capacity of a damaged girder may be calculated using current AASHTO method.

Table 8.9 – Measured and Calculated Load Capacity for Different Salvaged Girders

Refer.	Sec. Type	Age (yr.)	Span, ft (m)	Girder Damage Type	Width in. (mm)	Depth in. (mm)	Concrete Strength, ksi (MPa)	Tendon Yield, f_y , ksi (MPa)	Measured Peak Load kips (kN)	Calculated Peak Load kips (kN)
Shenoy et al. (1991)	Box	27	54 (16.5)	Minor concrete cracking and spalling	36 (914)	27 (686)	7.1 (48.9)	150 (1034.2)	104.1 (463.1)	109.7 (487.9)
Halsey et al. (1996)	Inverted Tee	40	29 (8.8)	Minor deterioration at the girder edges	12 (305)	12 (305)	11.79 (81.3)	260 (1792.6)	46.9 (208.6)	50.2 (223.3)
Labia et al. (1997)	Box	20	70 (21.3)	No apparent damage	48 (1219)	33 (838)	5.5 (37.9)	270 (1861.6)	161 (716.2)	181.7 (808.2)
Eder et al. (2010)	I	50	45 (13.7)	Longitudinal cracks along post-tensioning tendons	16 (406)	40 (1016)	9.8 (67.6)	150 (1034.2)	146.6 (652.1)	162.2 (721.5)
Pettigrew et al. (2016)	Double Tee	48	53 (16.1)	Deteriorated and exposure of rebar at some location	84 (2133)	28 (711)	5.6 (38.6)	278 (1916.7)	105.5 (469.3)	106.41 (473.3)
50-ft Girder, Present Study	Double Tee	45	45.6 (13.9)	Table 8.1	40 (1016)	23 (584)	2.54 (17.5)	258 (1779)	41.9 (186.4)	39.93 (177.6)
30-ft Girder, Present Study	Double Tee	45	27.9 (8.5)	Table 8.1	44 (1117.6)	23 (584)	2.54 (17.5)	258 (1779)	37.37 (166.2)	35.89 (159.6)

9 CALCULATION OF DAMAGED DOUBLE-TEE GIRDER MOMENT AND SHEAR CAPACITIES

A successful load rating of distressed double-tee girder bridges should include the effect of damage on the capacities of the girders. The results of full-scale strength testing on two salvaged double-tee girders were discussed in the previous chapter, and methods of estimation of shear and moment capacities for damaged double-tee girders were verified using these and other large-scale girder test data.

According to the AASHTO Manual for Bridge Evaluation (2011), “condition factors, φ_c ” are used to include bridge superstructure damage in the load rating equation (refer to Sec. 5.2.1). However, specific condition factors should be developed for any possible damage of double-tee girders. Damage types specific to South Dakota double-tee girders were identified and categorized in Chapter 6. In an attempt to minimize variations from current codes, it is proposed to include the damage of a double-tee girder in the load rating equation through the use of the “condition factor”, which is defined in the present study as the ratio of the damaged girder capacity to the undamaged girder capacity.

Review of available construction detailing and inspection reports revealed that there are 23 different double-tee girder sections, which have been used in the state. Condition factors for moment and shear should be developed for each of these double-tee sections including different damage types and condition states. As discussed in the previous chapter, the moment capacity of a damaged prestressed girder can be calculated using a moment-curvature analysis and the shear capacity can be estimated using the AASHTO LRFD method.

In this chapter, the methods of calculation of moment and shear capacities for damaged double-tee sections were discussed including the steps taken to develop the moment and shear condition factors for damaged double-tee girder stems and flanges. Finally, a summary of the findings for the 23 double-tee girder sections is presented in a tabulated format.

9.1 Stem Moment and Shear Capacities

Four damage types, each with four condition states, were defined for the stem of double-tee girders (Table 6.1). The steps and scenarios assumed to include such damages in the girder moment and shear capacities are discussed herein.

9.1.1 Stem Cover Deterioration including Delamination/Spall/Patched Area

The stem concrete cover may deteriorate from the girder inside, outside, or bottom face. Cover deterioration can be included in the capacity estimation method by removing the deteriorated concrete cover from the section. The stem concrete cover removal scenarios for the four condition states are discussed in this section.

9.1.1.1 Stem Cover Deterioration with Condition State 1 (CS-1)


No damage of the stem concrete cover is assumed under CS-1, therefore, the capacity of the damaged girder in this state is the same as that for an undamaged girder (Fig. 9.1).



Figure 9.1 – Stem Cover Deterioration with Condition State 1 equivalent to Undamaged Section


9.1.1.2 Stem Cover Deterioration with Condition State 2 (CS-2)

This damage condition state was defined as the “loss of 1/3 of the cover without exposure or corrosion of the reinforcement” (Table 6.1). To include this damage in the capacity calculation, 1/3 of the stem concrete cover was removed from the outside (Fig. 9.2a), inside (Fig. 9.2b), and bottom (Fig. 9.2c) face of the stem. Moment-curvature analyses were performed for these sections and the worst-case scenario (the lowest value) was reported as the condition factor. The same process was used to calculate the shear condition factors for the stem cover deterioration in which the web width, b_v , was reduced in the V_c component of the shear capacity equation (Eq. 8.7).

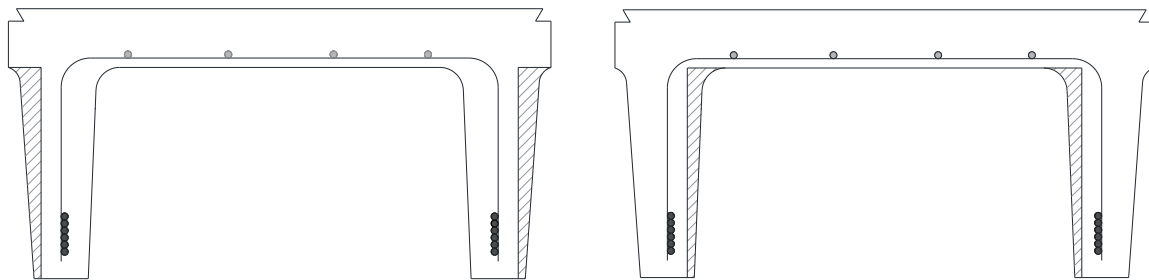

(a) Cover Deterioration from Outside

(b) Cover Deterioration from Inside

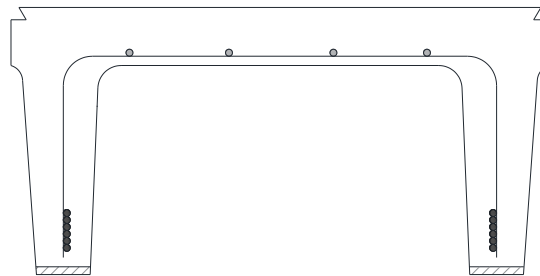

(c) Cover Deterioration from Bottom

Figure 9.2 – Stem Cover Deterioration with Condition State 2

9.1.1.3 Stem Cover Deterioration with Condition State 3 (CS-3)

This damage condition state was defined as the “loss of 2/3 of the cover without exposure or corrosion of reinforcement” (Table 6.1). To include this damage in the capacity calculation, 2/3 of the stem concrete cover was removed from the outside (Fig. 9.3a), inside (Fig. 9.3b), and bottom (Fig. 9.3c) face of the stem. Moment-curvature analyses were performed for these sections and the worst-case scenario (the lowest value) was reported as the condition factor. The same process was used to calculate the shear condition factors for the stem cover deterioration, in which the web width, b_v , was reduced in the V_c component of the shear capacity equation (Eq. 8.7).

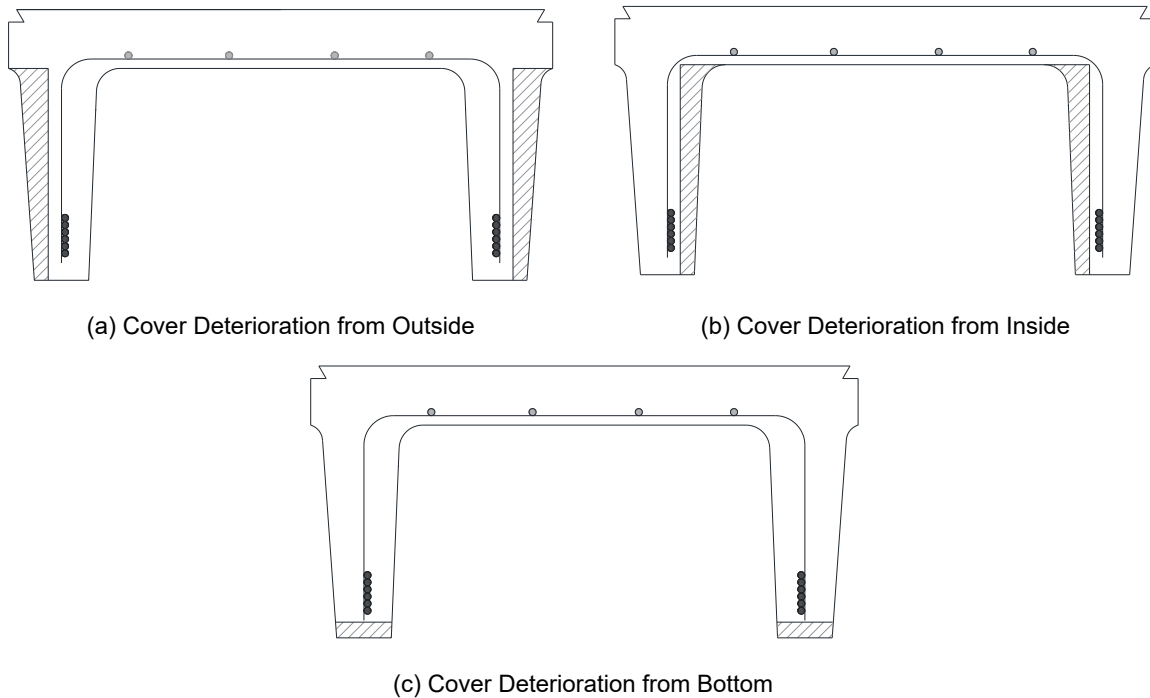


Figure 9.3 – Stem Cover Deterioration with Condition State 3

9.1.1.4 Stem Cover Deterioration with Condition State 4 (CS-4)

This damage condition state was defined as the “exposure of reinforcement without any sign of corrosion”. To include this damage in the capacity calculation, the stem concrete cover was completely removed from the outside (Fig. 9.4a), inside (Fig. 9.4b), and bottom (Fig. 9.4c) face of the stem. Moment-curvature analyses were performed for these sections and the worst-case scenario (the lowest value) was reported as the condition factor. Refer to Sec. 9.1.4 regarding the effect of this damage type on the shear capacity.

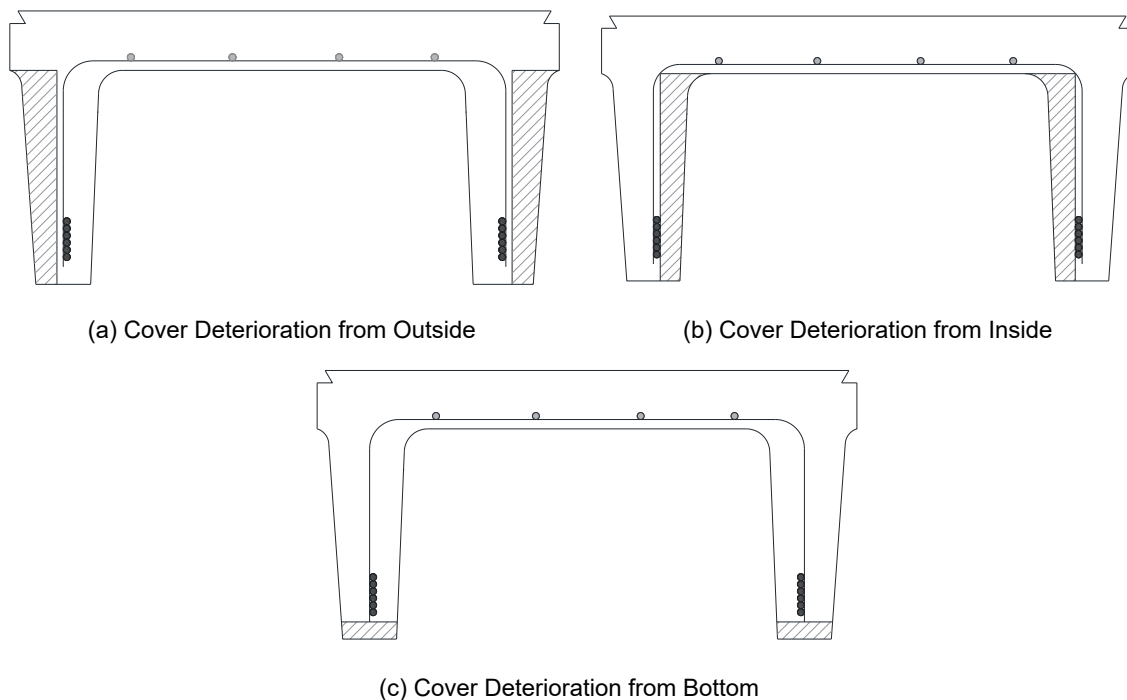


Figure 9.4 – Stem Cover Deterioration with Condition State 4 for Moment Capacity Calculation

9.1.2 Stem Exposed Transverse Bar

This damage type includes the corrosion of the stem transverse bars in the moment and shear capacities. One may assume that the stem transverse bars will be exposed when the stem cover is fully lost. However, since this was addressed under the “stem cover deterioration” and the stem transverse bar may corrode without significant damage of the cover, only the transverse steel bar area was modified under this damage type to include the corrosion in the capacity calculations.

For double-tee girders, it was found that this damage has insignificant effect on the moment capacity since the girder neutral axis is usually inside the flange. However, this damage type will affect the shear capacity since the transverse bar area will be modified accounting for the bar corrosion.

9.1.2.1 Stem Exposed Transverse Bar Damage with Condition State 1 (CS-1)

This damage condition state was defined as “None” (Table 6.1). Therefore, the shear capacity remains the same as that for the undamaged section.

9.1.2.2 Stem Exposed Transverse Bar Damage with Condition State 2 (CS-2)

This damage condition state was defined as a “minor corrosion of the reinforcement with minimal section loss” (Table 6.1). To include this damage in the calculation of the shear capacity, the area of the stem transverse steel bars only for one leg (or stem) was reduced by 25%, which affects the V_s component of the shear capacity equation (Eq. 8.8).

9.1.2.3 Stem Exposed Transverse Bar Damage with Condition State 3 (CS-3)

This damage condition state was defined as a “severe corrosion of only one leg of transverse reinforcement” (Table 6.1). To include this damage in the calculation of the shear capacity, the area of the stem transverse steel bars only for one leg (or stem) was reduced by 50%, which affects the V_s component of the shear capacity equation (Eq. 8.8).

9.1.2.4 Stem Exposed Transverse Bar Damage with Condition State 4 (CS-4)

This damage condition state was defined as a “severe corrosion of all legs of transverse reinforcement” (Table 6.1). To include this damage in the calculation of the shear capacity, the area of the stem transverse steel bars for both legs (or both stems) was reduced by 50%, which affects the V_s component of the shear capacity equation (Eq. 8.8).

9.1.3 Stem Exposed Longitudinal Prestressing

This damage type includes the effect of the prestressing tendon corrosion in the calculation of the shear and moment capacities, using a similar technique discussed for the “stem exposed transverse bar”. The area of the stem tendons will be reduced to account for corrosion. This damage type will affect both shear and moment capacities of double-tee girders.

9.1.3.1 Stem Exposed Longitudinal Prestressing Damage with Condition State 1 (CS-1)

This damage condition state was defined as “None” (Table 6.1). Therefore, the shear and moment capacities remain the same as those for the undamaged section.

9.1.3.2 Stem Exposed Longitudinal Prestressing Damage with Condition State 2 (CS-2)

This damage condition state was defined as a “50% section loss due to corrosion in the extreme tendon” (Table 6.1). To include this damage in analyses, the area of the extreme tendon for both stems was reduced by 50% (Fig. 9.5a). Moment-curvature analyses were performed to calculate the flexural capacity of the damaged sections. For the calculation of the shear capacity, a decrease in the area of extreme tendon shifts the tendon center of gravity up reducing d_v thus the V_c and V_s components of the shear strength equation (Eq. 8.7 & 8.8).

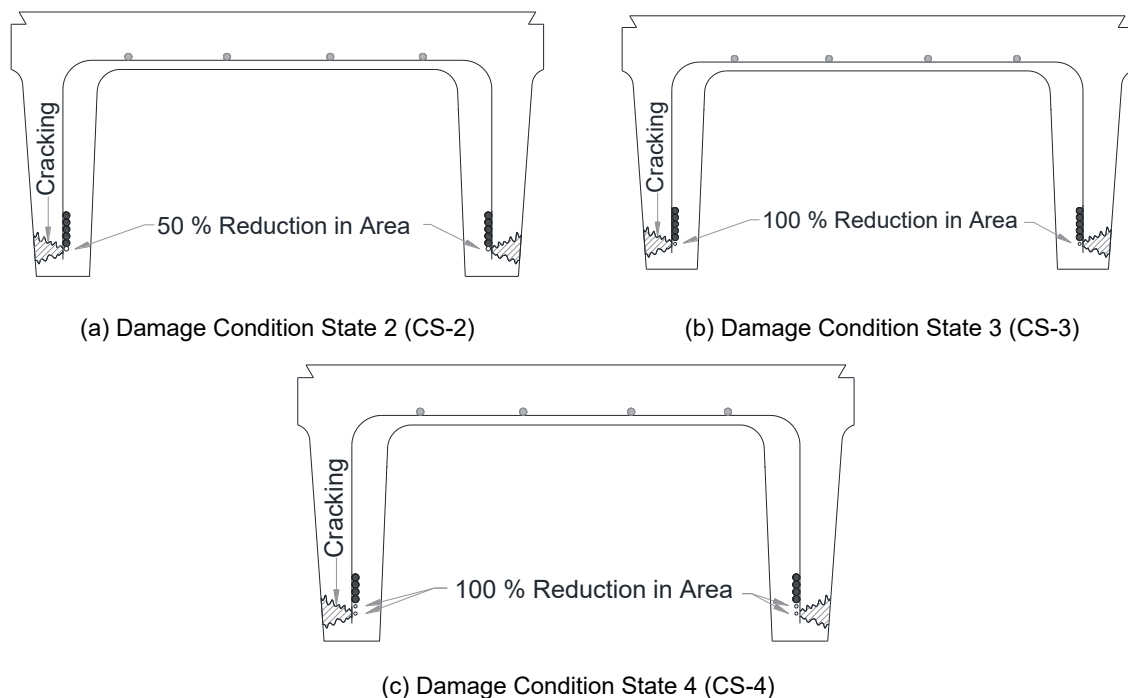


Figure 9.5 – Stem Tendon Exposure

9.1.3.3 Stem Exposed Longitudinal Prestressing Damage with Condition State 3 (CS-3)

This damage condition state was defined as a “100% section loss due to corrosion in the extreme tendon” (Table 6.1). To include this damage in analyses, the area of the extreme tendon for both stems was reduced by 100% (Fig. 9.5b). Moment-curvature analyses were carried out to calculate the flexural capacity of the damaged section. For the calculation of the shear capacity, a decrease in the area of extreme tendon shifts the tendon center of gravity up reducing d_v thus the V_c and V_s components of the shear strength equation (Eq. 8.7 & 8.8).

9.1.3.4 Stem Exposed Longitudinal Prestressing Damage with Condition State 4 (CS-4)

This damage condition state was defined as a “section loss due to corrosion in the two or more tendons” (Table 6.1). To include this damage in analyses, the area of the two extreme tendons for both stems was reduced by 100% (Fig. 9.5c). Moment-curvature analyses were performed to calculate the flexural capacity of the damaged section. The same method discussed in the previous section was used for the calculation of the shear capacity.

9.1.4 Stem Cracking

Figure 9.6 shows three types of cracks which may be observed in the stem of a double-tee girder: (1) debonding cracks caused by the bond failure between a tendon and its surrounding concrete, (2) stem-to-flange longitudinal cracks possibly caused by an insufficient detailing, and (3) shear cracks. Each will happen at a different location and depth of a girder making this damage type a challenge to include in the shear and moment capacity calculations.

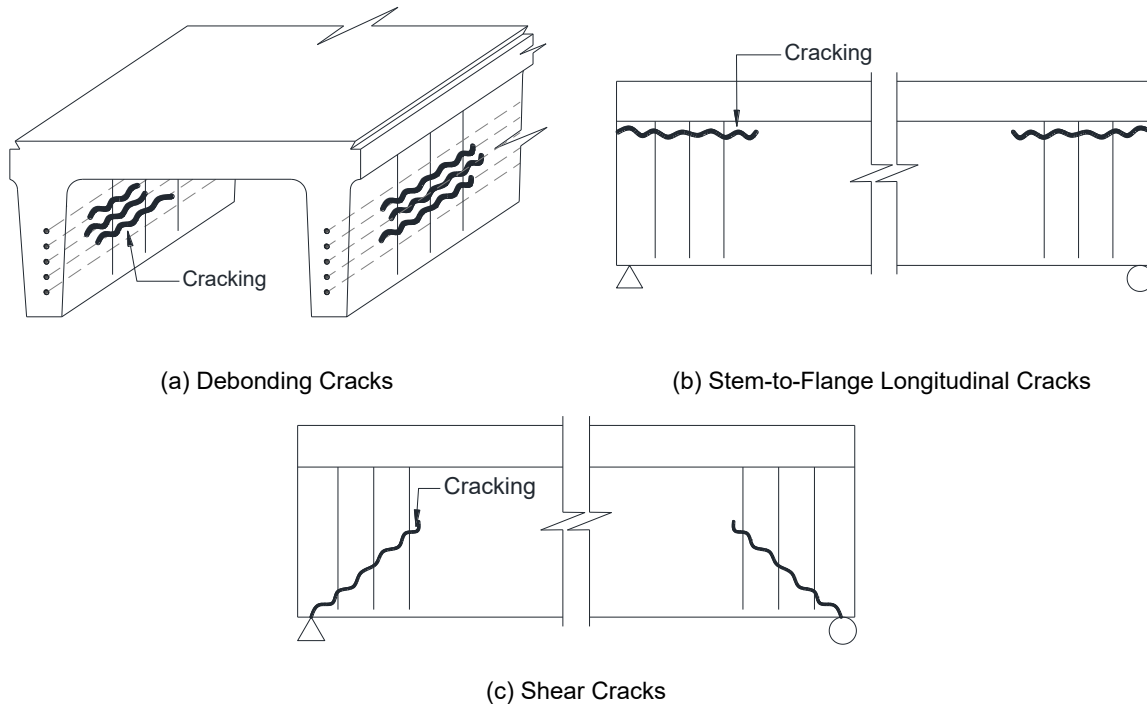


Figure 9.6 – Possible Stem Crack Types

Since the neutral axis of all 23 double-tee sections is inside the flange or close to the flange, it can be assumed that the stem cracks have a minimal effect on the moment capacity. However, the shear capacity of the section will change if any of these damage types (or stem cover deterioration with CS 4) are seen.

To include the effect of debonding cracks on the shear capacity, it was assumed that the stem concrete below the crack was fully lost and then the V_c component of the shear capacity equation (Eq. 8.7) was modified using the reduced effective shear depth, d_v . Furthermore, a portion of the transverse reinforcing bars is exposed in this case and does not contribute to the shear capacity. To include this condition in analyses, the maximum bar stress that can be developed excluding the exposed portion of the transverse bar was estimated using Eq. 9.1. Subsequently, the V_s component of the shear capacity equation (Eq. 8.8) was modified using the reduced bar strength and the reduced effective shear depth, d_v . Furthermore, the V_p is zero in this case.

$$f_s = \frac{\text{development length} - \text{length of stem bottom face cover deterioration}}{\text{development length}} * f_y \quad (\text{Eq. 9.1})$$

where,

f_s = The bar maximum stress that can be developed using the available length,

f_y = The yield strength of the transverse bar.

To include the effect of flange-to-stem cracks on the shear capacity, the stem concrete below the flange-to-stem interface can be fully removed. In this case, the shear capacity of the girder is similar to that of a one-way slab (as was seen in the strength testing of the 50-ft (15.24-m) long salvaged

double-tee girder, Ch. 8). Finally, to include the effect of shear cracks on the shear capacity, the V_c component of the shear capacity equation can be assumed to be zero when there is a diagonal crack.

Because there are different stem crack types (or stem cover deterioration with CS-4) and they may happen at a different depth of the girder, several combinations are feasible. However, for practical purposes, only three stem cracking (or stem cover deterioration) scenarios were assumed: (i) if the crack (or stem cover deterioration with CS-4), regardless of the type, is reported at the bottom 1/3 of the stem, remove the bottom 1/3 of the stem concrete (Fig. 9.7a & b) and then calculate the shear capacity as discussed above, (ii) if there is a crack (or stem cover deterioration with CS-4) between the bottom 1/3 to 2/3 stem depth, repeat (i) but remove the bottom 2/3 of the stem concrete (Fig. 9.7c & d), and (iii) if there is a crack (or stem cover deterioration with CS-4) between the bottom 2/3 to 1.0 stem depth, repeat (i) but fully remove the stem concrete (Fig. 9.7e & f). In case (iii), the shear capacity was the minimum of the girder shear capacity as discussed above and the one-way slab (flange only) shear capacity based on the findings of the salvaged double-tee girder strength testing.

These conservative assumptions were made because the shear failure is brittle and must be avoided. Furthermore, regardless of the condition state, the same shear capacity condition factors were proposed for the stem cracking to avoid shear failure.

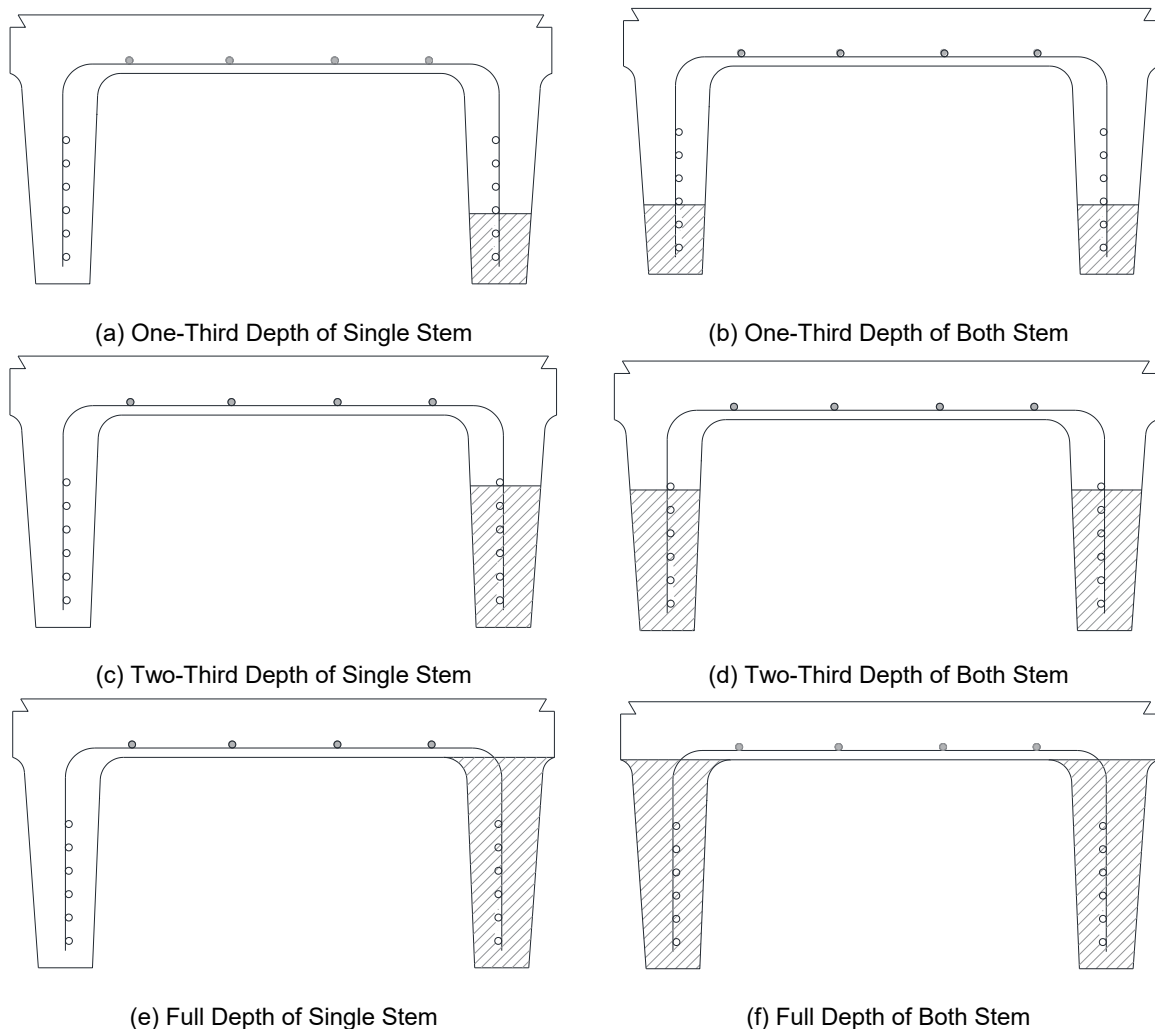


Figure 9.7 – Scenarios to Include Double-Tee Stem Cracking (or Stem Cover Deterioration with CS-4) in Shear Capacity

9.2 Flange Moment and Shear Capacities

Four damage types, each with four condition states, were defined for the flange of double-tee girders (Table 6.2). The steps and scenarios assumed to include such damage in the girder moment and shear capacities are discussed herein.

9.2.1 Flange Cover Deterioration including Delamination/Spall/Patched Area/Aberration

Flange cover deterioration in a form of delamination, spalling, patched area, or aberration can be included in the capacity estimation method by removing the deteriorated concrete cover from the section. The flange concrete cover removal scenarios for the four condition states are discussed in this section.

9.2.1.1 Flange Cover Deterioration with Condition State 1 (CS-1)

This damage condition state was defined as “none” (Table 6.2). Therefore, the capacity of the damaged girder in this condition state is the same as that for an undamaged girder.

9.2.1.2 Flange Cover Deterioration with Condition State 2 (CS-2)

This damage condition state was defined as a “loss of 1/3 of the flange cover without exposure or corrosion of the reinforcement” (Table 6.2). To include this damage in the calculation of moment and shear capacities, 1/3 of the flange concrete cover was removed (Fig. 9.8a). Moment-curvature analyses were performed to calculate the moment capacity of the damaged girders. For the shear capacity calculation, the depth of section is reduced when the concrete cover is removed from the top of the flange by which the section effective shear depth, d_v , is reduced thus the V_c (Eq. 8.7) and V_s (Eq. 8.8) components of the shear capacity equation are reduced.

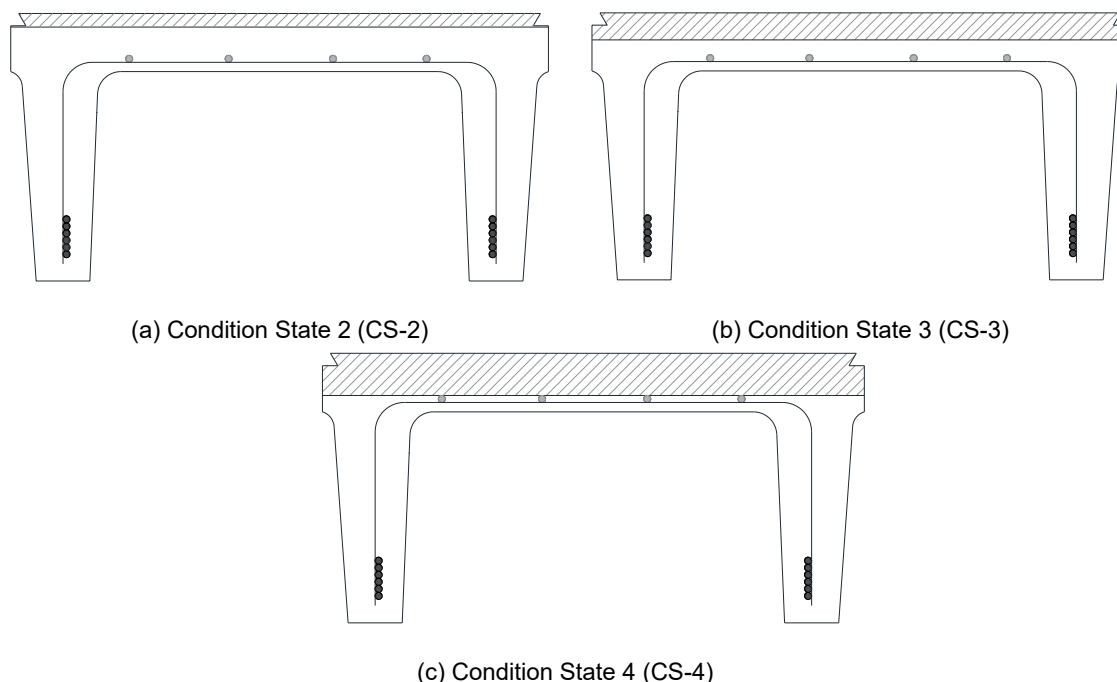


Figure 9.8 – Flange Cover Deterioration

9.2.1.3 Flange Cover Deterioration with Condition State 3 (CS-3)

This damage condition state was defined as a “loss of 2/3 of the flange cover without exposure or corrosion of the reinforcement” (Table 6.2). To include this damage in the calculation of moment and shear capacities, 2/3 of the flange concrete cover was removed (Fig. 9.8b). The same procedures discussed above were used for the calculation of the moment and shear capacities.

9.2.1.4 Flange Cover Deterioration with Condition State 4 (CS-4)

This damage condition state was defined as the “exposure of reinforcement without any sign of corrosion” (Table 6.2). To include this damage in the calculation of moment and shear capacities, all the flange concrete cover was removed (Fig. 9.8c) and the same methods discussed above were used to calculate the capacities.

9.2.2 Flange Exposed Bar

This damage type includes the corrosion of the flange longitudinal and transverse bars in the moment and shear capacities. It is assumed that the flange bars will be exposed (complete loss of the concrete cover) then corroded. This was assumed because the flange concrete cover for South Dakota double-

tee girders is deeper than 3 in. (83 mm, or 68% of the flange thickness). The flange concrete cover was fully removed and the flange reinforcement area was reduced to include this damage type in the shear and moment capacities of double-tee girders.

9.2.2.1 Flange Exposed Bar with Damage Condition State 1 (CS-1)

This damage condition state was defined as “none” (Table 6.2) indicating that there was no corrosion of the flange reinforcement. However, the full cover was removed. Therefore, this condition state is the same as the “Flange Cover Deterioration with Damage Condition State 4” discussed in the previous sections.

9.2.2.2 Flange Exposed Bar with Damage Condition State 2 (CS-2)

This damage condition state was defined as a “minor corrosion of the outer layer of reinforcement with minimal section loss” (Table 6.2). To include this damage in the moment and shear capacities, the flange concrete cover was fully removed, and the area of both flange longitudinal and transverse bars was conservatively reduced by 25% (Fig. 9.9a). Moment-curvature analyses were carried out to calculate the moment capacity of the damaged section. Furthermore, this damage type reduces the effective shear depth (d_v) and thus the V_c and V_s components of the shear capacity equation (Eq. 8.5).

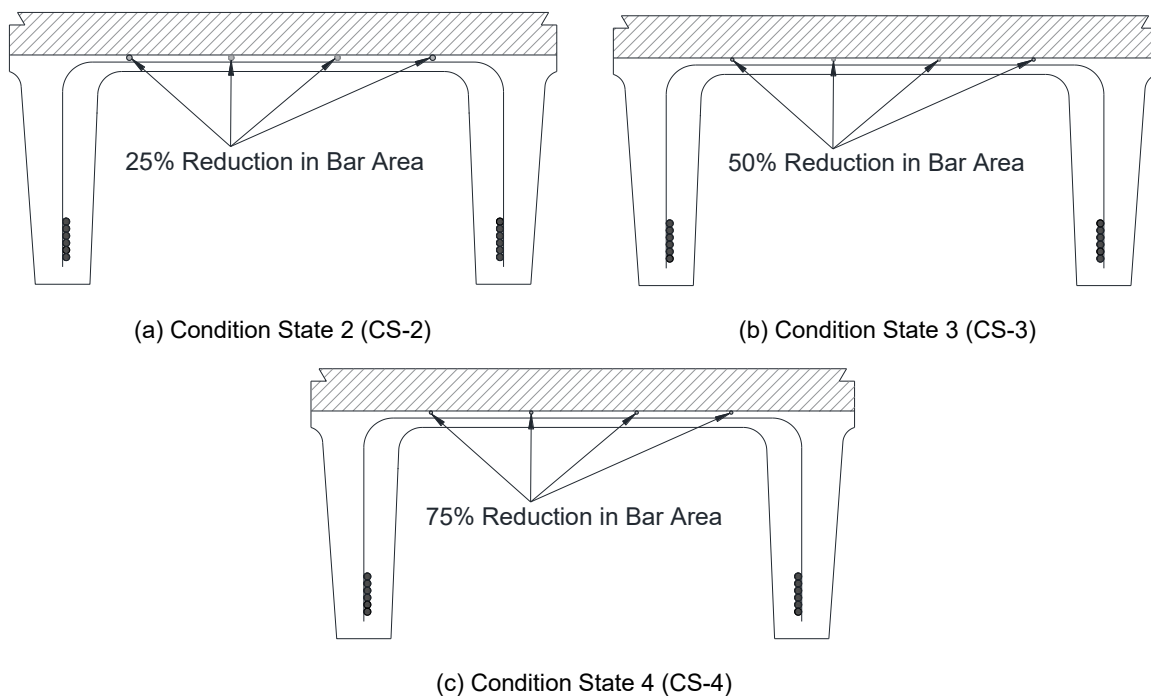


Figure 9.9 – Flange Exposed Longitudinal and Transverse Bars

9.2.2.3 Flange Exposed Bar with Damage Condition State 3 (CS-3)

This damage condition state was defined as a “severe corrosion of only the outer layer of reinforcement” (Table 6.2). To include this damage in the moment and shear capacities, the flange concrete cover was fully removed, and the area of both flange longitudinal and transverse bars was conservatively reduced by 50% (Fig. 9.9b). The same methods discussed above were used to calculate the moment and shear capacities.

9.2.2.4 Flange Exposed Bar with Damage Condition State 4 (CS-4)

This damage condition state was defined as a “severe corrosion of the outer and inner layers of reinforcement” (Table 6.2). To include this damage in the moment and shear capacities, the flange concrete cover was fully removed, and the area of both flange longitudinal and transverse bars was conservatively reduced by 75% (Fig. 9.9c). The same methods discussed above were used to calculate the moment and shear capacities.

9.2.3 Flange Cracking

Since the flange cracking would have at most the same effect as the flange cover deterioration discussed in the previous section, the effect of the flange cracking was not separately investigated. The cover deterioration will govern.

9.2.4 Girder-to-Girder Longitudinal Joint Deterioration


The moment and shear capacities are calculated for a single girder at a time. Therefore, the girder-to-girder longitudinal joint deterioration has no effect on the girder capacities.

9.3 Loss of Tendon Stresses

Prestressing loss has minimal effect on the moment capacity of concrete sections. Furthermore, the V_p component of the shear capacity equation has less than 3% contribution to the shear capacity for South Dakota double-tee sections, and it is zero when tendons are straight. Nevertheless, a 20% prestressing loss was assumed in all analyses based on the findings of the literature review on damaged or old girders (Dasar et al., 2016; Pessiki et al., 1996). It is worth mentioning that the decompression test carried out on the 30-ft (9.14-m) long girder (Chapter 8) showed approximately 50% loss.

9.4 Proposed Condition Factors for Different Double-Tee Girder Sections

Twenty-three different double-tee sections which have been used in South Dakota were identified. Moment and shear condition factors for each section were developed and summarized in Fig. 9.10 to 9.32. The girder properties were also reported, which were extracted from the available shop drawings. Appendix E of this report presents the details of the available double-tee sections.

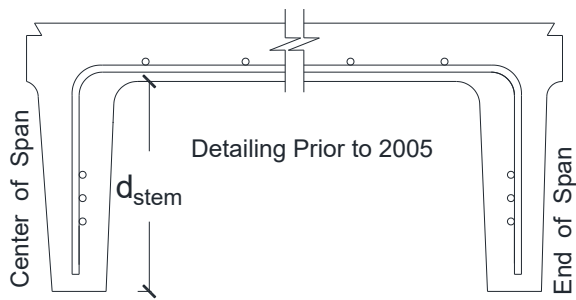

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 3 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5$ ksi (34.5 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.80	0.65	0.30
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70
Exposed Rebar	0.70	0.70	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking(a)

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Exposed Transverse Rebar(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stems	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45
Cracking on Both Stems	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stems	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.75
Exposed Rebar	0.75	0.75	0.75	0.75
Cracking	1	1	1	1

Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1
---	---	---	---	---

Figure 9.10 – Condition Factors for 23-in. Deep 6-Straight Tendon Double-Tee Girders (Before 2005)

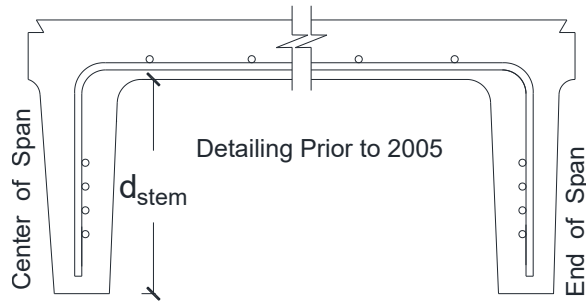

Stem Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.85	0.70	0.45
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.85	0.75	0.65
Exposed Rebar	0.65	0.65	0.65	0.65
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Damage Type	Condition States	Condition States	Condition States	Condition States
-------------	------------------	------------------	------------------	------------------

	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stems	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45
Cracking on Both Stems	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stems	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.75
Exposed Rebar	0.75	0.75	0.75	0.75
Cracking	1	1	1	1

Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1
---	---	---	---	---

Figure 9.11 – Condition Factors for 23-in. Deep 8-Straight Tendon Double-Tee Girders (Before 2005)

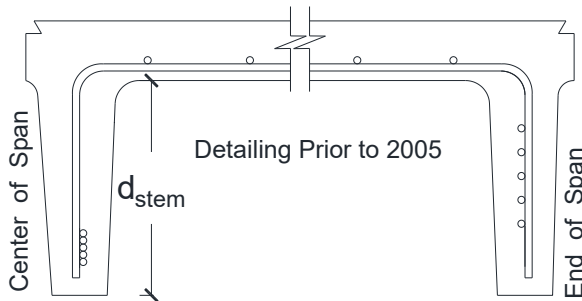

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 5 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5$ ksi (34.5 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.80	0.60
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.75
Exposed Rebar	0.75	0.75	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
-------------	------------------	------------------	------------------	------------------

	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.75
Exposed Rebar	0.75	0.75	0.75	0.75
Cracking	1	1	1	1

Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1
---	---	---	---	---

Figure 9.12 – Condition Factors for 23-in. Deep 10-Harped Tendon Double-Tee Girders (Before 2005)

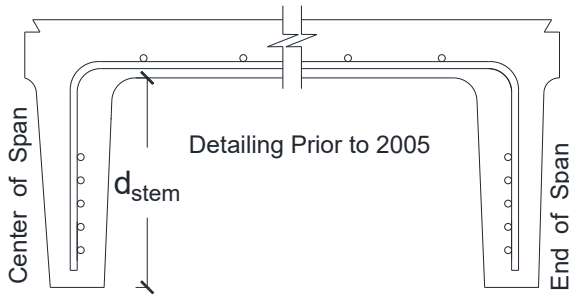

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 5 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5$ ksi (34.5 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.85	0.75	0.55
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70
Exposed Rebar	0.70	0.65	0.65	0.65
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
-------------	------------------	------------------	------------------	------------------

	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 10-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.75
Exposed Rebar	0.75	0.75	0.75	0.75
Cracking	1	1	1	1

Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1
---	---	---	---	---

Figure 9.13 – Condition Factors for 23-in. Deep 10-Straight Tendon Double-Tee Girders (Before 2005)

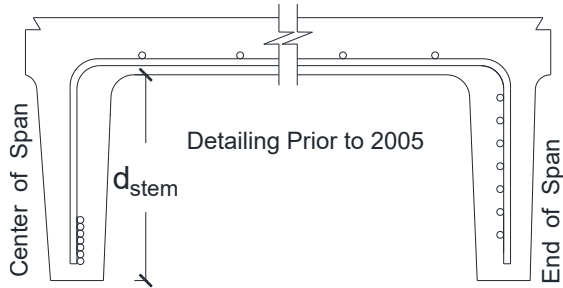

Stem Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.70
Exposed Rebar	0.70	0.70	0.65	0.65
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4

	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70
Exposed Rebar	0.70	0.70	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.14 – Condition Factors for 23-in. Deep 14-Harped Tendon Double-Tee Girders (Before 2005)

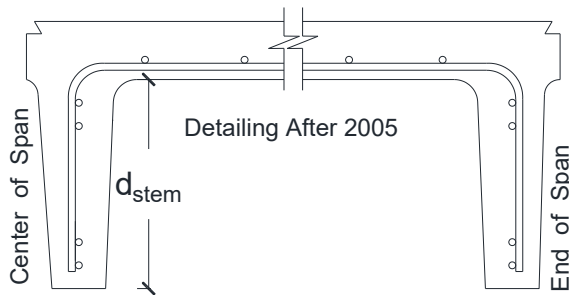

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 4 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.80	0.65	0.30
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
-------------	------------------	------------------	------------------	------------------

	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	0.95	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.90	0.85	0.55
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.15 – Condition Factors for 23-in. Deep 8-Straight Tendon Double-Tee Girders (After 2005)

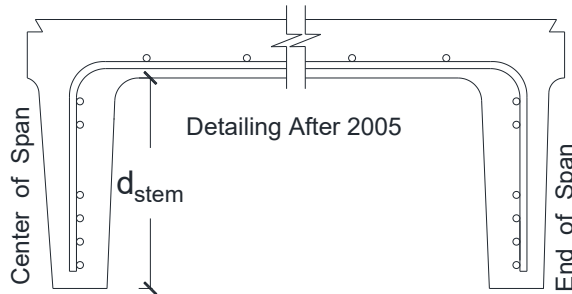

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 6 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 23-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.85	0.75	0.55
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.80
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.35	1/3 bottom stem depth (1/3 d_{stem}) 0.35	1/3 bottom stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.16 – Condition Factors for 23-in. Deep 12-Straight Tendon Double-Tee Girders (After 2005)

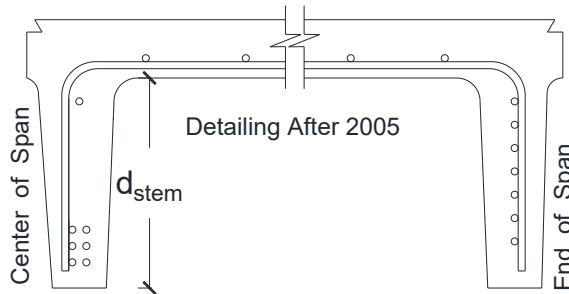

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 7 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.41L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.60
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.80
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.17 – Condition Factors for 23-in. Deep 14-Straight Tendon Double-Tee Girders (After 2005)

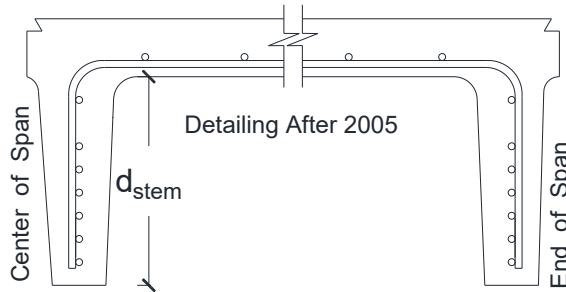

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 7 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.80	0.60
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40	1/3 bottom stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.18 – Condition Factors for 23-in. Deep 14-Straight Tendon Double-Tee Girders (After 2005)

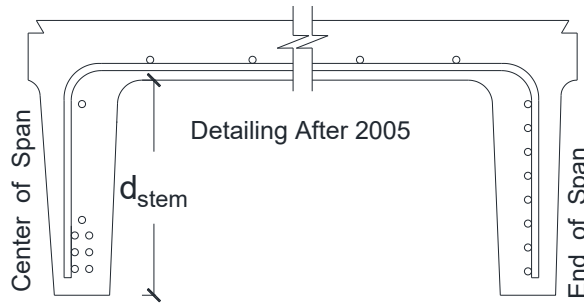

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 8 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.37L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 7.25$ ksi (50 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 23-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	0.95	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.70	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.85	0.85	0.75
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65	1/3 bottom stem depth (1/3 d_{stem}) 0.65
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.35	1/3 bottom stem depth (1/3 d_{stem}) 0.35	1/3 bottom stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.19 – Condition Factors for 23-in. Deep 16-Harped Tendon Double-Tee Girders (After 2005)

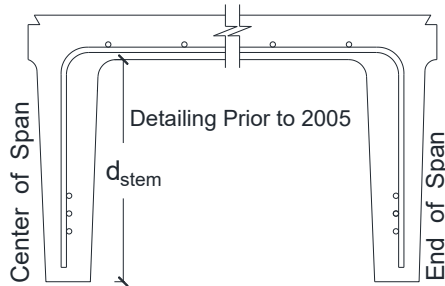

Depth = 30 in. (762 mm)
Width = 46 in. (1168 mm)
No. of Tendons = 3 per stem
Tendon Diameter = 0.5 in. (13 mm)
Tendon Profile = Straight
Transverse Bar size = No. 4 (13 mm)
 $f_c = 5$ ksi (34.5 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.80	0.65	0.30
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.45	1/3 top stem depth (1/3 d_{stem}) 0.45	1/3 top stem depth (1/3 d_{stem}) 0.45
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 6-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.20 – Condition Factors for 30-in. Deep 6-Straight Tendon Double-Tee Girders (Before 2005)

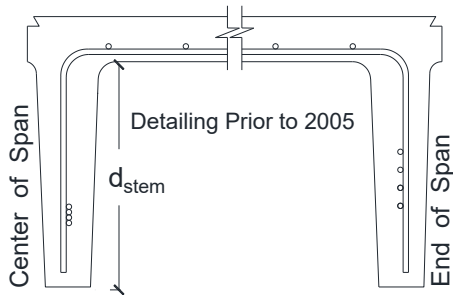

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 4 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f_c = 5$ ksi (34.5 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.85	0.75	0.50
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.9	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.25	1/3 top stem depth (1/3 d_{stem}) 0.25	1/3 top stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.21 – Condition Factors for 30-in. Deep 8-Harped Tendon Double-Tee Girders (Before 2005)

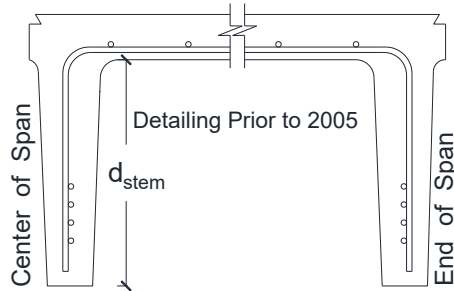

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 4 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5$ ksi (34.5 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.85	0.70	0.45
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.99	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.50	2/3 bottom stem depth (2/3 d_{stem}) 0.50	2/3 bottom stem depth (2/3 d_{stem}) 0.50
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.20	1/3 top stem depth (1/3 d_{stem}) 0.20	1/3 top stem depth (1/3 d_{stem}) 0.20
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85

Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.22 – Condition Factors for 30-in. Deep 8-Straight Tendon Double-Tee Girders (Before 2005)

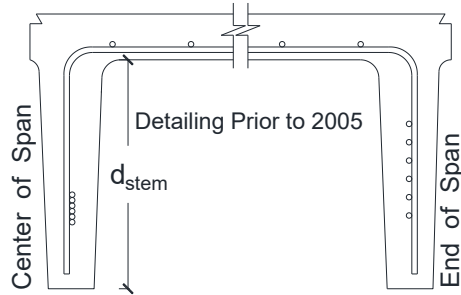

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 6 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5$ ksi (34.5 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.80	0.65
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.80
Exposed Rebar	0.80	0.75	0.75	0.75
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 12-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.23 – Condition Factors for 30-in. Deep 12-Harped Tendon Double-Tee Girders (Before 2005)

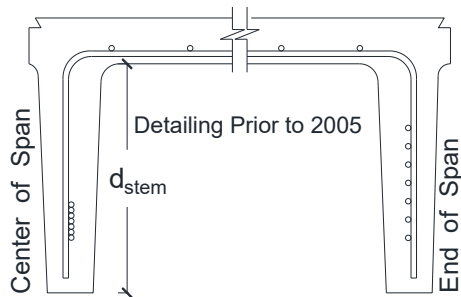

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 7 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 f'_c = 5 ksi (34.5 Mpa)
 f_y = 60 ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.75
Exposed Rebar	0.75	0.75	0.75	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.24 – Condition Factors for 30-in. Deep 14-Harped Tendon Double-Tee Girders (Before 2005)

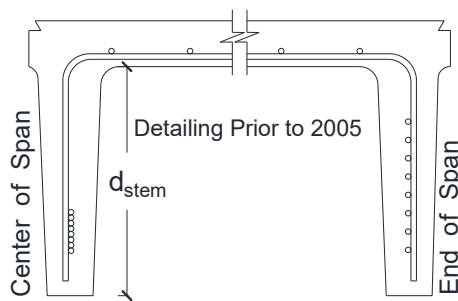

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 8 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5.5$ ksi (37.9 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.75
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.75
Exposed Rebar	0.75	0.75	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.25 – Condition Factors for 30-in. Deep 16-Harped Tendon Double-Tee Girders (Before 2005)

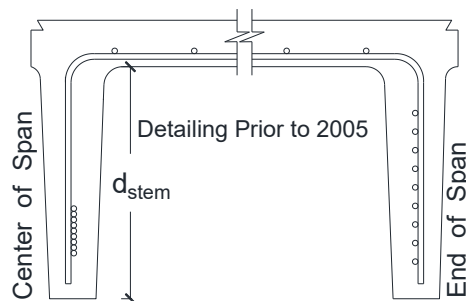

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 9 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.95	0.85	0.75
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.70
Exposed Rebar	0.70	0.70	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.20	1/3 bottom stem depth (1/3 d_{stem}) 0.20	1/3 bottom stem depth (1/3 d_{stem}) 0.20
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.26 – Condition Factors for 30-in. Deep 18-Harped Tendon Double-Tee Girders (Before 2005)

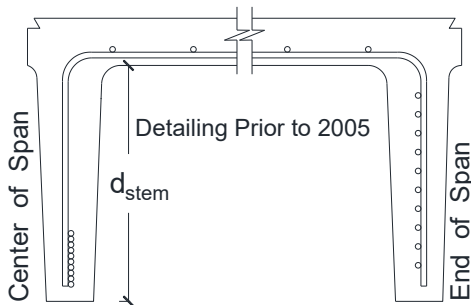

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 10 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 f'_c = 6 ksi (41.4 Mpa)
 f'_y = 60 ksi (413.7 Mpa)
 Initial Tendon Force = 28.9 kips (128.6 kN)

Stem Moment Condition Factors for 30-in. Deep 20-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.95	0.90	0.80
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 20-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.85	0.75
Exposed Rebar	0.75	0.70	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 20-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.55	1/3 bottom stem depth (1/3 d_{stem}) 0.55	1/3 bottom stem depth (1/3 d_{stem}) 0.55
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.15	1/3 bottom stem depth (1/3 d_{stem}) 0.15	1/3 bottom stem depth (1/3 d_{stem}) 0.15
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 20-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.75
Exposed Rebar	0.75	0.75	0.75	0.75
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.27 – Condition Factors for 30-in. Deep 20-Harped Tendon Double-Tee Girders (Before 2005)

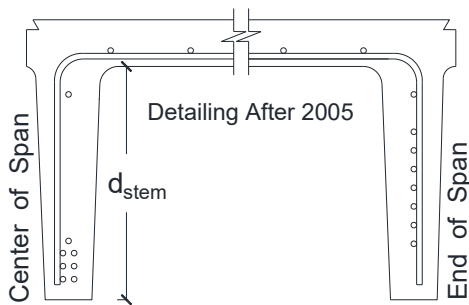

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 8 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.39
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.28 – Condition Factors for 30-in. Deep 16-Harped Tendon Double-Tee Girders (After 2005)

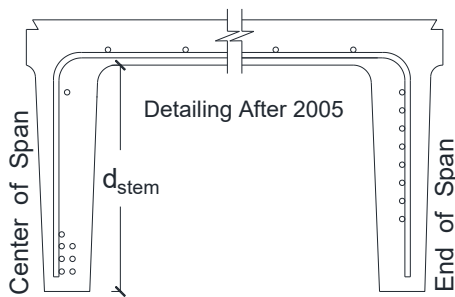

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 8 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.4L
 Transverse Bar size = No. 4 (13 mm)
 f'_c = 6 ksi (41.4 Mpa)
 f'_y = 60 ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.29 – Condition Factors for 30-in. Deep 16-Harped Tendon Double-Tee Girders (After 2005)

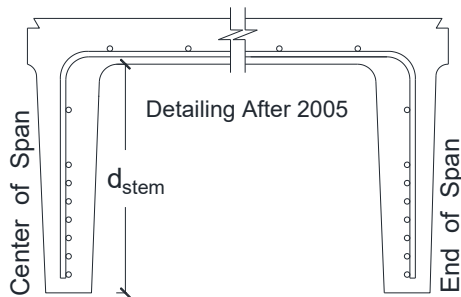

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 8 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.80	0.65
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.84
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.25	1/3 top stem depth (1/3 d_{stem}) 0.25	1/3 top stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.20	1/3 bottom stem depth (1/3 d_{stem}) 0.20	1/3 bottom stem depth (1/3 d_{stem}) 0.20
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 16-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.30 – Condition Factors for 30-in. Deep 16-Straight Tendon Double-Tee Girders (After 2005)

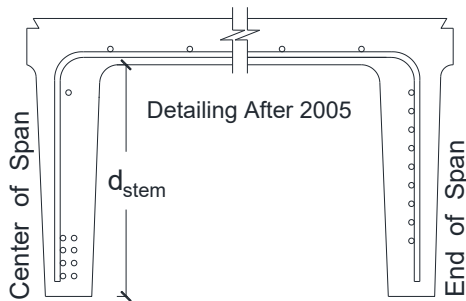

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 9 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.4L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.75
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.55	1/3 bottom stem depth (1/3 d_{stem}) 0.55	1/3 bottom stem depth (1/3 d_{stem}) 0.55
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth	1/3 top stem depth	1/3 top stem depth

		(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0	(1/3 d_{stem}) 0.0
--	--	--------------------------	--------------------------	--------------------------


Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.31 – Condition Factors for 30-in. Deep 18-Harped Tendon Double-Tee Girders (After 2005)

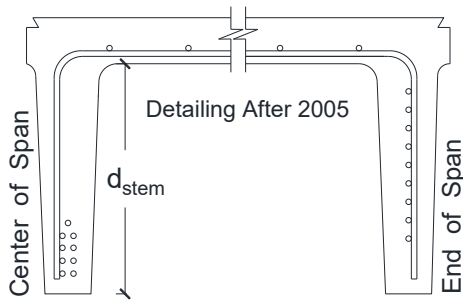

Depth = 30 in. (762 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 9 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.34L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 6$ ksi (41.4 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 30.98 kips (137.8 kN)

Stem Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.95	0.85	0.75
Cracking	1	1	1	1

Flange Moment Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.95	0.90	0.85
Exposed Rebar	0.85	0.85	0.85	0.85
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60	1/3 bottom stem depth (1/3 d_{stem}) 0.60
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30	1/3 top stem depth (1/3 d_{stem}) 0.30
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25	1/3 bottom stem depth (1/3 d_{stem}) 0.25

Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 30-in. Deep 18-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.80
Exposed Rebar	0.80	0.80	0.80	0.80
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure 9.32 – Condition Factors for 30-in. Deep 18-Harped Tendon Double-Tee Girders (After 2005)

9.5 Modification of Condition Factors Accounting for Lower Concrete Compressive Strength

The girder properties shown in the above figures were extracted from the available shop drawings. It is possible that the actual load rating bridge have a lower concrete compressive strength than that specified. Through an analytical study, it was found that a change in the concrete compressive strength only affects the flange moment condition factors, specifically those pertaining to the cover deterioration and the exposed bars. These condition factors should be reduced when the concrete compressive strength of the load rating bridge is lower than that specified in the table as:

$$\varphi_c^{f'_c} = \varphi_c^{Table} - 0.06 (\Delta f'_c) \quad (\text{Eq. 9.2})$$

where

$\varphi_c^{f'_c}$ = A reduced condition factor with a lower concrete compressive strength,

- ϕ_c^{Table} = The condition factor from the flange moment condition factor tables,
- $\Delta f'_c$ = The difference in the concrete compressive strength defined as
- $$f'_c^{Table} - f'_c^{Actual} \quad (\text{ksi})$$
- f'_c^{Table} = The concrete compressive strength specified for the girder (shown the figure),
- f'_c^{Actual} = The actual concrete compressive strength for the girder to be load rated.

9.6 Verification of Proposed Capacity Estimation Method

Appendix B of this report presents the verification of the method discussed above. The data collected from the strength testing of the 30-ft long girder was used. The measured girder capacity was compared with the calculated capacity of the girder using the method proposed in this chapter (Sec. 9.4). The calculated capacity of the girder was 16% lower than the measured capacity, which is safe.

Overall, the proposed condition factor method was found to be relatively simple and safe for the capacity calculation of damaged double-tee girders.

10 SUMMARY AND CONCLUSIONS

Precast prestressed double-tee girder bridges, which are the most common type of bridge on South Dakota local roads, are deteriorating and may need replacement only after 40 years of service. The estimation of the bridge safe live load especially when the bridge elements are deteriorated is challenging. The present project was conducted to propose a methodology for load rating of double-tee girder bridges accounting for different damage types and condition states for the girder.

10.1 Summary

The equation for bridge load rating consists of the bridge member capacity, the member dead load, and the member live load. One way to include the effect of different damage types and condition states on the load rating equation is through the modification of the capacity and live load components of the equation.

The literature was lacking quantitative definition of bridge element damage types and condition states. This gap was addressed by proposing systematic and quantitative definitions for double-tee bridge damage types and condition states. More than 370 inspection reports specific to the state double-tee bridges and the Bridge Management database (BrM) were reviewed to determine the frequency of each damage type and its condition state, number of bridge spans, span length, girder depth, and number of skewed double bridges. The statistical database was used to identify double-tee bridge candidates suited for the field and strength testing.

Using the inspection reports and the frequency of double-tee bridge damage types and other aforementioned parameters, 10 bridges were identified as suitable field testing candidates to determine the bridge live load transfer mechanisms. All 10 bridges were inspected and two double-tee bridges, one with 30-in. (762-mm) deep girders and another with 23-in. (584-mm) deep girders, were selected for field testing. Both bridges had girder-to-girder longitudinal joint deterioration with a damage condition state 3. Only girder-to-girder damage will affect the live load distributions in double-tee bridges since they are statically determinate (simply supported bridges). Both bridges were tested for flexural response but only the first bridge with 30-in. (762-mm) deep girders was tested to obtain shear demands. Strain transducers were installed at the bridge midspan in flexural response tests, and the strain transducers were installed at a distance equal to the girder depth from the face of end diaphragm in the shear response test. Both static and dynamic tests were performed for these bridges to determine the girder distribution factors and dynamic allowance.

Accurate estimation of the capacity of a damaged double-tee girder is crucial in this project for a safe load rating. To verify the available moment and shear capacity estimation methods, two 45-year old double-tee girders, one 50-ft (15.24-m) long and another 30-ft (9.14-m) long, were extracted from a bridge located in Nemo Road, SD and were strength tested at the Lohr Structures Laboratory at South Dakota State University. A four-point loading configuration was selected for the strength testing. The verified methods were then utilized to calculate the shear and moment capacities of 23 different double-tee sections, which have been used in the state.

10.2 Conclusions

Based on the review of the inspection reports for double-tee bridges, the most common damage type found for double-tee girders was the cover deterioration. The most common double-tee bridges in the state have single span with a span length of 40 ft to 60 ft. Double-tee girders with a depth of 23

in. are more common than 30-in. deep girders. Furthermore, non-skewed double-tee bridges have been used more often than skewed bridges.

Based on the findings of the two bridge field testing, the following conclusions can be drawn:

- The measured interior girder moment and shear distribution factors were lower than those specified in the AASHTO LRFD.
- Measured exterior girder distribution factors are less than or equal to calculated exterior girder distribution factor using the AASHTO methods.
- The measured dynamic load allowance was lower than that specified in the AASHT LRFD.

Based on the strength testing of two salvaged double-tee girders, the following conclusions can be drawn:

- The first flexural crack in the stem of the 50-ft (15.24-m) girder was observed at 24.9 kips (110.7 kN), which was 35% lower than the AASHTO Service I limit state. Furthermore, the 50-ft (15.24-m) girder load carrying capacity of 41.5 kips (184.5 kN) was 32% lower than the AASHTO Strength I Limit State. This girder failed in a brittle manner by the compressive failure of the flange concrete. All indicate that this girder was totally unsafe for service.
- The first flexural crack in the stem of the 30-ft (9.14-m) girder was observed at 15.3 kips (68.1 kN), which was 44% lower than the AASHTO Service I limit state. Furthermore, the 30-ft (9.14-m) girder load carrying capacity of 37.37 kips (166.2 kN) was 21% lower than the AASHTO Strength I Limit State. This girder failed in a ductile manner. However, it did not meet the AASHTO limit state requirements and it was not safe for service.

Based on the statistical, experimental, and analytical studies, a methodology is proposed in the next chapter for damaged double-tee bridges. In this method, the load rating can be performed similarly to the LRFR method that is currently used in practice. Nevertheless, it is recommended to modify the capacity (C) and live load components (LL and IM) of the load rating equation accounting for different damage types and condition states. Condition factors were proposed for all different double-tee sections that have been used in the state in the previous chapter.

11 RECOMMENDATION

Based on the findings of this study, the research team offers the following recommendations.

11.1 Recommendation 1: General

The guidelines as detailed in Appendix C should be adopted for the load rating of damaged double-tee girder bridges.

In general, the load rating of damaged double-tee girder bridges is performed similarly to the LRFR method, but the capacity and the live load parameters should be modified as recommended below.

11.2 Recommendation 2: Capacity Modification

The guidelines as detailed in Section C.2.2 of Appendix C should be adopted to modify the girder capacities accounting for different damage types and condition states.

The moment and shear capacities of a damaged double-tee girder at strength limit states should be reduced using the proposed condition factors (φ_c) for South Dakota double-tee sections. At service limit states, the bridge concrete and reinforcing steel mechanical properties as recommended should be used in the load rating equation.

11.3 Recommendation 3: Demand Modification

The guidelines as detailed in Section C.2.3 of Appendix C should be adopted to modify the live load parameters accounting for different girder-to-girder damage condition states.

If double-tee bridge has a longitudinal joint damage condition state 3 or less, the AASHTO LRFD can be simply followed to determine the live load parameters. Recommendations were provided for longitudinal joint damage condition state 4.

12 RESEARCH BENEFITS

Load rating of distressed bridges is challenging mainly because of a lack of information regarding the capacity and live load distribution of damaged components. Many of the 700 South Dakota in-service double-tee bridges are deteriorating. Furthermore, several damage types with different condition states have been reported for these bridges.

A methodology was proposed in this project to include various damage types and condition states in the double-tee girder load rating process. Recommendations and illustrations were provided to simplify the process. The proposed load rating method is believed to be practical and conservative. Accurate load rating of damaged double-tee girder bridges ultimately allow for the maximum use of existing structures while providing safe travel to the public and preserving the bridge investment.

13 REFERENCES

- AASHTO. (2011). "Manual for Bridge Evaluation (2nd Edition) with 2011, 2013, 2014, 2015 and 2016 Interim Revisions," American Association of State Highway and Transportation Officials (AASHTO), 820 pp.
- AASHTO. (2012). "AASHTO LRFD Bridge Design Specifications, 2012 Edition." American Association of State Highway and Transportation Officials (AASHTO), Washington, DC.
- AASHTO. (2013). "Manual for Bridge Element Inspection (1st Edition) with 2015 Interim Revisions," American Association of State Highway and Transportation Officials (AASHTO), 406 pp.
- AASHTO. (2014). "AASHTO LRFD Bridge Design Specifications (7th Edition) with 2015 and 2016 Interim Revisions," American Association of State Highway and Transportation Officials (AASHTO), 2160 pp.
- ASCE. (2017). "Infrastructure Report Card" 4 pp. Retrieved from <https://www.infrastructurereportcard.org/wp-content/uploads/2017/01/Bridges-Final.pdf>.
- ASTM C42 / C42-03 (2003). "Standard Test Method for Obtaining and Testing Drilled Cores and Sawed Beams of Concrete." ASTM International, West Conshohocken, PA.
- ASTM A615 / A615M-09b (2009). "Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement." ASTM International, West Conshohocken, PA.
- ASTM C39 / C39M-12 (2012). "Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens." ASTM International, West Conshohocken, PA.
- ASTM E8 / E8M-16a (2016). "Standard Test Methods for Tension Testing of Metallic Materials." ASTM International, West Conshohocken, PA, 2016.
- ASTM A416 / A416M-17 (2017). "Standard Specification for Low-Relaxation, Seven-Wire Steel Strand for Prestressed Concrete." ASTM International, West Conshohocken, PA.
- Bridge Inspector's Reference Manual. (2012). Federal Highway Administration and National Highway Institute, Report No. FHWA NHI 12-049, 2004 pp.
- Bohn, L., Tazarv, M., Wehbe, N. (2017) "Rehabilitation of Longitudinal Joints in Double-Tee Girder Bridges." South Dakota Department of Transportation and Mountain-Plains Consortium (MPC) – University Transportation Center (UTC), MPC Report No. XX, 107 pp.
- BSCM. (1998). "South Dakota Bridge System Code Manual," South Dakota Department of Transportation, 448 pp.
- Chajes, M.J., Shenton, H.W., and O'Shea, D. (2000). "Bridge-Condition Assessment and Load Rating Using Nondestructive Evaluation Methods." Journal of Transportation Research Board, Vol. 1696, pp. 83-91.
- Dasar, A., Irmawaty, R., Hamada, H., Sagawa, Y., and Yamamoto, D. (2016) "Prestress Loss and Bending Capacity of Pre-cracked 40 Year-Old PC Beams Exposed to Marine Environment," MATEC Web of Conferences, Vol. 47, p. 02008. EDP Sciences, 2016.

- Eder, R.W., Miller, R.A., Baseheart, T.M., and Swanson, J.A. (2005). "Testing of Two 50-Year-Old Precast Post-Tensioned Concrete Bridge Girders", *PCI Journal*, Vol. 50, pp. 90-95.
- FHWA-ABC. (2017). Federal Highway Administration – Accelerated Bridge Construction, Retrieved Sept. 28, 2017, from <https://www.fhwa.dot.gov/bridge/abc/>.
- Haley, J.S. (2011). "Climatology of Freeze-Thaw Days in the Conterminous United States: 1982-2009", MSc Thesis, Kent State University, 82 pp.
- Halsey, J.T., and Miller, R. (1996) "Destructive Testing of Two Forty-Year-Old Prestressed Concrete Bridge Beams", *PCI Journal*, Vol. 41, pp. 84-93.
- Hogan, L.S, Wotherspoon, L., Beskhyroun, S., and Ingham, J. (2016). "Dynamic Field Testing of a Three-Span Precast-Concrete Bridge." *Journal of Bridge Engineering*, Vol. 21, Issue 12.
- Hughs, E., and Idriss, R. (2006). "Live-Load Distribution Factors for Prestressed Concrete, Spread Box-Girder Bridge", *Journal of Bridge Engineering*, Vol. 11, No. 5, pp 573-581.
- Labia, Y., Saiidi, M.S., and Douglas, B. (1998). "Full Scale Testing and Analysis of 20-Year-Old Pretensioned Concrete Box Girders", *ACI Structural Journal*, Vol. 94, pp. 471-482.
- Mingo, M.J. (2016) "Precast Full-Depth Panels Supported on Inverted Bulb-Tee Bridge Girders", MS Thesis, South Dakota State University, Department of Civil and Environmental Engineering, Brookings, SD.
- Nowak, A.S, and Saraf, V.K. (1996). "Load Testing of Bridges", Michigan Department of Transportation, 144 pp.
- Osborn, G.P., Barr, P.J, Petty, D.A., Halling, M.W, and Brackus, T.R. (2012) "Residual Prestress Forces and Shear Capacity of Salvaged Prestressed Concrete Bridge Girders", *Journal of Bridge Engineering*, DOI. 10.1061/(ASCE) BE 1943-5592.0000212, 8 pp.
- Phares, B., Wipf, T., Klaiber, F.W., Hawsh, A.A, and Neubauer, S. (2005). "Implementation of Physical Testing for Typical Bridge Load and Superload Rating." *Journal of Transportation Research Board*, Vol. 11, pp. 159-167.
- Pessiki, S., Kaczinski, M, and Wescott, H.H. (1996) "Evaluatin of Effective Prestress Force in 28- Year- Old Prestressed Concrete Bridge Beams", *PCI Journal*, Vol. 41, pp. 78-89.
- Pettigrew, C.S, Barr, P.J., Maguire, M., and Halling, M.W. (2016) "Behavior of 48-Year Old Double-Tee Bridge Girders Made with Lightweight Concrete", *Journal of Bridge Engineering*, DOI: 10.1061/ (ASCE) BE.1943-5592.0000921, 11 pp.
- Qiao, L. (2012). "Structural Evaluation Methods on an Existing Concrete Bridge", *American Journal of Engineering and Technology Research*, Vol. 12, No. 2.
- Sanayei, M., Reiff, A.J., Brenner, B.R., and Imbaro, G.R. (2015). "Load Rating of a Fully Instrumented Bridge Comparison of LRFR Approaches", *Journal of Performance of Constructed Facilities*, Vol. 30, Issue 2.
- SAP2000 (2018). "Integrated Software for Structural Analysis and Design," Computer and Structure, Inc., Walnut Creek, CA.

- Schiff, S.D., Piccirilli, J.J., Iser, C.M, and Anderson, K.J. (2006). "Load Testing for Assessment and Rating of Highway Bridges", South Carolina Department of Transportation, 132 pp.
- Seo, J., Hosteng, T.K, Phares, B.M., and Wacker, J.P. (2015). "Live-Load Performance Evaluation of Historic Covered Timber Bridges in the Unites States." *Journal of Performance of Constructed Facilities*, Vol. 30, Issue 4.
- Setty, C.J. (2012). "Truck Testing and Load Rating of a Full-Scale 43-Year-Old Prestressed Concrete Adjacent Box Beam Bridge", MSc Thesis, Russ College of Engineering and Technology, Ohio University, Department of Civil Engineering, Ohio.
- Shenoy, C.V. and Frantz, G.C. (1991). "Structural Tests of 27-Year-Old Prestressed Concrete Bridge Beams", *PCI Journal*, Vol. 36, pp. 80-90.
- Suksawang, N., and Nassis, H.H. (2007). "Development of Live Load Distribution Factor Equation for Girder Bridges", *Journal of the Transportation Research Board*, pp. 9-18.
- Torres, V.J. (2016) "Live Load Testing and Analysis of a 48 Year - Old Double Tee Girder Bridge", MS Thesis, Utah State University, Civil and Environmental Engineering Department, Logan, Utah.
- Tazarv, M., Bohn, L., Wehbe, N. (2019). "Rehabilitation of Longitudinal Joints in Double-Tee Bridges," *Journal of Bridge Engineering*, ASCE, DOI: 10.1061/(ASCE)BE.1943-5592.0001412, 15 pp.
- Wehbe, N., Konrad, M., and Breyfogle, A. (2016). "Joint Detailing Between Double Tee Bridge Girders for Improved Serviceability and Strength." *Transportation Research Record: Journal of the Transportation Research Board*, No. 2592, Transportation Research Board of the National Academies, Washington, D.C. Retrieved from <https://trid.trb.org/view.aspx?id=1393072>.

APPENDIX A. PHOTOGRAPHS OF INSPECTED BRIDGES

Based on the double-tee bridge selection criteria (refer to Sec. 7.1), ten bridges were identified suitable for field testing. Each bridge was inspected by the research team and two bridges were selected for the testing. This appendix presents a summary of the 10-bridge inspection findings.

Table A.1 – Double-Tee Bridge Candidates for Field Testing

Bridge ID	County	Span Length and Depth	Damage Type and Condition State	Age, Yr.
31024230	Hanson, SD	40.8 ft (12.4 m) Seven 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Minor water leakage between deck units (with a condition state of Poor).	36
34075220	Hutchinson, SD	43 ft (13.1 m) Seven 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Light staining from leakage between longitudinal joints, spalling, and delamination. Only one longitudinal joint had water leakage after rain (with a condition state of Poor).	37
34140033	Hutchinson, SD	100 ft (30.5 m) 3 span Eight 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Severe water leakage between all longitudinal joints after rain with minor corrosion of steel plates (with a condition state of Poor).	39
42104110	Lincoln, SD	46 ft (14.02 m) Seven 30-in. (762-mm) Deep Girders	<i>Non-skewed, girders have transverse diaphragms,</i> Spalling of stem concrete cover (condition state not available), exposure of stem transverse reinforcement (with a condition state of Severe), and leakage of girder-to-girder joints (with a condition state of Poor).	35
42130065	Lincoln, SD	45.8 ft (13.9 m) Six 30-in. (762-mm) Deep Girders	<i>Non-skewed,</i> Spalling of both stem and flange concrete cover (with a condition state of Fair and Good, respectively), and leakage of girder-to-girder joints (with a condition state of Poor).	40
42165153	Lincoln, SD	42 ft (12.8 m) Seven 30-in. (762-mm) Deep Girders	<i>Non-skewed,</i> Spalling of stem concrete cover (with a condition state of Fair), and leakage of girder-to-girder joints (with a condition state of Poor).	34
51008010	Moody, SD	50 ft (15.24 m) Six 23-in (584-mm) Deep Girders	<i>Non-skewed,</i> Spalling with exposed rebar, efflorescence and water staining between the deck units due to leaking of the joints.	40
51090012	Moody, SD	50 ft (15.24 m) Eight 23-in. (584-mm) Deep Girders	<i>Non-skewed,</i> Water leakage between all deck units, stains from minor corrosion of steel plates in longitudinal joints (with a condition state of Poor), concrete spalling (with a condition state of Fair).	38
51140067	Moody, SD	51.2 ft (15.6 m) Seven 23-in. (584-mm) Deep Girders	<i>Skewed bridge, girders have transverse diaphragms,</i> Minor water leakage between deck units but with no sign of corrosion of steel plates (with a condition state of Poor).	8
51142060	Moody, SD	50 ft (15.24 m) Six 23-in. (584-mm) Deep Girders	<i>Posted bridge, non-skewed,</i> Staining and water leakage between the all deck units.	40

Note: The bridge age was by 2018.



(a) Top view of bridge



(b) Diaphragm at the exterior girder




(c) Leakage from joint



(d) Underneath of bridge



(e) Efflorescence in joint

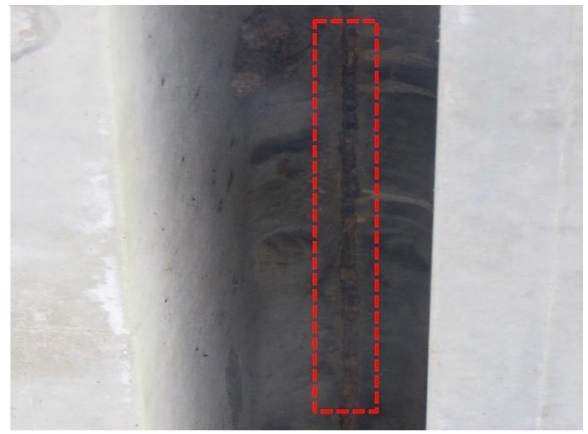

(f) Joint gap

Figure A.1 – Photographs of Bridge 31-024-230



(a) Top view of bridge



(b) Underneath of bridge




(c) Efflorescence in joint



(d) Deterioration at bottom of stem



(e) Scouring from bottom of abutment

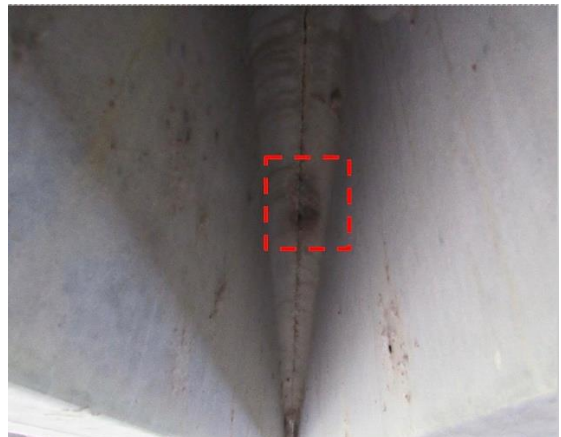

(f) Reddish color, sign of corrosion

Figure A.2 – Photographs of Bridge 34-075-220



(a) Side view of bridge



(b) Cracking on pavement over the bridge



(c) Underneath of bridge



(d) Leakage from joint



(e) Efflorescence



(f) Sign of corrosion


Figure A.3 – Photographs of Bridge 34-140-033



(a) Side view of bridge



(b) Cracking at bottom of exterior girder

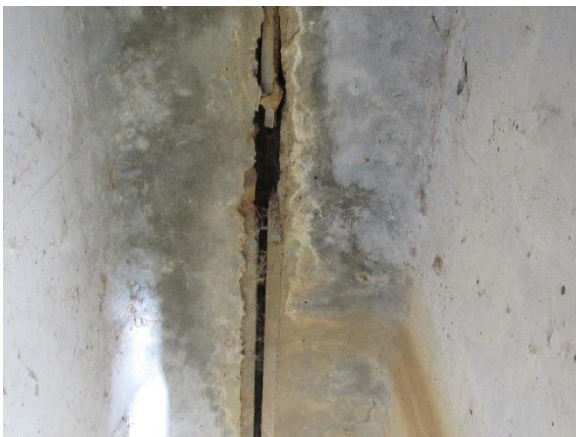

(c) Joint deterioration



(d) Efflorescence in joint



(e) Leakage from joint



(f) Underneath of bridge

Figure A.4 – Photographs of Bridge 42-104-110



(a) Side view of bridge



(b) Corrosion in joint



(c) Efflorescence in joint



(d) Cracking in diaphragm



(e) Deterioration in Joint



(f) Underneath of bridge

Figure A.5 – Photographs of Bridge 42-130-065



(a) Side view of bridge



(b) Spalling at stem of bridge



(c) Corrosion in the joint



(d) Scouring at abutment of bridge



(e) Underneath of bridge



(f) Leakage from joint

Figure A.6 – Photographs of Bridge 42-165-153



(a) Top of bridge



(b) Deterioration at side of bridge



(c) Underneath of bridge



(d) Deterioration at bottom of stem



(e) Efflorescence at joint



(f) Wide gap in joint

Figure A.7 – Photographs of bridge 51-008-010



(a) Top view of bridge




(b) Gap of joint



(c) Underneath of bridge



(d) Leakage from joint

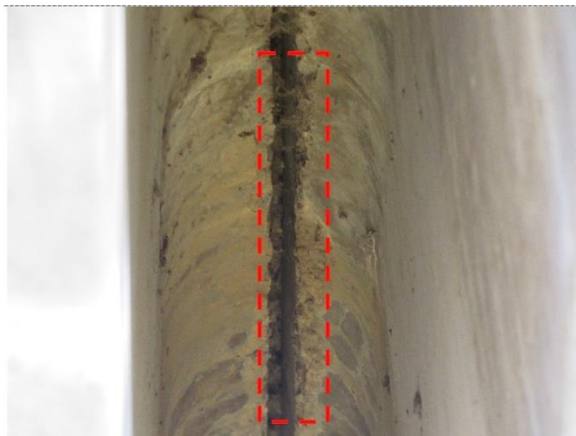

(e) Deterioration at joint



(f) Deterioration at bottom of stem


Figure A.8 – Photographs of Bridge 51-090-012



(a) Top of bridge



(b) Corrosion of plate of joint

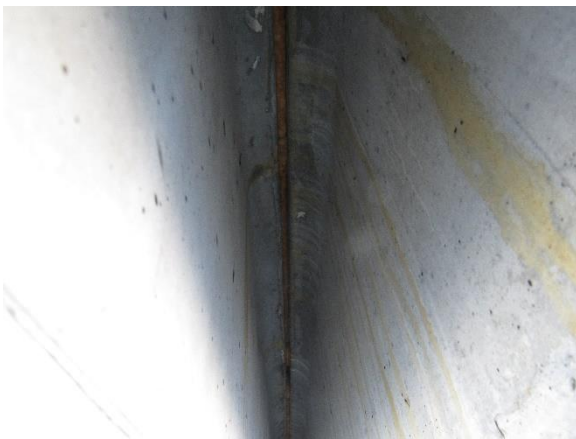

(c) Sign of leakage



(d) Underneath of bridge



(e) Efflorescence at joint



(f) Diaphragm in the girder

Figure A.9 – Photographs of Bridge 51-140-067




(a) Top view of bridge



(b) Underneath of bridge



(c) Wooden abutment

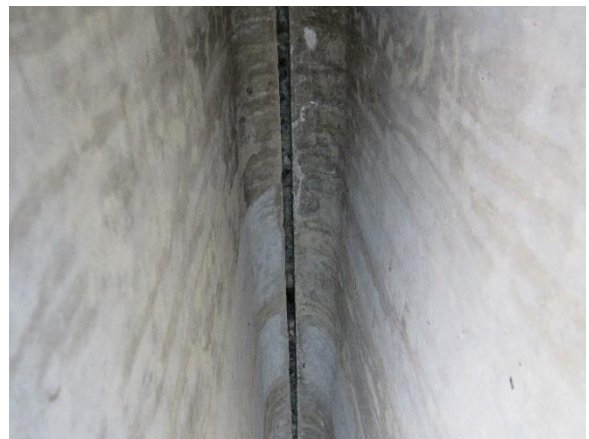

(d) Efflorescence in joint



(e) Posting of bridge



(f) Wooden diaphragm at end of girder

Figure A.10 – Photographs of Bridge 51-142-060

APPENDIX B. VERIFICATION OF PROPOSED CONDITION FACTORS

Appendix B presents a verification of the damaged double-tee girder capacity estimation using proposed damage condition factors. A 30-ft (9.14-m) damaged double-tee girder was tested to failure as part of this project. Table B.1 presents the description of the girder and Fig. B.1 shows the girder damage. Furthermore, the girder observed damage types and condition states were marked in Tables B.2 and B.3 using “golden stars”. The measured force capacity of the girder in a four-point loading configuration (Fig. B.1b) was 37.37 kips (166.2 kN).



(a) Underneath View of Girder



(b) Stem Cover Deterioration



(c) Reinforcement Exposure



(d) Flange Cover Deterioration

Figure B.1 – Damage of 30-ft (9.14-m) Salvaged Girder

Table B.1 – Description of 30-ft Girder

Girder Depth, in. (mm)	Girder Length, ft (m)	Damage Type and Condition State
23 (584)	30 (9.14)	Spalling of stem concrete cover (CS-4), exposure of stem transverse reinforcement (CS-3), flange cover deterioration (CS-4), exposure of flange rebar (CS-2) and cracking at stem and flange joint (CS-1).


Table B.2 – Damage Types and Condition States for Prestressed Double-Tee Girder Stem

Damage Type	Condition States CS1	Condition States CS2	Condition States CS3	Condition States CS4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion. ★
Exposed Transverse Rebar	None	Minor corrosion of the reinforcement with minimal section loss.	Severe corrosion of only one leg of transverse reinforcement. ★	Severe corrosion of all legs of transverse reinforcement in a section.
Exposed Longitudinal Prestressing	None	50% section loss due to corrosion in the extreme tendon.	100% section loss due to corrosion in the extreme tendon.	Section loss due to corrosion in the two or more tendons.
Cracking	Insignificant cracks or moderate-width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide. ★	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.

Table B.3 – Damage Types and Condition States for Prestressed Double-Tee Girder Top Flange

Damage Type	Condition States CS1	Condition States CS2	Condition States CS3	Condition States CS4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area/Aberration	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion. ★
Exposed Rebar	None	Minor corrosion of the outer layer of reinforcement with minimal section loss. ★	Severe corrosion of only the outer layer of reinforcement.	Severe corrosion of the outer and inner layers of reinforcement.
Cracking	Insignificant cracks or moderate width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.
Girder-to-Girder Longitudinal Joint Deterioration	None	Minimal deterioration, no sign of leakage.	Discrete signs of seepage along the joint, minor corrosion of steel plates. ★	Seepage along the joint, severe corrosion of steel plates.

This 23-in. (584-mm) deep girder was built before 2005 and it had four straight tendons per stem. The damage condition factors for this double-tee section are presented in Fig. B.2 (the same as those presented in Fig. 9.11 of Ch. 9).

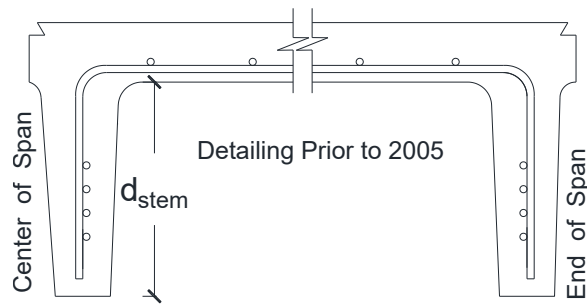

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 4 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Straight
 Transverse Bar size = No. 4 (13 mm)
 $f_c = 5$ ksi (34.5 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	Calculated Capacity	Calculated Capacity
	Good	Fair	Poor	Severe	M (k.ft)	P (kips)
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1★	422.5	67.81
Exposed Transverse Rebar	1	1★	1	1	422.5	67.81
Exposed Longitudinal Prestressing	1	0.85	0.70	0.45	N/A	N/A
Cracking	1	1★	1	1	422.5	67.81

Flange Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	Calculated Capacity	Calculated Capacity
	Good	Fair	Poor	Severe	M (k.ft)	P (k.ft)
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.66	0.56	0.46★	194.35	31.19
Exposed Rebar	0.46	0.46★	0.46	0.46	194.35	31.19
Cracking	1	1	1	1	N/A	N/A
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1	N/A	N/A

Stem Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	Calculated Capacity	Calculated Capacity
	Good	Fair	Poor	Severe	V (kips)	P (kips)

Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)	24.66	49.32
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50	52.84	105.68
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.95	0.90	N/A	N/A
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	N/A	N/A
Cracking on Single Stem		2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	N/A	N/A
Cracking on Single Stem		1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	1/3 top stem depth (1/3 d_{stem}) 0.35	24.66	49.32
Cracking on Both Stems	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	N/A	N/A
Cracking on Both Stems		2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	N/A	N/A
Cracking on Both Stems		1/3 bottom stem depth (1/3 d_{stem}) 0.0	1/3 bottom stem depth (1/3 d_{stem}) 0.0	1/3 bottom stem depth (1/3 d_{stem}) 0.0	N/A	N/A

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	Calculated Capacity	Calculated Capacity
	Good	Fair	Poor	Severe	V (kips)	P (kips)
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.75	52.84	105.6
Exposed Rebar	0.75	0.75	0.75	0.75	52.84	105.6
Cracking	1	1	1	1	N/A	N/A
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1	N/A	N/A

Figure B.2 – Condition Factors for 23-in. Deep 8-Straight Tendon Double-Tee Girders

The design concrete compressive strength for this girder extracted from the shop drawing was 5 ksi (34.5 Mpa). The measured concrete compressive strength for the girder flange was 1.92 ksi (13.24 MPa). Based on Section 9.5, the flange moment condition factors were modified and reported in Fig. B.2.

The undamaged moment and shear capacities for this girder were 422.5 kip-ft (572.83 kN-m) and 70.46 kips (313.4 kN), respectively. The damaged girder moment or shear capacity presented in Tables B.2 and B.3 was calculated by multiplying the undamaged capacity by its corresponding condition factor presented in the table. An applied load (P) equivalent to the moment or shear capacity was calculated using equations B.2 or B.3. Figure B.3 shows the test girder load configuration.

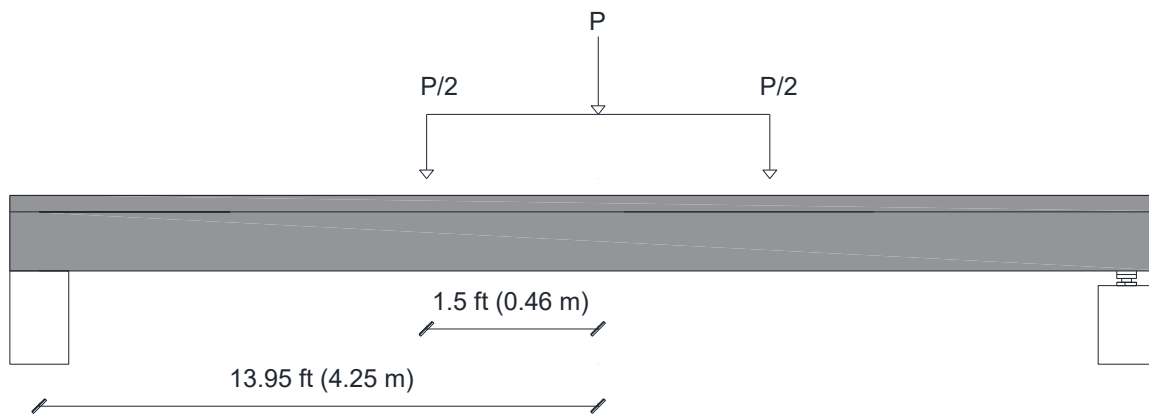


Figure B.3 – Applied Load Configuration for 30-ft Long Girder in Strength Test

The equivalent P where the moment is maximum is:

$$M = \frac{P}{2} * 13.95 - \frac{P}{2} * 1.5 \quad (k.ft) \quad (\text{Eq. B.1})$$

by rearranging the equation:

$$P = \frac{M}{6.23} \quad (kips) \quad (\text{Eq. B.2})$$

The equivalent P where the shear is maximum is:

$$V = \frac{P}{2} \quad (\text{Eq. B.3})$$

where,

P = The applied load

M = The calculated moment capacity

V = The calculated shear capacity

It can be seen that the minimum calculated P is 31.19 kips (138.7 kN), which is 16% lower than the measured P of 37.37 kips (166.2 kN). The proposed method indicates that the girder will fail in flexure. The actual girder also failed in flexure. Overall, it can be inferred that the proposed condition factor method is a simple and safe method of estimation of damaged girder capacities.

APPENDIX C. PROPOSED METHODOLOGY FOR LOAD RATING DAMAGED DOUBLE-TEE GIRDER BRIDGES

C.1 Current Load Rating Methods

The AASHTO Manual for Bridge Evaluation (2011) presents load rating, field testing, and posting methods for existing bridges. This manual allows three load rating methods: (1) Load and Resistance Factor Rating (LRFR), (2) Load Factor Rating (LFR), and (3) Allowable Stress. All three methods are currently used to comment whether an existing bridge will be safe and serviceable under a specific live load. Since LRFR is consistent with the current AASHTO LRFD Bridge Design Specifications (2016), the research team proposed to use only LRFR in this project, which was approved by the project technical panel.

LRFR is carried out for three levels of live load: (i) design live load (HL-93), (ii) legal live load (for a given truck allowed by AASHTO or a state DOT), and (iii) permit loads, which are higher than legal loads. In addition to live loads, knowledge of dead loads, wearing surface loads, permanent loads, and dynamic loads are needed in LRFR. A bridge “rating factor (RF)” based on the LRFR method can be calculated as:

$$RF = \frac{C - (\gamma_{DC})DC - (\gamma_{DW})(DW) \pm (\gamma_P)(P)}{(\gamma_{LL})(LL + IM)} \quad (\text{Eq. C.1})$$

where C is the member capacity (e.g. shear and flexural capacities for Service and Strength Limit States), γ_{DC} is the LRFD load factor for structural components and attachments, DC is the dead load effect due to structural components and attachments, γ_{DW} is the LRFD load factor for wearing surfaces and utilities, DW is the dead load effect due to wearing surfaces and utilities, γ_P is the LRFD load factor for permanent loads other than dead loads, P is the permanent load effect other than dead loads, γ_{LL} is the evaluation live load factor, LL is the live load effect, and IM is the dynamic load allowance. The AASHTO Manual for Bridge Evaluation (2015) provides load factors for different limit states for the three live load levels discussed above.

The member capacity (C) is calculated based on the ultimate capacities under Strength Limit State as

$$C = \varphi_c \cdot \varphi_s \cdot \varphi \cdot R_n \quad (\text{Eq. C.2})$$

where φ_c is the condition factor, φ_s is the system factor, φ is the LRFD resistance factor, and R_n is the nominal member resistance. For Service Limit State,

$$C = f_R \quad (\text{Eq. C.3})$$

where f_R is the allowable stresses.

Load rating of a bridge is done using the rating factor equation (Eq. C.1). If RF is greater than 1.0, no restrictive posting is necessary but if it is less than 1.0, posting for that bridge is required.

C.2 Proposed Load Rating Methodology for Damaged Double-Tee Girder Bridges Located in South Dakota

Load rating of damaged double-tee girder bridges may be performed similarly to the LRFR method, which currently is used in practice. Nevertheless, it is recommended to modify the capacity (C) and live load components (LL and IM) of the load rating equation (Eq. C.1) accounting for different damage types and condition states.

C.2.1 Data Needed for Successful Load Rating Damaged Double-Tee Bridges

Before performing the load rating, the inspector or the bridge engineer should identify all damage types, their condition states, and the damage location, and should determine the sectional properties (girder length, girder depth, girder width, number of tendons per stem, number and size of transverse reinforcement, and material properties) of girders of the bridge to be load rated.

Review of available drawings and reports revealed that 23 different double-tee sections have been incorporated in South Dakota bridges. The sectional and material properties for these girders can be found in Fig. 9.10 to 9.32. In a case where the load rating bridge girder sectional properties do not match with those in any of the 23 sections, use the condition factors for a section with the same girder depth and the closest number of tendons per stem.

C.2.2 Modification of Damaged Girder Capacities (C)

The moment and shear capacities of a damaged double-tee girder at strength limit states should be reduced using the proposed condition factors (φ_c in Fig. 9.10 to 9.32) for South Dakota double-tee sections as:

$$C_{damaged} = \varphi_c \cdot C_{undamaged} \quad (\text{Eq. C.4})$$

where

$$C_{undamaged} = \varphi_s \cdot \varphi \cdot R_n \quad (\text{Eq. C.5})$$

All other parameters and methods remain the same as those specified in the AASHTO Manual for Bridge Evaluation (2011 or succeeding).

If the mechanical properties of the load rating bridge constitutive materials are unknown, use the values and methods specified in the AASHTO Manual for Bridge Evaluation (Sec. 6A.5, 2011 or succeeding).

The condition factors should be reduced per Sec. 9.5 of the present document when the concrete compressive strength for the load rating bridge is lower than that specified by the manufacturer for the girders (indicated in Fig. 9.10 to 9.32).

At service limit states, the bridge concrete and reinforcing steel mechanical properties as discussed above should be used in the load rating equation.

C.2.3 Modification of Damaged Girder Live Load Parameters


The live load parameters of the load rating equation should be modified for a damaged double-tee girder as:

1. To calculate moment or shear girder distribution factors (GDFs) for a South Dakota double-tee girder bridge with a longitudinal joint damage condition state 3 or less, follow the AASHTO LRFD specifications.
2. To calculate moment or shear GDFs for a South Dakota double-tee girder bridge with a longitudinal joint damage condition state 4, GDF is the greater of (a) the factor for the exterior girders, (b) the factor for the interior girders, and (c) 0.6.
3. To calculate the dynamic load allowance (IM), follow the AASHTO LRFD specifications.


APPENDIX D. LOAD RATING EXAMPLE FOR DAMAGE DOUBLE-TEE GIRDER BRIDGE

D.1 Introduction

Bridge 52-308-298 is a single span 46-year old structure with a span length of 50 ft (15.24 m). The bridge is non-skewed, and all girders have a depth of 23 in. (584 mm). The bridge is located in Pennington County, SD on Johnson Siding, SD (Fig. D.1). Figure D.2 shows the photographs of the bridge, and Fig D.3 shows the damage of the bridge. The inspection report and photographs were provided by Brosz Engineering, Inc.

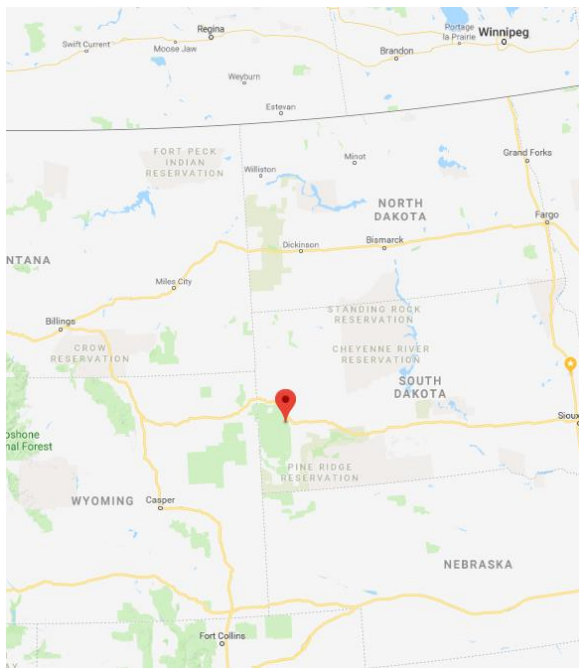

(a) Bridge Location in the State of South Dakota

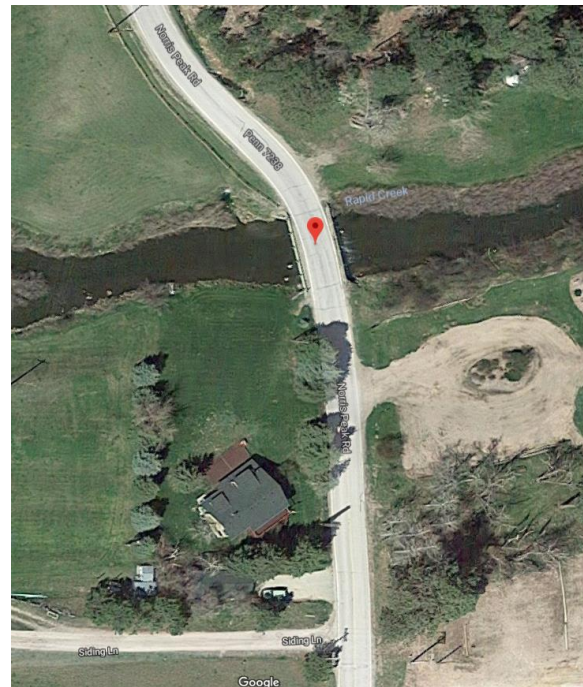

(b) Aerial View

Figure D.1 – Location of Bridge 52-308-298



(a) South Approach



(b) North Approach



(c) Upstream Looking East



(d) Downstream Looking West

Figure D.2 – Photographs of the Bridge



(a) Deterioration of Concrete on Top of East Deck Unit



(b) Deterioration of Concrete on Top of West Deck Unit



(c) Deterioration of West Side of West Deck Unit



(d) Longitudinal Cracking and Severe Efflorescence- North End of Deck Unit 1



(d) Longitudinal Cracking and Severe Efflorescence- North End of Deck Unit 1



(e) Spall with Prestressing Strand Exposed – South End of East Stem of Deck Unit 3

Figure D.3 – Damages of Bridge 52-308-298



(f) Spall with Prestressing Strand Exposed – South End of East Stem of Deck Unit 6



(g) Spall with Prestressing Strand Exposed – South End of East Stem of Deck Unit 7



(h) Spall with Exposed Rebar Near Post 4 – Deck Unit 7



(i) Spall Near Rail Post 5 – Deck Unit 7



(k) Spall in North Backwall with Exposed Rebar Beneath Deck Unit 7

Figure D.3 - Continued

D.2 Bridge Geometry and Component Properties

The bridge girder detailing was not available. However, using the 23 sections found for double-tee girders and based on the year of construction and the span length (Appendix E), it was determined that the girders should have seven tendons per stem, which were harped at a distance of 0.2L from each end of the girder. The prestressing steel for these girder were assumed to be uncoated seven-wire ($A_{sp} = 0.196 \text{ in}^2$ [126 mm²]) low-relaxation strands meeting the ASTM A416 requirements. Table D.1 presents the strand specified mechanical properties according to ASTM A416.

Table D.1 –Specified Mechanical Properties for Prestressing Strands

Properties	0.5-in. (12.7) Strands (ASTM A416)
Yield Strength, f_y , ksi (MPa)	258 (1779)
Ultimate Strength, f_u , ksi (MPa)	285 (1965)
Strain at Break	7.4%
Modulus of Elasticity, E , ksi (MPa)	29000 (200000)

According to the shop drawing of a similar double-tee girder, transverse and longitudinal reinforcing steel bars should meet the requirements of ASTM A615 Grade 60. Similarly, the concrete compressive strength should be 5.5 ksi (34.5 MPa).

D.3 Undamaged Double-Tee Girders

The girder sectional properties, dead loads, live loads, and the capacity of the undamaged girder are discussed herein.

D.3.1 Section Properties

46 in. × 23 in. double-tee girder

$$A = 377 \text{ in}^2$$

$$I_x = 16084 \text{ in}^4$$

$$S_{\text{bot}} = 933.49 \text{ in}^3$$

$$S_{\text{top}} = 2787.5 \text{ in}^3$$

D.3.2 Dead Load Analysis

$$\text{Density of concrete} = 0.15 \text{ kip/ft}^3$$

$$\text{Beam self-weight} = 0.39 \text{ kip/ft}$$

$$\text{Railing} = 0.003 \text{ kip/ft}$$

$$\text{Total DC} = 0.393 \text{ kip/ft}$$

$$M_{\text{DC}} = 122.8 \text{ kip-ft}$$

$$V_{\text{DC}} = 9.825 \text{ kips}$$

$$\text{Wearing surface} = 0.09 \text{ kip/ft}$$

$$M_{\text{DW}} = 28.125 \text{ kip-ft}$$

$$V_{\text{DW}} = 2.25 \text{ kips}$$

D.3.3 Live Load Analysis

This section presents the shear and moment girder distribution factors for the external and internal bridge girders. Calculations are based on Table 4.6.2.2b-1 of AASHTO LRFD Bridge Design Specifications, 6th Edition.

Table D.2 – Girder Distribution Factor (GDF)

Lane	Shear GDF		Moment GDF	
	Exterior Girder	Interior Girder	Exterior Girder	Interior Girder
One Lane Loaded	0.49	0.49	0.49	0.35
Two or More Lanes Loaded	0.39	0.49	0.37	0.38
Governing GDF	0.39	0.49	0.37	0.38

D.3.4 Capacity of Undamaged Girders

The moment capacity of the undamaged girder calculated using Eq. 8.2 at the midspan is 1052.3 kip-ft and the shear capacity calculated using Eq. 8.6 at near to support is 58.11 kips.

D.4 Damaged Double-Tee Girders

This section presents the type and location of the damage per girder, condition factors and girder capacities, and other factors that are needed to complete the load rating for the damaged bridge.

D.4.1 Condition Factors for Damaged Girders

Tables D.3 and D.4 present a summary of damage type and location for an external and internal girder, respectively. The damage of the girders was shown in Fig. D.3. The selected external and internal girders had more damage than other girders. The girder damage types and condition states were identified using the proposed definitions for double-tee girders as marked in Tables D.5 through D.8 with golden stars.

Table D.3 – Damage of 50-ft External Girder (52-308-298)

Component	Damage Type	Damage Location	Condition State
Stem of Girder	Cover Damage	0.2L	4 (Table D.5)
Stem of Girder	Exposed Transverse Rebar	0.2L	2 (Table D.5)
Stem of Girder	Exposed Longitudinal Prestressing	0.0L	2 (Table D.5)
Stem of Girder	Cracking (Both Stem)	0.5L	2 (Table D.5)
Flange of Girder	Cracking	0.25L	2 (Table D.6)
Flange of Girder	Cover Damage	0.5L	4 (Table D.6)
Girder to Girder Joint	Longitudinal Joint Deterioration	0.0L	2 (Table D.6)

Note: *L* is the bridge span length measured from the south end support toward north.

Table D.4 – Damage of 50-ft Internal Girder (52-308-298)

Component	Damage Type	Damage Location	Condition State
Stem of Girder	Cover Damage	0.0L	4 (Table D.7)
Stem of Girder	Exposed Longitudinal Prestressing	0.0L	2 (Table D.7)
Stem of Girder	Cracking (Both Stem)	0.6L	2 (Table D.7)
Girder to Girder Joint	Longitudinal Joint Deterioration	0.0L	2 (Table D.8)

Note: *L* is the bridge span length measured from the south end support toward north

Table D.5 – Damage Types and Condition States for External Prestressed Double-Tee Girder Stem





Damage Type	Damage Type CS-1	Damage Type CS-2	Damage Type CS-3	Damage Type CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion. 
Exposed Transverse Rebar	None	Minor corrosion of the reinforcement with minimal section loss. 	Severe corrosion of only one leg of transverse reinforcement.	Severe corrosion of all legs of transverse reinforcement in a section.
Exposed Longitudinal Prestressing	None	50% section loss due to corrosion in the extreme tendon. 	100% section loss due to corrosion in the extreme tendon.	Section loss due to corrosion in the two or more tendons.
Cracking	Insignificant cracks or moderate-width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide. 	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.

Table D.6 – Damage Types and Condition States for External Prestressed Double-Tee Girder Top Flange




Damage Type	Damage Type CS-1	Damage Type CS-2	Damage Type CS-3	Damage Type CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area/Aberration	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion. 
Exposed Rebar	None	Minor corrosion of the outer layer of reinforcement with minimal section loss.	Severe corrosion of only the outer layer of reinforcement.	Severe corrosion of the outer and inner layers of reinforcement.
Cracking	Insignificant cracks or moderate width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide. 	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.
Girder-to-Girder Longitudinal Joint Deterioration	None	Minimal deterioration, no sign of leakage. 	Discrete signs of seepage along the joint, minor corrosion of steel plates.	Seepage along the joint, severe corrosion of steel plates.

Table D.7 – Damage Types and Condition States for Internal Prestressed Double-Tee Girder Stem





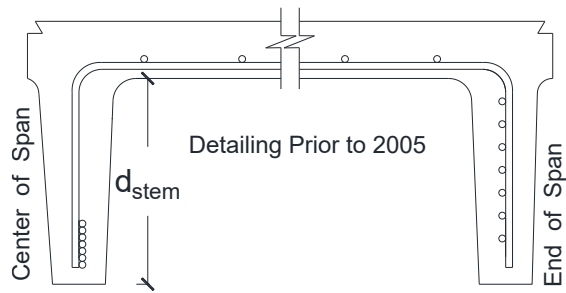
Damage Type	Damage Type CS-1	Damage Type CS-2	Damage Type CS-3	Damage Type CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/Spall/Patched Area	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.	Exposure of reinforcement without any sign of corrosion. 
Exposed Transverse Rebar	None	Minor corrosion of the reinforcement with minimal section loss.	Severe corrosion of only one leg of transverse reinforcement.	Severe corrosion of all legs of transverse reinforcement in a section.
Exposed Longitudinal Prestressing	None	50% section loss due to corrosion in the extreme tendon. 	100% section loss due to corrosion in the extreme tendon.	Section loss due to corrosion in the two or more tendons.
Cracking	Insignificant cracks or moderate-width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide. 	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.

Table D.8 – Damage Types and Condition States for Internal Prestressed Double-Tee Girder Top Flange

Damage Type	Condition States CS-1	Condition States CS-2	C Condition States S-3	Condition States CS-4
	Good	Fair	Poor	Severe
	Cover Deterioration including Delamination/Spall/Patched Area/Aberration	None	Loss of 1/3 of the cover without exposure or corrosion of reinforcement.	Loss of 2/3 of the cover without exposure or corrosion of reinforcement.
Exposed Rebar	None	Minor corrosion of the outer layer of reinforcement with minimal section loss.	Severe corrosion of only the outer layer of reinforcement.	Severe corrosion of the outer and inner layers of reinforcement.
Cracking	Insignificant cracks or moderate width cracks that have been sealed.	Unsealed moderate width cracks or unsealed moderate pattern (map) cracking. Cracks from 0.004 to 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking. Cracks greater than 0.009 inches wide.	Wide cracks or heavy pattern (map) cracking that crosses multiple shear reinforcement.
Girder-to-Girder Longitudinal Joint Deterioration	None	Minimal deterioration, no sign of leakage. 	Discrete signs of seepage along the joint, minor corrosion of steel plates.	Seepage along the joint, severe corrosion of steel plates.

This 23-in. (584-mm) deep girders were built before 2005. As discussed in the previous section, these girders most likely had seven tendons per stem based on the year of construction and span length. The moment and shear damage condition factors for the external and internal double-tee girders are presented in Fig. D.4 and D.5, respectively.



Stem Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders




Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.70
Exposed Rebar	0.70	0.70	0.65	0.65
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)

Exposed Transverse Rebar ^(b)	1	0.85 	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95 	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45
Cracking on Both Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Both Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth  (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders




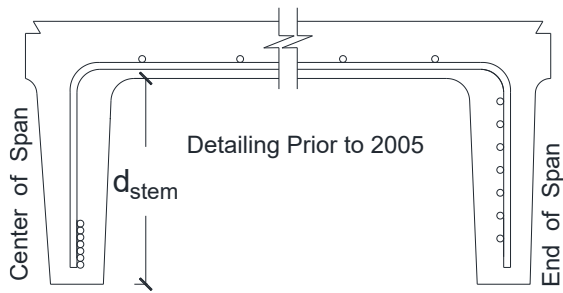
Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70 
Exposed Rebar	0.70	0.70	0.70	0.70
Cracking	1	1 	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1 	1	1

Figure D.4 – Condition Factors for 23-in. Deep 14-Harped Tendon External Double-Tee Girder (Pre 2005)



Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 7 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f'_c = 5.5$ ksi (37.9 Mpa)
 $f'_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1
Exposed Transverse Rebar	1	1	1	1
Exposed Longitudinal Prestressing	1	0.90	0.85	0.70
Cracking	1	1	1	1

Flange Moment Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85	0.70
Exposed Rebar	0.70	0.70	0.65	0.65
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Stem Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a)

Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50
Exposed Longitudinal Prestressing ^(b)	1	0.95	0.90	0.85
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40
Cracking on Both Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 14-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States
	CS-1	CS-2	CS-3	CS-4
	Good	Fair	Poor	Severe
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70
Exposed Rebar	0.70	0.70	0.70	0.70
Cracking	1	1	1	1
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1

Figure D.5 – Condition Factors for 23-in. Deep 14-Harped Tendon Internal Double-Tee Girder (Pre 2005)

D.4.2 Dead Load Analysis


Dead load of both damaged and undamaged girders are the same.

D.4.3 Live Load Analysis

The condition state for the girder-to-girder longitudinal joint damage is less than 4. Therefore, the live load distribution factors for the damaged girders remain the same as those for the undamaged girders.

D.4.4 Capacity of Damaged Girders

The moment and shear capacities of the damaged girders are calculated by multiplying the capacity of the undamaged girder by the corresponding condition factors as shown in Figures D.6 and D.7.

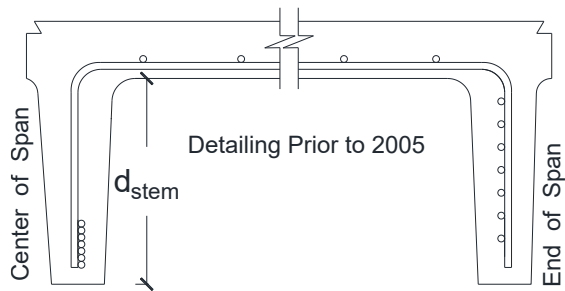

Depth = 23 in. (584 mm)
 Width = 46 in. (1168 mm)
 No. of Tendons = 7 per stem
 Tendon Diameter = 0.5 in. (13 mm)
 Tendon Profile = Harped at 0.2L
 Transverse Bar size = No. 4 (13 mm)
 $f_c = 5.5$ ksi (37.9 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
 Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States	M (k.ft)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1 ⭐	1052.3
Exposed Transverse Rebar	1	1 ⭐	1	1	1052.3
Exposed Longitudinal Prestressing	1	0.90 ⭐	0.85	0.70	947.07
Cracking	1	1 ⭐	1	1	1052.3

Flange Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States	M (k.ft)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.85 ⭐	0.70 ⭐	$0.7 \times 1052.3 = 736.61$
Exposed Rebar	0.70	0.70	0.65	0.65	N/A
Cracking	1	1 ⭐	1	1	1052.3
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1	1052.3

Stem Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States	V (kips)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a) ★	See Cracking
Exposed Transverse Rebar ^(b)	1	0.85 ★	0.75	0.50	$0.85 \times 58.11 = 49.39$
Exposed Longitudinal Prestressing ^(b)	1	0.95 ★	0.90 ★	0.85 ★	$0.95 \times 58.11 = 55.2$
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	N/A
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	N/A
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	N/A
Cracking on Both Stems	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	N/A
Cracking on Both Stems	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	N/A
Cracking on Both Stems	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0 ★	$0. \times 58.11 = 0$

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").


(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States	Condition States	Condition States	Condition States	V (kips)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70 ★	$0.7 \times 58.11 = 40.68$

Exposed Rebar	0.70	0.70	0.70	0.70	N/A
Cracking	1	1 ☆	1	1	58.11
Girder-to-Girder Longitudinal Joint Deterioration	1	1 ☆	1	1	58.11

Figure D.6 – Condition Factors for 23-in. Deep 8-Straight Tendon External Double-Tee Girders (Pre 2005)

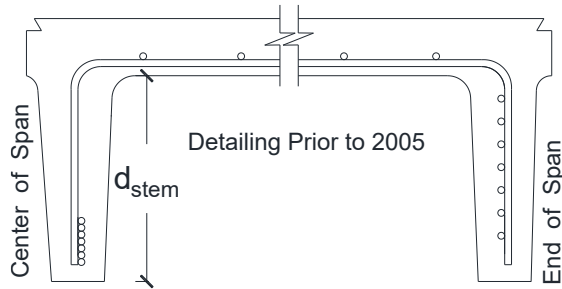

Depth = 23 in. (584 mm)
Width = 46 in. (1168 mm)
No. of Tendons = 7 per stem
Tendon Diameter = 0.5 in. (13 mm)
Tendon Profile = Harped at 0.2L
Transverse Bar size = No. 4 (13 mm)
 $f_c = 5.5$ ksi (37.9 Mpa)
 $f_y = 60$ ksi (413.7 Mpa)
Initial Tendon Force = 28.91 kips (128.6 kN)

Stem Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	M (k.ft)
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	1	1 ☆	1052.3
Exposed Transverse Rebar	1	1	1	1	N/A
Exposed Longitudinal Prestressing	1	0.9 ☆	0.85	0.70	$0.9 \times 1052.3 = 894.46$
Cracking	1	1 ☆	1	1	1052.3

Flange Moment Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Condition States CS-1	Condition States CS-2	Condition States CS-3	Condition States CS-4	M (k.ft)
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90 ☆	0.85	0.70	N/A
Exposed Rebar	0.70	0.70	0.65	0.65	N/A
Cracking	1	1	1	1	N/A
Girder-to-Girder Longitudinal Joint Deterioration	1	1	1	1	1052.3

Stem Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Conditions States	Conditions States	Conditions States	Conditions States	V (kips)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area	1	1	0.95	Use C.F. for Cracking ^(a) ★	See Cracking
Exposed Transverse Rebar ^(b)	1	0.85	0.75	0.50	N/A
Exposed Longitudinal Prestressing ^(b)	1	0.95 ★	0.90 ★	0.85 ★	$0.95 \times 58.11 = 55.2$
Cracking on Single Stem	1	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	1/3 bottom stem depth (1/3 d_{stem}) 0.70	N/A
Cracking on Single Stem	1	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	2/3 bottom stem depth (2/3 d_{stem}) 0.45	N/A
Cracking on Single Stem	1	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	1/3 top stem depth (1/3 d_{stem}) 0.40	N/A
Cracking on Both Stems	1	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	1/3 bottom stem depth (1/3 d_{stem}) 0.45	N/A
Cracking on Both Stems	1	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	2/3 bottom stem depth (2/3 d_{stem}) 0.0	N/A
Cracking on Both Stems	1	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0	1/3 top stem depth (1/3 d_{stem}) 0.0 ★	$0. \times 58.11 = 0$

Note: (a) This is the same as cracking (e.g., if cover deteriorates at the bottom 1/3 of one stem, use the first row in "Cracking on Single Stem").

(b) Assuming the cover deterioration is minimal (CS-1). Otherwise, cover deterioration will automatically govern.

Flange Shear Condition Factors for 23-in. Deep 8-Tendon Double-Tee Girders

Damage Type	Conditions States	Conditions States	Conditions States	Conditions States	V (kips)
	CS-1	CS-2	CS-3	CS-4	
	Good	Fair	Poor	Severe	
Cover Deterioration including Delamination/ Spall/ Patched Area/ Aberration	1	0.90	0.80	0.70	N/A

Exposed Rebar	0.70	0.70	0.70	0.70	N/A
Cracking	1	1	1	1	N/A
Girder-to-Girder Longitudinal Joint Deterioration	1	1	★	1	58.11

Figure D.7 – Condition Factors for 23-in. Deep 8-Straight Tendon Internal Double-Tee Girders (Pre 2005)

D.5 Load Rating of Damaged Double-Tee Bridge

The bridge “rating factor (RF)” based on the LRFR method can be calculated as:

$$RF = \frac{C - (\gamma_{DC})DC - (\gamma_{DW})(DW) \pm (\gamma_P)(P)}{(\gamma_{LL})(LL + IM)} \quad (\text{Eq. D.1})$$

where C is the member capacity (e.g. shear and flexural capacities for Service and Strength Limit States), γ_{DC} is the LRFD load factor for structural components and attachments, DC is the dead load effect due to structural components and attachments, γ_{DW} is the LRFD load factor for wearing surfaces and utilities, DW is the dead load effect due to wearing surfaces and utilities, γ_P is the LRFD load factor for permanent loads other than dead loads, P is the permanent load effect other than dead loads, γ_{LL} is the evaluation live load factor, LL is the live load effect, and IM is the dynamic load allowance. The AASHTO Manual for Bridge Evaluation (2015) provides load factors for different limit states for the three live load levels discussed above.

Based on the proposed load rating method (Appendix C), the moment and shear capacities of a damaged double-tee girder at strength limit states should be reduced using the proposed condition factors (ϕ_c) for South Dakota double-tee sections as:

$$C_{damaged} = \phi_c \cdot C_{undamaged} \quad (\text{Eq. D.1})$$

where

$$C_{undamaged} = \phi_s \cdot \phi \cdot R_n \quad (\text{Eq. D.2})$$

All other parameters and methods remain the same as those specified in the AASHTO Manual for Bridge Evaluation (2011 or succeeding).

For Service Limit State,

$$C = f_R \quad (\text{Eq. D.3})$$

where f_R is the allowable stresses.

D.5.1 Evaluation Factors for Strength Limit States

Resistance factors:

$\phi = 1.0$ for flexure

Condition factors

$\emptyset_c =$ Figures 4 & 5

System factor

$\emptyset_s = 1.0$

Table D.9 - Strength I limit state

Load	Inventory	Operating
DC	1.25	1.25
DW	1.5	1.5
LL+IM	1.75	1.35

Inventory equation for Strength I Limit State

$$RF = \frac{(\phi_c)(\phi_s)(\phi)R_n - (Y_{DC})(DC) - (Y_{DW})(DW)}{(Y_L)(LL + IM)} \quad (\text{Eq. D.4})$$

Operating Equation

$$RF = (\text{Inventory } RF) * \frac{1.75}{1.35} \quad (\text{Eq. D.5})$$

Service III Limit State for Inventory Level

$$RF = \frac{f_R - Y_d f_D}{Y_L (f_{LL+IM})} \quad (\text{Eq. D.6})$$

D.6 Summary of Load Rating

Table D.10 presents a summary of the input parameter used in the calculation of rating factors. Rating factors for the moment capacity under strength I and service III limit state and the shear capacity under strength I limit state were calculated using Eq. D.4 to D.6. and were summarized in Tables D.11 and D.12.

Table D.10 Input Parameters for Calculation of Rating Factors

	Limit State				
	Strength I	Strength I	Strength I	Strength I	Service III
Parameters	Flexure	Flexure	Shear	Shear	Flexure
	Inventory	Operating	Inventory	Operating	Inventory
ϕ_c	0.7	N/A	0	N/A	N/A
ϕ_s	1	N/A	1	N/A	N/A
ϕ	1	N/A	1	N/A	N/A
R_n	1052.3 kip.ft	N/A	58.1 kips	N/A	N/A
Y_{DC}	1.25	N/A	1.25	N/A	N/A
DC	122.8 kip.ft	N/A	9.825 kips	N/A	N/A
Y_{DW}	1.25	N/A		N/A	N/A
DW	28.125 kip.ft	N/A	2.25 kips	N/A	N/A
Y_L	1.75	N/A	1.75	N/A	N/A
$IM + LL$	393.36 kip.ft	N/A	28.73 kips	N/A	N/A
f_R	N/A	N/A	N/A	N/A	6.63 kips
Y_d	N/A	N/A	N/A	N/A	1
f_D	N/A	N/A	N/A	N/A	1.93 ksi
f_{LL+IM}	N/A	N/A	N/A	N/A	5.05 ksi

Table D.11 – Summary of Rating Factors – Exterior Girder

Limit State	Limit State	Design Load Rating	Design Load Rating
		Inventory	Operating
Strength I	Flexure	0.78	1.01
Strength I	Shear	0.	0.
Service II	Flexure	1.16	N/A

Table D.12 – Summary of Rating Factors – Internal Girder

Limit State	Limit State	Design Load Rating	Design Load Rating
		Inventory	Operating
Strength I	Flexure	1.02	1.32
Strength I	Shear	0.	0.
Service II	Flexure	1.16	N/A

