

Radar-Camera Infrastructure for Automotive Safety

Swarun Kumar (PI) (https://orcid.org/0000-0002-5398-5347)

FINAL REPORT

August 5, 2024

DISCLAIMER

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. This document is disseminated in the interest of information exchange. The report is funded, partially or entirely, under [grant number 69A3552344811] from the U.S. Department of Transportation's University Transportation Centers Program. The U.S. Government assumes no liability for the contents or use thereof.

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.	
N/A			
4. Title and Subtitle		5. Report Date	
Radar-Camera Infrastructure for Automotive Safety		Aug 5, 2024	
		6. Performing Organization Code	
		CMU	
7. Author(s)		8. Performing Organization Report	
Swarun Kumar, Ph.D., https://orcid.org/0000-0002-5398-5347		No.	
		N/A	
9. Performing Organization Name and Address		10. Work Unit No.	
CMU, 5000 Forbes Ave Pittsburgh PA 15213			
		11. Contract or Grant No.	
		Federal Grant No. 69A3552344811	
12. Sponsoring Agency Name and Address		13. Type of Report and Period	
Safety21 University Transportation Center		Covered	
Carnegie Mellon University		Final Report (July 1, 2023-June 30,	
5000 Forbes Avenue		2024)	
Pittsburgh, PA 15213		14. Sponsoring Agency Code	
		USDOT	
other visual sensing systems. We spee deployed in cars as collision sensors, insight is that both the mmWave rada offers extremely high depth-resolutio imaging, its spatial resolution is extre	on imaging system despite obstruc4ons cifically focus on single-chip automo4v yet are extremely compact – merely ce r and camera have complementary stree n (centimeter-scale at even hundreds of emely poor (several degrees). Our work l platform, coupled with visual sensing	ve mmWave radars that are widely ntimeters across. Our key technical ngths. While the mmWave radar f meters) and through-occlusion explores mechanisms to achieve high	
17 Key Words	18 Distrib	ution Statement	

		18. Distribution Statement No restrictions.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 4	22. Price

Form DOT F 1700.7 (8-72)

Reproduction of completed page authorized

Radar-Camera Infrastructure for Automotive Safety

Swarun Kumar, Carnegie Mellon University


Annual Project Report

Problem

This project develops a high-resolution imaging system despite obstructions using a mmWave radar coupled with other visual sensing systems. We specifically focus on single-chip automotive mmWave radars that are widely deployed in cars as collision sensors, yet are extremely compact – merely centimeters across. Our key technical insight is that both the mmWave radar and camera have complementary strengths. While the mmWave radar offers extremely high depth-resolution (centimeter-scale at even hundreds of meters) and through-occlusion imaging, its spatial resolution is extremely poor (several degrees). Our work explores mechanisms to achieve high resolution radar on a single combined platform, coupled with visual sensing and a variety of signal processing and learning strategies.

Approach

Through the project, we developed a novel framework that exploits multi-bounce scattering to enable mmWave sensing of objects that are not directly illuminated by the radar, and hence not are detected by conventional single-bounce methods. An example scenario is depicted below, where only the sofa is directly illuminated by the radar and hence is detected via single-bounce, but all other objects (dining furniture, trashcan and behind-radar human) are not detected. In the sequel, we refer to all objects not directly illuminated by the radar as *beyond field-of-view* objects, since they lie outside the radar's field-of-view (FoV), i.e., transmit beam. misses all other objects beyond the system's single-bounce field-of-view (FoV).




Methodology

As a key intermediate step towards solving the first challenge, we mathematically model diffuse multi-bounce scattering from objects. Our modeling insights lead to a matched filtering algorithm that directly localizes objects to their ground-truth locations along specific multi-bounce paths, without requiring any explicit ``ghost'' detection and remapping. To solve the second challenge, we propose to perform matched filtering and object detection separately & sequentially along single-, double- and triple-bounce. For each multi-bounce order, object detection is

performed via a custom ordered statistics constant false alarm rate detector (OS-CFAR) and objects detected in lower multi-bounce orders are used as anchors to localize objects in undetected regions of the environment with higher-order multi-bounce. For example, in the context of the above Figure, the sofa is first localized via singlebounce, and subsequently treated as a source of further double-bounce to localize the dining furniture. The process is then extended to sense the behind-radar human and occluded trashcan via triple-bounce paths. We do not utilize fourth- and higher-order bounces since empirically we find the power of such paths too low to exploit.

Findings

We implement our system on a commercial digital mmWave multiple-input multiple-output (MIMO) radar testbed (TI AWR2243 cascade radar) and extensively evaluate its performance in five different indoor and outdoor scenarios, and exploit multi-bounce paths from a wide variety of everyday objects and surfaces, including human bodies, indoor furniture, and extended room and building features. We demonstrate that even with no prior knowledge of the environment, modeling and exploiting double-bounce and triple-bounce paths can improve the median localization error for human targets standing outside the radar's field-of-view by 2-10x over traditional single-bounce methods. The detailed results of our solution are to appear in *ACM MobiCom 2024*, a major international conference.

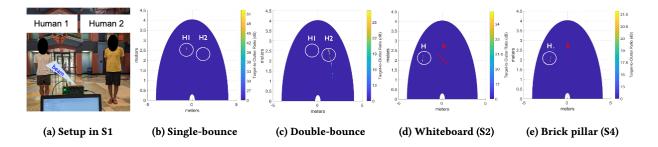

Conclusions

We present the design and evaluation of a framework that uses multi-bounce scattering to enable beyond-field-ofview sensing with a single mmWave radar without prior knowledge of the environment. Our implementation on a commercial MIMO radar demonstrated the possibility of localizing humans outside the transmit beam, behind-theradar and around-corners, with 2-10x improvement in the median localization error in real-world scenarios even with no prior knowledge of the environment.

Recommendations developed from the project

We demonstrate through Hydra that even with no prior knowledge of the environment, modeling and exploiting double-bounce and triple-bounce paths can improve the median localization error for human targets standing outside a radar's field-of-view. The project work therefore demonstrates the value of a combination of radar signal processing, machine learning and hardware design to improve resolution and performance.

Disclaimer

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the information presented herein. This document is disseminated in the interest of information exchange. The report is funded, partially or entirely, by a grant from the U.S. Department of Transportation's University Transportation Centers Program. However, the U.S. Government assumes no liability for the contents or use thereof.