



FEDERAL TRANSIT ADMINISTRATION

User Guide: Transit Bus Electrification Tool version 1.1

December 2024



U.S. Department of Transportation
Federal Transit Administration

Notice

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the objective of this report.

REPORT DOCUMENTATION PAGE			<i>Form Approved</i> <i>OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE December 2024		3. REPORT TYPE AND DATES COVERED User Guide
4. TITLE AND SUBTITLE User Guide: Transit Bus Electrification Tool version 1.1			5a. FUNDING NUMBERS 69319521N200016	
6. AUTHOR(S) Gina Filosa, Billy Chupp, Carson Poe, and Abigail Raymond			5b. CONTRACT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Department of Transportation John A Volpe National Transportation Systems Center 55 Broadway Cambridge, MA 02142-1093			8. PERFORMING ORGANIZATION REPORT NUMBER DOT-VNTSC-FTA-25-02	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) US Department of Transportation Federal Transit Administration Office of Environmental Programs 1200 New Jersey Avenue, SE Washington, DC 20590			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES Project Manager: Alex Brun				
12a. DISTRIBUTION/AVAILABILITY STATEMENT This document is available to the public on the FTA website at https://www.transit.dot.gov/regulations-and-programs/environmental-programs/climate-considerations			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The Transit Bus Electrification Tool is a Microsoft Excel-based spreadsheet tool that allows users to estimate the partial lifecycle greenhouse gas emission savings associated with replacing standard bus fleets with low-emission or zero-emission transit buses.				
14. SUBJECT TERMS Greenhouse gas emissions, bus electrification			15. NUMBER OF PAGES 9	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT Unlimited	

CONTENTS

1	Introduction.....	1
2	Getting Started.....	2
3	Add or Modify a Scenario Component.....	3
	Step 1: Select the “Add New Scenario” button.....	3
	Step 2: Select Electricity Generation Mix by Region	3
	Step 3: Enter Data for Baseline Fleet and Replacement Scenario (Future Bus Fleet).....	4
	Step 4: Calculate Results.....	6
	Step 5: Save Scenario.....	6
4	Compare Scenarios	7
5	Data Sources and Data Limitations	8

FIGURES

Figure 1: Electricity Regions.....	4
Figure 2: Baseline And Replacement Scenario Inputs Table	4
Figure 3: Annual Fleet VMT Data Entry Example.....	6
Figure 4: VMT By Bus Entry Example.....	6
Figure 5: Scenario comparison example	7

TABLES

Table 1: GREET Vehicle Type.....	8
Table 2: GHG Emission Factors.....	8

1 Introduction

The Transit Bus Electrification Tool is a Microsoft Excel-based spreadsheet that allows users to estimate the partial lifecycle greenhouse gas (GHG) emissions savings associated with replacing standard bus fleets with low-emission or zero-emission transit buses.

The tool includes two components:

- The **“Add or Modify Scenario” Module**: Allows the user enters information on the annual vehicle miles traveled by fuel-type for the existing bus fleet and a replacement scenario fleet to calculate the change in emissions for a single scenario. Section 3 of this User Guide provides detailed instructions on using the module.
- The **“Compare Scenarios” Module**: Allows the user to compare the GHG emissions savings across multiple replacement scenarios created in the Add or Modify Scenario Module. Section 4 of this User Guide provides detailed instructions on using the module.

In 2024, FTA updated the Transit Bus Electrification Tool to align with updated GHG emission factors. The GHG emissions in Transit Bus Electrification Tool version 1.1 are derived from the Argonne National Laboratory’s Greenhouse Gases, Regulated Emissions, and Energy use in Transportation (GREET) Model, 2023 release (April 30, 2024).¹

Detailed information on the emissions factors used in the Transit Bus Electrification Tool version 1.1 is provided in Section 5.

¹ The emission factors in the previous version of the Transit Bus Electrification Tool (version 1.0) were derived from the GREET Model, 2021 release (October 11, 2021).

2 Getting Started


When opening the tool for the first time a user will need to enable macros. If an “Enable Content” Security Warning appears, click the “Enable Content” button. If the Security Warning does not appear when the tool is first opened, it may be necessary to change the security settings for macros. To change the setting, first exit out of the tool and re-launch Microsoft Excel without opening the Estimator Tool. Next, click on the Microsoft Excel icon or File menu in the top left of the screen. Scroll to the bottom of the menu and select the “Excel Options” button to the right of the main menu. When the Excel Options box appears, select “Trust Center” in left hand menu of the box. Next, click the gray “Trust Center Settings” button. When the Trust Center options box appears, click “Macro Settings” in the left-hand menu and select “Disable all macros with notification.” Once the security level has been adjusted, open the tool and enable macros as described above.

3 Add or Modify a Scenario Component

The “Add or Modify Scenario” component allows users to estimate the partial lifecycle GHG emissions savings associated with replacing standard bus fleets with low-emission or zero-emission transit buses. The user will enter data for the existing bus fleet and a replacement scenario fleet, and the tool will calculate the change in emissions for the scenario. The user can save a scenario and then compare it to other scenarios the user creates using the “Compare Scenarios” component.

Step 1: Select the “Add New Scenario” button

On the “Add or Modify Scenario” tab, select the “1. Add New Scenario” button. On the first use of the tool you will receive the following message:

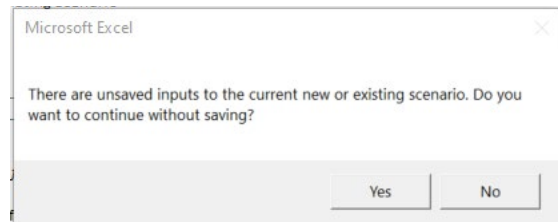

Click Yes. You will then be prompted to enter a name for the new scenario into the text field. Click OK.


Note: In addition to adding a new scenario from scratch, users can choose a saved scenario from the drop-down menu and select the “Copy Scenario” button. The user will be prompted to enter a name from the new scenario. The user will then modify the inputs, as needed, and save the new scenario.

Step 2: Select Electricity Generation Mix by Region

Select the applicable electricity generation mix by region from the corresponding drop-down menu. The tool allows the user to choose:

- The “US Mix,” which represents the average electricity generation mix for the country;
- Regional electricity generation mix based on the North Atlantic Reliability Corporation (NERC) region, which reflects more region-specific electricity generation information. Refer to the map of NERC regions (see Figure 1) to identify the applicable region;
- 100%-renewable energy, which should be used in cases where the electricity used to charge the vehicle is entirely from renewable energy sources.

FIGURE 1: ELECTRICITY REGIONS

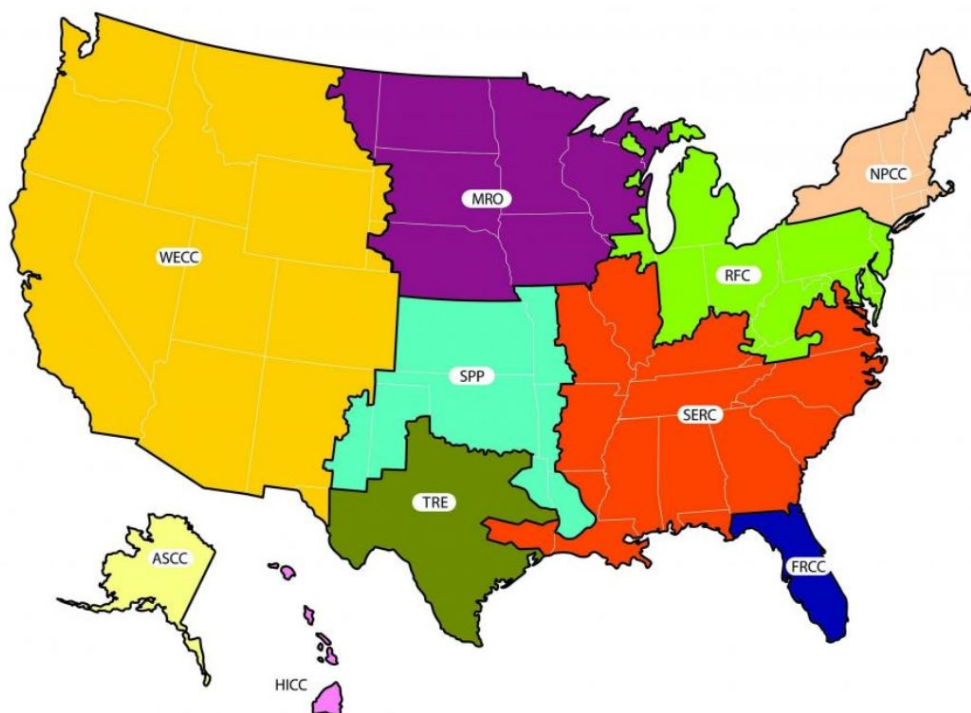

Source: GREET 2023

Step 3: Enter Data for Baseline Fleet and Replacement Scenario (Future Bus Fleet)

Input the annual activity data (i.e., vehicle miles traveled) for the existing bus and the replacement scenario fleets by vehicle fuel-type. Users can enter the activity data by either 1) number of buses and average VMT per bus *OR* 2) annual VMT for the entire bus fleet of the fuel type(s) of choice.

FIGURE 2: BASELINE AND REPLACEMENT SCENARIO INPUTS TABLE

Fuel Type	Activity Input Type	Baseline: Existing Bus Fleet			Replacement Scenario: Future Bus Fleet		
		Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT	Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT

For each row in the Baseline and Replacement Scenario Inputs table enter the following information:

- **Select Fuel Type:** From the drop-down menu select the fleet's fuel type:
 - Compressed Natural Gas (CNG)
 - Diesel
 - Hybrid Diesel

- Gas
- Hydrogen Fuel Cell
- Electric
- Liquefied Natural Gas (LNG)
- **Select Activity Input Type:** From the drop-down menu select how activity data will be entered:
 - VMT by Bus: User will be prompted to enter the number of buses and the average annual VMT per bus.
 - Annual Fleet VMT: User will be prompted to enter the annual VMT for the fleet of buses of the chosen fuel type.
- **Enter Activity Data for Baseline Fleet.** Users enter the activity data for the existing bus fleet. The [National Transit Database \(NTD\)](#) is one source for agency-specific data for the existing bus fleet. Two useful NTD data reports are:
 - Fuel and Energy Table: The Fuel and Energy NTD Report provides information on the total number of vehicles operated in maximum service (VOMS) broken down by fuel/propulsion type and the total annual vehicle miles traveled for each fleet type.²
 - Annual Database Vehicle Revenue Inventory: The Annual Database Revenue Vehicle Inventory contains more granular information on revenue vehicles by mode and type of service (TOS) and provides data on total miles for active vehicles during the reporting period. This dataset may be useful for agencies seeking to model replacing a subset of their fleet, such as older vehicles.³
- **Enter Activity Data for Replacement Scenario.** User will enter the activity data for the fuel-based fleet under the replacement scenario/future condition. See the Example Data Entry section below for an example data entry of a replacement scenario.
- Continue to add rows to the table until the agency's fleet for each different fuel type is fully represented.

Example Data Entry

In this example, the agency's existing bus fleet includes both diesel and CNG buses. The agency is considering replacing half of its diesel bus fleet with new electric buses. The agency does not plan to make any changes to its CNG bus fleet. In Example A, the user has chosen to enter data on the VMT for the annual fleet. In Example B, the user has chosen to enter data on the average annual VMT per bus.

Example A: Annual Fleet VMT Data Entry Option

The agency's current fleet of diesel buses has an annual fleet VMT of 560,000 miles. In this example, the agency does not plan to make any changes to the overall VMT of its fleet and thus the VMT used for the existing baseline fleet and the replacement scenario future bus fleet will be the same. Under the replacement scenario, half of the diesel fleet (and by default half of the fleet VMT) will be replaced with

² The 2023 Fuel and Energy Report is available at <https://www.transit.dot.gov/ntd/data-product/2023-fuel-and-energy>

³ The 2023 Annual Database Revenue Vehicle Inventory is available at <https://www.transit.dot.gov/ntd/data-product/2023-annual-database-revenue-vehicle-inventory>

electric vehicles. Under the replacement scenario section, the VMT for the diesel fleet is reduced by half (to 280,000 miles), and the annual VMT for the electric fleet is increased by 280,000 miles. Since the agency does not plan to make any changes to its CNG bus fleet, (in terms of number of buses and per-bus VMT), the annual VMT for the CNG fleet is the same for the baseline and replacement scenario. See Figure 3.

FIGURE 3: ANNUAL FLEET VMT DATA ENTRY EXAMPLE

Fuel Type	Activity Input Type	Baseline: Existing Bus Fleet			Replacement Scenario: Future Bus Fleet		
		Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT	Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT
Diesel	Annual Fleet VMT			560,000			280,000
CNG	Annual Fleet VMT			250,000			250,000
Electric	Annual Fleet VMT			0			280,000

Example B: VMT By Bus Data Entry Option

In Example B, the user has chosen to enter data on the average annual VMT per bus. The agency's current fleet of diesel buses includes 25 buses that travel an average of 22,400 miles annually. Under the replacement scenario, the agency plans to replace 13 of the diesel buses with new electric buses. Under the replacement scenario section, the number of diesel buses is reduced by 13 (to 12 buses), and the number of electric buses is increased by 13. The agency assumes that both the diesel and new electric buses will continue to operate 22,400 miles per year. Since the agency does not plan to make any changes to its CNG bus fleet (in terms of number of buses and per-bus VMT), the number of buses and average annual VMT per CNG bus is the same for the baseline and replacement scenario. See Figure 4.

FIGURE 4: VMT BY BUS ENTRY EXAMPLE

Fuel Type	Activity Input Type	Baseline: Existing Bus Fleet			Replacement Scenario: Future Bus Fleet		
		Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT	Number of Buses	Average Annual VMT Per Bus	Annual Fleet VMT
Diesel	VMT By Bus	25	22,400		12	22,400	
CNG	VMT By Bus	20	12,500		20	12,500	
Electric	VMT By Bus	0	0		13	22,400	

Step 4: Calculate Results

Once all inputs associated with the replacement scenario click the "2. Calculate Results" button. The tool will generate estimates of the GHG emissions for the baseline fleet and the replacement scenario fleet in metric tons of carbon dioxide equivalent (MTCO₂eq). The results section calculates the total change and percent change in GHG emissions between the baseline and replacement scenario. A negative number/percentage indicates that the replacement scenario would be expected to reduce GHG emissions, while a positive number indicates the that the replacement scenario would be expected to increase GHG emissions.

Step 5: Save Scenario

Press the "3. Save Scenario" button to save the scenario. Saving a scenario will allow the user to view this scenario in comparison with other saved scenarios on the "Compare Scenarios" tab.

4 Compare Scenarios

The “Compare Scenarios” tab allows a user to compare the GHG emissions savings across multiple replacement scenarios.

To compare scenarios, a user will select a saved scenario from the scenario name drop-down menu. The tool will populate the fleet VMT and total GHG emissions for the baseline fleet and the replacement scenario and tabulate the change in VMT and change in annual GHG emissions (see Figure 5).

The user can continue to add scenarios to the table by selecting a saved scenario from the scenario name drop-down menu. The user can sum the results for the selected scenarios by selecting yes from the drop-down menu below the scenario comparison table.

To remove a scenario from the comparison table, click on the scenario name is press the delete button.

FIGURE 5: SCENARIO COMPARISON EXAMPLE

Select scenarios to compare using the drop down menu below.

Scenario Name	Baseline: Existing Bus Fleet		Replacement Scenario: Future Bus Fleet		Change in VMT (Before-After, miles)	Annual Change in GHG Emissions (MTCO2eq)	Annual Percent Change in GHG Emissions
	Total Fleet VMT (miles)	Total GHG Emissions (MTCO2eq)	Total Fleet VMT (miles)	Total GHG Emissions (MTCO2eq)			
25% Scenario	10,000,000	19,540.0	10,000,000	17,255.0	0	-2,285.0	-11.69%
50% Scenario	10,000,000	19,540.0	10,000,000	14,970.0	0	-4,570.0	-23.39%

Sum results for all selected scenarios?

	Baseline: Existing Bus Fleet		Replacement Scenario: Future Bus Fleet		Total Change in VMT (Before-After, miles)	Total Change in GHG Emissions (MTCO2eq)	Percent Change in Total GHG Emissions
	Total Fleet VMT (miles)	Total GHG Emissions (MTCO2eq)	Total Fleet VMT (miles)	Total GHG Emissions (MTCO2eq)			
Totals for all scenarios	20,000,000	39,080	20,000,000	32,225	0	-6,855	-18%

5 Data Sources and Data Limitations

5.1 Built-In Emissions Factors

The Transit Bus Electrification Tool version 1.1 uses the upstream and downstream⁴ GHG emissions factors listed in Table 2 to generate the GHG emissions by bus fuel source. These factors are derived from the Argonne National Laboratory's Greenhouse Gases, Regulated Emissions, and Energy use in Transportation (GREET) Model, 2023 release (April 30, 2024). The vehicles included in the Bus Transit Electrification Tool version 1.1 map to GREET vehicle types as summarized in Table 1. The bus emission data is based on a 40-foot bus.

TABLE 1: GREET VEHICLE TYPE

ESTIMATOR VEHICLE TYPE	GREET2023 VEHICLE
Diesel bus	CIDI Transit Bus: Conventional and LS Diesel
CNG bus	SI Transit Bus: CNG, NA NG
LNG bus	SI Transit Bus: LNG, NA NG
Hybrid diesel bus	Grid-Independent CIDI Hybrid Transit Bus: Conventional and LS Diesel
Gas bus	SI: Medium Heavy-Duty Vocational Vehicle: Low-Level EtOH Blend with Gasoline ⁵
Hydrogen Fuel Cell bus	Fuel-Cell Vehicle: G.H2, Central Plants, NA NG
Electric bus	Transit Bus, Electricity

The GREET model includes GHG emissions from the electric generation mixes for the national averaged electricity generation mix and for each major region, as defined by the North American Electric Reliability Corporation (NERC). NERC divides the North America electric utility system into eight major regions – Florida Reliability Coordinating Council (FRCC), Midwest Reliability Organization (MRO), Northeast Power Coordinating Council (NPCC), Reliability First Corporation (RFC), SERC Reliability Corporation (SERC), Southwest Power Pool, RE (SPP), Texas Reliability Entity (TRE), and Western Electricity Coordinating Council (WECC). Other than these regions, electric generation mixes for Hawaii (HICC) and Alaska (ASCC) are also included in GREET.⁶

The GHG emissions factors are based solely on VMT by vehicle and fuel type and do not account for additional location specific factors such as different fleet mixes, vehicle age distributions, load factors, and speed profiles.

TABLE 2: GHG EMISSION FACTORS

Fuel Type	GHG EMISSIONS		
	Upstream Emissions	Downstream Emissions	Total Emissions
Diesel	0.00028	0.00138	0.00166
CNG	0.00036	0.00128	0.00164
LNG	0.00041	0.00129	0.00170

⁴ During the operations phase, upstream emissions are associated with the extraction, production, and transportation of the vehicle fuel; downstream emissions are the tailpipe emissions resulting from the operation of the bus.

⁵ Emission factors for gas buses are from GREET Model, 2020 release. The 2023 version for GREET does not include data for gasoline-powered buses.

⁶ Argonne National Laboratory. December 2023. Summary of Expansions and Updates in GREET® 2023. <https://greet.anl.gov/files/greet-2023-summary>

Fuel Type	GHG EMISSIONS		
	Upstream Emissions	Downstream Emissions	Total Emissions
HYBRID DIESEL	0.00027	0.00131	0.00158
GAS	0.00023	0.00098	0.00121
HYDROGEN FUEL CELL	0.00097	0.00000	0.00097
ELECTRIC - US MIX	0.00098	0.00000	0.00098
ELECTRIC - ASCC	0.00136	0.00000	0.00136
ELECTRIC - FRCC	0.00108	0.00000	0.00108
ELECTRIC - HICC	0.00196	0.00000	0.00196
ELECTRIC - MRO	0.00133	0.00000	0.00133
ELECTRIC - NPCC	0.00064	0.00000	0.00064
ELECTRIC - RFC	0.00099	0.00000	0.00099
ELECTRIC - SERC	0.00105	0.00000	0.00105
ELECTRIC - SPP	0.00095	0.00000	0.00095
ELECTRIC -TRE	0.00089	0.00000	0.00089
ELECTRIC -WECC	0.00078	0.00000	0.00078
ELECTRIC -100% renewable energy	0.00000	0.00000	0.00000

5.2 User-Supplied GHG Emissions Factors

In some cases, users may have access to transit bus GHG emissions factors that are applicable to their specific locality, bus fleet, or analysis years. Users can replace the emission factors in the “Bus GHG Emissions Data” tab in the tool with more location or fleet-specific GHG emissions factors. Users should update values in the “Total Emissions” column of the table only for fuel types for which they have more accurate data. All GHG emissions factors should be input in terms of MTCO₂eq per vehicle mile per year.

Location or fleet-specific GHG emissions factors may be available from several sources. Emissions models such as EPA’s Motor Vehicle Emissions Simulator (MOVES) ⁷ consider factors like vehicle model years, local meteorology, and local average roadway grade when estimating downstream emissions factors for many fuel types. Other sources include on-vehicle emissions testing, and local instead of national standards.

⁷ EPA, MOVES, <https://www.epa.gov/moves/latest-version-motor-vehicle-emission-simulator-moves>