

COPY 1  
CT  
85  
/10

DOT/FAA/CT-85/10  
Technical Center  
Atlantic City Airport,  
N.J. 08405

# KRASH 85 User's Guide — Input/Output Format

Max Gamon  
Gil Wittlin  
Bill LaBarge

Prepared by  
Lockheed-California Company  
Burbank, California

July 1985  
Final Report

This document is available to the U.S. public  
through the National Technical Information  
Service, Springfield, Virginia 22161.



U.S. Department of Transportation  
Federal Aviation Administration

#### NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturer's names appear herein solely because they are considered essential to the object of this report.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                      |                                                                                                                                                              |                                                                          |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------|
| 1. Report No.<br>DOT/FAA/CT-85/10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  | 2. Government Accession No.                          |                                                                                                                                                              | 3. Recipient's Catalog No.                                               |            |
| 4. Title and Subtitle<br><br>KRASH85 USER'S GUIDE - INPUT/OUTPUT FORMAT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |                                                      |                                                                                                                                                              | 5. Report Date<br>July 1985                                              |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                      |                                                                                                                                                              | 6. Performing Organization Code                                          |            |
| 7. Author(s)<br>M. A. Gamon, G. Wittlin, and W. L. LaBarge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |                                                      |                                                                                                                                                              | 8. Performing Organization Report No.<br>LR 30777                        |            |
| 9. Performing Organization Name and Address<br><br>Lockheed-California Company<br>Burbank, CA. 91520                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |                                                      |                                                                                                                                                              | 10. Work Unit No.                                                        |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                      |                                                                                                                                                              | 11. Contract or Grant No.<br>DTFA03-84-C-00004                           |            |
| 12. Sponsoring Agency Name and Address<br><br>U. S. Department of Transportation<br>Federal Aviation Administration, Technical Center<br>Atlantic City Airport, NJ 08405                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |                                                      |                                                                                                                                                              | 13. Type of Report and Period Covered<br>FINAL<br>Jan. 1984 - Sept. 1984 |            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                      |                                                                                                                                                              | 14. Sponsoring Agency Code                                               |            |
| 15. Supplementary Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |                                                      |                                                                                                                                                              |                                                                          |            |
| 16. Abstract<br><br>This document describes program KRASH as modified under Contract DTFA03-84-C-00004. The updated version is denoted KRASH85. This document is a User's Guide and defines the input and output formats appropriate for KRASH85.<br><br>Features that are incorporated into KRASH85 include: <ul style="list-style-type: none"> <li>• An improved plastic hinge moment algorithm</li> <li>• Gear-oleo metering pin coding</li> <li>• Load-interaction curves</li> <li>• An expanded initial conditions subroutine (combined with NASTRAN)</li> <li>• A comprehensive energy balance</li> <li>• Center of gravity (c.g.) displacement, velocity, acceleration and force time histories</li> <li>• Revised vertical beam orientation coding</li> <li>• Provision to save data for post-processing i.e., acceleration, mass location and forces</li> <li>• Provisions to input preprocessed data</li> <li>• A corrected uncoupled KR curve unloading/reloading algorithm</li> <li>• Provisions to define a tire spring (remains normal to the ground plane)</li> <li>• Provisions to number the masses to an arbitrary sequence</li> <li>• An option to compute section shear and moment distributions</li> </ul> |  |                                                      |                                                                                                                                                              |                                                                          |            |
| 17. Key Words (Suggested by Author(s))<br>computer program, KRASH, crash dynamics, nonlinear analysis, hybrid approach, aircraft, transport airplanes, general aviation aircraft, rotary wing aircraft, NASTRAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                      | 18. Distribution Statement<br>This document is available to the U.S. public through the National Technical Information Services, Springfield, Virginia 22161 |                                                                          |            |
| 19. Security Classif. (of this report)<br>UNCLASSIFIED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |  | 20. Security Classif. (of this page)<br>UNCLASSIFIED |                                                                                                                                                              | 21. No. of Pages<br>223                                                  | 22. Price* |

## FOREWORD

This report was prepared by the Lockheed-California Company under Contract DTFA03-84-C-00004. The report contains a description of the effort performed as part of Tasks II, III and IV and covers the period from January 1984 to September 1984. The work was administered under the direction of the Federal Aviation Administration with L. Neri acting as Technical monitor.

The program leader was Gil Wittlin of the Lockheed-California Company. M. A. Gamon and W. L. LaBarge of the Lockheed-California Company refined program KRASH. P. Rohrer of the Lockheed-California Company provided valuable computer programming support. The Lockheed effort was performed in the Flutter and Dynamics Department.

## TECHNICAL SUMMARY

This document describes program KRASH as modified under Contract DTFA03-84-C-00004. The updated version is denoted KRASH85. This document is a User's Guide and defines the input and output formats appropriate for KRASH85.

Features that are incorporated into KRASH85 include:

- An improved plastic hinge moment algorithm
- Gear-oleo metering pin coding
- Load-interaction curves
- An expanded initial conditions subroutine (combined with NASTRAN)
- A comprehensive energy balance
- Center of gravity (c.g.) displacement, velocity, acceleration and force time histories
- Revised vertical beam orientation coding
- Provision to save data for post-processing i.e., acceleration, mass location and forces
- Provisions to input preprocessed data
- A corrected uncoupled KR curve unloading/reloading algorithm
- Provisions to define a tire spring (remains normal to the ground plane)
- Provisions to number the masses in an arbitrary sequence
- An option to compute section shear and moment distributions

## TABLE OF CONTENTS

| Section                                                        | Page  |
|----------------------------------------------------------------|-------|
| FOREWORD                                                       | iii   |
| SUMMARY                                                        | v     |
| LIST OF FIGURES                                                | ix    |
| LIST OF TABLES                                                 | ix    |
| 1 INTRODUCTION                                                 | 1-1   |
| 2 USER'S GUIDE                                                 | 2-1   |
| 2.1 OVERALL KRASH85 ANALYSIS SYSTEM                            | 2-1   |
| 2.2 KRASH85 INPUT                                              | 2-8   |
| 2.3 OUTPUT AND SAMPLE CASE                                     | 2-93  |
| 2.3.1 KRASHIC Output                                           | 2-93  |
| 2.3.1.1 Echo of Input Data                                     | 2-93  |
| 2.3.1.2 Formatted Print-Out of Input Data                      | 2-94  |
| 2.3.1.3 Miscellaneous Calculated Data                          | 2-122 |
| 2.3.1.3.1 Model Parameters                                     | 2-123 |
| 2.3.1.3.2 Beam Loads and Deflections Corresponding to Yielding | 2-123 |
| 2.3.1.3.3 Overall Vehicle Forces/Accelerations at Time Zero    | 2-123 |
| 2.3.1.3.4 Individual Mass Forces/Accelerations At Time Zero    | 2-124 |
| 2.3.2 MSCTRAN Output                                           | 2-125 |
| 2.3.2.1 Executive Control Deck Echo                            | 2-125 |
| 2.3.2.2 Case Control Deck Echo                                 | 2-125 |
| 2.3.2.3 Input Bulk Data Deck Echo                              | 2-125 |
| 2.3.2.4 Sorted Bulk Data Deck Echo                             | 2-144 |
| 2.3.2.5 Displacement Vector                                    | 2-144 |
| 2.3.2.6 Load Vector                                            | 2-145 |

## TABLE OF CONTENTS

| Section   | Page                                           |
|-----------|------------------------------------------------|
| 2.3.2.7   | Forces of Single-Point Constraint 2-149        |
| 2.3.2.8   | Forces in Bar Elements 2-149                   |
| 2.3.2.9   | Element Strain Energies 2-150                  |
| 2.3.2.10  | Grid Point Force Balance 2-155                 |
| 2.3.3     | KRASH85 Output 2-155                           |
| 2.3.3.1   | Initial Output 2-155                           |
| 2.3.3.2   | Time History Output 2-164                      |
| 2.3.3.2.1 | Mass and Node Point Data 2-165                 |
| 2.3.3.2.2 | Internal Beam Data 2-177                       |
| 2.3.3.2.3 | External Spring Data 2-179                     |
| 2.3.3.2.4 | DRI and c.g. Velocity Data 2-179               |
| 2.3.3.2.5 | Energy Distribution Data 2-180                 |
| 2.3.3.2.6 | Internal Beam Stress Data 2-182                |
| 2.3.3.2.7 | Initial Mass Acceleration Error Output 2-183   |
| 2.3.3.3   | Summary Output 2-186                           |
| 2.3.3.4   | Time History Plots 2-200                       |
| 3.        | ADDITIONAL KRASH85 DATA REQUIREMENTS 3-1       |
| 3.1       | LOAD-INTERACTION CURVES 3-1                    |
| 3.2       | ARBITRARY MASS NUMBERING 3-6                   |
| 4.        | COMMON BLOCK REGIONS 4-1                       |
|           | REFERENCES R-1                                 |
|           | APPENDIX A-SHOCK STRUT ELEMENT DESCRIPTION A-1 |

## LIST OF FIGURES

| Figure |                                                                              | Page  |
|--------|------------------------------------------------------------------------------|-------|
| 2-1    | Overall KRASH85 Analysis System                                              | 2-3   |
| 2-2    | Sample KRASH85 Job Submittal                                                 | 2-5   |
| 2-3    | KRASH85 Input Format                                                         | 2-10  |
| 2-4    | KRASH85 Coordinate Systems                                                   | 2-19  |
| 2-5    | Beam Element Coordinate System Orientations                                  | 2-46  |
| 2-6    | Standard Nonlinear Beam Element Stiffness Reduction Curves                   | 2-61  |
| 2-7    | Large Transport Airplane Model - Sample Case                                 | 2-96  |
| 2-8    | Echo of the Input Data                                                       | 2-97  |
| 2-9    | Formatted Printout of Input Data                                             | 2-106 |
| 2-10   | Miscellaneous Calculated Data                                                | 2-126 |
| 2-11   | MSC/NASTRAN Executive and Case Control Decks                                 | 2-131 |
| 2-12   | MSC/NASTRAN Input Bulk Data Deck Echo                                        | 2-133 |
| 2-13   | MSC/NASTRAN Sorted Bulk Deck                                                 | 2-146 |
| 2-14   | MSC/NASTRAN Displacement Vector                                              | 2-147 |
| 2-15   | MSC/NASTRAN Load Vector                                                      | 2-148 |
| 2-16   | MSC/NASTRAN Single-Point Constraint Forces                                   | 2-151 |
| 2-17   | MSC/NASTRAN Bar Element Forces                                               | 2-152 |
| 2-18   | Bar Element Force Sign Conventions, NASTRAN and KRASH                        | 2-153 |
| 2-19   | MSC/NASTRAN Element Strain Energies                                          | 2-154 |
| 2-20   | MSC/NASTRAN Grid Point Force Balance                                         | 2-157 |
| 2-21   | KRASH85 Output, Initial Mass/Node Point Deflections                          | 2-158 |
| 2-22   | KRASH85 Output, Additional Miscellaneous Calculated Data                     | 2-160 |
| 2-23   | KRASH85 Time History Output                                                  | 2-166 |
| 2-24   | KRASH85 Internal Beam Stress Data and Initial Mass Acceleration Error Output | 2-184 |
| 2-25   | KRASH85 Summary Output Data                                                  | 2-188 |
| 2-26   | KRASH85 Sample Output Time History Plots                                     | 2-201 |

## LIST OF FIGURES

| Figure |                                                                   | Page |
|--------|-------------------------------------------------------------------|------|
| 3-1    | Maximum Allowable Moment and Shear Envelope -<br>Negative Bending | 3-2  |
| 3-2    | Typical Cross Section with Stiffener Locations -<br>Rear View     | 3-2  |
| 3-3    | Lockheed Load Sign Conventions                                    | 3-4  |

## LIST OF TABLES

| Table |                                                                    | Table |
|-------|--------------------------------------------------------------------|-------|
| 2-1   | KRASH85 Input Format Sequence                                      | 2-9   |
| 2-2   | Program Sizing Constants                                           | 2-23  |
| 2-3   | Standard Material Properties                                       | 2-47  |
| 2-4   | Relationship for Directional Moments and Input<br>Terms in KRASH85 | 2-51  |
| 2-5   | Shape Factors for Plastic Hinge Beams                              | 2-51  |
| 2-6   | Summary KRASH85 Output                                             | 2-93  |
| 4-1   | KRASH85 Subroutine/Common Region Reference                         | 4-2   |

## EXECUTIVE SUMMARY

Program KRASH, originally developed under Federal Aviation Administration sponsorship for predicting the response of general aviation airplanes to an impact environment, has been enhanced to include features that would facilitate the modeling of transport category airplanes. This document is the User's Guide which defines the input and output formats appropriate for this new version of Program KRASH known as KRASH 85.

## SECTION 1

### INTRODUCTION

Program KRASH, developed under a previous Federal Aviation Administration (FAA) sponsored contract DOT-FA75-WA3707 has been in the public domain since 1979. In subsequent years changes to enhance its usage have occurred. Recently, KRASH has been applied to modeling transport airplanes for impact conditions. Many of the recent program changes that have occurred are designed to facilitate modeling transport airplanes. The following modifications have been incorporated into KRASH85 and used recently to model transport category aircraft:

- Improved plastic hinge moment algorithm
- Gear oleo metering pin
- Load interaction curves
- Expanded Initial Condition Subroutine
- Arbitrary numbering of lumped mass points

Other modifications provide general enhancement capability and include:

- Comprehensive energy balance
- Computation of c.g. time histories
- Revised vertical beam orientation coding
- Post Processing of data, i.e., acceleration, mass location and forces
- Corrected uncoupled KR curve unloading/reloading algorithm

In addition, miscellaneous coding corrections have been made. The current version is denoted KRASH85.

This document is the User's Guide and is limited to a description of the input-output format for KRASH85.

## SECTION 2

### USER'S GUIDE

#### 2.1 OVERALL KRASH85 ANALYSIS SYSTEM

The overall KRASH85 analysis system consists of two separate KRASH programs called KRASHIC and KRASH85, plus a NASTRAN program denoted herein as MSCTRAN. The NASTRAN program used in this system is MSC/NASTRAN Version 63 (Aug 1, 1983). KRASHIC and MSCTRAN are used only if balanced initial conditions are required; KRASH85 is the normal KRASH time-history program. If KRASHIC and MSCTRAN are not used, then at time zero the beams in the analytical model will all have zero internal deflections and loads. The model will be located just above the ground and in the proper attitude, as specified in the input data. This initial balance is acceptable for certain types of problems, primarily those in which the aerodynamic loads on the vehicle are zero. For that situation, the lumped masses in the model are all accelerating downward at  $1g$  (free-falling), and the internal beam loads and deflections are actually zero.

If nonzero aerodynamic forces are present, then the initial beam loads and deflections are not zero. Nevertheless, execution of KRASH85 by itself will automatically set the beam loads and deflections at zero. If this is done with nonzero aerodynamic forces, the system will be out of balance at time zero. In this situation, the dynamic response will be the result of two phenomena:

- Dynamic response to the ground impact
- Dynamic response to the initial imbalance

The latter response is not desired, and can obscure the desired response or confuse the interpretation of the output data. The proper solution of this problem requires that the analytical model be in equilibrium at time zero with nonzero internal beam loads and compatible deflections.

This is essentially a straightforward static loads analysis problem. NASTRAN is used to solve the statics problem, and KRASHIC is used to read KRASH85 input data and convert it into NASTRAN Executive Case Control and Bulk Data Decks. Figure 2-1 shows a flow diagram for the overall KRASH85 analysis system. The options available to the user include the following:

1. Run step 1 only (program KRASHIC)
2. Iterate steps 1 and 2, N times (user-specified)
3. Iterate steps 1 and 2, N times, then run step 3 (KRASH85)
4. Run step 3 (KRASH85) only

The most general case is option 3. The iterations are required for the following reasons. The static solution used in MSCTRAN is Rigid Format 24, which is a small deflection linear static analysis. This method actually assumes zero deflections for the purposes of calculating transformation matrices for transforming beam loads from beam element axes to the global axis system, which in this case are airplane axes. Therefore, if the deflections from MSCTRAN are used to relocate the KRASH85 mass points, the KRASH85 calculated beam loads will be proper in beam axes, but when resolved to mass axes will yield a system that is out of balance (since KRASH85 does not assume the deflections are zero when calculating the transformation matrices)

The solution to this problem is to iterate steps 1 and 2, using the calculated deflections from MSCTRAN to relocate the mass and node points in KRASH at each step. Satisfactory convergence is achieved after about six iterations, and additional accuracy can be achieved by using up to ten iterations. Beyond ten iterations, no further improvement in accuracy can be achieved due to the limitations in the number of digits that are written to the data sets that form the input and output of MSCTRAN.

The KRASH analysis system shown in figure 2-1 is implemented through Job Control Language (JCL). A job submittal using option 3 with six iterations causes a total of 13 sequential jobs to be executed (6 KRASHIC, 6 MSCTRAN and 1 KRASH85). While this may sound rather expensive, a typical case

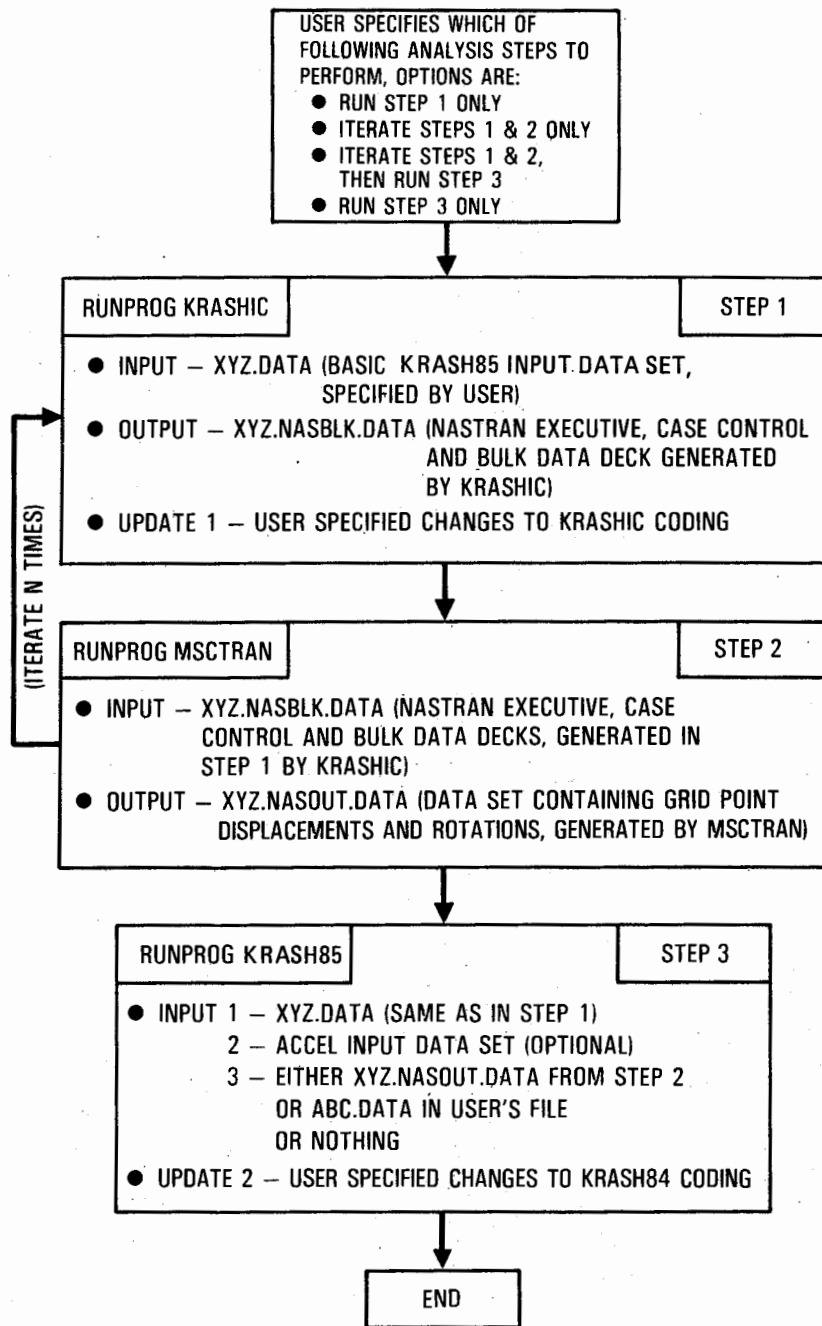


FIGURE 2-1. OVERALL KRASH85 ANALYSIS SYSTEM

(21 mass/27 beam,  $\frac{1}{2}$  airplane model) requires only about seven seconds per iteration on an IBM 370/3081, so that the iterated balanced loads can be determined in less than one minute. The JCL is set up so that data sets XYZ.NASBLK.DATA and XYZ.NASOUT.DATA are generated and named automatically, so the process is essentially invisible to the user.

Step 3 (KRASH85) can be executed separately using option 4. When this is done, the user has a choice of what to do for initial conditions. He can specify any data set in his library, or use nothing at all. The latter corresponds to the mode of execution for prior versions of KRASH. Once an initial condition data set (XYZ.NASOUT.DATA) has been generated, the user can execute step 3 only while specifying XYZ.NASOUT.DATA for initial conditions. This will give a valid initial balance as long as modifications to the basic data set (XYZ.DATA) are restricted to items that do not affect the initial balance.

The static loads problem could have been solved entirely within program KRASH, avoiding the complexity of achieving the system shown in figure 2-1 with JCL. However, the technique chosen has the advantage of automatically generating a NASTRAN model from a given KRASH Model. Since XYZ.NASBLK.DATA is a complete NASTRAN input data set in the user's library, the user can easily edit this data set to exercise other NASTRAN capabilities. Examples of other NASTRAN features that could prove useful include eigenvalue calculations and model plotting.

Figure 2-2 is a copy of the information displayed on a computer terminal during an option 3 run submittal. The items enclosed in rectangular brackets are the user responses. These are now discussed in detail. Some of the comments are of necessity applicable only to the Lockheed IBM 370/3081 installation, but are included to give some perspective on an actual application.

| <u>User Response</u> | <u>Description</u>                                                             |
|----------------------|--------------------------------------------------------------------------------|
| runprog krashi x(1)  | This is the initial command to invoke the Krash analysis system in Figure 2-1. |

runprog P6489 x(1)

ENTER TIME

10

ENTER LINES

50

WOULD YOU LIKE EXPRESS, STANDARD  
OR DEFERRED(VERNIGHT) TURNAROUND  
FOR YOUR JOB? ENTER E, S OR D

d

Enter number

- 1 run KRASHIC only
- 2 iterate KRASHIC and MSCTRAN only
- 3 iterate KRASHIC and MSCTRAN, then run KRASH85
- 4 run KRASH85 only

3

Enter name of input data

b720 iciter data

Enter the number of times to cycle through  
KRASHIC and MSCNASTRAN

10

print execution results only for  
the last iteration? (Y/N)

y

are you using B720.ICITER.NASOUT.DATA  
with the input data for the 1st iteration? (Y/N)

n

KRASHIC ITERATION #1

If temporary source changes then enter name  
of PAN updata data set.  
If none hit enter.

kic.kvb.data

Suppress compile listing ? (Y/N)

y

KRASHMSC ITERATION # 1  
KRASHIC ITERATION # 2  
KRASHMSC ITERATION # 2

FIGURE 2-2. SAMPLE KRASH85 JOB SUBMITTAL (SHEET 1 OF 2)

KRASHIC ITERATION # 3  
KRASHMSC ITERATION # 3  
KRASHIC ITERATION # 4  
KRASHMSC ITERATION # 4  
KRASHIC ITERATION # 5  
KRASHMSC ITERATION # 5  
KRASHIC ITERATION # 6  
KRASHMSC ITERATION # 6  
KRASHIC ITERATION # 7  
KRASHMSC ITERATION # 7  
KRASHIC ITERATION # 8  
KRASHMSC ITERATION # 8  
KRASHIC ITERATION # 9  
KRASHMSC ITERATION # 9  
KRASHIC ITERATION # 10  
KRASHMSC ITERATION # 10

KRASH84

is this a checkpoint/restart run? (Y/N)

If temporary source changes then enter name of  
update data set

If not then hit enter

HIT "RETURN" KEY IF NO DATA SET:

(A) enter name of 2nd input data set of MASS ACCELERATIONS

(b) enter name of output data set of MASS ACCELERATIONS

(c) enter name of MASS and/or NODE POINT DISPLACEMENTS  
(GRAPHICS POST PROCESSOR DATA)

How many copies of the printed output do you want?

1

SUPPRESS COMPILE LISTING ? (Y/N)

y

JOB E434367L SUBMITTED BY USER E434367

READY

FIGURE 2-2. SAMPLE KRASH85 JOB SUBMITTAL (SHEET 2 OF 2)

| <u>User Response</u> | <u>Description</u>                                                                                                                                                                                                                                |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10                   | Time limit for run = 10 minutes (actual execution time was less than three minutes)                                                                                                                                                               |
| 50                   | Output print limited to 50000 lines (actual output is 21000 lines, about 1.5 inches thick).                                                                                                                                                       |
| d                    | Overnight (deferred) turnaround requested. (For runs less than 10 minutes, express turnaround is allowed. Results available within one to two hours).                                                                                             |
| 3                    | Option 3 is chosen.                                                                                                                                                                                                                               |
| B720.ICITER.DATA     | Basic KRASH85 input data set. This corresponds to XYZ.DATA in figure 2-1.                                                                                                                                                                         |
| 10                   | Number of iterations of steps 1 and 2.                                                                                                                                                                                                            |
| y                    | Printout of KRASHIC and MSCTRAN is suppressed for the first nine iterations. Only the results for the last iteration are printed. Considerable output print will be generated if the results for all iterations are printed. (y = yes)            |
| n                    | It is possible to start the first iteration with an existing data set of NASTRAN output deflections. For example, five iterations could be run at one time, and five more at a later time. This option was not invoked for this example. (n = no) |
| kic.kvb.data         | This is the name of a PANVALET update data set which is used to revise the source code for KRASHIC. If no revisions are specified, then hit carriage return (CR).                                                                                 |
| y                    | A compiled listing of the subroutines changed in the previous step can be obtained. In the example, the listing is suppressed. (y = yes)                                                                                                          |
| -                    | The terminal displays KRASHMSC ITERATION #1, etc., as the JCL for the sequential runs is being generated.                                                                                                                                         |
| n                    | The checkpoint/restart capability of KRASH85 is not used for this run. (n = no)                                                                                                                                                                   |

| <u>User Response</u> | <u>Description</u>                                                                                                                                                                                                                                  |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| k83.icrc.data        | This is the name of a PANVALET update data set which is used to revise the source code for KRASH85. If no revisions are specified, then hit carriage return (CR).                                                                                   |
| DSA                  | In the example shown, the CR was hit for each of these, so no data sets were specified. DSA, DSB, and DSC are indicated here to illustrate where these are specified in the input. DSA, DSB, and DSC are described in the input format description. |
| DSB                  |                                                                                                                                                                                                                                                     |
| DSC                  |                                                                                                                                                                                                                                                     |
| 1                    | One copy of the output print requested.                                                                                                                                                                                                             |
| y                    | A compiled listing of the subroutines of KRASH85 that are revised can be obtained. In this example, the listing is suppressed. (y = yes)                                                                                                            |

The KRASH85 analysis system described herein is capable of achieving a balanced set of initial conditions only for the situation where the airplane starts completely off the ground. If any part of the airplane is initially in contact with the ground (any external springs initially deflected), the current code cannot balance the airplane.

## 2.2 INPUT

The input data format is described in detail in this section and is shown in table 2-1 and figure 2-3. Table 2-1 gives a quick overview of the input data sequence, while figure 2-3 is a complete layout of the input data format. The data discussed in this section correspond to XYZ.DATA in Section 2.1. Unless otherwise specified, all quantities are input to inch, pound, second, and radian units. Two formats are used for the majority of the data; 7E10.0 for fixed-point and scientific-notation input, and I5 for integers. As an example of the former, the number 126.08 can be input in the following ways:

|  |  |   |   |   |   |   |   |  |  |
|--|--|---|---|---|---|---|---|--|--|
|  |  | 1 | 2 | 6 | . | 0 | 8 |  |  |
|  |  | 1 | 2 | 6 | . |   | 8 |  |  |

|  |   |   |   |   |   |   |   |   |   |
|--|---|---|---|---|---|---|---|---|---|
|  | 1 | . | 2 | 6 | 0 | 8 |   | E | 2 |
|  | 1 | 2 | 6 | 0 | 8 | . | E | - | 2 |

TABLE 2-1. KRASH INPUT FORMAT SEQUENCE

| Card Sequence No.(s) | Required (R) or Optional (O) | Card Type Identifier | Identifier is Specified on Card No. | General Description of Data                                             |
|----------------------|------------------------------|----------------------|-------------------------------------|-------------------------------------------------------------------------|
| 10-170               | R                            | —                    | —                                   | Title, case control, initial conditions                                 |
| 200                  | R                            | NM                   | 40                                  | Mass data                                                               |
| 300                  | O                            | NNP                  | 40                                  | Node point data                                                         |
| 400                  | O                            | NTAB                 | 70                                  | Acceleration transfer correspondence data                               |
| 500                  | O                            | NMSAV                | 80                                  | Mass acceleration save data                                             |
| 600                  | O                            | NNPSAV               | 80                                  | Node point acceleration save data                                       |
| 700-800              | O                            | NSP                  | 40                                  | External spring data                                                    |
| 900                  | R                            | NB                   | 40                                  | Internal beam data                                                      |
| 1000                 | O                            | NMTL                 | 40                                  | Material data                                                           |
| 1100                 | O                            | NPIN                 | 40                                  | Beam pinned-end and plastic hinge data                                  |
| 1200                 | O                            | NUB                  | 40                                  | Unsymmetrical beam data (axial only)                                    |
| 1290-1500            | O                            | NOLED                | 40                                  | Oleo type beam element data                                             |
| 1600                 | R                            | —                    | —                                   | Internal beam damping ratio                                             |
| 1700                 | O                            | ND                   | 40                                  | Non-standard internal beam damping ratios                               |
| 1800-1900            | O                            | NLB                  | 40                                  | Nonlinear beam data (KR tables)                                         |
| 2000                 | O                            | MVP                  | 40                                  | Mass penetration volume definition                                      |
| 2100                 | O                            | NDRI                 | 40                                  | Dynamic Response Index (DRI) definitions                                |
| 2200                 | O                            | NVCH                 | 40                                  | Volume change data                                                      |
| 2300                 | O                            | NVBM                 | 50                                  | Non-standard maximum positive beam deflections.                         |
| 2400                 | O                            | NVBMN                | 50                                  | Non-standard maximum negative beam deflections.                         |
| 2500                 | O                            | NFBM                 | 50                                  | Non-standard maximum positive beam loads                                |
| 2600                 | O                            | NFBMN                | 50                                  | Non-standard maximum negative beam loads                                |
| 2700                 | O                            | NSCV                 | 60                                  | Sign convention vectors for load-interaction curves                     |
| 2800-3000            | O                            | NLIC                 | 60                                  | Load-interaction curve data                                             |
| 3100                 | O                            | NHI                  | 50                                  | Non-zero mass angular momenta, lift constant, or inertia cross products |
| 3200                 | O                            | NPH                  | 50                                  | Non-zero initial mass orientation Euler angles                          |
| 3300                 | O                            | NAERO                | 50                                  | Mass aerodynamic data                                                   |
| 3400-3500            | O                            | NACC                 | 40                                  | Mass acceleration or load input time-histories                          |
| 3600                 | O                            | NKM                  | 50                                  | Direct input of beam stiffness matrices                                 |
| 3700-3800            | O                            | NPLT                 | 140                                 | Position plot data                                                      |
| 3900                 | O                            | NMEP                 | 140                                 | Mass point printer plot data                                            |
| 4000                 | O                            | NNEP                 | 140                                 | Node point printer plot data                                            |
| 4100                 | O                            | NBFP                 | 140                                 | Beam loads printer plot data                                            |
| 4200                 | O                            | NBDP                 | 140                                 | Beam deflection printer plot data                                       |
| 4300                 | O                            | NSTP                 | 140                                 | Beam stress ratio printer plot data                                     |
| 4400                 | O                            | NSEP                 | 140                                 | External spring load/deflection printer plot data                       |
| 4500                 | O                            | NENP                 | 140                                 | Beam strain/damping energy printer plot data                            |
| 4600                 | O                            | NDRP                 | 140                                 | DRI printer plot data                                                   |
| 4700                 | R                            | —                    | —                                   | End of data set card                                                    |





# GENERAL PURPOSE DATA SHEET

LOCKHEED-CALIFORNIA COMPANY  
A DIVISION OF LOCKHEED CORPORATION

| TITLE:      |    |   |    |                                            |            |        |     |                      |      |         |       | PAGE                  | OF  |       |    |    |    |    |      |
|-------------|----|---|----|--------------------------------------------|------------|--------|-----|----------------------|------|---------|-------|-----------------------|-----|-------|----|----|----|----|------|
| PREPARED BY |    |   |    | DATE                                       | CHECKED BY |        |     |                      | DATE | JOB NO. | GROUP | ID                    | SEQ |       |    |    |    |    |      |
|             |    |   |    |                                            |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
|             |    |   |    |                                            |            |        |     |                      |      | W.O.    | EWA   |                       |     |       |    |    |    |    |      |
| 1           | 5  | 7 | 10 | 15                                         | 20         | 25     | 30  | 35                   | 40   | 45      | 50    | 55                    | 60  | 65    | 70 | 73 | 76 | 77 | 80   |
| DUMMY       |    |   |    | (2X NSP CARDS FOLLOW)                      |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| M           | I  | K |    | XLBAR                                      |            | XMU    |     | XKE                  |      | FLOW    |       | GFLEX                 |     | ITIRE |    |    |    |    | 700  |
|             | SI |   |    | SA                                         |            | SB     |     | SF                   |      | FSPDI   |       | FSPDF                 |     | CDAMP |    |    |    |    | 800  |
| DUMMY       |    |   |    | (NB CARDS FOLLOW)                          |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| M           | I  | N | J  | AA                                         |            | XJ     |     | IYY                  |      | IZZ     |       | XIQ                   |     | Z1    | Z2 | MC |    |    | 900  |
| 1           | 5  | 7 | 10 | 15                                         | 20         | 25     | 30  | 35                   | 40   | 45      | 50    | 55                    | 60  | 65    | 70 | 73 | 76 | 77 | 80   |
| DUMMY       |    |   |    | (NMTL CARDS FOLLOW)                        |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| MC          |    |   |    | EE                                         |            | GG     |     | STENS                |      | SCOMP   |       | SHEAR                 |     |       |    |    |    |    | 1000 |
| DUMMY       |    |   |    | (NPIN CARDS FOLLOW)                        |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| M           | I  | N | J  | PYI                                        | PZI        | PYJ    | PZJ | SF3S                 |      | SF2G    |       | SF3SJ                 |     | SF26J |    |    |    |    | 1100 |
| DUMMY       |    |   |    | (NUB CARDS FOLLOW)                         |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| M           | I  | N | J  | IJUB                                       |            | DB     |     |                      |      |         |       |                       |     |       |    |    |    |    | 1200 |
| DUMMY       |    |   |    | (2X NOLEO + 1 + METERING PIN CARDS FOLLOW) |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| ALPHAP      |    |   |    | NMPTAB                                     |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| M           | I  | N | J  | EOLEO                                      |            | FAO    |     | FAA                  |      | EXPOL   |       | YMAX                  |     |       |    |    |    |    | 1290 |
| M           | I  | N | J  | BOLEO                                      |            | BROLEO |     | XKEXT                |      | XKCOMP  |       | FCOUL                 |     | MPTAB |    |    |    |    | 1400 |
| 1           | 5  | 7 | 10 | 15                                         | 20         | 25     | 30  | 35                   | 40   | 45      | 50    | 55                    | 60  | 65    | 70 | 73 | 76 | 77 | 80   |
| NPTSMP      |    |   |    |                                            |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| YOLEO:      |    |   |    | BOLEO:                                     |            |        |     | $i=1, \dots, NPTSMP$ |      |         |       | } REPEAT NMPTAB TIMES |     |       |    |    |    |    |      |
| DUMMY       |    |   |    | (1 CARD FOLLOWS)                           |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| DAMPE       |    |   |    |                                            |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| DUMMY       |    |   |    | (ND CARDS FOLLOW)                          |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    |      |
| 1           | 5  | 7 | 10 | 15                                         | 20         | 25     | 30  | 35                   | 40   | 45      | 50    | 55                    | 60  | 65    | 70 | 73 | 76 | 77 | 80   |
| M           | I  | N | J  | CBAR                                       |            |        |     |                      |      |         |       |                       |     |       |    |    |    |    | 1700 |

FORM 8104-2

FIGURE 2-3. KRASH85 INPUT FORMAT (SHEET 3 OF 7)

# GENERAL PROPOSE DATA SHEET

LOCKHEED-CALIFORNIA COMPANY  
A DIVISION OF LOCKHEED CORPORATION

| TITLE:                                                                               |                 |                 |                 |                 |                 |                 |                 |        |        | PAGE | OF  |      |
|--------------------------------------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------|--------|------|-----|------|
| PREPARED BY                                                                          |                 | DATE            | CHECKED BY      |                 | DATE            | JOB NO.         | GROUP           |        |        | 4    | 7   |      |
|                                                                                      |                 |                 |                 |                 |                 | W.O.            | EWA             |        |        | ID   | SEQ |      |
| DUMMY (NLB + CARDS FOLLOW)                                                           |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| M                                                                                    | I               | N               | J               | L               | NP              | LDP             | LDP1            |        |        |      |     | 1800 |
| XKR <sub>i</sub> KR <sub>i</sub> (i=1,...,NP, REPEAT FOR ALL KR TABLES WITH NP ≥ 10) |                 |                 |                 |                 |                 |                 |                 |        |        |      |     | 1900 |
| DUMMY (1 CARD FOLLOWS IF MVP ≠ 0)                                                    |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| XN                                                                                   | XP              | YN              | YP              | ZN              | ZP              |                 |                 |        |        |      |     | 2000 |
| DUMMY (DRI SPEC. CARD(S) FOLLOW)                                                     |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| I <sub>1</sub>                                                                       | J <sub>1</sub>  | I <sub>2</sub>  | J <sub>2</sub>  | --              | --              | INDRI           | JNORI           |        |        |      |     | 2100 |
| DUMMY (NVCH CARDS FOLLOW)                                                            |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| I <sub>1i</sub>                                                                      | I <sub>2i</sub> | I <sub>3i</sub> | I <sub>4i</sub> | I <sub>5i</sub> | I <sub>6i</sub> | I <sub>7i</sub> | I <sub>8i</sub> |        |        |      |     | 2200 |
| DUMMY (NVBM CARDS FOLLOW)                                                            |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| M                                                                                    | I               | N               | J               | VMAX1           | VMAX2           | VMAX3           | VMAX4           | VMAX5  | VMAX6  |      |     | 2300 |
| DUMMY (NVBMN CARDS FOLLOW)                                                           |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| M                                                                                    | I               | N               | J               | VMAXN1          | VMAXN2          | VMAXN3          | VMAXN4          | VMAXN5 | VMAXN6 |      |     | 2400 |
| DUMMY (NFBM CARDS FOLLOW)                                                            |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| M                                                                                    | I               | N               | J               | FMAX1           | FMAX2           | FMAX3           | FMAX4           | FMAX5  | FMAX6  |      |     | 2500 |
| DUMMY (NFBMN CARDS FOLLOW)                                                           |                 |                 |                 |                 |                 |                 |                 |        |        |      |     |      |
| M                                                                                    | I               | N               | J               | FMAXN1          | FMAXN2          | FMAXN3          | FMAXN4          | FMAXN5 | FMAXN6 |      |     | 2600 |

FORM 8104-2

FIGURE 2-3. KRASH85 INPUT FORMAT (SHEET 4 OF 7)

# GENERAL PROPOSE DATA SHEET

LOCKHEED-CALIFORNIA COMPANY  
A DIVISION OF LOCKHEED CORPORATION

| TITLE:                                                      |            |                |                |       |          |                                    | PAGE 5 OF 7 |             |             |
|-------------------------------------------------------------|------------|----------------|----------------|-------|----------|------------------------------------|-------------|-------------|-------------|
| PREPARED BY                                                 |            | DATE           | CHECKED BY     |       | DATE     | JOB NO.                            | GROUP       | ID          | SEQ         |
|                                                             |            |                |                |       |          |                                    |             |             |             |
| DUMMY (NSCV CARDS FOLLOW)                                   |            |                |                |       |          |                                    |             |             |             |
| (1,1)                                                       | (1,2)      | (1,3)          | (1,4)          | (1,5) | (1,6)    |                                    |             |             |             |
| (NSCV,1)                                                    |            |                |                |       | (NSCV,6) |                                    |             |             |             |
| ISCV EC(J,I) J=1, NSCV (10 MAX) I=1,6                       |            |                |                |       |          | USER INPUT SIGN CONVENTION VECTORS |             | 2700        |             |
| DUMMY                                                       |            |                |                |       |          |                                    |             |             |             |
| IJ                                                          | K          | L              | NLIL           | ISCN  | NSMI     | FSLIC(I)                           | BLIC(I)     | WLLIC(I)    | RUPRAT(I)   |
| (1,1,I)                                                     | (2,1,I)    | FLIC(1,1,I)    | FLIC(2,1,I)    |       |          | FMXLIC(1,I)                        | FMXLIC(2,I) | FMXLIC(3,I) | FMXLIC(4,I) |
| (1,2,I)                                                     | (2,2,I)    | FLIC(1,2,I)    | FLIC(2,2,I)    |       |          |                                    |             |             |             |
| NLIL CARDS                                                  |            |                |                |       |          |                                    |             |             |             |
| (1,NLIL,I)                                                  | (2,NLIL,I) | FLIC(1,NLIL,I) | FLIC(2,NLIL,I) |       |          |                                    |             |             |             |
| MXYLIC(K,I) K=1,2 J=1,NLIL(I) I=1,NLIL                      |            |                |                |       |          |                                    |             |             |             |
| WLSMF WLSMF                                                 |            |                |                |       |          |                                    |             |             |             |
| IJSMI IJSMI IJSMI IJSMI IJSMI IJSMI IJSMI IJSMI IJSMI IJSMI |            |                |                |       |          |                                    |             |             |             |
| DUMMY (NHI CARDS FOLLOW)                                    |            |                |                |       |          |                                    |             |             |             |
| I                                                           | LC         | HEX            | HEY            | HEZ   | XYI      | YZI                                | XZI         |             | 3100        |
| DUMMY (NPH CARDS FOLLOW)                                    |            |                |                |       |          |                                    |             |             |             |
| I                                                           |            | PHIDP          | THIDP          | PSIDP |          |                                    |             |             |             |
| DUMMY (NAERO CARDS FOLLOW)                                  |            |                |                |       |          |                                    |             |             |             |
| I                                                           |            | CXAIR          | CYAIR          | CZAIR | CLAIR    | CMAIR                              | CNAIR       |             | 3300        |

FORM 8104-2

FIGURE 2-3. KRASH85 INPUT FORMAT (SHEET 5 OF 7)

# GENERAL PURPOSE DATA SHEET

LOCKHEED-CALIFORNIA COMPANY  
A DIVISION OF LOCKHEED CORPORATION

| TITLE:                                      |     |       |      |                 |        |                      |            |                 |     | PAGE            | OF |                 |    |       |    |    |     |      |      |
|---------------------------------------------|-----|-------|------|-----------------|--------|----------------------|------------|-----------------|-----|-----------------|----|-----------------|----|-------|----|----|-----|------|------|
| PREPARED BY                                 |     |       |      |                 | DATE   |                      | CHECKED BY |                 |     | DATE            |    | JOB NO.         |    | GROUP |    | ID | SEQ |      |      |
|                                             |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| 1                                           | 5   | 7     | 10   | 15              | 20     | 25                   | 30         | 35              | 40  | 45              | 50 | 55              | 60 | 65    | 70 | 73 | 76  | 77   | 80   |
| DUMMY (NACC + CARDS FOLLOW)                 |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| I                                           |     | L     |      | NP              | NCODE  |                      |            |                 |     |                 |    |                 |    |       |    |    |     | 3400 |      |
| TIME: ACCEL: (i=1,...,NP) REPEAT NACC TIMES |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| DUMMY (7 x NKM CARDS FOLLOW)                |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| M                                           | I   | N     | J    |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     | 3500 |      |
| 1                                           | 5   | 7     | 10   | 15              | 20     | 25                   | 30         | 35              | 40  | 45              | 50 | 55              | 60 | 65    | 70 | 73 | 76  | 77   | 80   |
| K <sub>11</sub>                             |     |       |      | K <sub>12</sub> |        | K <sub>13</sub>      |            | K <sub>14</sub> |     | K <sub>15</sub> |    | K <sub>16</sub> |    |       |    |    |     |      |      |
| K <sub>21</sub>                             |     |       |      | K <sub>22</sub> |        | K <sub>23</sub>      |            | K <sub>24</sub> |     | K <sub>25</sub> |    | K <sub>26</sub> |    |       |    |    |     |      |      |
| K <sub>31</sub>                             |     |       |      | K <sub>32</sub> |        | K <sub>33</sub>      |            | K <sub>34</sub> |     | K <sub>35</sub> |    | K <sub>36</sub> |    |       |    |    |     |      | 3600 |
| K <sub>41</sub>                             |     |       |      | K <sub>42</sub> |        | K <sub>43</sub>      |            | K <sub>44</sub> |     | K <sub>45</sub> |    | K <sub>46</sub> |    |       |    |    |     |      |      |
| K <sub>51</sub>                             |     |       |      | K <sub>52</sub> |        | K <sub>53</sub>      |            | K <sub>54</sub> |     | K <sub>55</sub> |    | K <sub>56</sub> |    |       |    |    |     |      |      |
| 1                                           | 5   | 7     | 10   | 15              | 20     | 25                   | 30         | 35              | 40  | 45              | 50 | 55              | 60 | 65    | 70 | 73 | 76  | 77   | 80   |
| K <sub>61</sub>                             |     |       |      | K <sub>62</sub> |        | K <sub>63</sub>      |            | K <sub>64</sub> |     | K <sub>65</sub> |    | K <sub>66</sub> |    |       |    |    |     |      |      |
| DUMMY (2 x NPLT CARDS FOLLOW)               |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| NTP                                         | L   | NMPTS | ISCL | XSCALE          | YSCALE | } POSITION PLOT DATA |            |                 |     |                 |    |                 |    |       |    |    |     | 3700 |      |
| M1                                          | M2  | M3    | M4   | M5              | M6     | M7                   | ---        |                 |     |                 |    |                 |    |       |    |    |     |      | 3800 |
| 1                                           | 5   | 7     | 10   | 15              | 20     | 25                   | 30         | 35              | 40  | 45              | 50 | 55              | 60 | 65    | 70 | 73 | 76  | 77   | 80   |
| DUMMY (NMEP CARDS FOLLOW)                   |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| I                                           | NP1 | NP2   | NP3  | NP4             | NP5    | NP6                  | NP7        | NP8             | NP9 |                 |    |                 |    |       |    |    |     |      | 3900 |
| DUMMY (NNEP CARDS FOLLOW)                   |     |       |      |                 |        |                      |            |                 |     |                 |    |                 |    |       |    |    |     |      |      |
| M                                           | I   | NP1   | NP2  | NP3             | NP4    | NP5                  | NP6        |                 |     |                 |    |                 |    |       |    |    |     |      | 4000 |
| 1                                           | 5   | 7     | 10   | 15              | 20     | 25                   | 30         | 35              | 40  | 45              | 50 | 55              | 60 | 65    | 70 | 73 | 76  | 77   | 80   |

FORM 8104-2

FIGURE 2-3. KRASH85 INPUT FORMAT (SHEET 6 OF 7)

— ( )

)

2-16

FIGURE 2-3. KRASH85 INPUT FORMAT (SHEET 7 OF 7)

Blank columns are treated as zeros. When the E format is used, the exponent must be right justified in the field. With the I5 integer format, the number must be right justified. The sequence numbers shown in columns 77 through 80 are only for reference purposes within this document. The actual data cards can have any numbering scheme, or no numbers at all, as long as the cards are in the proper order.

The following coordinate systems (figure 2-4) are established to facilitate the derivation of equations for the mathematical model. The input data description specifies the appropriate coordinate systems to be used.

- Ground Coordinate System. - This is a right-handed coordinate system fixed in the ground with the origin at point O in figure 2-4. The x-axis is positive forward, the y-axis is positive to the right, and the z-axis is positive downward. The xy-plane ( $z = 0$ ) corresponds to the ground surface. The ground coordinate system is considered an inertial coordinate system for writing the dynamic equations of motion.
- Slope Coordinate System. - This is a right-handed coordinate system fixed in the ground with the origin at point O as shown in figure 2-4. The x-axis is positive forward up the slope, the y-axis is positive to the right, and the z-axis is positive downward and perpendicular to the slope. This coordinate system is the same as the ground coordinate system rotated through an angle 'beta', positive clockwise about the ground y-axis. The xy-plane represents a plane inclined at an angle 'beta' with respect to the horizontal ground plane. 'Beta' is a constant input angle that can range from zero to ninety degrees.
- Airplane Coordinate System. - This is a left-handed coordinate system fixed with relation to the airplane with the origin at point H in figure 2-4. The x-axis is positive aft, the y-axis is positive to the left when looking forward, and the z-axis is positive upward. The origin at point H corresponds to zero fuselage station ( $FS = 0$ ), zero buttline ( $BL = 0$ ), and zero waterline ( $WL = 0$ ). This coordinate system is used only to input the location coordinates of the mass points and massless node points since the coordinates of the points are usually available in terms of fuselage station, buttline, and waterline.
- Center-of-Gravity Coordinate System. - This is a right-handed coordinate system fixed with relation to the airplane with the origin at the vehicle c.g., point G. The x-axis is positive forward, the y-axis is positive to the right when looking forward, and the z-axis is positive downward. These axes are parallel to the airplane coordinate system axes.

- Mass Point Coordinate System. - Each mass point has its own right-handed coordinate system fixed with relation to the mass point. The initial orientation of each of these coordinate systems is arbitrary and is specified by means of three input Euler angles for each mass point relating its initial orientation to the center-of-gravity coordinate system since the inertia data are generally available about these axes and the three input Euler angles are zero. The mass point coordinate system is the system used to write Euler's equations of motion for each mass point.
- Beam Element Coordinate System. - This is a right-handed coordinate system with the beam element x-axis along a straight line from the mass point at end 'I' to the mass point at end 'J'. As the mass points move, the beam element coordinate system changes orientation so that the x-axis is always pointing from the mass point at end 'I' to the mass point at end 'J'. If the beam element connects massless node points which are offset from the mass points, then the beam element x-axis always points from the massless node point rigidly attached to the mass point at end 'I' to the massless node point rigidly attached to the mass point at end 'J'.

The beam element y-axis and z-axis are mutually perpendicular. The direction of each is arbitrary and is defined internally within the program. The input data are prepared according to the beam element coordinate systems shown in figure 2-5 (page 2-46).

The following is a detailed description of all the input data requirements.

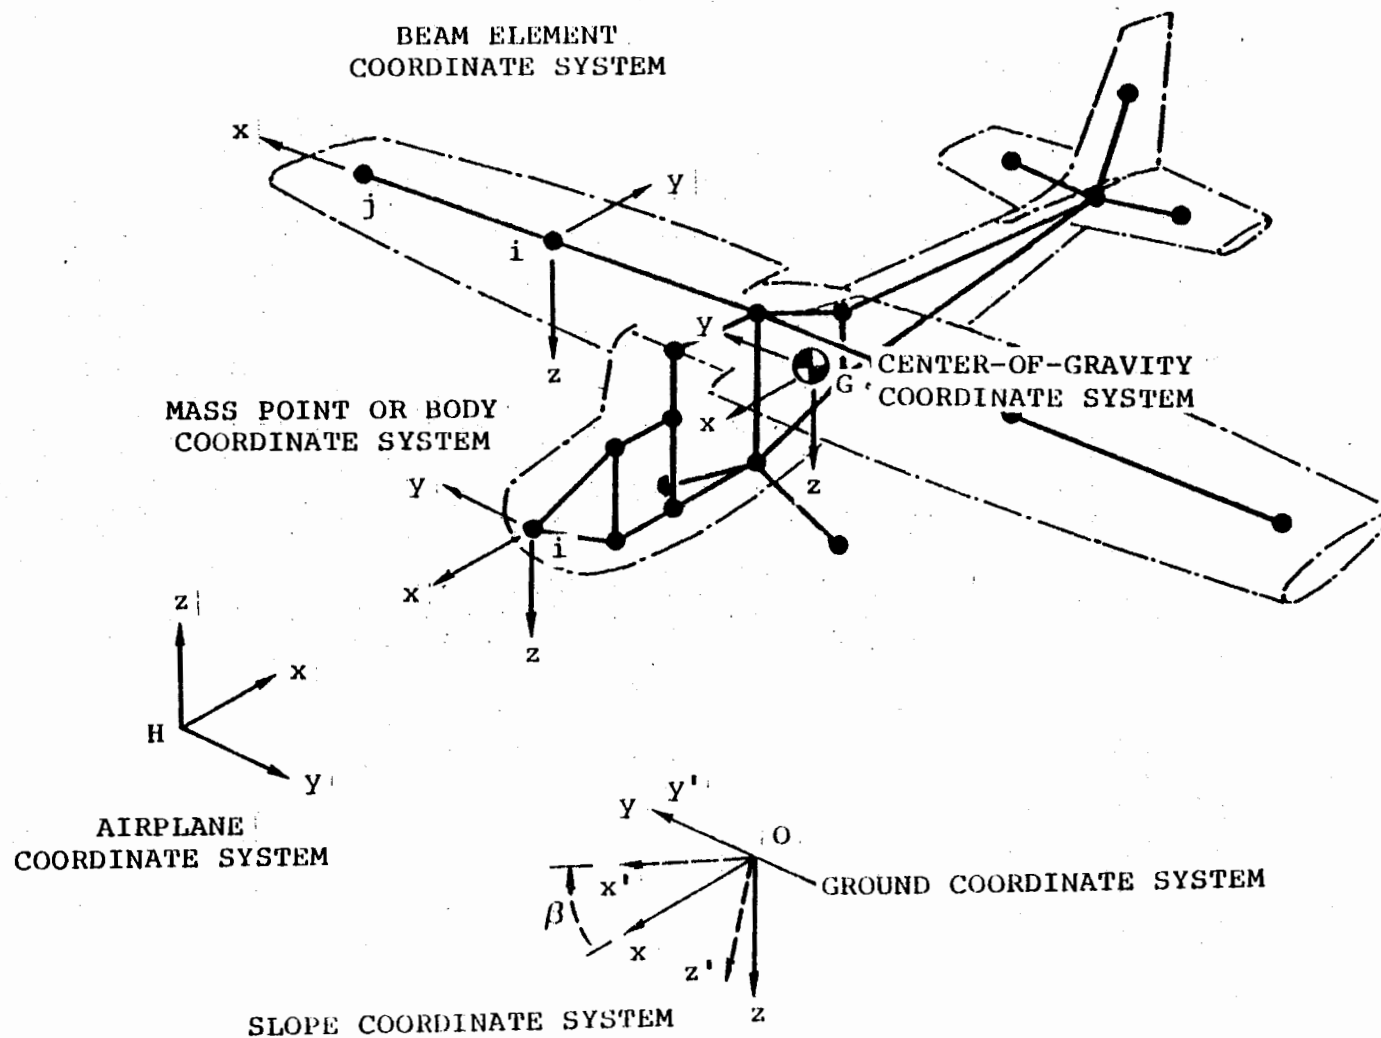


FIGURE 2-4. KRASH85 COORDINATE SYSTEMS

# **KRASH\* INPUT DATA**

**CARD 0010:**    **TITLE CARD #1**

**DESCRIPTION:**    Defines an alphanumeric label which will appear as the first line of heading on each page of KRASH\* printed output.

**FORMAT AND EXAMPLE:**

|                                   |   |   |   |   |   |   |   |      |
|-----------------------------------|---|---|---|---|---|---|---|------|
| 0                                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
| 1                                 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9    |
| TITLE1                            |   |   |   |   |   |   |   |      |
| SUBSTRUCTURE SECTION IMPACT STUDY |   |   |   |   |   |   |   | 0010 |

**FIELD**            **CONTENTS**

Title1            Alphanumeric Character String

**REMARKS:**    (1) Required data card; however, it may be blank.  
 (2) All text material on this card is reproduced at the top of every output page and on every plot.

**CARD 0020:**    **TITLE CARD #2**

**DESCRIPTION:**    Defines an alphanumeric label which will appear as the second line of heading on each page of KRASH printed output.

**FORMAT AND EXAMPLE:**

|                                                               |   |   |   |   |   |   |   |      |
|---------------------------------------------------------------|---|---|---|---|---|---|---|------|
| 0                                                             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
| 1                                                             | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9    |
| TITLE2                                                        |   |   |   |   |   |   |   |      |
| INITIAL CONDITIONS: 27.5 FPS VERTICAL IMPACT ON RIGID SURFACE |   |   |   |   |   |   |   | 0020 |

**FIELD**            **CONTENTS**

Title2            Alphanumeric Character String

**REMARKS:**    (1) Required data card; however, it may be blank.  
 (2) All text material on this card is reproduced at the top of every output page and on every plot.

---

\*KRASH refers to KRASH85 in all subsequent input data sheets

## KRASH INPUT DATA

CARD 0030: DUMMY CARD

|                            |                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------|
| <b><u>DESCRIPTION:</u></b> | Defines a numeric heading which will appear on each page of the KRASH printout of the input data deck echo. |
|----------------------------|-------------------------------------------------------------------------------------------------------------|

**FORMAT AND EXAMPLE:**

|            |            |            |            |            |            |            |            |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| DUMMY      |            |            |            |            |            |            |            |            |
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 12         |
|            |            |            |            |            |            |            |            | 0030       |

| <u>FIELD</u> | <u>CONTENTS</u> |
|--------------|-----------------|
| Dummy        | Numeric String  |

REMARKS:

- (1) Required data card; however, it may be blank.
- (2) Intent of this data card is to aid the user in verifying the field placement of the input data.

## KRASH INPUT DATA

**CARD 0040: KRASH MODEL SIZE PARAMETERS**

**DESCRIPTION:** Defines the sizes of the various input parameter data sets for the KRASH model.

**FORMAT AND EXAMPLE:**

| 0 1 2 3 4 5 6 7 8                                            |     |    |     |     |      |     |      |       |      |     |      |      |    |  |      |
|--------------------------------------------------------------|-----|----|-----|-----|------|-----|------|-------|------|-----|------|------|----|--|------|
| 123456789012345678901234567890123456789012345678901234567890 |     |    |     |     |      |     |      |       |      |     |      |      |    |  |      |
| NM                                                           | NSP | NB | NLB | NNP | NPIN | NUB | NDRI | NOLEO | NACC | MVP | NVCH | NMTL | ND |  |      |
| 16                                                           | 10  | 32 | 2   | 6   | 0    | 4   | 0    | 0     | 0    | 0   | 0    | 0    | 1  |  | 0040 |

### FIELD

### CONTENTS

|       |                                                                                                                                                        |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| NM    | Number of Mass Points Per 0200-Series Cards (Maximum Allowed is 80)                                                                                    |
| NSP   | Number of External Crushing Springs Per 0700/0800-Series Cards (Maximum Allowed is 40)                                                                 |
| NB    | Number of Beam Elements Per 0900-Series Cards (Maximum Allowed is 150)                                                                                 |
| NLB   | Number of Beam Element Nonlinear Degrees-of-Freedom Per 1800-Series Cards (Maximum Allowed is 180)                                                     |
| NNP   | Number of Massless Node Points Per 0300-Series Cards (Maximum Allowed is 50)                                                                           |
| NPIN  | Number of Beam Elements Having at Least One Degree-of-Freedom Pinned Per 1100-Series Cards (Maximum Allowed is 150)                                    |
| NUB   | Number of Axially Unsymmetric Beam Elements Per 1200-Series Cards (Maximum Allowed is 150)                                                             |
| NDRI  | Number of DRI Beam Elements Per 2100-Series Cards (Maximum Allowed is 150)                                                                             |
| NOLEO | Number of Shock Strut Elements Per 1300 and 1400-Series Cards (Maximum Allowed is 20)                                                                  |
| NACC  | Number of Enforced Acceleration Time History Tables Per 3400/3500-Series Cards (Maximum Allowed is 100 Input Tables, With a Total of 5000 Time Points) |
| MVP   | Reference Mass Point For Volume Penetration Calculations Per 2000-Series Cards (Maximum Allowed is 1)                                                  |
| NVCH  | Number of Volumes For Occupiable Volume Change Calculations Per 2200-Series Cards (Maximum Allowed is 5)                                               |
| NMTL  | Number of Non-Standard Beam Element Materials Per 1000-Series Cards (Maximum Allowed is 10)                                                            |
| ND    | Number of Beam Elements With Non-Standard Damping Ratios Per 1700-Series Cards (Maximum Allowed is 150)                                                |

### REMARKS:

- (1) Required data card.
- (2) All entries are right justified integers.
- (3) 'NM' and 'NB' must be nonzero.
- (4) Blank entries are read as zero.
- (5) See Table 2-1 for a summary of model size parameters.
- (6) Format for this card is 14I5.

TABLE 2-2. PROGRAM SIZING CONSTANTS

| CONSTANT | MAXIMUM VALUE | DESCRIPTION                                                                                                                                                                                |
|----------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NM       | 80            | NUMBER OF MASSES                                                                                                                                                                           |
| NSP      | 40            | NUMBER OF EXTERNAL SPRINGS                                                                                                                                                                 |
| NB       | 150           | NUMBER OF INTERNAL BEAMS                                                                                                                                                                   |
| NLB      | 180           | NUMBER OF NONLINEAR BEAM-DIRECTION COMBINATIONS (KR TABLES)                                                                                                                                |
| NHI      | 80            | NUMBER OF MASSES HAVING NON-ZERO $H_{ex_i}$ , $H_{ey_i}$ , $H_{ez_i}$ , $I_{xy_i}$ , $I_{yz_i}$ , $I_{xz_i}$ , OR $\ell_{c_i}$                                                             |
| MVP      | —             | REFERENCE MASS NUMBER FOR VOLUME PENETRATION CALCULATIONS                                                                                                                                  |
| NVCH     | 5             | NUMBER OF VOLUMES FOR OCCUPIABLE VOLUME CHANGE CALCULATIONS                                                                                                                                |
| NDRI     | 150           | NUMBER OF DRI BEAM ELEMENTS                                                                                                                                                                |
| NMTL     | 10            | NUMBER OF NON-STANDARD BEAM MATERIALS                                                                                                                                                      |
| NACC     | 100           | NUMBER OF INPUT ACCELERATION TIME-HISTORY TABLES (TOTAL NUMBER OF TIME POINTS = 5000)                                                                                                      |
| NVBM     | 150           | NUMBER OF INTERNAL BEAMS HAVING NON-STANDARD MAXIMUM POSITIVE (NVBM) OR NEGATIVE (NVBMN) DEFLECTIONS FOR BEAM RUPTURE. STANDARD VALUE = 100 (inches OF DEFLECTION AND radians OF ROTATION) |
| NVBMN    | 150           |                                                                                                                                                                                            |
| NFBM     | 150           | NUMBER OF INTERNAL BEAMS HAVING NON-STANDARD MAXIMUM POSITIVE (NFBM) OR NEGATIVE (NFBMN) FORCES FOR BEAM RUPTURE. STANDARD VALUE = 1E10                                                    |
| NFBMN    | 150           |                                                                                                                                                                                            |
| NPH      | 80            | NUMBER OF MASSES HAVING NON-ZERO EULER ANGLES $\phi_i$ , $\theta_i$ , $\psi_i$                                                                                                             |
| ND       | 150           | NUMBER OF INTERNAL BEAMS HAVING DAMPING RATIOS DIFFERENT FROM THAT SPECIFIED ON CARD 1600                                                                                                  |
| NKM      | 150           | NUMBER OF INTERNAL BEAMS FOR WHICH THE FULL 6 x 6 STIFFNESS MATRIX IS DIRECTLY INPUT                                                                                                       |
| NPIN     | 150           | NUMBER OF INTERNAL BEAMS HAVING OTHER THAN FIXED-FIXED END CONDITIONS                                                                                                                      |
| NNP      | 50            | NUMBER OF MASSLESS NODE POINTS                                                                                                                                                             |
| NUB      | 150           | NUMBER OF UNSYMMETRICAL BEAMS                                                                                                                                                              |
| NOLEO    | 20            | NUMBER OF SHOCK STRUTS                                                                                                                                                                     |

## KRASH INPUT DATA

CARD 0050: KRASH MODEL SIZE PARAMETERS AND CALCULATION FLAGS

**DESCRIPTION:** Defines the sizes of the various input parameter data sets for the KRASH model and provides for beam element stress and/or failure data calculations.

**FORMAT AND EXAMPLE:**

|             |      |       |       |             |     |     |       |             |       |     |     |             |       |   |  |             |      |  |  |             |  |  |  |             |  |  |  |               |  |  |  |   |  |  |  |
|-------------|------|-------|-------|-------------|-----|-----|-------|-------------|-------|-----|-----|-------------|-------|---|--|-------------|------|--|--|-------------|--|--|--|-------------|--|--|--|---------------|--|--|--|---|--|--|--|
| 0           |      |       |       | 1           |     |     |       | 2           |       |     |     | 3           |       |   |  | 4           |      |  |  | 5           |  |  |  | 6           |  |  |  | 7             |  |  |  | 8 |  |  |  |
| 12345678901 |      |       |       | 23456789012 |     |     |       | 34567890123 |       |     |     | 45678901234 |       |   |  | 56789012345 |      |  |  | 67890123456 |  |  |  | 78901234567 |  |  |  | 8901234567890 |  |  |  |   |  |  |  |
| NVBM        | NFBM | NVBMN | NFBMN | NKM         | NHI | NPH | NTOL1 | NTOL2       | NTOL3 | NSC | NIC | NAERO       | NBOMB | X |  |             |      |  |  |             |  |  |  |             |  |  |  |               |  |  |  |   |  |  |  |
| 0           | 0    | 0     | 0     | 0           | 0   | 0   | 10    | 50          | 100   | 0   | 0   |             |       |   |  |             | 0050 |  |  |             |  |  |  |             |  |  |  |               |  |  |  |   |  |  |  |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NVBM         | Number of Beam Elements Having Non-Standard Rupture Positive Deflections Per 2300-Series Cards (Maximum Allowed is 150)                                                                                   |
| NFBM         | Number of Beam Elements Having Non-Standard Rupture Positive Forces Per 2500-Series Card (Maximum Allowed is 150)                                                                                         |
| NVBMN        | Number of Beam Elements Having Non-Standard Rupture Negative Deflections Per 2400-Series Card (Maximum Allowed is 150)                                                                                    |
| NFBMN        | Number of Beam Elements Having Non-Standard Rupture Negative Forces Per 2600-Series Cards (Maximum Allowed is 150)                                                                                        |
| NKM          | Number of Beam Elements For Which 6 x 6 Stiffness Matrix is Directly Input Per 3600 Series Cards (Maximum Allowed is 150)                                                                                 |
| NHI          | Number of Mass Points Having Nonzero Aerodynamic Lift Constant, Angular Momenta, or Cross Products of Inertia Per 3100-Series Card (Maximum Allowed is 80)                                                |
| NPH          | Number of Mass Points Having Nonzero Euler Angles For Rotating the Mass Point or Body Coordinate System Relative to The Center-of-Gravity Coordinate System Per 3200-Series Cards (Maximum Allowed is 80) |
| NTOL1        | Percent Allowable Total Energy Growth Above 100 Percent (Default Value is One (1) Percent)                                                                                                                |
| NTOL2        | Percent Allowable Individual Negative Strain, Damping, Crushing and Friction Terms of Respective Totals (Default Value is Ten (10) Percent)                                                               |
| NTOL3        | Percent Allowable Individual Mass Energy Deviation Above Zero Percent (Default Value is Thirty (30) Percent)                                                                                              |
| NSC          | Flag For Beam Element Stress Calculation: 0 = No 1 = Yes                                                                                                                                                  |
| NIC          | Flag For Preliminary Beam Element Failure Load and Deflection Calculations: 0 = No 1 = Yes                                                                                                                |
| NAERO        | Number of Masses Having Aerodynamic Data Input Per 3300-Series Card (Maximum Allowed is 80)                                                                                                               |
| NBOMB        | Any Nonzero Input Will Override all Energy Growth Error Checks. Run Will Execute to Completion Regardless of Energy Calculations.                                                                         |

## REMARKS:

- (1) Required data card; however it may be blank.
- (2) All entries are right justified integers.
- (3) Blank entries are read as zero.
- (4) If any of the allowable errors in energy are exceeded, the analysis terminates automatically at that time, and summary tables and printer plots are generated.
- (5) Default values for NVBM and NVBMN are 100 inches or radians. Default values for NFBM and NFBMN are 1E10, lbs or in-lbs.
- (6) See Table 2-1 for a summary of model size parameters.
- (7) It is recommended that NIC = 1 be used each time if complete beam properties are input (0900-series cards).
- (8) Format for this card is 14I5.

## KRASH INPUT DATA

CARD 0060:      KRASH MODEL SIZE AND PROGRAM CONTROL PARAMETERS

DESCRIPTION:      Defines the sizes of input parameter data sets for the KRASH model and controls the output of graphics information and specifies the type of initial conditions to be used.

FORMAT AND EXAMPLE:

| 0    | 1    | 2      | 3    | 4   | 5      | 6 | 7 | 8    |
|------|------|--------|------|-----|--------|---|---|------|
| 1    | 2    | 3      | 4    | 5   | 6      | 7 | 8 | 9    |
| 1    | 2    | 3      | 4    | 5   | 6      | 7 | 8 | 9    |
| NSCV | NLIC | NWRGRA | NBAL | ICD | ICITER |   |   |      |
| 1    | 16   | 0      | 5    | 1   | 1      |   |   |      |
|      |      |        |      |     |        |   |   | 0060 |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NSCV         | Number of User-Specified Sign Convention Vectors, Per 2700-Series Cards, To Be Used in Conjunction With Load-Interaction Curve Data. (Maximum Allowed is 10) NSCV May be Zero.                                                                                                                                                                                                                                                                                                                                                                                        |
| NLIC         | Number of Load-Interaction Curves Per 2800/3000-Series Cards (Maximum Allowed is 40)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| NWRGRA       | Parameter Which Governs Whether Graphics Data For Postprocessing is Written to The User's Data File. NWRGRA = 0 Results in No Data Being Written to The User's File. Any Nonzero Input Will Result in Mass and Node Point Displacement Time-History Data, Plus Load-Interaction Time-History Data (if NLIC $\neq$ 0), being written to the user's data file, in data set DSC, Defined in JCL.                                                                                                                                                                         |
| NBAL         | If MSC/NASTRAN is To Be Used For a Static Solution, Then NBAL is The Mass Number That is Constrained to Have Zero Deflections and Rotations.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ICD          | Parameter Which Determines Whether an Additional Data Set of Mass and Node Point Static Deflections is To Be Read Following the Basic Input Data Set. ICD = 0 Means That The Additional Data Set is Not Read. Any Nonzero Input Causes The Program to Read The Initial Deflection Data.                                                                                                                                                                                                                                                                               |
| ICITER       | Parameter Which Determines Whether The Initial Mass and Node Point Deflection Data (ICD $\neq$ 0) is Used To Modify The Input Airplane Coordinates For The Mass and Node Points. ICITER = 0 Means The Initial Static Deflection Data is Not Used to Modify The Mass Coordinates; i.e., The Airplane is Left in Its Undeformed Position. Any Nonzero Value of ICITER Results in The Input Mass Coordinates Being Modified to Reflect The Initial Static Deflections, i.e., The Airplane Assumes The Deformed Shape Corresponding to The Initial Static Load Condition. |

REMARKS:

- (1) Required data card; however, it may be blank.
- (2) All entries are right justified integers.
- (3) See Section 3.1 for a discussion of the load-interaction curve data; Section 2.1 for a discussion of initial conditions.
- (4) Format for this card is 6I5.

# KRASH INPUT DATA

CARD 0070: ACCELERATION TRANSFER CONTROL PARAMETERS

DESCRIPTION: Defines number of time-history tables of mass accelerations to be used.

FORMAT AND EXAMPLE:

| 0      | 1 | 2      | 3 | 4    | 5 | 6 | 7 | 8    |
|--------|---|--------|---|------|---|---|---|------|
| 1      | 2 | 3      | 4 | 5    | 6 | 7 | 8 | 9    |
| (CSIN) | X | (RNIN) | X | NTAB |   |   |   |      |
|        |   |        | 3 |      |   |   |   | 0070 |

## FIELD

## CONTENTS

(CSIN) Not Used  
 (RNIN) Not Used  
 NTAB Number of Acceleration Time-History Tables to Be Used From Previous Run, Using Data Set Identified as DSA in JCL. Maximum Allowed is 100.

## REMARKS:

- (1) Required data card; however, it may be blank.
- (2) NTAB is input as a right justified integer.
- (3) See Section 3.2 for a discussion of acceleration transfer procedures.
- (4) Format for this card is (A6, 4X, A10, 5X, 15).

# KRASH INPUT DATA

## CARD 0080: ACCELERATION TRANSFER CONTROL PARAMETERS

DESCRIPTION: Defines data for saving mass and mode point accelerations for later use as input data in another run.

## FORMAT AND EXAMPLE:

| 0       | 1 | 2       | 3     | 4      | 5      | 6      | 7      | 8    |
|---------|---|---------|-------|--------|--------|--------|--------|------|
| 1       | 2 | 3       | 4     | 5      | 6      | 7      | 8      | 9    |
| (CSOUT) | X | (RNOUT) | NMSAV | NNPSAV | NDTSAV | NWRFLG | NDTGRA |      |
|         |   |         | 6     | 3      | 10     | 1      | 20     | 0080 |

## FIELD                      CONTENTS

|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (CSOUT) | Not Used                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| (RNOUT) | Not Used                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| NMSAV   | Number of Masses For Which Selected Acceleration Data Will be Saved in Data Set DSB (Identified in JCL), as Specified on 500-Series Cards (Maximum allowed is 80) See Remark (5).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| NNPSAV  | Number of Node Points For Which Selected Acceleration Data Will be Saved in Data Set DSB (Identified in JCL), as Specified on 600-Series Cards (Maximum Allowed is 50) See Remark (5)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| NDTSAV  | Multiple of Integration Time Interval DT at Which Acceleration Data Will be Saved. See Remark (4)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| NWRFLG  | Parameter Governing Whether Selected Acceleration Data Will be written to User's Data File as Data Set DSB. Any Nonzero Value Will Cause The Data to be Written; NWRFLG = 0 Will Cause The Data Not to be Written, Regardless of The Remaining Input Parameters on This Card.                                                                                                                                                                                                                                                                                                                                                                                        |
| NDTGRA  | Multiple of Integration Time Interval DT at Which Mass and Node Point Displacement Data Will be Written to User's Data File as Data Set DSC (Identified in JCL). This Data is Used For Graphics Postprocessing. NWRGRA on Card 0600 Must be Nonzero For This Data to be Written as DSC in User's Data File. NDTGRA Also Defines The Time Interval For Saving Load-Interaction Data. For The Load Interaction Data, if NWRGRA on Card 0060 is Zero, The Print Output Will Still Contain Time-Histories of All Load Interaction Output Data. If it is Desired to Save This Data in Data Set DSC For Postprocessing, Then NWRGRA Must be Input Nonzero. See Remark (4). |

## REMARKS:

- (1) Required data card; however, it may be blank.
- (2) All entries are right justified integers.
- (3) See Sections 3.1 and 3.2 for discussions of load-interaction curve data and acceleration transfer control and graphics data.
- (4) Both NDTSAV and NDTGRA must be chosen so that less than 100 time cuts are saved for each response quantity. This is satisfied if

$$\left( \begin{matrix} \text{NDTSAV} \\ \text{and} \\ \text{NDTGRA} \end{matrix} \right) > \frac{\text{TMAX}}{100 * \text{DT}}$$

- (5) The total number of response quantities saved (total number of nonzero MFL's and NPFL's on 0500 and 0600 Series Cards) must be less than 100.
- (6) Format for this card is (A6, 4X, A10, 5110).

# KRASH INPUT DATA

CARD 0090:     RESTART CONTROL PARAMETERS

DESCRIPTION:     Defines the identifiers of a previously checkpointed KRASH case and the simulation time from which the KRASH analysis will be restarted.

FORMAT AND EXAMPLE:

|        |   |       |        |   |   |   |   |      |
|--------|---|-------|--------|---|---|---|---|------|
| 0      | 1 | 2     | 3      | 4 | 5 | 6 | 7 | 8    |
| 1      | 2 | 3     | 4      | 5 | 6 | 7 | 8 | 9    |
| 0      | 1 | 2     | 3      | 4 | 5 | 6 | 7 | 8    |
| 1      | 2 | 3     | 4      | 5 | 6 | 7 | 8 | 9    |
| CASEIN | X | RUNIN | MSECIN |   |   |   |   |      |
| OLEO   |   | 1     | 40     |   |   |   |   | 0090 |

## FIELD

## CONTENTS

CASEIN     Alphanumeric Identifier of Checkpointed Case (Maximum of Eight Characters, Left Justified)  
 RUNIN     Numeric Identifier of Checkpointed Case  
 MSECIN     Restart Time – Milliseconds

## REMARKS:

- (1) Required data card, however, it may be blank.
- (2) All numeric entries are right justified integers.
- (3) Previously checkpointed case must be resident on mag tape and be accessed via JCL.
- (4) Restart time must be included in the KRASH analysis of the previously checkpointed case.
- (5) Only nonblank when using restart capability to initiate from a preceding analysis that has been saved.
- (6) Format for this card is(A8, 2X, 6I10).

# KRASH INPUT DATA

CARD 0100: CHECKPOINT CONTROL PARAMETERS

DESCRIPTION: Defines identifiers and simulation times for the current KRASH case to checkpoint the analytical results for future restarts.

FORMAT AND EXAMPLE:

| 0       | 1 | 2      | 3         | 4         | 5         | 6         | 7         | 8    |
|---------|---|--------|-----------|-----------|-----------|-----------|-----------|------|
| 1       | 2 | 3      | 4         | 5         | 6         | 7         | 8         | 9    |
| 0       | 1 | 2      | 3         | 4         | 5         | 6         | 7         | 8    |
| 1       | 2 | 3      | 4         | 5         | 6         | 7         | 8         | 9    |
| GASEOUT | X | RUNOUT | MSCOUT(1) | MSCOUT(2) | MSCOUT(3) | MSCOUT(4) | MSCOUT(5) | X    |
| OLEO    |   | 2      | 40        | 80        | 100       | 120       | 150       | 0100 |

FIELD

CONTENTS

CASEOUT Alphanumeric Identifier (Maximum of Eight Characters, Left Justified)

RUNOUT Numeric Identifier

MSCOUT1 Analysis Times at Which Results Will be Saved – Milliseconds

REMARKS:

- (1) Required data card; however, it may be blank.
- (2) All numeric entries are right justified integers.
- (3) JCL must provide mag tape on which results will be saved.
- (4) Only nonblank when data are to be saved. A maximum of five times can be saved per analysis.
- (5) Format for this card is (A8, 2X, 6I10.0).

# KRASH INPUT DATA

CARD 0110: PARAMETERS FOR NUMERICAL INTEGRATION, PLOWING FORCE, ACCELERATION FILTER, AND KRASH EXECUTION MODE

DESCRIPTION: Defines print control, numerical integration time step, analysis time, plowing force time, acceleration filter cutoff frequency, and KRASH execution mode (airplane model and impact condition symmetry).

## FORMAT AND EXAMPLE:

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| DP/DT      | DT         | TMAX       | PLOWT      | FCUT       | RUNMOD     |            |            |            |
| 100        | 0.00001    | 0.120      | 0.0        | 100.0      | 1.0        |            |            | 0110       |

## FIELD

## CONTENTS

DP/DT Multiple of Numerical Integration Time Interval at Which Output Will be Printed, Right Justified Interger

DT Fixed Time Step For Numerical Integration – Seconds

TMAX Maximum Analysis Time – Seconds

PLOWT Analysis Time at Which Plowing Forces Cease – Seconds

FCUT Cutoff Frequency of First-Order Filter Applied to Mass Point Translational Accelerations – Hertz (E10.0 Format)

RUNMOD Flag to Control the Mode of Program Execution as Follows:

| RUNMOD | INPUT DATA SET | DATA SET ANALYZED | AIRPLANE MODEL | IMPACT CONDITIONS |
|--------|----------------|-------------------|----------------|-------------------|
| 0.     | Full Airplane  | Full Airplane     | Unsymmetrical  | Unsymmetrical     |
| 1.     | Half Airplane  | Half Airplane     | Symmetrical    | Symmetrical       |
| 2.*    | Half Airplane  | Full Airplane     | Symmetrical    | Unsymmetrical     |

\*See remark (5)

## REMARKS:

- (1) Required data card.
- (2) 'DP/DT', 'DT', 'TMAX', and 'RUNMOD' are required inputs.
- (3) Blank entries are read as zero.
- (4) Entries requiring scientific notation (X.XEXX) should be right justified.
- (5) For RUNMOD = 2, image mass number = 100 + mass number.
- (6) Suitable values for 'DT' range from 0.00001 to 0.001 seconds. A rule of thumb for selecting a final integration value is the following:  
 $DT \leq 0.01 / \text{Max. Computed Beam Frequency (Hz)}$
- (7) Nonzero plowing forces act from time = 0 to time = 'PLOWT'. For time > 'PLOWT' the plowing forces are set to zero.
- (8) Suitable values for 'FCUT' range from fifty to eighty-five percent of the actual test filter cutoff frequency. Eighty-five percent is commonly used.
- (9) Format for this card is (110, 5E10.0).

# KRASH INPUT DATA

## CARD 0120:    VARIABLE INTEGRATION PARAMETERS

DESCRIPTION:    Define parameters for numerical integration with variable time step.

## FORMAT AND EXAMPLE:

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| IVAR       | EL         | EU         | RATMIN     | RATMAX     |            |            |            |            |
| 1          | 0.01       | 0.10       | 0.6        | 2.0        |            |            |            | 0120       |

## FIELD                      CONTENTS

IVAR                      Flag For Type of Numerical Integration With Variable Time Step as Follows (Right Justified Integer):

| IVAR | TYPE OF NUMERICAL INTEGRATION WITH VARIABLE TIME STEP                   |
|------|-------------------------------------------------------------------------|
| 0    | None                                                                    |
| 1    | Tolerance Based on Six Linear and Angular Velocities of Each Mass Point |
| 2    | Tolerance Based on Energy                                               |

EL                      Maximum Tolerance

EU                      Minimum Tolerance

RATMIN              Integration Time Step Factor if Tolerance > 'EU'

RATMAX              Integration Time Step Factor if Tolerance < 'EL'

- REMARKS:
- (1) Required data card, but it should be blank as the variable integration algorithm is not currently operational.
  - (2) Blank entries are read as zero.
  - (3) Format for this card is (I10, 4E10.0).

# KRASH INPUT DATA

## CARD 0130:     PRINT OUTPUT CONTROL

DESCRIPTION:     Defines flags to control the printout of results, KRASH model size parameters, and allowable errors in energy for terminating the analysis.

## FORMAT AND EXAMPLE:

| 0          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 3          |  |  |  |  |  |  |  |  |  | 4          |  |  |  |  |  |  |  |  |  | 5          |  |  |  |  |  |  |  |  |  | 6          |  |  |  |  |  |  |  |  |  | 7          |  |  |  |  |  |  |  |  |  | 8          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|------|--|--|--|--|--|--|--|--|--|
| 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| NSF        |  |  |  |  |  |  |  |  |  | NTF        |  |  |  |  |  |  |  |  |  | NDE        |  |  |  |  |  |  |  |  |  | NSPD       |  |  |  |  |  |  |  |  |  | NED        |  |  |  |  |  |  |  |  |  | NS         |  |  |  |  |  |  |  |  |  | NRP        |  |  |  |  |  |  |  |  |  | NIMP       |  |  |  |  |  |  |  |  |  | NBC        |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 0130 |  |  |  |  |  |  |  |  |  |

## FIELD

## CONTENTS

|      |                                                                                                     |
|------|-----------------------------------------------------------------------------------------------------|
| NSF  | Flag For Printout of Beam Element Strain Forces                                                     |
| NTF  | Flag For Printout of Beam Element Total Forces – Strain and Damping                                 |
| NDE  | Flag For Printout of Beam Element Deflections                                                       |
| NSPD | Flag For Printout of External Crushing Spring Loads and Deflections                                 |
| NED  | Flag For Printout of Energy Distribution Per Mass Point, Beam Element, and External Crushing Spring |
| NS   | Flag For Printout of Beam Element Stresses                                                          |
| NRP  | Flag For Printout of Mass Point Displacement, Velocity, and Accelerations                           |
| NIMP | Flag For Printout of Mass Impulses                                                                  |
| NBC  | Flag For Printout of Beam Component Loads                                                           |

## REMARKS:

- (1) Required data card; however, it may be blank.
- (2) All entries are right justified integers.
- (3) Blank entries are read as zero.
- (4) Print control flags: 0 = No, 1 = Yes.
- (5) At time zero or the first time cut of a restart, all print will be output regardless of the entries on this card.
- (6) Format for this card is 8I5.

## KRASH INPUT DATA

**CARD 0140: PRINTER PLOT CONTROL PARAMETERS**

**DESCRIPTION:** Defines the type and number of time history printer plots and defines the number of mass point position (structure deformation) printer plots.

**FORMAT AND EXAMPLE:**

|            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|-------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|------|--|--|--|--|--|--|--|--|--|
| 0          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 3          |  |  |  |  |  |  |  |  |  | 4          |  |  |  |  |  |  |  |  |  | 5          |  |  |  |  |  |  |  |  |  | 6          |  |  |  |  |  |  |  |  |  | 7          |  |  |  |  |  |  |  |  |  | 8          |  |  |  |  |  |  |  |  |  |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  |       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| NMEP       |  |  |  |  |  |  |  |  |  | NNEP       |  |  |  |  |  |  |  |  |  | NBFP       |  |  |  |  |  |  |  |  |  | NBDP       |  |  |  |  |  |  |  |  |  | NSTP       |  |  |  |  |  |  |  |  |  | NSEP       |  |  |  |  |  |  |  |  |  | NENP       |  |  |  |  |  |  |  |  |  | NDRP       |  |  |  |  |  |  |  |  |  | NPLT       |  |  |  |  |  |  |  |  |  | NPFCT |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| 21         |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 3          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 20    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 0140 |  |  |  |  |  |  |  |  |  |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                              |
|--------------|--------------------------------------------------------------------------------------------------------------|
| NMEP         | Number of Mass Points Having Time History Printer Plots Per 3900-Series Cards                                |
| NNEP         | Number of Massless Node Points Having Time History Printer Plots Per 4000-Series Cards                       |
| NBFP         | Number of Beam Elements Having Load Time History Printer Plots Per 4100-Series Cards                         |
| NBDP         | Number of Beam Elements Having Deflection Time History Printer Plots Per 4200-Series Cards                   |
| NSTP         | Number of Beam Elements Having Stress Time History Printer Plots Per 4300-Series Cards                       |
| NSEP         | Number of External Crushing Springs Having Time History Printer Plots Per 4400-Series Cards                  |
| NENP         | Number of Beam Elements Having Strain and/or Damping Energy Time History Printer Plots Per 4500-Series Cards |
| NDRP         | Number of DRI Mass Points Having Time History Printer Plots Per 4600-Series Cards                            |
| NPLT         | Number of Mass Point Position (Structure Deformation) Printer Plots Per 3700/3800-Series Cards               |
| NPFCT        | Print Time Factor For Which Mass Point Position (Structure Deformation) Plots Are Generated                  |

REMARKS:

- (1) Required data card; however, it may be blank.
- (2) All entries are right justified integers.
- (3) Blank entries are read as zero.
- (4) Blank or zero entries do not generate printer plots.
- (5) Mass position plots occur at time = 0, and at intervals equal to  $NPFCT \times DP/DT \times DT$ .
- (6) Format for this card is 10I5.

## KRASH INPUT DATA

CARD 0150: INITIAL AIRPLANE LINEAR VELOCITIES

**DESCRIPTION:** Defines the initial airplane linear velocity components with respect to the ground coordinate system.

**FORMAT AND EXAMPLE:**

|             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |
|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|--|
| 0           |  |  |  |  |  |  |  |  |  | 1           |  |  |  |  |  |  |  |  |  | 2           |  |  |  |  |  |  |  |  |  | 3           |  |  |  |  |  |  |  |  |  | 4           |  |  |  |  |  |  |  |  |  | 5           |  |  |  |  |  |  |  |  |  | 6           |  |  |  |  |  |  |  |  |  | 7           |  |  |  |  |  |  |  |  |  | 8           |  |  |  |  |  |  |  |  |  |
| 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |  |
| XGDOT       |  |  |  |  |  |  |  |  |  | YGDOT       |  |  |  |  |  |  |  |  |  | ZGDOT       |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |
| 0.0         |  |  |  |  |  |  |  |  |  | 0.0         |  |  |  |  |  |  |  |  |  | 360.0       |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |  | 0150        |  |  |  |  |  |  |  |  |  |

| <u>FIELD</u> | <u>CONTENTS</u>                                             |
|--------------|-------------------------------------------------------------|
| XGDOT        | Initial Fore-and-Aft Velocity of Airplane, Positive Forward |
| YGDOT        | Initial Lateral Velocity of Airplane, Positive Right        |
| ZGDOT        | Initial Vertical Velocity of Airplane, Positive Down        |

## REMARKS:

- (1) Required data cards; however, it may be blank.
- (2) Velocity units are inches per second.
- (3) Blank entries are read as zero.
- (4) Entries requiring scientific notation (X.XE~~XX~~) should be right justified.
- (5) Format for this card is 3E10.0.

# KRASH INPUT DATA

## CARD 0160: INITIAL AIRPLANE ANGULAR VELOCITIES

DESCRIPTION: Defines the initial airplane angular velocity components with respect to the ground coordinate system.

## FORMAT AND EXAMPLE:

| 0   | 1   | 2     | 3 | 4 | 5 | 6 | 7 | 8    |
|-----|-----|-------|---|---|---|---|---|------|
| 1   | 2   | 3     | 4 | 5 | 6 | 7 | 8 | 9    |
| 0   | 1   | 2     | 3 | 4 | 5 | 6 | 7 | 8    |
| 1   | 2   | 3     | 4 | 5 | 6 | 7 | 8 | 9    |
| PPR | QPR | RPR   |   |   |   |   |   |      |
| 0.0 | 0.0 | 0.012 |   |   |   |   |   | 0160 |

## FIELD

## CONTENTS

PPR Initial Airplane Roll Velocity, Positive Right Wing Down  
 QPR Initial Airplane Pitch Velocity, Positive Nose Up  
 RPR Initial Airplane Yaw Velocity, Positive Nose Right

## REMARKS:

- (1) Required data card; however, it may be blank.
- (2) Angular velocity units are radians per second.
- (3) Blank entries are read as zero.
- (4) Entries requiring scientific notation (X.XEXX) should be right justified.
- (5) Format for this card is 3E10.0.

# KRASH INPUT DATA

## CARD 0170: MISCELLANEOUS AIRPLANE INITIAL CONDITIONS

DESCRIPTION: Defines the initial airplane attitude Euler angles and the initial airplane linear position with respect to the ground coordinate system and defines the ground plane slope angle.

### FORMAT AND EXAMPLE:

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| PHIPR      | THEPR      | PSIPR      | XGIN       | ZGIN       | BETA       | RHO        | X          |            |
| 0.0        | 0.001      | 0.0        | 0.0        | 0.0        | 45.0       | 1.1463E-07 |            | 0170       |

### FIELD

### CONTENTS

PHIPR Initial Airplane Roll Euler Angle, Positive Right Wind Down – Radians  
 THEPR Initial Airplane Pitch Euler Angle, Positive Nose Up – Radians  
 PSIPR Initial Airplane Yaw Euler Angle, Positive Nose Right – Radians  
 XGIN Fore-and-Aft Distance of Airplane Initial CG Position Relative to the Basic Position  
 Calculated in the Initial Condition Subroutine, Positive Aft – Inches  
 ZGIN Vertical Distance of Airplane Initial CG Position Relative to the Basic Position  
 Calculated in the Initial Condition Subroutine, Positive Up – Inches  
 BETA Ground Plane Slope Angle, Positive Up – Degrees  
 RHO Air Density Used for Calculating Aerodynamic Loads (NAERO ≠ 0), Pound-Sec<sup>2</sup>/In<sup>4</sup>

### REMARKS:

- (1) Required data card; however, it may be blank.
- (2) Blank entries are read as zero.
- (3) Normally, 'XGIN' and 'ZGIN' are input as zero and the KRASH initial conditions subroutine positions the airplane relative to ground.
- (4) If it is desired to have the airplane impact only on the slope and not on the horizontal ground, a large value of ZGIN may be input (1000 inches). This will move the airplane upward ZGIN above the horizontal ground, and simultaneously move it forward so that it is almost contacting the slope. The normal initial position for the airplane is wedged into the juncture of the horizontal ground and the slope as explained in Volume I, Section 1.3.15.
- (5) Values of 'BETA' range from zero to ninety degrees (horizontal to vertical impact surfaces).
- (6) Entries requiring scientific notation (X.XEXX) should be right justified.
- (7) If NSP = 0 (no external springs), ZGIN is the distance from the ground plane to the airplane CG, positive up.
- (8) Formats for this card is 7E10.0.

# KRASH INPUT DATA

CARDS 0200: MASS POINT DATA

DESCRIPTION: Defines the weight, location coordinates, and mass moments of inertia for each of the mass points in the KRASH model.

FORMAT AND EXAMPLE:

| 0     | 1    | 2    | 3    | 4    | 5   | 6    | 7  | 8    |
|-------|------|------|------|------|-----|------|----|------|
| 1     | 2    | 3    | 4    | 5    | 6   | 7    | 8  | 9    |
| 0     | 1    | 2    | 3    | 4    | 5   | 6    | 7  | 8    |
| 1     | 2    | 3    | 4    | 5    | 6   | 7    | 8  | 9    |
| WGT   | XDP  | YDP  | ZDP  | XI   | YI  | ZI   | ID |      |
| 103.0 | 50 0 | 20.0 | 33.0 | 12.5 | 3.7 | 12.5 | 21 | 0200 |

## FIELD

## CONTENTS

WGT Weight – Pounds  
 XDP Fuselage Station Coordinate, Positive Aft – Inches  
 YDP Buttline Coordinate, Positive Left – Inches  
 ZDP Waterline Coordinate, Positive Up – Inches  
 XI Roll Mass Moment of Inertia – Inch \* Pound \* Second\*\*2  
 YI Pitch Mass Moment of Inertia – Inch \* Pound \* Second\*\*2  
 ZI Yaw Mass Moment of Inertia – Inch \* Pound \* Second\*\*2  
 ID Mass Point Number

## REMARKS:

- (1) 'NM' on card 0040 specifies the number of these cards for input.
- (2) The order of these cards determines the mass point number.
- (3) Blank entries are read as zero.
- (4) The location coordinates are defined in a left-handed coordinate system.
- (5) At least one of the three mass moments of inertia must be nonzero.
- (6) Mass moment of inertia cross products may be defined on the 3100-series of cards.
- (7) Entries requiring scientific notation (X.XEXX) should be right justified.
- (8) Mass point number (ID) must be greater than zero or less than 100. Mass numbers must be unique and can be input in any order. If ID for any mass point is left blank, all mass points will automatically be numbered sequentially in the order of input.
- (9) For RUNMOD = 2, the Image mass point number will equal the mass point number plus 100.
- (10) Formats for this card is 7E10.0, I2.

# **KRASH INPUT DATA**

**CARDS 0300:** MASSLESS NODE POINT DATA

**DESCRIPTION:** Defines for each of the massless node points in the KRASH model the location coordinates and the mass point number to which each is rigidly attached.

**FORMAT AND EXAMPLE:**

| 0           |  |  |     |  |  |       |  |  | 1           |  |  |       |  |  |                                                                                   |  |  | 2                                                                                  |  |  |                                                                                     |  |  |                                                                                     |  |  | 3                                                                                   |  |  |  |  |  |      |  |  | 4           |  |  |  |  |  |  |  |  | 5           |  |  |  |  |  |  |  |  | 6           |  |  |  |  |  |  |  |  | 7           |  |  |  |  |  |  |  |  | 8           |  |  |  |  |  |  |  |  |
|-------------|--|--|-----|--|--|-------|--|--|-------------|--|--|-------|--|--|-----------------------------------------------------------------------------------|--|--|------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|--|--|--|--|--|------|--|--|-------------|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|--|
| 12345678901 |  |  |     |  |  |       |  |  | 12345678901 |  |  |       |  |  |                                                                                   |  |  | 12345678901                                                                        |  |  |                                                                                     |  |  |                                                                                     |  |  | 12345678901                                                                         |  |  |  |  |  |      |  |  | 12345678901 |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |  |
| MNP         |  |  | INP |  |  | XNPDP |  |  | YNPDP       |  |  | ZNPDP |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |
| 1           |  |  | 12  |  |  | 10.0  |  |  | -12.0       |  |  | 33.0  |  |  |                                                                                   |  |  |                                                                                    |  |  |                                                                                     |  |  |                                                                                     |  |  |                                                                                     |  |  |  |  |  | 0300 |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |  |

## **FIELD**

## **CONTENTS**

MNP Massless Node Point Number (Right Justified Integer)  
 INP Mass Point Number (Right Justified Integer)  
 XNPDP Fuselage Station Coordinate, Positive Aft — Inches  
 YNPDP Buttline Coordinate, Positive Left — Inches  
 ZNPDP Waterline Coordinate, Positive Up — Inches

## **REMARKS:**

- (1) Optional data card(s).
- (2) 'NMP' on card 0040 specifies the number of these cards for input.
- (3) 'MNP' and 'INP' must be nonzero.
- (4) Blank entries are read as zero.
- (5) The massless node point number is determined by taking each mass point and numbering the node points attached to it 1, 2, 3, . . . etc. There is no limit on the number of node points that may be connected to a single mass point.
- (6) The location coordinates are defined in a left-handed coordinate system.
- (7) User should not place a node point on the center line for a RUNMOD = 2 condition. Program will not generate a connection across this point. User can place node point slightly off center, if necessary.
- (8) Generally used to model regions wherein rigid connections exist (i.e., seat, engine) or where multiple behavior is being represented by different elements.
- (9) Entries requiring scientific notation (X.XEXX) must be right justified.
- (10) Format for this card is (2I5, 3E10.0).

## KRASH INPUT DATA

## CARDS 0400: ACCELERATION TRANSFER DATA

**DESCRIPTION:** Defines the correspondence between mass/node point numbers from a previous model for which acceleration data was saved, and the current model which is to use the acceleration data as input forcing functions.

**FORMAT AND EXAMPLE:**

|       |       |       |       |       |       |      |   |      |
|-------|-------|-------|-------|-------|-------|------|---|------|
| 0     | 1     | 2     | 3     | 4     | 5     | 6    | 7 | 8    |
| 1     | 2     | 3     | 4     | 5     | 6     | 7    | 8 | 9    |
| ISNEW | MSNEW | LSNEW | ISOLD | MSOLD | LSOLD | TSH  |   |      |
| 3     |       | 4     | 6     | 3     | 4     | .003 |   | 0400 |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISNEW        | Mass Number in Current (New) Model That Will be Driven by an Acceleration Table Saved in Data Set DSA (defined in JCL)                                                                                                                                                                                                                                                                                                                                                                                                |
| (MSNEW)      | Not Used (Coding Does Not Allow Driving a Node Point With an Input Acceleration)                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| LSNEW        | Direction for Which Table-Read From Data Set DSA Will Drive Mass ISNEW<br><div style="margin-left: 40px;">           LSNEW:    1 = XACCEL            4 = PDOT<br/>                     2 = YACCEL           5 = QDOT<br/>                     3 = ZACCEL           6 = RDOT         </div>                                                                                                                                                                                                                            |
| ISOLD        | Mass Number in Previous (OLD) Model, The Acceleration From Which Will be Used to Drive Mass ISNEW in The Current Model                                                                                                                                                                                                                                                                                                                                                                                                |
| MSOLD        | Node Point Number in Previous (OLD) Model. Coding Allows Driving a Mass in The Current Model With an Acceleration From a Node Point in The Previous Model                                                                                                                                                                                                                                                                                                                                                             |
| LSOLD        | Direction of Acceleration Saved in Prior Model to be Used to Drive the Current Model. It is Not Necessary for LSOLD = LSNEW; i.e., an XACCEL From a Previous Model Can Drive a ZACCEL in The Current Model<br><div style="margin-left: 40px;">           LSOLD:    1 = XACCEL            4 = PDOT            7 = XACC FILTERED<br/>                     2 = YACCEL           5 = QDOT            8 = YACC FILTERED<br/>                     3 = ZACCEL           6 = RDOT            9 = ZACC FILTERED         </div> |
| TSH          | Time Shift Applied to Data From Previous Model (Stored in DSA) Before Using in Current Model. This Allows User to Apply a "Downstream" Response From Previous Model as Input to The Current Model, Which Starts at t = 0                                                                                                                                                                                                                                                                                              |

$$t_{\text{NEW}} = t_{\text{OLD}} - \text{TSH}$$

- REMARKS:**
- (1) Optional data card(s).
  - (2) NTAB on card 0070 specifies the number of these cards for input.
  - (3) Data set DSA, generated from a previous run, must be in the user's data file in order to use the acceleration transfer data. The actual data set name for DSA is specified in the JCL.
  - (4) A different TSH can be specified for each table used.
  - (5) Filtered accelerations from a previous model can be used to drive the current model. (LSOLD = 7, 8 or 9).
  - (6) Format for this card is (6I5, IE10.0).

# KRASH INPUT DATA

CARDS 0500: MASS ACCELERATION SAVE PARAMETERS

DESCRIPTION: Defines mass numbers and directions for saving acceleration time-history data.

FORMAT AND EXAMPLE:

| 0                                                                                 |      | 1          |      | 2          |      | 3          |      | 4          |      | 5          |  | 6          |  | 7          |  | 8          |      |
|-----------------------------------------------------------------------------------|------|------------|------|------------|------|------------|------|------------|------|------------|--|------------|--|------------|--|------------|------|
| 1234567890                                                                        |      | 1234567890 |      | 1234567890 |      | 1234567890 |      | 1234567890 |      | 1234567890 |  | 1234567890 |  | 1234567890 |  | 1234567890 |      |
|  | ISAV | MFL1       | MFL2 | MFL3       | MFL4 | MFL5       | MFL6 | MFL7       | MFL8 | MFL9       |  |            |  |            |  |            |      |
|                                                                                   | 15   | 0          | 0    | 1          | 0    | 1          | 1    | 0          | 1    | 0          |  |            |  |            |  |            | 0500 |

## FIELD

## CONTENTS

ISAV Mass Number For Which Acceleration Data From Current Run Will be Stored in User's Data File in Data Set DSB

MFL1 – Flags Defining For Which Directions (1-9) Acceleration Data is to be Saved in Data Set DSB.

MFL9 Input Either 1 or 0 for Each Item; 1 Denotes Save The Acceleration Time-History For The Indicated Direction. Directions 1-9 Correspond to The Description of LSOLD on Cards 0400.

## REMARKS:

- (1) Optional data card(s).
- (2) NMSAV on Card 0080 specifies the number of these cards for input.
- (3) Date set DSB is specified in the JCL.
- (4) The acceleration data is saved at time intervals of NDTSAB, specified on Card 80.
- (5) NWRFLG on Card 80 must be nonzero to write the acceleration data into date set DSB.
- (6) Format for this card is (5X, 10I5).

## KRASH INPUT DATA

CARDS 0600:      **NODE POINT ACCELERATION SAVE PARAMETERS**

DESCRIPTION:      Defines node point numbers and directions for saving acceleration time-history data.

FORMAT AND EXAMPLE:

| 0          |        | 1          |       | 2          |       | 3          |       | 4          |       | 5          |  | 6          |  | 7          |  | 8           |
|------------|--------|------------|-------|------------|-------|------------|-------|------------|-------|------------|--|------------|--|------------|--|-------------|
| 1234567890 |        | 1234567890 |       | 1234567890 |       | 1234567890 |       | 1234567890 |       | 1234567890 |  | 1234567890 |  | 1234567890 |  | 1234567890  |
| MNPSAV     | INPSAV | NPFL1      | NPFL2 | NPFL3      | NPFL4 | NPFL5      | NPFL6 | NPFL7      | NPFL8 | NPFL9      |  |            |  |            |  |             |
| 3          | 15     | 0          | 0     | 1          | 0     | 1          | 1     | 0          | 1     | 0          |  |            |  |            |  | <b>0600</b> |

### FIELD

### CONTENTS

ISAV,  
MNPSAV  
NPFL1—  
NPFL9

Mass and Node Point Number for Which Acceleration Data From Current Run Will be Stored in User's Data File in Data Set DSB  
Flags Defining for Which Directions (1-9) Acceleration Data is to be Saved in Data Set DSB.  
Input Either 1 or 0 for Each Item; 1 Denotes Save The Acceleration Time-History for The Indicated Direction. Directions 1-9 Correspond to The Description of LSOLD on Cards 0400.

### REMARKS:

- (1) Optional data card(s).
- (2) NNPSAV on Card 0080 specifies the number of these cards for input.
- (3) Date set DSB is specified in the JCL.
- (4) The acceleration data are saved at time intervals of NDTSAB, specified on Card 80.
- (5) NWRFLG on Card 80 must be nonzero to write the acceleration data into date set DSB.
- (6) Format for this card is 1115.

## KRASH INPUT DATA

CARDS 0700: EXTERNAL CRUSHING SPRING PARAMETERS

**DESCRIPTION:** Defines the attach point, direction, length, ground coefficient of friction, bottoming spring rate, plowing force, and ground flexibility for each of the external crushing springs in the KRASH model.

**FORMAT AND EXAMPLE:**

[illegible]

| <u>FIELD</u>    | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M               | Massless Node Point Number (Right Justified Integer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| I               | Mass Point Number (Right Justified Integer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| K               | Degree-of-Freedom in Which External Crushing Spring Acts Where 1, 2, 3 Correspond to the X, Y, Z Directions in the Mass Point Coordinate System (Right Justified Integer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| XLBAR           | Free Length of Spring Either Positive or Negative in the Mass Point Coordinate System — Inches                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| XMU             | Impact Surface Coefficient of Friction. Values of Between 0.35 to 0.60 are Appropriate For Structure to Ground Contact.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| XKE             | Bottoming Spring Rate — Pounds Per Inch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| FPLOW           | Plowing Force — Pounds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| GFLEX           | Impact Surface Flexibility — Inches Per Pound                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ITIRE           | Defines spring that remains normal to contact surface                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <u>REMARKS:</u> | <ol style="list-style-type: none"> <li>(1) Optional data card(s).</li> <li>(2) 'NSP' on card 0040 specifies the number of these cards for input.</li> <li>(3) Blank entries are read as zero.</li> <li>(4) The free length of the external crushing spring is arbitrary; however, the value generally represents the actual depth of the crushable structure.</li> <li>(5) A value of zero for the impact surface flexibility (GFLEX) represents a rigid surface. A flexibility value of 0.00036 in/lb is an approximate representation in KRASH for soil. having a CBR <math>\approx 4</math> and moisture content of <math>\approx 30</math> percent.</li> <li>(6) Entries requiring scientific notation (X.XE<sup>XX</sup>) must be right justified.</li> <li>(7) If ITIRE = 1 external spring remains normal to contact surface. Use only for tire representation in K = 3 direction. If Beta &gt; 0 tire spring remains normal to sloped surface. Not coded to account for transition from flat to sloped surface.</li> <li>(8) Format for this card is (I2, I3, I5, 5E10.0, I5).</li> </ol> |

# KRASH INPUT DATA

CARDS 0800: EXTERNAL CRUSHING SPRING LOAD-DEFLECTION AND DAMPING PARAMETERS

DESCRIPTION: Defines four deflection points, two load values and one damping value for each external crushing spring in the KRASH model.


FORMAT AND EXAMPLE:

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8         |
|-------------|------------|------------|------------|------------|------------|------------|------------|-----------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 234567890 |
| SI          | SA         | SB         | SF         | FSPOI      | FSPDF      | CDAMP      | X          |           |
| 0.1         | 1.0        | 3.5        | 5.0        | 10000.0    | 25000.0    | .08        |            | 0800      |

## FIELD                      CONTENTS

SI                      Deflection Point at Which First Linear Region Ends and First Nonlinear Region Begins – Inches  
SA                      Deflection Point at Which First Nonlinear Region Ends and Second Linear Region Begins – Inches  
SB                      Deflection Point at Which Second Linear Region Ends and Second Nonlinear Region Begins – Inches  
SF                      Deflection Point at Which Second Nonlinear Region Ends and Linear Bottoming Begins – Inches  
FSPOI                  Constant Load Between Deflection Points SI and SA – Pounds  
FSPOF                  Constant Load Between Deflection Points SB and SF – Pounds  
CDAMP                  Critical Damping Ratio. Acceptable Range is .02 to .10

- REMARKS:
- (1) 'NSP' on card 0040 specifies the number of these cards for input.
  - (2) These load-deflection cards must be ordered to correspond with the 0700-series cards of external crushing spring data.
  - (3) The general shape of the load-deflection curve is as follows:

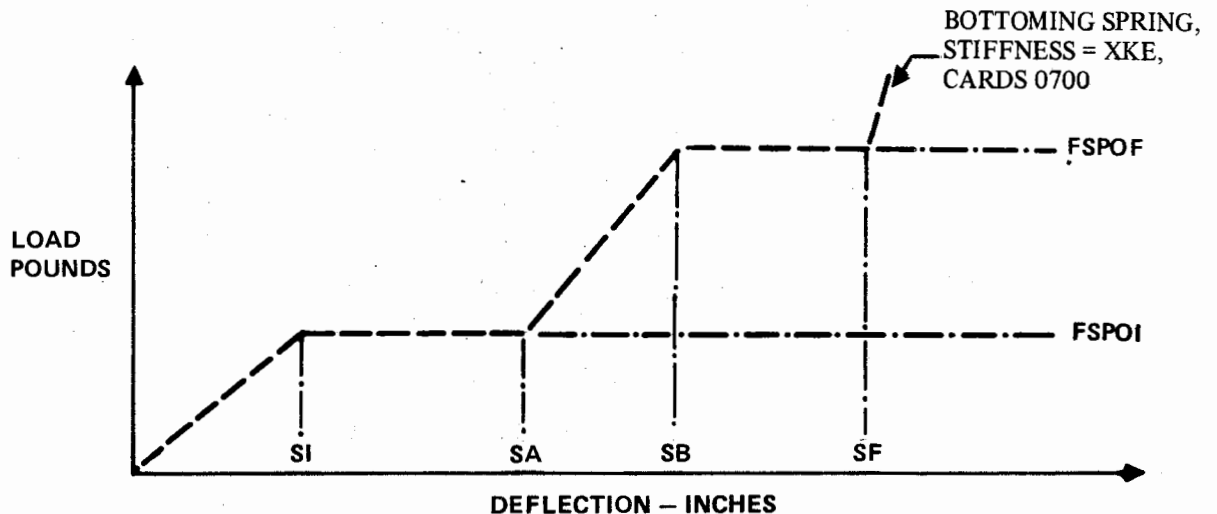

## KRASH INPUT DATA

### CARDS 0800: EXTERNAL CRUSHING SPRING LOAD-DEFLECTION AND DAMPING PARAMETERS (Continued)

- (4) External spring damping in program KRASH is computed as:

$$2 * CDAMP * \sqrt{(FSPOI/SI) * WGT / 386.4}$$

where WGT is the weight for mass i.

- (5) Entries requiring scientific notation (X.XEXX) should be right justified.  
(6) Format for this card is 7E10.0.

# KRASH INPUT DATA

CARDS 0900: BEAM ELEMENT PROPERTIES

DESCRIPTION: Defines the end points and cross-sectional properties for each beam element in the KRASH model.

FORMAT AND EXAMPLE:

| 0           |   |   |   | 1          |  |  |  | 2          |  |  |  | 3          |  |  |  | 4          |  |  |  | 5          |  |  |  | 6          |     |    |     | 7          |  |  |  | 8 |  |  |  |
|-------------|---|---|---|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|-----|----|-----|------------|--|--|--|---|--|--|--|
| 12345678901 |   |   |   | 2345678901 |  |  |  | 2345678901 |  |  |  | 2345678901 |  |  |  | 2345678901 |  |  |  | 2345678901 |  |  |  | 2345678901 |     |    |     | 2345678901 |  |  |  |   |  |  |  |
| M           | I | N | J | AA         |  |  |  | XJ         |  |  |  | IYY        |  |  |  | IZZ        |  |  |  | XIQ        |  |  |  | Z1         | Z2  | MC |     |            |  |  |  |   |  |  |  |
|             | 2 | 1 | 5 | 0.5        |  |  |  | 0.0        |  |  |  | 3.67       |  |  |  | 1.54       |  |  |  | 0.0        |  |  |  | 0.0        | 0.0 | 4  | 900 |            |  |  |  |   |  |  |  |

## FIELD

## CONTENTS

|     |                                                                                                       |
|-----|-------------------------------------------------------------------------------------------------------|
| M   | Massless Node Point Number At End "I" (Right Justified Integer)                                       |
| I   | Mass Point Number At End "I" (Right Justified Integer)                                                |
| N   | Massless Node Point Number at End "J" (Right Justified Integer)                                       |
| J   | Mass Point Number At End "J" (Right Justified Integer)                                                |
| AA  | Cross-Sectional Area — Inches**2.                                                                     |
| XJ  | Torsional Stiffness Inertia — Inches**4                                                               |
| IYY | Cross-Sectional Area Moment of Inertia About Beam Element Y-Axis For Bending In X-Z Plane — Inches**4 |
| IZZ | Cross-Sectional Area Moment Of Inertia About Beam Element Z-Axis For Bending In X-Y Plane — Inches**4 |
| XIQ | Cross-Sectional Shape Factor Relating Torsional Shear Stress To The Applied Moment — 1/Inches**3      |
| Z1  | Distance From The Neutral Axis To The Extreme Fibers In The Beam Element Z-Direction — Inches         |
| Z2  | Distance From The Neutral Axis To The Extreme Fibers In The Beam Element Y-Direction — Inches         |
| MC  | Material Code Number (Right Justified Integer)                                                        |

## REMARKS:

- (1) "NB" on card 0040 specifies the number of these cards for input.
- (2) Blank entries are read as zero.
- (3) At least one beam element must be defined.
- (4) The order of these data cards determines the beam element number.
- (5) If "XJ" is input as zero, KRASH will automatically compute a value for "XJ" as the sum of "IYY" and "IZZ".
- (6) The beam element coordinate system depends on the geometric orientation as shown in Figure 2-5.
- (7) "XIQ", "Z1", and "Z2" are used only for stress calculations (See Section 1.3.17 in Volume I).
- (8) The torsional stress parameter "XIQ" is equal to the shape factor "1/Q" used in Roark's formulas for stress and strain (Reference 4).
- (9) KRASH has ten standard materials internally defined as shown in Table 2-2.
- (10) Entries requiring scientific notation (X.XEXX) should be right justified.
- (11) Format for this card is (2(I2, I3), 5E10.0, 2F5.0, I2).

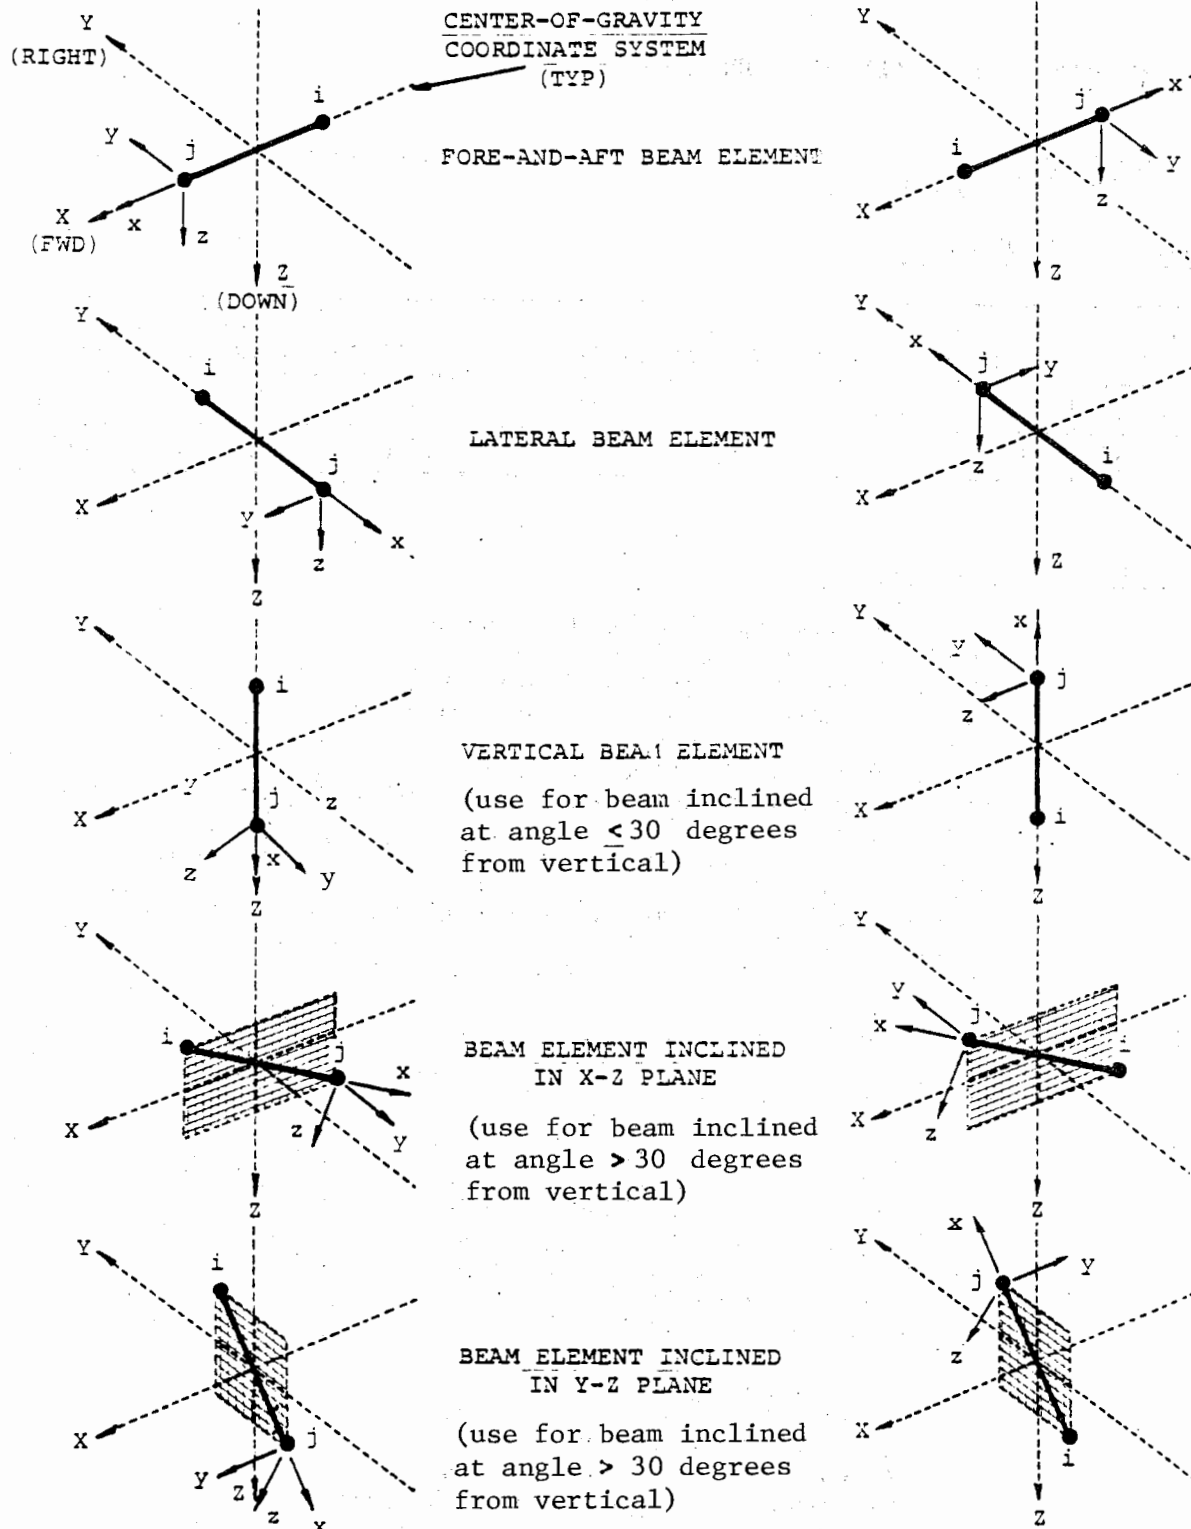


FIGURE 2-5. BEAM ELEMENT COORDINATE SYSTEM ORIENTATIONS

TABLE 2-3. STANDARD MATERIAL PROPERTIES

| MC | MATERIAL                   | MODULUS OF ELASTICITY (PSI) | MODULUS OF RIGIDITY (PSI) | TENSILE STRESS (PSI) | COMPRESSIVE STRESS (PSI) | SHEAR STRESS (PSI) |
|----|----------------------------|-----------------------------|---------------------------|----------------------|--------------------------|--------------------|
| 1  | 4130 STEEL                 | 30.0E6                      | 11.0E6                    | 75000                | 75000                    | 37500              |
| 2  | 6150H STEEL                | 30.0E6                      | 11.0E6                    | 205000               | 205000                   | 80000              |
| 3  | 300-SERIES STAINLESS STEEL | 28.0E6                      | 12.5E6                    | 70000                | 46000                    | 36000              |
| 4  | 2024-T3 ALUMINUM           | 10.5E6                      | 4.0E6                     | 47000                | 39000                    | 22000              |
| 5  | 6061-T3 ALUMINUM           | 10.0E6                      | 3.8E6                     | 35000                | 34000                    | 17000              |
| 6  | 8195-T4 CAST ALUMINUM      | 10.0E6                      | 3.8E6                     | 16000                | 16000                    | 17000              |
| 7  | LOW MODULUS MATERIAL       | 1.0E6                       | 0.4E6                     | 16000                | 16000                    | 17000              |
| 8  | ZERO TORSION MATERIAL      | 1.0E6                       | 0.0                       | 16000                | 16000                    | 17000              |
| 9  | DRI SPINE (MAN)            | 1.0E6                       | 0.4E6                     | 16000                | 16000                    | 17000              |
| 10 | DRI SPINE (DRI)            | 1.0E6                       | 0.4E6                     | 16000                | 16000                    | 17000              |

### KRASH INPUT DATA.

CARDS 1000: NON-STANDARD MATERIAL PROPERTIES

**DESCRIPTION:** Defines non-standard material properties for beam elements in the **KRASH** model.

**FORMAT AND EXAMPLE.**

[illegible]

| <u>FIELD</u> | <u>CONTENTS</u>                                            |
|--------------|------------------------------------------------------------|
| MC           | Material Code Number, MC = 11-20 (Right Justified Integer) |
| EE           | Modulus Of Elasticity – Pounds Per Inch**2                 |
| GG           | Modulus Of Rigidity – Pounds Per Inch**2                   |
| STENS        | Tensile Yield Stress – Pounds Per Inch**2                  |
| SCUMP        | Compressive Yield Stress – Pounds Per Inch**2              |
| SHEAR        | Shear Stress – Pounds Per Inch**2                          |

## REMARKS

- (1) Optional data card(s).
- (2) "NMTL" on card 0040 specifies the number of these cards for input.
- (3) Blank entries are read as zero.
- (4) The yield stress properties are required when stress calculations are desired.
- (5) The standard materials available in KRASH are listed in Table 2-2.
- (6) Entries requiring scientific notation (X.XE<sup>XX</sup>) should be right justified.
- (7) Format for this card is (I5, 5X, 5E10.0).

# KRASH INPUT DATA

CARDS 1100: BEAM ELEMENT PINNED END CONDITIONS

DESCRIPTION: Defines the end points and the degrees-of-freedom for the beam elements with pinned end conditions in the KRASH model.

FORMAT AND EXAMPLE:

| 0 |   | 1 |   | 2   |     | 3   |     | 4    |   | 5    |   | 6     |   | 7     |   | 8 |   |      |   |
|---|---|---|---|-----|-----|-----|-----|------|---|------|---|-------|---|-------|---|---|---|------|---|
| 1 | 2 | 3 | 4 | 5   | 6   | 7   | 8   | 9    | 0 | 1    | 2 | 3     | 4 | 5     | 6 | 7 | 8 | 9    | 0 |
| M | I | N | J | PYI | PZI | PYJ | PZJ | SF35 |   | SF26 |   | SF35J |   | SF26J |   | X |   |      |   |
|   | 2 | 6 | 0 | 0   | 1   | 0   | 1.0 | 1.5  |   | 1.2  |   |       |   | 1.0   |   |   |   | 1100 |   |

FIELD CONTENTS

M Massless Node Point Number At End "I"  
I Mass Point Number At End "I"  
N Massless Node Point Number At End "J"  
J Mass Point Number At End "J"  
PYI Pin Flag For Bending Moment About Beam Element Y-Axis At End "I"  
PZI Pin Flag For Bending Moment About Beam Element Z-Axis At End "I"  
PYJ Pin Flag For Bending Moment About Beam Element Y-Axis At End "J"  
PZJ Pin Flag For Bending Moment About Beam Element Z-Axis At End "J"  
SF35 Beam Shape Factor At End "I" About Beam Y-Axis  
SF26 Beam Shape Factor At End "I", About Beam Z-Axis  
SF35J Beam Shape Factor At End "J" About Beam Y-Axis  
SF26J Beam Shape Factor At End "J" About Beam Z-Axis

REMARKS:

- (1) Optional data card(s).
- (2) "NPIN" on card 0040 specifies the number of these cards for input.
- (3) The pin flags are defined as follows:  
0 = Fixed  
1 = Pinned
- (4) Blank entries are read as zero.
- (5) All entries except SF26, SF35, SF26J and SF35J are right justified integers.  
SF26, SF35, SF26J and SF35J are E10.0 format.
- (6) The beam element Y- and Z-axis directions depend on the beam element geometric orientation as shown in Figure 2-3.
- (7) Bending moments about the beam element Y- and Z-axes correspond to bending moments in the beam element X-Z and X-Y planes, respectively, as outlined in Table 2-3.
- (8) All entries requiring scientific notation (X.XEXX) should be right justified.
- (9) Format for this card is (2 (I2, I3), 4I5, 4E10.0).
- (10) Beam shape factors SF26 and SF35, SF26J, and SF35J can be obtained from Table 2-4. and Reference 14.
- (11) SF26, and/or SF35 values are required for representation of plastic hinge at beam end I.
- (12) SF26J and/or SF35J values are required for representation of plastic hinge at beam end J.

NOTE:

The end fixity card is used:

(a) to pin one or both ends of a beam

If a beam end is to be pinned then the desired PY, PZ, PYJ and PZJ flags are used and the SF26, SF35, SF26J and SF35J values are input as zero. The program will treat these beams as not providing for moments at the appropriate end and direction.

(b) to define a beam that can develop a plastic hinge at one or both ends of the beam.

If a plastic hinge is represented the appropriate beam end direction (PY, PZ, PYJ, PZJ) must be flagged and a corresponding (SF35, SF26, SF35J, SF26J) must have a value. The program will treat such a beam as fixed until such time as the plastic moment is formed. Thereafter the beam moment in the noted direction is maintained (no longer changes). In order to use the plastic moment equations the user must have beam section properties Z1 or Z2 (card 0900) defined since KRASH computes the plastic moment as follows:

$$M_p = f \left( \frac{\sigma_y I}{y_{\max}} \right)$$

where

$f$  = shape factor (SF35, SF26, SF35J, SF26J)

$\sigma_y$  = material yield stress (contained in the material code table), lb/in<sup>2</sup>

$I$  = area moment of inertia, either  $I_{yy}$  or  $I_{zz}$ , in<sup>4</sup>

$y_{\max}$  = distance to neutral axis either Z1 or Z2, in

The following table shows the relationship between directional moments and appropriate input terms for program KRASH.

TABLE 2-4. RELATIONSHIP FOR DIRECTIONAL MOMENTS AND INPUT TERMS IN KRASH

| FORCE<br>ALONG<br>AXIS | MOMENT<br>ABOUT<br>AXIS | FORCE,<br>MOMENT<br>DESIGNATION | KRASH<br>DIRECTION<br>NUMBERS | APPROPRIATE INPUT REQUIREMENT                  |                                                                  |              |            |            |            |
|------------------------|-------------------------|---------------------------------|-------------------------------|------------------------------------------------|------------------------------------------------------------------|--------------|------------|------------|------------|
|                        |                         |                                 |                               | AREA<br>MOMENT<br>OF<br>INERTIA<br>(CARD 0900) | DISTANCE FROM<br>N.A. TO ELEMENT<br>EXTREME FIBER<br>(CARD 0900) | SHAPE FACTOR |            | PIN CODING |            |
|                        |                         |                                 |                               |                                                |                                                                  | "i"<br>END   | "j"<br>END | "i"<br>END | "j"<br>END |
| z                      | y                       | $F_z, M_\theta$                 | 3, 5                          | IYY                                            | Z1                                                               | SF35         | SF35J      | PY         | PYJ        |
| y                      | z                       | $F_y, M_\psi$                   | 2, 6                          | IZZ                                            | Z2                                                               | SF26         | SF26J      | PZ         | PZJ        |

TABLE 2-5. SHAPE FACTORS FOR PLASTIC HINGE BEAMS (Reference 14)

| SHAPE                                                                                                                                                                                                                                                                                                                                                                                                                              | SHAPE FACTOR, f<br>(SF35, SF26, SF35J, SF26J)<br>IN PROGRAM KRASH |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                   | 2.37                                                              |
|                                                                                                                                                                                                                                                                                                                                                 | 2.0                                                               |
|                                                                                                                                                                                                                                                                                                                                                 | 1.7                                                               |
|                                                                                                                                                                                                                                                                                                                                                 | 1.5                                                               |
|                                                                                                                                                                                                                                                                                                                                                 | 1.40 $t/d = 10$<br>1.27 $t = 0$                                   |
|                                                                                                                                                                                                                                                                                                                                                 | 1.15     Ranges 1.10 to 1.22                                      |
| <p>0     <math>f = Z/S</math><br/> <math>Z = 2 H_e</math><br/> <math>S = I/Y_{max}</math><br/> where:<br/> I     = Section area moment of inertia<br/> <math>Y_{max}</math>     = Distance from neutral axis to extreme fiber<br/> <math>H_e</math>     = Static moment of half the cross section with respect to the neutral axis<br/> Z     = Plastic modulus<br/> S     = Elastic section modulus<br/> f     = Shape factor</p> |                                                                   |

## KRASH INPUT DATA


CARDS 1200: AXIALLY UNSYMETRIC BEAM ELEMENT PARAMETERS

**DESCRIPTION:** Defines end points, type of load, and deadband for the beam elements with unsymmetrical axial properties in the KRASH model.

**FORMAT AND EXAMPLE:**

[illegible]

| <u>FIELD</u>    | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                             |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M               | Massless Node Point Number At End "I" (Right Justified Integer)                                                                                                                                                                                                                                                             |
| I               | Mass Point Number At End "I" (Right Justified Integer)                                                                                                                                                                                                                                                                      |
| N               | Massless Node Point Number At End "J" (Right Justified Integer)                                                                                                                                                                                                                                                             |
| J               | Mass Point Number At End "J" (Right Justified Integer)                                                                                                                                                                                                                                                                      |
| IJUB            | Flag For The Type Of Axial Loading In The Beam Elements<br>IJUB= +1, Tension Only<br>IJUB= -1, Compression Only                                                                                                                                                                                                             |
| DB              | Deadband for axial loading, inches                                                                                                                                                                                                                                                                                          |
| <u>REMARKS:</u> | <ol style="list-style-type: none"> <li>(1) Optional data card(s).</li> <li>(2) "NUB" on card 0040 specifies the number of these cards for input.</li> <li>(3) Blank entries are read as zero.</li> <li>(4) The general form of the load-deflection curve for the axially unsymmetric beam element is as follows:</li> </ol> |

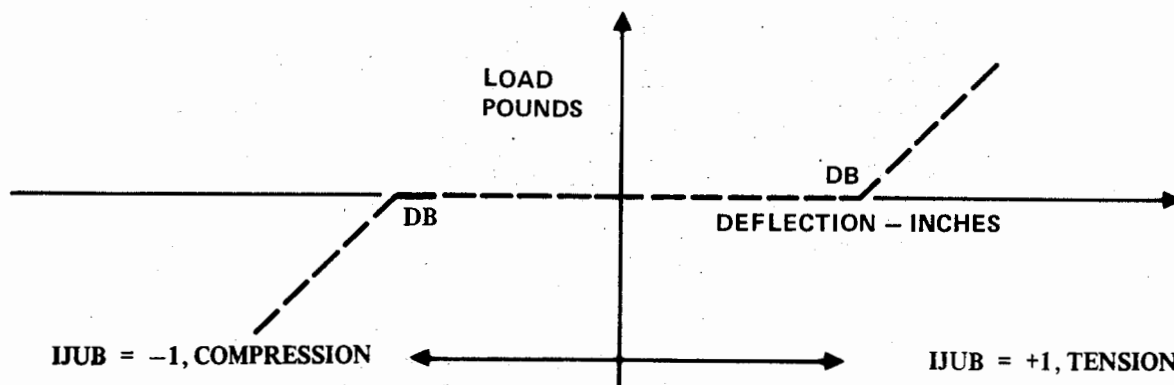

- (5) This type of beam element may also incorporate nonlinear characteristics by specifying the nonlinear properties per the 1800-series cards.
- (6) The axial load-deflection curves that can be obtained using this capability are described in Volume I, Section 1.3.5.3.5. (Reference 1)
- (7) Format for this card is (2 (I2, I3), 15, 5X, E 10.0).

## KRASH INPUT DATA

CARD 1290: SHOCK STRUT DATA

DESCRIPTION: Friction coefficient and number of metering pin tables.

**FORMAT EXAMPLE:**

|            |            |            |            |            |            |            |            |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| ALPHAP     | NMPTAB     |            |            |            |            |            |            |            |
| 1.0        | 2          |            |            |            |            |            |            | 1290       |

| <u>FIELD</u> | <u>CONTENTS</u>                                                  |
|--------------|------------------------------------------------------------------|
| ALPHAP       | Constant For Use In Computing Shock Strut Friction Force         |
| NMPTAB       | Number of Separate Metering Pin Tables Input on Cards 1490/1500. |

REMARKS:

- (1) Optional data card.
- (2) Required only if NOLEO  $\neq 0$  (card 0040)
- (3) Only 1 card regardless of NOLEO value
- (4) Blank entry read as zero
- (5) Range of ALPHAP is between .1 to 2.0. The smaller the alphap used the closer the representation is to pure Coulomb friction. Generally a value of 1.0 is suitable.
- (6) See Appendix A for the discussion on oleo friction forces for alphap selection.
- (7) Format for this card is (E10.0, I10).

# KRASH INPUT DATA

CARDS 1300: SHOCK STRUT DATA

DESCRIPTION: Air curve parameters

FORMAT EXAMPLE:

| 0 |   | 1 |   | 2     |   | 3    |   | 4   |   | 5      |   | 6    |   | 7 |   | 8    |   |   |   |
|---|---|---|---|-------|---|------|---|-----|---|--------|---|------|---|---|---|------|---|---|---|
| 1 | 2 | 3 | 4 | 5     | 6 | 7    | 8 | 9   | 0 | 1      | 2 | 3    | 4 | 5 | 6 | 7    | 8 | 9 | 0 |
| M | I | N | J | EOLEO |   | FAO  |   | FAA |   | EXPOLE |   | YMAX |   |   |   |      |   |   |   |
|   | 1 |   | 7 | 10.27 |   | 116. |   | 5.  |   | 1.0    |   | 9.32 |   |   |   | 1300 |   |   |   |

## FIELD

## CONTENTS

|        |                                                                 |
|--------|-----------------------------------------------------------------|
| M      | Massless Node Point Number In End "I" (Right Justified Integer) |
| I      | Mass Point Number At End "I" (Right Justified Integer)          |
| N      | Massless Node Point Number At End "J" (Right Justified Integer) |
| J      | Mass Point Number At End "J" (Right Justified Integer)          |
| EOLEO  | Effective Total Strut Cylinder Length, in.                      |
| FAO    | Fully Extended Gear Preload, lb.                                |
| FAA    | Ambient Air Preload, lb.                                        |
| EXPOLE | Polytropic Exponent.                                            |
| YMAX   | Maximum Stroke, in.                                             |

## REMARKS:

- (1) Optional data cards.
- (2) "NOLEO" on card 0040 specifies the number of these cards for input.
- (3) All entries requiring scientific notation (X.XEXX) should be right justified.
- (4) EXPOLE ranges from 1 (isothermal) to 1.4 (adiabatic). Adiabatic condition will usually prevail.
- (5) See Appendix A for a description of the shock strut parameters and their usage.
- (6) Format for this card is (2 (I2, I3), 5E10.0).

# KRASH INPUT DATA

CARDS 1400: SHOCK STRUT DATA

DESCRIPTION: Damping constants, linear springs at extended and compressed ends of strut travel and coulomb friction.

FORMAT EXAMPLE:

| 0 |   | 1 |   | 2     |   | 3      |   | 4      |   | 5      |   | 6     |   | 7     |   | 8    |   |
|---|---|---|---|-------|---|--------|---|--------|---|--------|---|-------|---|-------|---|------|---|
| 1 | 2 | 3 | 4 | 5     | 6 | 7      | 8 | 9      | 0 | 1      | 2 | 3     | 4 | 5     | 6 | 7    | 8 |
| M | I | N | J | BOLEO |   | BROLEO |   | XKEXT  |   | XKCOMP |   | FCOUL |   | MPTAB |   | X    |   |
|   | 1 |   | 7 | 0.24  |   | 0.48   |   | 10000. |   | 10000. |   | 5.5   |   | 1     |   | 1400 |   |

## FIELD

## CONTENTS

|        |                                                                                                                                                    |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| M      | Massless Node Point Number At End "I" (Right Justified Integer)                                                                                    |
| I      | Mass Point Number At End "I" (Right Justified Integer)                                                                                             |
| N      | Massless Node Point Number At End "J" (Right Justified Integer)                                                                                    |
| J      | Mass Point Number At End "J" (Right Justified Integer)                                                                                             |
| BOLEO  | Strut Orifice Damping lb-sec <sup>2</sup> /in <sup>2</sup>                                                                                         |
| BROLEO | Strut Rebound Valve Damping lb-sec <sup>2</sup> /in <sup>2</sup>                                                                                   |
| XKEXT  | Linear Spring At Extended End Of Strut Travel, lb/in.                                                                                              |
| XKCOMP | Linear Spring At Compressed End Of Strut Travel, lb/in.                                                                                            |
| FCOUL  | Coulomb Or Constant Friction Force, lbs.                                                                                                           |
| MPTAB  | Metering Pin Table Number. If a Metering Pin Is Not Used, Input Zero. MPTAB Refers to Metering Pin Tables Input Sequentially On 1500-Series Cards. |

## REMARKS:

- (1) Optional data cards.
- (2) "NOLEO" on card 0040 specifies the number of these cards for input.
- (3) All entries requiring scientific notation (X.XEXX) should be right justified.
- (4) See Appendix A for a description of the shock strut parameters and their usage.
- (5) If a metering pin table is used, BOLEO is ignored. If MPTAB is input as a negative integer, the subsequent table on cards 1500 is interpreted as total gear load versus stroke. This is used only for the inverse metering pin option, explained in Appendix A.
- (6) No. of cards = NPTSMP value (card 1290)
- (7) Format for this card is (2 (I2, I3), 5E10.0, I10).

## KRASH INPUT DATA

**CARD 1490:      METERING PIN DATA**

**DESCRIPTION:** Number of points in following metering pin table

**FORMAT EXAMPLE:**

|        |   |   |   |   |   |   |   |      |
|--------|---|---|---|---|---|---|---|------|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
| 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9    |
| NPTSMP |   |   |   |   |   |   |   |      |
| 15     |   |   |   |   |   |   |   | 1490 |

FIELD

## CONTENTS

**NPTSMP**      Number of Cards in The Following Table of YOLEO Versus BOLEO (Maximum Allowable is 100)

**REMARKS:**

- (1) Optional data card. Required only if MPTAB is nonzero on any of the 1400-Series cards.
- (2) This card precedes each 1500-Series of metering pin table cards. For example, if there were 3 metering pin tables (NMPTAB = 3 on card 1290), the proper sequence would be

|         |                           |
|---------|---------------------------|
| 1490    | 1 card                    |
| 1500-XX | NPTSMP <sub>1</sub> cards |
| 1490    | 1 card                    |
| 1500-XX | NPTSMP <sub>2</sub> cards |
| 1490    | 1 card                    |
| 1500-XX | NPTSMP <sub>3</sub> cards |

(3) Format for this card is I10

## KRASH INPUT DATA

## CARDS 1500: METERING PIN DATA

**DESCRIPTION:** Table(s) of oleo piston compression versus damping constant.

### FORMAT EXAMPLE

|             |            |            |            |            |            |            |            |            |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
| YOLEO       | BOLEO      |            |            |            |            |            |            |            |
| 7.          | 1.76E02    |            |            |            |            |            |            | 1500       |

| FIELD | CONTENTS |
|-------|----------|
|-------|----------|

YOLO Oleo Piston Compression, Inches, Measured From Fully Extended Position  
BOLEO Oleo Hydraulic Damping Constant, Pound-Sec<sup>2</sup>/in<sup>2</sup>, at The Piston Position Defined by YOLEO

| REMARKS |                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (1)     | Optional data card(s). NPTSMF on card 1490 defines the number of these cards to input. If NMPTAB = 0 on card 1290, then none of these cards are used.                                                                                                                                                                                                                                       |
| (2)     | Format for this card is 2E10.0.                                                                                                                                                                                                                                                                                                                                                             |
| (3)     | If MPTAB on card 1400 is input as a negative integer, then BOLEO on the corresponding 1500-Series cards is interpreted as total gear load. This is referred to as the inverse metering pin option, which can be used to calculate BOLEO versus YOLEO if a known (or desired) load-deflection characteristic curve is input on this series of cards. This option is explained in Appendix A. |

# KRASH INPUT DATA

CARD 1600: BEAM ELEMENT DAMPING RATIO

DESCRIPTION: Defines an overall damping ratio for the beam elements in the KRASH model.

FORMAT AND EXAMPLE:


| 0                                                                                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
|----------------------------------------------------------------------------------|---|---|---|---|---|---|---|------|
| 12345678901234567890123456789012345678901234567890123456789012345678901234567890 |   |   |   |   |   |   |   |      |
| DAMPC                                                                            |   |   |   |   |   |   |   |      |
| 0.10                                                                             |   |   |   |   |   |   |   | 1600 |

FIELD      CONTENTS

DAMPC      Damping Ratio (Actual/Critical)

REMARKS:

- (1) Required data card; however, it may be blank.
- (2) Blank entry is read as zero damping for all beams.
- (3) DAMPC values in KRASH are between .1 and .5. The sketch below shows the relationship between DAMPC values and percent of critical damping.
- (4) Format for this card is E10.0

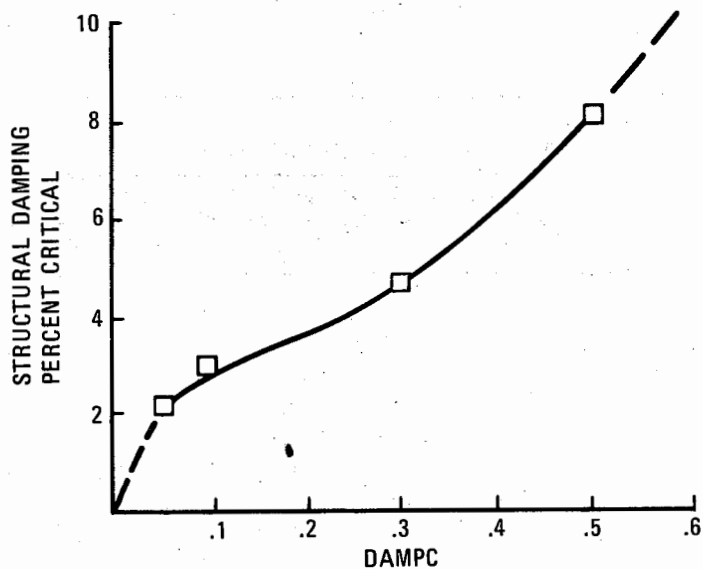

# KRASH INPUT DATA

CARDS 1700: NON-STANDARD BEAM ELEMENT DAMPING RATIOS

DESCRIPTION: Defines the end points and damping ratio for each beam element in the KRASH model for which a non-standard damping ratio is required.

FORMAT AND EXAMPLE:


| 0 |   | 1 |   | 2    |   | 3 |   | 4 |   | 5 |   | 6 |   | 7 |   | 8 |   |   |      |
|---|---|---|---|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|------|
| 1 | 2 | 3 | 4 | 5    | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0    |
| M | I | N | J | CBAR |   |   |   |   |   |   |   |   |   |   |   |   |   |   |      |
|   | 2 | 1 | 5 | 0.10 |   |   |   |   |   |   |   |   |   |   |   |   |   |   | 1700 |

| <u>FIELD</u> | <u>CONTENTS</u> |
|--------------|-----------------|
|--------------|-----------------|

|      |                                                                 |
|------|-----------------------------------------------------------------|
| M    | Massless Node Point Number At End "I" (Right Justified Integer) |
| I    | Mass Point Number At End "I" (Right Justified Integer)          |
| N    | Massless Node Point Number At End "J" (Right Justified Integer) |
| J    | Mass Point Number At End "J" (Right Justified Integer)          |
| CBAR | Damping Ratio (Actual/Critical)                                 |

REMARKS:

- (1) Optional data card(s).
- (2) "ND" on card 0040 specifies the number of these cards for input.
- (3) Blank entries are read as zero.
- (4) CBAR values in KRASH are between .1 and .5. The sketch below shows the relationship between CBAR values and percent critical damping.
- (5) Format for this card is (2 (12, 13), E10.0).

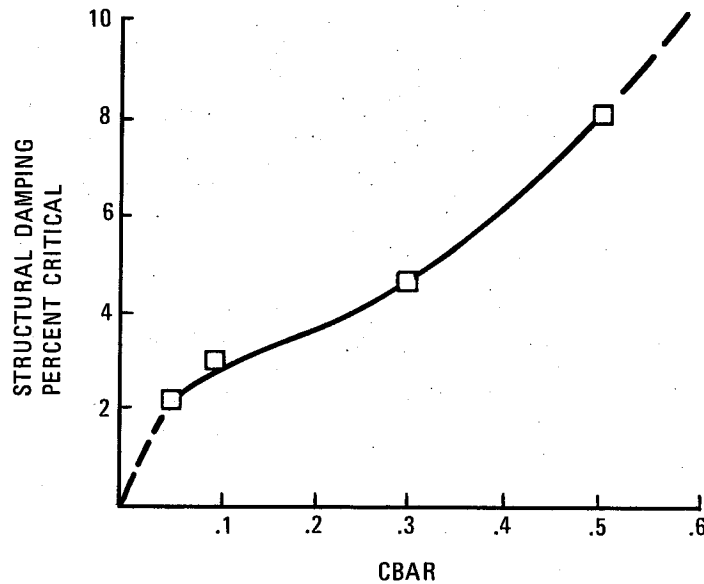

# **KRASH INPUT DATA**

CARDS 1800:      **NONLINEAR BEAM ELEMENT PARAMETERS**

DESCRIPTION:      Defines the end points, degree-of-freedom, KR table type, and linear deflection points for the nonlinear beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0           |   | 1          |   | 2          |    | 3          |  | 4          |  | 5          |  | 6          |  | 7          |  | 8          |  |
|-------------|---|------------|---|------------|----|------------|--|------------|--|------------|--|------------|--|------------|--|------------|--|
| 12345678901 |   | 2345678901 |   | 2345678901 |    | 2345678901 |  | 2345678901 |  | 2345678901 |  | 2345678901 |  | 2345678901 |  | 2345678901 |  |
| M           | I | N          | J | L          | NP | LDP        |  | LDP1       |  |            |  |            |  |            |  |            |  |
|             | 2 | 1          | 5 | 3          | 7  | 1.5        |  | 0.0        |  |            |  |            |  |            |  | 1800       |  |

## FIELD

## CONTENTS

|      |                                                                                                                                                                                                  |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M    | Massless Node Point Number At End "1" (Right Justified Integer)                                                                                                                                  |
| I    | Mass Point Number At End "I" (Right Justified Integer)                                                                                                                                           |
| N    | Massless Node Point Number At End "J" (Right Justified Integer)                                                                                                                                  |
| J    | Mass Point Number At End "J" (Right Justified Integer)                                                                                                                                           |
| L    | Nonlinear Degree-Of-Freedom Where L = 1, 2, 3, 4, 5, 6 Corresponds To The Beam Element Coordinate System Directions X, Y, Z, $\phi$ , $\theta$ , $\psi$ . Respectively (Right Justified Integer) |
| NP   | Number Of Data Points Used In KR Table (Right Justified Integer)                                                                                                                                 |
| LDP  | Deflection At Which Nonlinear Behavior Begins – Inches                                                                                                                                           |
| LDP1 | Deflection At Which Nonlinear Behavior Ends And Linear Restiffening Begins – Inches except as noted in remark (8).                                                                               |

## REMARKS:

- (1) Optional data card(s).
- (2) "NLB" on card 0040 specifies the number of these cards for input.
- (3) Blank entries are read as zero.
- (4) The nonlinear degrees-of-freedom are specified in the beam element coordinate systems shown in figure 2-3.
- (5) For "NP" = 4-9 the corresponding standard KR tables are shown in figure 2.6. For "NP" >9 the user will input a nonstandard KR table with "NP" data points.
- (6) "LDP1" is used for the KR table "NP" = 9 and for "NP" = 4 (see remark 8).
- (7) The theory on how the KR curves are used to calculate internal beam loads is shown in Volume I, Section 1.3.5.3.4. (Reference 1).
- (8) For "NP" = 4 the LDP value represents the deflection value at which KR = 1. (LINEAR). LDP1 represents KR value (< 1).  $0 \leq \text{deflection} \leq \text{LDP}$ . NP = 4 can be useful for modeling elements such as a seat cushion which is soft initially and stiffens during compression. Do not use with LDP1 > 1.0
- (9) Format for this card is (2 (I2, I3) 2I5, 2E10.0).

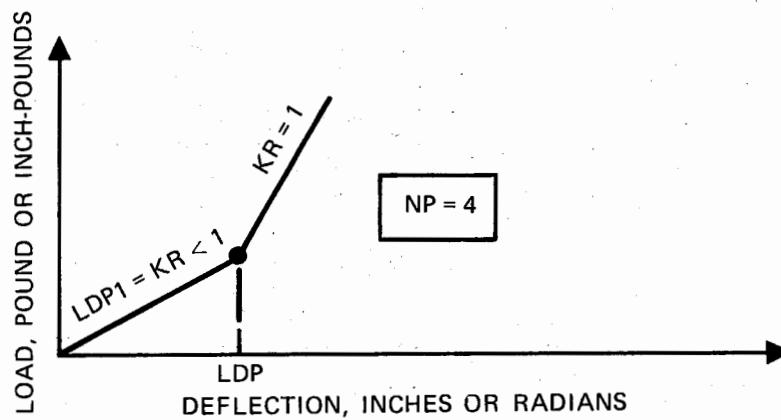
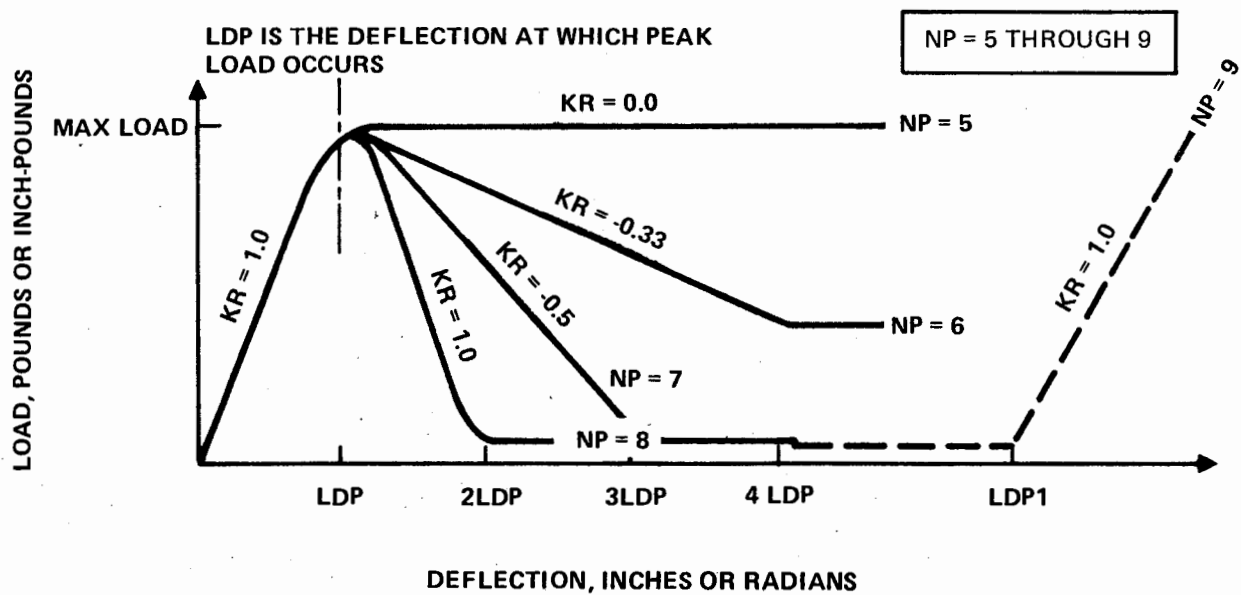


FIGURE 2-6. STANDARD NONLINEAR BEAM ELEMENT STIFFNESS REDUCTION CURVES

## KRASH INPUT DATA

CARDS 1900:    NON-STANDARD KR TABLE DATA POINTS

|                            |                                                                                                                                                 |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b><u>DESCRIPTION:</u></b> | Defines non-standard KR tables for the nonlinear beam elements in the <b>KRASH</b> model which cannot be described with the standard KR tables. |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|

**FORMAT AND EXAMPLE:**

|             |            |            |            |            |            |            |            |            |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
| XKR         | KR         |            |            |            |            |            |            |            |
| 1.0         | -1.0       |            |            |            |            |            |            | 1900       |

| <u>FIELD</u> | <u>CONTENTS</u>                   |
|--------------|-----------------------------------|
| XKR          | Deflection – Inches               |
| KR           | Stiffness Reduction Factor at XKR |

## REMARKS:

- (1) Optional data cards.
- (2) For each use of "NP" > 9 on the 1200-series cards, "NP" of these cards are required input.
- (3) Blank entries are read as zero.
- (4) Within each set of "NP" data cards, deflections must be in ascending order.
- (5) Each set of "NP" data cards must be ordered to correspond with the 1800 - series cards where "NP" > 9 is used.
- (6) Format for this card is 2E10.0.

## KRASH INPUT DATA

CARD 2000: CONTROL VOLUME MASS PENETRATION PARAMETERS

**DESCRIPTION:** Defines a control volume around a selected mass point in the KRASH model which is monitored for penetration by another mass point during the analysis.

**FORMAT AND EXAMPLE:**

|            |            |            |            |            |            |                                                                                     |            |            |
|------------|------------|------------|------------|------------|------------|-------------------------------------------------------------------------------------|------------|------------|
| 0          | 1          | 2          | 3          | 4          | 5          | 6                                                                                   | 7          | 8          |
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890                                                                          | 1234567890 | 1234567890 |
| XN         | XP         | YN         | YP         | ZN         | ZP         |  |            |            |
| 10.0       | 10.0       | 3.0        | 4.0        | 10.5       | 2.9        |                                                                                     |            |            |
|            |            |            |            |            |            |                                                                                     |            | 2000       |

| <u>FIELD</u> | <u>CONTENTS</u>                                            |
|--------------|------------------------------------------------------------|
| XN           | Distance From Mass Point To Aft Side Of Control Volume     |
| XP           | Distance From Mass Point To Forward Side Of Control Volume |
| YN           | Distance From Mass Point To Left Side Of Control Volume    |
| YP           | Distance From Mass Point To Right Side Of Control Volume   |
| ZN           | Distance From Mass Point To Top Side Of Control Volume     |
| ZP           | Distance From Mass Point To Bottom Side Of Control Volume  |

## REMARKS:

- (1) Optional data card.
- (2) 'MVP' on card 0040 specifies the mass point number for which this data card applies.
- (3) Only one mass point may have a control volume.
- (4) Blank entries are read as zero.
- (5) All distances are positive and units are inches.
- (6) For a RUNMOD = 2 the MVP mass should be selected from a mass point located on the airplane centerline. This restriction doesn't apply to RUNMOD = 0 or 1.
- (7) Any of the model mass points may penetrate the designated control volume of the model.
- (8) The mass penetration calculations are described in Volume I, Section 1.3.10.
- (9) Format for this card is 6E10.0.

# KRASH INPUT DATA

CARD 2100: DRI ELEMENT SPECIFICATION

DESCRIPTION: Defines the end mass points of the DRI beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0  |    | 1  |    | 2  |    | 3  |    | 4  |    | 5  |    | 6  |    | 7 |   | 8 |   |   |      |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|------|
| 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 0  | 1  | 2  | 3  | 4  | 5 | 6 | 7 | 8 | 9 | 0    |
| I1 | J1 | I2 | J2 | I3 | J3 | I4 | J4 | I5 | J5 | I6 | J6 | I7 | J7 | X |   |   |   |   |      |
| 3  | 10 |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   | 2100 |

FIELD

CONTENTS

II

Mass Point Number At End "I"

JI

Mass Point Number At End "J"

REMARKS:

- (1) Optional data card(s).
- (2) "NDRI" on card 0040 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) Blank entries are read as zero.
- (5) Up to seven DRI beam elements can be specified on each card. (Normally an analysis requires from 1 to 4 DRI elements).
- (6) DRI beam element section properties can be defined on the 0900-series cards or if a MTL code of 10 is used the program will automatically compute the DRI properties.
- (7) Beams that connect massless node points cannot be used as DRI elements, only direct mass to mass connection is allowed.
- (8) The usage of DRI elements is described in Volume I, Section 1.3.12.
- (9) Format for this card is 14I5.

## KRASH INPUT DATA

CARD 2200: OCCUPIABLE VOLUME CHANGE PARAMETERS

DESCRIPTION: Defines occupiable volumes in the KRASH model for volume change calculations by specifying the eight corner mass points.

FORMAT AND EXAMPLE:

| 0  |    | 1  |    | 2  |    | 3  |    | 4 |   | 5 |   | 6 |   | 7 |   | 8 |   |      |   |
|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|------|---|
| 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9    | 0 |
| I1 | I2 | I3 | I4 | I5 | I6 | I7 | I8 |   |   |   |   |   |   |   |   |   |   |      |   |
| 3  | 7  | 12 | 13 | 21 | 23 | 31 | 35 |   |   |   |   |   |   |   |   |   |   | 2200 |   |

| <u>FIELD</u> | <u>CONTENTS</u> |
|--------------|-----------------|
|--------------|-----------------|

|    |                                                           |
|----|-----------------------------------------------------------|
| I1 | Mass Point Number At Forward End, Upper Left-Hand Corner  |
| I2 | Mass Point Number At Forward End, Upper Right-Hand Corner |
| I3 | Mass Point Number At Aft End, Upper Left-Hand Corner      |
| I4 | Mass Point Number At Aft End, Upper Right-Hand Corner     |
| I5 | Mass Point Number At Forward End, Lower Left-Hand Corner  |
| I6 | Mass Point Number At Forward End, Lower Right-Hand Corner |
| I7 | Mass Point Number At Aft End, Lower Left-Hand Corner      |
| I8 | Mass Point Number At Aft End, Lower Right-Hand Corner     |

REMARKS:

- (1) Optional data card(s).
- (2) "NVCH" on card 0004 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) Blank entries are not allowed.
- (5) The volume change calculations are explained in Volume I, Section 1.3.11 (Figure 1-16).
- (6) For a symmetrical full model (RUNMOD = 2 type) when only half the data is input the user inputs mass point locations 1, 3, 5, 7 (I1, I3, I5, I7). The opposite side mass point locations 2, 4, 6, 8 (I2, I4, I6, I8) are input as zero (blank). KRASH automatically computes the opposite side masses. See Volume I, Figure 1-16 for mass point designations.
- (7) Format for this card is 8I5.

# KRASH INPUT DATA

CARDS 2300: NON-STANDARD MAXIMUM BEAM ELEMENT POSITIVE DEFLECTIONS  
FOR RUPTURE

DESCRIPTION: Defines the end points and the maximum positive deflections and rotations for  
rupture of beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0 |   | 1 |   | 2     |       | 3     |       | 4     |       | 5 |   | 6 |   | 7 |   | 8 |   |   |      |
|---|---|---|---|-------|-------|-------|-------|-------|-------|---|---|---|---|---|---|---|---|---|------|
| 1 | 2 | 3 | 4 | 5     | 6     | 7     | 8     | 9     | 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0    |
| M | I | N | J | VMAX1 | VMAX2 | VMAX3 | VMAX4 | VMAX5 | VMAX6 |   |   |   |   |   |   |   |   |   |      |
|   | 2 | 1 | 6 | 10.0  | 15.2  | 100.0 | 100.0 | 0.2   |       |   |   |   |   |   |   |   |   |   | 2300 |

## FIELD

## CONTENTS

|       |                                                                 |
|-------|-----------------------------------------------------------------|
| M     | Massless Node Point Number At End "1" (Right Justified Integer) |
| I     | Mass Point Number At End "I" (Right Justified Integer)          |
| N     | Massless Node Point Number At End "J" (Right Justified Integer) |
| J     | Mass Point Number At End "J" (Right Justified Integer)          |
| VMAX1 | Maximum Deflection In Beam Element X-Direction – Inches         |
| VMAX2 | Maximum Deflection In Beam Element Y-Direction – Inches         |
| VMAX3 | Maximum Deflection In Beam Element Z-Direction – Inches         |
| VMAX4 | Maximum Rotation About Beam Element X-Axis – Radians            |
| VMAX5 | Maximum Rotation About Beam Element Y-Axis – Radians            |
| VMAX6 | Maximum Rotation About Beam Element Z-Axis – Radians            |

## REMARKS:

- (1) Optional data card(s).
- (2) "NVBM" on card 0050 specifies the number of these cards for input.
- (3) The standard or default values for maximum deflections and rotations are 100 inches and 100 radians, respectively. The deflections and rotations refer to relative motions of the j end of the beam minus the i end of the beam.
- (4) The beam element coordinate systems are shown in Figure 2-5.
- (5) All values are input as positive numbers.
- (6) Format for this card is (2 (I2, I3), 6E10.0).

## KRASH INPUT DATA

CARDS 2400:

NON-STANDARD MAXIMUM BEAM ELEMENT NEGATIVE DEFLECTIONS FOR RUPTURE

DESCRIPTION: Defines the end points and the maximum negative deflections and rotations for rupture of beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0 |   |   |   | 1      |   |   |   | 2      |   |   |   | 3      |   |   |   | 4      |   |   |   | 5      |   |   |   | 6      |   |   |   | 7 |   |   |      | 8 |   |   |   |   |   |   |
|---|---|---|---|--------|---|---|---|--------|---|---|---|--------|---|---|---|--------|---|---|---|--------|---|---|---|--------|---|---|---|---|---|---|------|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5      | 6 | 7 | 8 | 9      | 0 | 1 | 2 | 3      | 4 | 5 | 6 | 7      | 8 | 9 | 0 | 1      | 2 | 3 | 4 | 5      | 6 | 7 | 8 | 9 | 0 | 1 | 2    | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| M | I | N | J | VMAXN1 |   |   |   | VMAXN2 |   |   |   | VMAXN3 |   |   |   | VMAXN4 |   |   |   | VMAXN5 |   |   |   | VMAXN6 |   |   |   |   |   |   |      |   |   |   |   |   |   |   |
|   | 2 | 1 | 6 | 10.0   |   |   |   | 15.2   |   |   |   | 100.0  |   |   |   | 100.0  |   |   |   | 0.2    |   |   |   | 100.0  |   |   |   |   |   |   | 2400 |   |   |   |   |   |   |   |

### FIELD

### CONTENTS

|        |                                                                 |
|--------|-----------------------------------------------------------------|
| M      | Massless Node Point Number At End "I" (Right Justified Integer) |
| I      | Mass Point Number At End "I" (Right Justified Integer)          |
| N      | Massless Node Point Number At End "J" (Right Justified Integer) |
| J      | Mass Point Number At End "J" (Right Justified Integer)          |
| VMAXN1 | Maximum Deflection In Beam Element X-Direction – Inches         |
| VMAXN2 | Maximum Deflection In Beam Element Y-Direction – Inches         |
| VMAXN3 | Maximum Deflection In Beam Element Z-Direction – Inches         |
| VMAXN4 | Maximum Rotation About Beam Element X-Axis – Radians            |
| VMAXN5 | Maximum Rotation About Beam Element Y-Axis – Radians            |
| VMAXN6 | Maximum Rotation About Beam Element Z-Axis – Radians            |

### REMARKS:

- (1) Optional data card(s).
- (2) "NVBMN" on card 0050 specifies the number of these cards for input.
- (3) The standard or default values for maximum deflections and rotations are 100 inches and 100 radians, respectively. The deflections and rotations refer to relative motions of the j end of the beam minus the i end of the beam.
- (4) The beam element coordinate systems are shown in Figure 2-5.
- (5) All values are input as positive numbers.
- (6) Format for this card is (2 (I2, I3), 6E10.0).

# KRASH INPUT DATA

CARDS 2500:                      NONSTANDARD MAXIMUM BEAM ELEMENT POSITIVE LOADS FOR RUPTURE

DESCRIPTION:       Defines the end points and the maximum forces and moments for rupture of beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0          |   |   |   | 1          |  |  |  | 2          |  |  |  | 3          |  |  |  | 4          |  |  |  | 5          |  |  |  | 6          |  |  |  | 7          |      |  |  | 8 |  |  |  |
|------------|---|---|---|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|--|--|--|------------|------|--|--|---|--|--|--|
| 1234567890 |   |   |   | 1234567890 |  |  |  | 1234567890 |  |  |  | 1234567890 |  |  |  | 1234567890 |  |  |  | 1234567890 |  |  |  | 1234567890 |  |  |  | 1234567890 |      |  |  |   |  |  |  |
| M          | I | N | J | FMAX1      |  |  |  | FMAX2      |  |  |  | FMAX3      |  |  |  | FMAX4      |  |  |  | FMAX5      |  |  |  | FMAX6      |  |  |  | X          |      |  |  |   |  |  |  |
|            | 3 |   | 7 | 10.0E10    |  |  |  | 1000.0     |  |  |  | 10.0E10    |  |  |  | 10.0E10    |  |  |  | 10.0E6     |  |  |  | 10.0E10    |  |  |  |            | 2500 |  |  |   |  |  |  |

## FIELD

## CONTENTS

|        |                                                                  |
|--------|------------------------------------------------------------------|
| M      | Massless Node Point Number at End "I" (Right Justified Integer)  |
| I      | Mass Point Number at End "1" (Right Justified Integer)           |
| N      | Massless Node Point Number at End "J" (Right Justified Integer)  |
| J      | Mass point Number at End "J" (Right Justified Integer)           |
| FMAX1  | Maximum Axial Force in Beam Element X-Direction - Pounds         |
| FMAX2  | Maximum Shear Force in Beam Element Y-Direction - pounds         |
| FMAX3  | Maximum Shear Force in Beam Element Z-Direction - Pounds         |
| FMAX4  | Maximum Torque About Beam Element X-Axis - Inch * Pounds         |
| FMAX5  | Maximum Bending Moment About Beam Element Y-Axis - Inch * Pounds |
| FMAX 6 | Maximum Bending Moment About Beam Element Z-Axis - Inch * Pounds |

## REMARKS:

- (1) Optional data card(s).
- (2) "NFBM" on card 0050 specifies the number of these cards for input.
- (3) The standard of default values for maximum rupture forces and moments are 1.E10 pounds and inch-pounds, respectively.
- (4) Entries requiring scientific notation (X.XEXX) should be right justified.
- (5) Blank entries are read as zero.
- (6) The beam element coordinate systems are shown in Figure 2-5.
- (7) All values are input as positive numbers.
- (8) The input values are compared to the time-varying beam loads at the j end of the beam to determine if beam rupture occurs.
- (9) Format for this card is (2(I2, I3), 6E10.0).

# KRASH INPUT DATA

CARDS 2600:

NON-STANDARD MAXIMUM BEAM ELEMENT NEGATIVE LOADS FOR RUPTURE

DESCRIPTION: Defines the end points and the maximum forces and moments for rupture of beam elements in the KRASH model.

FORMAT AND EXAMPLE:

| 0 |   |   |   | 1       |   |   |   | 2      |   |   |   | 3       |   |   |   | 4       |   |   |   | 5      |   |   |   | 6       |   |   |   | 7 |      |   |   | 8 |   |   |   |   |   |   |   |
|---|---|---|---|---------|---|---|---|--------|---|---|---|---------|---|---|---|---------|---|---|---|--------|---|---|---|---------|---|---|---|---|------|---|---|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5       | 6 | 7 | 8 | 9      | 0 | 1 | 2 | 3       | 4 | 5 | 6 | 7       | 8 | 9 | 0 | 1      | 2 | 3 | 4 | 5       | 6 | 7 | 8 | 9 | 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 |
| M | I | N | J | FMAXN1  |   |   |   | FMAXN2 |   |   |   | FMAXN3  |   |   |   | FMAXN4  |   |   |   | FMAXN5 |   |   |   | FMAXN6  |   |   |   | X |      |   |   |   |   |   |   |   |   |   |   |
|   | 3 |   | 7 | 10.0E10 |   |   |   | 1000.0 |   |   |   | 10.0E10 |   |   |   | 10.0E10 |   |   |   | 10.0E6 |   |   |   | 10.0E10 |   |   |   |   | 2600 |   |   |   |   |   |   |   |   |   |   |

## FIELD

## CONTENTS

|        |                                                                  |
|--------|------------------------------------------------------------------|
| M      | Massless Node Point Number at End 'I' (Right Justified Integer)  |
| I      | Mass Point Number at End 'I' (Right Justified Integer)           |
| N      | Massless Node Point Number at End 'J' (Right Justified Integer)  |
| J      | Mass Point Number at End 'J' (Right Justified Integer)           |
| FMAXN1 | Maximum Axial Force In Beam Element X-Direction – Pounds         |
| FMAXN2 | Maximum Shear Force In Beam Element Y-Direction – Pounds         |
| FMAXN3 | Maximum Shear Force In Beam Element Z-Direction – Pounds         |
| FMAXN4 | Maximum Torque About Beam Element X-Axis – Inch * Pounds         |
| FMAXN5 | Maximum Bending Moment About Beam Element Y-Axis – Inch * Pounds |
| FMAXN6 | Maximum Bending Moment About Beam Element Z-Axis – Inch * Pounds |

## REMARKS:

- (1) Optional data card(s).
- (2) 'NFBMN' on card 0050 specifies the number of these cards for input.
- (3) The standard or default values for maximum rupture forces and moments are 1.E10 pounds and inch-pounds, respectively.
- (4) Entries requiring scientific notation (X.XE10) should be right justified.
- (5) Blank entries are read as zero.
- (6) The beam element coordinate systems are shown in Figure 2-5.
- (7) All values are input as positive numbers.
- (8) The input values are compared to the time-varying beam loads at the j end of the beam to determine if beam rupture occurs.
- (9) Format for this card is (2(I2, I3), 6E10.0).

# KRASH INPUT DATA

CARDS 2700: LOAD INTERACTION CURVE SIGN CONVENTION DATA

DESCRIPTION: Defines the sign conventions to be used for load-interaction data output.

FORMAT AND EXAMPLE:

| 0    | 1    | 2    | 3    | 4    | 5    | 6 | 7 | 8    |
|------|------|------|------|------|------|---|---|------|
| 1    | 2    | 3    | 4    | 5    | 6    | 7 | 8 | 9    |
| ISC1 | ISC2 | ISC3 | ISC4 | ISC5 | ISC6 |   |   |      |
| 3    | -2   | 5    | 6    | -4   | 1    |   |   | 2700 |

FIELD: CONTENTS

ISC1- CALAC (Lockheed-California Co.) sign convention load number to be used for the  
ISC6 corresponding user defined loads. The above example results in the following  
correspondence between the user-defined loads and the CALAC sign convention  
loads:

|             |   |    |   |   |    |   |                |
|-------------|---|----|---|---|----|---|----------------|
| User Loads  | 1 | 2  | 3 | 4 | 5  | 6 | are made up of |
| CALAC Loads | 3 | -2 | 5 | 6 | -4 | 1 |                |

- REMARKS:
- (1) Optional data card(s).
  - (2) NSCV on card 0060 defines the number of these cards for input.
  - (3) Any nonzero ISCN on the 2800-series cards requires a corresponding sign convention definition card in the 2700 series.
  - (4) Section 3.1 describes the load-interaction data and the significance of the user-defined sign conventions.
  - (5) The format for this card is 615

## KRASH INPUT DATA

### CARDS 2800:      LOAD INTERACTION CURVE DATA

DESCRIPTION:      Defines the beams to be analyzed for load-interaction curves, the two interacting load directions, sign conventions to be applied, exact location along the beams and rupture ratio.

### FORMAT AND EXAMPLE:

| 0  |   | 1 |      | 2    |      | 3     |       | 4     |        | 5 |   | 6 |   | 7 |   | 8 |   |   |      |
|----|---|---|------|------|------|-------|-------|-------|--------|---|---|---|---|---|---|---|---|---|------|
| 1  | 2 | 3 | 4    | 5    | 6    | 7     | 8     | 9     | 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0    |
| IJ | K | L | NLIL | ISCN | NSMI | FSLIC | BLLIC | WLLIC | RUPRAT |   |   |   |   |   |   |   |   |   |      |
| 7  | 3 | 5 | 3    | 1    | 10   | 1160. |       |       | 1.4    |   |   |   |   |   |   |   |   |   | 2800 |

| <u>FIELD</u>              | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IJ                        | Beam number, the internal loads from which are to be analyzed on load-interaction diagrams.                                                                                                                                                                                                                                                                                                                                       |
| K,L                       | Load directions for the x and y axes of load-interaction curve. In the above example, 3,5 means use Fz and My, in the user-defined sign convention.                                                                                                                                                                                                                                                                               |
| NLIL                      | Number of sloping load-interaction lines, the data for which is defined on the 3000-series cards. The maximum allowed per load-interaction diagram is 20, including those lines generated as mirror images.                                                                                                                                                                                                                       |
| ISCN                      | User-defined sign convention number to be applied to the beam internal loads before selecting the K,L loads for this load interaction diagram. If ISCN = 0, then the CALAC internal load sign convention, defined in Section 4.15 reference 1, is used.                                                                                                                                                                           |
| NSMI                      | Number of masses involved if shear and moment summation of a particular station is required.                                                                                                                                                                                                                                                                                                                                      |
| FSLIC,<br>BLLIC,<br>WLLIC | Defines the location on the airplane for this load-interaction curve. Input only one of these nonzero. For fore-aft beams, use FSLIC. For lateral beams use BLLIC. For vertical beams, use WLLIC. The location input must be physically within the end points of beam IJ. In the example shown, a load-interaction curve is defined for beam number 7, which is a fore-aft beam, at FS 1160.                                      |
| RUPRAT                    | Beam IJ will rupture when the maximum load ratio for this interaction curve exceeds RUPRAT. If the input data on cards 2900 and 3000 define a strength envelope which at any point would cause complete failure of the structure represented by beam IJ, then RUPRAT = 1.0 would be appropriate. A very large value (RUPRAT = 1000) will guarantee that beam rupture is not triggered by the load-interaction curve calculations. |

- REMARKS:
- (1) Optional data card. NLIC on card 0060 defines the number of these cards to be input.
  - (2) For each load-interaction curve, cards 2800, 2900 and 3000 are input in sequence, before the next 2800-3000 series. In other words, the 2800-3000 card sequence is repeated NLIC times.
  - (3) Section 3.1 describes the load-interaction calculations and data.
  - (4) Format for this card is (6I5, 4E10.0).

## KRASH INPUT DATA

CARDS 2900:      LOAD INTERACTION CURVE DATA

**DESCRIPTION:** Defines the maximum load levels along the positive and negative x and y load axes.

**FORMAT AND EXAMPLE:**

|             |            |            |            |            |            |            |            |            |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             |            |            | FMXLIC1    | FMXLIC2    | FMXLIC3    | FMXLIC4    |            |            |
|             |            |            | 254000.    | 74.0E06    | -254000.   | -74.0E06   |            | 2900       |

FIELD

## CONTENTS

**FMXLIC1** Maximum load levels along the positive and negative x and y load axes. Sequence is as follows:

FMXLIC2


FMXLIC3

FMXLIC4

1 = + x axis

$$2 = +y$$
$$3 = -x$$
$$4 = -y$$

These lines form a rectangular load-interaction strength envelope that looks like:

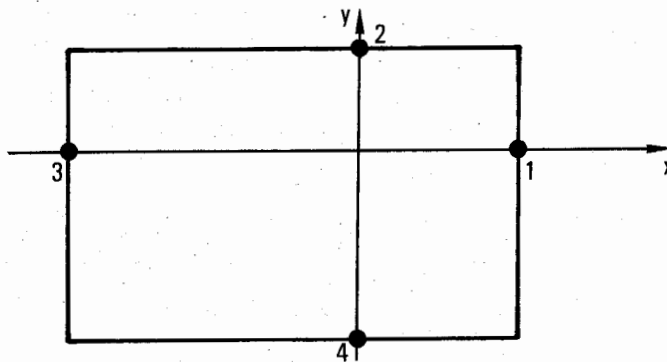

REMARKS:

- (1) Optional data card. NLIC on card 0060 defines the number of these cards to be input.
- (2) For each load-interaction curve, cards 2800, 2900 and 3000 are input in sequence, before the next 2800-3000 series. In other words, the 2800-3000 card sequence is repeated NLIC times.
- (3) Section 3.1 describes the load-interaction calculations and data.
- (4) Format for this card is (30X, 4E10.0).
- (5) A zero or blank input for any of these 4 values will invoke a default value of 1.E20 pounds or inch-pounds.
- (6) FMXLIC3 and FMXLIC4 are input as negative numbers.

## KRASH INPUT DATA

CARDS 3000:      **LOAD INTERACTION CURVE DATA**

DESCRIPTION:      Defines the intercepts for sloping load interaction lines and mirror image flags for generating these lines in other load quadrants.

FORMAT AND EXAMPLE:

| 0   | 1   | 2     | 3      | 4 | 5 | 6 | 7 | 8    |
|-----|-----|-------|--------|---|---|---|---|------|
| 1   | 2   | 3     | 4      | 5 | 6 | 7 | 8 | 9    |
| MX1 | MX2 | FLIC1 | FLIC2  |   |   |   |   |      |
| 1   | 1   | 1500. | 30.E06 |   |   |   |   | 3000 |

FIELD

CONTENTS

MX1

Mirror image flags defining additional load-interaction lines that are generated internally in KRASH, based on the line defined by FLIC1 and FLIC2. The following combinations are possible:

MX2

| MX1 | MX2 | RESULT                     | Total No. of L.I. Lines |
|-----|-----|----------------------------|-------------------------|
| 0   | 0   | No mirror images generated | 1                       |
| 0   | 1   | Mirror about y axis only   | 2                       |
| 1   | 0   | Mirror about x axis only   | 2                       |
| 1   | 1   | Mirror about x and y axes  | 4                       |


FLIC1

Intercept of sloping load-interaction line with x (FLIC1) and y (FLIC2) axes. These two numbers define a single load interaction line, while MX1 and MX2 can be used to generate additional lines which are symmetrical about the x, y or both axes.

FLIC2

REMARKS:

- (1) Optional data. NLIC on Card 2800 defines the number of these cards to be input
- (2) For each load-interaction curve, cards 2800, 2900 and 3000 are input in sequence, before the next 2800-3000 series. In other words, the 2800-3000 card sequence is repeated NLIC times.
- (3) Section 3.1 describes the load-interaction calculations and data.
- (4) Format for this card is (215, 2E10.0).
- (5) For each load-interaction curve, a maximum of 20 load-interaction lines are allowed. The limit of 20 includes any lines generated by KRASH through nonzero inputs of MX1 and MX2.
- (6) The example data will generate the following load-interaction strength envelope:

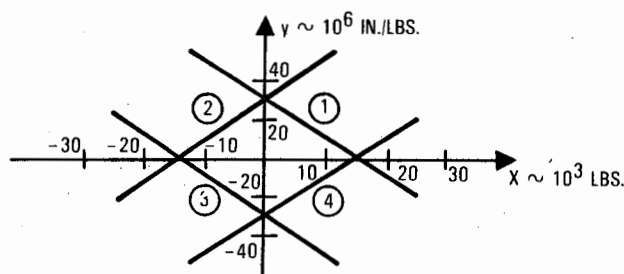

Load-interaction line 1 is generated by the user-input FLIC1 and FLIC2. Lines 2-4 are generated by KRASH because MX1 = MX2 = 1.

## KRASH INPUT DATA

CARDS 3010:      LOAD INTERACTION CURVE DATA

|                            |                                                                                                          |
|----------------------------|----------------------------------------------------------------------------------------------------------|
| <b><u>DESCRIPTION:</u></b> | Defines water line at forward and aft ends of segment for which shear and moment loads are to be summed. |
|----------------------------|----------------------------------------------------------------------------------------------------------|

**FORMAT AND EXAMPLE:**

|             |            |            |            |            |            |            |            |            |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
| WLSMF       | WLSMA      |            |            |            |            |            |            |            |
| 215.7       | 206.4      |            |            |            |            |            |            |            |

| FIELD | CONTENTS |
|-------|----------|
|-------|----------|

|       |                                 |
|-------|---------------------------------|
| WLSMF | Water line at beam forward end. |
| WLSMA | Water line at beam aft end.     |

REMARKS:

- (1) Optional data card. Use only if WSMI on card 2800 is > 0.
- (2) Beam number (IJ) is defined.
- (3) Format for this card is (2E10.0).

# KRASH INPUT DATA

CARDS 3020:      LOAD INTERACTION CURVE DATA

DESCRIPTION:      Defines masses located at station for which shear and moment loads are to be summed.

FORMAT AND EXAMPLE:

| 0     |       | 1     |       | 2     |       | 3     |       | 4     |        | 5      |        | 6      |        | 7 |  | 8 |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|--------|---|--|---|
| 1     |       | 2     |       | 3     |       | 4     |       | 5     |        | 6      |        | 7      |        | 8 |  | 9 |
| IJSM1 | IJSM2 | IJSM3 | IJSM4 | IJSM5 | IJSM6 | IJSM7 | IJSM8 | IJSM9 | IJSM10 | IJSM11 | IJSM12 | IJSM13 | IJSM14 |   |  |   |
| 33    | 41    | 49    | 57    | 65    | 84    | 104   | 105   | 118   | 119    |        |        |        |        |   |  |   |

FIELD                      CONTENTS

IJSM1                      Mass Point Number (Right Justified Integer)  
thru  
IJSM14

REMARKS:

- (1) Optional data card. Use only if NSMI on card 2800 is > 0.
- (2) Masses designed. IJSM1 thru IJSM14 must all be at same FS or BL station.
- (3) 14 masses per card. Use NSMI/14 cards.
- (4) Format for this card is (14I5).

# KRASH INPUT DATA

CARDS 3100:

## MISCELLANEOUS MASS POINT PARAMETERS

**DESCRIPTION:** Defines any nonzero aerodynamic lift forces, angular moments of rotating masses, and mass cross products of inertia for mass points in the KRASH model.

### FORMAT AND EXAMPLE:

| 0 | 1   | 2     | 3   | 4   | 5   | 6    | 7   | 8    |
|---|-----|-------|-----|-----|-----|------|-----|------|
| 1 | 2   | 3     | 4   | 5   | 6   | 7    | 8   | 9    |
| 1 | LC  | HEX   | HEY | HEZ | XYI | YZI  | XZI | NHSY |
| 7 | 0.0 | 100.0 | 0.0 | 0.0 | 1.3 | -3.3 | 0.0 | 0    |
|   |     |       |     |     |     |      |     | 3100 |

### FIELD

### CONTENTS

|      |                                                                                                                                                                   |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I    | Mass Point Number (Right Justified Integer)                                                                                                                       |
| LC   | Lift Coefficient For Aerodynamic Force, Positive Up                                                                                                               |
| HEX  | Angular Momentum of Rotating Masses About Mass Point X-Axis – Inch * Pound * Second                                                                               |
| HEY  | Angular Momentum of Rotating Masses About Mass Point Y-Axis – Inch * Pound * Second                                                                               |
| HEZ  | Angular Momentum of Rotating Masses About Mass Point Z-Axis – Inch * Pound * Second                                                                               |
| XYI  | Mass Cross Product of Inertia in Mass Point X-Y Plane – Inch * Pound * Second **2                                                                                 |
| YZI  | Mass Cross Product of Inertia in Mass Point Y-Z Plane – Inch * Pound * Second **2                                                                                 |
| XZI  | Mass Cross Product of Inertia in Mass Point X-Y Plane – Inch * Pound * Second **2                                                                                 |
| NHSY | Symmetry flag which defines the signs for HEX, HEY, HEZ for masses on the right side of the airplane, generated by subroutine GENMOD, if RUNMOD on card 110 is 2. |

### REMARKS:

- (1) Optional data card(s).
- (2) 'NHI' on card 0050 specifies the number of these cards for input.
- (3) Blank entries are read as zero.
- (4) The airplane weight is multiplied by the lift coefficient to generate an aerodynamic lift force on the mass point. This lift acts upward in ground axes.
- (5) Format for this card is (I2, E8.0, 6E10.0, I2)
- (6) NHSY = 0 corresponds to a symmetrical model (counter-rotating engines), so that

HEX-RIGHT = - HEX LEFT  
 HEY-RIGHT = + HEY LEFT  
 HEZ-RIGHT = - HEZ LEFT

NHSY = 1 corresponds to an anti-symmetrical model (engines rotate in same direction), so that

HEX-RIGHT = + HEX LEFT  
 HEY-RIGHT = - HEY LEFT  
 HEZ-RIGHT = + HEZ LEFT

# KRASH INPUT DATA

CARD 3200:            **MASS POINT EULER ANGLES**

DESCRIPTION:    Defines for any mass point in the KRASH model three Euler angles to arbitrarily rotate the mass point or body coordinate system relative to the airplane coordinate system.

FORMAT AND EXAMPLE:

| 0 | 1 | 2     | 3     | 4     | 5 | 6 | 7 | 8    |
|---|---|-------|-------|-------|---|---|---|------|
| 1 | 2 | 3     | 4     | 5     | 6 | 7 | 8 | 9    |
| 0 | 1 | 2     | 3     | 4     | 5 | 6 | 7 | 8    |
| 1 | 2 | 3     | 4     | 5     | 6 | 7 | 8 | 9    |
| I |   | PHIDP | THEDP | PSIDP |   |   |   |      |
| 3 |   | 0.157 | 0.0   | 0.0   |   |   |   | 3200 |

FIELD            CONTENTS

I                    Mass Point Number (Right Justified Integer)  
 PHIDP            Roll Euler Angle about Airplane X-Axis - Radians  
 THEDP            Pitch Euler Angle about Airplane Y-Axis - Radians  
 PSIDP            Yaw Euler Angle about Airplane Z-Axis - Radians

REMARKS:

- (1) Optional data card(s).
- (2) "NPH" on card 0050 specifies the number of these cards for input.
- (3) Euler angles are order-dependent rotations. The order is PSIDP, THEDP, PHIDP.
- (4) Blank entries are read as zero.
- (5) These angles relate the mass-fixed axes to the airplane axes. Normally these axes coincide and therefore the angles are zero. If mass inertia were available in an inclined axis system the user might want to utilize this option. Another reason for inclining mass axes away from the airplane axes is to enable the user to orient an external spring in a direction that doesn't coincide with any of the airplane axes (external springs must point along one of the mass fixed axes).
- (6) Roll angle positive when mass axes are "right-wing-down" relative to cg axes.  
 Pitch angle positive when mass axes are "nose-up" relative to cg axes.  
 Yaw angle positive when mass axes are "nose-right" relative to cg axes.
- (7) Format for this card (I5, 5X, 3E10,0).

# KRASH INPUT DATA

CARDS 3300: MASS POINT AERODYNAMIC COEFFICIENTS

DESCRIPTION: Defines for any mass point 6 aerodynamic load coefficients to be used to calculate aerodynamic loads.

FORMAT AND EXAMPLE:

| 0  | 1 | 2     | 3  | 4      | 5     | 6     | 7     | 8    |
|----|---|-------|----|--------|-------|-------|-------|------|
| 1  | 2 | 3     | 4  | 5      | 6     | 7     | 8     | 9    |
| 1  | 2 | 3     | 4  | 5      | 6     | 7     | 8     | 9    |
| 13 |   | -137. | 0. | -1500. | 3500. | 5200. | 7100. | 3300 |

FIELD

CONTENTS

I Mass point number  
CXAIR Aerodynamic drag coefficient, in<sup>2</sup>  
CYAIR Aerodynamic side force coefficient, in<sup>2</sup>  
CZAIR Aerodynamic lift coefficient, in<sup>2</sup>  
CLAIR Aerodynamic rolling moment coefficient, in<sup>3</sup>  
CMAIR Aerodynamic pitching moment coefficient, in<sup>3</sup>  
CNAIR Aerodynamic yawing moment coefficient, in<sup>3</sup>

REMARKS:

- (1) Optional data card(s).
- (2) NAERO on card 0050 specifies the number of these cards for input.
- (3) The input aerodynamic coefficients are defined as follows:

CXAIR = S \* CX alpha  
CYAIR = S \* CY beta  
CZAIR = S \* CZ alpha  
CLAIR = S \* b \* CL beta  
CMAIR = S \*  $\bar{c}$  \* CM alpha  
CNAIR = S \* b \* CN beta

where

S = Reference area, in<sup>2</sup>  
b = Reference span, in  
 $\bar{c}$  = Reference mean aerodynamic chord, in.  
alpha = Angle of attack, rad. Positive when mass is nose up relative to its velocity vector.  
beta = Sideslip angle, rad. Positive when mass is nose left relative to its velocity vector.  
CXalpha = Slope of aerodynamic drag (positive forward) versus alpha, 1/rad  
CYbeta = Slope of aerodynamic side force (positive right) versus beta, 1/rad  
CZalpha = Slope of aerodynamic vertical force (positive down) versus alpha, 1/rad

## KRASH INPUT DATA

REMARKS:  
(Continued)

CLbeta = Slope of aerodynamic roll moment (positive right wing down) versus  
beta, 1/rad  
CMalpha = Slope of aerodynamic pitch moment (positive nose up) versus alpha, 1/rad  
CNbeta = Slope of aerodynamic yaw moment (positive nose right) versus beta, 1/rad

- (4) All data refer to the local mass defined by I, not to the entire airplane.
- (5) Aerodynamic loads at zero ALPHA are not included in the calculations. If necessary, these can be included as external forces/moments in the 3300 series cards.
- (6) Aerodynamic loads using these coefficients are not included in the balanced initial conditions coding.
- (7) The format for this card is (I5,5X,6E10.0).

## KRASH INPUT DATA

CARDS 3400:

### MASS POINT TIME HISTORY ACCELERATION PARAMETERS

**DESCRIPTION:** Defines the mass point number, degree-of-freedom, and number of data points to specify an acceleration or load time history for any mass point in the KRASH model.

**FORMAT AND EXAMPLE:**

|            |            |            |            |            |            |            |            |            |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| I          | L          | NP         | NCODE      |            |            |            |            | X          |
| 3          | 2          | 10         | 1          |            |            |            |            | 3400       |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                                                               |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| I            | Mass Point Number.                                                                                                                            |
| L            | Degree-of-Freedom where L = 1, 2, 3, 4, 5, 6 corresponds to X, Y, Z, $\theta X$ , $\theta Y$ , $\theta Z$ in the Mass Point Coordinate System |
| NP           | Number of Data Points in the Table that specifies the Acceleration or Load Time History                                                       |
| NCODE        | Flag defining whether the input table is of mass point acceleration or applied load.                                                          |

## REMARKS:

- (1) Optional data card(s).
- (2) "NACC" on card 0040 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) Each use of this card requires that "NP" number of the 3500-series cards be used.
- (5) The masses must be input in sequence starting with the lower numbered masses.
- (6) Format for this card is 4I5.
- (7) NCODE = 0 for acceleration input table  
NCODE = 1 for force/moment input table
- (8) It is permissible to input forces for some masses and accelerations for other masses.  
If both types are input for the same mass, the accelerations will predominate.

## KRASH INPUT DATA

**CARDS 3500:**      **MASS POINT ACCELERATION OR LOAD TIME HISTORY DATA TABLE**

**DESCRIPTION:**      Defines a table of time and acceleration or load data points for each mass point specified on the 3400-series cards.

**FORMAT AND EXAMPLE:**

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| T          | ACCEL      |            |            |            |            |            |            |            |
| 0.01       | -0.6       |            |            |            |            |            |            | 3500       |

**FIELD**              **CONTENTS**

T                      Time - Seconds  
 Accel                Acceleration G's or Radians per Second \*\*2  
                          or Loads Pounds or Inch-Pounds

- REMARKS:**
- (1) Optional data cards.
  - (2) For each of the "NACC" number of 3400-series cards, "NP" number of these cards are required.
  - (3) Within each set of data, the "NP" cards must be arranged in ascending order of time.
  - (4) Each set of data must be ordered to correspond with the 3400 series cards.
  - (5) Blank entries are read as zero.
  - (6) A maximum of 5000 acceleration times are allowed. For example, if accelerations are applied to 50 masses, the time history of each location can not exceed a curve consisting of 100 points.
  - (7) The values of acceleration or load are in mass axes, with translational accelerations in g's and rotational accelerations in rad/sec<sup>2</sup>. Loads are in pounds or inch-pounds. (See Equation 1-117 Volume I).
  - (8) Format for this card is 2E10.0.

# KRASH INPUT DATA

CARDS 3600: DIRECT INPUT OF BEAM ELEMENT 6X6 STIFFNESS MATRIX

DESCRIPTION: Defines the end points and 6x6 stiffness matrix terms for any beam element in the KRASH model.

FORMAT AND EXAMPLE:

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
| M           | I          | N          | J          |            |            |            |            |            |
|             | 2          | 1          | 7          |            |            |            |            | 2400       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K11        | K12        | K13        | K14        | K15        | K16        |            |            |
|             | 3500.0     | 0.0        | 0.0        | 0.0        | 0.0        | 0.0        |            | 2401       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K21        | K22        | K23        | K24        | K25        | K26        |            |            |
|             | 0.0        | 1.7E07     | 0.0        | 0.0        | 0.0        | -2.2E05    |            | 2402       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K31        | K32        | K33        | K34        | K35        | K36        |            |            |
|             | 0.0        | 0.0        | 1.7E07     | 0.0        | 0.3E05     | 0.0        |            | 2403       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K41        | K42        | K43        | K44        | K45        | K46        |            |            |
|             | 0.0        | 0.0        | 0.0        | 15200.0    | 0.0        | 0.0        |            | 2404       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K51        | K52        | K53        | K54        | K55        | K56        |            |            |
|             | 0.0        | 0.0        | 0.3E06     | 0.0        | 3.5E09     | 0.0        |            | 2405       |

| 0           | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|-------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 12345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 | 2345678901 |
|             | K61        | K62        | K63        | K64        | K65        | K66        |            |            |
|             | 0.0        | -2.2E05    | 0.0        | 0.0        | 0.0        | 3.5E09     |            | 2406       |

## KRASH INPUT DATA

CARDS 3600: DIRECT INPUT OF BEAM ELEMENT 6X6 STIFFNESS MATRIX (Continued)

| <u>FIELD</u> | <u>CONTENTS</u>                                                      |
|--------------|----------------------------------------------------------------------|
| M            | Massless Node Point Number at end "I" (Right Justified Integer)      |
| I            | Mass Point Number at end "I" (Right Justified Integer)               |
| N            | Massless Node Point Number at end "J" (Right Justified Integer)      |
| J            | Mass Point Number at end "J" (Right Justified Integer)               |
| KIJ          | Stiffness Matrix Terms - Pounds per Inch or Inch * Pounds per Radian |

REMARKS:

- (1) Optional data cards.
- (2) "NKM" on card 0050 specifies the number of these card sets for input.
- (3) Blank entries are read as zero.
- (4) The beam element must be included on the 0900-series cards.
- (5) The stiffness data on these cards will override any values calculated with the beam element section properties on the 0900-series cards.
- (6) The input 6x6 stiffness matrix corresponds to the lower right-hand quadrant of a full 12x12 beam element stiffness matrix, shown as Equation (1-23) in Volume I.
- (7) Entries requiring scientific notation (X.XEXX) should be right justified.
- (8) Format for the beam identification card is 2(I2, I3).
- (9) Format for the stiffness matrix data cards is 6E10.0.

# KRASH INPUT DATA

CARDS 3700-3800:      **MASS POINT POSITION (STRUCTURE DEFORMATION) PRINTER PLOT PARAMETERS**

DESCRIPTION:      Defines the planar view, scale factors, and mass point numbers for each mass point position (structure deformation) printer plot.

## FORMAT AND EXAMPLE:

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| NTPL       | NMPTS      | ISCALE     | XSCALE     | YSCALE     |            |            |            |            |
| 1          | 10         | 3          | 10.0       | 10.0       |            |            |            | 3700       |

| 0          | 1          | 2          | 3          | 4          | 5          | 6          | 7          | 8          |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 | 1234567890 |
| M1         | M2         | M3         | M4         | M5         | M6         | M7         | M8         | M9         |
| 1          | 2          | 5          | 6          | 7          | 11         | 13         | 14         | 21         |

## FIELD

## CONTENTS

NTPL      Flag to select Planar View where NTPL = 1, 2, 3 corresponds to top, side, and frontal views, respectively (Right Justified Integer)

NMPTS      Number of Mass Points (Right Justified Integer - Maximum allowed is 50)

ISCALE      Flag to Select Scaling Option as follows (Right Justified Integer):

| ISCALE | TYPE OF SCALING                                                                                                                                                    |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0      | Automatic scaling where horizontal and vertical plot axes scales are selected independently based on the corresponding largest mass point displacement components. |
| 1      | Automatic scaling where horizontal and vertical plot axes scales are set equal based on largest mass point displacement component.                                 |
| 3      | User defined scaling                                                                                                                                               |

XSCALE      Horizontal Scale Factor required if "ISCALE" = 3

YSCALE      Vertical Scale Factor required if "ISCALE" = 3

M1      Mass Point Number (Right Justified Integer)

## REMARKS:

- (1) Optional data cards.
- (2) "NPLT" on card 0140 specifies the number of these card sets for input.
- (3) "NTPL," "NMPTS," and "M1" must be nonzero.
- (4) Blank entries are read as zero.
- (5) Scale factor units are inches of mass point displacement per inch of paper.
- (6) Entries requiring scientific notation (X,XE) should be right justified.
- (7) Recommend ISCALE = 3 if user plans to compare or overlay plots at different time periods.
- (8) Format for card 3700 type is (3I5,5X,2E10.0).
- (9) Format for card 3800 type is 14I5.

## KRASH INPUT DATA

CARDS 3900:

### MASS POINT PRINTER PLOT PARAMETERS

**DESCRIPTION:**

Defines the mass point number and flags to specify which mass point output quantity time histories will be printer plotted.

**FORMAT AND EXAMPLE:**

|             |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
|-------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|-----|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|------|--|--|--|--|--|--|--|--|--|
| 0           |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 3          |  |  |  |  |  |  |  |  |  | 4          |  |  |  |  |  |  |  |  |  | 5          |  |  |  |  |  |  |  |  |  | 6          |  |  |  |  |  |  |  |  |  | 7          |  |  |  |  |  |  |  |  |  | 8          |  |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| 12345678901 |  |  |  |  |  |  |  |  |  | 2345678901 |  |  |  |  |  |  |  |  |  | 3456789012 |  |  |  |  |  |  |  |  |  | 4567890123 |  |  |  |  |  |  |  |  |  | 5678901234 |  |  |  |  |  |  |  |  |  | 6789012345 |  |  |  |  |  |  |  |  |  | 7890123456 |  |  |  |  |  |  |  |  |  | 8901234567 |  |  |  |  |  |  |  |  |  | 9012345678 |  |  |  |  |  |  |  |  |  |     |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| I           |  |  |  |  |  |  |  |  |  | MP1        |  |  |  |  |  |  |  |  |  | MP2        |  |  |  |  |  |  |  |  |  | MP3        |  |  |  |  |  |  |  |  |  | MP4        |  |  |  |  |  |  |  |  |  | MP5        |  |  |  |  |  |  |  |  |  | MP6        |  |  |  |  |  |  |  |  |  | MP7        |  |  |  |  |  |  |  |  |  | MP8        |  |  |  |  |  |  |  |  |  | MP9 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |      |  |  |  |  |  |  |  |  |  |
| 3           |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 0          |  |  |  |  |  |  |  |  |  | 1   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | 3900 |  |  |  |  |  |  |  |  |  |

| <u>FIELD</u> | <u>CONTENTS</u>                                                                                                       |
|--------------|-----------------------------------------------------------------------------------------------------------------------|
| I            | Mass Point Number                                                                                                     |
| MP1          | Flag for Linear Displacements (X, Y, Z - Inches) in the Ground Coordinate System                                      |
| MP2          | Flag for Euler Angles (PHI, THETA, PSI - Radians) in the Airplane Coordinate System                                   |
| MP3          | Flag for Linear Velocities (X, Y, Z - Inches per Second) in the Ground Coordinate System                              |
| MP4          | Flag for Linear Velocities (U, V, W - Inches per Second) in the Mass Point or Body Coordinate System                  |
| MP5          | Flag for Angular Velocities (P, Q, R - Radians per Second) in the Mass Point or Body Coordinate System                |
| MP6          | Flag for Unfiltered Linear Accelerations (X, Y, Z - G's) in the Mass Point or Body Coordinate System                  |
| MP7          | Flag for Filtered Linear Accelerations (X, Y, Z - G's) in the Mass Point or Body Coordinate System                    |
| MP8          | Flag for Angular Accelerations (P, Q, R - Radians per Second**2) in the Mass Point or Body Coordinate System          |
| MP9          | Flag for Impulse (X, Y, Z in G-sec., P, Q, R in (RAD Per Sec) in Mass Point or Body Coordinate Axes for Filtered Data |

REMARKS:

- (1) Optional data card(s).
- (2) "NMEP" on card 0140 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) "I" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
0 = No  
1 = Yes
- (7) Format for this card is 10I5.

# KRASH INPUT DATA

CARDS 4000:

## MASSLESS NODE POINT PRINTER PLOT PARAMETERS

**DESCRIPTION:** Defines the massless node point number, mass point number, and flags to specify which massless node point output quantity time histories will be printer plotted.

### FORMAT AND EXAMPLE:

| 0           |  |   |  |     |  |     |  | 1          |  |     |  |     |  |     |  | 2                                                                                   |  |                                                                                     |  |                                                                                     |  |  |  | 3          |  |      |  |  |  |  |  | 4           |  |  |  |  |  |  |  | 5          |  |  |  |  |  |  |  | 6           |  |  |  |  |  |  |  | 7          |  |  |  |  |  |  |  | 8           |  |  |  |  |  |  |  |
|-------------|--|---|--|-----|--|-----|--|------------|--|-----|--|-----|--|-----|--|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|--|--|--|------------|--|------|--|--|--|--|--|-------------|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|-------------|--|--|--|--|--|--|--|
| 12345678901 |  |   |  |     |  |     |  | 2345678901 |  |     |  |     |  |     |  | 345678901                                                                           |  |                                                                                     |  |                                                                                     |  |  |  | 2345678901 |  |      |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  | 2345678901 |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  | 2345678901 |  |  |  |  |  |  |  | 12345678901 |  |  |  |  |  |  |  |
| M           |  | I |  | NP1 |  | NP2 |  | NP3        |  | NP4 |  | NP5 |  | NP6 |  |  |  |  |  |  |  |  |  |            |  |      |  |  |  |  |  |             |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |
| 1           |  | 7 |  | 0   |  | 1   |  | 0          |  | 1   |  | 0   |  | 0   |  |                                                                                     |  |                                                                                     |  |                                                                                     |  |  |  |            |  | 4000 |  |  |  |  |  |             |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |             |  |  |  |  |  |  |  |

### FIELD

### CONTENTS

|     |                                                                                                      |
|-----|------------------------------------------------------------------------------------------------------|
| M   | Massless Node Point Number                                                                           |
| I   | Mass Point Number                                                                                    |
| NP1 | Flag for Linear Displacements (X, Y, Z - Inches) in the Ground Coordinate System                     |
| NP2 | Flag for Linear Velocities (X, Y, Z - Inches per Second) in the Ground Coordinate System             |
| NP3 | Flag for Linear Velocities (U, V, W - Inches per Second) in the Mass Point or Body Coordinate System |
| NP4 | Flag for Unfiltered Linear Accelerations (X, Y, Z - G's) in the Mass Point or Body Coordinate System |
| NP5 | Flag for Filtered Linear Accelerations (X, Y, Z - G's) in the Mass Point or Body Coordinate System   |
| NP6 | Flag for Impulse (X, Y, Z in G-sec. P, Q, R in RAD/Sec) in Mass Point or Body Coordinate System      |

### REMARKS:

- (1) Optional data card(s).
- (2) "NNEP" on card 0140 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) "M" and "I" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
0 = No  
1 = Yes
- (7) Format for this card is 8I5.

## KRASH INPUT DATA

CARDS 4100:

### BEAM ELEMENT LOADS PRINTER PLOT PARAMETERS

**DESCRIPTION:** Defines the beam element number and flags to specify which beam element internal load time histories will be printer plotted.

**FORMAT AND EXAMPLE:**

|            |  |  |  |  |            |  |  |  |  |            |  |  |  |  |            |  |  |  |  |            |  |  |  |  |                                                                                    |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |
|------------|--|--|--|--|------------|--|--|--|--|------------|--|--|--|--|------------|--|--|--|--|------------|--|--|--|--|------------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|--|--|--|--|
| 0          |  |  |  |  | 1          |  |  |  |  | 2          |  |  |  |  | 3          |  |  |  |  | 4          |  |  |  |  | 5                                                                                  |  |  |  |  | 6                                                                                   |  |  |  |  | 7                                                                                   |  |  |  |  | 8                                                                                   |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |
| 1234567890 |  |  |  |  | 1234567890 |  |  |  |  | 1234567890 |  |  |  |  | 1234567890 |  |  |  |  | 1234567890 |  |  |  |  | 1234567890                                                                         |  |  |  |  | 1234567890                                                                          |  |  |  |  | 1234567890                                                                          |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |
| I0         |  |  |  |  | BFP1       |  |  |  |  | BFP2       |  |  |  |  | BFP3       |  |  |  |  | BFP4       |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 27         |  |  |  |  | 0          |  |  |  |  | 1          |  |  |  |  | 0          |  |  |  |  | 1          |  |  |  |  |                                                                                    |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  |                                                                                     |  |  |  |  | 4100                                                                                |  |  |  |  |

| <u>FIELD</u>    | <u>CONTENTS</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IJ              | Beam Element Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| BFP1            | Flag for Axial and Shear Forces (FX, FY, FZ - Pounds)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| BFP2            | Flag for Torque and Bending Moments at End "I" (MX, MY, MZ - Inch * Pounds)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BFP3            | Flag for Torque and Bending Moments at End "J" (MX, MY, MZ - Inch * Pounds)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BFP4            | Flag for choosing between beam axis loads or loads in mass axes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <u>REMARKS:</u> | <p>(1) Optional data card(s).</p> <p>(2) "NBFP" on card 0140 specifies the number of these cards for input.</p> <p>(3) All entries are right justified integers.</p> <p>(4) "IJ" must be nonzero.</p> <p>(5) Blank entries are read as zero.</p> <p>(6) Flags for printer plot time histories are defined as follows:<br/> 0 = No<br/> 1 = Yes</p> <p>(7) If BFP4 = 0, then all load data are in the beam element coordinate system shown in Figure 2-5.<br/> If BFP4 = 1, then all load data are in the mass point coordinate system at mass i or j, as appropriate.</p> <p>(8) If BFP4 = 1, then BFP1 through BFP3 control plotting of the following:<br/> BFP1: FX,FY,FZ at mass I, in mass point coordinate system<br/> BFP2: FX,FY,FZ at mass J, in mass point coordinate system<br/> BFP3: MYI and MYJ, moments about y axis in each mass point coordinate system.</p> <p>(9) Format for this card is 5I5.</p> |

## KRASH INPUT DATA

CARDS 4200:

### BEAM ELEMENT DEFLECTION-ROTATION PRINTER PLOT PARAMETERS

**DESCRIPTION:** Defines the beam element number and flags to specify which beam element deflection and rotation time histories will be printer plotted.

**FORMAT AND EXAMPLE:**

[illegible]

| <u>FIELD</u> | <u>CONTENTS</u>                                                                  |
|--------------|----------------------------------------------------------------------------------|
| IJ           | Beam Element Number                                                              |
| BDP1         | Flag for Deflection Differences of End "J" and End "I" (X, Y, Z - Inches)        |
| BDP2         | Flag for Rotation Differences of End "J" and End "I" (Phi, Theta, Psi - Radians) |
| BDP3         | Flag for Rotation Sums of End "J" and End "I" (Phi, Theta, Psi - Radians)        |

## REMARKS:

- (1) Optional data card(s).
- (2) "NBDP" on card 0140 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) "IJ" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
0 = No  
1 = Yes
- (7) All deflection-rotation data is output in the beam element coordinate systems shown in Figure 2-3.
- (8) Format for this card is 4I5.

# KRASH INPUT DATA

CARDS 4300:

BEAM ELEMENT STRESS RATIO PRINTER PLOT PARAMETERS

DESCRIPTION: Defines the beam element number and flags to specify which beam element stress ratio time histories will be printer plotted.

FORMAT AND EXAMPLE:

| 0           |      |      |      |      |      | 1           |  |  |  |  |  | 2           |  |  |  |  |  | 3           |  |  |  |  |  | 4           |  |  |  |  |  | 5           |  |  |  |  |  | 6           |  |  |  |  |  | 7           |  |  |  |  |  | 8           |  |  |  |  |  |
|-------------|------|------|------|------|------|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|-------------|--|--|--|--|--|
| 12345678901 |      |      |      |      |      | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  | 12345678901 |  |  |  |  |  |
| IJ          | STP1 | STP2 | STP3 | STP4 | STP5 |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |
| 7           | 0    | 1    | 1    | 0    | 0    |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  | 4300        |  |  |  |  |  |             |  |  |  |  |  |             |  |  |  |  |  |

FIELD

CONTENTS

IJ Beam Element Number  
 STP1 Flag for Stress Ratio for Top and Bottom Fibers Using Maximum Shear Stress Theory  
 STP2 Flag for Stress Ratio of Left and Right Fibers Using Maximum Shear Stress Theory  
 STP3 Flag for Stress Ratio of Top and Bottom Fibers using Constant Energy of Distortion Theory  
 STP4 Flag for Stress Ratio of Left and Right Fibers Using Constant Energy of Distortion Theory  
 STP5 Flag for Stress Ratio of Tension-Only, Compression-Only, and Axial Buckling Loads

REMARKS:

- (1) Optional data card(s).
- (2) "NSTP" on card 0140 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) "IJ" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
 0 = No  
 1 = Yes
- (7) Stress parameters must be provided for the beam elements on the 0900-series cards.
- (8) "NSC" on card 0050 must be flagged "yes."
- (9) Format for this card is 6I5.

# KRASH INPUT DATA

CARDS 4400:

EXTERNAL CRUSHING SPRING LOAD-DEFLECTION PRINTER PLOT  
PARAMETERS

DESCRIPTION: Defines the end point and flags to specify which external crushing spring load and deflection time histories will be printer plotted.

FORMAT AND EXAMPLE:

| 0          |  |   |  |      |  |      |  |  |  | 1          |  |  |  |  |  |  |  |  |  | 2          |  |  |  |  |  |  |  |  |  | 3          |  |  |  |  |  |  |  |  |  | 4          |  |  |  |  |  |  |  |  |  | 5          |  |  |  |  |  |  |  |  |  | 6          |  |  |  |  |  |  |  |  |  | 7          |  |  |  |  |  |  |  |  |  | 8          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |    |  |
|------------|--|---|--|------|--|------|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|----|--|
| 1234567890 |  |   |  |      |  |      |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  | 1234567890 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |    |  |
| I          |  | M |  | SEP1 |  | SEP2 |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |            |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | </ |  |

## KRASH INPUT DATA

CARDS 4500:

### BEAM ELEMENT STRAIN AND DAMPING ENERGY PRINTER PLOT PARAMETERS

**DESCRIPTION:** Defines the beam element number and flags to specify which beam internal element strain and damping energy time history will be printer plotted

**FORMAT AND EXAMPLE:**

[illegible]

FIELD

## CONTENTS

|      |                                   |
|------|-----------------------------------|
| IJ   | Beam Element Number               |
| ENG1 | Flag for Strain Energy (in.-lb.)  |
| ENG2 | Flag for Damping Energy (in.-lb.) |

REMARKS:

- (1) Optional data cards:
- (2) "NENP" on card 0140 specifies the number of these cards for input.
- (3) All entries must be right justified.
- (4) "IJ" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
0 = No  
1 = Yes
- (7) Format for this card is 3I5.

# KRASH INPUT DATA

CARDS 4600: DYNAMIC RESPONSE INDEX (DRI) PRINTER PLOT PARAMETERS

DESCRIPTION: Defines the mass point number of a DRI beam element for dynamic response index (DRI) time history printer plots.

FORMAT AND EXAMPLE:

| 0                                                                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
|------------------------------------------------------------------------|---|---|---|---|---|---|---|------|
| 1234567890123456789012345678901234567890123456789012345678901234567890 |   |   |   |   |   |   |   |      |
| J                                                                      |   |   |   |   |   |   |   |      |
| 27                                                                     |   |   |   |   |   |   |   | 4600 |

| <u>FIELD</u> | <u>CONTENTS</u>   |
|--------------|-------------------|
| J            | Mass Point Number |

REMARKS:

- (1) Optional data card(s).
- (2) "NDRP" on card 0140 specifies the number of these cards for input.
- (3) All entries are right justified integers.
- (4) "J" must be nonzero.
- (5) Blank entries are read as zero.
- (6) Flags for printer plot time histories are defined as follows:  
0 = No  
1 = Yes
- (7) The mass point number must be end "J" of a DRI beam element.
- (8) Format for this card is I5.

CARD 4700: END OF DATA

DESCRIPTION: Defines the final card of the input data.

FORMAT AND EXAMPLE:

| 0                                                                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    |
|------------------------------------------------------------------------|---|---|---|---|---|---|---|------|
| 1234567890123456789012345678901234567890123456789012345678901234567890 |   |   |   |   |   |   |   |      |
| END                                                                    |   |   |   |   |   |   |   |      |
| END                                                                    |   |   |   |   |   |   |   | 4700 |

| <u>FIELD</u> | <u>CONTENTS</u>                     |
|--------------|-------------------------------------|
| End          | The Mnemonic "End" (Left Justified) |

REMARKS: (1) Required data card.

## 2.3 OUTPUT AND SAMPLE CASE

As explained in Section 2.1, the most general case of a KRASH85 analysis involves the use of three separate programs: KRASHIC, MSCTAN, and KRASH85. Table 2-6 shows a summary of the output from each program. A sample case which models one-half of a transport airplane with 21 masses and 28 internal beams will be used to illustrate the output for each program. This model is illustrated in figure 2-7. This is a test case with special elements for checkout purposes; it does not represent a realistic airplane model.

TABLE 2-6. SUMMARY OF KRASH85 OUTPUT

| KRASHIC                                                                                                                                                                                                                                                                                                                                                                                       | KRASH85                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• Echo of input data (2 times)</li><li>• Formatted printout of input data</li><li>• Miscellaneous calculated data</li></ul>                                                                                                                                                                                                                             | <ul style="list-style-type: none"><li>• Echo of input data (2 times)</li><li>• Formatted printout of input data</li><li>• Miscellaneous calculated data</li><li>• Time histories of model responses<ul style="list-style-type: none"><li>• Mass data</li><li>• Internal beam data</li><li>• External spring data</li><li>• Energy data</li></ul></li><li>• Summaries at end of run<ul style="list-style-type: none"><li>• External spring loading/unloading</li><li>• Summary of plastic hinge formations</li><li>• Summary of internal beam yielding and rupture</li><li>• Summary of energy distribution</li><li>• Interaction load time-histories</li><li>• Vehicle c.g. motion time-histories</li><li>• Time history plots of selected response quantities</li></ul></li></ul> |
| MSCTAN                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <ul style="list-style-type: none"><li>• Executive control deck echo</li><li>• Case control deck echo</li><li>• Input bulk data deck echo</li><li>• Sorted bulk data deck echo</li><li>• Displacement vector</li><li>• Load vector</li><li>• Forces of single-point constraint</li><li>• Forces in bar elements</li><li>• Element strain energies</li><li>• Grid point force balance</li></ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 2.3.1 KRASHIC Output

#### 2.3.1.1 Echo of Input Data

This is a direct listing of the input data cards for the case being analyzed. Figure 2-8 illustrates this print for the sample case. Each

page of the listing is preceded by a heading which identifies the column number. The sequence numbers are in columns 77 - 80. The first card, with a 1 in column 10, is generated by the Job Control Language (JCL), and is not part of the data set (LT.SAMPLE.DATA in this case) in the user's library. This first card tells the program whether or not to read an additional data set of static deflections. A value of 1 means read the additional data set, 0 means don't read it. The JCL is set up to supply a zero for this card for the first iteration, when no static deflection information is available, and a 1 for all subsequent iterations, when the data are available, as generated by NASTRAN. The listing in figure 2-8 is from the last iteration, and therefore the first card has a 1 in column 10. To reiterate, this card is automatically generated by the JCL; the user does not supply this card.

Cards 10 through 3480 are supplied by the user and represent the basic KRASH85 data set described in Section 2.2. This is the data set referred to as XYZ.DATA in Section 2.1. Note how the dummy title cards serve to segment the data and facilitate reviewing and editing the data set.

Following card 3480 is a set of cards numbered 1 through 76. This is the static deflection data set referred to as XYZ.NASOUT.DATA in Section 2.1. The first six cards of this data set are title cards, the remaining cards are the three deflections and three rotations of each grid point in the NASTRAN model used to solve the static loads problem. Cards 1 through 76 are all generated automatically; the user does not have to develop this data set. The data set will reside in the user's library under the name XYZ.NASOUT.DATA.

The complete echo shown in figure 2-8 is provided twice. One copy can be used to mark up for forming a new data set, while the other copy remains as a clean record of the input for the current case.

#### 2.3.1.2 Formatted Print-Out of Input Data

This section of the print output organizes all the input data into logical groups and prints out the data with self-explanatory identification headings. This output is illustrated in figure 2-9 for the sample case. The data are organized into the following major groups:

- Case title cards
- Program size data
- Acceleration data transfer control parameters
- Program data management control data (restart option)
- Program control data
- Vehicle initial conditions
- Initial mass/node point deflections (read from XYZ.NASOUT.DATA)
- Generalized surface data
- Corresponding mass and beam numbering (RUNMOD = 2 only)
- Mass data
- Node point data (optional)
- External spring data (optional)
- Material properties
- Internal beam data
- Unsymmetrical beam data (optional)
- Plastic hinge and end-fixity data (optional)
- Oleo strut beam data (optional)
- Nonlinear beam data (optional)
- Volume penetration data (optional)
- DRI elements (optional)
- Volume change data (optional)
- Nonstandard maximum deflections (optional)
- Nonstandard maximum forces (optional)
- Load interaction curve sign conventions and curve data (optional)
- Nonzero angular momenta, cross-products of inertia, lift constants (optional)

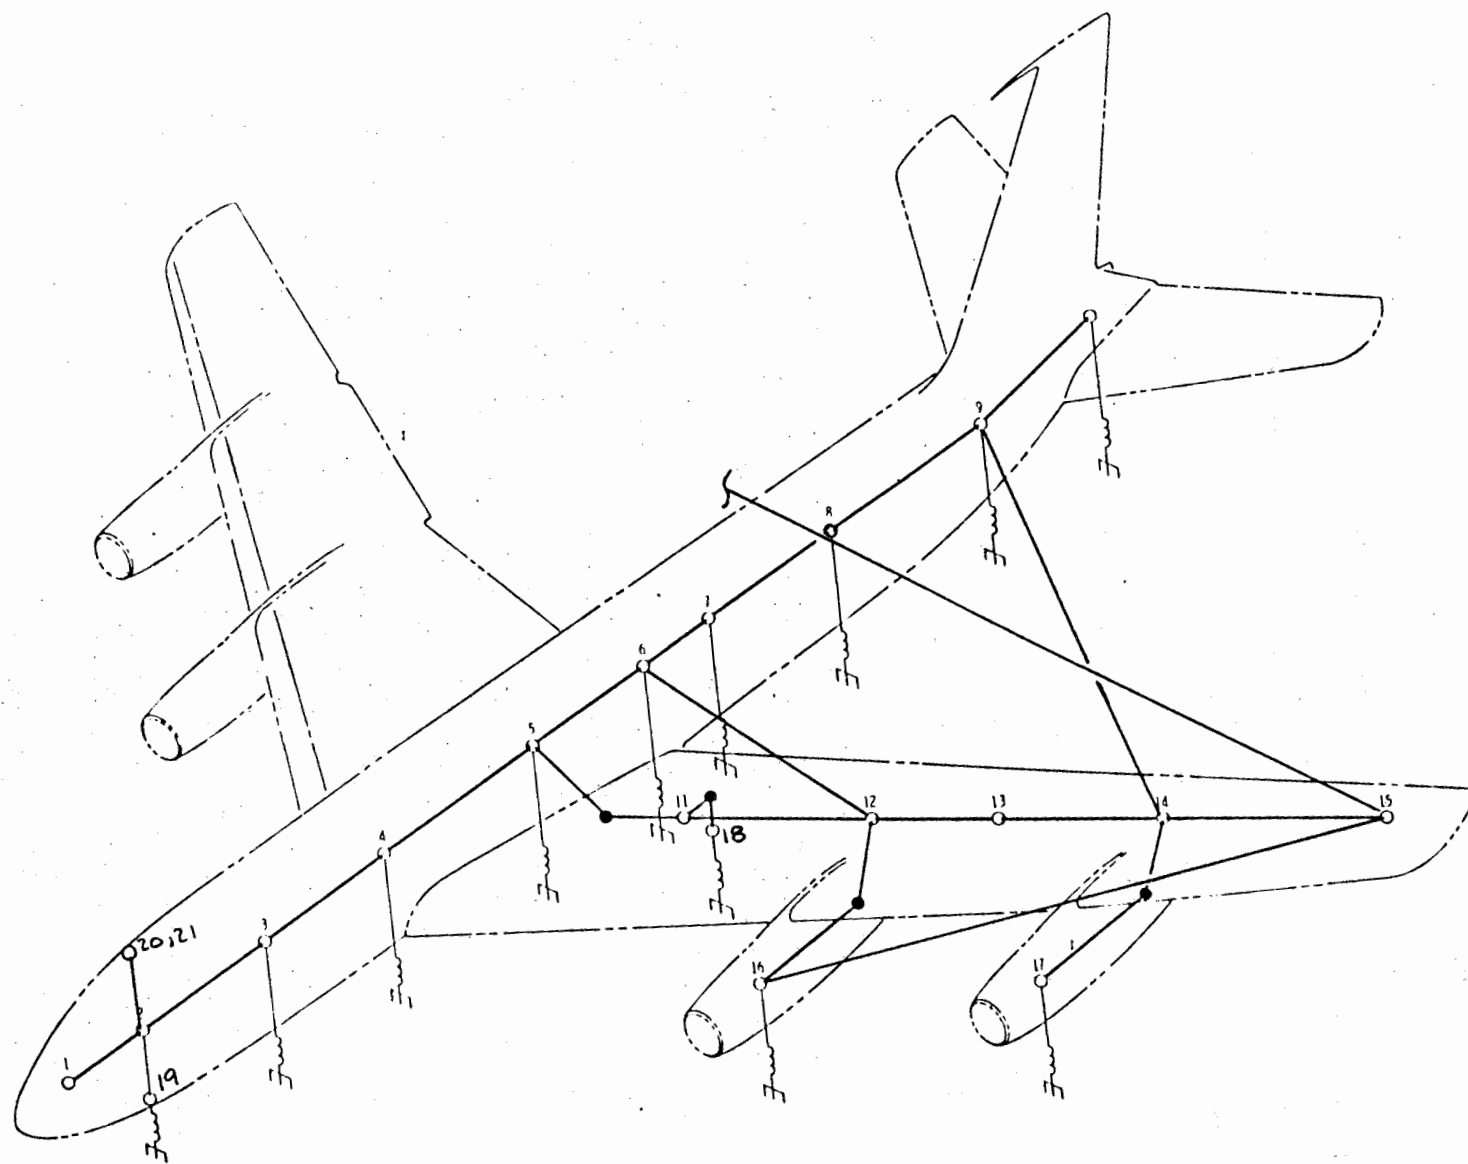


FIGURE 2-7. LARGE TRANSPORT AIRPLANE MODEL - SAMPLE CASE

THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED THEREIN BE USED BY OR DISCLOSED TO OTHERS EXCEPT AS EXPRESSLY AUTHORIZED BY LOCKHEED CALIFORNIA COMPANY A UNIT OF LOCKHEED CORPORATION

ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

|          | 1                                                                                | 2 | 3 | 4 | 5 | 6 | 7   | 8          |
|----------|----------------------------------------------------------------------------------|---|---|---|---|---|-----|------------|
| CARD NO. | 12345678901234567890123456789012345678901234567890123456789012345678901234567890 |   |   |   |   |   |     |            |
| 1        | 1                                                                                |   |   |   |   |   |     |            |
| 2        | LT.SAMPLE.DATA                                                                   |   |   |   |   |   |     | 00000010   |
| 3        | 21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL                          |   |   |   |   |   |     | 00000020   |
| 4        | 12345678901234567890123456789012345678901234567890123456789012345678901200000030 |   |   |   |   |   |     |            |
| 5        | NM NSP NB NLB NNP NPIN NUB NDRINOLEO NACC MVP NVCH NMTL ND                       |   |   |   |   |   |     | 00000040   |
| 6        | 21. 19 28 1 12 10 4 1 2 19 0 0 0 0                                               |   |   |   |   |   |     | 00000050   |
| 7        | NVBM NFBMNVBMNFBMN NKM NHI NPH TOL1 TOL2 TOL3 NSC NICNAERONBOMB                  |   |   |   |   |   |     | 00000060   |
| 8        | 0 2 0 2 0 2 2 1000 1000 1000 1 1 0 1                                             |   |   |   |   |   |     | 00000070   |
| 9        | NSCV NLICNWRGR NBAL ICDICITR                                                     |   |   |   |   |   |     | 00000080   |
| 10       | 1 15 0 5 1 1                                                                     |   |   |   |   |   |     | 00000090   |
| 11       | GRAPHICS                                                                         |   |   |   |   |   |     | 00000100   |
| 12       |                                                                                  |   |   |   |   |   |     | 00000110   |
| 13       |                                                                                  |   |   |   |   |   | 200 | 00000120   |
| 14       | ONE RESTART AND ONE SAVE CARD FOLLOWS                                            |   |   |   |   |   |     | 00000130   |
| 15       |                                                                                  |   |   |   |   |   |     | 00000140   |
| 16       |                                                                                  |   |   |   |   |   |     | 00000150   |
| 17       | IPRINT DELTAT TMAX PLOWT FCUT RUNMOD                                             |   |   |   |   |   |     | 00000160   |
| 18       | 200 .000050 0.1 0.000 50. 1.                                                     |   |   |   |   |   |     | 00000170   |
| 19       | BLANK CARD FOLLOWS                                                               |   |   |   |   |   |     | 00000180   |
| 20       |                                                                                  |   |   |   |   |   |     | 00000190   |
| 21       | NSF NTF NDE NSPD NED NS NRP NIMP NBC : PRINT DATA                                |   |   |   |   |   |     | 00000200   |
| 22       | 1 1 1 1 1 0 1 0 1                                                                |   |   |   |   |   |     | 00000210   |
| 23       | NMEP NNEP NBFP NBDP NSTP NSEP NENP NDRP NPLTNPFCT : PLOT DATA                    |   |   |   |   |   |     | 00000220   |
| 24       | 0 0 0 6 0 0 0 0 0 0                                                              |   |   |   |   |   |     | 00000230   |
| 25       | INITIAL CONDITION DATA : 3 CARDS                                                 |   |   |   |   |   |     | 00000240   |
| 26       | 3140.00 000.00 300.00                                                            |   |   |   |   |   |     | 00000250   |
| 27       | 000.00 0.1 000.00                                                                |   |   |   |   |   |     | 00000260   |
| 28       | 000.00 .01745 000.00 000.00 000.00 0.001.1463E-07                                |   |   |   |   |   |     | 00000270   |
| 29       | MASS DATA : NM CARDS                                                             |   |   |   |   |   |     | 00000280   |
| 30       | 1585.0 199.0 0.0 220.0.11514E+05.4 E+05.15 E+05                                  |   |   |   |   |   |     | 100000290  |
| 31       | 9064.5 300.0 0.0 218.7.89080E+05.3 E+06.99 E+05                                  |   |   |   |   |   |     | 200000300  |
| 32       | 15318.1 460.0 0.0 208.7.16278E+06.96935E+05.10309E+06                            |   |   |   |   |   |     | 300000310  |
| 33       | 13096.0 620.0 0.0 206.0.19627E+06.66715E+05.79389E+05                            |   |   |   |   |   |     | 400000320  |
| 34       | 21752.6 820.0 0.0 200.2.49106E+06.12567E+06.14651E+06                            |   |   |   |   |   |     | 500000330  |
| 35       | 7901.5 960.0 0.0 212.4.81383E+05.12 E+06.2 E+06                                  |   |   |   |   |   |     | 600000340  |
| 36       | 9190.7 1040.0 0.0 207.9.87536E+05.14 E+06.2 E+06                                 |   |   |   |   |   |     | 700000350  |
| 37       | 9938.4 1200.0 0.0 225.1.88098E+05.18 E+06.3 E+06                                 |   |   |   |   |   |     | 800000360  |
| 38       | 5702.0 1359.9 0.0 260.0.96249E+05.41788E+05.26039E+05                            |   |   |   |   |   |     | 900000370  |
| 39       | 6175.2 1570.0 0.0 302.3.21530E+06.10798E+06.15863E+06                            |   |   |   |   |   |     | 1000000380 |
| 40       | 9670.6 801.3 118.3 188.3.15213E+05.13858E+06.36 E+06                             |   |   |   |   |   |     | 1100000390 |
| 41       | 10065.6 852.3 271.8 203.1.19510E+05.12263E+06.3 E+06                             |   |   |   |   |   |     | 1200000400 |
| 42       | 5286.5 943.5 430.7 219.9.72715E+04.52619E+05.11 E+06                             |   |   |   |   |   |     | 1300000410 |
| 43       | 3759.0 1045.8 583.5 243.5.44083E+04.25823E+05.60 E+05                            |   |   |   |   |   |     | 1400000420 |
| 44       | 1542.3 1112.6 740.6 255.1.16708E+04.90137E+04.18 E+05                            |   |   |   |   |   |     | 1500000430 |
| 45       | 5400.0 719.0 321.6 165.8 3651.56 25746. 29374.6                                  |   |   |   |   |   |     | 1600000440 |
| 46       | 5151.0 902.8 551.6 188.1 3712. 24588.2 28178.                                    |   |   |   |   |   |     | 1700000450 |
| 47       | 1922.0 887.0 131.6 90.7 371. 1600. 2000.                                         |   |   |   |   |   |     | 1800000460 |
| 48       | 238.0 279.0 0.0 85.0 24. 300. 500.                                               |   |   |   |   |   |     | 1900000470 |
| 49       | 1000. 300.0 0.0 238.7 1000. 1000. 1000.                                          |   |   |   |   |   |     | 2000000480 |
| 50       | 1000. 300.0 0.0 238.7 1000. 1000. 1000.                                          |   |   |   |   |   |     | 2100000490 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 1 OF 9)

ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

|          | 1                                                                                | 2     | 3      | 4     | 5        | 6       | 7    | 8        |
|----------|----------------------------------------------------------------------------------|-------|--------|-------|----------|---------|------|----------|
| CARD NO. | 12345678901234567890123456789012345678901234567890123456789012345678901234567890 |       |        |       |          |         |      |          |
| 51       | NODE POINT DATA : NNP CARDS                                                      |       |        |       |          |         |      | 00000500 |
| 52       | 1                                                                                | 5     | 775.1  | 48.0  | 181.0    |         |      | 00000510 |
| 53       | 1                                                                                | 11    | 773.9  | 118.3 | 186.3    |         |      | 00000520 |
| 54       | 2                                                                                | 11    | 887.0  | 131.6 | 179.7    |         |      | 00000530 |
| 55       | 3                                                                                | 11    | 887.0  | 131.6 | 179.7    |         |      | 00000540 |
| 56       | 1                                                                                | 12    | 811.8  | 321.6 | 199.6    |         |      | 00000550 |
| 57       | 1                                                                                | 14    | 994.5  | 551.6 | 220.5    |         |      | 00000560 |
| 58       | 1                                                                                | 15    | 1148.0 | 740.6 | 261.3    |         |      | 00000570 |
| 59       | 2                                                                                | 15    | 1112.6 | 740.6 | 255.1    |         |      | 00000580 |
| 60       | 1                                                                                | 16    | 735.7  | 321.6 | 199.6    |         |      | 00000590 |
| 61       | 2                                                                                | 16    | 719.0  | 321.6 | 165.8    |         |      | 00000600 |
| 62       | 1                                                                                | 17    | 918.4  | 551.6 | 220.5    |         |      | 00000610 |
| 63       | 1                                                                                | 2     | 279.0  | 0.0   | 147.5    |         |      | 00000620 |
| 64       | EXTERNAL SPRING DATA : 2 X NSP CARDS                                             |       |        |       |          |         |      | 00000630 |
| 65       | 1                                                                                | 3     | 70.    | 0.35  | 175000.  |         |      | 00000640 |
| 66       | 2                                                                                | 3     | 82.7   | 0.35  | 300000.0 |         |      | 00000650 |
| 67       | 3                                                                                | 3     | 72.7   | 0.35  | 100000.0 |         |      | 00000660 |
| 68       | 4                                                                                | 3     | 70.0   | 0.35  | 300000.0 |         |      | 00000670 |
| 69       | 5                                                                                | 3     | 64.2   | 0.35  | 300000.0 |         |      | 00000680 |
| 70       | 6                                                                                | 3     | 76.4   | 0.35  | 300000.0 |         |      | 00000690 |
| 71       | 7                                                                                | 3     | 69.9   | 0.35  | 100000.0 |         |      | 00000700 |
| 72       | 8                                                                                | 3     | 69.1   | 0.35  | 100000.0 |         |      | 00000710 |
| 73       | 9                                                                                | 3     | 64.0   | 0.35  | 300000.0 |         |      | 00000720 |
| 74       | 10                                                                               | 3     | 82.0   | 0.35  | 300000.0 |         |      | 00000730 |
| 75       | 11                                                                               | 3     | 28.    | 0.35  | 100000.  |         |      | 00000740 |
| 76       | 12                                                                               | 3     | 14.    | 0.35  | 100000.  |         |      | 00000750 |
| 77       | 13                                                                               | 3     | 11.    | 0.35  | 100000.  |         |      | 00000760 |
| 78       | 14                                                                               | 3     | 7.     | 0.35  | 100000.  |         |      | 00000770 |
| 79       | 15                                                                               | 3     | 3.     | 0.35  | 100000.  |         |      | 00000780 |
| 80       | 16                                                                               | 3     | 29.8   | 0.35  | 272000.  |         |      | 00000790 |
| 81       | 17                                                                               | 3     | 28.    | 0.35  | 272000.  |         |      | 00000800 |
| 82       | 18                                                                               | 3     | 19.65  | 0.30  | 100000.  |         |      | 00000810 |
| 83       | 19                                                                               | 3     | 16.45  | 0.30  | 100000.  |         |      | 00000820 |
| 84       | 1.3                                                                              | 1.5   | 1.6    | 10.   | 70000.   | 7000.   | 0.   | 00000830 |
| 85       | 1.3                                                                              | 1.5   | 1.6    | 10.   | 140000.  | 14000.  | 0.00 | 00000840 |
| 86       | 1.0                                                                              | 6.0   | 10.    | 21.   | 115000.  | 90000.  | 0.00 | 00000850 |
| 87       | 1.0                                                                              | 1.1   | 2.0    | 3.0   | 340000.  | 200000. | 0.00 | 00000860 |
| 88       | 1.0                                                                              | 1.1   | 2.0    | 3.0   | 340000.  | 200000. | 0.00 | 00000870 |
| 89       | 1.0                                                                              | 1.1   | 2.0    | 3.0   | 340000.  | 200000. | 0.00 | 00000880 |
| 90       | 1.                                                                               | 6.    | 10.    | 21.   | 60000.   | 48000.  | 0.00 | 00000890 |
| 91       | 1.                                                                               | 6.    | 10.    | 21.   | 68000.   | 48000.  | 0.00 | 00000900 |
| 92       | 1.                                                                               | 1.1   | 2.0    | 3.    | 300000.  | 30000.  | 0.00 | 00000910 |
| 93       | 1.                                                                               | 1.1   | 2.0    | 3.    | 300000.  | 30000.  | 0.00 | 00000920 |
| 94       | 1.                                                                               | 1.5   | 2.     | 7.    | 330000.  | 330000. |      | 00000930 |
| 95       | 1.                                                                               | 1.5   | 2.     | 7.    | 330000.  | 330000. | 0.00 | 00000940 |
| 96       | 1.                                                                               | 1.5   | 2.     | 7.    | 330000.  | 330000. |      | 00000950 |
| 97       | 1.                                                                               | 1.5   | 2.     | 7.    | 330000.  | 330000. |      | 00000960 |
| 98       | 1.                                                                               | 1.5   | 2.     | 7.    | 330000.  | 330000. | 0.00 | 00000970 |
| 99       | 1.                                                                               | 8.    | 9.     | 16.   | 10000.   | 30000.  |      | 00000980 |
| 100      | 1.                                                                               | 8.    | 9.     | 16.   | 10000.   | 30000.  |      | 00000990 |
| 101      | 2.                                                                               | 2.001 | 8.05   | 8.051 | 62200.   | 294700. | .02  | 00001000 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 2 OF 9)

ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

|          | 1                                                                      | 2     | 3     | 4         | 5         | 6        | 7              | 8             |           |
|----------|------------------------------------------------------------------------|-------|-------|-----------|-----------|----------|----------------|---------------|-----------|
| CARD NO. | 1234567890123456789012345678901234567890123456789012345678901234567890 |       |       |           |           |          |                |               |           |
| 102      | 2.                                                                     | 2.001 | 5.75  | 5.751     | 16150.    | 51500.   | .02            | 00001010      |           |
| 103      | INTERNAL BEAM DATA : NB CARDS                                          |       |       |           |           |          |                | 00001020      |           |
| 104      | 1                                                                      | 2     | 32.00 | 0.00      | 6.20E+04  | 3.70E+04 | 0.00 96.0 96.0 | 500001030     |           |
| 105      | 2                                                                      | 3     | 36.00 | 0.00      | 7.70E+04  | 4.30E+04 | 0.00 99.0 99.0 | 500001040     |           |
| 106      | 3                                                                      | 4     | 36.00 | 0.00      | 8.60E+04  | 4.30E+04 | 0.00 56.0 56.0 | 500001050     |           |
| 107      | 4                                                                      | 5     | 59.00 | 0.00      | 13.60E+04 | 4.65E+04 | 0.00 56.0 56.0 | 500001060     |           |
| 108      | 5                                                                      | 6     | 59.00 | 0.00      | 11.60E+04 | 4.65E+04 | 0.00 66.0 66.0 | 500001070     |           |
| 109      | 6                                                                      | 7     | 57.00 | 0.00      | 13.60E+04 | 5.70E+04 | 0.00 88.0 88.0 | 500001080     |           |
| 110      | 7                                                                      | 8     | 48.00 | 0.00      | 11.40E+04 | 6.20E+04 | 0.00 91.0 91.0 | 500001090     |           |
| 111      | 8                                                                      | 9     | 37.00 | 0.00      | 5.60E+04  | 3.35E+04 | 0.00 51.0 51.0 | 500001100     |           |
| 112      | 9                                                                      | 10    | 25.00 | 0.00      | 9.00E+04  | 9.50E+03 | 0.00 50.0 50.0 | 500001110     |           |
| 113      | 5                                                                      | 11    | 54.00 | 4.800E+04 | 1.59E+04  | 1.14E+05 | 0.00 1.0 1.0   | 500001120     |           |
| 114      | 1                                                                      | 11    | 63.20 | 2.600E+04 | 1.14E+04  | 1.02E+05 | 0.00 1.0 1.0   | 500001130     |           |
| 115      | 12                                                                     | 13    | 56.3  | 1.000E+04 | 4.70E+03  | 5.80E+04 | 0.00 1.0 1.0   | 500001140     |           |
| 116      | 13                                                                     | 14    | 40.7  | 4.800E+03 | 2.00E+03  | 2.10E+04 | 0.00 1.0 1.0   | 500001150     |           |
| 117      | 14                                                                     | 15    | 20.   | 2.700E+03 | 1.20E+03  | 8.00E+03 | 0.00 1.0 1.0   | 500001160     |           |
| 118      | 1                                                                      | 12    | 8.0   | 2.208E+02 | 7.32E+02  | 1.00E+02 | 0.00 1.0 1.0   | 400001170     |           |
| 119      | 1                                                                      | 14    | 8.0   | 2.208E+02 | 7.32E+02  | 1.00E+02 | 0.00 1.0 1.0   | 400001180     |           |
| 120      | 2                                                                      | 11    | 0.01  | 150.0     | 239.E+00  | 239.E+00 | 0.00 1.0 1.0   | 500001190     |           |
| 121      | 3                                                                      | 11    | 0.01  | 150.0     | 239.E+00  | 239.E+00 | 0.00 1.0 1.0   | 100001200     |           |
| 122      | 1                                                                      | 2     | 0.01  | 5.        | 32.5E+00  | 32.5E+00 | 0.00 1.0 1.0   | 100001210     |           |
| 123      | 6                                                                      | 12    | 40.7  | 4.800E+03 | 2.00E+03  | 2.10E+04 | 0.00 1.0 1.0   | 500001220     |           |
| 124      | 9                                                                      | 14    | 40.7  | 4.800E+03 | 2.00E+03  | 2.10E+04 | 0.00 1.0 1.0   | 500001230     |           |
| 125      | 12                                                                     | 0     | 40.7  | 4.800E+03 | 2.00E+03  | 2.10E+04 | 0.00 1.0 1.0   | 500001240     |           |
| 126      | 2                                                                      | 20    | 10.   | 1.0       | 1.0       | 1.0      | 0.00 1.0 1.0   | 900001250     |           |
| 127      | 2                                                                      | 21    | 10.   | 1.0       | 1.0       | 1.0      | 0.00 1.0 1.0   | 101000001260  |           |
| 128      | 15                                                                     | 16    | 20.   |           |           |          | 0.00 1.0 1.0   | 500001270     |           |
| 129      | 2                                                                      | 15    | 2     | 16        | 20.       |          | 0.00 1.0 1.0   | 500001280     |           |
| 130      | 15                                                                     | 0     | 20.   | 2.700E+03 | 1.20E+03  | 8.00E+03 | 0.00 1.0 1.0   | 500001290     |           |
| 131      | 2                                                                      | 15    | 0     | 20.       | 2.700E+03 | 1.20E+03 | 8.00E+03       | 0.00 1.0 1.0  | 500001300 |
| 132      | BEAM END FIXITY CARDS: NPIN CARDS                                      |       |       |           |           |          |                | 00001310      |           |
| 133      | 1                                                                      | 2     | 0     | 0         | 1         | 1        | 0. 0. 0.0088   | 1.15 00001320 |           |
| 134      | 2                                                                      | 3     | 0     | 0         | 1         | 1        | 0. 0. 1.25     | 1.25 00001330 |           |
| 135      | 3                                                                      | 4     | 0     | 0         | 1         | 1        | 0. 0. 1.1      | 1.1 00001340  |           |
| 136      | 4                                                                      | 5     | 0     | 0         | 1         | 1        | 0. 0. 1.15     | 1.15 00001350 |           |
| 137      | 5                                                                      | 6     | 0     | 0         | 1         | 1        | 0. 0. 1.25     | 1.25 00001360 |           |
| 138      | 6                                                                      | 7     | 0     | 0         | 1         | 1        | 0. 0. 1.25     | 1.25 00001370 |           |
| 139      | 7                                                                      | 8     | 0     | 0         | 1         | 1        | 0. 0. 1.15     | 1.15 00001380 |           |
| 140      | 8                                                                      | 9     | 0     | 0         | 1         | 1        | 0. 0. 1.0      | 1.0 00001390  |           |
| 141      | 6                                                                      | 12    | 0     | 0         | 1         | 1        | 0. 0. 0.       | 0. 00001400   |           |
| 142      | 9                                                                      | 14    | 0     | 1         | 0         | 1        | 0. 0. 0.       | 0. 00001410   |           |
| 143      | UNSYM BEAM DATA: NUB CARDS                                             |       |       |           |           |          |                | 00001420      |           |
| 144      | 15                                                                     | 16    | 1     |           |           |          | .08            | 00001430      |           |
| 145      | 2                                                                      | 15    | 2     | 16        | -1        |          | .08            | 00001440      |           |
| 146      | 15                                                                     | 0     | 1     |           |           |          | .3             | 00001450      |           |
| 147      | 2                                                                      | 15    | 0     | -1        |           |          | .3             | 00001460      |           |
| 148      | OLEO BEAM CARDS:                                                       |       |       |           |           |          |                | 00001470      |           |
| 149      | 1.                                                                     |       | 1     |           |           |          |                | 00001480      |           |
| 150      | 2                                                                      | 11    | 18    | 20.982    | 10855.    | 739.     | 1.4 20.        | 00001490      |           |
| 151      | 1                                                                      | 2     | 19    | 16.965    | 3420.     | 289.     | 1.4 16.        | 00001500      |           |
| 152      | 2                                                                      | 11    | 18    | 4.0       | 0.        | .1E06    | .1E06 5000.    | 1 00001510    |           |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 3 OF 9)

# ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

| CARD NO.                                                                         | 1                                | 2 | 3      | 4   | 5  | 6      | 7      | 8        |
|----------------------------------------------------------------------------------|----------------------------------|---|--------|-----|----|--------|--------|----------|
| 12345678901234567890123456789012345678901234567890123456789012345678901234567890 |                                  |   |        |     |    |        |        |          |
| 153                                                                              | 1                                | 2 | 19     | 3.4 | 0. | 50.E03 | 50.E03 | 500.     |
| 154                                                                              |                                  |   | 45     |     |    |        |        | 00001520 |
| 155                                                                              | -0.2                             |   | 352.7  |     |    |        |        | 00001530 |
| 156                                                                              | -0.0964                          |   | 352.7  |     |    |        |        | 00001540 |
| 157                                                                              | -0.0376                          |   | 10.24  |     |    |        |        | 00001550 |
| 158                                                                              | 0.124                            |   | 23.62  |     |    |        |        | 00001560 |
| 159                                                                              | 0.341                            |   | 22.21  |     |    |        |        | 00001570 |
| 160                                                                              | 0.607                            |   | 17.90  |     |    |        |        | 00001580 |
| 161                                                                              | 0.953                            |   | 8.24   |     |    |        |        | 00001590 |
| 162                                                                              | 1.46                             |   | 3.38   |     |    |        |        | 00001600 |
| 163                                                                              | 2.17                             |   | 2.13   |     |    |        |        | 00001610 |
| 164                                                                              | 3.07                             |   | 1.25   |     |    |        |        | 00001620 |
| 165                                                                              | 4.13                             |   | 1.56   |     |    |        |        | 00001630 |
| 166                                                                              | 5.21                             |   | 1.79   |     |    |        |        | 00001640 |
| 167                                                                              | 6.20                             |   | 2.46   |     |    |        |        | 00001650 |
| 168                                                                              | 7.05                             |   | 3.58   |     |    |        |        | 00001660 |
| 169                                                                              | 7.72                             |   | 6.26   |     |    |        |        | 00001670 |
| 170                                                                              | 8.20                             |   | 13.47  |     |    |        |        | 00001680 |
| 171                                                                              | 8.53                             |   | 31.50  |     |    |        |        | 00001690 |
| 172                                                                              | 8.74                             |   | 62.40  |     |    |        |        | 00001700 |
| 173                                                                              | 8.91                             |   | 64.06  |     |    |        |        | 00001710 |
| 174                                                                              | 9.12                             |   | 34.22  |     |    |        |        | 00001720 |
| 175                                                                              | 9.41                             |   | 16.03  |     |    |        |        | 00001730 |
| 176                                                                              | 9.83                             |   | 8.42   |     |    |        |        | 00001740 |
| 177                                                                              | 10.39                            |   | 5.24   |     |    |        |        | 00001750 |
| 178                                                                              | 11.08                            |   | 3.68   |     |    |        |        | 00001760 |
| 179                                                                              | 11.87                            |   | 2.93   |     |    |        |        | 00001770 |
| 180                                                                              | 12.71                            |   | 2.77   |     |    |        |        | 00001780 |
| 181                                                                              | 13.54                            |   | 3.38   |     |    |        |        | 00001790 |
| 182                                                                              | 14.27                            |   | 4.93   |     |    |        |        | 00001800 |
| 183                                                                              | 14.83                            |   | 9.33   |     |    |        |        | 00001810 |
| 184                                                                              | 15.21                            |   | 25.53  |     |    |        |        | 00001820 |
| 185                                                                              | 15.40                            |   | 153.79 |     |    |        |        | 00001830 |
| 186                                                                              | 15.4518                          |   | 1000.  |     |    |        |        | 00001840 |
| 187                                                                              | 15.4539                          |   | 1000.  |     |    |        |        | 00001850 |
| 188                                                                              | 15.4581                          |   | 1000.  |     |    |        |        | 00001860 |
| 189                                                                              | 15.494                           |   | 403.85 |     |    |        |        | 00001870 |
| 190                                                                              | 15.61                            |   | 67.70  |     |    |        |        | 00001880 |
| 191                                                                              | 15.84                            |   | 22.15  |     |    |        |        | 00001890 |
| 192                                                                              | 16.18                            |   | 9.93   |     |    |        |        | 00001900 |
| 193                                                                              | 16.65                            |   | 5.31   |     |    |        |        | 00001910 |
| 194                                                                              | 17.21                            |   | 3.02   |     |    |        |        | 00001920 |
| 195                                                                              | 17.82                            |   | 2.07   |     |    |        |        | 00001930 |
| 196                                                                              | 18.39                            |   | 0.92   |     |    |        |        | 00001940 |
| 197                                                                              | 18.82                            |   | 0.     |     |    |        |        | 00001950 |
| 198                                                                              | 18.97                            |   | 10.    |     |    |        |        | 00001960 |
| 199                                                                              | 22.                              |   | 10.    |     |    |        |        | 00001970 |
| 200                                                                              | DAMPC CARD                       |   |        |     |    |        |        | 00001980 |
| 201                                                                              | .05                              |   |        |     |    |        |        | 00001990 |
| 202                                                                              | NONLINEAR BEAM DATA: NLB + CARDS |   |        |     |    |        |        | 00002000 |
| 203                                                                              | 3 11 18                          | 1 | 7      | 2.0 |    |        |        | 00002010 |
|                                                                                  |                                  |   |        |     |    |        |        | 00002020 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 4 OF 9)

ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

| CARD NO. | 1                                              | 2  | 3           | 4         | 5     | 6       | 7        | 8        |
|----------|------------------------------------------------|----|-------------|-----------|-------|---------|----------|----------|
| 204      | DRI CARD:                                      |    |             |           |       |         |          |          |
| 205      | 2                                              | 21 |             |           |       |         |          |          |
| 206      | POS.FORCE CUTOFF:NFBM CARDS                    |    |             |           |       |         |          |          |
| 207      | 2                                              | 11 | 18          | 428000    | 1.E10 | 1.0E10  | 1.E10    | 1.E10    |
| 208      | 1                                              | 2  | 19          | 130000    | 1.E10 | 78000   | 1.E10    | 1.E10    |
| 209      | NEG.FORCE CUTOFF:NFBMN CARDS                   |    |             |           |       |         |          |          |
| 210      | 2                                              | 11 | 18          | 428000    | 1.E10 | 1.0E10  | 1.E10    | 1.E10    |
| 211      | 1                                              | 2  | 19          | 130000    | 1.E10 | 78000   | 1.E10    | 1.E10    |
| 212      | LOAD INTERACTION SIGN CONVENTIONS(NSCV CARDS): |    |             |           |       |         |          |          |
| 213      | 1                                              | 2  | -3          | 4         | 5     | 6       |          |          |
| 214      | LOAD INTERACTION DATA(NLIC+ CARDS):            |    |             |           |       |         |          |          |
| 215      | 1                                              | 3  | 5           | 1         | 0     | 300.    | 1000.    |          |
| 216      |                                                |    |             |           |       | 166000. | 20.8E+06 | -166000. |
| 217      | 1                                              | 1  | 199000.     | 45.6      | E+06  |         |          |          |
| 218      | 2                                              | 3  | 5           | 1         | 0     | 300.    | 1000.    |          |
| 219      |                                                |    |             |           |       | 166000. | 20.8E+06 | -166000. |
| 220      | 1                                              | 1  | 199000.     | 45.6      | E+06  |         |          |          |
| 221      | 2                                              | 3  | 5           | 2         | 0     | 400.    | 1000.    |          |
| 222      |                                                |    |             |           |       | 210000. | 23.8E+06 | -210000. |
| 223      | 1                                              | 1  | 185000.     | 60.8      | E+06  |         |          |          |
| 224      | 1                                              | 1  | 674300.     | 25.4      | E+06  |         |          |          |
| 225      | 3                                              | 3  | 5           | 2         | 0     | 480.    | 1000.    |          |
| 226      |                                                |    |             |           |       |         |          |          |
| 227      | 1                                              | 1  | 195000.     | 130.3     | E+06  |         |          |          |
| 228      | 1                                              | 1  | 545300.     | 28.9      | E+06  |         |          |          |
| 229      | 3                                              | 3  | 5           | 2         | 0     | 540.    | 1000.    |          |
| 230      |                                                |    |             |           |       |         |          |          |
| 231      | 1                                              | 1  | 199000.     | 137.3     | E+06  |         |          |          |
| 232      | 1                                              | 1  | 11365380.   | 35.3      | E+06  |         |          |          |
| 233      | 3                                              | 3  | 5           | 2         | 0     | 620.    | 1000.    |          |
| 234      |                                                |    |             |           |       | 274000. | 45.0E+06 | -274000. |
| 235      | 1                                              | 1  | 286000.     | 185.6     | E+06  |         |          |          |
| 236      | 1                                              | 1  | 384400.     | 79.7      | E+06  |         |          |          |
| 237      | 4                                              | 3  | 5           | 2         | 0     | 620.    | 1000.    |          |
| 238      |                                                |    |             |           |       | 274000. | 45.0E+06 | -274000. |
| 239      | 1                                              | 1  | 286000.     | 185.6     | E+06  |         |          |          |
| 240      | 1                                              | 1  | 384400.     | 79.7      | E+06  |         |          |          |
| 241      | 5                                              | 3  | 5           | 2         | 1     | 960.    | 1000.    |          |
| 242      |                                                |    |             |           |       | 288000. | -288000. |          |
| 243      | 1                                              | 0  | -5.2317E06  | 71.5E+06  |       |         |          |          |
| 244      | 1                                              | 1  | 474500.     | 152.8E+06 |       |         |          |          |
| 245      | 6                                              | 3  | 5           | 2         | 1     | 960.    | 1000.    |          |
| 246      |                                                |    |             |           |       | 288000. | -288000. |          |
| 247      | 1                                              | 0  | -5.2317E06  | 71.5E+06  |       |         |          |          |
| 248      | 1                                              | 1  | 474500.     | 152.8E+06 |       |         |          |          |
| 249      | 6                                              | 3  | 5           | 2         | 1     | 1000.   | 1000.    |          |
| 250      |                                                |    |             |           |       | 254000. | 74.0E+06 | -254000. |
| 251      | 1                                              | 1  | 301000.     | 228.7E+06 |       |         |          |          |
| 252      | 1                                              | 1  | 11.3581E 06 | 84.2E+06  |       |         |          |          |
| 253      | 7                                              | 3  | 5           | 3         | 1     | 1080.   | 1000.    |          |
| 254      |                                                |    |             |           |       |         |          |          |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 5 OF 9)

### ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

| CARD NO. | 1                                            | 2 | 3         | 4          | 5      | 6         | 7        | 8        |
|----------|----------------------------------------------|---|-----------|------------|--------|-----------|----------|----------|
| 255      | 0                                            | 1 | 210000.   | -555.88E06 |        |           |          | 00002540 |
| 256      | 1                                            | 1 | 327700.   | 107.75E06  |        |           |          | 00002550 |
| 257      | 1                                            | 1 | 1.5738E06 | 64.0 E06   |        |           |          | 00002560 |
| 258      | 7                                            | 3 | 5         | 3          | 1      | 1160.     | 1000.    | 00002570 |
| 259      |                                              |   |           |            |        |           |          | 00002580 |
| 260      | 0                                            | 1 | 239000.   | -265.64E06 |        |           |          | 00002590 |
| 261      | 1                                            | 1 | 372214.   | 83.5E 06   |        |           |          | 00002600 |
| 262      | 1                                            | 1 | 804840.   | 49.9E 06   |        |           |          | 00002610 |
| 263      | 8                                            | 3 | 5         | 3          | 1      | 1240.     | 1000.    | 00002620 |
| 264      |                                              |   |           |            |        | 35.0 E 06 | -35.0E06 | 00002630 |
| 265      | 0                                            | 1 | 198000.   | -217.32E06 |        |           |          | 00002640 |
| 266      | 1                                            | 1 | 409460.   | 50.5E 06   |        |           |          | 00002650 |
| 267      | 1                                            | 1 | 965217.   | 37.0E 06   |        |           |          | 00002660 |
| 268      | 8                                            | 3 | 5         | 2          | 1      | 1320.     | 1000.    | 00002670 |
| 269      |                                              |   |           |            |        | 27.2 E 06 | -27.2E06 | 00002680 |
| 270      | 0                                            | 1 | 148000.   | -91.818E06 |        |           |          | 00002690 |
| 271      | 1                                            | 1 | 662500.   | 31.8E 06   |        |           |          | 00002700 |
| 272      | 9                                            | 3 | 5         | 3          | 1      | 1400.     | 1000.    | 00002710 |
| 273      |                                              |   |           |            |        |           |          | 00002720 |
| 274      | 0                                            | 1 | 123500.   | -54.998E06 |        |           |          | 00002730 |
| 275      | 1                                            | 1 | 350720.   | 24.2E 06   |        |           |          | 00002740 |
| 276      | 1                                            | 1 | 914520.   | 18.9E 06   |        |           |          | 00002750 |
| 277      | NONZERO ANGULAR MOMENTA (NHI CARDS):         |   |           |            |        |           |          | 00002760 |
| 278      | 16                                           |   | .1        | E06        |        |           |          | 00002770 |
| 279      | 17                                           |   | .1        | E06        |        |           |          | 00002780 |
| 280      | NONZERO MASS ORIENTATION ANGLES (NPH CARDS): |   |           |            |        |           |          | 00002790 |
| 281      | 16                                           |   | -.0872665 | .0349066   | .05236 |           |          | 00002800 |
| 282      | 17                                           |   | -.0872665 | .0349066   | .05236 |           |          | 00002810 |
| 283      | FORCE TIME HISTORY DATA: NACC + CARDS        |   |           |            |        |           |          | 00002820 |
| 284      | 1                                            | 3 | 2         | 1          |        |           |          | 00002830 |
| 285      | 2                                            | 3 | 2         | 1          |        |           |          | 00002840 |
| 286      | 3                                            | 3 | 2         | 1          |        |           |          | 00002850 |
| 287      | 4                                            | 3 | 2         | 1          |        |           |          | 00002860 |
| 288      | 5                                            | 3 | 2         | 1          |        |           |          | 00002870 |
| 289      | 6                                            | 3 | 2         | 1          |        |           |          | 00002880 |
| 290      | 7                                            | 3 | 2         | 1          |        |           |          | 00002890 |
| 291      | 8                                            | 3 | 2         | 1          |        |           |          | 00002900 |
| 292      | 9                                            | 3 | 2         | 1          |        |           |          | 00002910 |
| 293      | 10                                           | 3 | 2         | 1          |        |           |          | 00002920 |
| 294      | 11                                           | 3 | 2         | 1          |        |           |          | 00002930 |
| 295      | 12                                           | 3 | 2         | 1          |        |           |          | 00002940 |
| 296      | 13                                           | 3 | 2         | 1          |        |           |          | 00002950 |
| 297      | 14                                           | 3 | 2         | 1          |        |           |          | 00002960 |
| 298      | 15                                           | 3 | 2         | 1          |        |           |          | 00002970 |
| 299      | 16                                           | 3 | 2         | 1          |        |           |          | 00002980 |
| 300      | 17                                           | 3 | 2         | 1          |        |           |          | 00002990 |
| 301      | 18                                           | 3 | 2         | 1          |        |           |          | 00003000 |
| 302      | 19                                           | 3 | 2         | 1          |        |           |          | 00003010 |
| 303      | 0.                                           |   | -95.      |            |        |           |          | 00003020 |
| 304      | 1.                                           |   | -95.      |            |        |           |          | 00003030 |
| 305      | 0.                                           |   | -624.5    |            |        |           |          | 00003040 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 6 OF 9)

ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

|          | 1                                                                      | 2        | 3             | 4             | 5   | 6             | 7 | 8        |
|----------|------------------------------------------------------------------------|----------|---------------|---------------|-----|---------------|---|----------|
| CARD NO. | 1234567890123456789012345678901234567890123456789012345678901234567890 |          |               |               |     |               |   |          |
| 306      | 1.                                                                     | -624.5   |               |               |     |               |   | 00003050 |
| 307      | 0.                                                                     | -1861.   |               |               |     |               |   | 00003060 |
| 308      | 1.                                                                     | -1861.   |               |               |     |               |   | 00003070 |
| 309      | 0.                                                                     | -4715.   |               |               |     |               |   | 00003080 |
| 310      | 1.                                                                     | -4715.   |               |               |     |               |   | 00003090 |
| 311      | 0.                                                                     | -7901.   |               |               |     |               |   | 00003100 |
| 312      | 1.                                                                     | -7901.   |               |               |     |               |   | 00003110 |
| 313      | 0.                                                                     | -1991.   |               |               |     |               |   | 00003120 |
| 314      | 1.                                                                     | -1991.   |               |               |     |               |   | 00003130 |
| 315      | 0.                                                                     | -2316.   |               |               |     |               |   | 00003140 |
| 316      | 1.                                                                     | -2316.   |               |               |     |               |   | 00003150 |
| 317      | 0.                                                                     | -785.4   |               |               |     |               |   | 00003160 |
| 318      | 1.                                                                     | -785.4   |               |               |     |               |   | 00003170 |
| 319      | 0.                                                                     | -450.    |               |               |     |               |   | 00003180 |
| 320      | 1.                                                                     | -450.0   |               |               |     |               |   | 00003190 |
| 321      | 0.                                                                     | 17445.6  |               |               |     |               |   | 00003200 |
| 322      | 1.                                                                     | 17445.6  |               |               |     |               |   | 00003210 |
| 323      | 0.                                                                     | -15419.2 |               |               |     |               |   | 00003220 |
| 324      | 1.                                                                     | -15419.2 |               |               |     |               |   | 00003230 |
| 325      | 0.                                                                     | -28188.2 |               |               |     |               |   | 00003240 |
| 326      | 1.                                                                     | -28188.2 |               |               |     |               |   | 00003250 |
| 327      | 0.                                                                     | -21394.1 |               |               |     |               |   | 00003260 |
| 328      | 1.                                                                     | -21394.1 |               |               |     |               |   | 00003270 |
| 329      | 0.                                                                     | -17818.8 |               |               |     |               |   | 00003280 |
| 330      | 1.                                                                     | -17818.8 |               |               |     |               |   | 00003290 |
| 331      | 0.                                                                     | -6240.9  |               |               |     |               |   | 00003300 |
| 332      | 1.                                                                     | -6240.9  |               |               |     |               |   | 00003310 |
| 333      | 0.                                                                     | -270.8   |               |               |     |               |   | 00003320 |
| 334      | 1.                                                                     | -270.8   |               |               |     |               |   | 00003330 |
| 335      | 0.                                                                     | -258.3   |               |               |     |               |   | 00003340 |
| 336      | 1.                                                                     | -258.3   |               |               |     |               |   | 00003350 |
| 337      | 0.                                                                     | 0.       |               |               |     |               |   | 00003360 |
| 338      | 1.                                                                     | 0.       |               |               |     |               |   | 00003370 |
| 339      | 0.                                                                     | 0.       |               |               |     |               |   | 00003380 |
| 340      | 1.                                                                     | 0.       |               |               |     |               |   | 00003390 |
| 341      | BEAM LOAD PLOT PARAMETERS: NBFP CARDS                                  |          |               |               |     |               |   | 00003400 |
| 342      | 3                                                                      | 1        | 1             | 1             | 0   |               |   | 00003410 |
| 343      | 7                                                                      | 1        | 1             | 1             | 1   |               |   | 00003420 |
| 344      | 11                                                                     | 1        | 1             | 1             | 0   |               |   | 00003430 |
| 345      | 11                                                                     | 1        | 1             | 1             | 1   |               |   | 00003440 |
| 346      | 12                                                                     | 1        | 1             | 1             | 1   |               |   | 00003450 |
| 347      | 14                                                                     | 1        | 1             | 1             | 0   |               |   | 00003460 |
| 348      | END                                                                    |          |               |               |     |               |   | 00003470 |
| 349      | \$TITLE =LT.SAMPLE.DATA                                                |          |               |               |     |               |   | 1        |
| 350      | \$\$SUBTITLE=21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL   |          |               |               |     |               |   | 2        |
| 351      | \$LABEL =INITIAL CONDITION STATIC SOLUTION                             |          |               |               |     |               |   | 3        |
| 352      | \$\$DISPLACEMENTS                                                      |          |               |               |     |               |   | 4        |
| 353      | \$\$REAL OUTPUT                                                        |          |               |               |     |               |   | 5        |
| 354      | \$\$SUBCASE ID = 1                                                     |          |               |               |     |               |   | 6        |
| 355      | 100                                                                    | G        | -3.089143E-02 | 0.0           |     | -9.927106E-01 |   | 7        |
| 356      | -CONT-                                                                 |          | 0.0           | -2.240265E-03 | 0.0 |               |   | 8        |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 7 OF 9)

# ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

|          | 1                                                                      | 2 | 3             | 4             | 5 | 6             | 7 | 8  |
|----------|------------------------------------------------------------------------|---|---------------|---------------|---|---------------|---|----|
| CARD NO. | 1234567890123456789012345678901234567890123456789012345678901234567890 |   |               |               |   |               |   |    |
| 357      | 200                                                                    | G | -2.848941E-02 | 0.0           |   | -7.668377E-01 |   | 9  |
| 358      | -CONT-                                                                 |   | 0.0           | -2.228401E-03 |   | 0.0           |   | 10 |
| 359      | 201                                                                    | G | 1.302763E-01  | 0.0           |   | -8.132805E-01 |   | 11 |
| 360      | -CONT-                                                                 |   | 0.0           | -2.228401E-03 |   | 0.0           |   | 12 |
| 361      | 300                                                                    | G | -7.956207E-03 | 0.0           |   | -4.223564E-01 |   | 13 |
| 362      | -CONT-                                                                 |   | 0.0           | -2.016658E-03 |   | 0.0           |   | 14 |
| 363      | 400                                                                    | G | -3.881566E-03 | 0.0           |   | -1.467094E-01 |   | 15 |
| 364      | -CONT-                                                                 |   | 0.0           | -1.310210E-03 |   | 0.0           |   | 16 |
| 365      | 500                                                                    | G | 0.0           | 0.0           |   | 0.0           |   | 17 |
| 366      | -CONT-                                                                 |   | 0.0           | 0.0           |   | 0.0           |   | 18 |
| 367      | 501                                                                    | G | 0.0           | 0.0           |   | 0.0           |   | 19 |
| 368      | -CONT-                                                                 |   | 0.0           | 0.0           |   | 0.0           |   | 20 |
| 369      | 600                                                                    | G | 3.900044E-04  | 0.0           |   | -1.395651E-01 |   | 21 |
| 370      | -CONT-                                                                 |   | 0.0           | 1.905726E-03  |   | 0.0           |   | 22 |
| 371      | 700                                                                    | G | -1.741045E-02 | 0.0           |   | -3.224223E-01 |   | 23 |
| 372      | -CONT-                                                                 |   | 0.0           | 2.646158E-03  |   | 0.0           |   | 24 |
| 373      | 800                                                                    | G | 1.960037E-02  | 0.0           |   | -8.574680E-01 |   | 25 |
| 374      | -CONT-                                                                 |   | 0.0           | 3.925510E-03  |   | 0.0           |   | 26 |
| 375      | 900                                                                    | G | 1.623369E-01  | 0.0           |   | -1.646019E+00 |   | 27 |
| 376      | -CONT-                                                                 |   | 0.0           | 5.791210E-03  |   | 0.0           |   | 28 |
| 377      | 1000                                                                   | G | 4.121330E-01  | 0.0           |   | -2.947555E+00 |   | 29 |
| 378      | -CONT-                                                                 |   | 0.0           | 6.380443E-03  |   | 0.0           |   | 30 |
| 379      | 1100                                                                   | G | -2.376708E-02 | -6.204829E-02 |   | 4.549811E-01  |   | 31 |
| 380      | -CONT-                                                                 |   | -6.692741E-03 | -2.201437E-03 |   | -5.605556E-04 |   | 32 |
| 381      | 1101                                                                   | G | -1.923054E-02 | -6.048076E-02 |   | 3.946611E-01  |   | 33 |
| 382      | -CONT-                                                                 |   | -6.692741E-03 | -2.201437E-03 |   | -5.605556E-04 |   | 34 |
| 383      | 1102                                                                   | G | -1.296112E-02 | -1.657883E-01 |   | 7.333756E-01  |   | 35 |
| 384      | -CONT-                                                                 |   | -6.692741E-03 | -2.201437E-03 |   | -5.605556E-04 |   | 36 |
| 385      | 1103                                                                   | G | -1.296112E-02 | -1.657883E-01 |   | 7.333756E-01  |   | 37 |
| 386      | -CONT-                                                                 |   | -6.692741E-03 | -2.201437E-03 |   | -5.605556E-04 |   | 38 |
| 387      | 1199                                                                   | G | -9.159952E-02 | 0.0           |   | 5.671605E-01  |   | 39 |
| 388      | -CONT-                                                                 |   | 0.0           | -6.671570E-03 |   | 0.0           |   | 40 |
| 389      | 1200                                                                   | G | -2.183183E-01 | 4.138300E-02  |   | 2.341778E+00  |   | 41 |
| 390      | -CONT-                                                                 |   | -1.306025E-02 | -6.671570E-03 |   | -9.325834E-04 |   | 42 |
| 391      | 1201                                                                   | G | -2.439489E-01 | 3.842940E-02  |   | 2.721848E+00  |   | 43 |
| 392      | -CONT-                                                                 |   | -1.306025E-02 | -6.671570E-03 |   | -9.325834E-04 |   | 44 |
| 393      | 1300                                                                   | G | -6.008096E-01 | 3.054580E-01  |   | 6.170235E+00  |   | 45 |
| 394      | -CONT-                                                                 |   | -2.241265E-02 | -1.032134E-02 |   | -1.681539E-03 |   | 46 |
| 395      | 1400                                                                   | G | -1.368592E+00 | 6.399863E-01  |   | 1.084585E+01  |   | 47 |
| 396      | -CONT-                                                                 |   | -2.562700E-02 | -7.394243E-03 |   | -5.296096E-03 |   | 48 |
| 397      | 1401                                                                   | G | -1.022668E+00 | 2.900483E-01  |   | 9.660551E+00  |   | 49 |
| 398      | -CONT-                                                                 |   | -2.562700E-02 | -7.394243E-03 |   | -5.296096E-03 |   | 50 |
| 399      | 1498                                                                   | G | -6.724822E-01 | 0.0           |   | 8.267696E+00  |   | 51 |
| 400      | -CONT-                                                                 |   | 0.0           | -9.067804E-03 |   | 0.0           |   | 52 |
| 401      | 1499                                                                   | G | -6.724822E-01 | 0.0           |   | 8.267696E+00  |   | 53 |
| 402      | -CONT-                                                                 |   | 0.0           | -9.067804E-03 |   | 0.0           |   | 54 |
| 403      | 1500                                                                   | G | -2.495207E+00 | 4.342729E-01  |   | 1.459589E+01  |   | 55 |
| 404      | -CONT-                                                                 |   | -1.709940E-02 | -9.067804E-03 |   | -4.925180E-03 |   | 56 |
| 405      | 1501                                                                   | G | -2.554651E+00 | 3.717276E-01  |   | 1.491743E+01  |   | 57 |
| 406      | -CONT-                                                                 |   | -1.709940E-02 | -9.067804E-03 |   | -4.925180E-03 |   | 58 |
| 407      | 1502                                                                   | G | -2.495207E+00 | 4.342729E-01  |   | 1.459589E+01  |   | 59 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 8 OF 9)

# ECHO OF THE INPUT DATA IN CARD IMAGE FORMAT

| CARD NO.                                                               | 1      | 2 | 3             | 4 | 5             | 6 | 7             | 8  |
|------------------------------------------------------------------------|--------|---|---------------|---|---------------|---|---------------|----|
| 1234567890123456789012345678901234567890123456789012345678901234567890 |        |   |               |   |               |   |               |    |
| 408                                                                    | -CONT- |   | -1.709940E-02 |   | -9.067804E-03 |   | -4.925180E-03 | 60 |
| 409                                                                    | 1600   | G | 7.919735E-02  |   | -2.893812E-01 |   | 1.937819E+00  | 61 |
| 410                                                                    | -CONT- |   | -1.295901E-02 |   | -9.379078E-03 |   | -1.573280E-03 | 62 |
| 411                                                                    | 1601   | G | -2.385548E-01 |   | 1.247810E-01  |   | 2.086104E+00  | 63 |
| 412                                                                    | -CONT- |   | -1.295901E-02 |   | -9.379078E-03 |   | -1.573280E-03 | 64 |
| 413                                                                    | 1602   | G | 7.919735E-02  |   | -2.893812E-01 |   | 1.937819E+00  | 65 |
| 414                                                                    | -CONT- |   | -1.295901E-02 |   | -9.379078E-03 |   | -1.573280E-03 | 66 |
| 415                                                                    | 1700   | G | -6.952552E-01 |   | -3.464461E-02 |   | 8.834676E+00  | 67 |
| 416                                                                    | -CONT- |   | -2.537085E-02 |   | -9.936552E-03 |   | -5.952675E-03 | 68 |
| 417                                                                    | 1701   | G | -1.014152E+00 |   | 6.997874E-01  |   | 8.967885E+00  | 69 |
| 418                                                                    | -CONT- |   | -2.537085E-02 |   | -9.936552E-03 |   | -5.952675E-03 | 70 |
| 419                                                                    | 1800   | G | 1.832870E-01  |   | -7.628592E-01 |   | 6.225001E-01  | 71 |
| 420                                                                    | -CONT- |   | -6.689243E-03 |   | -2.204068E-03 |   | -5.605288E-04 | 72 |
| 421                                                                    | 1900   | G | 2.696309E-01  |   | 0.0           |   | -8.798568E-01 | 73 |
| 422                                                                    | -CONT- |   | 0.0           |   | -2.223161E-03 |   | 0.0           | 74 |
| 423                                                                    | 2000   | G | -9.809875E-02 |   | 0.0           |   | -8.621072E-01 | 75 |
| 424                                                                    | -CONT- |   | 0.0           |   | -4.137885E-03 |   | 0.0           | 76 |
| 425                                                                    | 2100   | G | -7.305723E-02 |   | 0.0           |   | -7.669372E-01 | 77 |
| 426                                                                    | -CONT- |   | 0.0           |   | -2.228401E-03 |   | 0.0           | 78 |

FIGURE 2-8. ECHO OF THE INPUT DATA (SHEET 9 OF 9)

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

# PROGRAM SIZE DATA

NUMBER OF:

| MASSSES  | SPRINGS   | BEAMS    | KR<br>TABLES | NON-<br>ZERO<br>HE OR<br>IXY | MASS<br>PENETR. | VOLUME<br>CHANGE | DRI<br>ELEMENTS | MTL<br>TYPES | ACCEL.<br>TABLES | NON-<br>STANDARD<br>MAX.<br>DEFL.<br>NVB | NON-<br>STANDARD<br>MAX.<br>FORCE<br>NFB | NON-<br>ZERO<br>PHI'' | NON-<br>STANDARD<br>DAMPING | STIFFNESS<br>MATRICES | NO.<br>NODE<br>PTS. |
|----------|-----------|----------|--------------|------------------------------|-----------------|------------------|-----------------|--------------|------------------|------------------------------------------|------------------------------------------|-----------------------|-----------------------------|-----------------------|---------------------|
| NM<br>21 | NSP<br>19 | NB<br>28 | NLB<br>1     | NHI<br>2                     | MVP<br>0        | NVCH<br>0        | NDRI<br>1       | NMTL<br>0    | NACC<br>19       | + -<br>0 0                               | + -<br>2 2                               | NPH<br>21             | ND<br>0                     | NKM<br>0              | NNP<br>12           |

NSC= 1 NIC= 1 NTOL1= 1000% NTOL2= 1000% NTOL3= 1000%

NO.OF OLEO STRUTS= 2 ALPHA= 1.000D 00

NAERO = 0 RHO = 1.14630D-07

## ACCELERATION DATA TRANSFER CONTROL PARAMETERS

|                |               |
|----------------|---------------|
| REUSE: TITLE - | SAVE: TITLE - |
| CASE - 0       | CASE - 0      |
| NO. TABLES - 0 | NMSAV - 0     |
|                | NNPSAV - 0    |
|                | NDTSAV - 0    |
|                | NMRFLG - 0    |
|                | NDTGRA -      |

## PROGRAM DATA MANAGEMENT CONTROL DATA

|                  |                   |
|------------------|-------------------|
| RESTART: TITLE - | SAVE: TITLE -     |
| CASE - 0         | CASE - 0          |
| TIME - 0         | TIMES - 0 0 0 0 0 |

## VARIABLE INTEGRATION CONTROL DATA

VAR. INT. FLAG = 0 EL = 0.0 EU = 0.0 LOWER RATIO = 0.0 UPPER RATIO = 0.0

## PROGRAM CONTROL DATA

| PRINT INTERVAL/<br>INTEGRATION INTERVAL | INTEGRATION<br>INTERVAL | MAX.<br>TIME     | PLOW FORCE<br>STARTING TIME | FILTER CUTOFF<br>FREQUENCY | CASE TYPE<br>INDICATOR |
|-----------------------------------------|-------------------------|------------------|-----------------------------|----------------------------|------------------------|
| DP/DT<br>200                            | DT<br>0.000050          | TMAX<br>0.100000 | PLOWT<br>0.0                | FCUT<br>50.000             | RUNMOD<br>1.000        |

## TIME HISTORY PRINT CONTROL CARDS

| STRAIN<br>FORCES | TOTAL<br>FORCES | BEAM<br>DEFLECTIONS | EXT.SPRING<br>DATA | ENERGY<br>DATA | STRESS<br>DATA | ACCEL<br>DATA | IMPULSE<br>DATA |
|------------------|-----------------|---------------------|--------------------|----------------|----------------|---------------|-----------------|
| 1                | 1               | 1                   | 1                  | 1              | 0              | 1             | 0               |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 1 OF 16)

NO.MASS POSITION PLOTS

VEHICLE INITIAL CONDITIONS

VEHICLE TRANSLATIONAL VELOCITIES IN GROUND AXES (IN/SEC)  
 VEHICLE ROTATIONAL VELOCITIES IN VEHICLE AXES (RAD/SEC)  
 EULER ANGLES OF VEHICLE RELATIVE TO GROUND (RADIAN)

|             |             |             |
|-------------|-------------|-------------|
| XGDOT<br>P' | YGDOT<br>Q' | ZGDOT<br>R' |
| PHI'        | THETA'      | PSI'        |
| 3.14000D 03 | 0.0         | 3.00000D 02 |
| 0.0         | 1.00000D-01 | 0.0         |
| 0.0         | 1.74500D-02 | 0.0         |

INITIAL MASS POINT DEFLECTIONS

| I  | DXAP(I)       | DYAP(I)       | DZAP(I)       | DPHAP(I)     | DTHAP(I)      | DPSAP(I)     | I  |
|----|---------------|---------------|---------------|--------------|---------------|--------------|----|
| 1  | 3.089143D-02  | 0.0           | 9.927106D-01  | 0.0          | -2.240265D-03 | 0.0          | 1  |
| 2  | 2.848941D-02  | 0.0           | 7.668377D-01  | 0.0          | -2.228401D-03 | 0.0          | 2  |
| 3  | 7.956207D-03  | 0.0           | 4.223564D-01  | 0.0          | -2.016658D-03 | 0.0          | 3  |
| 4  | 3.881566D-03  | 0.0           | 1.467094D-01  | 0.0          | -1.310210D-03 | 0.0          | 4  |
| 5  | 0.0           | 0.0           | 0.0           | 0.0          | 0.0           | 0.0          | 5  |
| 6  | -3.900044D-04 | 0.0           | 1.395651D-01  | 0.0          | 1.905726D-03  | 0.0          | 6  |
| 7  | 1.741045D-02  | 0.0           | 3.224223D-01  | 0.0          | 2.646158D-03  | 0.0          | 7  |
| 8  | -1.960037D-02 | 0.0           | 8.574680D-01  | 0.0          | 3.925510D-03  | 0.0          | 8  |
| 9  | -1.623369D-01 | 0.0           | 1.646019D 00  | 0.0          | 5.791210D-03  | 0.0          | 9  |
| 10 | -4.121330D-01 | 0.0           | 2.947555D 00  | 0.0          | 6.380443D-03  | 0.0          | 10 |
| 11 | 2.376708D-02  | -6.204829D-02 | -4.549811D-01 | 6.692741D-03 | -2.201437D-03 | 5.605556D-04 | 11 |
| 12 | 2.183183D-01  | 4.138300D-02  | -2.341778D 00 | 1.306025D-02 | -6.671570D-03 | 9.325834D-04 | 12 |
| 13 | 6.008096D-01  | 3.054580D-01  | -6.170235D 00 | 2.241265D-02 | -1.032134D-02 | 1.681539D-03 | 13 |
| 14 | 1.368592D 00  | 6.399863D-01  | -1.084585D 01 | 2.562700D-02 | -7.394243D-03 | 5.296096D-03 | 14 |
| 15 | 2.495207D 00  | 4.342729D-01  | -1.459589D 01 | 1.709940D-02 | -9.067804D-03 | 4.925180D-03 | 15 |
| 16 | -7.919735D-02 | -2.893812D-01 | -1.937819D 00 | 1.295901D-02 | -9.379078D-03 | 1.573280D-03 | 16 |
| 17 | 6.952552D-01  | -3.464461D-02 | -8.834676D 00 | 2.537085D-02 | -9.936552D-03 | 5.952675D-03 | 17 |
| 18 | -1.832870D-01 | -7.628592D-01 | -6.225001D-01 | 6.689243D-03 | -2.204068D-03 | 5.605288D-04 | 18 |
| 19 | -2.696309D-01 | 0.0           | 8.798568D-01  | 0.0          | -2.223161D-03 | 0.0          | 19 |
| 20 | 9.809875D-02  | 0.0           | 8.621072D-01  | 0.0          | -4.137885D-03 | 0.0          | 20 |
| 21 | 7.305723D-02  | 0.0           | 7.669372D-01  | 0.0          | -2.228401D-03 | 0.0          | 21 |

INITIAL NODE POINT DEFLECTIONS

| I  | M | DXNPAP        | DYNPAP        | DZNPAP        |
|----|---|---------------|---------------|---------------|
| 5  | 1 | 0.0           | 0.0           | 0.0           |
| 11 | 1 | 1.923054D-02  | -6.048076D-02 | -3.946611D-01 |
| 11 | 2 | 1.296112D-02  | -1.657883D-01 | -7.333756D-01 |
| 11 | 3 | 1.296112D-02  | -1.657883D-01 | -7.333756D-01 |
| 12 | 1 | 2.439489D-01  | 3.842940D-02  | -2.721848D 00 |
| 14 | 1 | 1.022668D 00  | 2.900483D-01  | -9.660551D 00 |
| 15 | 1 | 2.554651D 00  | 3.717276D-01  | -1.491743D 01 |
| 15 | 2 | 2.495207D 00  | 4.342729D-01  | -1.459589D 01 |
| 16 | 1 | 2.385548D-01  | 1.247810D-01  | -2.086104D 00 |
| 16 | 2 | -7.919735D-02 | -2.893812D-01 | -1.937819D 00 |
| 17 | 1 | 1.014152D 00  | 6.997874D-01  | -8.967885D 00 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 2 OF 16)

2 1 -1.302763D-01 0.0 8.132805D-01

# GENERALIZED SURFACE DATA

BETA = 0.0 DEGREES  
XGIN = 0.0  
ZGIN = 0.0

## MASS DATA

| WEIGHTS |             |  | MASS COORDINATES F.S.,B.L.,N.L. |             |             | MASS MOMENTS OF INERTIA (LB-IN-SEC**2) |             |             |
|---------|-------------|--|---------------------------------|-------------|-------------|----------------------------------------|-------------|-------------|
| I       | M           |  | X''                             | Y''         | Z''         | IX                                     | IY          | IZ          |
| 1       | 1.58500D 03 |  | 1.98969D 02                     | 0.0         | 2.19007D 02 | 1.15140D 04                            | 4.00000D 04 | 1.50000D 04 |
| 2       | 9.06450D 03 |  | 2.99972D 02                     | 0.0         | 2.17933D 02 | 8.90800D 04                            | 3.00000D 05 | 9.90000D 04 |
| 3       | 1.53181D 04 |  | 4.59992D 02                     | 0.0         | 2.08278D 02 | 1.62780D 05                            | 9.69350D 04 | 1.03090D 05 |
| 4       | 1.30960D 04 |  | 6.19996D 02                     | 0.0         | 2.05853D 02 | 1.96270D 05                            | 6.67150D 04 | 7.93890D 04 |
| 5       | 2.17526D 04 |  | 8.20000D 02                     | 0.0         | 2.00200D 02 | 4.91060D 05                            | 1.25670D 05 | 1.46510D 05 |
| 6       | 7.90150D 03 |  | 9.60000D 02                     | 0.0         | 2.12260D 02 | 8.13830D 04                            | 1.20000D 05 | 2.00000D 05 |
| 7       | 9.19070D 03 |  | 1.03998D 03                     | 0.0         | 2.07578D 02 | 8.75360D 04                            | 1.40000D 05 | 2.00000D 05 |
| 8       | 9.93840D 03 |  | 1.20002D 03                     | 0.0         | 2.24243D 02 | 8.80980D 04                            | 1.80000D 05 | 3.00000D 05 |
| 9       | 5.70200D 03 |  | 1.36006D 03                     | 0.0         | 2.58354D 02 | 9.62490D 04                            | 4.17880D 04 | 2.60390D 04 |
| 10      | 6.17520D 03 |  | 1.57041D 03                     | 0.0         | 2.99352D 02 | 2.15300D 05                            | 1.07980D 05 | 1.58630D 05 |
| 11      | 9.67060D 03 |  | 8.01276D 02                     | 1.18362D 02 | 1.88755D 02 | 1.52130D 04                            | 1.38580D 05 | 3.60000D 05 |
| 12      | 1.00656D 04 |  | 8.52082D 02                     | 2.71759D 02 | 2.05442D 02 | 1.95100D 04                            | 1.22630D 05 | 3.00000D 05 |
| 13      | 5.28650D 03 |  | 9.42899D 02                     | 4.30395D 02 | 2.26070D 02 | 7.27150D 03                            | 5.26190D 04 | 1.10000D 05 |
| 14      | 3.75900D 03 |  | 1.04443D 03                     | 5.82860D 02 | 2.54346D 02 | 4.40830D 03                            | 2.58230D 04 | 6.00000D 04 |
| 15      | 1.54230D 03 |  | 1.11010D 03                     | 7.40166D 02 | 2.69696D 02 | 1.67080D 03                            | 9.01370D 03 | 1.80000D 04 |
| 16      | 5.40000D 03 |  | 7.19079D 02                     | 3.21889D 02 | 1.67738D 02 | 3.65156D 03                            | 2.57460D 04 | 2.93746D 04 |
| 17      | 5.15100D 03 |  | 9.02105D 02                     | 5.51635D 02 | 1.96935D 02 | 3.71200D 03                            | 2.45882D 04 | 2.81780D 04 |
| 18      | 1.92200D 03 |  | 8.87183D 02                     | 1.32363D 02 | 9.13225D 01 | 3.71000D 02                            | 1.60000D 03 | 2.00000D 03 |
| 19      | 2.38000D 02 |  | 2.79270D 02                     | 0.0         | 8.41201D 01 | 2.40000D 01                            | 3.00000D 02 | 5.00000D 02 |
| 20      | 1.00000D 03 |  | 2.99902D 02                     | 0.0         | 2.37838D 02 | 1.00000D 03                            | 1.00000D 03 | 1.00000D 03 |
| 21      | 1.00000D 03 |  | 2.99927D 02                     | 0.0         | 2.37933D 02 | 1.00000D 03                            | 1.00000D 03 | 1.00000D 03 |

## NODE POINT DATA

| MASS | N.P. | NODE POINT COORDINATES F.S.,B.L.,N.L. |             |             |
|------|------|---------------------------------------|-------------|-------------|
| I    | M    | X''                                   | Y''         | Z''         |
| 5    | 1    | 7.75100D 02                           | 4.80000D 01 | 1.81000D 02 |
| 11   | 1    | 7.73881D 02                           | 1.18360D 02 | 1.86695D 02 |
| 11   | 2    | 8.86987D 02                           | 1.31766D 02 | 1.80433D 02 |
| 11   | 3    | 8.86987D 02                           | 1.31766D 02 | 1.80433D 02 |
| 12   | 1    | 8.11556D 02                           | 3.21562D 02 | 2.02322D 02 |
| 14   | 1    | 9.93477D 02                           | 5.51310D 02 | 2.30161D 02 |
| 15   | 1    | 1.14545D 03                           | 7.40228D 02 | 2.76217D 02 |
| 15   | 2    | 1.11010D 03                           | 7.40166D 02 | 2.69696D 02 |
| 16   | 1    | 7.35461D 02                           | 3.21475D 02 | 2.01686D 02 |
| 16   | 2    | 7.19079D 02                           | 3.21889D 02 | 1.67738D 02 |
| 17   | 1    | 9.17386D 02                           | 5.50900D 02 | 2.29468D 02 |
| 2    | 1    | 2.79130D 02                           | 0.0         | 1.46687D 02 |

## EXTERNAL SPRING DATA

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 3 OF 16)

| SPRING |   |   | FREE LENGTH            | FRICTION COEFFICIENT | BOTTOMING SPRING | PLOWING FORCE | GROUND FLEXIBILITY  |             |             |             |
|--------|---|---|------------------------|----------------------|------------------|---------------|---------------------|-------------|-------------|-------------|
| I      | K | M | LBAR(IKM)              | MU(IKM)              | KE(IKM)          | FORCE(IKM)    | GFLEX(IKM)          |             |             |             |
| 1      | 3 | 0 | 7.00000D 01            | 3.50000D-01          | 1.75000D 05      | 0.0           | 0.0                 |             |             |             |
| 2      | 3 | 0 | 8.27000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 3      | 3 | 0 | 7.27000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 4      | 3 | 0 | 7.00000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 5      | 3 | 0 | 6.42000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 6      | 3 | 0 | 7.64000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 7      | 3 | 0 | 6.99000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 8      | 3 | 0 | 6.91000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 9      | 3 | 0 | 6.40000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 10     | 3 | 0 | 8.20000D 01            | 3.50000D-01          | 3.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 11     | 3 | 0 | 2.80000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 12     | 3 | 0 | 1.40000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 13     | 3 | 0 | 1.10000D 01            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 14     | 3 | 0 | 7.00000D 00            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 15     | 3 | 0 | 3.00000D 00            | 3.50000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 16     | 3 | 0 | 2.98000D 01            | 3.50000D-01          | 2.72000D 05      | 0.0           | 0.0                 |             |             |             |
| 17     | 3 | 0 | 2.80000D 01            | 3.50000D-01          | 2.72000D 05      | 0.0           | 0.0                 |             |             |             |
| 18     | 3 | 0 | 1.96500D 01            | 3.00000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| 19     | 3 | 0 | 1.64500D 01            | 3.00000D-01          | 1.00000D 05      | 0.0           | 0.0                 |             |             |             |
| SPRING |   |   | DEFLECTION COORDINATES |                      |                  |               | SPRING AXIAL FORCES |             |             |             |
| I      | K | M | SI(IKM)                | SA(IKM)              | SB(IKM)          | SF(IKM)       | FSPOI(IKM)          | FSPOF(IKM)  | CRIT.DAMP   | CDAMP(IKM)  |
| 1      | 3 | 0 | 1.30000D 00            | 1.50000D 00          | 1.60000D 00      | 1.00000D 01   | 7.00000D 04         | 7.00000D 03 | 0.0         | 0.0         |
| 2      | 3 | 0 | 1.30000D 00            | 1.50000D 00          | 1.60000D 00      | 1.00000D 01   | 1.40000D 05         | 1.40000D 04 | 0.0         | 0.0         |
| 3      | 3 | 0 | 1.00000D 00            | 6.00000D 00          | 1.00000D 01      | 2.10000D 01   | 1.15000D 05         | 9.00000D 04 | 0.0         | 0.0         |
| 4      | 3 | 0 | 1.00000D 00            | 1.10000D 00          | 2.00000D 00      | 3.00000D 00   | 3.40000D 05         | 2.00000D 05 | 0.0         | 0.0         |
| 5      | 3 | 0 | 1.00000D 00            | 1.10000D 00          | 2.00000D 00      | 3.00000D 00   | 3.40000D 05         | 2.00000D 05 | 0.0         | 0.0         |
| 6      | 3 | 0 | 1.00000D 00            | 1.10000D 00          | 2.00000D 00      | 3.00000D 00   | 3.40000D 05         | 2.00000D 05 | 0.0         | 0.0         |
| 7      | 3 | 0 | 1.00000D 00            | 6.00000D 00          | 1.00000D 01      | 2.10000D 01   | 6.00000D 04         | 4.80000D 04 | 0.0         | 0.0         |
| 8      | 3 | 0 | 1.00000D 00            | 6.00000D 00          | 1.00000D 01      | 2.10000D 01   | 6.80000D 04         | 4.80000D 04 | 0.0         | 0.0         |
| 9      | 3 | 0 | 1.00000D 00            | 1.10000D 00          | 2.00000D 00      | 3.00000D 00   | 3.00000D 05         | 3.00000D 04 | 0.0         | 0.0         |
| 10     | 3 | 0 | 1.00000D 00            | 1.10000D 00          | 2.00000D 00      | 3.00000D 00   | 3.00000D 05         | 3.00000D 04 | 0.0         | 0.0         |
| 11     | 3 | 0 | 1.00000D 00            | 1.50000D 00          | 2.00000D 00      | 7.00000D 00   | 3.30000D 05         | 3.30000D 05 | 0.0         | 0.0         |
| 12     | 3 | 0 | 1.00000D 00            | 1.50000D 00          | 2.00000D 00      | 7.00000D 00   | 3.30000D 05         | 3.30000D 05 | 0.0         | 0.0         |
| 13     | 3 | 0 | 1.00000D 00            | 1.50000D 00          | 2.00000D 00      | 7.00000D 00   | 3.30000D 05         | 3.30000D 05 | 0.0         | 0.0         |
| 14     | 3 | 0 | 1.00000D 00            | 1.50000D 00          | 2.00000D 00      | 7.00000D 00   | 3.30000D 05         | 3.30000D 05 | 0.0         | 0.0         |
| 15     | 3 | 0 | 1.00000D 00            | 1.50000D 00          | 2.00000D 00      | 7.00000D 00   | 3.30000D 05         | 3.30000D 05 | 0.0         | 0.0         |
| 16     | 3 | 0 | 1.00000D 00            | 8.00000D 00          | 9.00000D 00      | 1.60000D 01   | 1.00000D 04         | 3.00000D 04 | 0.0         | 0.0         |
| 17     | 3 | 0 | 1.00000D 00            | 8.00000D 00          | 9.00000D 00      | 1.60000D 01   | 1.00000D 04         | 3.00000D 04 | 0.0         | 0.0         |
| 18     | 3 | 0 | 2.00000D 00            | 2.00100D 00          | 8.05000D 00      | 8.05100D 00   | 6.22000D 04         | 2.94700D 05 | 2.00000D-02 | 1.57325D 01 |
| 19     | 3 | 0 | 2.00000D 00            | 2.00100D 00          | 5.75000D 00      | 5.75100D 00   | 1.61500D 04         | 5.15000D 04 | 2.00000D-02 | 2.82099D 00 |

## MATERIAL PROPERTIES

| MATERIAL NO. | MODULUS OF ELASTICITY | MODULUS OF RIGIDITY | TENSION STRESS | COMPRESS. STRESS | SHEAR STRESS |
|--------------|-----------------------|---------------------|----------------|------------------|--------------|
| 1            | 3.0000D 07            | 1.1000D 07          | 75000.         | 75000.           | 37500.       |
| 2            | 3.0000D 07            | 1.1000D 07          | 205000.        | 205000.          | 80000.       |
| 3            | 2.8000D 07            | 1.2500D 07          | 70000.         | 46000.           | 36000.       |
| 4            | 1.0500D 07            | 4.0000D 06          | 47000.         | 39000.           | 22000.       |
| 5            | 1.0000D 07            | 3.8000D 06          | 35000.         | 34000.           | 17000.       |
| 6            | 1.0000D 07            | 3.8000D 06          | 16000.         | 16000.           | 17000.       |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 4 OF 16)

|    |            |            |        |        |        |
|----|------------|------------|--------|--------|--------|
| 7  | 1.0000D 06 | 4.0000D 05 | 16000. | 16000. | 17000. |
| 8  | 1.0000D 06 | 0.0        | 16000. | 16000. | 17000. |
| 9  | 1.0000D 06 | 4.0000D 05 | 16000. | 16000. | 17000. |
| 10 | 1.0000D 06 | 4.0000D 05 | 16000. | 16000. | 17000. |

# INTERNAL BEAM DATA

| BEAM |    | AREA | MOMENTS OF INERTIA |   |           | DISTANCES FROM NEUTRAL<br>AXIS TO EXTREME FIBRES TORSION |           |           | ZBIJ AXIS YBIJ AXIS PARAMETER |           |     | LENGTH    | DAMPING<br>RATIO | M<br>T<br>P-CODES |   |   | V BEAM<br>NO. |    |    |
|------|----|------|--------------------|---|-----------|----------------------------------------------------------|-----------|-----------|-------------------------------|-----------|-----|-----------|------------------|-------------------|---|---|---------------|----|----|
| IJ   | I  | J    | M                  | N | A         | IYY                                                      | IZZ       | JX        | Z1                            | Z2        | XIQ | XLB       | CBAR             | MC                | I | J | M             | IJ |    |
| 1    | 1  | 2    | 0                  | 0 | 3.200D 01 | 6.200D 04                                                | 3.700D 04 | 9.900D 04 | 9.600D 01                     | 9.600D 01 | 0.0 | 1.010D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 1  |
| 2    | 2  | 3    | 0                  | 0 | 3.600D 01 | 7.700D 04                                                | 4.300D 04 | 1.200D 05 | 9.900D 01                     | 9.900D 01 | 0.0 | 1.603D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 2  |
| 3    | 3  | 4    | 0                  | 0 | 3.600D 01 | 8.600D 04                                                | 4.300D 04 | 1.290D 05 | 5.600D 01                     | 5.600D 01 | 0.0 | 1.600D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 3  |
| 4    | 4  | 5    | 0                  | 0 | 5.900D 01 | 1.360D 05                                                | 4.650D 04 | 1.825D 05 | 5.600D 01                     | 5.600D 01 | 0.0 | 2.001D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 4  |
| 5    | 5  | 6    | 0                  | 0 | 5.900D 01 | 1.160D 05                                                | 4.650D 04 | 1.625D 05 | 6.600D 01                     | 6.600D 01 | 0.0 | 1.405D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 5  |
| 6    | 6  | 7    | 0                  | 0 | 5.700D 01 | 1.360D 05                                                | 5.700D 04 | 1.930D 05 | 8.800D 01                     | 8.800D 01 | 0.0 | 8.012D 01 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 6  |
| 7    | 7  | 8    | 0                  | 0 | 4.800D 01 | 1.140D 05                                                | 6.200D 04 | 1.760D 05 | 9.100D 01                     | 9.100D 01 | 0.0 | 1.609D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 7  |
| 8    | 8  | 9    | 0                  | 0 | 3.700D 01 | 5.600D 04                                                | 3.350D 04 | 8.950D 04 | 5.100D 01                     | 5.100D 01 | 0.0 | 1.636D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 8  |
| 9    | 9  | 10   | 0                  | 0 | 2.500D 01 | 9.000D 04                                                | 9.500D 03 | 9.950D 04 | 5.000D 01                     | 5.000D 01 | 0.0 | 2.143D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 9  |
| 10   | 5  | 11   | 0                  | 1 | 5.400D 01 | 1.590D 04                                                | 1.140D 05 | 4.800D 04 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.277D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 10 |
| 11   | 11 | 12   | 1                  | 0 | 6.320D 01 | 1.140D 04                                                | 1.020D 05 | 2.600D 04 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.732D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 11 |
| 12   | 12 | 13   | 0                  | 0 | 5.630D 01 | 4.700D 03                                                | 5.800D 04 | 1.000D 04 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.840D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 12 |
| 13   | 13 | 14   | 0                  | 0 | 4.070D 01 | 2.000D 03                                                | 2.100D 04 | 4.800D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.853D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 13 |
| 14   | 14 | 15   | 0                  | 1 | 2.000D 01 | 1.200D 03                                                | 8.000D 03 | 2.700D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.883D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 14 |
| 15   | 12 | 16   | 1                  | 1 | 8.000D 00 | 7.320D 02                                                | 1.000D 02 | 2.208D 02 | 1.000D 00                     | 1.000D 00 | 0.0 | 7.610D 01 | 5.000D-02        | 4                 | 0 | 0 | 0             | 0  | 15 |
| 16   | 14 | 17   | 1                  | 1 | 8.000D 00 | 7.320D 02                                                | 1.000D 02 | 2.208D 02 | 1.000D 00                     | 1.000D 00 | 0.0 | 7.610D 01 | 5.000D-02        | 4                 | 0 | 0 | 0             | 0  | 16 |
| 17   | 11 | 18   | 2                  | 0 | 1.000D-02 | 2.390D 02                                                | 2.390D 02 | 1.500D 02 | 1.000D 00                     | 1.000D 00 | 0.0 | 8.911D 01 | 5.000D-02        | 1                 | 0 | 0 | 0             | 0  | 17 |
| 18   | 11 | 18   | 3                  | 0 | 1.000D-02 | 2.390D 02                                                | 2.390D 02 | 1.500D 02 | 1.000D 00                     | 1.000D 00 | 0.0 | 8.911D 01 | 5.000D-02        | 1                 | 0 | 0 | 0             | 0  | 18 |
| 19   | 2  | 19   | 1                  | 0 | 1.000D-02 | 3.250D 01                                                | 3.250D 01 | 5.000D 00 | 1.000D 00                     | 1.000D 00 | 0.0 | 6.257D 01 | 5.000D-02        | 1                 | 0 | 0 | 0             | 0  | 19 |
| 20   | 6  | 12   | 0                  | 0 | 4.070D 01 | 2.000D 03                                                | 2.100D 04 | 4.800D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 2.925D 02 | 5.000D-02        | 5                 | 0 | 0 | 1             | 0  | 20 |
| 21   | 9  | 14   | 0                  | 0 | 4.070D 01 | 2.000D 03                                                | 2.100D 04 | 4.800D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 6.628D 02 | 5.000D-02        | 5                 | 0 | 1 | 0             | 1  | 21 |
| 22   | 12 | 0    | 0                  | 0 | 4.070D 01 | 2.000D 03                                                | 2.100D 04 | 4.800D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 5.435D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 22 |
| 23   | 2  | 20   | 0                  | 0 | 2.036D-01 | 1.000D 00                                                | 1.000D 00 | 1.000D 00 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.990D 01 | 3.161D-01        | 9                 | 0 | 0 | 0             | 0  | 23 |
| 24   | 2  | 21   | 0                  | 0 | 1.309D-01 | 1.000D 00                                                | 1.000D 00 | 1.000D 00 | 1.000D 00                     | 1.000D 00 | 0.0 | 2.000D 01 | 2.318D-0110      | 0                 | 0 | 0 | 0             | 0  | 24 |
| 25   | 15 | 16   | 0                  | 0 | 2.000D 01 | 0.0                                                      | 0.0       | 0.0       | 1.000D 00                     | 1.000D 00 | 0.0 | 5.816D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 25 |
| 26   | 15 | 16   | 2                  | 2 | 2.000D 01 | 0.0                                                      | 0.0       | 0.0       | 1.000D 00                     | 1.000D 00 | 0.0 | 5.816D 02 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 26 |
| 27   | 15 | 0    | 0                  | 0 | 2.000D 01 | 1.200D 03                                                | 8.000D 03 | 2.700D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.480D 03 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 27 |
| 28   | 15 | 0    | 2                  | 0 | 2.000D 01 | 1.200D 03                                                | 8.000D 03 | 2.700D 03 | 1.000D 00                     | 1.000D 00 | 0.0 | 1.480D 03 | 5.000D-02        | 5                 | 0 | 0 | 0             | 0  | 28 |

# UNSYMMETRICAL BEAM DATA

| BEAM |    | TENSION-COMPRESSION<br>FLAG |   | DEADBAND |      |           |
|------|----|-----------------------------|---|----------|------|-----------|
| IJ   | I  | J                           | M | N        | IJUB | DB        |
| 25   | 15 | 16                          | 0 | 0        | 1    | 8.000D-02 |
| 26   | 15 | 16                          | 2 | 2        | -1   | 8.000D-02 |
| 27   | 15 | 0                           | 0 | 0        | 1    | 3.000D-01 |
| 28   | 15 | 0                           | 2 | 0        | -1   | 3.000D-01 |

# PLASTIC HINGE AND END-FIXITY DATA

| BEAM | P-CODES | SHAPE FACTORS | PLASTIC HINGE MOMENTS |
|------|---------|---------------|-----------------------|
|------|---------|---------------|-----------------------|

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 5 OF 16)

| IJ | I | J  | M | N | IYIZJVJZ | SF35 | SF26 | SF35J | SF26J | PLM35 | PLM26 | PLM35J    | PLM26J    |
|----|---|----|---|---|----------|------|------|-------|-------|-------|-------|-----------|-----------|
| 1  | 1 | 2  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 0.009 | 1.150 | 0.0   | 0.0   | 1.9890 05 | 1.5510 07 |
| 2  | 2 | 3  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.250 | 1.250 | 0.0   | 0.0   | 3.4030 07 | 1.9000 07 |
| 3  | 3 | 4  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.100 | 1.100 | 0.0   | 0.0   | 5.9120 07 | 2.9560 07 |
| 4  | 4 | 5  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.150 | 1.150 | 0.0   | 0.0   | 9.7750 07 | 3.3420 07 |
| 5  | 5 | 6  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.250 | 1.250 | 0.0   | 0.0   | 7.6890 07 | 3.0820 07 |
| 6  | 6 | 7  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.250 | 1.250 | 0.0   | 0.0   | 6.7610 07 | 2.8340 07 |
| 7  | 7 | 8  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.150 | 1.150 | 0.0   | 0.0   | 5.0420 07 | 2.7420 07 |
| 8  | 8 | 9  | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 1.000 | 1.000 | 0.0   | 0.0   | 3.8430 07 | 2.2990 07 |
| 20 | 6 | 12 | 0 | 0 | 0 0 1 1  | 0.0  | 0.0  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0       | 0.0       |
| 21 | 9 | 14 | 0 | 0 | 0 1 0 1  | 0.0  | 0.0  | 0.0   | 0.0   | 0.0   | 0.0   | 0.0       | 0.0       |

# OLEO STRUT BEAM DATA

## BEAM AIR CURVE PARAMETERS

| IJ | I  | J  | M | N | EOLEO     | FAO       | FAA       | EXPOLE    | YMAX      |
|----|----|----|---|---|-----------|-----------|-----------|-----------|-----------|
| 17 | 11 | 18 | 2 | 0 | 2.098D 01 | 1.086D 04 | 7.390D 02 | 1.4000 00 | 2.0000 01 |
| 19 | 2  | 19 | 1 | 0 | 1.697D 01 | 3.420D 03 | 2.890D 02 | 1.4000 00 | 1.6000 01 |

## BEAM DAMPING CONSTANTS, COULOMB FRICTION AND LINEAR SPRINGS (EXTENSION & COMPRESSION)

| IJ | I  | J  | M | N | BOLEO     | BROLEO | XKEXT     | XKCOMP    | FCOUL     | MPTAB |
|----|----|----|---|---|-----------|--------|-----------|-----------|-----------|-------|
| 17 | 11 | 18 | 2 | 0 | 4.000D 00 | 0.0    | 1.000D 05 | 1.000D 05 | 5.000D 03 | 1     |
| 19 | 2  | 19 | 1 | 0 | 3.400D 00 | 0.0    | 5.000D 04 | 5.000D 04 | 5.000D 02 | 0     |

## OLEO METERING PIN TABLES

TABLE NO. 1

| YOLEO        | BH          |
|--------------|-------------|
| -2.00000D-01 | 3.52700D 02 |
| -9.64000D-02 | 3.52700D 02 |
| -3.76000D-02 | 1.02400D 01 |
| 1.24000D-01  | 2.36200D 01 |
| 3.41000D-01  | 2.22100D 01 |
| 6.07000D-01  | 1.79000D 01 |
| 9.53000D-01  | 8.24000D 00 |
| 1.46000D 00  | 3.38000D 00 |
| 2.17000D 00  | 2.13000D 00 |
| 3.07000D 00  | 1.25000D 00 |
| 4.13000D 00  | 1.56000D 00 |
| 5.21000D 00  | 1.79000D 00 |
| 6.20000D 00  | 2.46000D 00 |
| 7.05000D 00  | 3.58000D 00 |
| 7.72000D 00  | 6.26000D 00 |
| 8.20000D 00  | 1.34700D 01 |
| 8.53000D 00  | 3.15000D 01 |
| 8.74000D 00  | 6.24000D 01 |
| 8.91000D 00  | 6.40600D 01 |
| 9.12000D 00  | 3.42200D 01 |
| 9.41000D 00  | 1.60300D 01 |
| 9.83000D 00  | 8.42000D 00 |
| 1.03900D 01  | 5.24000D 00 |
| 1.10800D 01  | 3.68000D 00 |
| 1.18700D 01  | 2.93000D 00 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 6 OF 16)

```

1.271000 01 2.770000 00
1.354000 01 3.380000 00
1.427000 01 4.930000 00
1.483000 01 9.330000 00
1.521000 01 2.553000 01
1.540000 01 1.537900 02
1.545180 01 1.000000 03
1.545390 01 1.000000 03
1.545810 01 1.000000 03
1.549400 01 4.038500 02
1.561000 01 6.770000 01
1.584000 01 2.215000 01
1.618000 01 9.930000 00
1.665000 01 5.310000 00
1.721000 01 3.020000 00
1.782000 01 2.070000 00
1.839000 01 9.200000-01
1.882000 01 0.0
1.897000 01 1.000000 01
2.200000 01 1.000000 01

```

# NONLINEAR BEAM DATA

| BEAM |    |    |   |   | DIRECTION | STANDARD<br>TABLE NO. | LINEAR<br>DEFLECTION | BOTTOMING<br>DEFLECTION |
|------|----|----|---|---|-----------|-----------------------|----------------------|-------------------------|
| IJ   | I  | J  | M | N | L         | NP                    | LDP                  | LDP1                    |
| 18   | 11 | 18 | 3 | 0 | 1         | 7                     | 2.00000E 00          | 0.0                     |

KR TABLE FOR I,J,M,N,L = 11 18 3 0 1

|   |             |              |
|---|-------------|--------------|
| 1 | 0.0         | 1.00000E 00  |
| 2 | 2.00000E 00 | 1.00000E 00  |
| 3 | 2.00200E 00 | -5.00000E-01 |
| 4 | 6.00000E 00 | -5.00000E-01 |
| 5 | 6.00200E 00 | 0.0          |
| 6 | 2.00000E 01 | 0.0          |
| 7 | 4.00000E 01 | 0.0          |

# DRI ELEMENTS

```

I J
2 21

```

# NON-STANDARD MAXIMUM POS & NEG FORCES

| BEAM |   |   |   |   | MAXIMUM FORCES<br>FMAX(IJ,L) L= |     |     |     |     |     |
|------|---|---|---|---|---------------------------------|-----|-----|-----|-----|-----|
| IJ   | I | J | M | N | 1                               | 2   | 3   | 4   | 5   | 6   |
| 1    | 1 | 2 | 0 | 0 | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
|      |   |   |   |   | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 2    | 2 | 3 | 0 | 0 | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
|      |   |   |   |   | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 3    | 3 | 4 | 0 | 0 | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
|      |   |   |   |   | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 4    | 4 | 5 | 0 | 0 | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
|      |   |   |   |   | 0.0                             | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 7 OF 16)

|    |    |    |   |   |            |     |            |     |     |     |     |
|----|----|----|---|---|------------|-----|------------|-----|-----|-----|-----|
| 5  | 5  | 6  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 6  | 6  | 7  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 7  | 7  | 8  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 8  | 8  | 9  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 9  | 9  | 10 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 10 | 5  | 11 | 0 | 1 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 11 | 11 | 12 | 1 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 12 | 12 | 13 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 13 | 13 | 14 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 14 | 14 | 15 | 0 | 1 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 15 | 12 | 16 | 1 | 1 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 16 | 14 | 17 | 1 | 1 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 17 | 11 | 18 | 2 | 0 | 4.2800D 05 | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 4.2800D 05 | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 18 | 11 | 18 | 3 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 19 | 2  | 19 | 1 | 0 | 1.3000D 05 | 0.0 | 7.8000D 04 | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 1.3000D 05 | 0.0 | 7.8000D 04 | 0.0 | 0.0 | 0.0 | 0.0 |
| 20 | 6  | 12 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 21 | 9  | 14 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 22 | 12 | 0  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 23 | 2  | 20 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 24 | 2  | 21 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 25 | 15 | 16 | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 26 | 15 | 16 | 2 | 2 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 27 | 15 | 0  | 0 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
| 28 | 15 | 0  | 2 | 0 | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |
|    |    |    |   |   | 0.0        | 0.0 | 0.0        | 0.0 | 0.0 | 0.0 | 0.0 |

## LOAD INTERACTION CURVE SIGN CONVENTION VECTORS

| SIGN<br>CONVENTION<br>NUMBER | CALAC LOAD NUMBER AND SIGN<br>FOR USER LOAD NUMBER = |   |    |   |   |   |
|------------------------------|------------------------------------------------------|---|----|---|---|---|
|                              | 1                                                    | 2 | 3  | 4 | 5 | 6 |
| 1                            | 1                                                    | 2 | -3 | 4 | 5 | 6 |

## LOAD INTERACTION CURVE DATA

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 8 OF 16)

| CURVE NO. | BEAM NO. | LOAD X AXIS | NUMBER Y AXIS | FOR NO. OF SLOPING INTERACTION LINES | SIGN CONVEN- TION NUMBER | INTERACTION FS | CURVE BL | LOCATION WL | RUPTURE RATIO |
|-----------|----------|-------------|---------------|--------------------------------------|--------------------------|----------------|----------|-------------|---------------|
| 1         | 1        | 3           | 5             | 4                                    | 0                        | 300.0000       | 0.0      | 0.0         | 1000.0000     |
| 2         | 2        | 3           | 5             | 4                                    | 0                        | 300.0000       | 0.0      | 0.0         | 1000.0000     |
| 3         | 2        | 3           | 5             | 8                                    | 0                        | 400.0000       | 0.0      | 0.0         | 1000.0000     |
| 4         | 3        | 3           | 5             | 8                                    | 0                        | 480.0000       | 0.0      | 0.0         | 1000.0000     |
| 5         | 3        | 3           | 5             | 8                                    | 0                        | 540.0000       | 0.0      | 0.0         | 1000.0000     |
| 6         | 3        | 3           | 5             | 8                                    | 0                        | 620.0000       | 0.0      | 0.0         | 1000.0000     |
| 7         | 4        | 3           | 5             | 8                                    | 0                        | 620.0000       | 0.0      | 0.0         | 1000.0000     |
| 8         | 5        | 3           | 5             | 6                                    | 1                        | 960.0000       | 0.0      | 0.0         | 1000.0000     |
| 9         | 6        | 3           | 5             | 6                                    | 1                        | 960.0000       | 0.0      | 0.0         | 1000.0000     |
| 10        | 6        | 3           | 5             | 8                                    | 1                        | 1000.0000      | 0.0      | 0.0         | 1000.0000     |
| 11        | 7        | 3           | 5             | 10                                   | 1                        | 1080.0000      | 0.0      | 0.0         | 1000.0000     |
| 12        | 7        | 3           | 5             | 10                                   | 1                        | 1160.0000      | 0.0      | 0.0         | 1000.0000     |
| 13        | 8        | 3           | 5             | 10                                   | 1                        | 1240.0000      | 0.0      | 0.0         | 1000.0000     |
| 14        | 8        | 3           | 5             | 6                                    | 1                        | 1320.0000      | 0.0      | 0.0         | 1000.0000     |
| 15        | 9        | 3           | 5             | 10                                   | 1                        | 1400.0000      | 0.0      | 0.0         | 1000.0000     |

| CURVE NO. | +X AXIS    | MAXIMUM LOAD CUTOFFS: +Y AXIS | -X AXIS     | -Y AXIS     | LOAD LINE X AXIS | INTERCEPTS Y AXIS | LOAD LINE NUMBER |
|-----------|------------|-------------------------------|-------------|-------------|------------------|-------------------|------------------|
| 1         | 1.6600D 05 | 2.0800D 07                    | -1.6600D 05 | -2.0800D 07 | 1.9900D 05       | 4.5600D 07        | 1                |
|           |            |                               |             |             | 1.9900D 05       | -4.5600D 07       | 2                |
|           |            |                               |             |             | -1.9900D 05      | 4.5600D 07        | 3                |
|           |            |                               |             |             | -1.9900D 05      | -4.5600D 07       | 4                |
| 2         | 1.6600D 05 | 2.0800D 07                    | -1.6600D 05 | -2.0800D 07 | 1.9900D 05       | 4.5600D 07        | 1                |
|           |            |                               |             |             | 1.9900D 05       | -4.5600D 07       | 2                |
|           |            |                               |             |             | -1.9900D 05      | 4.5600D 07        | 3                |
|           |            |                               |             |             | -1.9900D 05      | -4.5600D 07       | 4                |
| 3         | 2.1000D 05 | 2.3800D 07                    | -2.1000D 05 | -2.3800D 07 | 1.8500D 05       | 6.0800D 07        | 1                |
|           |            |                               |             |             | 6.7430D 05       | 2.5400D 07        | 2                |
|           |            |                               |             |             | 1.8500D 05       | -6.0800D 07       | 3                |
|           |            |                               |             |             | -1.8500D 05      | 6.0800D 07        | 4                |
|           |            |                               |             |             | -1.8500D 05      | -6.0800D 07       | 5                |
|           |            |                               |             |             | 6.7430D 05       | -2.5400D 07       | 6                |
|           |            |                               |             |             | -6.7430D 05      | 2.5400D 07        | 7                |
|           |            |                               |             |             | -6.7430D 05      | -2.5400D 07       | 8                |
| 4         | 1.0000D 20 | 1.0000D 20                    | 1.0000D 20  | 1.0000D 20  | 1.9500D 05       | 1.3030D 08        | 1                |
|           |            |                               |             |             | 5.4530D 05       | 2.8900D 07        | 2                |
|           |            |                               |             |             | 1.9500D 05       | -1.3030D 08       | 3                |
|           |            |                               |             |             | -1.9500D 05      | 1.3030D 08        | 4                |
|           |            |                               |             |             | -1.9500D 05      | -1.3030D 08       | 5                |
|           |            |                               |             |             | 5.4530D 05       | -2.8900D 07       | 6                |
|           |            |                               |             |             | -5.4530D 05      | 2.8900D 07        | 7                |
|           |            |                               |             |             | -5.4530D 05      | -2.8900D 07       | 8                |
| 5         | 1.0000D 20 | 1.0000D 20                    | 1.0000D 20  | 1.0000D 20  | 1.9900D 05       | 1.3730D 08        | 1                |
|           |            |                               |             |             | 1.3654D 06       | 3.5300D 07        | 2                |
|           |            |                               |             |             | 1.9900D 05       | -1.3730D 08       | 3                |
|           |            |                               |             |             | -1.9900D 05      | 1.3730D 08        | 4                |
|           |            |                               |             |             | -1.9900D 05      | -1.3730D 08       | 5                |
|           |            |                               |             |             | 1.3654D 06       | -3.5300D 07       | 6                |
|           |            |                               |             |             | -1.3654D 06      | 3.5300D 07        | 7                |
|           |            |                               |             |             | -1.3654D 06      | -3.5300D 07       | 8                |
| 6         | 2.7400D 05 | 4.5000D 07                    | -2.7400D 05 | -4.5000D 07 | 2.8600D 05       | 1.8560D 08        | 1                |
|           |            |                               |             |             | 3.8440D 05       | 7.9700D 07        | 2                |
|           |            |                               |             |             | 2.8600D 05       | -1.8560D 08       | 3                |
|           |            |                               |             |             | -2.8600D 05      | 1.8560D 08        | 4                |
|           |            |                               |             |             | -2.8600D 05      | -1.8560D 08       | 5                |
|           |            |                               |             |             | 3.8440D 05       | -7.9700D 07       | 6                |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 9 OF 16)

|    |            |             |             |             |             |             |    |
|----|------------|-------------|-------------|-------------|-------------|-------------|----|
|    |            |             |             |             | -3.8440D 05 | 7.9700D 07  | 7  |
|    |            |             |             |             | -3.8440D 05 | -7.9700D 07 | 8  |
| 7  | 2.7400D 05 | 4.5000D 07  | -2.7400D 05 | -4.5000D 07 | 2.8600D 05  | 1.8560D 08  | 1  |
|    |            |             |             |             | 3.8440D 05  | 7.9700D 07  | 2  |
|    |            |             |             |             | 2.8600D 05  | -1.8560D 08 | 3  |
|    |            |             |             |             | -2.8600D 05 | 1.8560D 08  | 4  |
|    |            |             |             |             | -2.8600D 05 | -1.8560D 08 | 5  |
|    |            |             |             |             | 3.8440D 05  | -7.9700D 07 | 6  |
|    |            |             |             |             | -3.8440D 05 | 7.9700D 07  | 7  |
|    |            |             |             |             | -3.8440D 05 | -7.9700D 07 | 8  |
| 8  | 2.8800D 05 | 1.0000D 20  | -2.8800D 05 | 1.0000D 20  | -5.2317D 06 | 7.1500D 07  | 1  |
|    |            |             |             |             | 4.7450D 05  | 1.5280D 08  | 2  |
|    |            |             |             |             | -5.2317D 06 | -7.1500D 07 | 3  |
|    |            |             |             |             | 4.7450D 05  | -1.5280D 08 | 4  |
|    |            |             |             |             | -4.7450D 05 | 1.5280D 08  | 5  |
|    |            |             |             |             | -4.7450D 05 | -1.5280D 08 | 6  |
| 9  | 2.8800D 05 | 1.0000D 20  | -2.8800D 05 | 1.0000D 20  | -5.2317D 06 | 7.1500D 07  | 1  |
|    |            |             |             |             | 4.7450D 05  | 1.5280D 08  | 2  |
|    |            |             |             |             | -5.2317D 06 | -7.1500D 07 | 3  |
|    |            |             |             |             | 4.7450D 05  | -1.5280D 08 | 4  |
|    |            |             |             |             | -4.7450D 05 | 1.5280D 08  | 5  |
|    |            |             |             |             | -4.7450D 05 | -1.5280D 08 | 6  |
| 10 | 2.5400D 05 | 7.4000D 07  | -2.5400D 05 | -7.4000D 07 | 3.0100D 05  | 2.2870D 08  | 1  |
|    |            |             |             |             | 1.3581D 06  | 8.4200D 07  | 2  |
|    |            |             |             |             | 3.0100D 05  | -2.2870D 08 | 3  |
|    |            |             |             |             | -3.0100D 05 | 2.2870D 08  | 4  |
|    |            |             |             |             | -3.0100D 05 | -2.2870D 08 | 5  |
|    |            |             |             |             | 1.3581D 06  | -8.4200D 07 | 6  |
|    |            |             |             |             | -1.3581D 06 | 8.4200D 07  | 7  |
|    |            |             |             |             | -1.3581D 06 | -8.4200D 07 | 8  |
| 11 | 1.0000D 20 | -1.0000D 20 | 1.0000D 20  | 1.0000D 20  | 2.1000D 05  | -5.5588D 08 | 1  |
|    |            |             |             |             | 3.2770D 05  | 1.0775D 08  | 2  |
|    |            |             |             |             | 1.5738D 06  | 6.4000D 07  | 3  |
|    |            |             |             |             | -2.1000D 05 | -5.5588D 08 | 4  |
|    |            |             |             |             | 3.2770D 05  | -1.0775D 08 | 5  |
|    |            |             |             |             | -3.2770D 05 | 1.0775D 08  | 6  |
|    |            |             |             |             | -3.2770D 05 | -1.0775D 08 | 7  |
|    |            |             |             |             | 1.5738D 06  | -6.4000D 07 | 8  |
|    |            |             |             |             | -1.5738D 06 | 6.4000D 07  | 9  |
|    |            |             |             |             | -1.5738D 06 | -6.4000D 07 | 10 |
| 12 | 1.0000D 20 | 1.0000D 20  | 1.0000D 20  | 1.0000D 20  | 2.3900D 05  | -2.6564D 08 | 1  |
|    |            |             |             |             | 3.7221D 05  | 8.3500D 07  | 2  |
|    |            |             |             |             | 8.0484D 05  | 4.9900D 07  | 3  |
|    |            |             |             |             | -2.3900D 05 | -2.6564D 08 | 4  |
|    |            |             |             |             | 3.7221D 05  | -8.3500D 07 | 5  |
|    |            |             |             |             | -3.7221D 05 | 8.3500D 07  | 6  |
|    |            |             |             |             | -3.7221D 05 | -8.3500D 07 | 7  |
|    |            |             |             |             | 8.0484D 05  | -4.9900D 07 | 8  |
|    |            |             |             |             | -8.0484D 05 | 4.9900D 07  | 9  |
|    |            |             |             |             | -8.0484D 05 | -4.9900D 07 | 10 |
| 13 | 1.0000D 20 | 3.5000D 07  | 1.0000D 20  | -3.5000D 07 | 1.9800D 05  | -2.1732D 08 | 1  |
|    |            |             |             |             | 4.0946D 05  | 5.0500D 07  | 2  |
|    |            |             |             |             | 9.6522D 05  | 3.7000D 07  | 3  |
|    |            |             |             |             | -1.9800D 05 | -2.1732D 08 | 4  |
|    |            |             |             |             | 4.0946D 05  | -5.0500D 07 | 5  |
|    |            |             |             |             | -4.0946D 05 | 5.0500D 07  | 6  |
|    |            |             |             |             | -4.0946D 05 | -5.0500D 07 | 7  |
|    |            |             |             |             | 9.6522D 05  | -3.7000D 07 | 8  |
|    |            |             |             |             | -9.6522D 05 | 3.7000D 07  | 9  |
|    |            |             |             |             | -9.6522D 05 | -3.7000D 07 | 10 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 10 OF 16)

|    |            |            |            |             |             |             |    |
|----|------------|------------|------------|-------------|-------------|-------------|----|
| 14 | 1.0000D 20 | 2.7200D 07 | 1.0000D 20 | -2.7200D 07 | 1.4800D 05  | -9.1818D 07 | 1  |
|    |            |            |            |             | 6.6250D 05  | 3.1800D 07  | 2  |
|    |            |            |            |             | -1.4800D 05 | -9.1818D 07 | 3  |
|    |            |            |            |             | 6.6250D 05  | -3.1800D 07 | 4  |
|    |            |            |            |             | -6.6250D 05 | 3.1800D 07  | 5  |
|    |            |            |            |             | -6.6250D 05 | -3.1800D 07 | 6  |
| 15 | 1.0000D 20 | 1.0000D 20 | 1.0000D 20 | 1.0000D 20  | 1.2350D 05  | -5.4998D 07 | 1  |
|    |            |            |            |             | 3.5072D 05  | 2.4200D 07  | 2  |
|    |            |            |            |             | 9.1452D 05  | 1.8900D 07  | 3  |
|    |            |            |            |             | -1.2350D 05 | -5.4998D 07 | 4  |
|    |            |            |            |             | 3.5072D 05  | -2.4200D 07 | 5  |
|    |            |            |            |             | -3.5072D 05 | 2.4200D 07  | 6  |
|    |            |            |            |             | -3.5072D 05 | -2.4200D 07 | 7  |
|    |            |            |            |             | 9.1452D 05  | -1.8900D 07 | 8  |
|    |            |            |            |             | -9.1452D 05 | 1.8900D 07  | 9  |
|    |            |            |            |             | -9.1452D 05 | -1.8900D 07 | 10 |

MASSSES HAVING NONZERO ANGULAR MOMENTA (HE),  
CROSS PRODUCTS OF INERTIA (IXY,IYZ,IXZ)  
OR LIFT CONSTANTS (LC)

| I  | LC  | HEX        | HEY | HEZ | IXY | IYZ | IXZ |
|----|-----|------------|-----|-----|-----|-----|-----|
| 16 | 0.0 | 1.0000D 05 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 17 | 0.0 | 1.0000D 05 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

| NONZERO | PHIDP,THEDP,PSIDP |              |             |
|---------|-------------------|--------------|-------------|
| I       | PHIDP             | THEDP        | PSIDP       |
| 1       | 0.0               | -2.24027D-03 | 0.0         |
| 2       | 0.0               | -2.22840D-03 | 0.0         |
| 3       | 0.0               | -2.01666D-03 | 0.0         |
| 4       | 0.0               | -1.31021D-03 | 0.0         |
| 5       | 0.0               | 0.0          | 0.0         |
| 6       | 0.0               | 1.90573D-03  | 0.0         |
| 7       | 0.0               | 2.64616D-03  | 0.0         |
| 8       | 0.0               | 3.92551D-03  | 0.0         |
| 9       | 0.0               | 5.79121D-03  | 0.0         |
| 10      | 0.0               | 6.38044D-03  | 0.0         |
| 11      | 6.69274D-03       | -2.20144D-03 | 5.60556D-04 |
| 12      | 1.30603D-02       | -6.67157D-03 | 9.32583D-04 |
| 13      | 2.24127D-02       | -1.03213D-02 | 1.68154D-03 |
| 14      | 2.56270D-02       | -7.39424D-03 | 5.29610D-03 |
| 15      | 1.70994D-02       | -9.06780D-03 | 4.92518D-03 |
| 16      | -7.48129D-02      | 2.48595D-02  | 5.43662D-02 |
| 17      | -6.24449D-02      | 2.36452D-02  | 5.91654D-02 |
| 18      | 6.68924D-03       | -2.20407D-03 | 5.60529D-04 |
| 19      | 0.0               | -2.22316D-03 | 0.0         |
| 20      | 0.0               | -4.13788D-03 | 0.0         |
| 21      | 0.0               | -2.22840D-03 | 0.0         |

#### ACCELERATION INPUT TABLE DATA

| MASS | LOCATION | DIRECTION | NO. PTS. | TYPE |
|------|----------|-----------|----------|------|
| 1    |          | 3         | 2        | 1    |
| 2    |          | 3         | 2        | 1    |
| 3    |          | 3         | 2        | 1    |
| 4    |          | 3         | 2        | 1    |
| 5    |          | 3         | 2        | 1    |
| 6    |          | 3         | 2        | 1    |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 11 OF 16)

|    |   |   |   |
|----|---|---|---|
| 7  | 3 | 2 | 1 |
| 8  | 3 | 2 | 1 |
| 9  | 3 | 2 | 1 |
| 10 | 3 | 2 | 1 |
| 11 | 3 | 2 | 1 |
| 12 | 3 | 2 | 1 |
| 13 | 3 | 2 | 1 |
| 14 | 3 | 2 | 1 |
| 15 | 3 | 2 | 1 |
| 16 | 3 | 2 | 1 |
| 17 | 3 | 2 | 1 |
| 18 | 3 | 2 | 1 |
| 19 | 3 | 2 | 1 |

| PT | TIME      | ACCEL      |
|----|-----------|------------|
| 1  | 0.0       | -9.500E 01 |
| 2  | 1.000E 00 | -9.500E 01 |
| 3  | 0.0       | -6.245E 02 |
| 4  | 1.000E 00 | -6.245E 02 |
| 5  | 0.0       | -1.861E 03 |
| 6  | 1.000E 00 | -1.861E 03 |
| 7  | 0.0       | -4.715E 03 |
| 8  | 1.000E 00 | -4.715E 03 |
| 9  | 0.0       | -7.901E 03 |
| 10 | 1.000E 00 | -7.901E 03 |
| 11 | 0.0       | -1.991E 03 |
| 12 | 1.000E 00 | -1.991E 03 |
| 13 | 0.0       | -2.316E 03 |
| 14 | 1.000E 00 | -2.316E 03 |
| 15 | 0.0       | -7.854E 02 |
| 16 | 1.000E 00 | -7.854E 02 |
| 17 | 0.0       | -4.500E 02 |
| 18 | 1.000E 00 | -4.500E 02 |
| 19 | 0.0       | 1.745E 04  |
| 20 | 1.000E 00 | 1.745E 04  |
| 21 | 0.0       | -1.542E 04 |
| 22 | 1.000E 00 | -1.542E 04 |
| 23 | 0.0       | -2.819E 04 |
| 24 | 1.000E 00 | -2.819E 04 |
| 25 | 0.0       | -2.139E 04 |
| 26 | 1.000E 00 | -2.139E 04 |
| 27 | 0.0       | -1.782E 04 |
| 28 | 1.000E 00 | -1.782E 04 |
| 29 | 0.0       | -6.241E 03 |
| 30 | 1.000E 00 | -6.241E 03 |
| 31 | 0.0       | -2.708E 02 |
| 32 | 1.000E 00 | -2.708E 02 |
| 33 | 0.0       | -2.583E 02 |
| 34 | 1.000E 00 | -2.583E 02 |
| 35 | 0.0       | 0.0        |
| 36 | 1.000E 00 | 0.0        |
| 37 | 0.0       | 0.0        |
| 38 | 1.000E 00 | 0.0        |

I,J,M,N

K-MATRIX FOR INTERNAL BEAM IJ

|             |     |     |     |     |     |     |     |
|-------------|-----|-----|-----|-----|-----|-----|-----|
| 1           | 2   | 0   | 0   |     |     |     |     |
| 3.16806D 06 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 12 OF 16)

|             |              |             |             |             |              |
|-------------|--------------|-------------|-------------|-------------|--------------|
| 0.0         | 4.30838D 06  | 0.0         | 0.0         | 0.0         | -2.175910 08 |
| 0.0         | 0.0          | 7.21945D 06 | 0.0         | 3.64612D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 3.72445D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 3.64612D 08 | 0.0         | 2.45525D 10 | 0.0          |
| 0.0         | -2.17591D 08 | 0.0         | 0.0         | 0.0         | 1.465230 10  |
| 2 3 0 0     |              |             |             |             |              |
| 2.24563D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.25243D 06  | 0.0         | 0.0         | 0.0         | -1.00390D 08 |
| 0.0         | 0.0          | 2.24273D 06 | 0.0         | 1.79768D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.84446D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.79768D 08 | 0.0         | 1.92126D 10 | 0.0          |
| 0.0         | -1.00390D 08 | 0.0         | 0.0         | 0.0         | 1.07291D 10  |
| 3 4 0 0     |              |             |             |             |              |
| 2.24968D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.25924D 06  | 0.0         | 0.0         | 0.0         | -1.00753D 08 |
| 0.0         | 0.0          | 2.51847D 06 | 0.0         | 2.01506D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 3.06332D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.01506D 08 | 0.0         | 2.14970D 10 | 0.0          |
| 0.0         | -1.00753D 08 | 0.0         | 0.0         | 0.0         | 1.07485D 10  |
| 4 5 0 0     |              |             |             |             |              |
| 2.94877D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 6.96624D 05  | 0.0         | 0.0         | 0.0         | -6.96916D 07 |
| 0.0         | 0.0          | 2.03744D 06 | 0.0         | 2.03829D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 3.46605D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.03829D 08 | 0.0         | 2.71886D 10 | 0.0          |
| 0.0         | -6.96916D 07 | 0.0         | 0.0         | 0.0         | 9.29611D 09  |
| 5 6 0 0     |              |             |             |             |              |
| 4.19872D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.01108D 06  | 0.0         | 0.0         | 0.0         | -1.41298D 08 |
| 0.0         | 0.0          | 5.01689D 06 | 0.0         | 3.52484D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 4.39443D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 3.52484D 08 | 0.0         | 3.30205D 10 | 0.0          |
| 0.0         | -1.41298D 08 | 0.0         | 0.0         | 0.0         | 1.32367D 10  |
| 6 7 0 0     |              |             |             |             |              |
| 7.11440D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.32999D 07  | 0.0         | 0.0         | 0.0         | -5.32787D 08 |
| 0.0         | 0.0          | 3.17330D 07 | 0.0         | 1.27121D 09 | 0.0          |
| 0.0         | 0.0          | 0.0         | 9.15386D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.27121D 09 | 0.0         | 6.78989D 10 | 0.0          |
| 0.0         | -5.32787D 08 | 0.0         | 0.0         | 0.0         | 2.84576D 10  |
| 7 8 0 0     |              |             |             |             |              |
| 2.98318D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.78602D 06  | 0.0         | 0.0         | 0.0         | -1.43687D 08 |
| 0.0         | 0.0          | 3.28397D 06 | 0.0         | 2.64199D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 4.15656D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.64199D 08 | 0.0         | 2.83402D 10 | 0.0          |
| 0.0         | -1.43687D 08 | 0.0         | 0.0         | 0.0         | 1.54131D 10  |
| 8 9 0 0     |              |             |             |             |              |
| 2.26109D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 9.17438D 05  | 0.0         | 0.0         | 0.0         | -7.50637D 07 |
| 0.0         | 0.0          | 1.53363D 06 | 0.0         | 1.25480D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.07837D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.25480D 08 | 0.0         | 1.36888D 10 | 0.0          |
| 0.0         | -7.50637D 07 | 0.0         | 0.0         | 0.0         | 8.18883D 09  |
| 9 10 0 0    |              |             |             |             |              |
| 1.16655D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.15822D 05  | 0.0         | 0.0         | 0.0         | -1.24108D 07 |
| 0.0         | 0.0          | 1.09726D 06 | 0.0         | 1.17576D 08 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.76428D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.17576D 08 | 0.0         | 1.67983D 10 | 0.0          |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 13 OF 16)

|             |              |             |             |             |              |
|-------------|--------------|-------------|-------------|-------------|--------------|
| 0.0         | -1.24108D 07 | 0.0         | 0.0         | 0.0         | 1.77315D 09  |
| 5 11 0 1    |              |             |             |             |              |
| 4.227200 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 6.56240D 06  | 0.0         | 0.0         | 0.0         | -4.19154D 08 |
| 0.0         | 0.0          | 9.15282D 05 | 0.0         | 5.84610D 07 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.42785D 09 | 0.0         | 0.0          |
| 0.0         | 0.0          | 5.84610D 07 | 0.0         | 4.97870D 09 | 0.0          |
| 0.0         | -4.19154D 08 | 0.0         | 0.0         | 0.0         | 3.56963D 10  |
| 11 12 1 0   |              |             |             |             |              |
| 3.64899D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.35585D 06  | 0.0         | 0.0         | 0.0         | -2.04015D 08 |
| 0.0         | 0.0          | 2.63300D 05 | 0.0         | 2.28017D 07 | 0.0          |
| 0.0         | 0.0          | 0.0         | 5.70443D 08 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.28017D 07 | 0.0         | 2.63281D 09 | 0.0          |
| 0.0         | -2.04015D 08 | 0.0         | 0.0         | 0.0         | 2.35567D 10  |
| 12 13 0 0   |              |             |             |             |              |
| 3.06056D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.11812D 06  | 0.0         | 0.0         | 0.0         | -1.02841D 08 |
| 0.0         | 0.0          | 9.06063D 04 | 0.0         | 8.33365D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.06574D 08 | 0.0         | 0.0          |
| 0.0         | 0.0          | 8.33365D 06 | 0.0         | 1.02200D 09 | 0.0          |
| 0.0         | -1.02841D 08 | 0.0         | 0.0         | 0.0         | 1.26119D 10  |
| 13 14 0 0   |              |             |             |             |              |
| 2.19586D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 3.95762D 05  | 0.0         | 0.0         | 0.0         | -3.66769D 07 |
| 0.0         | 0.0          | 3.76916D 04 | 0.0         | 3.49304D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 9.84093D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 3.49304D 06 | 0.0         | 4.31620D 08 | 0.0          |
| 0.0         | -3.66769D 07 | 0.0         | 0.0         | 0.0         | 4.53201D 09  |
| 14 15 0 1   |              |             |             |             |              |
| 1.06228D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.43848D 05  | 0.0         | 0.0         | 0.0         | -1.35414D 07 |
| 0.0         | 0.0          | 2.15772D 04 | 0.0         | 2.03120D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 5.44952D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.03120D 06 | 0.0         | 2.54948D 08 | 0.0          |
| 0.0         | -1.35414D 07 | 0.0         | 0.0         | 0.0         | 1.69965D 09  |
| 12 16 1 1   |              |             |             |             |              |
| 1.10385D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.85932D 04  | 0.0         | 0.0         | 0.0         | -1.08793D 06 |
| 0.0         | 0.0          | 2.09302D 05 | 0.0         | 7.96367D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.16062D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 7.96367D 06 | 0.0         | 4.04009D 08 | 0.0          |
| 0.0         | -1.08793D 06 | 0.0         | 0.0         | 0.0         | 5.51925D 07  |
| 14 17 1 1   |              |             |             |             |              |
| 1.10387D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.85950D 04  | 0.0         | 0.0         | 0.0         | -1.08798D 06 |
| 0.0         | 0.0          | 2.09315D 05 | 0.0         | 7.96399D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.16064D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 7.96399D 06 | 0.0         | 4.04017D 08 | 0.0          |
| 0.0         | -1.08798D 06 | 0.0         | 0.0         | 0.0         | 5.51936D 07  |
| 11 18 2 0   |              |             |             |             |              |
| 3.36651D 03 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.21584D 05  | 0.0         | 0.0         | 0.0         | -5.41736D 06 |
| 0.0         | 0.0          | 1.21584D 05 | 0.0         | 5.41736D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.85158D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 5.41736D 06 | 0.0         | 3.21838D 08 | 0.0          |
| 0.0         | -5.41736D 06 | 0.0         | 0.0         | 0.0         | 3.21838D 08  |
| 11 18 3 0   |              |             |             |             |              |
| 3.36651D 03 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.21584D 05  | 0.0         | 0.0         | 0.0         | -5.41736D 06 |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 14 OF 16)

|             |              |             |             |             |              |
|-------------|--------------|-------------|-------------|-------------|--------------|
| 0.0         | 0.0          | 1.21584D 05 | 0.0         | 5.41736D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 1.85158D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 5.41736D 06 | 0.0         | 3.21838D 08 | 0.0          |
| 0.0         | -5.41736D 06 | 0.0         | 0.0         | 0.0         | 3.21838D 08  |
| 2 19 1 0    |              |             |             |             |              |
| 4.79488D 03 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 4.77700D 04  | 0.0         | 0.0         | 0.0         | -1.49441D 06 |
| 0.0         | 0.0          | 4.77700D 04 | 0.0         | 1.49441D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 8.79061D 05 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.49441D 06 | 0.0         | 6.23334D 07 | 0.0          |
| 0.0         | -1.49441D 06 | 0.0         | 0.0         | 0.0         | 6.23334D 07  |
| 6 12 0 0    |              |             |             |             |              |
| 1.39154D 06 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.00717D 05  | 0.0         | 0.0         | 0.0         | -1.47290D 07 |
| 0.0         | 0.0          | 9.59211D 03 | 0.0         | 1.40276D 06 | 0.0          |
| 0.0         | 0.0          | 0.0         | 6.23628D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.40276D 06 | 0.0         | 2.73521D 08 | 0.0          |
| 0.0         | -1.47290D 07 | 0.0         | 0.0         | 0.0         | 2.87197D 09  |
| 9 14 0 0    |              |             |             |             |              |
| 6.14019D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 8.65292D 03  | 0.0         | 0.0         | 0.0         | -2.86778D 06 |
| 0.0         | 0.0          | 8.24088D 02 | 0.0         | 2.73122D 05 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.75177D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 2.73122D 05 | 0.0         | 1.20692D 08 | 0.0          |
| 0.0         | -2.86778D 06 | 0.0         | 0.0         | 0.0         | 1.26726D 09  |
| 12 0 0 0    |              |             |             |             |              |
| 7.48826D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.56950D 04  | 0.0         | 0.0         | 0.0         | -4.26524D 06 |
| 0.0         | 0.0          | 1.49476D 03 | 0.0         | 4.06214D 05 | 0.0          |
| 0.0         | 0.0          | 0.0         | 3.35592D 07 | 0.0         | 0.0          |
| 0.0         | 0.0          | 4.06214D 05 | 0.0         | 1.47189D 08 | 0.0          |
| 0.0         | -4.26524D 06 | 0.0         | 0.0         | 0.0         | 1.54549D 09  |
| 2 20 0 0    |              |             |             |             |              |
| 1.02276D 04 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.52161D 03  | 0.0         | 0.0         | 0.0         | -1.51437D 04 |
| 0.0         | 0.0          | 1.52161D 03 | 0.0         | 1.51437D 04 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.00956D 04 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.51437D 04 | 0.0         | 2.00956D 05 | 0.0          |
| 0.0         | -1.51437D 04 | 0.0         | 0.0         | 0.0         | 2.00956D 05  |
| 2 21 0 0    |              |             |             |             |              |
| 6.54560D 03 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 1.50001D 03  | 0.0         | 0.0         | 0.0         | -1.50001D 04 |
| 0.0         | 0.0          | 1.50001D 03 | 0.0         | 1.50001D 04 | 0.0          |
| 0.0         | 0.0          | 0.0         | 2.00000D 04 | 0.0         | 0.0          |
| 0.0         | 0.0          | 1.50001D 04 | 0.0         | 2.00000D 05 | 0.0          |
| 0.0         | -1.50001D 04 | 0.0         | 0.0         | 0.0         | 2.00000D 05  |
| 15 16 0 0   |              |             |             |             |              |
| 3.43883D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 15 16 2 2   |              |             |             |             |              |
| 3.43883D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 15 OF 16)

|             |              |             |             |             |              |
|-------------|--------------|-------------|-------------|-------------|--------------|
| 15 0 0 0    |              |             |             |             |              |
| 1.35105D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.95934D 02  | 0.0         | 0.0         | 0.0         | -2.19040D 05 |
| 0.0         | 0.0          | 4.43900D 01 | 0.0         | 3.28560D 04 | 0.0          |
| 0.0         | 0.0          | 0.0         | 6.93088D 06 | 0.0         | 0.0          |
| 0.0         | 0.0          | 3.28560D 04 | 0.0         | 3.24252D 07 | 0.0          |
| 0.0         | -2.19040D 05 | 0.0         | 0.0         | 0.0         | 2.16168D 08  |
| 15 0 2 0    |              |             |             |             |              |
| 1.35105D 05 | 0.0          | 0.0         | 0.0         | 0.0         | 0.0          |
| 0.0         | 2.95934D 02  | 0.0         | 0.0         | 0.0         | -2.19040D 05 |
| 0.0         | 0.0          | 4.43900D 01 | 0.0         | 3.28560D 04 | 0.0          |
| 0.0         | 0.0          | 0.0         | 6.93088D 06 | 0.0         | 0.0          |
| 0.0         | 0.0          | 3.28560D 04 | 0.0         | 3.24252D 07 | 0.0          |
| 0.0         | -2.19040D 05 | 0.0         | 0.0         | 0.0         | 2.16168D 08  |

FIGURE 2-9. FORMATTED PRINTOUT OF INPUT DATA (SHEET 16 OF 16)

- Nonzero mass orientation Euler angles (optional) (When a static deflection data set XYZ.NASOUT.DATA is read in, all masses will be rotated and a complete printout of this section of data will occur.)
- Acceleration input table data (optional)
- $[K_{ij}]$  matrices for all NB internal beams

The nonlinear beam data section prints out all the KR tables, whether these are user-input or standard tables coded into KRASH85. Similarly, the 6 x 6 linear stiffness matrix  $[K_{ij}]$  is printed for all NB internal beam elements, whether  $[K_{ij}]$  is directly input by the user or internally calculated in KRASH. The printed matrix corresponds to the lower right-hand quadrant of a full 12 by 12 beam stiffness matrix (figure 1-19, Vol. 1).

Certain items in this formatted printout of the input data provide additional information not directly input by the user. These include the following:

- External spring data - The actual damping constant used in the KRASH85 calculations of spring damping force is shown (CDAMP(IKM)).
- Internal beam data - Beam lengths are shown (XLB). The item called VBM is a flag denoting which, if any, of the beams the program treats as vertical beams. VBM = 1 corresponds to a vertical beam, and VBM = 0 corresponds to a normal beam. The interpretation of the beam orientation Euler angles, part of the time-history beam deflection output, depends upon whether a normal or vertical beam is noted.
- Plastic hinge and end-fixity data - The actual plastic hinge moments, calculated within the program, are output. (PLM35,...,PLM26J)
- Mass data - The coordinates for the mass and node points are not equal to those input by the user in XYZ.DATA. The input coordinates have been modified by the initial mass and node point deflections, also shown in the formatted output of the input data. All calculations in KRASH85 use the modified coordinate data.

#### 2.3.1.3 Miscellaneous Calculated Data

The miscellaneous calculated data are illustrated in figure 2-10, and is described in the following subsections.

2.3.1.3.1 Model Parameters. - The overall vehicle weight, c.g. position, and inertias are shown. These are used to see how well the analytical model matches the actual vehicle being analyzed. This output is always for a complete airplane, even if only a half-airplane model is input (RUMMOD = 1.0). The initial position of the vehicle c.g., relative to the ground, is also shown.

2.3.1.3.2 Beam Loads and Deflections Corresponding to Yielding. - This output is generated only if NIC on card 50 (figure 2-3) is input nonzero. The beam loads and deflections corresponding to yielding are used as guidelines for establishing nonlinear deflection points for internal beam KR curves. The loads are calculated using the stress and buckling equations discussed in Volume I, Section 1.3.17, along with the appropriate yield stress for the beam material given in table 2-3 of this report.

The loads corresponding to yield stress are uncoupled loads (e.g., the shear forces are those corresponding to yielding without any bending moment applied.) Similarly, beam deflections are those resulting from the corresponding load only without the coupled load being applied. In actual loading situations, some degree of coupling is always present, so the deflections corresponding to yield provide only a rough indication of appropriate values to use for setting up KR curves. Furthermore, no attempt has been made to include in the analysis the effects of stress concentrations, geometric shape factors, and end attachment details.

2.3.1.3.3 Overall Vehicle Forces/Accelerations at Time Zero. - This block of output data is printed twice. The first time shows the six net loads (pounds and inch-pounds) at the airplane c.g., and the resulting six rigid body accelerations. These c.g. accelerations are then used to calculate the rigid body acceleration at each mass point in the model. These mass point accelerations yield inertia relief loads at each mass point. If these inertia relief loads are included in the total airplane force/moment balance, the net c.g. loads and accelerations should be zero. The second printout shows that the c.g. loads/accelerations, including inertia relief, are indeed very small (less than E-16 for all accelerations). The above calculations are performed in

subroutine NETFOR, the purpose of which is to calculate the net forces acting on each mass. These forces are used in the NASTRAN static load solution. Inertia relief loads are included to guarantee that a balanced set of applied loads is input to the NASTRAN model.

2.3.1.3.4 Individual Mass Forces/Accelerations At Time Zero. - Figure 2-10 also shows this list of loads and accelerations for each mass in the model. The specific data output for each mass is as follows:

- Line 1: Gravity loads, c.g. axes
- Line 2: External loads, c.g. axes. These are the loads due to input time histories of external loads at specified masses, per the 3500-series cards. This is the method used to input aerodynamic loads into the model for the sample case.
- Line 3: Aerodynamic lift, c.g. axes. These data reflects any aerodynamic lift calculated by means of inputting LC on the 3100-series cards. This option is not used in the sample case. The aerodynamic loads calculated using the 3300-series aero data are not included in the load calculations in NETFOR. Therefore, these loads will not get into the NASTRAN model to determine the proper balanced initial conditions.
- Line 4: Inertia loads, c.g. axes. The inertia loads are calculated in NETFOR, as described in Section 2.3.1.4 above, to achieve a balanced set of loads for input to NASTRAN.
- Line 5: Net loads, c.g. axes. These loads are the sum of all the above loads. The net loads are the input to the NASTRAN static load solution.
- Line 6: Accelerations, mass axes. These are the rigid body airplane accelerations at time zero at each mass point. As explained in Section 2.3.1.4, these accelerations are calculated from the airplane c.g. acceleration, which in turn is calculated from all the loads except inertia relief loads. The mass point accelerations in line 6 times the mass point inertia matrix yields the inertia relief loads. These accelerations are output in mass axes to facilitate comparisons with KRASH85 time-history output at time zero. The accelerations for the latter are also in mass axes. The two sets of accelerations should be equal for a properly balanced set of initial conditions.

All quantities shown in this output have the units of pounds or inch-pounds for loads, and g's or  $\text{rad/sec}^2$  for accelerations. The sign convention

is positive forward, right, and down, with right-hand moments about those axes. These data are presented basically as reference information; the user need not examine these data closely. The determination of whether or not the balanced initial conditions are acceptably accurate can be made based on data that are presented at the time zero printout from program KRASH85. (Section 2.3.3).

### 2.3.2 MSCTRAN Output

The output data from MSC/NASTRAN are discussed in this section. Familiarity with these output data is not necessary to successfully run program KRASH. If difficulties occur in achieving a balanced initial condition, then a review of this data may be necessary to help isolate the problem.

#### 2.3.2.1 Executive Control Deck Echo

This is shown in figure 2-11, and consists of only four lines. These are generated automatically by program KRASHIC. SOL 24 refers to Rigid Format Solution No. 24, which is the small deflection linear static solution.

#### 2.3.2.2 Case Control Deck Echo

This is also shown in figure 2-11, and contains only 13 cards. These are generated automatically by program KRASHIC. The output control card DISPLACEMENT (PRINT,PUNCH) = ALL, used in conjunction with the appropriate JCL cards, causes the output displacement vector to be written as data set XYZ.NASOUT.DATA in the user's library. If the user wants to eliminate or revise some of the NASTRAN output data, then Format No. 1020 in subroutine NAST, in program KRASHIC, should be revised accordingly.

#### 2.3.2.3 Input Bulk Data Deck Echo

The complete input bulk data deck is reproduced in this echo, shown as figure 2-12. All these cards are generated automatically by program KRASHIC, in subroutines NAST and NAST10. The CONM2 (mass property), PLOTTEL (plot data) and EIGR (eigenvalue) cards are not used in the static load solution employed (SOL 24). KRASHIC converts a KRASH85 input data set into a NASTRAN

# MODEL PARAMETERS

VEHICLE WT = 1.865560D 05

## VEHICLE CG POSITION

X (FS) = 8.43139D 02

Y (BL) = 0.0

Z (ML) = 2.09423D 02

## VEHICLE INERTIAS (IN-LB-SEC\*\*2)

I(XX) = 3.39292D 07

I(YY) = 3.87955D 07

I(ZZ) = 7.12554D 07

I(XY) = 0.0

I(YZ) = 0.0

I(XZ) = 1.95061D 06

## VEHICLE CG INITIAL GROUND COORDINATES

XCG IS THE DISTANCE FROM SLOPE/GROUND INTERSECTION TO VEHICLE CG,+FORWARD

ZCG IS THE DISTANCE FROM GROUND PLANE TO VEHICLE CG,+DOWN

XCG = 0.0

ZCG = -1.38499D 02

## BEAM LOADS

| BEAM |    |    |   | AXIAL LOAD |            |            |             | SHEAR FORCE |             |         |            | MOMENT     |    | BEAM |    |   |   |
|------|----|----|---|------------|------------|------------|-------------|-------------|-------------|---------|------------|------------|----|------|----|---|---|
| IJ   | I  | J  | M | N          | BUCKLING   | TENSION    | COMPRESSION | LATERAL(Y)  | VERTICAL(Z) | ROLL(X) | PITCH(Y)   | YAW(Z)     | IJ | I    | J  | M | N |
| 1    | 1  | 2  | 0 | 0          | 7.1584D 08 | 1.1200D 06 | 1.0880D 06  | 3.6448D 05  | 3.6448D 05  | 0.0     | 2.1958D 07 | 1.3104D 07 | 1  | 1    | 2  | 0 | 0 |
| 2    | 2  | 3  | 0 | 0          | 3.3027D 08 | 1.2600D 06 | 1.2240D 06  | 4.1004D 05  | 4.1004D 05  | 0.0     | 2.6444D 07 | 1.4768D 07 | 2  | 2    | 3  | 0 | 0 |
| 3    | 3  | 4  | 0 | 0          | 3.3146D 08 | 1.2600D 06 | 1.2240D 06  | 4.1004D 05  | 4.1004D 05  | 0.0     | 5.2214D 07 | 2.6107D 07 | 3  | 3    | 4  | 0 | 0 |
| 4    | 4  | 5  | 0 | 0          | 2.2928D 08 | 2.0650D 06 | 2.0060D 06  | 6.7201D 05  | 6.7201D 05  | 0.0     | 8.2571D 07 | 2.8232D 07 | 4  | 4    | 5  | 0 | 0 |
| 5    | 5  | 6  | 0 | 0          | 4.6485D 08 | 2.0650D 06 | 2.0060D 06  | 6.7201D 05  | 6.7201D 05  | 0.0     | 5.9758D 07 | 2.3955D 07 | 5  | 5    | 6  | 0 | 0 |
| 6    | 6  | 7  | 0 | 0          | 1.7528D 09 | 1.9950D 06 | 1.9380D 06  | 6.4923D 05  | 6.4923D 05  | 0.0     | 5.2545D 07 | 2.2023D 07 | 6  | 6    | 7  | 0 | 0 |
| 7    | 7  | 8  | 0 | 0          | 4.7271D 08 | 1.6800D 06 | 1.6320D 06  | 5.4672D 05  | 5.4672D 05  | 0.0     | 4.2593D 07 | 2.3165D 07 | 7  | 7    | 8  | 0 | 0 |
| 8    | 8  | 9  | 0 | 0          | 2.4695D 08 | 1.2950D 06 | 1.2580D 06  | 4.2143D 05  | 4.2143D 05  | 0.0     | 3.7333D 07 | 2.2333D 07 | 8  | 8    | 9  | 0 | 0 |
| 9    | 9  | 10 | 0 | 0          | 8.1659D 07 | 8.7500D 05 | 8.5000D 05  | 2.8475D 05  | 2.8475D 05  | 0.0     | 6.1200D 07 | 6.4600D 06 | 9  | 9    | 10 | 0 | 0 |
| 10   | 5  | 11 | 0 | 1          | 3.8466D 08 | 1.8900D 06 | 1.8360D 06  | 6.1506D 05  | 6.1506D 05  | 0.0     | 5.4060D 08 | 3.8760D 09 | 10 | 5    | 11 | 0 | 1 |
| 11   | 11 | 12 | 1 | 0          | 1.5003D 08 | 2.2120D 06 | 2.1488D 06  | 7.1985D 05  | 7.1985D 05  | 0.0     | 3.8760D 08 | 3.4680D 09 | 11 | 11   | 12 | 1 | 0 |
| 12   | 12 | 13 | 0 | 0          | 5.4833D 07 | 1.9705D 06 | 1.9142D 06  | 6.4126D 05  | 6.4126D 05  | 0.0     | 1.5980D 08 | 1.9720D 09 | 12 | 12   | 13 | 0 | 0 |
| 13   | 13 | 14 | 0 | 0          | 2.2983D 07 | 1.4245D 06 | 1.3838D 06  | 4.6357D 05  | 4.6357D 05  | 0.0     | 6.8000D 07 | 7.1400D 08 | 13 | 13   | 14 | 0 | 0 |
| 14   | 14 | 15 | 0 | 1          | 1.3365D 07 | 7.0000D 05 | 6.8000D 05  | 2.2780D 05  | 2.2780D 05  | 0.0     | 4.0800D 07 | 2.7200D 08 | 14 | 14   | 15 | 0 | 1 |
| 15   | 12 | 16 | 1 | 1          | 7.1583D 06 | 3.7600D 05 | 3.1200D 05  | 1.1792D 05  | 1.1792D 05  | 0.0     | 2.8548D 07 | 3.9000D 06 | 15 | 12   | 16 | 1 | 1 |
| 16   | 14 | 17 | 1 | 1          | 7.1586D 06 | 3.7600D 05 | 3.1200D 05  | 1.1792D 05  | 1.1792D 05  | 0.0     | 2.8548D 07 | 3.9000D 06 | 16 | 14   | 17 | 1 | 1 |
| 17   | 11 | 18 | 2 | 0          | 3.5645D 07 | 7.5000D 02 | 7.5000D 02  | 2.5125D 02  | 2.5125D 02  | 0.0     | 1.7925D 07 | 1.7925D 07 | 17 | 11   | 18 | 2 | 0 |
| 18   | 11 | 18 | 3 | 0          | 3.5645D 07 | 7.5000D 02 | 7.5000D 02  | 2.5125D 02  | 2.5125D 02  | 0.0     | 1.7925D 07 | 1.7925D 07 | 18 | 11   | 18 | 3 | 0 |
| 19   | 2  | 19 | 1 | 0          | 9.8328D 06 | 7.5000D 02 | 7.5000D 02  | 2.5125D 02  | 2.5125D 02  | 0.0     | 2.4375D 06 | 2.4375D 06 | 19 | 2    | 19 | 1 | 0 |
| 20   | 6  | 12 | 0 | 0          | 4.6149D 06 | 1.4245D 06 | 1.3838D 06  | 4.6357D 05  | 4.6357D 05  | 0.0     | 6.8000D 07 | 7.1400D 08 | 20 | 6    | 12 | 0 | 0 |
| 21   | 9  | 14 | 0 | 0          | 1.7971D 06 | 1.4245D 06 | 1.3838D 06  | 0.0         | 4.6357D 05  | 0.0     | 6.8000D 07 | 0.0        | 21 | 9    | 14 | 0 | 0 |
| 22   | 12 | 0  | 0 | 0          | 2.6728D 06 | 1.4245D 06 | 1.3838D 06  | 4.6357D 05  | 4.6357D 05  | 0.0     | 6.8000D 07 | 7.1400D 08 | 22 | 12   | 0  | 0 | 0 |
| 23   | 2  | 20 | 0 | 0          | 9.9642D 04 | 3.2573D 03 | 3.2573D 03  | 2.3188D 03  | 2.3188D 03  | 0.0     | 1.6000D 04 | 1.6000D 04 | 23 | 2    | 20 | 0 | 0 |
| 24   | 2  | 21 | 0 | 0          | 9.8697D 04 | 2.0946D 03 | 2.0946D 03  | 1.4911D 03  | 1.4911D 03  | 0.0     | 1.6000D 04 | 1.6000D 04 | 24 | 2    | 21 | 0 | 0 |
| 25   | 15 | 16 | 0 | 0          | 0.0        | 7.0000D 05 | 6.8000D 05  | 2.2780D 05  | 2.2780D 05  | 0.0     | 0.0        | 0.0        | 25 | 15   | 16 | 0 | 0 |
| 26   | 15 | 16 | 2 | 2          | 0.0        | 7.0000D 05 | 6.8000D 05  | 2.2780D 05  | 2.2780D 05  | 0.0     | 0.0        | 0.0        | 26 | 15   | 16 | 2 | 2 |
| 27   | 15 | 0  | 0 | 0          | 2.1618D 05 | 7.0000D 05 | 6.8000D 05  | 2.2780D 05  | 2.2780D 05  | 0.0     | 4.0800D 07 | 2.7200D 08 | 27 | 15   | 0  | 0 | 0 |
| 28   | 15 | 0  | 2 | 0          | 2.1618D 05 | 7.0000D 05 | 6.8000D 05  | 2.2780D 05  | 2.2780D 05  | 0.0     | 4.0800D 07 | 2.7200D 08 | 28 | 15   | 0  | 2 | 0 |

FIGURE 2-10. MISCELLANEOUS CALCULATED DATA (SHEET 1 OF 5)

# BEAM DEFLECTIONS

| BEAM |    |    |   | DEFLECTION |           |           |             | TRANSLATION DUE TO |           |           |           | ROTATION ABOUT |           |           |
|------|----|----|---|------------|-----------|-----------|-------------|--------------------|-----------|-----------|-----------|----------------|-----------|-----------|
| IJ   | I  | J  | M | N          | BUCKLING  | TENSION   | COMPRESSION | F(Y)               | F(Z)      | BM(Z)     | BM(Y)     | X-AXIS         | Y-AXIS    | Z-AXIS    |
| 1    | 1  | 2  | 0 | 0          | 2.260D 02 | 3.535D-01 | 3.434D-01   | 8.460D-02          | 5.049D-02 | 1.204D-01 | 1.204D-01 | 0.0            | 3.577D-03 | 3.577D-03 |
| 2    | 2  | 3  | 0 | 0          | 1.471D 02 | 5.611D-01 | 5.451D-01   | 3.274D-01          | 1.828D-01 | 2.942D-01 | 2.942D-01 | 0.0            | 5.506D-03 | 5.506D-03 |
| 3    | 3  | 4  | 0 | 0          | 1.473D 02 | 5.601D-01 | 5.441D-01   | 3.256D-01          | 1.628D-01 | 5.182D-01 | 5.182D-01 | 0.0            | 9.716D-03 | 9.716D-03 |
| 4    | 4  | 5  | 0 | 0          | 7.775D 01 | 7.003D-01 | 6.803D-01   | 9.647D-01          | 3.298D-01 | 8.102D-01 | 8.102D-01 | 0.0            | 1.215D-02 | 1.215D-02 |
| 5    | 5  | 6  | 0 | 0          | 1.107D 02 | 4.918D-01 | 4.778D-01   | 3.342D-01          | 1.339D-01 | 3.391D-01 | 3.391D-01 | 0.0            | 7.239D-03 | 7.239D-03 |
| 6    | 6  | 7  | 0 | 0          | 2.464D 02 | 2.804D-01 | 2.724D-01   | 4.881D-02          | 2.046D-02 | 8.267D-02 | 8.267D-02 | 0.0            | 3.096D-03 | 3.096D-03 |
| 7    | 7  | 8  | 0 | 0          | 1.585D 02 | 5.632D-01 | 5.471D-01   | 3.061D-01          | 1.665D-01 | 3.224D-01 | 3.224D-01 | 0.0            | 6.012D-03 | 6.012D-03 |
| 8    | 8  | 9  | 0 | 0          | 1.092D 02 | 5.727D-01 | 5.564D-01   | 4.594D-01          | 2.748D-01 | 5.951D-01 | 5.951D-01 | 0.0            | 1.091D-02 | 1.091D-02 |
| 9    | 9  | 10 | 0 | 0          | 7.000D 01 | 7.501D-01 | 7.286D-01   | 2.459D 00          | 2.595D-01 | 1.041D 00 | 1.041D 00 | 0.0            | 1.457D-02 | 1.457D-02 |
| 10   | 5  | 11 | 0 | 1          | 9.100D 01 | 4.471D-01 | 4.343D-01   | 9.372D-02          | 6.720D-01 | 1.849D 01 | 1.849D 01 | 0.0            | 4.343D-01 | 4.343D-01 |
| 11   | 11 | 12 | 1 | 0          | 4.112D 01 | 6.062D-01 | 5.889D-01   | 3.056D-01          | 2.734D 00 | 3.400D 01 | 3.400D 01 | 0.0            | 5.889D-01 | 5.889D-01 |
| 12   | 12 | 13 | 0 | 0          | 1.792D 01 | 6.438D-01 | 6.254D-01   | 5.735D-01          | 7.077D 00 | 3.835D 01 | 3.835D 01 | 0.0            | 6.254D-01 | 6.254D-01 |
| 13   | 13 | 14 | 0 | 0          | 1.047D 01 | 6.487D-01 | 6.302D-01   | 1.171D 00          | 1.230D 01 | 3.893D 01 | 3.893D 01 | 0.0            | 6.302D-01 | 6.302D-01 |
| 14   | 14 | 15 | 0 | 1          | 1.258D 01 | 6.590D-01 | 6.401D-01   | 1.584D 00          | 1.056D 01 | 4.017D 01 | 4.017D 01 | 0.0            | 6.401D-01 | 6.401D-01 |
| 15   | 12 | 16 | 1 | 1          | 6.485D 00 | 3.406D-01 | 2.826D-01   | 4.124D 00          | 5.634D-01 | 7.170D 00 | 7.170D 00 | 0.0            | 2.826D-01 | 2.826D-01 |
| 16   | 14 | 17 | 1 | 1          | 6.485D 00 | 3.406D-01 | 2.826D-01   | 4.124D 00          | 5.634D-01 | 7.169D 00 | 7.169D 00 | 0.0            | 2.826D-01 | 2.826D-01 |
| 17   | 11 | 18 | 2 | 0          | 1.059D 04 | 2.228D-01 | 2.228D-01   | 2.066D-03          | 2.066D-03 | 6.618D 00 | 6.618D 00 | 0.0            | 2.228D-01 | 2.228D-01 |
| 18   | 11 | 18 | 3 | 0          | 1.059D 04 | 2.228D-01 | 2.228D-01   | 2.066D-03          | 2.066D-03 | 6.618D 00 | 6.618D 00 | 0.0            | 2.228D-01 | 2.228D-01 |
| 19   | 2  | 19 | 1 | 0          | 2.051D 03 | 1.564D-01 | 1.564D-01   | 5.260D-03          | 5.260D-03 | 3.262D 00 | 3.262D 00 | 0.0            | 1.564D-01 | 1.564D-01 |
| 20   | 6  | 12 | 0 | 0          | 3.316D 00 | 1.024D 00 | 9.944D-01   | 4.603D 00          | 4.833D 01 | 9.695D 01 | 9.695D 01 | 0.0            | 9.944D-01 | 9.944D-01 |
| 21   | 9  | 14 | 0 | 0          | 2.927D 00 | 2.320D 00 | 2.254D 00   | 5.357D 01          | 5.625D 02 | 4.979D 02 | 4.979D 02 | 0.0            | 2.254D 00 | 2.254D 00 |
| 22   | 12 | 0  | 0 | 0          | 3.569D 00 | 1.902D 00 | 1.848D 00   | 2.954D 01          | 3.101D 02 | 3.348D 02 | 3.348D 02 | 0.0            | 1.848D 00 | 1.848D 00 |
| 23   | 2  | 20 | 0 | 0          | 9.742D 00 | 3.185D-01 | 3.185D-01   | 1.524D 00          | 1.524D 00 | 2.113D 00 | 2.113D 00 | 0.0            | 3.185D-01 | 3.185D-01 |
| 24   | 2  | 21 | 0 | 0          | 1.508D 01 | 3.200D-01 | 3.200D-01   | 9.940D-01          | 9.940D-01 | 2.133D 00 | 2.133D 00 | 0.0            | 3.200D-01 | 3.200D-01 |
| 25   | 15 | 16 | 0 | 0          | 0.0       | 2.036D 00 | 1.977D 00   | 0.0                | 0.0       | 0.0       | 0.0       | 0.0            | 0.0       | 0.0       |
| 26   | 15 | 16 | 2 | 2          | 0.0       | 2.036D 00 | 1.977D 00   | 0.0                | 0.0       | 0.0       | 0.0       | 0.0            | 0.0       | 0.0       |
| 27   | 15 | 0  | 0 | 0          | 1.600D 00 | 5.181D 00 | 5.033D 00   | 7.698D 02          | 5.132D 03 | 2.484D 03 | 2.484D 03 | 0.0            | 5.033D 00 | 5.033D 00 |
| 28   | 15 | 0  | 2 | 0          | 1.600D 00 | 5.181D 00 | 5.033D 00   | 7.698D 02          | 5.132D 03 | 2.484D 03 | 2.484D 03 | 0.0            | 5.033D 00 | 5.033D 00 |

## OVERALL VEHICLE FORCES AND ACCELS(G-S), A/P AXES

FX= -1.91571D 03      AX= -1.02688D-02  
 FY= 0.0                      AY= 0.0  
 FZ= 4.09109D 03      AZ= 2.19296D-02  
 MX= 0.0                      PDT= 0.0  
 MY= -1.45248D 05      QDT= -3.74394D-03  
 MZ= 0.0                      RDT= 0.0

## OVERALL VEHICLE FORCES AND ACCELS(G-S), INCLUDING INERTIA RELIEF, A/P AXES

FX= -1.72529D-13      AX= -9.24809D-19  
 FY= 0.0                      AY= 0.0  
 FZ= 5.11591D-12      AZ= 2.74229D-17  
 MX= 0.0                      PDT= 0.0  
 MY= 8.29459D-10      QDT= 2.13803D-17  
 MZ= 0.0                      RDT= 0.0

## INDIVIDUAL MASS FORCES/MOMENTS AND ACCELS GRAVITY/EXTERNAL/LIFT/INERTIA/NET/ACCELS(G-S)

FIGURE 2-10. MISCELLANEOUS CALCULATED DATA (SHEET 2 OF 5)

## ACCELS IN MASS AXES, ALL OTHERS IN A/P AXES

| MASS | X            | Y   | Z            | L   | M            | N   |
|------|--------------|-----|--------------|-----|--------------|-----|
| 1    | -2.76568D 01 | 0.0 | 1.58476D 03  | 0.0 | 0.0          | 0.0 |
|      | 2.12825D-01  | 0.0 | -9.49998D 01 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 4.25797D 01  | 0.0 | -4.50550D 01 | 0.0 | 1.49758D 02  | 0.0 |
|      | 1.51357D 01  | 0.0 | 1.44470D 03  | 0.0 | 1.49758D 02  | 0.0 |
|      | -2.68004D-02 | 0.0 | 2.84860D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 2    | -1.58167D 02 | 0.0 | 9.06312D 03  | 0.0 | 0.0          | 0.0 |
|      | 1.39164D 00  | 0.0 | -6.24498D 02 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 2.19886D 02  | 0.0 | -2.48534D 02 | 0.0 | 1.12318D 03  | 0.0 |
|      | 6.31105D 01  | 0.0 | 8.19009D 03  | 0.0 | 1.12318D 03  | 0.0 |
|      | -2.41968D-02 | 0.0 | 2.74724D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 3    | -2.67287D 02 | 0.0 | 1.53158D 04  | 0.0 | 0.0          | 0.0 |
|      | 3.75300D 00  | 0.0 | -1.86100D 03 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 3.09518D 02  | 0.0 | -3.92391D-02 | 0.0 | 3.62919D 02  | 0.0 |
|      | 4.59834D 01  | 0.0 | 1.30624D 04  | 0.0 | 3.62919D 02  | 0.0 |
|      | -2.01543D-02 | 0.0 | 2.56569D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 4    | -2.28514D 02 | 0.0 | 1.30940D 04  | 0.0 | 0.0          | 0.0 |
|      | 6.17764D 00  | 0.0 | -4.71500D 03 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 2.10641D 02  | 0.0 | -3.14323D 02 | 0.0 | 2.49777D 02  | 0.0 |
|      | -1.16955D 01 | 0.0 | 8.06469D 03  | 0.0 | 2.49777D 02  | 0.0 |
|      | -1.60529D-02 | 0.0 | 2.40225D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 5    | -3.79564D 02 | 0.0 | 2.17493D 04  | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | -7.90100D 03 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 2.38359D 02  | 0.0 | -4.76710D 02 | 0.0 | 4.70501D 02  | 0.0 |
|      | -1.41205D 02 | 0.0 | 1.33716D 04  | 0.0 | 4.70501D 02  | 0.0 |
|      | -1.09577D-02 | 0.0 | 2.19151D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 6    | -1.37874D 02 | 0.0 | 7.90030D 03  | 0.0 | 0.0          | 0.0 |
|      | -3.79430D 00 | 0.0 | -1.99100D 03 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 5.69998D 01  | 0.0 | -1.64901D 02 | 0.0 | 4.49273D 02  | 0.0 |
|      | -8.46687D 01 | 0.0 | 5.74440D 03  | 0.0 | 4.49273D 02  | 0.0 |
|      | -7.25355D-03 | 0.0 | 2.08558D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 7    | -1.60370D 02 | 0.0 | 9.18930D 03  | 0.0 | 0.0          | 0.0 |
|      | -6.12849D 00 | 0.0 | -2.31599D 03 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 4.76734D 01  | 0.0 | -1.83561D 02 | 0.0 | 5.24152D 02  | 0.0 |
|      | -1.18825D 02 | 0.0 | 6.68975D 03  | 0.0 | 5.24152D 02  | 0.0 |
|      | -5.23997D-03 | 0.0 | 1.99587D-02  | 0.0 | -3.74394D-03 | 0.0 |
| 8    | -1.73416D 02 | 0.0 | 9.93689D 03  | 0.0 | 0.0          | 0.0 |
|      | -3.08309D 00 | 0.0 | -7.85394D 02 | 0.0 | 0.0          | 0.0 |
|      | 0.0          | 0.0 | 0.0          | 0.0 | 0.0          | 0.0 |
|      | 8.74043D 00  | 0.0 | -1.87359D 02 | 0.0 | 6.73910D 02  | 0.0 |
|      | -1.67759D 02 | 0.0 | 8.96413D 03  | 0.0 | 6.73910D 02  | 0.0 |
|      | -9.53457D-04 | 0.0 | 1.88484D-02  | 0.0 | -3.74394D-03 | 0.0 |

FIGURE 2-10. MISCELLANEOUS CALCULATED DATA (SHEET 3 OF 5)

|    |              |              |              |              |              |              |
|----|--------------|--------------|--------------|--------------|--------------|--------------|
| 9  | -9.94949D 01 | 0.0          | 5.70113D 03  | 0.0          | 0.0          | 0.0          |
|    | -2.60603D 00 | 0.0          | -4.49992D 02 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | -2.05134D 01 | 0.0          | -1.03682D 02 | 0.0          | 1.56452D 02  | 0.0          |
|    | -1.22614D 02 | 0.0          | 5.14746D 03  | 0.0          | 1.56452D 02  | 0.0          |
|    | 3.49222D-03  | 0.0          | 1.82039D-02  | 0.0          | -3.74394D-03 | 0.0          |
| 10 | -1.07752D 02 | 0.0          | 6.17426D 03  | 0.0          | 0.0          | 0.0          |
|    | 1.11310D 02  | 0.0          | 1.74452D 04  | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | -5.83230D 01 | 0.0          | -1.06246D 02 | 0.0          | 4.04271D 02  | 0.0          |
|    | -5.47649D 01 | 0.0          | 2.35133D 04  | 0.0          | 4.04271D 02  | 0.0          |
|    | 9.33475D-03  | 0.0          | 1.72652D-02  | 0.0          | -3.74394D-03 | 0.0          |
| 11 | -1.68743D 02 | 0.0          | 9.66913D 03  | 0.0          | 0.0          | 0.0          |
|    | 3.38858D 01  | 1.03215D 02  | -1.54188D 04 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 1.11732D 02  | 0.0          | -2.10821D 02 | 1.45761D 01  | 5.18873D 02  | -6.20855D 00 |
|    | -2.31254D 01 | 1.03215D 02  | -5.96051D 03 | 1.45761D 01  | 5.18873D 02  | -6.20855D 00 |
|    | -1.15058D-02 | 1.52548D-04  | 2.18250D-02  | -2.09868D-06 | -3.74386D-03 | 2.50617D-05  |
| 12 | -1.75636D 02 | 0.0          | 1.00641D 04  | 0.0          | 0.0          | 0.0          |
|    | 1.87699D 02  | 3.68310D 02  | -2.81852D 04 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 1.01418D 02  | 0.0          | -2.18823D 02 | 2.28770D 01  | 4.59233D 02  | -9.48550D 00 |
|    | 1.13481D 02  | 3.68310D 02  | -1.83399D 04 | 2.28770D 01  | 4.59233D 02  | -9.48550D 00 |
|    | -9.93049D-03 | 2.94185D-04  | 2.18044D-02  | -3.49146D-06 | -3.74362D-03 | 4.89187D-05  |
| 13 | -9.22447D 01 | 0.0          | 5.28570D 03  | 0.0          | 0.0          | 0.0          |
|    | 2.19950D 02  | 4.79829D 02  | -2.13876D 04 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 3.97697D 01  | 0.0          | -1.13095D 02 | 1.26375D 01  | 1.97110D 02  | -5.44988D 00 |
|    | 1.67475D 02  | 4.79829D 02  | -1.62150D 04 | 1.26375D 01  | 1.97110D 02  | -5.44988D 00 |
|    | -7.30167D-03 | 4.93800D-04  | 2.14641D-02  | -6.29525D-06 | -3.74300D-03 | 8.39695D-05  |
| 14 | -6.55912D 01 | 0.0          | 3.75843D 03  | 0.0          | 0.0          | 0.0          |
|    | 1.29292D 02  | 4.57283D 02  | -1.78125D 04 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 1.73600D 01  | 0.0          | -7.94689D 01 | 8.37535D 00  | 9.67618D 01  | -4.35614D 00 |
|    | 8.10609D 01  | 4.57283D 02  | -1.41335D 04 | 8.37535D 00  | 9.67618D 01  | -4.35614D 00 |
|    | -4.46175D-03 | 5.67031D-04  | 2.11670D-02  | -1.98276D-05 | -3.74266D-03 | 9.60807D-05  |
| 15 | -2.69118D 01 | 0.0          | 1.54207D 03  | 0.0          | 0.0          | 0.0          |
|    | 5.60559D 01  | 1.06988D 02  | -6.23973D 03 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 4.26908D 00  | 0.0          | -3.22366D 01 | 1.41331D 00  | 3.37560D 01  | -9.25661D-01 |
|    | 3.34132D 01  | 1.06988D 02  | -4.72990D 03 | 1.41331D 00  | 3.37560D 01  | -9.25661D-01 |
|    | -2.57832D-03 | 3.71434D-04  | 2.09226D-02  | -1.84388D-05 | -3.74335D-03 | 6.41825D-05  |
| 16 | -9.42252D 01 | 0.0          | 5.39918D 03  | 0.0          | 0.0          | 0.0          |
|    | -5.60265D 00 | -2.05753D 01 | -2.69959D 02 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 7.49904D 01  | 0.0          | -1.19086D 02 | 2.41058D 02  | 9.62259D 01  | 9.97136D 03  |
|    | -2.48374D 01 | -2.05753D 01 | 5.01013D 03  | 2.41058D 02  | 9.62259D 01  | 9.97136D 03  |
|    | -1.44105D-02 | -8.69527D-04 | 2.16971D-02  | -2.03381D-04 | -3.72758D-03 | -2.84463D-04 |
| 17 | -8.98804D 01 | 0.0          | 5.15022D 03  | 0.0          | 0.0          | 0.0          |
|    | -5.13129D 00 | -1.64512D 01 | -2.57724D 02 | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 4.56499D 01  | 0.0          | -1.08347D 02 | 2.29263D 02  | 9.18382D 01  | 9.96840D 03  |

FIGURE 2-10. MISCELLANEOUS CALCULATED DATA (SHEET 4 OF 5)

|    |                                                                           |                                                |                                                                         |                                                                 |                                                                 |                                                                  |
|----|---------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------------|
|    | -4.93618D 01<br>-9.34166D-03                                              | -1.64512D 01<br>-7.76184D-04                   | 4.78414D 03<br>2.08112D-02                                              | 2.29263D 02<br>-2.21321D-04                                     | 9.18382D 01<br>-3.72978D-03                                     | 9.96840D 03<br>-2.38453D-04                                      |
| 18 | -3.35372D 01<br>0.0<br>0.0<br>1.97452D 01<br>-1.37920D 01<br>-1.02326D-02 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>1.29277D-04 | 1.92171D 03<br>0.0<br>0.0<br>-3.54470D 01<br>1.88626D 03<br>1.84649D-02 | 0.0<br>0.0<br>0.0<br>2.42191D-02<br>2.42191D-02<br>-2.09858D-06 | 0.0<br>0.0<br>0.0<br>5.99037D 00<br>5.99037D 00<br>-3.74386D-03 | 0.0<br>0.0<br>0.0<br>-1.68548D-02<br>-1.68548D-02<br>2.50486D-05 |
| 19 | -4.15289D 00<br>0.0<br>0.0<br>6.20994D 00<br>2.05705D 00<br>-2.60384D-02  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0         | 2.37964D 02<br>0.0<br>0.0<br>-5.74830D 00<br>2.32215D 02<br>2.42105D-02 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                          | 0.0<br>0.0<br>0.0<br>1.12318D 00<br>1.12318D 00<br>-3.74394D-03 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                           |
| 20 | -1.74491D 01<br>0.0<br>0.0<br>2.40667D 01<br>6.61759D 00<br>-2.39509D-02  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0         | 9.99848D 02<br>0.0<br>0.0<br>-2.79347D 01<br>9.71913D 02<br>2.80341D-02 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                          | 0.0<br>0.0<br>0.0<br>3.74394D 00<br>3.74394D 00<br>-3.74394D-03 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                           |
| 21 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                                    | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0         | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                                  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                          | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                          | 0.0<br>0.0<br>0.0<br>0.0<br>0.0<br>0.0                           |

FIGURE 2-10. MISCELLANEOUS CALCULATED DATA (SHEET 5 OF 5)

NASTRAN EXECUTIVE CONTROL DECK ECHO

ID MAGAMON,D7612  
SOL 24  
DIAG 8  
CEND

\*\*\* USER WARNING MESSAGE 4519, A TIME CARD IS MISSING. DEFAULT TIME LIMIT IS ONE MINUTE.

2-131

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

AUGUST 3, 1984 MSC/NASTRAN 8/ 1/83 PAGE 2

INITIAL CONDITION STATIC SOLUTION

| CARD<br>COUNT | CASE CONTROL DECK ECHO                                           |
|---------------|------------------------------------------------------------------|
| 1             | TITLE=LT.SAMPLE.DATA                                             |
| 2             | SUBTITLE=21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL |
| 3             | LABEL=INITIAL CONDITION STATIC SOLUTION                          |
| 4             | LOAD=10                                                          |
| 5             | ECHO=BOTH                                                        |
| 6             | OUTPUT                                                           |
| 7             | DISPLACEMENT(PRINT,PUNCH)=ALL                                    |
| 8             | SPCFORCES=ALL                                                    |
| 9             | ELFORCE=ALL                                                      |
| 10            | GPFORCE=ALL                                                      |
| 11            | ESE=ALL                                                          |
| 12            | OLOAD=ALL                                                        |
| 13            | BEGIN BULK                                                       |

2-132

INITIAL CONDITION STATIC SOLUTION

```

      INPUT BULK DATA DECK ECHO
      . 1 .. 2 .. 3 .. 4 .. 5 .. 6 .. 7 .. 8 .. 9 .. 10 .
      $
      $ KRAH MASS POINTS CONVERTED TO NASTRAN GRID CARDS
      $
      GRID*      100                      198.9691085700      0.0      * 100G
      * 100G 219.0072894000                      246
      GRID*      200                      299.9715105900      0.0      * 200G
      * 200G 217.9331623000                      246
      GRID*      300                      459.9920437930      0.0      * 300G
      * 300G 208.2776436000                      246
      GRID*      400                      619.9961184340      0.0      * 400G
      * 400G 205.8532906000                      246
      GRID*      500                      820.0000000000      0.0      * 500G
      * 500G 200.2000000000                      123456
      GRID*      600                      960.0003900044      0.0      * 600G
      * 600G 212.2604349000                      246
      GRID*      700                      1039.9825895500      0.0      * 700G
      * 700G 207.5775777000                      246
      GRID*      800                      1200.0196003700      0.0      * 800G
      * 800G 224.2425320000                      246
      GRID*      900                      1360.0623369000      0.0      * 900G
      * 900G 258.3539810000                      246
      GRID*     1000                      1570.4121330000      0.0      * 1000G
      * 1000G 299.3524450000                      246
      GRID*     1100                      801.2762329200 -118.3620482900* 1100G
      * 1100G 188.7549811000                      0
      GRID*     1200                      852.0816817000 -271.7586170000* 1200G
      * 1200G 205.4417780000                      0
      GRID*     1300                      942.8991904000 -430.3945420000* 1300G
      * 1300G 226.0702350000                      0
      GRID*     1400                      1044.4314080000 -582.8600137000* 1400G
      * 1400G 254.3458500000                      0
      GRID*     1500                      1110.1047930000 -740.1657271000* 1500G
      * 1500G 269.6958900000                      0
      GRID*     1600                      719.0791973500 -321.8893812000* 1600G
      * 1600G 167.7378190000                      0
      GRID*     1700                      902.1047448000 -551.6346446100* 1700G
      * 1700G 196.9346760000                      0
      GRID*     1800                      887.1832870000 -132.3628592000* 1800G
      * 1800G 91.3225001000                      0
      GRID*     1900                      279.2696309000      0.0      * 1900G
      * 1900G 84.1201432000                      246
      GRID*     2000                      299.9019012500      0.0      * 2000G
      * 2000G 237.8378928000                      246
      GRID*     2100                      299.9269427700      0.0      * 2100G
      * 2100G 237.9330628000                      0
      $
      $ KRAH MASSLESS NODE POINTS CONVERTED TO NASTRAN GRIDS
      $
      GRID*      501                      775.1000000000 -48.0000000000* 501G
      * 501G 181.0000000000                      0
  
```

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 1 OF 11)

INITIAL CONDITION STATIC SOLUTION

INPUT BULK DATA DECK ECHO

|         | 1              | 2 | 3 | 4 | 5 | 6               | 7 | 8                | 9 | 10     |
|---------|----------------|---|---|---|---|-----------------|---|------------------|---|--------|
| GRID*   | 1101           |   |   |   |   | 773.8807694600  |   | -118.3604807600* |   | 1101G  |
| * 1101G | 186.6946611000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1102           |   |   |   |   | 886.9870388800  |   | -131.7657883000* |   | 1102G  |
| * 1102G | 180.4333756000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1103           |   |   |   |   | 886.9870388800  |   | -131.7657883000* |   | 1103G  |
| * 1103G | 180.4333756000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1201           |   |   |   |   | 811.5560511000  |   | -321.5615706000* |   | 1201G  |
| * 1201G | 202.3218480000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1401           |   |   |   |   | 993.4773320000  |   | -551.3099517000* |   | 1401G  |
| * 1401G | 230.1605510000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1501           |   |   |   |   | 1145.4453490000 |   | -740.2282724000* |   | 1501G  |
| * 1501G | 276.2174300000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1502           |   |   |   |   | 1110.1047930000 |   | -740.1657271000* |   | 1502G  |
| * 1502G | 269.6958900000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1601           |   |   |   |   | 735.4614452000  |   | -321.4752190000* |   | 1601G  |
| * 1601G | 201.6861040000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1602           |   |   |   |   | 719.0791973500  |   | -321.8893812000* |   | 1602G  |
| * 1602G | 167.7378190000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 1701           |   |   |   |   | 917.3858480000  |   | -550.9002126000* |   | 1701G  |
| * 1701G | 229.4678850000 |   |   |   |   |                 | 0 |                  |   |        |
| GRID*   | 201            |   |   |   |   | 279.1302763000  |   | 0.0              |   | * 201G |
| * 201G  | 146.6867195000 |   |   |   |   |                 | 0 |                  |   |        |

\$ KRAH MASS POINT/NODE POINTS CONVERTED TO RBAR ELEMENTS

|         | 501  | 500  | 501  | 123456 | 123456 |
|---------|------|------|------|--------|--------|
| RBAR    | 501  | 500  | 501  | 123456 | 123456 |
| PLOTTEL | 501  | 500  | 501  | 123456 | 123456 |
| RBAR    | 1101 | 1100 | 1101 | 123456 | 123456 |
| PLOTTEL | 1101 | 1100 | 1101 | 123456 | 123456 |
| RBAR    | 1102 | 1100 | 1102 | 123456 | 123456 |
| PLOTTEL | 1102 | 1100 | 1102 | 123456 | 123456 |
| RBAR    | 1103 | 1100 | 1103 | 123456 | 123456 |
| PLOTTEL | 1103 | 1100 | 1103 | 123456 | 123456 |
| RBAR    | 1201 | 1200 | 1201 | 123456 | 123456 |
| PLOTTEL | 1201 | 1200 | 1201 | 123456 | 123456 |
| RBAR    | 1401 | 1400 | 1401 | 123456 | 123456 |
| PLOTTEL | 1401 | 1400 | 1401 | 123456 | 123456 |
| RBAR    | 1501 | 1500 | 1501 | 123456 | 123456 |
| PLOTTEL | 1501 | 1500 | 1501 | 123456 | 123456 |
| RBAR    | 1502 | 1500 | 1502 | 123456 | 123456 |
| PLOTTEL | 1502 | 1500 | 1502 | 123456 | 123456 |
| RBAR    | 1601 | 1600 | 1601 | 123456 | 123456 |
| PLOTTEL | 1601 | 1600 | 1601 | 123456 | 123456 |
| RBAR    | 1602 | 1600 | 1602 | 123456 | 123456 |
| PLOTTEL | 1602 | 1600 | 1602 | 123456 | 123456 |
| RBAR    | 1701 | 1700 | 1701 | 123456 | 123456 |
| PLOTTEL | 1701 | 1700 | 1701 | 123456 | 123456 |
| RBAR    | 201  | 200  | 201  | 123456 | 123456 |
| PLOTTEL | 201  | 200  | 201  | 123456 | 123456 |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 2 OF 11)

INITIAL CONDITION STATIC SOLUTION

INPUT BULK DATA DECK ECHO

```

. 1 .. 2 .. 3 .. 4 .. 5 .. 6 .. 7 .. 8 .. 9 .. 10 .
$ KRAH MASS POINTS CONVERTED TO NASTRAN CONM2 CARDS
$
CONM2      100      100      2.053      WT 100
+WT 100  5757.      0. 20000.      0.      0. 7500.
CONM2      200      200      11.742      WT 200
+WT 200  44540.      0. 150000.      0.      0. 49500.
CONM2      300      300      19.842      WT 300
+WT 300  81390.      0. 48468.      0.      0. 51545.
CONM2      400      400      16.964      WT 400
+WT 400  98135.      0. 33358.      0.      0. 39695.
CONM2      500      500      28.177      WT 500
+WT 500  245530.      0. 62835.      0.      0. 73255.
CONM2      600      600      10.235      WT 600
+WT 600  40692.      0. 60000.      0.      0. 100000.
CONM2      700      700      11.905      WT 700
+WT 700  43768.      0. 70000.      0.      0. 100000.
CONM2      800      800      12.874      WT 800
+WT 800  44049.      0. 90000.      0.      0. 150000.
CONM2      900      900      7.386      WT 900
+WT 900  48125.      0. 20894.      0.      0. 13020.
CONM2     1000     1000      7.999      WT 1000
+WT 1000 107650.      0. 53990.      0.      0. 79315.
CONM2     1100     1100      25.053      WT 1100
+WT 1100 15213.      0. 138580.      0.      0. 360000.
CONM2     1200     1200      26.077      WT 1200
+WT 1200 19510.      0. 122630.      0.      0. 300000.
CONM2     1300     1300      13.696      WT 1300
+WT 1300  7272.      0. 52619.      0.      0. 110000.
CONM2     1400     1400      9.738      WT 1400
+WT 1400  4408.      0. 25823.      0.      0. 60000.
CONM2     1500     1500      3.996      WT 1500
+WT 1500 1671.      0. 9014.      0.      0. 18000.
CONM2     1600     1600      13.990      WT 1600
+WT 1600 3652.      0. 25746.      0.      0. 29375.
CONM2     1700     1700      13.345      WT 1700
+WT 1700 3712.      0. 24588.      0.      0. 28178.
CONM2     1800     1800      4.979      WT 1800
+WT 1800  371.      0. 1600.      0.      0. 2000.
CONM2     1900     1900      0.308      WT 1900
+WT 1900  12.      0. 150.      0.      0. 250.
CONM2     2000     2000      1.295      WT 2000
+WT 2000  500.      0. 500.      0.      0. 500.
CONM2     2100     2100      1.295      WT 2100
+WT 2100  500.      0. 500.      0.      0. 500.
$
$ KRAH SYMMETRIC MODEL BOUNDARY POINTS CONVERTED TO NASTRAN GROUNDED GRIDS
$
GRID*      1199      852.0816817000      0.0      * 1199G
* 1199G  205.4417780000      246
GRID*      1499      1110.1047930000      0.0      * 1499G

```

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 3 OF 11)

```

      INPUT BULK DATA DECK ECHO
      1 .. 2 .. 3 .. 4 .. 5 .. 6 .. 7 .. 8 .. 9 .. 10 .
* 1499G 269.6958900000                                246
GRID* 1498                                1110.1047930000 0.0 * 1498G
* 1498G 269.6958900000                                246
$
$      KRASH BEAM ELEMENTS CONVERTED TO NASTRAN CBAR, PBAR, AND MAT1 CAROS
$
CBAR* 1000                                1000                                100                                200 * 1000S
* 1000S 0.0                                -1.00000000000000 0.0 * 1000T
* 1000T * 1000U
* 1000U
PBAR* 1000                                1000                                16.00000000 18500.00000000* 1000A
* 1000A 31000.00000000 49500.00000000
MAT1* 1000                                10000000.00 3800000.00 * 1000B
* 1000B * 1000C
* 1000C 35000.000 34000.000 17000.000
$
CBAR* 2000                                2000                                200                                300 * 2000S
* 2000S 0.0                                -1.00000000000000 0.0 * 2000T
* 2000T * 2000U
* 2000U
PBAR* 2000                                2000                                18.00000000 21500.00000000* 2000A
* 2000A 38500.00000000 60000.00000000
MAT1* 2000                                10000000.00 3800000.00 * 2000B
* 2000B * 2000C
* 2000C 35000.000 34000.000 17000.000
$
CBAR* 3000                                3000                                300                                400 * 3000S
* 3000S 0.0                                -1.00000000000000 0.0 * 3000T
* 3000T * 3000U
* 3000U
PBAR* 3000                                3000                                18.00000000 21500.00000000* 3000A
* 3000A 43000.00000000 64500.00000000
MAT1* 3000                                10000000.00 3800000.00 * 3000B
* 3000B * 3000C
* 3000C 35000.000 34000.000 17000.000
$
CBAR* 4000                                4000                                400                                500 * 4000S
* 4000S 0.0                                -1.00000000000000 0.0 * 4000T
* 4000T * 4000U
* 4000U
PBAR* 4000                                4000                                29.50000000 23250.00000000* 4000A
* 4000A 68000.00000000 91250.00000000
MAT1* 4000                                10000000.00 3800000.00 * 4000B
* 4000B * 4000C
* 4000C 35000.000 34000.000 17000.000
$
CBAR* 5000                                5000                                500                                600 * 5000S
* 5000S 0.0                                -1.00000000000000 0.0 * 5000T
* 5000T * 5000U
* 5000U

```

2-136

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 4 OF 11)

| INPUT BULK DATA DECK ECHO |                 |      |                 |             |             |            |                 |   |          |
|---------------------------|-----------------|------|-----------------|-------------|-------------|------------|-----------------|---|----------|
| 1                         | 2               | 3    | 4               | 5           | 6           | 7          | 8               | 9 | 10       |
| PBAR*                     |                 | 5000 |                 | 5000        | 29.50000000 |            | 23250.00000000* |   | 5000A    |
| * 5000A                   | 58000.00000000  |      | 81250.00000000  |             |             |            |                 |   |          |
| MAT1*                     |                 | 5000 |                 | 10000000.00 |             | 3800000.00 |                 |   | * 5000B  |
| * 5000B                   |                 |      |                 |             |             |            | 0.100000000000* |   | 5000C    |
| * 5000C                   | 35000.000       |      | 34000.000       |             | 17000.000   |            |                 |   |          |
| \$                        |                 |      |                 |             |             |            |                 |   |          |
| CBAR*                     | 6000            |      | 6000            |             | 600         |            | 700             |   | * 6000S  |
| * 6000S                   | 0.0             |      | -1.000000000000 |             | 0.0         |            |                 |   | * 6000T  |
| * 6000T                   |                 |      |                 |             |             |            |                 |   | * 6000U  |
| * 6000U                   |                 |      |                 |             |             |            |                 |   |          |
| PBAR*                     |                 | 6000 |                 | 6000        | 28.50000000 |            | 28500.00000000* |   | 6000A    |
| * 6000A                   | 68000.00000000  |      | 96500.00000000  |             |             |            |                 |   |          |
| MAT1*                     |                 | 6000 |                 | 10000000.00 |             | 3800000.00 |                 |   | * 6000B  |
| * 6000B                   |                 |      |                 |             |             |            | 0.100000000000* |   | 6000C    |
| * 6000C                   | 35000.000       |      | 34000.000       |             | 17000.000   |            |                 |   |          |
| \$                        |                 |      |                 |             |             |            |                 |   |          |
| CBAR*                     | 7000            |      | 7000            |             | 700         |            | 800             |   | * 7000S  |
| * 7000S                   | 0.0             |      | -1.000000000000 |             | 0.0         |            |                 |   | * 7000T  |
| * 7000T                   |                 |      |                 |             |             |            |                 |   | * 7000U  |
| * 7000U                   |                 |      |                 |             |             |            |                 |   |          |
| PBAR*                     |                 | 7000 |                 | 7000        | 24.00000000 |            | 31000.00000000* |   | 7000A    |
| * 7000A                   | 57000.00000000  |      | 88000.00000000  |             |             |            |                 |   |          |
| MAT1*                     |                 | 7000 |                 | 10000000.00 |             | 3800000.00 |                 |   | * 7000B  |
| * 7000B                   |                 |      |                 |             |             |            | 0.100000000000* |   | 7000C    |
| * 7000C                   | 35000.000       |      | 34000.000       |             | 17000.000   |            |                 |   |          |
| \$                        |                 |      |                 |             |             |            |                 |   |          |
| CBAR*                     | 8000            |      | 8000            |             | 800         |            | 900             |   | * 8000S  |
| * 8000S                   | 0.0             |      | -1.000000000000 |             | 0.0         |            |                 |   | * 8000T  |
| * 8000T                   |                 |      |                 |             |             |            |                 |   | * 8000U  |
| * 8000U                   |                 |      |                 |             |             |            |                 |   |          |
| PBAR*                     |                 | 8000 |                 | 8000        | 18.50000000 |            | 16750.00000000* |   | 8000A    |
| * 8000A                   | 28000.00000000  |      | 44750.00000000  |             |             |            |                 |   |          |
| MAT1*                     |                 | 8000 |                 | 10000000.00 |             | 3800000.00 |                 |   | * 8000B  |
| * 8000B                   |                 |      |                 |             |             |            | 0.100000000000* |   | 8000C    |
| * 8000C                   | 35000.000       |      | 34000.000       |             | 17000.000   |            |                 |   |          |
| \$                        |                 |      |                 |             |             |            |                 |   |          |
| CBAR*                     | 9000            |      | 9000            |             | 900         |            | 1000            |   | * 9000S  |
| * 9000S                   | 0.0             |      | -1.000000000000 |             | 0.0         |            |                 |   | * 9000T  |
| * 9000T                   |                 |      |                 |             |             |            |                 |   | * 9000U  |
| * 9000U                   |                 |      |                 |             |             |            |                 |   |          |
| PBAR*                     |                 | 9000 |                 | 9000        | 12.50000000 |            | 4750.00000000*  |   | 9000A    |
| * 9000A                   | 45000.00000000  |      | 49750.00000000  |             |             |            |                 |   |          |
| MAT1*                     |                 | 9000 |                 | 10000000.00 |             | 3800000.00 |                 |   | * 9000B  |
| * 9000B                   |                 |      |                 |             |             |            | 0.100000000000* |   | 9000C    |
| * 9000C                   | 35000.000       |      | 34000.000       |             | 17000.000   |            |                 |   |          |
| \$                        |                 |      |                 |             |             |            |                 |   |          |
| CBAR*                     | 10000           |      | 10000           |             | 500         |            | 1101            |   | * 10000S |
| * 10000S                  | -0.931764722640 |      | 0.363062669031  |             | 0.0         |            |                 |   | * 10000T |
| * 10000T                  |                 |      |                 |             |             |            |                 |   | * 10000U |
| * 10000U                  |                 |      |                 |             |             |            |                 |   |          |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 5 OF 11)

INITIAL CONDITION STATIC SOLUTION

| INPUT BULK DATA DECK ECHO |                 |                 |             |                  |             |                  |                  |        |    |
|---------------------------|-----------------|-----------------|-------------|------------------|-------------|------------------|------------------|--------|----|
| 1                         | 2               | 3               | 4           | 5                | 6           | 7                | 8                | 9      | 10 |
| PBAR*                     | 10000           | 10000           | 10000       | 10000            | 54.00000000 | 114000.00000000* | 10000A           |        |    |
| * 10000A                  | 15900.00000000  | 48000.00000000  |             |                  |             |                  |                  |        |    |
| MAT1*                     | 10000           | 10000000.00     | 3800000.00  |                  |             |                  | * 10000B         |        |    |
| * 10000B                  |                 |                 |             |                  |             |                  | 0.1000000000000* | 10000C |    |
| * 10000C                  | 35000.000       | 34000.000       | 17000.000   |                  |             |                  |                  |        |    |
| \$                        |                 |                 |             |                  |             |                  |                  |        |    |
| CBAR*                     | 11000           | 11000           | 1101        | 1200             |             |                  | * 11000S         |        |    |
| * 11000S                  | -0.890910986066 | -0.454177955109 | 0.0         |                  |             |                  | * 11000T         |        |    |
| * 11000T                  |                 |                 |             |                  |             |                  | * 11000U         |        |    |
| * 11000U                  |                 |                 |             |                  |             |                  |                  |        |    |
| PBAR*                     | 11000           | 11000           | 63.20000000 | 102000.00000000* | 11000A      |                  |                  |        |    |
| * 11000A                  | 11400.00000000  | 26000.00000000  |             |                  |             |                  |                  |        |    |
| MAT1*                     | 11000           | 10000000.00     | 3800000.00  |                  |             |                  | * 11000B         |        |    |
| * 11000B                  |                 |                 |             |                  |             |                  | 0.1000000000000* | 11000C |    |
| * 11000C                  | 35000.000       | 34000.000       | 17000.000   |                  |             |                  |                  |        |    |
| \$                        |                 |                 |             |                  |             |                  |                  |        |    |
| CBAR*                     | 12000           | 12000           | 1200        | 1300             |             |                  | * 12000S         |        |    |
| * 12000S                  | -0.867845992474 | -0.496833305392 | 0.0         |                  |             |                  | * 12000T         |        |    |
| * 12000T                  |                 |                 |             |                  |             |                  | * 12000U         |        |    |
| * 12000U                  |                 |                 |             |                  |             |                  |                  |        |    |
| PBAR*                     | 12000           | 12000           | 56.30000000 | 58000.00000000*  | 12000A      |                  |                  |        |    |
| * 12000A                  | 4700.00000000   | 10000.00000000  |             |                  |             |                  |                  |        |    |
| MAT1*                     | 12000           | 10000000.00     | 3800000.00  |                  |             |                  | * 12000B         |        |    |
| * 12000B                  |                 |                 |             |                  |             |                  | 0.1000000000000* | 12000C |    |
| * 12000C                  | 35000.000       | 34000.000       | 17000.000   |                  |             |                  |                  |        |    |
| \$                        |                 |                 |             |                  |             |                  |                  |        |    |
| CBAR*                     | 13000           | 13000           | 1300        | 1400             |             |                  | * 13000S         |        |    |
| * 13000S                  | -0.832330947833 | -0.554278985060 | 0.0         |                  |             |                  | * 13000T         |        |    |
| * 13000T                  |                 |                 |             |                  |             |                  | * 13000U         |        |    |
| * 13000U                  |                 |                 |             |                  |             |                  |                  |        |    |
| PBAR*                     | 13000           | 13000           | 40.70000000 | 21000.00000000*  | 13000A      |                  |                  |        |    |
| * 13000A                  | 2000.00000000   | 4800.00000000   |             |                  |             |                  |                  |        |    |
| MAT1*                     | 13000           | 10000000.00     | 3800000.00  |                  |             |                  | * 13000B         |        |    |
| * 13000B                  |                 |                 |             |                  |             |                  | 0.1000000000000* | 13000C |    |
| * 13000C                  | 35000.000       | 34000.000       | 17000.000   |                  |             |                  |                  |        |    |
| \$                        |                 |                 |             |                  |             |                  |                  |        |    |
| CBAR*                     | 14000           | 14000           | 1400        | 1501             |             |                  | * 14000S         |        |    |
| * 14000S                  | -0.841546482505 | -0.540184707099 | 0.0         |                  |             |                  | * 14000T         |        |    |
| * 14000T                  |                 |                 |             |                  |             |                  | * 14000U         |        |    |
| * 14000U                  |                 |                 |             |                  |             |                  |                  |        |    |
| PBAR*                     | 14000           | 14000           | 20.00000000 | 8000.00000000*   | 14000A      |                  |                  |        |    |
| * 14000A                  | 1200.00000000   | 2700.00000000   |             |                  |             |                  |                  |        |    |
| MAT1*                     | 14000           | 10000000.00     | 3800000.00  |                  |             |                  | * 14000B         |        |    |
| * 14000B                  |                 |                 |             |                  |             |                  | 0.1000000000000* | 14000C |    |
| * 14000C                  | 35000.000       | 34000.000       | 17000.000   |                  |             |                  |                  |        |    |
| \$                        |                 |                 |             |                  |             |                  |                  |        |    |
| CBAR*                     | 15000           | 15000           | 1201        | 1601             |             |                  | * 15000S         |        |    |
| * 15000S                  | 0.001134791926  | 0.999999356123  | 0.0         |                  |             |                  | * 15000T         |        |    |
| * 15000T                  |                 |                 |             |                  |             |                  | * 15000U         |        |    |
| * 15000U                  |                 |                 |             |                  |             |                  |                  |        |    |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 6 OF 11)

INITIAL CONDITION STATIC SOLUTION

| INPUT BULK DATA DECK ECHO |                 |                 |                |               |        |   |   |   |          |
|---------------------------|-----------------|-----------------|----------------|---------------|--------|---|---|---|----------|
| 1                         | 2               | 3               | 4              | 5             | 6      | 7 | 8 | 9 | 10       |
| PBAR*                     | 15000           | 15000           | 8.00000000     | 100.00000000* | 15000A |   |   |   |          |
| * 15000A                  | 732.00000000    | 220.80000000    |                |               |        |   |   |   |          |
| MAT1*                     | 15000           | 10500000.00     | 4000000.00     |               |        |   |   |   | * 15000B |
| * 15000B                  |                 |                 |                |               |        |   |   |   | * 15000C |
| * 15000C                  | 47000.000       | 39000.000       | 22000.000      |               |        |   |   |   |          |
| \$                        |                 |                 |                |               |        |   |   |   |          |
| CBAR*                     | 16000           | 16000           | 1401           | 1701          |        |   |   |   | * 16000S |
| * 16000S                  | 0.005384743970  | 0.999985502161  | 0.0            |               |        |   |   |   | * 16000T |
| * 16000T                  |                 |                 |                |               |        |   |   |   | * 16000U |
| * 16000U                  |                 |                 |                |               |        |   |   |   |          |
| PBAR*                     | 16000           | 16000           | 8.00000000     | 100.00000000* | 16000A |   |   |   |          |
| * 16000A                  | 732.00000000    | 220.80000000    |                |               |        |   |   |   |          |
| MAT1*                     | 16000           | 10500000.00     | 4000000.00     |               |        |   |   |   | * 16000B |
| * 16000B                  |                 |                 |                |               |        |   |   |   | * 16000C |
| * 16000C                  | 47000.000       | 39000.000       | 22000.000      |               |        |   |   |   |          |
| \$                        |                 |                 |                |               |        |   |   |   |          |
| CBAR*                     | 17000           | 17000           | 1102           | 1800          |        |   |   |   | * 17000S |
| * 17000S                  | 0.0             | -0.999977553648 | 0.006700164201 |               |        |   |   |   | * 17000T |
| * 17000T                  |                 |                 |                |               |        |   |   |   | * 17000U |
| * 17000U                  |                 |                 |                |               |        |   |   |   |          |
| PBAR*                     | 17000           | 17000           | 0.29919509     | 239.00000000* | 17000A |   |   |   |          |
| * 17000A                  | 239.00000000    | 150.00000000    |                |               |        |   |   |   |          |
| MAT1*                     | 17000           | 30000000.00     | 11000000.00    |               |        |   |   |   | * 17000B |
| * 17000B                  |                 |                 |                |               |        |   |   |   | * 17000C |
| * 17000C                  | 75000.000       | 75000.000       | 37500.000      |               |        |   |   |   |          |
| \$                        |                 |                 |                |               |        |   |   |   |          |
| CBAR*                     | 18000           | 18000           | 1103           | 1800          |        |   |   |   | * 18000S |
| * 18000S                  | 0.0             | -0.999977553648 | 0.006700164201 |               |        |   |   |   | * 18000T |
| * 18000T                  |                 |                 |                |               |        |   |   |   | * 18000U |
| * 18000U                  |                 |                 |                |               |        |   |   |   |          |
| PBAR*                     | 18000           | 18000           | 0.01000000     | 239.00000000* | 18000A |   |   |   |          |
| * 18000A                  | 239.00000000    | 150.00000000    |                |               |        |   |   |   |          |
| MAT1*                     | 18000           | 30000000.00     | 11000000.00    |               |        |   |   |   | * 18000B |
| * 18000B                  |                 |                 |                |               |        |   |   |   | * 18000C |
| * 18000C                  | 75000.000       | 75000.000       | 37500.000      |               |        |   |   |   |          |
| \$                        |                 |                 |                |               |        |   |   |   |          |
| CBAR*                     | 19000           | 19000           | 201            | 1900          |        |   |   |   | * 19000S |
| * 19000S                  | 0.0             | -1.000000000000 | 0.0            |               |        |   |   |   | * 19000T |
| * 19000T                  |                 |                 |                |               |        |   |   |   | * 19000U |
| * 19000U                  |                 |                 |                |               |        |   |   |   |          |
| PBAR*                     | 19000           | 19000           | 0.05243324     | 16.25000000*  | 19000A |   |   |   |          |
| * 19000A                  | 16.25000000     | 2.50000000      |                |               |        |   |   |   |          |
| MAT1*                     | 19000           | 30000000.00     | 11000000.00    |               |        |   |   |   | * 19000B |
| * 19000B                  |                 |                 |                |               |        |   |   |   | * 19000C |
| * 19000C                  | 75000.000       | 75000.000       | 37500.000      |               |        |   |   |   |          |
| \$                        |                 |                 |                |               |        |   |   |   |          |
| CBAR*                     | 20000           | 20000           | 600            | 1200          |        |   |   |   | * 20000S |
| * 20000S                  | -0.929399243434 | 0.369075935688  | 0.0            |               |        |   |   |   | * 20000T |
| * 20000T                  |                 | 56              |                |               |        |   |   |   | * 20000U |
| * 20000U                  |                 |                 |                |               |        |   |   |   |          |

2-139

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 7 OF 11)

INPUT BULK DATA DECK ECHO

| 1        | 2                                       | 3   | 4              | 5      | 6           | 7 | 8                | 9        | 10       |
|----------|-----------------------------------------|-----|----------------|--------|-------------|---|------------------|----------|----------|
| PBAR*    | 20000                                   |     | 20000          |        | 40.70000000 |   | 21000.00000000*  | 20000A   |          |
| * 20000A | 2000.00000000                           |     | 4800.00000000  |        |             |   |                  |          |          |
| MAT1*    | 20000                                   |     | 10000000.00    |        | 3800000.00  |   |                  | * 20000B |          |
| * 20000B |                                         |     |                |        |             |   | 0.1000000000000* | 20000C   |          |
| * 20000C | 35000.000                               |     | 34000.000      |        | 17000.000   |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| CBAR*    | 21000                                   |     | 21000          |        | 900         |   | 1400             |          | * 21000S |
| * 21000S | -0.879345610002                         |     | 0.476184101131 |        | 0.0         |   |                  |          | * 21000T |
| * 21000T | 6                                       |     | 6              |        |             |   |                  |          | * 21000U |
| * 21000U |                                         |     |                |        |             |   |                  |          |          |
| PBAR*    | 21000                                   |     | 21000          |        | 40.70000000 |   | 21000.00000000*  | 21000A   |          |
| * 21000A | 2000.00000000                           |     | 4800.00000000  |        |             |   |                  |          |          |
| MAT1*    | 21000                                   |     | 10000000.00    |        | 3800000.00  |   |                  | * 21000B |          |
| * 21000B |                                         |     |                |        |             |   | 0.1000000000000* | 21000C   |          |
| * 21000C | 35000.000                               |     | 34000.000      |        | 17000.000   |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| CBAR*    | 22000                                   |     | 22000          |        | 1200        |   | 1199             |          | * 22000S |
| * 22000S | 1.000000000000                          |     | 0.000000000000 |        | 0.0         |   |                  |          | * 22000T |
| * 22000T |                                         |     |                |        |             |   |                  |          | * 22000U |
| * 22000U |                                         |     |                |        |             |   |                  |          |          |
| PBAR*    | 22000                                   |     | 22000          |        | 40.70000000 |   | 21000.00000000*  | 22000A   |          |
| * 22000A | 2000.00000000                           |     | 4800.00000000  |        |             |   |                  |          |          |
| MAT1*    | 22000                                   |     | 10000000.00    |        | 3800000.00  |   |                  | * 22000B |          |
| * 22000B |                                         |     |                |        |             |   | 0.1000000000000* | 22000C   |          |
| * 22000C | 35000.000                               |     | 34000.000      |        | 17000.000   |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| CBAR*    | 23000                                   |     | 23000          |        | 200         |   | 2000             |          | * 23000S |
| * 23000S | 0.0                                     |     | 1.000000000000 |        | 0.0         |   |                  |          | * 23000T |
| * 23000T |                                         |     |                |        |             |   |                  |          | * 23000U |
| * 23000U |                                         |     |                |        |             |   |                  |          |          |
| PBAR*    | 23000                                   |     | 23000          |        | 0.10178943  |   | 0.50000000*      | 23000A   |          |
| * 23000A | 0.50000000                              |     | 0.50000000     |        |             |   |                  |          |          |
| MAT1*    | 23000                                   |     | 1000000.00     |        | 400000.00   |   |                  | * 23000B |          |
| * 23000B |                                         |     |                |        |             |   | 0.632230474716*  | 23000C   |          |
| * 23000C | 16000.000                               |     | 16000.000      |        | 17000.000   |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| \$       | DRI MASSES CONNECTED WITH RBAR ELEMENTS |     |                |        |             |   |                  |          |          |
| \$       |                                         |     |                |        |             |   |                  |          |          |
| RBAR     | 24000                                   | 200 | 2100           | 123456 |             |   | 123456           |          |          |
| CBAR*    | 25000                                   |     | 25000          |        | 1500        |   | 1600             |          | * 25000S |
| * 25000S | 0.730502420322                          |     | 0.682910106752 |        | 0.0         |   |                  |          | * 25000T |
| * 25000T |                                         |     |                |        |             |   |                  |          | * 25000U |
| * 25000U |                                         |     |                |        |             |   |                  |          |          |
| PBAR*    | 25000                                   |     | 25000          |        | 0.0         |   | 0.0              |          | * 25000A |
| * 25000A | 0.0                                     |     | 0.0            |        |             |   |                  |          |          |
| MAT1*    | 25000                                   |     | 10000000.00    |        | 3800000.00  |   |                  |          |          |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 8 OF 11)

2-1.40

INPUT BULK DATA DECK ECHO

### MISCELLANEOUS CARDS

|       |     |      |    |      |
|-------|-----|------|----|------|
| EIGR  | 999 | MGIV | 40 | EIGR |
| +EIGR | MAX |      |    |      |

\$ FORCE AND MOMENT CARDS, BASED ON FNET CALCS

|         |              |             |                |     |         |
|---------|--------------|-------------|----------------|-----|---------|
| FORCE*  | 1            | 100         |                | 1.0 | * 1000M |
| * 1000M | -7.56785966  | 0.0         | -722.35195283  |     |         |
| MOMENT* | 2            | 100         |                | 1.0 | * 1000N |
| * 1000N | 0.0          | 74.8788473  | 0.0            |     |         |
| FORCE*  | 1            | 200         |                | 1.0 | * 2000M |
| * 2000M | -31.55523283 | 0.0         | -4095.0437198  |     |         |
| MOMENT* | 2            | 200         |                | 1.0 | * 2000N |
| * 2000N | 0.0          | 561.5913546 | 0.0            |     |         |
| FORCE*  | 1            | 300         |                | 1.0 | * 3000M |
| * 3000M | -22.99168396 | 0.0         | -6531.19035496 |     |         |
| MOMENT* | 2            | 300         |                | 1.0 | * 3000N |
| * 3000N | 0.0          | 181.4595265 | 0.0            |     |         |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 9 OF 11)

INITIAL CONDITION STATIC SOLUTION

| INPUT BULK DATA DECK ECHO |               |   |              |   |                 |   |     |   |        |
|---------------------------|---------------|---|--------------|---|-----------------|---|-----|---|--------|
| 1                         | 2             | 3 | 4            | 5 | 6               | 7 | 8   | 9 | 10     |
| FORCE*                    | 1             |   | 400          |   |                 |   | 1.0 | * | 4000M  |
| * 4000M                   | 5.84772882    |   | 0.0          |   | -4032.34379398  |   |     |   |        |
| MOMENT*                   | 2             |   | 400          |   |                 |   | 1.0 | * | 4000N  |
| * 4000N                   | 0.0           |   | 124.8885574  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 500          |   |                 |   | 1.0 | * | 5000M  |
| * 5000M                   | 70.60230249   |   | 0.0          |   | -6685.78934577  |   |     |   |        |
| MOMENT*                   | 2             |   | 500          |   |                 |   | 1.0 | * | 5000N  |
| * 5000N                   | 0.0           |   | 235.2506184  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 600          |   |                 |   | 1.0 | * | 6000M  |
| * 6000M                   | 42.33434369   |   | 0.0          |   | -2872.19975973  |   |     |   |        |
| MOMENT*                   | 2             |   | 600          |   |                 |   | 1.0 | * | 6000N  |
| * 6000N                   | 0.0           |   | 224.6365418  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 700          |   |                 |   | 1.0 | * | 7000M  |
| * 7000M                   | 59.41232873   |   | 0.0          |   | -3344.87377537  |   |     |   |        |
| MOMENT*                   | 2             |   | 700          |   |                 |   | 1.0 | * | 7000N  |
| * 7000N                   | 0.0           |   | 262.0759655  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 800          |   |                 |   | 1.0 | * | 8000M  |
| * 8000M                   | 83.87946652   |   | 0.0          |   | -4482.06723327  |   |     |   |        |
| MOMENT*                   | 2             |   | 800          |   |                 |   | 1.0 | * | 8000N  |
| * 8000N                   | 0.0           |   | 336.9548127  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 900          |   |                 |   | 1.0 | * | 9000M  |
| * 9000M                   | 61.30714759   |   | 0.0          |   | -2573.72885512  |   |     |   |        |
| MOMENT*                   | 2             |   | 900          |   |                 |   | 1.0 | * | 9000N  |
| * 9000N                   | 0.0           |   | 78.2259318   |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 1000         |   |                 |   | 1.0 | * | 10000M |
| * 10000M                  | 27.38244991   |   | 0.0          |   | -11756.62817664 |   |     |   |        |
| MOMENT*                   | 2             |   | 1000         |   |                 |   | 1.0 | * | 10000N |
| * 10000N                  | 0.0           |   | 202.1354482  |   | 0.0             |   |     |   |        |
| FORCE*                    | 1             |   | 1100         |   |                 |   | 1.0 | * | 11000M |
| * 11000M                  | 23.12541991   |   | 103.21494745 |   | 5960.50952114   |   |     |   |        |
| MOMENT*                   | 2             |   | 1100         |   |                 |   | 1.0 | * | 11000N |
| * 11000N                  | -14.5761285   |   | 518.8725333  |   | 6.2085507       |   |     |   |        |
| FORCE*                    | 1             |   | 1200         |   |                 |   | 1.0 | * | 12000M |
| * 12000M                  | -113.48138880 |   | 368.30966802 |   | 18339.92339842  |   |     |   |        |
| MOMENT*                   | 2             |   | 1200         |   |                 |   | 1.0 | * | 12000N |
| * 12000N                  | -22.8769999   |   | 459.2326870  |   | 9.4854969       |   |     |   |        |
| FORCE*                    | 1             |   | 1300         |   |                 |   | 1.0 | * | 13000M |
| * 13000M                  | -167.47482007 |   | 479.82881212 |   | 16214.98538780  |   |     |   |        |
| MOMENT*                   | 2             |   | 1300         |   |                 |   | 1.0 | * | 13000N |
| * 13000N                  | -12.6374941   |   | 197.1100875  |   | 5.4498769       |   |     |   |        |
| FORCE*                    | 1             |   | 1400         |   |                 |   | 1.0 | * | 14000M |
| * 14000M                  | -81.06087995  |   | 457.28347940 |   | 14133.50024522  |   |     |   |        |
| MOMENT*                   | 2             |   | 1400         |   |                 |   | 1.0 | * | 14000N |
| * 14000N                  | -8.3753450    |   | 96.7618458   |   | 4.3561419       |   |     |   |        |
| FORCE*                    | 1             |   | 1500         |   |                 |   | 1.0 | * | 15000M |
| * 15000M                  | -33.41324906  |   | 106.98780051 |   | 4729.90095725   |   |     |   |        |
| MOMENT*                   | 2             |   | 1500         |   |                 |   | 1.0 | * | 15000N |
| * 15000N                  | -1.4133070    |   | 33.7559939   |   | 0.9256609       |   |     |   |        |
| FORCE*                    | 1             |   | 1600         |   |                 |   | 1.0 | * | 16000M |
| * 16000M                  | 24.83744530   |   | -20.57526086 |   | -5010.13312244  |   |     |   |        |

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 10 OF 11)

INITIAL CONDITION STATIC SOLUTION

| INPUT BULK DATA DECK ECHO |              |      |              |      |                |      |      |      |          |
|---------------------------|--------------|------|--------------|------|----------------|------|------|------|----------|
| 1 ..                      | 2 ..         | 3 .. | 4 ..         | 5 .. | 6 ..           | 7 .. | 8 .. | 9 .. | 10 ..    |
| MOMENT*                   | 2            |      | 1600         |      |                |      | 1.0  |      | * 16000N |
| * 16000N                  | -241.0580577 |      | 96.2258635   |      | -9971.3569011  |      |      |      |          |
| FORCE*                    | 1            |      | 1700         |      |                |      | 1.0  |      | * 17000M |
| * 17000M                  | 49.36181777  |      | -16.45123705 |      | -4784.14479814 |      |      |      |          |
| MOMENT*                   | 2            |      | 1700         |      |                |      | 1.0  |      | * 17000N |
| * 17000N                  | -229.2633806 |      | 91.8381949   |      | -9968.4049129  |      |      |      |          |
| FORCE*                    | 1            |      | 1800         |      |                |      | 1.0  |      | * 18000M |
| * 18000M                  | 13.79198437  |      | 0.0          |      | -1886.26038382 |      |      |      |          |
| MOMENT*                   | 2            |      | 1800         |      |                |      | 1.0  |      | * 18000N |
| * 18000N                  | -0.0242191   |      | 5.9903734    |      | 0.0168548      |      |      |      |          |
| FORCE*                    | 1            |      | 1900         |      |                |      | 1.0  |      | * 19000M |
| * 19000M                  | -1.02852487  |      | 0.0          |      | -116.10773109  |      |      |      |          |
| MOMENT*                   | 2            |      | 1900         |      |                |      | 1.0  |      | * 19000N |
| * 19000N                  | 0.0          |      | 0.5615914    |      | 0.0            |      |      |      |          |
| FORCE*                    | 1            |      | 2000         |      |                |      | 1.0  |      | * 20000M |
| * 20000M                  | -3.30879590  |      | 0.0          |      | -485.95650668  |      |      |      |          |
| MOMENT*                   | 2            |      | 2000         |      |                |      | 1.0  |      | * 20000N |
| * 20000N                  | 0.0          |      | 1.8719712    |      | 0.0            |      |      |      |          |
| FORCE1*                   | 3            |      | 1102         |      | 10116.00000000 |      | 1800 |      | * 1000P  |
| * 1000P                   | 1102         |      |              |      |                |      |      |      |          |
| FORCE1*                   | 3            |      | 1800         |      | 10116.00000000 |      | 1102 |      | * 1000Q  |
| * 1000Q                   | 1800         |      |              |      |                |      |      |      |          |
| FORCE1*                   | 3            |      | 201          |      | 1565.50000000  |      | 1900 |      | * 2000P  |
| * 2000P                   | 201          |      |              |      |                |      |      |      |          |
| FORCE1*                   | 3            |      | 1900         |      | 1565.50000000  |      | 201  |      | * 2000Q  |
| * 2000Q                   | 1900         |      |              |      |                |      |      |      |          |
| FORCE1*                   | 3            |      | 1502         |      | 40531.463295   |      | 1502 |      | * 28000D |
| * 28000D                  | 1498         |      |              |      |                |      |      |      |          |
| FORCE1*                   | 3            |      | 1498         |      | 40531.463295   |      | 1498 |      | * 28000E |
| * 28000E                  | 1502         |      |              |      |                |      |      |      |          |
| \$                        |              |      |              |      |                |      |      |      |          |
| LOAD                      | 10           | 1.0  | 1.0          | 1    | 1.0            | 2    | 1.0  | 3    |          |
| \$                        |              |      |              |      |                |      |      |      |          |
| \$                        |              |      |              |      |                |      |      |      |          |
| \$                        |              |      |              |      |                |      |      |      |          |
| ENDDATA                   |              |      |              |      |                |      |      |      |          |

INPUT BULK DATA CARD COUNT = 536

FIGURE 2-12. MSC/NASTRAN INPUT BULK DATA DECK ECHO (SHEET 11 OF 11)

input data set, using the following NASTRAN elements.

- GRID points
- CBAR bar elements (with PBAR properties and MAT1 materials)
- RBAR rigid bar elements
- FORCE and MOMENT cards for applied loads

Although only a linear model is formed, the following KRASH85 nonlinearities are included in the NASTRAN model:

- Oleo beam elements (initial position must be fully extended)
- Unsymmetrical beam elements

A nonlinear KRASH model is acceptable (KR tables), as long as the initial conditions are in the linear region. The executive and case control decks, plus the bulk data deck, are all contained in data set XYZ.NASBLK.DATA, which is generated automatically by program KRASHIC.

#### 2.3.2.4 Sorted Bulk Data Deck Echo

This is just an alphabetically sorted version of the bulk data deck shown in figure 2-12. The last page of this is shown in figure 2-13. The EPSILON value shown is a measure of the error in the static solution. Any value less than E-7 is acceptable. Generally speaking, any significant error in the model will result in a very large value for EPSILON ( $>0.1$ ) or will cause the NASTRAN solution to terminate with an error message.

#### 2.3.2.5 Displacement Vector

Figure 2-14 shows a sample of the displacement vector output. These data represent the desired solution. The three translations and rotations at each grid point in the NASTRAN model are shown. The sign convention for these displacements/rotations within the NASTRAN model is as follows:

- T1      Positive deflection aft, inches
- T2      Positive deflection right, inches

- T3     Positive deflection up, inches
- R1     Positive rotation left wing down, radians
- R2     Positive rotation nose up, radians
- R3     Positive rotation nose left, radians

All deflections/rotations are measured in an axis system that is parallel to the c.g. coordinate system defined in Section 2.2.

The grid point identifications within NASTRAN are related to the KRASH85 mass and mode points as follows:

Node point (I, M) becomes grid point  $(100 \times I + M)$  e.g. Node point 11, 2 becomes grid point 1102. Mass point 5 becomes grid point 500.

In figure 2-14, grid points 1199, 1498 and 1499 do not correspond to any node points in the KRASH model. In the KRASH model there are two transverse beams attached to mass 15 and one to mass 12; i.e., beams which connect laterally between mass 15 (and 12) and a phantom (unnumbered) point at the same location on the opposite side of the airplane. For these lateral beams, a grid point on the airplane plane of symmetry ( $y = 0$ ) is established in the NASTRAN model in order to constrain the deflections of lateral beams. Grid points 1199, 1498, and 1499 are all such constrained grid points.

The deflections and rotations for grid point 500 (mass point 5) are all zero. This is because mass point 5 was specified by the user to be the constraint point in the model. This was done by inputting NBAL = 5 on card 60 of the input format (figure 2-3). This can be seen on card sequence number 90 in the input data echo for this sample case (figure 2-8).

#### 2.3.2.6 Load Vector

Figure 2-15 shows the vector of applied loads for the sample case. These are the NASTRAN input net loads generated by KRASHIC in subroutine NETFOR. The sign convention for these loads is the same as for the displacements, as defined in the previous section. The loads shown for grid points 201, 1102, 1498 and 1502 are the result of using FORCE1 type cards in the

INITIAL CONDITION STATIC SOLUTION

S O R T E D   B U L K   D A T A   E C H O

| CARD<br>COUNT    | 1        | 2             | 3    | 4             | 5      | 6           | 7 | 8             | 9 | 10       |
|------------------|----------|---------------|------|---------------|--------|-------------|---|---------------|---|----------|
| 451-             | PBAR     | *28000        |      | 28000         |        | 20.00000000 |   | 8000.00000000 |   | * 28000A |
| 452-             | * 28000A | 1200.00000000 |      | 2700.00000000 |        |             |   |               |   |          |
| 453-             | PLOTEL   | 201           | 200  | 201           |        |             |   |               |   |          |
| 454-             | PLOTEL   | 501           | 500  | 501           |        |             |   |               |   |          |
| 455-             | PLOTEL   | 1101          | 1100 | 1101          |        |             |   |               |   |          |
| 456-             | PLOTEL   | 1102          | 1100 | 1102          |        |             |   |               |   |          |
| 457-             | PLOTEL   | 1103          | 1100 | 1103          |        |             |   |               |   |          |
| 458-             | PLOTEL   | 1201          | 1200 | 1201          |        |             |   |               |   |          |
| 459-             | PLOTEL   | 1401          | 1400 | 1401          |        |             |   |               |   |          |
| 460-             | PLOTEL   | 1501          | 1500 | 1501          |        |             |   |               |   |          |
| 461-             | PLOTEL   | 1502          | 1500 | 1502          |        |             |   |               |   |          |
| 462-             | PLOTEL   | 1601          | 1600 | 1601          |        |             |   |               |   |          |
| 463-             | PLOTEL   | 1602          | 1600 | 1602          |        |             |   |               |   |          |
| 464-             | PLOTEL   | 1701          | 1700 | 1701          |        |             |   |               |   |          |
| 465-             | RBAR     | 201           | 200  | 201           | 123456 |             |   | 123456        |   |          |
| 466-             | RBAR     | 501           | 500  | 501           | 123456 |             |   | 123456        |   |          |
| 467-             | RBAR     | 1101          | 1100 | 1101          | 123456 |             |   | 123456        |   |          |
| 468-             | RBAR     | 1102          | 1100 | 1102          | 123456 |             |   | 123456        |   |          |
| 469-             | RBAR     | 1103          | 1100 | 1103          | 123456 |             |   | 123456        |   |          |
| 470-             | RBAR     | 1201          | 1200 | 1201          | 123456 |             |   | 123456        |   |          |
| 471-             | RBAR     | 1401          | 1400 | 1401          | 123456 |             |   | 123456        |   |          |
| 472-             | RBAR     | 1501          | 1500 | 1501          | 123456 |             |   | 123456        |   |          |
| 473-             | RBAR     | 1502          | 1500 | 1502          | 123456 |             |   | 123456        |   |          |
| 474-             | RBAR     | 1601          | 1600 | 1601          | 123456 |             |   | 123456        |   |          |
| 475-             | RBAR     | 1602          | 1600 | 1602          | 123456 |             |   | 123456        |   |          |
| 476-             | RBAR     | 1701          | 1700 | 1701          | 123456 |             |   | 123456        |   |          |
| 477-             | RBAR     | 24000         | 200  | 2100          | 123456 |             |   | 123456        |   |          |
| ENDDATA          |          |               |      |               |        |             |   |               |   |          |
| TOTAL COUNT= 478 |          |               |      |               |        |             |   |               |   |          |

\*\*\* USER INFORMATION MESSAGE 3035 FOR DATA BLOCK KLL

|               |                |               |        |                                                       |
|---------------|----------------|---------------|--------|-------------------------------------------------------|
| LOAD SEQ. NO. | EPSILON        | STRAIN        | ENERGY | EPSILONS LARGER THAN 0.001 ARE FLAGGED WITH ASTERISKS |
| 1             | -1.1010772E-13 | 1.9329606E+05 |        |                                                       |

FIGURE 2-13. MSC/NASTRAN SORTED BULK DATA DECK

INITIAL CONDITION STATIC SOLUTION

| D I S P L A C E M E N T   V E C T O R |      |               |               |               |               |               |               |  |
|---------------------------------------|------|---------------|---------------|---------------|---------------|---------------|---------------|--|
| POINT ID.                             | TYPE | T1            | T2            | T3            | R1            | R2            | R3            |  |
| 100                                   | G    | -3.089143E-02 | 0.0           | -9.927106E-01 | 0.0           | -2.240265E-03 | 0.0           |  |
| 200                                   | G    | -2.848941E-02 | 0.0           | -7.668377E-01 | 0.0           | -2.228401E-03 | 0.0           |  |
| 201                                   | G    | 1.302763E-01  | 0.0           | -8.132805E-01 | 0.0           | -2.228401E-03 | 0.0           |  |
| 300                                   | G    | -7.956203E-03 | 0.0           | -4.223564E-01 | 0.0           | -2.016658E-03 | 0.0           |  |
| 400                                   | G    | -3.881565E-03 | 0.0           | -1.467094E-01 | 0.0           | -1.310210E-03 | 0.0           |  |
| 500                                   | G    | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           |  |
| 501                                   | G    | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           |  |
| 600                                   | G    | 3.899802E-04  | 0.0           | -1.395649E-01 | 0.0           | 1.905725E-03  | 0.0           |  |
| 700                                   | G    | -1.741050E-02 | 0.0           | -3.224221E-01 | 0.0           | 2.646156E-03  | 0.0           |  |
| 800                                   | G    | 1.960022E-02  | 0.0           | -8.574673E-01 | 0.0           | 3.925506E-03  | 0.0           |  |
| 900                                   | G    | 1.623366E-01  | 0.0           | -1.646018E+00 | 0.0           | 5.791202E-03  | 0.0           |  |
| 1000                                  | G    | 4.121324E-01  | 0.0           | -2.947553E+00 | 0.0           | 6.380439E-03  | 0.0           |  |
| 1100                                  | G    | -2.376698E-02 | -6.204827E-02 | 4.549806E-01  | -6.692734E-03 | -2.201433E-03 | -5.605535E-04 |  |
| 1101                                  | G    | -1.923044E-02 | -6.048078E-02 | 3.946607E-01  | -6.692734E-03 | -2.201433E-03 | -5.605535E-04 |  |
| 1102                                  | G    | -1.296102E-02 | -1.657880E-01 | 7.333746E-01  | -6.692734E-03 | -2.201433E-03 | -5.605535E-04 |  |
| 1103                                  | G    | -1.296102E-02 | -1.657880E-01 | 7.333746E-01  | -6.692734E-03 | -2.201433E-03 | -5.605535E-04 |  |
| 1199                                  | G    | -9.159946E-02 | 0.0           | 5.671601E-01  | 0.0           | -6.671559E-03 | 0.0           |  |
| 1200                                  | G    | -2.183176E-01 | 4.138304E-02  | 2.341775E+00  | -1.306023E-02 | -6.671559E-03 | -9.325789E-04 |  |
| 1201                                  | G    | -2.439480E-01 | 3.842933E-02  | 2.721844E+00  | -1.306023E-02 | -6.671559E-03 | -9.325789E-04 |  |
| 1300                                  | G    | -6.008078E-01 | 3.054584E-01  | 6.170222E+00  | -2.241259E-02 | -1.032131E-02 | -1.681531E-03 |  |
| 1400                                  | G    | -1.368588E+00 | 6.399867E-01  | 1.084582E+01  | -2.562689E-02 | -7.394198E-03 | -5.296092E-03 |  |
| 1401                                  | G    | -1.022665E+00 | 2.900504E-01  | 9.660528E+00  | -2.562689E-02 | -7.394198E-03 | -5.296092E-03 |  |
| 1498                                  | G    | -6.724794E-01 | 0.0           | 8.267691E+00  | 0.0           | -9.067751E-03 | 0.0           |  |
| 1499                                  | G    | -6.724794E-01 | 0.0           | 8.267691E+00  | 0.0           | -9.067751E-03 | 0.0           |  |
| 1500                                  | G    | -2.495204E+00 | 4.342735E-01  | 1.459584E+01  | -1.709927E-02 | -9.067751E-03 | -4.925180E-03 |  |
| 1501                                  | G    | -2.554648E+00 | 3.717274E-01  | 1.491737E+01  | -1.709927E-02 | -9.067751E-03 | -4.925180E-03 |  |
| 1502                                  | G    | -2.495204E+00 | 4.342735E-01  | 1.459584E+01  | -1.709927E-02 | -9.067751E-03 | -4.925180E-03 |  |
| 1600                                  | G    | 7.919782E-02  | -2.893808E-01 | 1.937816E+00  | -1.295898E-02 | -9.379067E-03 | -1.573276E-03 |  |
| 1601                                  | G    | -2.385539E-01 | 1.247806E-01  | 2.086101E+00  | -1.295898E-02 | -9.379067E-03 | -1.573276E-03 |  |
| 1602                                  | G    | 7.919782E-02  | -2.893808E-01 | 1.937816E+00  | -1.295898E-02 | -9.379067E-03 | -1.573276E-03 |  |
| 1700                                  | G    | -6.952541E-01 | -3.463942E-02 | 8.834657E+00  | -2.537073E-02 | -9.936508E-03 | -5.952671E-03 |  |
| 1701                                  | G    | -1.014149E+00 | 6.997894E-01  | 8.967865E+00  | -2.537073E-02 | -9.936508E-03 | -5.952671E-03 |  |
| 1800                                  | G    | 1.832867E-01  | -7.628582E-01 | 6.224991E-01  | -6.689236E-03 | -2.204064E-03 | -5.605265E-04 |  |
| 1900                                  | G    | 2.696309E-01  | 0.0           | -8.798568E-01 | 0.0           | -2.223161E-03 | 0.0           |  |
| 2000                                  | G    | -9.809846E-02 | 0.0           | -8.621072E-01 | 0.0           | -4.137866E-03 | 0.0           |  |
| 2100                                  | G    | -7.305723E-02 | 0.0           | -7.669372E-01 | 0.0           | -2.228401E-03 | 0.0           |  |

2-147

FIGURE 2-14. MSC/NASTRAN DISPLACEMENT VECTOR

INITIAL CONDITION STATIC SOLUTION

LOAD VECTOR

| POINT ID. | TYPE | T1            | T2            | T3            | R1            | R2           | R3            |
|-----------|------|---------------|---------------|---------------|---------------|--------------|---------------|
| 100       | G    | -7.567860E+00 | 0.0           | -7.223518E+02 | 0.0           | 7.487885E+01 | 0.0           |
| 200       | G    | -3.155522E+01 | 0.0           | -4.095044E+03 | 0.0           | 5.615913E+02 | 0.0           |
| 201       | G    | -3.488073E+00 | 0.0           | 1.565496E+03  | 0.0           | 0.0          | 0.0           |
| 300       | G    | -2.299168E+01 | 0.0           | -6.531187E+03 | 0.0           | 1.814595E+02 | 0.0           |
| 400       | G    | 5.847729E+00  | 0.0           | -4.032344E+03 | 0.0           | 1.248885E+02 | 0.0           |
| 500       | G    | 7.060229E+01  | 0.0           | -6.685789E+03 | 0.0           | 2.352506E+02 | 0.0           |
| 600       | G    | 4.233434E+01  | 0.0           | -2.872200E+03 | 0.0           | 2.246365E+02 | 0.0           |
| 700       | G    | 5.941232E+01  | 0.0           | -3.344874E+03 | 0.0           | 2.620759E+02 | 0.0           |
| 800       | G    | 8.387946E+01  | 0.0           | -4.482066E+03 | 0.0           | 3.369546E+02 | 0.0           |
| 900       | G    | 6.130714E+01  | 0.0           | -2.573729E+03 | 0.0           | 7.822592E+01 | 0.0           |
| 1000      | G    | 2.738245E+01  | 0.0           | -1.175662E+04 | 0.0           | 2.021354E+02 | 0.0           |
| 1100      | G    | 2.312541E+01  | 1.032149E+02  | 5.960508E+03  | -1.457613E+01 | 5.188723E+02 | 6.208550E+00  |
| 1102      | G    | -2.228247E+01 | 6.777931E+01  | 1.011575E+04  | 0.0           | 0.0          | 0.0           |
| 1200      | G    | -1.134814E+02 | 3.683096E+02  | 1.833992E+04  | -2.287700E+01 | 4.592327E+02 | 9.485497E+00  |
| 1300      | G    | -1.674748E+02 | 4.798286E+02  | 1.621498E+04  | -1.263749E+01 | 1.971101E+02 | 5.449877E+00  |
| 1400      | G    | -8.106087E+01 | 4.572834E+02  | 1.413350E+04  | -8.375344E+00 | 9.676184E+01 | 4.356141E+00  |
| 1498      | G    | 0.0           | -4.053146E+04 | 0.0           | 0.0           | 0.0          | 0.0           |
| 1500      | G    | -3.341324E+01 | 1.069878E+02  | 4.729898E+03  | -1.413306E+00 | 3.375598E+01 | 9.256608E-01  |
| 1502      | G    | 0.0           | 4.053146E+04  | 0.0           | 0.0           | 0.0          | 0.0           |
| 1600      | G    | 2.483743E+01  | -2.057526E+01 | -5.010133E+03 | -2.410580E+02 | 9.622586E+01 | -9.971355E+03 |
| 1700      | G    | 4.936182E+01  | -1.645123E+01 | -4.784145E+03 | -2.292634E+02 | 9.183818E+01 | -9.968402E+03 |
| 1800      | G    | 3.607445E+01  | -6.777931E+01 | -1.200200E+04 | -2.421910E-02 | 5.990373E+00 | 1.685480E-02  |
| 1900      | G    | 2.459549E+00  | 0.0           | -1.681604E+03 | 0.0           | 5.615914E-01 | 0.0           |
| 2000      | G    | -3.308795E+00 | 0.0           | -4.859563E+02 | 0.0           | 1.871971E+00 | 0.0           |

2-148

FIGURE 2-15. MSC/NASTRAN LOAD VECTOR

NASTRAN input. These cards apply a constant axial force between two defined grid points. The FORCE1 cards in the sample case are used to account for nonlinear effects in oleos and unsymmetrical beams. There are no externally applied loads at node points, only at mass points.

#### 2.3.2.7 Forces of Single-Point Constraint

Figure 2-16 shows the NASTRAN output that summarizes the forces of single-point constraint. This shows the forces and moments that are applied at the model constraint points to balance the model. For point 500, constraints are specified in all six directions, so corresponding forces are output. Note that the loads for the symmetric degrees of freedom (T1, T3, R2) are all very small, indicating that a well balanced set of applied loads is being used as input. This is the result of including inertia relief loads in the calculated net loads used as input to NASTRAN. The constraint forces in the anti-symmetric directions (T2, R1, R3) result from the geometry of the model. A half-airplane model is used, and wing loads come into mass 5. The constraint loads shown correspond to the missing loads that the right wing would have supplied. The same is true for grid points 600 and 900. Grid points 1199, 1498 and 1499 are center-plane grids as explained in Section 2.3.2.5. The single-point constraint forces shown for these grid points are the reactions at the center of transverse beams in the KRASH model.

#### 2.3.2.8 Forces in Bar Elements

Figure 2-17 illustrates the NASTRAN output that summarizes the bar element static loads. The sign conventions for these loads are shown in figure 2-18, along with the corresponding KRASH85 beam element sign conventions. The KRASH85 loads that correspond to the NASTRAN bar element loads shown in figure 2-17 are as follows:

| NASTRAN<br>LOAD | CORRESPONDING<br>KRASH85 LOAD |
|-----------------|-------------------------------|
| M1A             | -MZI                          |
| M2A             | MYI                           |
| M1B             | MZJ                           |
| M2B             | -MYJ                          |
| S1              | FYJ                           |
| S2              | FZJ                           |
| FX              | FXJ                           |
| T               | MXJ                           |

NASTRAN plane 1 corresponds to the KRASH85 x-y plane, plane 2 corresponds to the x-z plane. Comparison of the loads in figure 2-17 with the KRASH "STRAIN FORCES" output at time zero will show a very close agreement. Beams which lie entirely in the airplane plane of symmetry ( $y = 0$  plane) are treated differently in NASTRAN and KRASH85. In NASTRAN, the loads are for a half-beam, while in KRASH85 they are for an entire beam. This applies to beams 1000-9000, 19000 and 23000 in figure 2-17. (The NASTRAN bar element numbers are 1000 times the corresponding KRASH85 beam element numbers.) Beam 24000 is missing in the NASTRAN model; this is a DRI element which is modeled as a RBAR rigid element in NASTRAN.

#### 2.3.2.9 Element Strain Energies

Figure 2-19 shows the NASTRAN output of bar element strain energies, in inch-pound units. Missing elements (1000, 25000, 26000) are those that have less than 0.001 percent of the total strain energy. These strain energies agree with the KRASH85 output at time zero, except for oleo and unsymmetrical beam elements. The use of FORCEL cards in NASTRAN to model these nonlinear elements causes the strain energies calculated by NASTRAN to be incorrect. The KRASH85 strain energies for these elements are correct.

INITIAL CONDITION STATIC SOLUTION

| FORCES OF SINGLE-POINT CONSTRAINT |      |              |               |               |              |              |               |
|-----------------------------------|------|--------------|---------------|---------------|--------------|--------------|---------------|
| POINT ID.                         | TYPE | T1           | T2            | T3            | R1           | R2           | R3            |
| 500                               | G    | 9.535735E-06 | 1.102906E+05  | -1.647945E-03 | 1.158149E+07 | 4.253135E-01 | -2.487183E+06 |
| 600                               | G    | 0.0          | -2.197132E+04 | 0.0           | 1.765277E+06 | 0.0          | 1.538706E+06  |
| 900                               | G    | 0.0          | 4.899299E+04  | 0.0           | 2.010931E+06 | 0.0          | 3.964869E+03  |
| 1199                              | G    | 0.0          | -6.197743E+04 | 0.0           | 9.611644E+05 | 0.0          | 7.206456E+05  |
| 1498                              | G    | 0.0          | -7.681350E+04 | 0.0           | 2.772235E+05 | 0.0          | 5.323329E+05  |
| 1499                              | G    | 0.0          | 0.0           | 0.0           | 2.772235E+05 | 0.0          | 5.323329E+05  |

2-151

FIGURE 2-16. MSC/NASTRAN SINGLE-POINT CONSTRAINT FORCES

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

AUGUST 3, 1984 MSC/NASTRAN 8/ 1/83 PAGE 28

INITIAL CONDITION STATIC SOLUTION

FORCES IN BAR ELEMENTS (C BAR)

| ELEMENT ID. | BEND-MOMENT END-A |               | BEND-MOMENT END-B |               | - SHEAR -     |               | AXIAL FORCE   | TORQUE        |
|-------------|-------------------|---------------|-------------------|---------------|---------------|---------------|---------------|---------------|
|             | PLANE 1           | PLANE 2       | PLANE 1           | PLANE 2       | PLANE 1       | PLANE 2       |               |               |
| 1000        | 0.0               | -7.487885E+01 | 0.0               | 7.289244E+04  | 0.0           | -7.223914E+02 | -1.141120E-01 | 0.0           |
| 2000        | 0.0               | 7.469412E+04  | 0.0               | 9.423384E+05  | 0.0           | -5.412238E+03 | -2.830308E+02 | 0.0           |
| 3000        | 0.0               | 9.421569E+05  | 0.0               | 2.854471E+06  | 0.0           | -1.195028E+04 | -1.146083E+02 | 0.0           |
| 4000        | 0.0               | 2.854346E+06  | 0.0               | 6.051349E+06  | 0.0           | -1.597832E+04 | -3.910129E+02 | 0.0           |
| 5000        | 0.0               | 8.780416E+06  | 0.0               | 6.951579E+06  | 0.0           | 1.301489E+04  | -2.433165E+04 | 0.0           |
| 6000        | 0.0               | 7.071534E+06  | 0.0               | 5.497074E+06  | 0.0           | 1.965147E+04  | -2.519321E+04 | 0.0           |
| 7000        | 0.0               | 5.496812E+06  | 0.0               | 3.567440E+06  | 0.0           | 1.199094E+04  | -2.774932E+04 | 0.0           |
| 8000        | 0.0               | 3.567104E+06  | 0.0               | 2.817684E+06  | 0.0           | 4.579750E+03  | -2.801210E+04 | 0.0           |
| 9000        | 0.0               | 2.474329E+06  | 0.0               | 2.020132E+02  | 0.0           | 1.154472E+04  | -2.222242E+03 | 0.0           |
| 10000       | -3.186641E+06     | -9.800311E+06 | 4.679865E+06      | -3.733758E+06 | -6.158012E+04 | -4.748982E+04 | 8.985562E+04  | 6.447120E+06  |
| 11000       | 5.434646E+06      | -6.946986E+06 | 3.117507E+05      | -3.193432E+06 | 2.957813E+04  | -2.167194E+04 | 1.118354E+05  | 5.954459E+05  |
| 12000       | 9.487483E+05      | -4.564562E+06 | 2.698350E+06      | -5.095244E+05 | -9.511133E+03 | -2.204386E+04 | 3.903610E+04  | -3.209756E+05 |
| 13000       | 2.677814E+06      | -5.073569E+05 | 3.958839E+06      | 2.801262E+05  | -6.911449E+03 | -4.248664E+03 | 3.846765E+04  | -4.644909E+05 |
| 14000       | 4.043633E+06      | 6.632647E+05  | -3.762905E+06     | 1.362978E+05  | 4.146377E+04  | 2.798940E+03  | 6.464662E+04  | 3.279091E+05  |
| 15000       | 8.070355E+03      | 4.640827E+05  | 9.633930E+03      | 8.282319E+04  | -2.054707E+01 | 5.010164E+03  | 1.699646E+01  | -1.148579E+03 |
| 16000       | 8.477410E+03      | 4.386772E+05  | 9.709035E+03      | 7.460462E+04  | -1.618520E+01 | 4.784395E+03  | -5.900237E+00 | -3.062334E+03 |
| 17000       | -5.631099E+02     | -4.264045E+02 | 1.222204E-02      | 2.995131E+00  | -6.319184E+00 | -4.818592E+00 | 1.161406E+04  | -2.852223E-02 |
| 18000       | -5.631099E+02     | -4.264045E+02 | 1.222204E-02      | 2.995131E+00  | -6.319184E+00 | -4.818592E+00 | 3.881768E+02  | -2.852223E-02 |
| 19000       | 0.0               | 8.109880E+01  | 0.0               | 5.615880E-01  | 0.0           | 1.287221E+00  | 1.681605E+03  | 0.0           |
| 20000       | 1.520495E+06      | -1.596292E+06 | -5.776721E-01     | 6.527750E-01  | 5.198594E+03  | -5.457746E+03 | -2.170905E+04 | 7.988806E+05  |
| 21000       | 3.323657E-11      | -1.931766E+06 | -1.521906E-09     | 9.507724E+05  | 2.346161E-12  | -4.348730E+03 | 5.568998E+04  | 6.557260E+05  |
| 22000       | -7.206456E+05     | -9.611644E+05 | -7.206456E+05     | -9.611643E+05 | 0.0           | -9.094947E-13 | -6.197740E+04 | 0.0           |
| 23000       | 0.0               | 9.780161E+01  | 0.0               | -1.871973E+00 | 0.0           | 5.007499E+00  | -4.859414E+02 | 0.0           |
| 25000       | 0.0               | 0.0           | 0.0               | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           |
| 26000       | 0.0               | 0.0           | 0.0               | 0.0           | 0.0           | 0.0           | 0.0           | 0.0           |
| 27000       | -5.323329E+05     | -2.772235E+05 | -5.323329E+05     | -2.772234E+05 | -1.080025E-12 | -1.136868E-12 | 0.0           | 0.0           |
| 28000       | -5.323329E+05     | -2.772235E+05 | -5.323329E+05     | -2.772234E+05 | -1.080025E-12 | -1.136868E-12 | -1.173449E+05 | 0.0           |

2-152

FIGURE 2-17. MSC/NASTRAN BAR ELEMENT FORCES

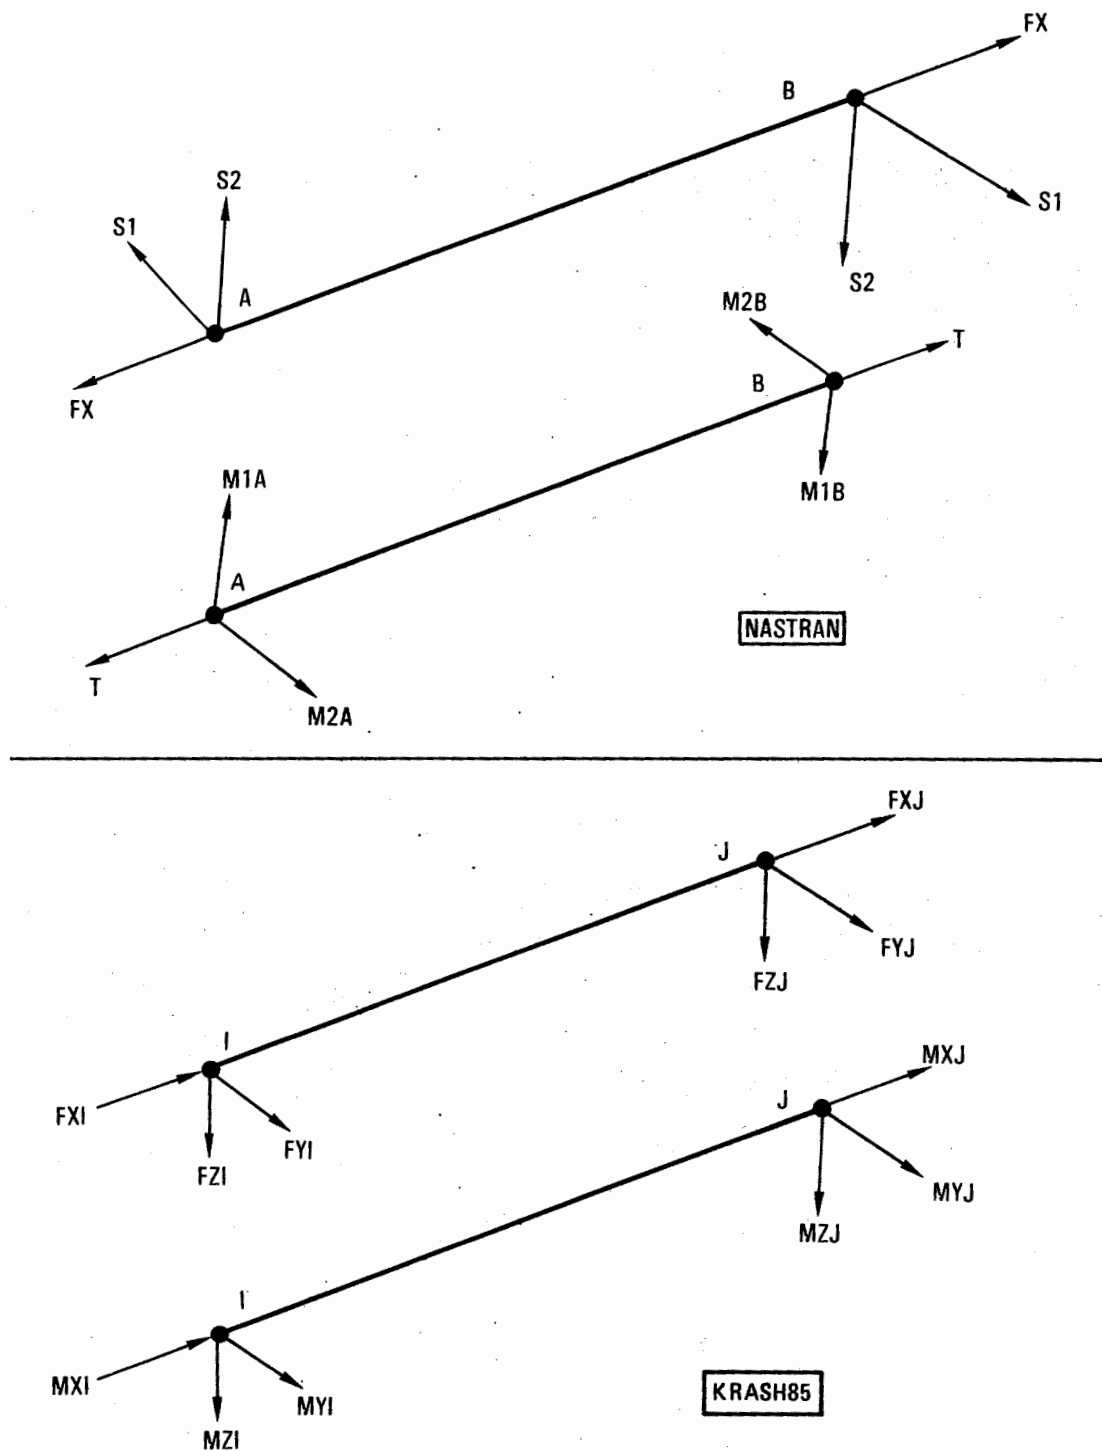


FIGURE 2-18. BAR ELEMENT FORCE SIGN CONVENTIONS, NASTRAN AND KRASH85

INITIAL CONDITION STATIC SOLUTION

ELEMENT STRAIN ENERGIES

ELEMENT-TYPE = BAR                      \* TOTAL ENERGY OF ALL ELEMENTS IN PROBLEM        =    1.932961E+05  
SUBCASE                                      1                      TOTAL ENERGY OF ALL ELEMENTS IN SET        -1 =    1.932961E+05

| ELEMENT-ID               | STRAIN-ENERGY | PERCENT OF TOTAL | STRAIN-ENERGY-DENSITY |
|--------------------------|---------------|------------------|-----------------------|
| 2000                     | 6.693402E+01  | 0.0346           | 2.319581E-02          |
| 3000                     | 7.272415E+02  | 0.3762           | 2.524788E-01          |
| 4000                     | 3.042442E+03  | 1.5740           | 5.154527E-01          |
| 5000                     | 7.669977E+03  | 3.9680           | 1.850282E+00          |
| 6000                     | 2.427930E+03  | 1.2561           | 1.063298E+00          |
| 7000                     | 3.200997E+03  | 1.6560           | 8.289177E-01          |
| 8000                     | 3.338734E+03  | 1.7273           | 1.102878E+00          |
| 9000                     | 4.902207E+02  | 0.2536           | 1.829966E-01          |
| 10000                    | 3.545786E+04  | 18.3438          | 5.140170E+00          |
| 11000                    | 2.333120E+04  | 12.0702          | 2.131451E+00          |
| 12000                    | 1.634373E+04  | 8.4553           | 1.578104E+00          |
| 13000                    | 6.652102E+03  | 3.4414           | 8.818122E-01          |
| 14000                    | 1.038806E+04  | 5.3742           | 2.758766E+00          |
| 15000                    | 4.330408E+02  | 0.2240           | 7.113289E-01          |
| 16000                    | 3.841328E+02  | 0.1987           | 6.310025E-01          |
| 17000                    | 6.695837E+02  | 0.3464           | 2.511360E+01          |
| 18000                    | 2.238049E+01  | 0.0116           | 2.511472E+01          |
| 19000                    | 5.623860E+01  | 0.0291           | 1.714290E+01          |
| 20000                    | 1.203364E+04  | 6.2255           | 1.010890E+00          |
| 21000                    | 2.579918E+04  | 13.3470          | 9.563110E-01          |
| 22000                    | 7.894949E+03  | 4.0844           | 7.137922E-01          |
| 23000                    | 2.315073E+01  | 0.0120           | 1.142624E+01          |
| 27000                    | 3.681078E+03  | 1.9044           |                       |
| 28000                    | 2.916098E+04  | 15.0862          | 1.969896E+00          |
| TYPE = BAR      SUBTOTAL | 1.932961E+05  | 100.0000         |                       |

2-154

FIGURE 2-19. MSC/NASTRAN ELEMENT STRAIN ENERGIES

#### 2.3.2.10 Grid Point Force Balance

Figure 2-20 shows the NASTRAN output that tabulates all the forces and moments acting at the grid points. The totals shown at each grid point are not always zero; the loads due to RBAR rigid bar elements are not included in the balance. Therefore, mass points which have node points connected to them, as well as the corresponding node points, will show nonzero total loads. (Grid points 200 and 201 in figure 2-20 for example.) Mass points without node points (such as 500 or 600) will show zero total loads. Due to this anomaly in the grid point force balance output, these data are only marginally useful.

#### 2.3.3 KRASH85 Output

##### 2.3.3.1 Initial Output

The initial output of KRASH85 is identical to that of KRASHIC, described in Section 2.3.1. These data were illustrated in figures 2-8 through 2-10. The only exceptions to this are the mass and node point coordinates, as well as the initial mass and node point deflections. The values shown in the KRASHIC input represent the values before the last iteration of KRASHIC/MSCTRAN. The values shown in the KRASH85 output are those following the last iteration. There will be slight differences in the deflections between those two outputs, unless a very large number of iterations are used (>10).

Figure 2-21 shows this section of the output from KRASH85. Note that the initial deflections and corresponding coordinate positions are slightly different from those shown in figure 2-9. As an example, the initial node point z deflection for node point 11, 1 changes from  $-.3946611$  in figure 2-9 to  $-.3946607$  in figure 2-21. These values represent before and after the tenth iteration. The corresponding node point z coordinates show no difference between figures 2-9 and 2-21, since the coordinate values are shown only to .001 inch. The differences are much finer than that.

Also, the initial deflections are in data set XYZ.NASOUT.DATA, which is always shown at the bottom of the ECHO of input data. If all deflections

in this data set agree between the KRASHIC and KRASH85 outputs, then further iterations cannot improve the accuracy of the initial conditions balance. If the two sets of data do differ, and the user is not satisfied with the quality of the initial balance, then further iterations could improve the initial balance.

KRASH85 includes some additional miscellaneous calculated data, in addition to that described for KRASHIC in Section 2.3.1.3. Figure 2-22 illustrates this output, which is calculated prior to time zero in KRASH85. These data include

- Beam uncoupled, undamped frequencies
- Beam damping constants
- Euler angles, beam IJ to airplane
- Load interaction curve load ratios (optional)

The beam frequencies output are the undamped, uncoupled individual beam frequencies associated with the six degrees of freedom of each beam. The frequencies listed under the headings (1), (2), and (3) correspond with the three translational degrees of freedom (x, y, z) and those listed under the heading (4), (5), and (6) correspond to the three rotational degrees of freedom ( $\phi$ ,  $\theta$ ,  $\psi$ ). The frequencies are computed using equations 1-55(a) and 1-55(b) from Volume I, Section 1.3.5.3.6.

The frequency values summarized should be reviewed for indications of potential stability problems which may occur with the numerical integration routine used in the program. For example, high frequencies combined with a relatively coarse integration interval may result in numerical integration instabilities. In general, beam member frequencies should satisfy the following criteria:

- 1) Member frequencies  $< 500$  Hz
- 2) The product of the maximum beam member frequency and the integration interval  $< 0.01$

INITIAL CONDITION STATIC SOLUTION

| GRID POINT FORCE BALANCE |            |          |               |               |               |               |               |               |  |
|--------------------------|------------|----------|---------------|---------------|---------------|---------------|---------------|---------------|--|
| POINT-ID                 | ELEMENT-ID | SOURCE   | T1            | T2            | T3            | R1            | R2            | R3            |  |
| 100                      |            | APP-LOAD | -7.567860E+00 | 0.0           | -7.223518E+02 | 0.0           | 7.487885E+01  | 0.0           |  |
| 100                      | 1000       | BAR      | 7.567859E+00  | 0.0           | 7.223516E+02  | 0.0           | -7.487885E+01 | 0.0           |  |
| 100                      |            | *TOTALS* | -1.546141E-11 | 0.0           | -1.746230E-10 | 0.0           | -1.536682E-08 | 0.0           |  |
| 200                      |            | APP-LOAD | -3.155522E+01 | 0.0           | -4.095044E+03 | 0.0           | 5.615913E+02  | 0.0           |  |
| 200                      | 1000       | BAR      | -7.567859E+00 | 0.0           | -7.223516E+02 | 0.0           | -7.289244E+04 | 0.0           |  |
| 200                      | 2000       | BAR      | 4.346039E+01  | 0.0           | 5.419457E+03  | 0.0           | 7.469412E+04  | 0.0           |  |
| 200                      | 23000      | BAR      | -3.308794E+00 | 0.0           | -4.859561E+02 | 0.0           | -9.780161E+01 | 0.0           |  |
| 200                      |            | *TOTALS* | 1.028524E+00  | 0.0           | 1.161077E+02  | 0.0           | 2.265459E+03  | 0.0           |  |
| 201                      |            | APP-LOAD | -3.488073E+00 | 0.0           | 1.565496E+03  | 0.0           | 0.0           | 0.0           |  |
| 201                      | 19000      | BAR      | 2.459548E+00  | 0.0           | -1.681604E+03 | 0.0           | 8.109880E+01  | 0.0           |  |
| 201                      |            | *TOTALS* | -1.028524E+00 | 0.0           | -1.161077E+02 | 0.0           | 8.109880E+01  | 0.0           |  |
| 300                      |            | APP-LOAD | -2.299168E+01 | 0.0           | -6.531187E+03 | 0.0           | 1.814595E+02  | 0.0           |  |
| 300                      | 2000       | BAR      | -4.346039E+01 | 0.0           | -5.419457E+03 | 0.0           | -9.423384E+05 | 0.0           |  |
| 300                      | 3000       | BAR      | 6.645207E+01  | 0.0           | 1.195064E+04  | 0.0           | 9.421569E+05  | 0.0           |  |
| 300                      |            | *TOTALS* | -1.421085E-12 | 0.0           | -2.473826E-10 | 0.0           | 7.683411E-09  | 0.0           |  |
| 400                      |            | APP-LOAD | 5.847729E+00  | 0.0           | -4.032344E+03 | 0.0           | 1.248885E+02  | 0.0           |  |
| 400                      | 3000       | BAR      | -6.645207E+01 | 0.0           | -1.195064E+04 | 0.0           | -2.854471E+06 | 0.0           |  |
| 400                      | 4000       | BAR      | 6.060435E+01  | 0.0           | 1.598299E+04  | 0.0           | 2.854346E+06  | 0.0           |  |
| 400                      |            | *TOTALS* | 2.785328E-12  | 0.0           | -1.164153E-10 | 0.0           | 1.024455E-08  | 0.0           |  |
| 500                      |            | F-OF-SPC | 9.535735E-06  | 1.102906E+05  | -1.647945E-03 | 1.158149E+07  | 4.253135E-01  | -2.487183E+06 |  |
| 500                      |            | APP-LOAD | 7.060229E+01  | 0.0           | -6.685789E+03 | 0.0           | 2.352506E+02  | 0.0           |  |
| 500                      | 4000       | BAR      | -6.060435E+01 | 0.0           | -1.598299E+04 | 0.0           | -6.051349E+06 | 0.0           |  |
| 500                      | 5000       | BAR      | -2.312483E+04 | 0.0           | -1.505520E+04 | 0.0           | 8.780416E+06  | 0.0           |  |
| 500                      | 10000      | BAR      | 2.311484E+04  | -1.102906E+05 | 3.772398E+04  | -1.158149E+07 | -2.729302E+06 | 2.487183E+06  |  |
| 500                      |            | *TOTALS* | 1.546141E-11  | 1.455192E-11  | -2.910383E-11 | -6.984919E-10 | -2.328306E-10 | -1.396984E-09 |  |
| 600                      |            | APP-LOAD | 4.233434E+01  | 0.0           | -2.872200E+03 | 0.0           | 2.246365E+02  | 0.0           |  |
| 600                      |            | F-OF-SPC | 0.0           | -2.197132E+04 | 0.0           | 1.765277E+06  | 0.0           | 1.538706E+06  |  |
| 600                      | 5000       | BAR      | 2.312483E+04  | 0.0           | 1.505520E+04  | 0.0           | -6.951579E+06 | 0.0           |  |
| 600                      | 6000       | BAR      | -2.629875E+04 | 0.0           | -1.814537E+04 | 0.0           | 7.071534E+06  | 0.0           |  |
| 600                      | 20000      | BAR      | 3.131584E+03  | 2.197132E+04  | 5.962367E+03  | -1.765277E+06 | -1.201791E+05 | -1.538706E+06 |  |
| 600                      |            | *TOTALS* | -3.365130E-11 | 4.547474E-12  | -3.883542E-10 | -2.328306E-10 | 2.124580E-08  | 0.0           |  |
| 700                      |            | APP-LOAD | 5.941232E+01  | 0.0           | -3.344874E+03 | 0.0           | 2.620759E+02  | 0.0           |  |
| 700                      | 6000       | BAR      | 2.629875E+04  | 0.0           | 1.814537E+04  | 0.0           | -5.497074E+06 | 0.0           |  |
| 700                      | 7000       | BAR      | -2.635816E+04 | 0.0           | -1.480050E+04 | 0.0           | 5.496812E+06  | 0.0           |  |
| 700                      |            | *TOTALS* | 5.820766E-11  | 0.0           | 1.527951E-09  | 0.0           | 3.725290E-09  | 0.0           |  |
| 800                      |            | APP-LOAD | 8.387946E+01  | 0.0           | -4.482066E+03 | 0.0           | 3.369546E+02  | 0.0           |  |
| 800                      | 7000       | BAR      | 2.635816E+04  | 0.0           | 1.480050E+04  | 0.0           | -3.567440E+06 | 0.0           |  |
| 800                      | 8000       | BAR      | -2.644204E+04 | 0.0           | -1.031843E+04 | 0.0           | 3.567104E+06  | 0.0           |  |
| 800                      |            | *TOTALS* | 1.455192E-11  | 0.0           | -4.947651E-10 | 0.0           | 7.078052E-08  | 0.0           |  |
| 900                      |            | F-OF-SPC | 0.0           | 4.899299E+04  | 0.0           | 2.010931E+06  | 0.0           | 3.964869E+03  |  |
| 900                      |            | APP-LOAD | 6.130714E+01  | 0.0           | -2.573729E+03 | 0.0           | 7.822592E+01  | 0.0           |  |

FIGURE 2-20. MSC/NASTRAN GRID POINT FORCE BALANCE

2 1 -1.302763D-01 0.0 8.132805D-01

# GENERALIZED SURFACE DATA

BETA = 0.0 DEGREES  
XGIN = 0.0  
ZGIN = 0.0

## MASS DATA

| WEIGHTS |             | MASS COORDINATES F.S.,B.L.,W.L. |             |             | MASS MOMENTS OF INERTIA (LB-IN-SEC**2) |             |             |    |
|---------|-------------|---------------------------------|-------------|-------------|----------------------------------------|-------------|-------------|----|
| I       | W           | X''                             | Y''         | Z''         | IX                                     | IY          | IZ          | I  |
| 1       | 1.58500D 03 | 1.98969D 02                     | 0.0         | 2.19007D 02 | 1.15140D 04                            | 4.00000D 04 | 1.50000D 04 | 1  |
| 2       | 9.06450D 03 | 2.99972D 02                     | 0.0         | 2.17933D 02 | 8.90800D 04                            | 3.00000D 05 | 9.90000D 04 | 2  |
| 3       | 1.53181D 04 | 4.59992D 02                     | 0.0         | 2.08278D 02 | 1.62780D 05                            | 9.69350D 04 | 1.03090D 05 | 3  |
| 4       | 1.30960D 04 | 6.19996D 02                     | 0.0         | 2.05853D 02 | 1.96270D 05                            | 6.67150D 04 | 7.93890D 04 | 4  |
| 5       | 2.17526D 04 | 8.20000D 02                     | 0.0         | 2.00200D 02 | 4.91060D 05                            | 1.25670D 05 | 1.46510D 05 | 5  |
| 6       | 7.90150D 03 | 9.60000D 02                     | 0.0         | 2.12260D 02 | 8.13830D 04                            | 1.20000D 05 | 2.00000D 05 | 6  |
| 7       | 9.19070D 03 | 1.03998D 03                     | 0.0         | 2.07578D 02 | 8.75360D 04                            | 1.40000D 05 | 2.00000D 05 | 7  |
| 8       | 9.93840D 03 | 1.20002D 03                     | 0.0         | 2.24243D 02 | 8.80980D 04                            | 1.80000D 05 | 3.00000D 05 | 8  |
| 9       | 5.70200D 03 | 1.36006D 03                     | 0.0         | 2.58354D 02 | 9.62490D 04                            | 4.17880D 04 | 2.60390D 04 | 9  |
| 10      | 6.17520D 03 | 1.57041D 03                     | 0.0         | 2.99352D 02 | 2.15300D 05                            | 1.07980D 05 | 1.58630D 05 | 10 |
| 11      | 9.67060D 03 | 8.01276D 02                     | 1.18362D 02 | 1.88755D 02 | 1.52130D 04                            | 1.38580D 05 | 3.60000D 05 | 11 |
| 12      | 1.00656D 04 | 8.52082D 02                     | 2.71759D 02 | 2.05442D 02 | 1.95100D 04                            | 1.22630D 05 | 3.00000D 05 | 12 |
| 13      | 5.28650D 03 | 9.42899D 02                     | 4.30395D 02 | 2.26070D 02 | 7.27150D 03                            | 5.26190D 04 | 1.10000D 05 | 13 |
| 14      | 3.75900D 03 | 1.04443D 03                     | 5.82860D 02 | 2.54346D 02 | 4.40830D 03                            | 2.58230D 04 | 6.00000D 04 | 14 |
| 15      | 1.54230D 03 | 1.11010D 03                     | 7.40166D 02 | 2.69696D 02 | 1.67080D 03                            | 9.01370D 03 | 1.80000D 04 | 15 |
| 16      | 5.40000D 03 | 7.19079D 02                     | 3.21889D 02 | 1.67738D 02 | 3.65156D 03                            | 2.57460D 04 | 2.93746D 04 | 16 |
| 17      | 5.15100D 03 | 9.02105D 02                     | 5.51635D 02 | 1.96935D 02 | 3.71200D 03                            | 2.45882D 04 | 2.81780D 04 | 17 |
| 18      | 1.92200D 03 | 8.87183D 02                     | 1.32363D 02 | 9.13225D 01 | 3.71000D 02                            | 1.60000D 03 | 2.00000D 03 | 18 |
| 19      | 2.38000D 02 | 2.79270D 02                     | 0.0         | 8.41201D 01 | 2.40000D 01                            | 3.00000D 02 | 5.00000D 02 | 19 |
| 20      | 1.00000D 03 | 2.99902D 02                     | 0.0         | 2.37838D 02 | 1.00000D 03                            | 1.00000D 03 | 1.00000D 03 | 20 |
| 21      | 1.00000D 03 | 2.99927D 02                     | 0.0         | 2.37933D 02 | 1.00000D 03                            | 1.00000D 03 | 1.00000D 03 | 21 |

## NODE POINT DATA

| MASS | N.P. | NODE POINT COORDINATES F.S.,B.L.,W.L. |             |             |
|------|------|---------------------------------------|-------------|-------------|
| I    | M    | X''                                   | Y''         | Z''         |
| 5    | 1    | 7.75100D 02                           | 4.80000D 01 | 1.81000D 02 |
| 11   | 1    | 7.73881D 02                           | 1.18360D 02 | 1.86695D 02 |
| 11   | 2    | 8.86987D 02                           | 1.31766D 02 | 1.80433D 02 |
| 11   | 3    | 8.86987D 02                           | 1.31766D 02 | 1.80433D 02 |
| 12   | 1    | 8.11556D 02                           | 3.21562D 02 | 2.02322D 02 |
| 14   | 1    | 9.93477D 02                           | 5.51310D 02 | 2.30161D 02 |
| 15   | 1    | 1.14545D 03                           | 7.40228D 02 | 2.76217D 02 |
| 15   | 2    | 1.11010D 03                           | 7.40166D 02 | 2.69696D 02 |
| 16   | 1    | 7.35461D 02                           | 3.21475D 02 | 2.01686D 02 |
| 16   | 2    | 7.19079D 02                           | 3.21889D 02 | 1.67738D 02 |
| 17   | 1    | 9.17386D 02                           | 5.50900D 02 | 2.29468D 02 |
| 2    | 1    | 2.79130D 02                           | 0.0         | 1.46687D 02 |

## EXTERNAL SPRING DATA

FIGURE 2-21. KRASH85 OUTPUT, INITIAL MASS/NODE POINT DEFLECTIONS (SHEET 1 OF 2)

# NO.MASS POSITION PLOTS

## VEHICLE INITIAL CONDITIONS

VEHICLE TRANSLATIONAL VELOCITIES IN GROUND AXES (IN/SEC)  
 VEHICLE ROTATIONAL VELOCITIES IN VEHICLE AXES (RAD/SEC)  
 EULER ANGLES OF VEHICLE RELATIVE TO GROUND (RADIAN)

|             |             |             |
|-------------|-------------|-------------|
| XGDOT<br>P' | YGDOT<br>Q' | ZGDOT<br>R' |
| PHI'        | THETA'      | PSI'        |
| 3.14000D 03 | 0.0         | 3.00000D 02 |
| 0.0         | 1.00000D-01 | 0.0         |
| 0.0         | 1.74500D-02 | 0.0         |

## INITIAL MASS POINT DEFLECTIONS

| I  | DXAP(I)       | DYAP(I)       | DZAP(I)       | DPHAP(I)     | DTHAP(I)      | DPSAP(I)     | I  |
|----|---------------|---------------|---------------|--------------|---------------|--------------|----|
| 1  | 3.089143D-02  | 0.0           | 9.927106D-01  | 0.0          | -2.240265D-03 | 0.0          | 1  |
| 2  | 2.848941D-02  | 0.0           | 7.668377D-01  | 0.0          | -2.228401D-03 | 0.0          | 2  |
| 3  | 7.956203D-03  | 0.0           | 4.223564D-01  | 0.0          | -2.016658D-03 | 0.0          | 3  |
| 4  | 3.881565D-03  | 0.0           | 1.467094D-01  | 0.0          | -1.310210D-03 | 0.0          | 4  |
| 5  | 0.0           | 0.0           | 0.0           | 0.0          | 0.0           | 0.0          | 5  |
| 6  | -3.899802D-04 | 0.0           | 1.395649D-01  | 0.0          | 1.905725D-03  | 0.0          | 6  |
| 7  | 1.741050D-02  | 0.0           | 3.224221D-01  | 0.0          | 2.646156D-03  | 0.0          | 7  |
| 8  | -1.960022D-02 | 0.0           | 8.574673D-01  | 0.0          | 3.925506D-03  | 0.0          | 8  |
| 9  | -1.623366D-01 | 0.0           | 1.646018D 00  | 0.0          | 5.791202D-03  | 0.0          | 9  |
| 10 | -4.121324D-01 | 0.0           | 2.947553D 00  | 0.0          | 6.380439D-03  | 0.0          | 10 |
| 11 | 2.376698D-02  | -6.204827D-02 | -4.549806D-01 | 6.692734D-03 | -2.201433D-03 | 5.605535D-04 | 11 |
| 12 | 2.183176D-01  | 4.138304D-02  | -2.341775D 00 | 1.306023D-02 | -6.671559D-03 | 9.325789D-04 | 12 |
| 13 | 6.008078D-01  | 3.054584D-01  | -6.170222D 00 | 2.241259D-02 | -1.032131D-02 | 1.681531D-03 | 13 |
| 14 | 1.368588D 00  | 6.399867D-01  | -1.084582D 01 | 2.562689D-02 | -7.394198D-03 | 5.296092D-03 | 14 |
| 15 | 2.495204D 00  | 4.342735D-01  | -1.459584D 01 | 1.709927D-02 | -9.067751D-03 | 4.925180D-03 | 15 |
| 16 | -7.919782D-02 | -2.893808D-01 | -1.937816D 00 | 1.295898D-02 | -9.379067D-03 | 1.573276D-03 | 16 |
| 17 | 6.952541D-01  | -3.463942D-02 | -8.834657D 00 | 2.537073D-02 | -9.936508D-03 | 5.952671D-03 | 17 |
| 18 | -1.832867D-01 | -7.628582D-01 | -6.224991D-01 | 6.689236D-03 | -2.204064D-03 | 5.605265D-04 | 18 |
| 19 | -2.696309D-01 | 0.0           | 8.798568D-01  | 0.0          | -2.223161D-03 | 0.0          | 19 |
| 20 | 9.809846D-02  | 0.0           | 8.621072D-01  | 0.0          | -4.137866D-03 | 0.0          | 20 |
| 21 | 7.305723D-02  | 0.0           | 7.669372D-01  | 0.0          | -2.228401D-03 | 0.0          | 21 |

## INITIAL NODE POINT DEFLECTIONS

| I  | M | DXNPAP        | DYNPAP        | DZNPAP        |
|----|---|---------------|---------------|---------------|
| 5  | 1 | 0.0           | 0.0           | 0.0           |
| 11 | 1 | 1.923044D-02  | -6.048078D-02 | -3.946607D-01 |
| 11 | 2 | 1.296102D-02  | -1.657880D-01 | -7.333746D-01 |
| 11 | 3 | 1.296102D-02  | -1.657880D-01 | -7.333746D-01 |
| 12 | 1 | 2.439480D-01  | 3.842933D-02  | -2.721844D 00 |
| 14 | 1 | 1.022665D 00  | 2.900504D-01  | -9.660528D 00 |
| 15 | 1 | 2.554648D 00  | 3.717274D-01  | -1.491737D 01 |
| 15 | 2 | 2.495204D 00  | 4.342735D-01  | -1.459584D 01 |
| 16 | 1 | 2.385539D-01  | 1.247806D-01  | -2.086101D 00 |
| 16 | 2 | -7.919782D-02 | -2.893808D-01 | -1.937816D 00 |
| 17 | 1 | 1.014149D 00  | 6.997894D-01  | -8.967865D 00 |

FIGURE 2-21. KRASH85 OUTPUT, INITIAL MASS/NODE POINT DEFLECTIONS (SHEET 2 OF 2)

|    |              |              |              |              |              |              |
|----|--------------|--------------|--------------|--------------|--------------|--------------|
|    | -4.93617D 01 | -1.64513D 01 | 4.78414D 03  | 2.29264D 02  | 9.18383D 01  | 9.96840D 03  |
|    | -9.34168D-03 | -7.76185D-04 | 2.08112D-02  | -2.21321D-04 | -3.72978D-03 | -2.38454D-04 |
| 18 | -3.35372D 01 | 0.0          | 1.92171D 03  | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 1.97453D 01  | 0.0          | -3.54470D 01 | 2.42191D-02  | 5.99038D 00  | -1.68548D-02 |
|    | -1.37919D 01 | 0.0          | 1.88626D 03  | 2.42191D-02  | 5.99038D 00  | -1.68548D-02 |
|    | -1.02326D-02 | 1.29277D-04  | 1.84649D-02  | -2.09858D-06 | -3.74386D-03 | 2.50486D-05  |
| 19 | -4.15289D 00 | 0.0          | 2.37964D 02  | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 6.20994D 00  | 0.0          | -5.74830D 00 | 0.0          | 1.12318D 00  | 0.0          |
|    | 2.05706D 00  | 0.0          | 2.32215D 02  | 0.0          | 1.12318D 00  | 0.0          |
|    | -2.60384D-02 | 0.0          | 2.42105D-02  | 0.0          | -3.74395D-03 | 0.0          |
| 20 | -1.74491D 01 | 0.0          | 9.99848D 02  | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 2.40667D 01  | 0.0          | -2.79347D 01 | 0.0          | 3.74395D 00  | 0.0          |
|    | 6.61761D 00  | 0.0          | 9.71913D 02  | 0.0          | 3.74395D 00  | 0.0          |
|    | -2.39509D-02 | 0.0          | 2.80341D-02  | 0.0          | -3.74395D-03 | 0.0          |
| 21 | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |
|    | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          | 0.0          |

BEAM UNCOUPLED, UNDAMPED FREQUENCIES (CPS)

| IJ | I  | J  | M | N | (1)        | (2)        | (3)        | (4)        | (5)        | (6)        |
|----|----|----|---|---|------------|------------|------------|------------|------------|------------|
| 1  | 1  | 2  | 0 | 0 | 1.5153D 02 | 1.7671D 02 | 2.2874D 02 | 9.6189D 01 | 1.3274D 02 | 1.6880D 02 |
| 2  | 2  | 3  | 0 | 0 | 6.2094D 01 | 4.6372D 01 | 6.2054D 01 | 3.5380D 01 | 8.1503D 01 | 7.3325D 01 |
| 3  | 3  | 4  | 0 | 0 | 5.5817D 01 | 4.1760D 01 | 5.9058D 01 | 2.9532D 01 | 1.1739D 02 | 7.7902D 01 |
| 4  | 4  | 5  | 0 | 0 | 5.9388D 01 | 2.8866D 01 | 4.9366D 01 | 2.5029D 01 | 1.2571D 02 | 6.7576D 01 |
| 5  | 5  | 6  | 0 | 0 | 8.4160D 01 | 5.8245D 01 | 9.1995D 01 | 3.9755D 01 | 1.1673D 02 | 6.2719D 01 |
| 6  | 6  | 7  | 0 | 0 | 1.2795D 02 | 1.7495D 02 | 2.7023D 02 | 7.3988D 01 | 1.6315D 02 | 8.4980D 01 |
| 7  | 7  | 8  | 0 | 0 | 7.8157D 01 | 6.0474D 01 | 8.2003D 01 | 4.8460D 01 | 9.5476D 01 | 5.7242D 01 |
| 8  | 8  | 9  | 0 | 0 | 7.8113D 01 | 4.9757D 01 | 6.4332D 01 | 3.3242D 01 | 1.0111D 02 | 8.8339D 01 |
| 9  | 9  | 10 | 0 | 0 | 6.2027D 01 | 1.9545D 01 | 6.0157D 01 | 2.6221D 01 | 1.1884D 02 | 4.2904D 01 |
| 10 | 5  | 11 | 0 | 1 | 7.8575D 01 | 9.7901D 01 | 3.6562D 01 | 2.2297D 01 | 6.5550D 01 | 9.3224D 01 |
| 11 | 11 | 12 | 1 | 0 | 8.5052D 01 | 6.8340D 01 | 2.2847D 01 | 1.6286D 01 | 5.7183D 01 | 6.0580D 01 |
| 12 | 12 | 13 | 0 | 0 | 9.2917D 01 | 5.6161D 01 | 1.5987D 01 | 1.3332D 01 | 4.4400D 01 | 6.3168D 01 |
| 13 | 13 | 14 | 0 | 0 | 9.8858D 01 | 4.1969D 01 | 1.2952D 01 | 1.3725D 01 | 3.8719D 01 | 5.4686D 01 |
| 14 | 14 | 15 | 0 | 1 | 9.7455D 01 | 3.5862D 01 | 1.3889D 01 | 1.6384D 01 | 4.7736D 01 | 5.5927D 01 |
| 15 | 12 | 16 | 1 | 1 | 5.5416D 01 | 8.9189D 00 | 2.4131D 01 | 9.6769D 00 | 2.1944D 01 | 7.2341D 00 |
| 16 | 14 | 17 | 1 | 1 | 7.0474D 01 | 1.1343D 01 | 3.0688D 01 | 1.2004D 01 | 2.8512D 01 | 8.5438D 00 |
| 17 | 11 | 18 | 2 | 0 | 4.5310D 00 | 2.7229D 01 | 2.7229D 01 | 1.5356D 01 | 7.1791D 01 | 1.5003D 02 |
| 18 | 11 | 18 | 3 | 0 | 4.5310D 00 | 2.7229D 01 | 2.7229D 01 | 1.5356D 01 | 7.1791D 01 | 1.5003D 02 |
| 19 | 2  | 19 | 1 | 0 | 1.4218D 01 | 4.4878D 01 | 4.4878D 01 | 6.6902D 00 | 7.2583D 01 | 2.5653D 02 |
| 20 | 6  | 12 | 0 | 0 | 5.5440D 01 | 1.4915D 01 | 4.6029D 00 | 5.3174D 00 | 1.6932D 01 | 2.4627D 01 |
| 21 | 9  | 14 | 0 | 0 | 5.1478D 01 | 6.1110D 00 | 1.8859D 00 | 6.7777D 00 | 1.9219D 01 | 4.2045D 01 |
| 22 | 12 | 0  | 0 | 0 | 3.8142D 01 | 5.5219D 00 | 1.7041D 00 | 3.7230D 00 | 1.9544D 01 | 1.6156D 01 |
| 23 | 2  | 20 | 0 | 0 | 1.0537D 01 | 4.0643D 00 | 4.0643D 00 | 7.1706D-01 | 2.2599D 00 | 2.2688D 00 |
| 24 | 2  | 21 | 0 | 0 | 8.4297D 00 | 4.0354D 00 | 4.0354D 00 | 7.1535D-01 | 2.2545D 00 | 2.2634D 00 |
| 25 | 15 | 16 | 0 | 0 | 5.2941D 01 | 0.0        | 0.0        | 0.0        | 0.0        | 0.0        |
| 26 | 15 | 16 | 2 | 2 | 5.2941D 01 | 0.0        | 0.0        | 0.0        | 0.0        | 0.0        |

FIGURE 2-22. KRASH85 OUTPUT, ADDITIONAL MISCELLANEOUS CALCULATED DATA (SHEET 1 OF 3)

```

27 15 0 0 0 4.1389D 01 1.9371D 00 7.5022D-01 6.2405D 00 3.1341D 01 2.4668D 01
28 15 0 2 0 4.1389D 01 1.9371D 00 7.5022D-01 6.2405D 00 3.1341D 01 2.4668D 01

```

## DAMPING TERMS (LB/IN/SEC, TRANSLATIONS (1)-(3) AND LB-IN-SEC, ROTATIONS (4)-(6))

| IJ | I  | J  | M | N | (1)         | (2)         | (3)         | (4)         | (5)         | (6)         |
|----|----|----|---|---|-------------|-------------|-------------|-------------|-------------|-------------|
| 1  | 1  | 2  | 0 | 0 | 1.05034D-04 | 9.00681D-05 | 6.95787D-05 | 1.65461D-04 | 1.19896D-04 | 9.42867D-05 |
| 2  | 2  | 3  | 0 | 0 | 2.56314D-04 | 3.43213D-04 | 2.56479D-04 | 4.49845D-04 | 1.95276D-04 | 2.17053D-04 |
| 3  | 3  | 4  | 0 | 0 | 2.85135D-04 | 3.81116D-04 | 2.69490D-04 | 5.38921D-04 | 1.35583D-04 | 2.04302D-04 |
| 4  | 4  | 5  | 0 | 0 | 2.67990D-04 | 5.51365D-04 | 3.22401D-04 | 6.35885D-04 | 1.26604D-04 | 2.35521D-04 |
| 5  | 5  | 6  | 0 | 0 | 1.89111D-04 | 2.73250D-04 | 1.73004D-04 | 4.00342D-04 | 1.36345D-04 | 2.53759D-04 |
| 6  | 6  | 7  | 0 | 0 | 1.24385D-04 | 9.09731D-05 | 5.88954D-05 | 2.15110D-04 | 9.75521D-05 | 1.87286D-04 |
| 7  | 7  | 8  | 0 | 0 | 2.03635D-04 | 2.63177D-04 | 1.94085D-04 | 3.28423D-04 | 1.66696D-04 | 2.78039D-04 |
| 8  | 8  | 9  | 0 | 0 | 2.03749D-04 | 3.19864D-04 | 2.47397D-04 | 4.78775D-04 | 1.57402D-04 | 1.80165D-04 |
| 9  | 9  | 10 | 0 | 0 | 2.56589D-04 | 8.14317D-04 | 2.64566D-04 | 6.06964D-04 | 1.33923D-04 | 3.70956D-04 |
| 10 | 5  | 11 | 0 | 1 | 2.02552D-04 | 1.62567D-04 | 4.35297D-04 | 7.13786D-04 | 2.42798D-04 | 1.70722D-04 |
| 11 | 11 | 12 | 1 | 0 | 1.87126D-04 | 2.32858D-04 | 6.96619D-04 | 9.77254D-04 | 2.78325D-04 | 2.62719D-04 |
| 12 | 12 | 13 | 0 | 0 | 1.71287D-04 | 2.83388D-04 | 9.95514D-04 | 1.19376D-03 | 3.58461D-04 | 2.51954D-04 |
| 13 | 13 | 14 | 0 | 0 | 1.60993D-04 | 3.79222D-04 | 1.22882D-03 | 1.15964D-03 | 4.11048D-04 | 2.91034D-04 |
| 14 | 14 | 15 | 0 | 1 | 1.63311D-04 | 4.43797D-04 | 1.14588D-03 | 9.71391D-04 | 3.33405D-04 | 2.84579D-04 |
| 15 | 12 | 16 | 1 | 1 | 2.87200D-04 | 1.78447D-03 | 6.59558D-04 | 1.64468D-03 | 7.25262D-04 | 2.20060D-03 |
| 16 | 14 | 17 | 1 | 1 | 2.25834D-04 | 1.40315D-03 | 5.18620D-04 | 1.32582D-03 | 5.58197D-04 | 1.86282D-03 |
| 17 | 11 | 18 | 2 | 0 | 3.51261D-03 | 5.84496D-04 | 5.84496D-04 | 1.03643D-03 | 2.21691D-04 | 1.06081D-04 |
| 18 | 11 | 18 | 3 | 0 | 3.51261D-03 | 5.84496D-04 | 5.84496D-04 | 1.03643D-03 | 2.21691D-04 | 1.06081D-04 |
| 19 | 2  | 19 | 1 | 0 | 1.11938D-03 | 3.54641D-04 | 3.54641D-04 | 2.37893D-03 | 2.19272D-04 | 6.20421D-05 |
| 20 | 6  | 12 | 0 | 0 | 2.87074D-04 | 1.06706D-03 | 3.45768D-03 | 2.99307D-03 | 9.39985D-04 | 6.46257D-04 |
| 21 | 9  | 14 | 0 | 0 | 3.09170D-04 | 2.60439D-03 | 8.43919D-03 | 2.34821D-03 | 8.28098D-04 | 3.78532D-04 |
| 22 | 12 | 0  | 0 | 0 | 4.17273D-04 | 2.88224D-03 | 9.33954D-03 | 4.27495D-03 | 8.14357D-04 | 9.85103D-04 |
| 23 | 2  | 20 | 0 | 0 | 9.54928D-03 | 2.47574D-02 | 2.47574D-02 | 1.40327D-01 | 4.45248D-02 | 4.43507D-02 |
| 24 | 2  | 21 | 0 | 0 | 8.75355D-03 | 1.82857D-02 | 1.82857D-02 | 1.03152D-01 | 3.27294D-02 | 3.26015D-02 |
| 25 | 15 | 16 | 0 | 0 | 3.00629D-04 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 26 | 15 | 16 | 2 | 2 | 3.00629D-04 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 27 | 15 | 0  | 0 | 0 | 3.84539D-04 | 8.21634D-03 | 2.12145D-02 | 2.55036D-03 | 5.07811D-04 | 6.45175D-04 |
| 28 | 15 | 0  | 2 | 0 | 3.84539D-04 | 8.21634D-03 | 2.12145D-02 | 2.55036D-03 | 5.07811D-04 | 6.45175D-04 |

## EULER ANGLES, BEAM IJ TO AIRPLANE (RADIAN)

| IJ | I  | J  | M | N | THEIJO(IJ)   | PSIIJO(IJ)   |
|----|----|----|---|---|--------------|--------------|
| 1  | 1  | 2  | 0 | 0 | -1.06343D-02 | 3.14159D 00  |
| 2  | 2  | 3  | 0 | 0 | -6.02662D-02 | 3.14159D 00  |
| 3  | 3  | 4  | 0 | 0 | -1.51507D-02 | 3.14159D 00  |
| 4  | 4  | 5  | 0 | 0 | -2.82584D-02 | 3.14159D 00  |
| 5  | 5  | 6  | 0 | 0 | 8.59336D-02  | 3.14159D 00  |
| 6  | 6  | 7  | 0 | 0 | -5.84820D-02 | 3.14159D 00  |
| 7  | 7  | 8  | 0 | 0 | 1.03758D-01  | 3.14159D 00  |
| 8  | 8  | 9  | 0 | 0 | 2.09997D-01  | 3.14159D 00  |
| 9  | 9  | 10 | 0 | 0 | 1.92493D-01  | 3.14159D 00  |
| 10 | 5  | 11 | 0 | 1 | -1.05920D-01 | -1.19924D 00 |
| 11 | 11 | 12 | 1 | 0 | 1.08453D-01  | -2.04225D 00 |
| 12 | 12 | 13 | 0 | 0 | 1.12376D-01  | -2.09074D 00 |
| 13 | 13 | 14 | 0 | 0 | 1.53152D-01  | -2.15829D 00 |
| 14 | 14 | 15 | 0 | 1 | 1.16432D-01  | -2.14145D 00 |
| 15 | 12 | 16 | 1 | 1 | -8.35444D-03 | 1.13479D-03  |
| 16 | 14 | 17 | 1 | 1 | -9.10265D-03 | 5.38477D-03  |
| 17 | 11 | 18 | 2 | 0 | 2.20223D-03  | -3.13489D 00 |
| 18 | 11 | 18 | 3 | 0 | 2.20223D-03  | -3.13489D 00 |
| 19 | 2  | 19 | 1 | 0 | 2.22730D-03  | 3.14159D 00  |
| 20 | 6  | 12 | 0 | 0 | -2.33152D-02 | -1.19278D 00 |
| 21 | 9  | 14 | 0 | 0 | -6.04694D-03 | -1.07449D 00 |
| 22 | 12 | 0  | 0 | 0 | 0.0          | 1.57080D 00  |
| 23 | 2  | 20 | 0 | 0 | -3.49710D-03 | 0.0          |
| 24 | 2  | 21 | 0 | 0 | -2.22840D-03 | 0.0          |

FIGURE 2-22. KRASH85 OUTPUT, ADDITIONAL MISCELLANEOUS CALCULATED DATA (SHEET 2 OF 3)

|    |    |    |   |              |             |
|----|----|----|---|--------------|-------------|
| 25 | 15 | 0  | 0 | -1.76219D-01 | 8.19057D-01 |
| 26 | 15 | 16 | 2 | -1.76219D-01 | 8.19057D-01 |
| 27 | 15 | 0  | 0 | 0.0          | 1.57080D 00 |
| 28 | 15 | 0  | 2 | 0.0          | 1.57080D 00 |

# LOAD INTERACTION CURVE LOAD RATIOS

| CURVE NO. | BEAM NO. | PROPORTION OF BEAM END LOADS<br>MAKING UP INTERACTION LOADS |             |
|-----------|----------|-------------------------------------------------------------|-------------|
|           |          | I END                                                       | J END       |
| 1         | 1        | -2.8207D-04                                                 | 1.0003D 00  |
| 2         | 2        | 9.9982D-01                                                  | 1.7804D-04  |
| 3         | 2        | 3.7490D-01                                                  | 6.2510D-01  |
| 4         | 3        | 8.7495D-01                                                  | 1.2505D-01  |
| 5         | 3        | 4.9996D-01                                                  | 5.0004D-01  |
| 6         | 3        | -2.4259D-05                                                 | 1.0000D 00  |
| 7         | 4        | 9.9998D-01                                                  | 1.9407D-05  |
| 8         | 5        | 2.7856D-06                                                  | 1.0000D 00  |
| 9         | 6        | 1.0000D 00                                                  | -4.8758D-06 |
| 10        | 6        | 4.9989D-01                                                  | 5.0011D-01  |
| 11        | 7        | 7.4995D-01                                                  | 2.5005D-01  |
| 12        | 7        | 2.5006D-01                                                  | 7.4994D-01  |
| 13        | 8        | 7.5019D-01                                                  | 2.4981D-01  |
| 14        | 8        | 2.5032D-01                                                  | 7.4968D-01  |
| 15        | 9        | 8.1014D-01                                                  | 1.8986D-01  |

FIGURE 2-22. KRASH85 OUTPUT, ADDITIONAL MISCELLANEOUS CALCULATED DATA (SHEET 3 OF 3)

While these criteria are suggested as guidelines, their exceedance does not necessarily mean that instability problems will automatically occur.

Beam structural damping coefficients are computed within the program for each of the six beam degrees of freedom. The damping coefficients are computed from equations (1-54), Section 1.3.5.3.6, Volume I.

These damping coefficients are printed only to provide a record of the actual data used in the calculations. The interpretation of the proper damping values should be based upon inspection of the damping ratios (actual damping/critical damping) summarized in the section entitled "INTERNAL BEAM DATA" (Section (2.3.3.2.2)). For typical aircraft constructions, damping ratios in the range of .01 to .10 are appropriate. Higher values should be used only to represent mechanical damping devices, such as hydraulic or friction dampers in landing gears or viscoelastic engine mounts. Values greater than .05 are probably only justified as representative of the friction damping associated with relative motions of riveted and bolted structure under conditions of severe loading and deformation.

The Euler angles define the initial orientation of the beam axes relative to the airplane, according to the convention shown in figure 2-5. These angles should be interpreted in the following manner. Assume the beam axes are oriented such that x is forward, y to the right and z down. Then rotate  $\text{PSIIJO}$  radians about the z axis, positive nose right, forming a new set of  $x'$  and  $y'$  axes. Then rotate  $\text{THEIJO}$  radians about the new  $y'$  axis, positive nose up. This final position defines the orientation of the beam axes with respect to the airplane. For vertical beams, which are denoted by  $\text{VBM}=1$  in the beam data formatted output, the above procedure is followed with one exception. The initial orientation is such that the x axis is positive up, y axis positive right and z axis positive forward.

It should be noted that during the time history analysis, these angles vary with time and are part of the print output. Any question regarding the current beam orientations should be resolved by examining the current values of the beam orientation Euler angles. These are interpreted the same as the preceding discussion, except that the initial starting orientation is the

ground axes rather than the airplane axes. Since the initial attitude of the vehicle may not be parallel to the ground axes (generally it is not), the time zero value of the beam orientation Euler angles may differ from the angles listed in the MODEL PARAMETERS section of the output. The latter is provided as a definition of beam axes orientations that is independent of vehicle initial conditions (and hence represents a true model parameter), whereas the time varying values represent the actual beam orientation during the analysis.

The load interaction curve load ratios tabulate what proportion of the I and J end beam loads are used to calculate the intermediate loads at the location specified for each load interaction curve.

#### 2.3.3.2 Time History Output

This section of the output prints the time varying response quantities at each print time interval, including time zero. This output consists of the following groups of data:

- Title cards
- Analysis time
- Mass and node point displacements, velocities and accelerations in six directions for all NM lumped masses and NNP node points, in mass axes and ground axes
- Mass impulses (G-sec) based on filtered accelerations
- Internal beam strain forces, total forces (strain + damping) in both beam and mass axes and displacements in six directions for all NB internal beams
- External spring compressions, ground deflections, axial loads, and ground contact loads (3 directions) in ground axes and mass axes for all NSP external springs
- DRI number for all DRI beam elements
- Overall vehicle c.g. translational velocity (3 directions)
- Volume change data, including current volume, current volume/initial volume, and the changes in length of the three lengths of the volume (optional)

- Energy distribution by type
- Energy distribution by mass (kinetic and potential), beam (strain, damping) and spring (crushing, friction)
- Mass energy deviation
- Stress output for internal beam elements, including ratios of current stress/failure stress for two failure theories
- At  $t=0$  only, the differences between actual initial mass accelerations and the theoretically exact values, for all NM masses.
- Mass location plot (time=0 and at specified intervals)

Figure 2-23 illustrates a portion of this output for the sample case, for one typical cut in time. It should be noted that all this output is in inch, pound, second and radian units except XACCEL, YACCEL and ZACCEL. These are in g's. A more detailed description of the specific items printed out at each time follows.

2.3.3.2.1 Mass and Node Point Data. - X, Y and Z are the ground coordinates of mass I or node point I, M. The data for each node point are printed below the data for the mass to which they are attached. XDOT, YDOT and ZDOT are the ground axes components of the translational velocity of mass I or node point I, M. U, V and W are the corresponding components in mass fixed axes. UDOT, VDOT and WDOT (not printed for the node points) are the time derivatives of U, V and W. Note that these are not the translational acceleration components, but are used in Euler's equations of motion. XACCEL, YACCEL and ZACCEL are the body-fixed-axes components of the translational accelerations of mass I or node point I, M, in g units. XACFIL, YACFIL and ZACFIL are the same accelerations after passing through a first order filter with an input cutoff frequency. All the above quantities are positive forward, right and down.

PHI, THETA and PSI are the Euler angles defining the orientations of mass I with respect to the ground. These are positive right-wing-down, nose-up and nose-right, respectively. PHIDOT, THETADOT and PSIDOT are the time derivatives of the same angles. P, Q and R are the body axes components of

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

TIME = 0.050000 NUMBER OF INTEGRATION INTERVALS = 200

MASS DISPLACEMENTS,VELOCITIES,AND ACCELERATIONS

|        | X<br>XDOT<br>U<br>UDOT<br>XACCEL                                           | Y<br>YDOT<br>V<br>VDOT<br>YACCEL  | Z<br>ZDOT<br>W<br>WDOT<br>ZACCEL                                           | PHI<br>PHIDOT<br>P<br>PDOT<br>XACFIL      | THETA<br>THETADOT<br>Q<br>QDOT<br>YACFIL                              | PSI<br>PSIDOT<br>R<br>RDOT<br>ZACFIL      |
|--------|----------------------------------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------|-------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------|
| MASS 1 | 8.00733D 02<br>3.12727D 03<br>3.12181D 03<br>-8.02949D 02<br>-2.04683D 00  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.47442D 02<br>2.42624D 02<br>3.04912D 02<br>3.04496D 02<br>4.47455D -01  | 0.0<br>0.0<br>0.0<br>0.0<br>-2.09191D 00  | 1.99344D -02<br>4.22122D -02<br>4.22122D -02<br>-2.25872D 00<br>0.0   | 0.0<br>0.0<br>0.0<br>0.0<br>5.90159D -01  |
| MASS 2 | 6.99778D 02<br>3.12748D 03<br>3.12193D 03<br>-7.89332D 02<br>-2.00401D 00  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.44129D 02<br>2.47309D 02<br>3.09573D 02<br>1.16746D 02<br>-1.09904D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>-2.06380D 00  | 1.99257D -02<br>5.09840D -02<br>5.09840D -02<br>-1.99716D 00<br>0.0   | 0.0<br>0.0<br>0.0<br>0.0<br>-3.36351D -01 |
| NODE 1 | 7.22192D 02<br>3.13109D 03<br>3.12556D 03<br>-2.37254D 00                  | 0.0<br>0.0<br>0.0<br>0.0          | -7.33622D 01<br>2.46166D 02<br>3.08503D 02<br>-1.73019D -03                |                                           | 0.0                                                                   | -1.81651D -01                             |
| MASS 3 | 5.40001D 02<br>3.12910D 03<br>3.12348D 03<br>-6.44915D 02<br>-1.62012D 00  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.30965D 02<br>2.57322D 02<br>3.18320D 02<br>-2.40675D 02<br>-1.12041D 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.70710D 00  | 1.95106D -02<br>6.14072D -02<br>6.14072D -02<br>-3.72638D 00<br>0.0   | 0.0<br>0.0<br>0.0<br>0.0<br>-9.77880D -01 |
| MASS 4 | 3.80066D 02<br>3.13064D 03<br>3.12517D 03<br>-3.67004D 02<br>-9.63496D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.25204D 02<br>2.61274D 02<br>3.20060D 02<br>-1.34866D 03<br>-3.36983D 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.00582D 00  | 1.87936D -02<br>-1.53279D -02<br>-1.53279D -02<br>-4.68099D 00<br>0.0 | 0.0<br>0.0<br>0.0<br>0.0<br>-2.20052D 00  |
| MASS 5 | 1.80194D 02<br>3.13157D 03<br>3.12613D 03<br>-1.21743D 02<br>-3.36854D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.15644D 02<br>2.54926D 02<br>3.14679D 02<br>-1.88046D 03<br>-4.65848D 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-4.37243D -01 | 1.90969D -02<br>-2.63228D -02<br>-2.63228D -02<br>6.69759D -01<br>0.0 | 0.0<br>0.0<br>0.0<br>0.0<br>-3.73706D 00  |
| NODE 1 | 2.25452D 02<br>3.13108D 03<br>3.12562D 03<br>-3.03620D -01                 | -4.80000D 01<br>0.0<br>0.0<br>0.0 | -9.73046D 01<br>2.56118D 02<br>3.15861D 02<br>-4.73642D 00                 |                                           | 0.0                                                                   | -3.71546D 00                              |
| MASS 6 | 3.99989D 01<br>3.13100D 03<br>3.12351D 03<br>-2.97958D 02<br>-6.91971D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0   | -1.24717D 02<br>2.60638D 02<br>3.38853D 02<br>-1.18411D 03<br>-3.80452D 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-8.22834D -01 | 2.50095D -02<br>9.10641D -02<br>9.10641D -02<br>3.48013D 00<br>0.0    | 0.0<br>0.0<br>0.0<br>0.0<br>-3.03332D 00  |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 1 OF 11)

LT.SAMPLE.DATA  
 21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL  
 TIME = 0.050000 NUMBER OF INTEGRATION INTERVALS = 200

MASS DISPLACEMENTS,VELOCITIES,AND ACCELERATIONS

|         | X<br>XDOT<br>U<br>UDOT<br>XACCEL                                           | Y<br>YDOT<br>V<br>VDOT<br>YACCEL                                             | Z<br>ZDOT<br>W<br>WDOT<br>ZACCEL                                           | PHI<br>PHIDOT<br>P<br>PDOT<br>XACFIL                                     | THETA<br>THETADOT<br>Q<br>QDOT<br>YACFIL                                    | PSI<br>PSI00T<br>R<br>RDOT<br>ZACFIL                                     |
|---------|----------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------|
| MASS 7  | -3.983940 01<br>3.131280 03<br>3.122920 03<br>-3.827260 02<br>-8.911120-01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.181390 02<br>2.687940 02<br>3.528600 02<br>-9.354050 02<br>-3.311950 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.053500 00                                 | 2.688140-02<br>1.098350-01<br>1.098350-01<br>9.953400-01<br>0.0             | 0.0<br>0.0<br>0.0<br>0.0<br>-2.874590 00                                 |
| MASS 8  | -2.002150 02<br>3.129170 03<br>3.119390 03<br>-4.005770 02<br>-8.906860-01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.308110 02<br>2.895010 02<br>3.806860 02<br>-1.679210 03<br>-5.555470 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.139650 00                                 | 2.918380-02<br>1.491320-01<br>1.491320-01<br>-1.057380 01<br>0.0            | 0.0<br>0.0<br>0.0<br>0.0<br>-5.737590 00                                 |
| MASS 9  | -3.610240 02<br>3.122680 03<br>3.111570 03<br>-4.445610 02<br>-8.618950-01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.609320 02<br>3.234030 02<br>4.169160 02<br>-2.127990 03<br>-7.675910 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.338880 00                                 | 2.999740-02<br>2.683250-01<br>2.683250-01<br>5.159320 00<br>0.0             | 0.0<br>0.0<br>0.0<br>0.0<br>-7.123210 00                                 |
| MASS 10 | -5.722700 02<br>3.110500 03<br>3.097690 03<br>-1.469310 03<br>-3.415790 00 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.969340 02<br>3.861750 02<br>4.781810 02<br>1.382340 03<br>1.050080 00   | 0.0<br>0.0<br>0.0<br>0.0<br>-3.833480 00                                 | 2.963800-02<br>3.154010-01<br>3.154010-01<br>2.622170 01<br>0.0             | 0.0<br>0.0<br>0.0<br>0.0<br>1.426810 00                                  |
| MASS 11 | 1.990350 02<br>3.130390 03<br>3.130560 03<br>1.228280 02<br>2.020230-02    | -1.183500 02<br>-2.050980-01<br>-1.605820-01<br>-9.364570 01<br>-1.523900-01 | -1.048120 02<br>2.414930 02<br>2.393010 02<br>-3.413540 03<br>-4.944770 00 | 7.374770-03<br>6.021920-02<br>6.022740-02<br>1.357490 00<br>-1.458410-01 | -7.028300-04<br>-4.808040-01<br>-4.807010-01<br>2.730260 00<br>-3.044300-01 | 5.495340-04<br>1.218200-02<br>1.572750-02<br>8.045280-01<br>-5.591280 00 |
| NODE 1  | 2.264340 02<br>3.129420 03<br>3.129600 03<br>1.793480-02                   | -1.183500 02<br>7.700120-03<br>1.498920-01<br>-1.044090-01                   | -1.027920 02<br>2.546660 02<br>2.524720 02<br>-5.139730 00                 | -1.708650-01                                                             | -2.565280-01                                                                | -5.469540 00                                                             |
| NODE 2  | 1.133370 02<br>3.126500 03<br>3.126640 03<br>1.611230-01                   | -1.317590 02<br>-1.763240 00<br>-2.026350 00<br>-3.548610-01                 | -9.637070 01<br>1.994810 02<br>1.973040 02<br>-4.390540 00                 | -9.497880-02                                                             | -6.767670-01                                                                | -6.179750 00                                                             |
| NODE 3  | 1.133370 02<br>3.126500 03<br>3.126640 03<br>1.611230-01                   | -1.317590 02<br>-1.763240 00<br>-2.026350 00<br>-3.548610-01                 | -9.637070 01<br>1.994810 02<br>1.973040 02<br>-4.390540 00                 | -9.497880-02                                                             | -6.767670-01                                                                | -6.179750 00                                                             |
| MASS 12 | 1.480750 02<br>3.133900 03                                                 | -2.717770 02<br>-5.139860-01                                                 | -1.203430 02<br>2.470870 02                                                | 6.521040-03<br>-3.422350-01                                              | 5.808480-03<br>-3.905980-01                                                 | 6.553300-04<br>-5.082670-02                                              |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 2 OF 11)

|        |              |              |              |              |              |              |
|--------|--------------|--------------|--------------|--------------|--------------|--------------|
|        | 3.13241D 03  | -8.37753D-01 | 2.65297D 02  | -3.41940D-01 | -3.90922D-01 | -4.82777D-02 |
|        | -1.81794D 02 | 3.33001D 01  | -3.05037D 03 | -5.03209D 00 | 5.78854D 00  | -2.78703D 00 |
|        | -7.39754D-01 | -7.04915D-02 | -4.72943D 00 | -8.31290D-01 | -1.67644D-01 | -4.40509D 00 |
| NODE 1 | 1.88624D 02  | -3.21572D 02 | -1.17403D 02 |              |              |              |
|        | 3.13032D 03  | -1.48885D 00 | 2.79963D 02  |              |              |              |
|        | 3.12864D 03  | -1.59600D 00 | 2.98158D 02  |              |              |              |
|        | -1.08020D 00 | -2.87691D-01 | -4.69070D 00 | -1.39422D 00 | -4.53750D-01 | -2.67885D 00 |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 3 OF 11)

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

TIME = 0.050000 NUMBER OF INTEGRATION INTERVALS = 200

MASS DISPLACEMENTS,VELOCITIES,AND ACCELERATIONS

|         | X<br>XDOT<br>U<br>UDOT<br>XACCEL                                           | Y<br>YDOT<br>V<br>VDOT<br>YACCEL                                               | Z<br>ZDOT<br>W<br>WDOT<br>ZACCEL                                           | PHI<br>PHIDOT<br>P<br>PDOT<br>XACFIL                                             | THETA<br>THETA00T<br>Q<br>QDOT<br>YACFIL                                       | PSI<br>PSIDOT<br>R<br>RDOT<br>ZACFIL                                            |
|---------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| MASS 13 | 5.68609D 01<br>3.13233D 03<br>3.12952D 03<br>-7.19873D 02<br>-1.95540D 00  | -4.30516D 02<br>-2.66183D 00<br>-1.24842D 00<br>1.41329D 02<br>3.76586D -01    | -1.38101D 02<br>2.78435D 02<br>3.08437D 02<br>-2.52929D 03<br>-5.63484D 00 | 1.46830D -02<br>-3.30598D -01<br>-3.30283D -01<br>-4.44241D 00<br>-1.70504D 00   | 9.56579D -03<br>-1.12590D -01<br>-1.13062D -01<br>-1.32356D 01<br>1.96309D -01 | 9.94485D -04<br>-3.29212D -02<br>-3.12630D -02<br>-2.11951D 00<br>-5.68715D 00  |
| MASS 14 | -4.53884D 01<br>3.12414D 03<br>3.11908D 03<br>-9.17819D 02<br>-2.34132D 00 | -5.82934D 02<br>-4.20851D 00<br>-7.74854D 00<br>-2.01204D 01<br>-5.26508D -01  | -1.63826D 02<br>3.25967D 02<br>3.71280D 02<br>2.34639D 02<br>2.91737D -01  | 2.52866D -02<br>-1.54595D -01<br>-1.53500D -01<br>-1.52956D 01<br>-1.99936D 00   | 1.44151D -02<br>4.14384D -02<br>3.95047D -02<br>-4.72064D 00<br>-6.86141D -01  | 4.13714D -03<br>-7.59635D -02<br>-7.69790D -02<br>-1.26272D 00<br>4.86455D -01  |
| NODE 1  | 6.11726D 00<br>3.12741D 03<br>3.12244D 03<br>-2.51907D 00                  | -5.51433D 02<br>-4.43869D 00<br>-8.16732D 00<br>2.13545D -01                   | -1.40772D 02<br>3.18991D 02<br>3.64360D 02<br>-3.44339D -01                |                                                                                  | -9.33042D -02                                                                  | -2.38063D -01                                                                   |
| MASS 15 | -1.11481D 02<br>3.11651D 03<br>3.11181D 03<br>-1.05577D 03<br>-2.66163D 00 | -7.40176D 02<br>-6.43979D -01<br>-8.69146D 00<br>-1.23406D 02<br>-6.09812D -01 | -1.77794D 02<br>3.25578D 02<br>3.67636D 02<br>5.21904D 02<br>7.22884D -01  | 1.77534D -02<br>7.86632D -02<br>7.90028D -02<br>3.27123D 00<br>-2.38896D 00      | 1.34372D -02<br>7.82882D -02<br>7.78274D -02<br>-4.75940D 00<br>-5.68097D -01  | 4.67595D -03<br>-2.52688D -02<br>-2.66524D -02<br>-1.46156D -01<br>3.61198D -01 |
| NODE 1  | -1.46960D 02<br>3.11606D 03<br>3.11133D 03<br>-2.58450D 00                 | -7.40226D 02<br>7.38190D -01<br>-7.25806D 00<br>-5.44381D -01                  | -1.83518D 02<br>3.28365D 02<br>3.70391D 02<br>2.86860D -01                 | -2.33163D 00                                                                     | -4.51947D -01                                                                  | 3.90869D -02                                                                    |
| NODE 2  | -1.11481D 02<br>3.11651D 03<br>3.11181D 03<br>-2.66163D 00                 | -7.40176D 02<br>-6.43978D -01<br>-8.69146D 00<br>-6.09812D -01                 | -1.77794D 02<br>3.25578D 02<br>3.67636D 02<br>7.22884D -01                 | -2.38896D 00                                                                     | -5.68097D -01                                                                  | 3.61198D -01                                                                    |
| MASS 16 | 2.81845D 02<br>3.13459D 03<br>3.11273D 03<br>-3.63580D 02<br>-8.47164D -01 | -3.21872D 02<br>1.43295D 00<br>-2.00995D 02<br>2.18718D 01<br>-8.51087D -02    | -8.45587D 01<br>2.96776D 02<br>4.29279D 02<br>1.15656D 03<br>2.24283D 00   | -7.57106D -02<br>-8.00393D -02<br>-7.83605D -02<br>-1.45165D 01<br>-7.21390D -01 | 4.69176D -02<br>9.60624D -02<br>9.84917D -02<br>-7.03121D 00<br>-4.95140D -02  | 5.40620D -02<br>-3.57953D -02<br>-2.83874D -02<br>-1.13756D 00<br>2.46003D 00   |
| NODE 1  | 2.64721D 02<br>3.13153D 03<br>3.10947D 03<br>-2.13552D -01                 | -3.21524D 02<br>-8.73592D -01<br>-2.03231D 02<br>-1.32329D 00                  | -1.18140D 02<br>2.98315D 02<br>4.30501D 02<br>1.81659D 00                  | -7.53961D -01                                                                    | -5.36272D -01                                                                  | 2.42082D 00                                                                     |
| NODE 2  | 2.81845D 02<br>3.13459D 03<br>3.11273D 03                                  | -3.21872D 02<br>1.43295D 00<br>-2.00995D 02                                    | -8.45587D 01<br>2.96776D 02<br>4.29279D 02                                 |                                                                                  |                                                                                |                                                                                 |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 4 OF 11)

-8.47164D-01 -8.51087D-02 2.24283D 00 -7.21390D-01 -4.95140D-02 2.46003D 00

2-170

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 5 OF 11)

LT.SAMPLE.DATA  
21 MASS/28 BEAM TEST CASE ONLY-NOT VALID AIRPLANE MODEL

TIME = 0.050000 NUMBER OF INTEGRATION INTERVALS = 200

MASS DISPLACEMENTS,VELOCITIES,AND ACCELERATIONS

|         | X<br>XDOT<br>U<br>UDOT<br>XACCEL                                           | Y<br>YDOT<br>V<br>VDOT<br>YACCEL                                             | Z<br>ZDOT<br>W<br>WDOT<br>ZACCEL                                           | PHI<br>PHIDOT<br>P<br>PDOT<br>XACFIL                                            | THETA<br>THETADOT<br>Q<br>QDOT<br>YACFIL                                     | PSI<br>PSIDOT<br>R<br>RDOT<br>ZACFIL                                        |
|---------|----------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| MASS 17 | 9.82658D 01<br>3.13561D 03<br>3.11161D 03<br>-9.80839D 02<br>-2.25486D 00  | -5.51659D 02<br>-1.95471D 00<br>-2.18620D 02<br>-2.50530D 02<br>8.82634D -03 | -1.09650D 02<br>3.09650D 02<br>4.45013D 02<br>5.69162D 02<br>-2.03297D -01 | -6.29956D -02<br>-1.00923D -01<br>-1.03448D -01<br>4.47761D -01<br>-1.45298D 00 | 4.74938D -02<br>2.19182D -01<br>2.15403D -01<br>4.58497D 00<br>-9.17273D -02 | 6.00626D -02<br>5.31816D -02<br>6.68146D -02<br>1.19772D 00<br>1.88957D -01 |
| NODE 1  | 8.22150D 01<br>3.12873D 03<br>3.10432D 03<br>-2.65264D 00                  | -5.51003D 02<br>-6.54477D 00<br>-2.22969D 02<br>1.44946D -03                 | -1.41812D 02<br>3.12990D 02<br>4.47742D 02<br>-2.22948D -02                | -1.90514D 00<br>-1.79261D -01<br>3.84171D -01                                   |                                                                              |                                                                             |
| MASS 18 | 1.11241D 02<br>3.13098D 03<br>3.12828D 03<br>1.09036D 04<br>2.81652D 01    | -1.32428D 02<br>1.51657D 01<br>1.36513D 01<br>4.17784D 02<br>1.04469D 00     | -1.48176D 01<br>-1.09811D 01<br>-1.30605D 02<br>1.65221D 04<br>4.08242D 01 | 8.69036D -03<br>-2.86731D -01<br>-2.86371D -01<br>-9.44067D 00<br>2.81838D 01   | -3.81786D -02<br>2.42899D -01<br>2.42972D -01<br>1.83090D 02<br>2.51583D 00  | 1.21342D -04<br>9.42868D -03<br>7.31059D -03<br>2.39094D 00<br>2.63641D 01  |
| MASS 19 | 7.22352D 02<br>3.03863D 03<br>3.03969D 03<br>-2.18524D 03<br>-6.42837D 00  | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.21246D 01<br>1.48077D 02<br>1.24360D 02<br>-9.44612D 03<br>-5.72139D 00 | 0.0<br>0.0<br>0.0<br>0.0<br>-1.10172D 01                                        | -7.80386D -03<br>-2.38105D 00<br>-2.38105D 00<br>-3.95043D 01<br>0.0         | 0.0<br>0.0<br>0.0<br>0.0<br>-6.89077D 00                                    |
| MASS 20 | 6.99457D 02<br>3.13462D 03<br>3.12955D 03<br>-2.31845D 02<br>-5.45052D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.64051D 02<br>2.48923D 02<br>3.06162D 02<br>2.42072D 02<br>5.89784D -02  | 0.0<br>0.0<br>0.0<br>0.0<br>-4.19059D -01                                       | 1.82746D -02<br>7.00760D -02<br>7.00760D -02<br>-5.21308D 00<br>0.0          | 0.0<br>0.0<br>0.0<br>0.0<br>1.54281D -01                                    |
| MASS 21 | 6.99436D 02<br>3.13504D 03<br>3.12933D 03<br>-1.91988D 02<br>-4.35480D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>0.0                                              | -1.63954D 02<br>2.51219D 02<br>3.14431D 02<br>9.88232D 01<br>-3.60014D -01 | 0.0<br>0.0<br>0.0<br>0.0<br>-3.30037D -01                                       | 2.01807D -02<br>7.59870D -02<br>7.59870D -02<br>-4.23777D 00<br>0.0          | 0.0<br>0.0<br>0.0<br>0.0<br>-2.72744D -01                                   |

NO MASS IMPULSE DATA REQUESTED

BEAM FORCES

STRAIN FORCES

| I | J | M | N | FX         | FY  | FZ          | MX  | MYI         | MYJ        | MZI | MZJ |
|---|---|---|---|------------|-----|-------------|-----|-------------|------------|-----|-----|
| 1 | 2 | 0 | 0 | 3.2204D 03 | 0.0 | -8.0977D 02 | 0.0 | -9.4846D 04 | 1.3052D 04 | 0.0 | 0.0 |
| 2 | 3 | 0 | 0 | 1.4479D 04 | 0.0 | 2.4521D 04  | 0.0 | -2.9057D 04 | 3.9602D 06 | 0.0 | 0.0 |
| 3 | 4 | 0 | 0 | 3.7752D 04 | 0.0 | -5.4781D 03 | 0.0 | -4.2844D 06 | 3.4080D 06 | 0.0 | 0.0 |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 6 OF 11)

|    |    |   |   |             |             |             |             |             |             |             |             |
|----|----|---|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 4  | 5  | 0 | 0 | 4.8613D 04  | 0.0         | -5.7623D 04 | 0.0         | -3.7026D 06 | -7.8272D 06 | 0.0         | 0.0         |
| 5  | 6  | 0 | 0 | -1.7876D 05 | 0.0         | 1.7085D 05  | 0.0         | 6.0795D 07  | -3.6789D 07 | 0.0         | 0.0         |
| 6  | 7  | 0 | 0 | -1.2388D 05 | 0.0         | 1.6789D 05  | 0.0         | 3.8496D 07  | -2.5045D 07 | 0.0         | 0.0         |
| 7  | 8  | 0 | 0 | -1.3734D 05 | 0.0         | 1.0991D 05  | 0.0         | 2.5150D 07  | -7.4656D 06 | 0.0         | 0.0         |
| 8  | 9  | 0 | 0 | -1.2596D 05 | 0.0         | 3.3555D 04  | 0.0         | 5.5220D 06  | -3.1990D 04 | 0.0         | 0.0         |
| 9  | 10 | 0 | 0 | -2.4314D 04 | 0.0         | 1.2374D 04  | 0.0         | -1.8667D 05 | 2.8385D 06  | 0.0         | 0.0         |
| 5  | 11 | 0 | 1 | -5.0823D 04 | -1.0766D 05 | -1.7100D 05 | 3.0071D 07  | -1.0523D 07 | -1.1320D 07 | 2.1650D 07  | -7.8975D 06 |
| 11 | 12 | 1 | 0 | 9.0811D 03  | -6.0953D 03 | 3.0186D 04  | -3.0715D 06 | 5.0595D 06  | 1.6807D 05  | 3.4409D 06  | -2.3856D 06 |
| 12 | 13 | 0 | 0 | -4.5121D 03 | -1.4623D 04 | 1.7306D 03  | -1.5069D 06 | -1.1718D 06 | 1.4900D 06  | 2.8232D 06  | -1.3321D 05 |
| 13 | 14 | 0 | 0 | 2.3996D 03  | -2.4318D 04 | -1.1922D 04 | -1.0093D 06 | -1.7605D 06 | -4.4925D 05 | 3.1703D 05  | 4.1901D 06  |
| 14 | 15 | 0 | 1 | 5.9501D 04  | 4.2940D 04  | 1.5548D 03  | 2.6171D 05  | 5.1821D 05  | -2.2547D 05 | -4.5155D 06 | -3.5691D 06 |
| 12 | 16 | 1 | 1 | 3.7516D 03  | -5.4960D 02 | -8.1484D 03 | 5.0611D 04  | -9.9520D 05 | 3.7504D 05  | 1.3341D 04  | 2.8486D 04  |
| 14 | 17 | 1 | 1 | 1.1199D 04  | 8.3251D 02  | 5.1068D 03  | -2.0717D 04 | 2.4664D 05  | 1.4199D 05  | -6.8623D 04 | 5.2726D 03  |
| 11 | 18 | 2 | 0 | -1.9229D 04 | 2.0351D 03  | -5.4773D 04 | -2.2337D 03 | -5.3310D 06 | 5.7595D 05  | -2.0194D 05 | 1.4920D 04  |
| 11 | 18 | 3 | 0 | -2.9907D 01 | 2.0351D 03  | -5.4773D 04 | -2.2337D 03 | -5.3310D 06 | 5.7595D 05  | -2.0194D 05 | 1.4920D 04  |
| 2  | 19 | 1 | 0 | -3.5208D 03 | 0.0         | -9.6641D 03 | 0.0         | -7.2640D 05 | 1.2916D 05  | 0.0         | 0.0         |
| 6  | 12 | 0 | 0 | 1.7741D 04  | 5.6656D 03  | -5.3383D 03 | 1.2634D 06  | -1.5613D 06 | 0.0         | -1.6571D 06 | 0.0         |
| 9  | 14 | 0 | 0 | 9.3714D 04  | 0.0         | -4.1581D 03 | 7.0787D 05  | -1.8226D 06 | -9.3357D 05 | 0.0         | 0.0         |
| 12 | 0  | 0 | 0 | -3.4298D 04 | 0.0         | 0.0         | 0.0         | -4.7960D 05 | 4.7960D 05  | 5.0704D 05  | -5.0704D 05 |
| 2  | 20 | 0 | 0 | -7.7092D 02 | 0.0         | 9.0175D 01  | 0.0         | 9.8263D 02  | 8.1450D 02  | 0.0         | 0.0         |
| 2  | 21 | 0 | 0 | -1.1271D 03 | 0.0         | 8.4212D 01  | 0.0         | 8.1578D 02  | 8.5485D 02  | 0.0         | 0.0         |
| 15 | 16 | 0 | 0 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 15 | 16 | 2 | 2 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 15 | 0  | 0 | 0 | 0.0         | 0.0         | 0.0         | 0.0         | -2.8606D 05 | 2.8606D 05  | 5.0542D 05  | -5.0542D 05 |
| 15 | 0  | 2 | 0 | -7.4156D 04 | 0.0         | 0.0         | 0.0         | -2.8606D 05 | 2.8606D 05  | 5.0542D 05  | -5.0542D 05 |

## TOTAL FORCES (STRAIN+DAMPING)

| I  | J  | M | N | FX          | FY          | FZ          | MX          | MYI         | MYJ         | MZI         | MZJ         |
|----|----|---|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 1  | 2  | 0 | 0 | 3.2023D 03  | 0.0         | -8.2173D 02 | 0.0         | -9.0349D 04 | 7.3468D 03  | 0.0         | 0.0         |
| 2  | 3  | 0 | 0 | 1.4023D 04  | 0.0         | 2.5080D 04  | 0.0         | 2.7071D 04  | 3.9937D 06  | 0.0         | 0.0         |
| 3  | 4  | 0 | 0 | 3.6859D 04  | 0.0         | -5.3162D 03 | 0.0         | -4.3550D 06 | 3.5045D 06  | 0.0         | 0.0         |
| 4  | 5  | 0 | 0 | 4.7638D 04  | 0.0         | -5.8597D 04 | 0.0         | -3.8168D 06 | -7.9078D 06 | 0.0         | 0.0         |
| 5  | 6  | 0 | 0 | -1.7861D 05 | 0.0         | 1.7177D 05  | 0.0         | 6.1010D 07  | -3.6874D 07 | 0.0         | 0.0         |
| 6  | 7  | 0 | 0 | -1.2353D 05 | 0.0         | 1.6815D 05  | 0.0         | 3.8531D 07  | -2.5059D 07 | 0.0         | 0.0         |
| 7  | 8  | 0 | 0 | -1.3706D 05 | 0.0         | 1.0990D 05  | 0.0         | 2.5199D 07  | -7.5170D 06 | 0.0         | 0.0         |
| 8  | 9  | 0 | 0 | -1.2589D 05 | 0.0         | 3.3667D 04  | 0.0         | 5.6137D 06  | -1.0534D 05 | 0.0         | 0.0         |
| 9  | 10 | 0 | 0 | -2.3878D 04 | 0.0         | 1.2675D 04  | 0.0         | -1.1503D 05 | 2.8314D 06  | 0.0         | 0.0         |
| 5  | 11 | 0 | 1 | -5.1516D 04 | -1.0715D 05 | -1.7360D 05 | 3.0523D 07  | -1.0643D 07 | -1.1531D 07 | 2.1668D 07  | -7.9799D 06 |
| 11 | 12 | 1 | 0 | 8.5379D 03  | -6.4369D 03 | 3.0817D 04  | -3.0110D 06 | 5.2422D 06  | 9.4718D 04  | 3.5472D 06  | -2.4328D 06 |
| 12 | 13 | 0 | 0 | -4.7185D 03 | -1.4612D 04 | 1.7867D 03  | -1.5679D 06 | -1.1445D 06 | 1.4730D 06  | 2.8275D 06  | -1.3966D 05 |
| 13 | 14 | 0 | 0 | 2.1133D 03  | -2.4449D 04 | -1.1482D 04 | -1.0341D 06 | -1.7252D 06 | -4.0298D 05 | 3.5713D 05  | 4.1744D 06  |
| 14 | 15 | 0 | 1 | 5.9498D 04  | 4.2977D 04  | 1.3996D 03  | 2.5312D 05  | 4.9538D 05  | -2.3186D 05 | -4.5243D 06 | -3.5671D 06 |
| 12 | 16 | 1 | 1 | 4.0782D 03  | -3.2687D 02 | -7.1406D 03 | 5.5518D 04  | -9.9059D 05 | 4.4712D 05  | 4.4515D 03  | 2.0426D 04  |
| 14 | 17 | 1 | 1 | 1.1547D 04  | 7.7257D 02  | -5.5299D 03 | -2.0099D 04 | 2.5324D 05  | 1.6760D 05  | -6.9226D 04 | 1.0438D 04  |
| 11 | 18 | 2 | 0 | -2.4626D 05 | 1.8193D 03  | -5.4299D 04 | -2.4402D 03 | -5.2900D 06 | 5.7359D 05  | -1.8431D 05 | 1.4894D 04  |
| 11 | 18 | 3 | 0 | -2.9907D 01 | 1.8193D 03  | -5.4299D 04 | -2.4402D 03 | -5.2900D 06 | 5.7359D 05  | -1.8431D 05 | 1.4894D 04  |
| 2  | 19 | 1 | 0 | -3.6894D 04 | 0.0         | -9.9288D 03 | 0.0         | -7.4520D 05 | 1.3176D 05  | 0.0         | 0.0         |
| 6  | 12 | 0 | 0 | 1.8279D 04  | 5.7127D 03  | -5.3578D 03 | 1.3232D 06  | -1.5671D 06 | 0.0         | -1.6709D 06 | 0.0         |
| 9  | 14 | 0 | 0 | 9.4547D 04  | 0.0         | -4.1329D 03 | 7.1606D 05  | -1.7802D 06 | -9.5926D 05 | 0.0         | 0.0         |
| 12 | 0  | 0 | 0 | -3.3977D 04 | 0.0         | 0.0         | 0.0         | -3.5193D 05 | 3.5193D 05  | 4.3108D 05  | -4.3108D 05 |
| 2  | 20 | 0 | 0 | -9.3972D 02 | 0.0         | 5.2880D 02  | 0.0         | 5.3234D 03  | 5.2131D 03  | 0.0         | 0.0         |
| 2  | 21 | 0 | 0 | -1.3586D 03 | 0.0         | 4.1932D 02  | 0.0         | 4.0772D 03  | 4.2378D 03  | 0.0         | 0.0         |
| 15 | 16 | 0 | 0 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 15 | 16 | 2 | 2 | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         | 0.0         |
| 15 | 0  | 0 | 0 | 0.0         | 0.0         | 0.0         | 0.0         | -2.9991D 05 | 2.9991D 05  | 4.9331D 05  | -4.9331D 05 |
| 15 | 0  | 2 | 0 | -7.4156D 04 | 0.0         | 0.0         | 0.0         | -2.9991D 05 | 2.9991D 05  | 4.9331D 05  | -4.9331D 05 |

COMPONENTS OF TOTAL BEAM FORCES ACTING ON MASSES I AND J

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 7 OF 11)

LOADS ARE THOSE ACTING ON THE MASS, IN MASS AXES, +FWD,RT,DN  
FOR EACH BEAM, FIRST LINE IS MASS I, SECOND LINE IS MASS J

| I  | J  | M | N | FX                        | FY                         | FZ                         | HX                         | MY                         | MZ                         |
|----|----|---|---|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| 1  | 2  | 0 | 0 | -3.2126D 03<br>3.2126D 03 | 0.0<br>0.0                 | -7.8047D 02<br>7.8044D 02  | 0.0<br>0.0                 | -9.0349D 04<br>7.3468D 03  | 0.0<br>0.0                 |
| 2  | 3  | 0 | 0 | -1.2434D 04<br>1.2424D 04 | 0.0<br>0.0                 | 2.5904D 04<br>-2.5909D 04  | 0.0<br>0.0                 | 2.7071D 04<br>3.9937D 06   | 0.0<br>0.0                 |
| 3  | 4  | 0 | 0 | -3.6942D 04<br>3.6945D 04 | 0.0<br>0.0                 | -4.7073D 03<br>4.6809D 03  | 0.0<br>0.0                 | -4.3550D 06<br>3.5045D 06  | 0.0<br>0.0                 |
| 4  | 5  | 0 | 0 | -4.9317D 04<br>4.9300D 04 | 0.0<br>0.0                 | -5.7191D 04<br>5.7206D 04  | 0.0<br>0.0                 | -3.8168D 06<br>-7.9078D 06 | 0.0<br>0.0                 |
| 5  | 6  | 0 | 0 | 1.6362D 05<br>-1.6251D 05 | 0.0<br>0.0                 | 1.8610D 05<br>-1.8707D 05  | 0.0<br>0.0                 | 6.1010D 07<br>-3.6874D 07  | 0.0<br>0.0                 |
| 6  | 7  | 0 | 0 | 1.3294D 05<br>-1.3264D 05 | 0.0<br>0.0                 | 1.6081D 05<br>-1.6106D 05  | 0.0<br>0.0                 | 3.8531D 07<br>-2.5059D 07  | 0.0<br>0.0                 |
| 7  | 8  | 0 | 0 | 1.2470D 05<br>-1.2441D 05 | 0.0<br>0.0                 | 1.2375D 05<br>-1.2404D 05  | 0.0<br>0.0                 | 2.5199D 07<br>-7.5170D 06  | 0.0<br>0.0                 |
| 8  | 9  | 0 | 0 | 1.1585D 05<br>-1.1580D 05 | 0.0<br>0.0                 | 5.9675D 04<br>-5.9769D 04  | 0.0<br>0.0                 | 5.6137D 06<br>-1.0534D 05  | 0.0<br>0.0                 |
| 9  | 10 | 0 | 0 | 2.0904D 04<br>-2.0910D 04 | 0.0<br>0.0                 | 1.7141D 04<br>-1.7134D 04  | 0.0<br>0.0                 | -1.1503D 05<br>2.8314D 06  | 0.0<br>0.0                 |
| 5  | 11 | 0 | 1 | -1.0991D 05<br>1.1345D 05 | -7.9150D 03<br>9.1581D 03  | -1.7925D 05<br>1.7697D 05  | 2.1963D 07<br>-5.4247D 05  | -2.6509D 07<br>2.8656D 07  | -1.8147D 07<br>4.7894D 06  |
| 11 | 12 | 1 | 0 | -1.0846D 04<br>1.1041D 04 | -7.2746D 03<br>7.2994D 03  | 2.9891D 04<br>-2.9814D 04  | -3.1465D 06<br>-1.5609D 06 | 4.5160D 06<br>-2.8357D 06  | -3.4309D 06<br>2.1251D 06  |
| 12 | 13 | 0 | 0 | -1.0411D 04<br>1.0415D 04 | 1.1198D 04<br>-1.1219D 04  | 2.2769D 03<br>-2.1463D 03  | 1.8929D 06<br>-2.0613D 06  | 1.0193D 06<br>-6.3144D 05  | -2.6723D 06<br>-5.0260D 03 |
| 13 | 14 | 0 | 0 | -2.0702D 04<br>2.0605D 04 | 1.3132D 04<br>-1.3072D 04  | -1.1534D 04<br>1.1774D 04  | 2.0292D 06<br>7.2448D 04   | -6.6070D 04<br>-6.5108D 05 | -2.2643D 05<br>-4.2694D 06 |
| 14 | 15 | 0 | 1 | 3.7826D 03<br>-3.7376D 03 | -7.3206D 04<br>7.3176D 04  | -3.9466D 03<br>4.5021D 03  | -7.8554D 05<br>6.0526D 05  | -2.8357D 05<br>-2.8216D 04 | 4.4812D 06<br>9.8394D 05   |
| 12 | 16 | 1 | 1 | 4.0505D 03<br>-4.3214D 03 | -3.1135D 02<br>-5.1590D 01 | -7.1570D 03<br>7.0035D 03  | 4.1307D 05<br>-5.3018D 04  | 1.2946D 06<br>-1.8392D 05  | 1.8662D 05<br>-4.3435D 04  |
| 14 | 17 | 1 | 1 | 1.1542D 04<br>-1.1370D 04 | 7.9513D 02<br>3.6937D 02   | 5.5375D 03<br>-5.9239D 03  | 1.3849D 05<br>1.7138D 03   | -2.7184D 05<br>1.1959D 05  | -2.5773D 05<br>1.1744D 04  |
| 11 | 18 | 2 | 0 | -4.8129D 04<br>5.7370D 04 | -1.6132D 03<br>1.9422D 03  | -2.4754D 05<br>2.4557D 05  | 3.4899D 06<br>-1.4902D 04  | -2.6918D 07<br>5.7359D 05  | -5.0398D 05<br>2.3482D 03  |
| 11 | 18 | 3 | 0 | -5.4282D 04<br>5.4295D 04 | -1.8154D 03<br>1.8228D 03  | -1.3882D 03<br>-6.4904D 02 | 2.1811D 05<br>-1.4902D 04  | -5.8758D 06<br>5.7359D 05  | -5.6847D 05<br>2.3482D 03  |
| 2  | 19 | 1 | 0 | -9.2882D 03               | 0.0                        | -3.7061D 04                | 0.0                        | -6.2824D 05                | 0.0                        |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 8 OF 11)



|    |    |   |   |             |             |             |             |            |             |             |              |      |      |
|----|----|---|---|-------------|-------------|-------------|-------------|------------|-------------|-------------|--------------|------|------|
| 15 | 16 | 2 | 2 | 7.4813D-02  | -7.9765D-01 | 1.8515D 00  | -3.2985D-01 | 2.5063D-01 | -1.3958D-01 | -1.5407D 00 | 2.0390D-01 0 | -9.2 | 46.8 |
| 15 | 0  | 0 | 0 | -8.4888D-01 | -6.9222D 00 | -2.6120D 01 | 0.0         | 2.0219D 00 | -5.3585D-01 | 0.0         | 0.0          | 0    | 90.0 |
| 15 | 0  | 2 | 0 | -8.4888D-01 | -6.9222D 00 | -2.6120D 01 | 0.0         | 2.0219D 00 | -5.3585D-01 | 0.0         | 0.0          | 0    | 90.0 |

# EXTERNAL SPRINGS

| MASS<br>I | SPRING<br>K | SPRING<br>M | SPRING<br>COMPRESSION | GROUND<br>DEFLECTION | SPRING<br>COMPRESSION<br>LOAD | GROUND CONTACT POINT LOADS<br>IN GROUND OR SLOPE AXES |             |                                 | GROUND CONTACT POINT LOADS<br>IN MASS AXES |                |               |
|-----------|-------------|-------------|-----------------------|----------------------|-------------------------------|-------------------------------------------------------|-------------|---------------------------------|--------------------------------------------|----------------|---------------|
|           |             |             |                       |                      |                               | X(+ AFT OR<br>DOWN SLOPE)                             | Y(+ LEFT)   | Z(+ UP OR NOR-<br>MAL TO SLOPE) | X<br>(+ FORWARD)                           | Y<br>(+ RIGHT) | Z<br>(+ DOWN) |
| 1         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 2         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 3         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 4         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 5         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 6         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 7         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 8         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 9         | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 10        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 11        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 12        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 13        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 14        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 15        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 16        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 17        | 3           | 0           | 0.0                   | 0.0                  | 0.0                           | 0.0                                                   | 0.0         | 0.0                             | 0.0                                        | 0.0            | 0.0           |
| 18        | 3           | 0           | 4.82097D 00           | 0.0                  | 1.70589D 05                   | 5.11364D 04                                           | 3.16689D 02 | 1.70458D 05                     | -5.76055D 04                               | -1.77376D 03   | -1.68373D 05  |
| 19        | 3           | 0           | 4.32507D 00           | 0.0                  | 3.84812D 04                   | 1.15440D 04                                           | 0.0         | 3.84800D 04                     | -1.18439D 04                               | 0.0            | -3.83888D 04  |

DRI RESULTS: MASS NO. AND DRI VALUE

|      |             |
|------|-------------|
| MASS | DRI         |
| 21   | 1.12790D 00 |

VEHICLE C.G. TRANSLATIONAL VELOCITIES, GROUND AXES, BASED ON SYSTEM LINEAR MOMENTUM

| XDOT<br>(+FWD) | YDOT<br>(+RIGHT) | ZDOT<br>(+DOWN) |
|----------------|------------------|-----------------|
| 3.12984D 03    | 0.0              | 2.67220D 02     |

## ENERGY DISTRIBUTION

| TOTAL<br>ENERGY            | KINETIC<br>ENERGY | POTENTIAL<br>ENERGY+ | STRAIN<br>ENERGY | DAMPING<br>ENERGY | CRUSHING<br>ENERGY | FRICTION<br>ENERGY |
|----------------------------|-------------------|----------------------|------------------|-------------------|--------------------|--------------------|
| 2.42972D 09                | 2.38520D 09       | 2.50557D 07          | 1.68450D 06      | 2.27838D 06       | 9.07538D 05        | 1.45927D 07        |
| PERCENT OF<br>TOTAL ENERGY | 98.168            | 1.031                | 0.069            | 0.094             | 0.037              | 0.601              |

INTERNAL  
BEAM

EXTERNAL  
SPRING

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 10 OF 11)

| MASS | KINETIC<br>ENERGY | PCT  | POTENTIAL<br>ENERGY+ | PCT  | IJ | I  | J  | M | N | STRAIN<br>ENERGY | PCT  | DAMPING<br>ENERGY | PCT  | I K M  | CRUSHING<br>ENERGY | PCT  | FRICTION<br>ENERGY | PCT  |
|------|-------------------|------|----------------------|------|----|----|----|---|---|------------------|------|-------------------|------|--------|--------------------|------|--------------------|------|
| 1    | 2.0200 07         | 0.8  | 2.3520 05            | 0.9  | 1  | 1  | 2  | 0 | 0 | 1.9830 00        | 0.0  | 2.4280-01         | 0.0  | 1 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 2    | 1.1560 08         | 4.8  | 1.3160 06            | 5.3  | 2  | 2  | 3  | 0 | 0 | 5.9850 02        | 0.0  | 3.3240 01         | 0.0  | 2 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 3    | 1.9560 08         | 8.2  | 2.0360 06            | 8.1  | 3  | 3  | 4  | 0 | 0 | 1.7090 03        | 0.1  | 8.8850 01         | 0.0  | 3 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 4    | 1.6740 08         | 7.0  | 1.7180 06            | 6.9  | 4  | 4  | 5  | 0 | 0 | 1.5370 03        | 0.1  | 8.1720 01         | 0.0  | 4 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 5    | 2.7820 08         | 11.7 | 2.6500 06            | 10.6 | 5  | 5  | 6  | 0 | 0 | 1.5100 05        | 9.0  | 6.4030 02         | 0.0  | 5 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 6    | 1.0100 08         | 4.2  | 1.0220 06            | 4.1  | 6  | 6  | 7  | 0 | 0 | 3.1280 04        | 1.9  | 8.4820 01         | 0.0  | 6 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 7    | 1.1760 08         | 4.9  | 1.1300 06            | 4.5  | 7  | 7  | 8  | 0 | 0 | 2.3800 04        | 1.4  | 1.9270 02         | 0.0  | 7 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 8    | 1.2710 08         | 5.3  | 1.3170 06            | 5.3  | 8  | 8  | 9  | 0 | 0 | 5.0180 03        | 0.3  | 1.2050 02         | 0.0  | 8 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 9    | 7.2800 07         | 3.1  | 9.2810 05            | 3.7  | 9  | 9  | 10 | 0 | 0 | 6.0270 02        | 0.0  | 6.0360 01         | 0.0  | 9 3 0  | 0.0                | 0.0  | 0.0                | 0.0  |
| 10   | 7.8590 07         | 3.3  | 7.6520 05            | 3.1  | 10 | 5  | 11 | 0 | 1 | 6.9280 05        | 41.1 | 1.5870 04         | 0.7  | 10 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 11   | 2.4700 08         | 10.4 | 2.4850 06            | 9.9  | 11 | 11 | 12 | 1 | 0 | 3.0780 04        | 1.8  | 5.2440 03         | 0.2  | 11 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 12   | 2.5770 08         | 10.8 | 3.1790 06            | 12.7 | 12 | 12 | 13 | 0 | 0 | 1.8920 04        | 1.1  | 1.8830 03         | 0.1  | 12 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 13   | 1.3540 08         | 5.7  | 1.9120 06            | 7.6  | 13 | 13 | 14 | 0 | 0 | 2.2940 04        | 1.4  | 7.4420 02         | 0.0  | 13 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 14   | 9.6080 07         | 4.0  | 1.4870 06            | 5.9  | 14 | 14 | 15 | 0 | 1 | 2.0220 04        | 1.2  | 5.1530 01         | 0.0  | 14 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 15   | 3.9230 07         | 1.6  | 5.9090 05            | 2.4  | 15 | 12 | 16 | 1 | 1 | 5.2400 03        | 0.3  | 7.7430 02         | 0.0  | 15 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 16   | 1.3870 08         | 5.8  | 9.2340 05            | 3.7  | 16 | 14 | 17 | 1 | 1 | 4.2830 02        | 0.0  | 6.7120 01         | 0.0  | 16 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 17   | 1.3250 08         | 5.6  | 1.1360 06            | 4.5  | 17 | 11 | 18 | 2 | 0 | 3.4690 05        | 20.6 | 2.2270 06         | 97.7 | 17 3 0 | 0.0                | 0.0  | 0.0                | 0.0  |
| 18   | 4.8810 07         | 2.0  | 5.6960 04            | 0.2  | 18 | 11 | 18 | 3 | 0 | 1.8090 05        | 10.7 | -4.0990 03        | -0.2 | 18 3 0 | 8.2590 05          | 91.0 | 1.4160 07          | 97.0 |
| 19   | 2.8540 06         | 0.1  | 2.8860 03            | 0.0  | 19 | 2  | 19 | 1 | 0 | 1.1250 04        | 0.7  | 2.7440 04         | 1.2  | 19 3 0 | 8.1690 04          | 9.0  | 4.3250 05          | 3.0  |
| 20   | 1.2810 07         | 0.5  | 1.6410 05            | 0.7  | 20 | 6  | 12 | 0 | 0 | 3.8990 04        | 2.3  | 9.5280 02         | 0.0  |        |                    |      |                    |      |
| 21   | 0.0               | 0.0  | 0.0                  | 0.0  | 21 | 9  | 14 | 0 | 0 | 6.0050 04        | 3.6  | 1.7780 02         | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 22 | 12 | 0  | 0 | 0 | 4.2500 03        | 0.3  | 9.7830 02         | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 23 | 2  | 20 | 0 | 0 | 3.1820 01        | 0.0  | -2.2490 01        | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 24 | 2  | 21 | 0 | 0 | 0.0              | 0.0  | 0.0               | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 25 | 15 | 16 | 0 | 0 | 0.0              | 0.0  | 0.0               | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 26 | 15 | 16 | 2 | 2 | 0.0              | 0.0  | 0.0               | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 27 | 15 | 0  | 0 | 0 | 7.4110 03        | 0.4  | 1.8570 01         | 0.0  |        |                    |      |                    |      |
|      |                   |      |                      |      | 28 | 15 | 0  | 2 | 0 | 2.7760 04        | 1.6  | 1.8570 01         | 0.0  |        |                    |      |                    |      |

DEVIATION OF TOTAL ENERGY OF EACH MASS FROM 100 PERCENT

MASS DEVIATION(PERCENT)

|    |           |
|----|-----------|
| 1  | 0.001197  |
| 2  | 0.001206  |
| 3  | 0.001039  |
| 4  | 0.000793  |
| 5  | 0.000535  |
| 6  | 0.000738  |
| 7  | 0.000840  |
| 8  | 0.001039  |
| 9  | 0.001200  |
| 10 | 0.001944  |
| 11 | 0.000318  |
| 12 | 0.000793  |
| 13 | 0.001573  |
| 14 | 0.001386  |
| 15 | 0.001543  |
| 16 | 0.000323  |
| 17 | 0.001363  |
| 18 | -0.018055 |
| 19 | 0.001381  |
| 20 | 0.000312  |
| 21 | 0.0       |

FIGURE 2-23. KRASH85 TIME HISTORY OUTPUT (SHEET 11 OF 11)

the angular velocity of mass I, using the same sign convention as for the Euler angles. PDOT, QDOT and RDOT are the body axes components of the angular accelerations of mass I. None of these orientation quantities is output for the node points, since these are the same as for the mass to which a given node point is attached.

XIMPULSE, YIMPULSE, ZIMPULSE are the accumulated area under the filtered acceleration response curve (G-SEC). Normally the user should plot these data to evaluate its meaning.

2.3.3.2.2 Internal Beam Data. - The STRAIN FORCES and TOTAL FORCES (STRAIN + DAMPING) are both output in the same format. FX, FY and FZ are the forces in beam axes acting upon the beam at the j end of the beam. Equal and opposite forces act upon the beam at the i end. MX is the torsion acting at the j end; again an equal and opposite torsion acts at the i end. MYI and MYJ are the bending moments at each end of the beam, acting about the beam y axis. MZI and MZJ are the moments acting about the beam z axis. In general, the moments acting at the i and j ends of the beam are not equal. The i and j ends of the beam are at masses i and j, unless the beam connects to a node point. In this case the i end of the beam is actually located at node point I, M, and the j end at node point J, N. M or N equal to zero means there is no node point; direct mass connection is used. The sign convention for these loads is shown in figure 2-18.

The total beam forces can also be output in a format which shows, for each beam, the loads acting at the I and J masses. This output is titled COMPONENTS OF TOTAL BEAM FORCES ACTING ON MASSES I AND J. For each beam the first line of output shows the forces on mass I, the second line shows mass J. These loads are positive forward, right and down, in mass axes, with moments using right-hand-rule about those axes. The loads are those acting on the masses, not the loads acting on the beams.

The beam X, Y and Z deflection data are presented in relative form, i.e., the values represent deflections at the j end minus those at the i end. The beam rotation data are given in both (J-I) and (J+I) terms. This is done

because the strain forces are calculated using both sum and difference terms. Note that these angles are all in degrees, rather than radians. If the actual rotations at the j and i beam ends are desired, they can be calculated from the output data as

$$\text{THETA}(J) = \frac{\text{THETA}(J+I) + \text{THETA}(J-I)}{2}$$

$$\text{THETA}(I) = \frac{\text{THETA}(J+I) - \text{THETA}(J-I)}{2}$$

Similar equations apply to PSI.

The beam lateral deflections Y and Z which are printed out are not simply the (J-I) values. The  $\theta$  and  $\psi$  rotations of mass I cause Z and Y deflections at end J, which in themselves cause no beam loads. These deflection components are removed from the output deflections. The output deflections are the following

$$Y_{\text{output}} = (Y_j - Y_i) - l \cdot \psi_i$$

$$Z_{\text{output}} = (Z_j - Z_i) + l \cdot \theta_i$$

The Euler angles defining the current orientation of the beam axes are also output in degrees. The column of integers titled VBM define which beams, if any, are treated as vertical beams. For vertical beams, VBM=1; for normal beams, VBM=0. For normal beams, the following procedure is used to determine the current beam axes orientation.

- Start with the ground fixed axis system, with X positive forward, Y positive right and Z positive downward.
- Rotate PSI degrees about the Z axis, using right-hand-rule for positive rotations.
- Rotate THETA degrees about the new rotated Y axis, using right-hand-rule for positive rotations.

For vertical beams (VBM=1), the same procedure is used, but the initial orientation of the X, Y, Z axis is different. In this case, the initial orientation is X positive up, Y positive right and Z positive forward.

For either axis orientation system, there is actually a final rotation of PHI about the X axis. PHI is not shown primarily due to output format line width limitations. However, PHI is normally rather small and will not affect the user's interpretation of the orientation of the beam axes.

2.3.3.2.3 External Spring Data. - For each external spring, the spring compression in inches and compression load in pounds is output. These are along the spring axis, which is oriented parallel to one of the mass axes. The ground deflection is also shown; this deflection will be zero if the ground flexibility is input as zero. The ground contact point loads are given in two coordinate systems, ground axes and mass axes. If the spring in question is on a slope, then slope axes are used instead of ground axes. The output titles for these quantities are self-explanatory.

2.3.3.2.4 DRI and c.g. Velocity Data. - For each beam element which has been defined as a Dynamic Response Index (DRI) type element, the J mass and DRI number are shown. Volume I, Section 1.3.12 explains the theory and usage of DRI elements.

The overall vehicle c.g. velocities, in ground axes, are always output. These velocities are calculated such that the total vehicle weight, with these velocity components, would yield the same linear momentum as that existing in the total system of NM masses. Section 1.3.9 of Volume I explains how these values are derived. This output, particularly the time-history plot of same, is a very useful indicator of the overall vertical motion of the system. Since the system kinetic energy is a scalar quantity, there is no way to separate the kinetic energy due to horizontal motion from that due to vertical motion. Therefore, for analyses in which the horizontal velocity is much larger than the vertical, system kinetic energy is not very useful in determining when the vertical impact velocity has been absorbed. The vertical component of the overall c.g. velocity can be used for this purpose.

2.3.3.2.5 Energy Distribution Data. - The first output in this section of data shows the current total system energy, kinetic energy, potential energy, strain energy, damping energy, crushing energy and friction energy. The next section of output shows the contributions of the individual masses, internal beams and external springs to these system totals. The system kinetic energy should reduce to zero at the conclusion of the analytical run. From a practical standpoint, however, one can expect individual elements to oscillate slightly after the vehicle comes to rest, leaving some residual kinetic energy in the system long after the responses of interest have occurred. In general, it is anticipated that if the analysis shows a 75 percent reduction in kinetic energy, the most significant events will have been adequately described.

If the vehicle is impacting on a flat surface (no slope) and a substantial portion of the initial kinetic energy is due to forward velocity (parallel to the ground), then a much larger percentage of the initial kinetic energy may remain after the significant damage phase of the crash. The remaining energy is accounted for by the vehicle sliding along the ground with a substantial forward velocity. In this case, the vehicle cg translational velocities, printed earlier, provide a better indication of whether the major response phase has been adequately covered. In general, the ZDOT or vertical vehicle translational velocity should be reduced to zero, indicating that the vehicle has ceased its downward motion. This situation can also be seen when the system potential energy reaches a minimum.

The potential energies include the effects of user-defined input time histories of either loads or accelerations, applied to specified masses. That is the significance of the (+) at the end of the POTENTIAL ENERGY headings. Earlier versions of KRASH did not include the effects on the energy balance of the loads or acceleration input. These versions do not have the (+) in the potential energy heading.

The individual internal beam strain energies provide the user with valuable insight into the temporal and spatial flow of energy in the vehicle.

Generally speaking, the strain energy concentrates initially near the point of impact, and as the strain energy grows it also becomes diffused throughout the vehicle. After the peak responses in the system occur, the overall system strain energy will decrease from its peak value as the internal beam elements unload.

Certain individual nonlinear beam elements may indicate negative strain energy. This circumstance may occur when large deflection loading and unloading occurs in the coupled bending degrees of freedom ( $z-\theta$  or  $y-\psi$ ), with nonlinear KR curves applied to these directions. This phenomenon is discussed in Section 1.3.16 of Volume I, and is due to the approximate nature of the nonlinear element analytical model. In practice, these negative strain energies are of such small magnitude relative to the overall system strain energy (usually less than 1 percent) that they do not invalidate the overall analysis. Furthermore, these negative energies tend to occur toward the end of the analysis, during the unloading phase, after the primary responses and damage of interest have been determined. The plastic hinge option should be used in lieu of KR tables in the coupled bending directions; negative strain energy will not occur with the plastic hinge option. It should also be noted that negative strain energy does not occur for linear beam elements, or for those that are nonlinear only in the uncoupled degrees of freedom (axial and torsion).

The damping energy of the internal beams is usually small in relation to the strain energy, typically being less than 20 percent of the strain energy, until late in the run when the strain energy has decreased substantially from its peak value. Note that damping energy always increases with time, since it is a dissipative energy that is not stored and released as with strain energy.

Crushing and friction energies result from the deformation of the external springs and flexible ground for the former, and from sliding friction along the ground for the latter. The friction energy is also dissipative

and hence monotonically increasing, whereas the crushing energy peaks and decreases similar to the strain energy. In general, a rather large percentage of the total system energy may be represented by the crushing energy. This situation is only natural since the external springs represent the structure in immediate contact with the ground that undergoes substantial deformation. In a typical vehicle crash analysis, the system crushing energy may be larger than the internal beam strain energy. However, they both represent actual airplane structure, the only distinction being location on the vehicle.

The final energy information printed is a summary of the deviation of the total energy of each mass in the system from 100 percent. Ideally these variations should all be zero, but in actual practice errors associated with the numerical integration process result in deviations from the ideal. This information can be helpful for pinpointing areas of the mathematical model that may be causing numerical accuracy problems, and alerting the program user to the possible need for a finer integration time step.

In typical applications, a few individual mass total energies may deviate 2 to 5 percent from the 100 percent ideal, while the total energy of the entire system remains within 0.5 percent or less. This accuracy is generally considered acceptable for the numerical integration process. However, the program user is free to adjust the integration time step to suit his own personal criterion for the accuracy of the individual mass integrations.

2.2.3.2.6 Internal Beam Stress Data. - The stress data output are shown in figure 2-24, which is taken from the  $t = 0$  output of the sample case. (Stress data output was not selected for the sample case, so none was output at  $t = 0.5$  used for figure 2-23. At time zero, all output is printed regardless of what the user requests).

This output consists of ratios of current stress to failure level stress (corresponding to initial yielding), for four locations on each beam, using two failure theories. These theories are the maximum shear stress theory and the theory of constant energy of distortion. Section 1.3.17 of Volume I presents the method of calculating these ratios. Also shown in the output are the

ratios of current compressive/tensile stress to the corresponding yield stress, and the ratio of current axial compressive load (when it is compressive) to the critical buckling load.

The stress data can be used as a guide for estimating the time at which the element begins to yield. When such a state is reached, a stiffness reduction factor (KR) may be developed for the affected member which then can be used to approximate the nonlinear response characteristics of that member. The user is cautioned to exercise extreme care in the interpretation of data presented in the summary since they do not include the effect of stress concentrations, geometric shape factors, and detail attachment practices at joints. In addition, limitations of the program require that gross regions of the vehicle structure be modeled using relatively simple structural elements. Thus, the more gross the structural region the less accurate the stress values. Also monitoring the response of a structural element which may exhibit a buckling mode of failure will require special consideration. In this case the critical buckling load becomes significant and a stiffness reduction factor should be developed which will approximate the buckling characteristics of the element.

Furthermore, the user should realize that once an element has yielded or buckled, the failure theories followed become invalid and, consequently, the most meaningful use of the stress data is to identify which element may fail and at what point in time such failures are apt to occur.

**2.3.3.2.7 Initial Mass Acceleration Error Output.** - Figure 2-24 shows this output for the sample case. This information is only output at time zero, and has significance only if balanced initial conditions are used (KRASHIC and MSCTRAN are used to calculate balanced internal beam loads). For each mass in the system, the difference between the actual time zero acceleration calculated in KRASH85 and the theoretically correct value, based on airplane rigid body accelerations at time zero, is printed. A summary at the bottom shows the largest value and corresponding mass number for each of the six accelerations.

|    |    |    |   |   |           |     |           |     |
|----|----|----|---|---|-----------|-----|-----------|-----|
| 25 | 15 | 16 | 0 | 0 | 0.0       | 0.0 | 0.0       | 0.0 |
| 26 | 15 | 16 | 2 | 2 | 0.0       | 0.0 | 0.0       | 0.0 |
| 27 | 15 | 0  | 0 | 0 | 7.362D 03 | 2.1 | 1.118D-15 | 0.0 |
| 28 | 15 | 0  | 2 | 0 | 2.920D 04 | 8.2 | 1.118D-15 | 0.0 |

# DEVIATION OF TOTAL ENERGY OF EACH MASS FROM 100 PERCENT

## MASS DEVIATION(PERCENT)

|    |     |
|----|-----|
| 1  | 0.0 |
| 2  | 0.0 |
| 3  | 0.0 |
| 4  | 0.0 |
| 5  | 0.0 |
| 6  | 0.0 |
| 7  | 0.0 |
| 8  | 0.0 |
| 9  | 0.0 |
| 10 | 0.0 |
| 11 | 0.0 |
| 12 | 0.0 |
| 13 | 0.0 |
| 14 | 0.0 |
| 15 | 0.0 |
| 16 | 0.0 |
| 17 | 0.0 |
| 18 | 0.0 |
| 19 | 0.0 |
| 20 | 0.0 |
| 21 | 0.0 |

## ELEMENT STRESSES

|    |      |    |   |   | RATIO OF CURRENT STRESS / FAILURE STRESS |           |               |           |                                         |           |           |           | RATIO OF CURRENT |               |           |               |
|----|------|----|---|---|------------------------------------------|-----------|---------------|-----------|-----------------------------------------|-----------|-----------|-----------|------------------|---------------|-----------|---------------|
|    |      |    |   |   | MAXIMUM SHEAR                            |           | STRESS THEORY |           | THEORY OF CONSTANT ENERGY OF DISTORTION |           |           |           | AXIAL/FAILURE    | TENSILE       | BUCK. /   |               |
| IJ | BEAM | I  | J | M | N                                        | TOP       | BOTTOM        | LEFT      | RIGHT                                   | TOP       | BOTTOM    | LEFT      | RIGHT            | COMPR. STRESS | STRESS    | CR.BUCK. LOAD |
| 1  | 1    | 2  | 0 | 0 |                                          | 6.636D-03 | 6.636D-03     | 3.980D-03 | 3.980D-03                               | 6.446D-03 | 6.636D-03 | 3.446D-03 | 3.446D-03        | 1.849D-07     |           | 2.810D-10     |
| 2  | 2    | 3  | 0 | 0 |                                          | 7.081D-02 | 7.173D-02     | 2.654D-02 | 2.654D-02                               | 6.878D-02 | 7.173D-02 | 2.298D-02 | 2.298D-02        | 4.625D-04     |           | 1.714D-06     |
| 3  | 3    | 4  | 0 | 0 |                                          | 1.092D-01 | 1.095D-01     | 5.858D-02 | 5.858D-02                               | 1.060D-01 | 1.095D-01 | 5.073D-02 | 5.073D-02        | 1.873D-04     |           | 6.916D-07     |
| 4  | 4    | 5  | 0 | 0 |                                          | 1.462D-01 | 1.470D-01     | 4.779D-02 | 4.779D-02                               | 1.420D-01 | 1.470D-01 | 4.139D-02 | 4.139D-02        | 3.898D-04     |           | 3.411D-06     |
| 5  | 5    | 6  | 0 | 0 |                                          | 2.696D-01 | 3.181D-01     | 4.587D-02 | 4.587D-02                               | 2.619D-01 | 3.181D-01 | 4.153D-02 | 4.153D-02        | 2.426D-02     |           | 1.047D-04     |
| 6  | 6    | 7  | 0 | 0 |                                          | 2.432D-01 | 2.952D-01     | 6.616D-02 | 6.616D-02                               | 2.362D-01 | 2.952D-01 | 5.875D-02 | 5.875D-02        | 2.600D-02     |           | 2.875D-05     |
| 7  | 7    | 8  | 0 | 0 |                                          | 2.241D-01 | 2.921D-01     | 5.568D-02 | 5.568D-02                               | 2.177D-01 | 2.921D-01 | 5.113D-02 | 5.113D-02        | 3.401D-02     |           | 1.174D-04     |
| 8  | 8    | 9  | 0 | 0 |                                          | 1.466D-01 | 2.356D-01     | 4.960D-02 | 4.960D-02                               | 1.424D-01 | 2.356D-01 | 4.839D-02 | 4.839D-02        | 4.454D-02     |           | 2.269D-04     |
| 9  | 9    | 10 | 0 | 0 |                                          | 7.563D-02 | 8.609D-02     | 8.166D-02 | 8.166D-02                               | 7.347D-02 | 8.609D-02 | 7.077D-02 | 7.077D-02        | 5.228D-03     |           | 5.442D-05     |
| 10 | 5    | 11 | 0 | 1 |                                          | 1.052D-01 | 1.209D-01     | 9.239D-02 | 9.110D-02                               | 8.979D-02 | 1.068D-01 | 8.145D-02 | 8.007D-02        |               | 4.754D-02 |               |
| 11 | 11   | 12 | 1 | 0 |                                          | 5.357D-02 | 8.125D-02     | 6.156D-02 | 5.885D-02                               | 4.802D-02 | 7.633D-02 | 5.797D-02 | 5.525D-02        |               | 5.056D-02 |               |
| 12 | 12   | 13 | 0 | 0 |                                          | 1.700D-02 | 5.118D-02     | 4.083D-02 | 3.944D-02                               | 1.528D-02 | 4.918D-02 | 3.594D-02 | 3.444D-02        |               | 1.931D-02 |               |
| 13 | 13   | 14 | 0 | 0 |                                          | 2.526D-02 | 3.831D-02     | 3.459D-02 | 2.408D-02                               | 2.344D-02 | 3.650D-02 | 3.330D-02 | 2.296D-02        |               | 2.700D-02 |               |
| 14 | 14   | 15 | 0 | 1 |                                          | 2.141D-01 | 1.992D-01     | 1.106D-01 | 8.115D-02                               | 1.881D-01 | 1.719D-01 | 1.073D-01 | 7.860D-02        |               | 9.236D-02 |               |
| 15 | 12   | 16 | 1 | 1 |                                          | 1.446D-02 | 1.436D-02     | 4.276D-02 | 4.275D-02                               | 1.353D-02 | 1.620D-02 | 3.468D-02 | 4.179D-02        |               | 4.490D-05 |               |
| 16 | 14   | 17 | 1 | 1 |                                          | 1.361D-02 | 1.363D-02     | 4.083D-02 | 4.084D-02                               | 1.274D-02 | 1.538D-02 | 3.312D-02 | 3.992D-02        | 1.520D-05     |           | 6.626D-07     |
| 17 | 11   | 18 | 2 | 0 |                                          | 1.997D 00 | 1.997D 00     | 1.997D 00 | 1.997D 00                               | 1.997D 00 | 1.997D 00 | 1.997D 00 | 1.997D 00        |               | 1.997D 00 |               |
| 18 | 11   | 18 | 3 | 0 |                                          | 5.182D-01 | 5.182D-01     | 5.179D-01 | 5.180D-01                               | 5.180D-01 | 5.181D-01 | 5.178D-01 | 5.179D-01        |               | 5.176D-01 |               |

FIGURE 2-24. KRASH85 INTERNAL BEAM STRESS DATA AND INITIAL MASS ACCELERATION ERROR OUTPUT (SHEET 1 OF 2)

|    |    |    |   |   |           |           |           |           |           |           |           |           |           |           |
|----|----|----|---|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 19 | 2  | 19 | 1 | 0 | 3.096D-01 | 3.094D-01 | 3.097D-01 | 3.097D-01 | 3.096D-01 | 3.094D-01 | 3.096D-01 | 3.096D-01 | 7.095D-01 |           |
| 20 | 6  | 12 | 0 | 0 | 4.075D-02 | 1.370D-02 | 1.800D-02 | 2.139D-02 | 4.036D-02 | 1.213D-02 | 1.700D-02 | 2.055D-02 | 1.569D-02 | 4.704D-03 |
| 21 | 9  | 14 | 0 | 0 | 1.183D-02 | 6.865D-02 | 4.133D-02 | 4.133D-02 | 1.150D-02 | 6.669D-02 | 3.989D-02 | 3.989D-02 | 3.909D-02 |           |
| 22 | 12 | 0  | 0 | 0 | 5.892D-02 | 3.065D-02 | 4.580D-02 | 4.378D-02 | 5.892D-02 | 3.065D-02 | 4.580D-02 | 4.378D-02 | 4.479D-02 | 2.319D-02 |
| 23 | 2  | 20 | 0 | 0 | 1.347D-01 | 1.462D-01 | 1.405D-01 | 1.405D-01 | 2.861D-01 | 3.106D-01 | 2.985D-01 | 2.985D-01 | 2.984D-01 | 9.754D-03 |
| 24 | 2  | 21 | 0 | 0 | 2.623D-07 | 2.818D-07 | 2.729D-07 | 2.729D-07 | 5.573D-07 | 5.988D-07 | 5.795D-07 | 5.795D-07 | 5.781D-07 | 1.227D-08 |
| 25 | 15 | 16 | 0 | 0 | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       |
| 26 | 15 | 16 | 2 | 2 | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       | 0.0       |
| 27 | 15 | 0  | 0 | 0 | 6.795D-03 | 6.795D-03 | 1.957D-03 | 1.957D-03 | 6.795D-03 | 6.601D-03 | 1.957D-03 | 1.901D-03 | 0.0       | 0.0       |
| 28 | 15 | 0  | 2 | 0 | 1.198D-01 | 1.062D-01 | 1.149D-01 | 1.110D-01 | 1.198D-01 | 1.062D-01 | 1.149D-01 | 1.110D-01 | 1.130D-01 | 3.553D-01 |

DIFFERENCE BETWEEN ACCELERATIONS AT T=0 AND RIGID BODY ACCELERATIONS  
FOR BALANCED INITIAL CONDITIONS (FROM SUBROUTINE NETFOR)  
UNITS ARE G-S AND RAD/SEC-SQ  
(LARGEST VALUES SHOWN AT BOTTOM EXCLUDE DRI MASSES)

| MASS             | XACC          | YACC          | ZACC          | PDOT          | QDOT          | RDOT          |
|------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 1                | -4.561676D-06 | 0.0           | 9.702336D-04  | 0.0           | 2.066674D-03  | 0.0           |
| 2                | 4.036447D-09  | 0.0           | -2.070837D-04 | 0.0           | 1.833248D-04  | 0.0           |
| 3                | 2.016033D-06  | 0.0           | -1.999610D-05 | 0.0           | -6.788905D-04 | 0.0           |
| 4                | -1.910591D-06 | 0.0           | 5.579026D-05  | 0.0           | -3.070369D-04 | 0.0           |
| 5                | 4.508155D-06  | 0.0           | -5.558921D-05 | 0.0           | -7.724807D-04 | 0.0           |
| 6                | -4.443438D-05 | 0.0           | 1.124015D-04  | 0.0           | -7.635357D-04 | 0.0           |
| 7                | 2.852423D-05  | 0.0           | 1.653412D-04  | 0.0           | 5.425082D-04  | 0.0           |
| 8                | 2.080692D-04  | 0.0           | -7.058302D-05 | 0.0           | 4.254638D-04  | 0.0           |
| 9                | -9.796682D-04 | 0.0           | 7.811662D-05  | 0.0           | 2.739988D-03  | 0.0           |
| 10               | 8.414123D-05  | 0.0           | -1.444515D-04 | 0.0           | 9.046178D-04  | 0.0           |
| 11               | -1.503323D-05 | 2.828370D-06  | -6.051263D-05 | -3.186850D-04 | -3.263788D-04 | -6.618038D-06 |
| 12               | 3.432142D-06  | -8.641403D-05 | -3.306128D-05 | 5.702816D-04  | -1.649016D-05 | 7.636331D-06  |
| 13               | 5.689057D-05  | 3.098061D-04  | 1.011868D-04  | -5.093914D-04 | 1.460003D-04  | -1.251510D-04 |
| 14               | 3.723546D-04  | -1.525087D-03 | -2.186946D-04 | -3.208784D-03 | 1.657369D-03  | -5.865503D-04 |
| 15               | 6.044262D-04  | 1.321402D-03  | 2.434335D-04  | 1.497438D-02  | -3.419000D-04 | -2.276370D-03 |
| 16               | 2.103411D-05  | -8.220184D-07 | 8.313118D-06  | -7.573761D-05 | -7.339416D-05 | -1.573558D-05 |
| 17               | -2.253260D-04 | 6.550356D-06  | 2.671713D-05  | 4.666457D-04  | 1.891144D-03  | 1.748369D-04  |
| 18               | -1.259608D-06 | 9.432358D-06  | 2.926240D-04  | 1.651754D-03  | 3.702148D-05  | 2.360443D-06  |
| 19               | 3.154736D-06  | 0.0           | 4.034632D-04  | 0.0           | -8.508533D-05 | 0.0           |
| 20               | 1.198924D-06  | 0.0           | 1.239012D-06  | 0.0           | -2.395068D-06 | 0.0           |
| 21               | -1.522104D-02 | 0.0           | 9.998829D-01  | 0.0           | -3.320740D-07 | 0.0           |
| LARGEST<br>VALUE | 9.796682D-04  | 1.525087D-03  | 9.702336D-04  | 1.497438D-02  | 2.739988D-03  | 2.276370D-03  |
| MASS NO.         | 9             | 14            | 1             | 15            | 9             | 15            |

FIGURE 2-24. KRASH85 INTERNAL BEAM STRESS DATA AND INITIAL MASS ACCELERATION ERROR OUTPUT (SHEET 2 OF 2)

The reason that the time zero accelerations are not "exactly" equal to the theoretically correct values is because the accuracy of the KRASHIC/MSCTRAN iterations is limited by the number of significant figures used in the input and output data sets used with NASTRAN. The accuracy shown in figure 2-24 is representative of a typical large transport airplane model, using ten iterations of KRASHIC/NASTRAN. In general the results are quite good, with most translational accelerations accurate to within  $E-5$  g's. Errors of this order should have no appreciable influence on the subsequent time history results, particularly for crash impacts which typically involve mass accelerations of five g's or more.

DRI masses are excluded from the largest value summary because the DRI beam elements always start with zero internal load and deflection in the axial direction. In subroutine NETFOR, where the theoretically exact initial accelerations are computed, it is assumed that the DRI mass is rigidly attached to the vehicle.

#### 2.3.3.3 Summary Output

At the conclusion of the time history printout several summaries are presented, which include:

- Summary of internal beam yielding and rupture
- Summary of mass penetration into a control volume
- Summary of external spring loading and unloading
- Summary of plastic hinge moment formations
- Summary of energy distribution
- Time histories of interaction loads/summary of maximum load ratios
- Time histories of vehicle c.g. motions

The summaries are illustrated in figure 2-25.

Internal beam element yielding and rupture are summarized at the end of the run. For each occurrence of yielding or rupture, the time, beam identification and beam direction of yielding or rupture is output. Directions 1-6

correspond to beam axis directions  $x$ ,  $y$ ,  $z$ ,  $\phi$ ,  $\theta$  and  $\psi$ , the latter three being rotations about the beam  $x$ ,  $y$  and  $z$  axes. In addition the beam tension and compression rupture is noted. If a beam has a special KR curve that starts at a nonzero value, then this summary will indicate yielding at time zero. This output provides the user with a concise summary of the onset of beam nonlinearities and beam ruptures.

Also included in the internal beam yielding summary are occurrences of interaction loads exceeding the user defined load envelopes. In figure 2-25, SUMMARY OF INTERNAL BEAM YIELDING AND RUPTURE, the first item for beam 18 is a conventional beam yielding in the 1, or axial direction. The second item, for beam 19, is a conventional beam rupture due to exceeding input maximum load levels, again in the axial direction. The third line, for beam 9, is an example of load interaction curve data showing up in this summary. The 15 under YIELD signifies that for load interaction curve number 15, an exceedance of the defined load envelope has occurred. The 3 in the right hand column means that load line number 3, for interaction curve 15, was the specific interaction line that was exceeded. If the input load envelope is exceeded by the factor RUPRAT (See Section 2.2, figure 2-3, card 2800), then the load interaction curve number will be printed under the heading RUPTURE. It should be noted that load interaction curve outputs in the YIELD column have caused nothing to happen in the time history solution; outputs in the RUPTURE column would have triggered an actual beam rupture during the time history solution.

Any mass penetrations into the mass penetration control volume are also summarized. Both the mass penetrating the control volume and time of occurrence are noted. Since MVP = 0 in the sample case, this output is not illustrated in figure 2-25.

The summary of external spring loading and unloading provides the time of occurrence, the spring designations (mass, node, direction), type of event, initial deflection, maximum force and unloaded deflection and force.

The summary of plastic hinge formations identifies the time, beam number and mass number at the end where a plastic hinge formation takes place. In figure 2-25, beam 1 and mass 2 goes through cyclic plastic hinge motion. At

SUMMARY OF INTERNAL BEAM YIELDING AND RUPTURE

| TIME     | BEAM |    |    |   |   | BEAM DIRECTION FOR |         | TENSION(+) OR<br>COMPRESSION(-) |
|----------|------|----|----|---|---|--------------------|---------|---------------------------------|
|          | IJ   | I  | J  | M | N | YIELD              | RUPTURE |                                 |
| 0.030700 | 18   | 11 | 18 | 3 | 0 | 1                  | 0       | 0                               |
| 0.071250 | 19   | 2  | 19 | 1 | 0 | 0                  | 1       | -1                              |
| 0.100000 | 9    | 9  | 10 | 0 | 0 | 15                 | 0       | 3                               |

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 1 OF 10)

# SUMMARY OF EXTERNAL SPRING LOADING AND UNLOADING

TYPES;1=INITIAL LOADING 2=MAX.LOADING 3=UNLOAD TO ZERO FORCE 4=INITIATION OF RELOAD

NOTE:SPRING RELOADS AT ZERO FORCE(SEQ.1,2,3,4) OR AT FINITE FORCE VALUE(SEQ.1,2,4)

NOTE:INITIAL DEFLECTION IS FIRST IMPACT IF NTYPE=1, OTHERWISE IT IS POINT AT WHICH RELOADING OCCUR FOR NTYPE=4

| TIME(SEC) | MASS NO. | NODE NO. | DIRECTION L=1,2,3 | TYPE NO. | INITIAL DEFLECTION | MAXIMUM FORCE &/OR DEFLECT | UNLOADED DEFLECT & FORCE |
|-----------|----------|----------|-------------------|----------|--------------------|----------------------------|--------------------------|
| 0.000050  | 18       | 0        | 3                 | 1        | 0.0142             | 0.0                        | 0.0                      |
| 0.027150  | 19       | 0        | 3                 | 1        | 0.0093             | 0.0                        | 0.0                      |
| 0.031250  | 18       | 0        | 3                 | 2        | 0.0142             | 0.21D 06                   | 5.9281                   |
| 0.031650  | 18       | 0        | 3                 | 2        | 0.0142             | 0.21D 06                   | 5.9295                   |
| 0.050700  | 18       | 0        | 3                 | 4        | 4.8176             | 0.21D 06                   | 5.9295                   |
| 0.071350  | 19       | 0        | 3                 | 2        | 0.0093             | 0.14D 06                   | 6.5908                   |
| 0.071450  | 19       | 0        | 3                 | 2        | 0.0093             | 0.14D 06                   | 6.5906                   |
| 0.075250  | 19       | 0        | 3                 | 3        | 0.0093             | 0.14D 06                   | 6.5906                   |
| 0.080700  | 18       | 0        | 3                 | 2        | 4.8176             | 0.33D 06                   | 8.4122                   |
| 0.080850  | 18       | 0        | 3                 | 2        | 4.8176             | 0.33D 06                   | 8.4125                   |
| 0.097750  | 18       | 0        | 3                 | 4        | 7.2872             | 0.33D 06                   | 8.4125                   |

# SUMMARY OF PLASTIC HINGE FORMATIONS

| TIME     | IJ  | BEAM I J M N | BEAM END MASS NO. | DIRECTION-NEWPIN |
|----------|-----|--------------|-------------------|------------------|
| 0.061600 | 1 1 | 2 0 0        | 2                 | 5 1              |
| 0.064300 | 1 1 | 2 0 0        | 2                 | 5 0              |
| 0.068900 | 1 1 | 2 0 0        | 2                 | -5 1             |
| 0.071600 | 1 1 | 2 0 0        | 2                 | -5 0             |
| 0.072300 | 1 1 | 2 0 0        | 2                 | 5 1              |

# SUMMARY OF ENERGY DISTRIBUTION

| TIME    | PERCENT<br>MAXIMUM<br>ENERGY<br>DEVIATION | PERCENT<br>TOTAL<br>SYSTEM<br>ENERGY | KINETIC<br>ENERGY | PERCENT<br>OF<br>CURRENT<br>TOTAL | POTENTIAL<br>ENERGY+ | PERCENT<br>OF<br>CURRENT<br>TOTAL | STRAIN<br>ENERGY | PERCENT<br>OF<br>CURRENT<br>TOTAL | DAMPING<br>ENERGY | PERCENT<br>OF<br>CURRENT<br>TOTAL | CRUSHING<br>ENERGY | PERCENT<br>OF<br>CURRENT<br>TOTAL | FRICTION<br>ENERGY | PERCENT<br>OF<br>CURRENT<br>TOTAL |
|---------|-------------------------------------------|--------------------------------------|-------------------|-----------------------------------|----------------------|-----------------------------------|------------------|-----------------------------------|-------------------|-----------------------------------|--------------------|-----------------------------------|--------------------|-----------------------------------|
| 0.0     | 0.0                                       | 100.00                               | 2.405E 09         | 98.96                             | 2.480E 07            | 1.02                              | 3.560E 05        | 0.01                              | 6.407E-11         | 0.00                              | 0.0                | 0.0                               | 0.0                | 0.0                               |
| 0.01000 | 0.010961                                  | 100.00                               | 2.403E 09         | 98.91                             | 2.485E 07            | 1.02                              | 3.586E 05        | 0.01                              | 5.545E 03         | 0.00                              | 2.884E 05          | 0.01                              | 9.687E 05          | 0.04                              |
| 0.02000 | 0.009660                                  | 100.00                               | 2.400E 09         | 98.77                             | 2.491E 07            | 1.03                              | 4.222E 05        | 0.02                              | 1.142E 05         | 0.00                              | 8.536E 05          | 0.04                              | 3.562E 06          | 0.15                              |
| 0.03000 | 0.005369                                  | 100.00                               | 2.395E 09         | 98.58                             | 2.496E 07            | 1.03                              | 6.989E 05        | 0.03                              | 4.218E 05         | 0.02                              | 1.245E 06          | 0.05                              | 7.152E 06          | 0.29                              |
| 0.04000 | 0.019340                                  | 100.00                               | 2.390E 09         | 98.38                             | 2.502E 07            | 1.03                              | 1.192E 06        | 0.05                              | 1.176E 06         | 0.05                              | 1.089E 06          | 0.04                              | 1.100E 07          | 0.45                              |
| 0.05000 | 0.018055                                  | 100.00                               | 2.385E 09         | 98.17                             | 2.506E 07            | 1.03                              | 1.685E 06        | 0.07                              | 2.278E 06         | 0.09                              | 9.075E 05          | 0.04                              | 1.459E 07          | 0.60                              |
| 0.06000 | 0.009878                                  | 100.00                               | 2.380E 09         | 97.95                             | 2.507E 07            | 1.03                              | 1.989E 06        | 0.08                              | 2.942E 06         | 0.12                              | 1.256E 06          | 0.05                              | 1.846E 07          | 0.76                              |
| 0.07000 | 0.016912                                  | 100.00                               | 2.373E 09         | 97.68                             | 2.507E 07            | 1.03                              | 1.951E 06        | 0.08                              | 3.404E 06         | 0.14                              | 2.181E 06          | 0.09                              | 2.385E 07          | 0.98                              |
| 0.08000 | 0.020184                                  | 100.00                               | 2.366E 09         | 97.38                             | 2.507E 07            | 1.03                              | 1.929E 06        | 0.08                              | 4.100E 06         | 0.17                              | 2.702E 06          | 0.11                              | 2.993E 07          | 1.23                              |
| 0.09000 | 0.020185                                  | 100.00                               | 2.359E 09         | 97.09                             | 2.509E 07            | 1.03                              | 2.327E 06        | 0.10                              | 5.186E 06         | 0.21                              | 2.328E 06          | 0.10                              | 3.566E 07          | 1.47                              |
| 0.10000 | 0.020185                                  | 100.00                               | 2.353E 09         | 96.86                             | 2.511E 07            | 1.03                              | 3.031E 06        | 0.12                              | 6.022E 06         | 0.25                              | 2.112E 06          | 0.09                              | 4.002E 07          | 1.65                              |

## TIME HISTORIES OF INTERACTION LOADS

LOAD INTERACTION CURVE NO. 1 , BEAM NO. 1  
LOCATION: FS= 300.000 , BL= 0.0 , WL= 0.0

| TIME           | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|----------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0            | 1                            | 1.4432E 03        | 1.4575E 05        | 1.0449E-02         |
| 0.01000000     | 1                            | 1.4505E 03        | 1.4606E 05        | 1.0492E-02         |
| 0.02000000     | 1                            | 1.2069E 03        | 1.5838E 05        | 9.5379E-03         |
| 0.03000000     | 8                            | 4.1271E 01        | -1.5248E 04       | 7.3306E-04         |
| 0.04000000     | 2                            | 5.8028E 02        | -7.8524E 04       | 4.6380E-03         |
| 0.05000000     | 5                            | 8.2173E 02        | -7.3234E 03       | 4.9502E-03         |
| 0.06000000     | 8                            | -1.2858E 02       | -7.0516E 04       | 3.3902E-03         |
| 0.06999999     | 1                            | 4.2607E 03        | 1.9882E 05        | 2.5771E-02         |
| 0.07999998     | 7                            | -5.9770E 03       | -1.8445E 05       | 3.6006E-02         |
| 0.08999997     | 2                            | 2.8527E 03        | -1.8420E 05       | 1.8375E-02         |
| 0.09999996     | 8                            | -9.0518E 02       | -1.8431E 05       | 8.8610E-03         |
| MAXIMUM VALUE: |                              | 4.2607E 03        | 1.9882E 05        | 3.6006E-02         |
| MINIMUM VALUE: |                              | -5.9770E 03       | -1.8445E 05       |                    |

LOAD INTERACTION CURVE NO. 2 , BEAM NO. 2  
LOCATION: FS= 300.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 5                            | 1.0825E 04        | 1.4968E 05        | 6.5209E-02         |
| 0.01000000 | 5                            | 1.0887E 04        | 1.4649E 05        | 6.5583E-02         |
| 0.02000000 | 1                            | 7.0436E 03        | 4.0998E 05        | 4.4386E-02         |
| 0.03000000 | 6                            | 3.2890E 01        | 4.7372E 04        | 2.2775E-03         |

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 3 OF 10)

|            |   |             |             |            |
|------------|---|-------------|-------------|------------|
| 0.04000000 | 8 | -6.8032E 03 | -1.3475E 06 | 6.4784E-02 |
| 0.05000000 | 7 | -2.5080E 04 | 2.6355E 04  | 1.5109E-01 |
| 0.06000000 | 7 | -4.6627E 04 | 5.3843E 05  | 2.8089E-01 |
| 0.06999999 | 7 | -6.5402E 04 | -1.3806E 06 | 3.9399E-01 |
| 0.07999998 | 8 | 2.5365E 02  | -6.7244E 06 | 3.2329E-01 |
| 0.08999997 | 2 | 5.0925E 03  | -8.4343E 05 | 4.4087E-02 |
| 0.09999996 | 1 | 2.7333E 04  | 1.7523E 06  | 1.7578E-01 |

MAXIMUM VALUE: 2.7333E 04 1.7523E 06 3.9399E-01  
 MINIMUM VALUE: -6.5402E 04 -6.7244E 06

LOAD INTERACTION CURVE NO. 3 , BEAM NO. 2  
 LOCATION: FS= 400.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 1                            | 1.0825E 04        | 1.2341E 06        | 7.8810E-02         |
| 0.01000000 | 1                            | 1.0887E 04        | 1.2371E 06        | 7.9195E-02         |
| 0.02000000 | 1                            | 7.0436E 03        | 1.1156E 06        | 5.6423E-02         |
| 0.03000000 | 10                           | 3.2890E 01        | 5.0668E 04        | 2.1289E-03         |
| 0.04000000 | 8                            | -6.8032E 03       | -2.0291E 06       | 8.9974E-02         |
| 0.05000000 | 5                            | -2.5080E 04       | -2.4863E 06       | 1.7646E-01         |
| 0.06000000 | 5                            | -4.6627E 04       | -4.1329E 06       | 3.2001E-01         |
| 0.06999999 | 5                            | -6.5402E 04       | -7.9327E 06       | 4.8400E-01         |
| 0.07999998 | 12                           | 2.5365E 02        | -6.6995E 06       | 2.8149E-01         |
| 0.08999997 | 3                            | 5.0925E 03        | -3.3379E 05       | 3.3017E-02         |
| 0.09999996 | 1                            | 2.7333E 04        | 4.4902E 06        | 2.2160E-01         |

MAXIMUM VALUE: 2.7333E 04 4.4902E 06 4.8400E-01  
 MINIMUM VALUE: -6.5402E 04 -7.9327E 06

LOAD INTERACTION CURVE NO. 4 , BEAM NO. 3  
 LOCATION: FS= 480.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 1                            | 2.3901E 04        | 2.3625E 06        | 1.4070E-01         |
| 0.01000000 | 1                            | 2.3359E 04        | 2.3918E 06        | 1.3814E-01         |
| 0.02000000 | 1                            | 2.0812E 04        | 1.8557E 06        | 1.2097E-01         |
| 0.03000000 | 1                            | 1.7145E 04        | 1.3406E 05        | 8.8953E-02         |
| 0.04000000 | 3                            | 1.7726E 04        | -1.8144E 06       | 1.0483E-01         |
| 0.05000000 | 6                            | 5.3162E 03        | -4.2486E 06       | 1.5676E-01         |
| 0.06000000 | 6                            | 1.2085E 04        | -7.8305E 06       | 2.9311E-01         |
| 0.06999999 | 6                            | 5.4359E 04        | -1.0317E 07       | 4.5667E-01         |
| 0.07999998 | 6                            | 3.5852E 04        | -4.7208E 06       | 2.2910E-01         |
| 0.08999997 | 1                            | 3.8774E 04        | 4.5970E 05        | 2.0237E-01         |
| 0.09999996 | 2                            | 5.1361E 04        | 7.1999E 06        | 3.4332E-01         |

MAXIMUM VALUE: 5.4359E 04 7.1999E 06 4.5667E-01  
 MINIMUM VALUE: 0.0 -1.0317E 07

LOAD INTERACTION CURVE NO. 5 , BEAM NO. 3  
 LOCATION: FS= 540.000 , BL= 0.0 , WL= 0.0

| CRITICAL LOAD | X LOAD | Y LOAD | MAX. LOAD |
|---------------|--------|--------|-----------|
|---------------|--------|--------|-----------|

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 4 OF 10)

| TIME           | LINE NUMBER | (NO. 3)    | (NO. 5)     | RATIO      |
|----------------|-------------|------------|-------------|------------|
| 0.0            | 1           | 2.3901E 04 | 3.7968E 06  | 1.4776E-01 |
| 0.01000000     | 1           | 2.3359E 04 | 3.7935E 06  | 1.4501E-01 |
| 0.02000000     | 1           | 2.0812E 04 | 3.1045E 06  | 1.2719E-01 |
| 0.03000000     | 1           | 1.7145E 04 | 1.1629E 06  | 9.4626E-02 |
| 0.04000000     | 3           | 1.7726E 04 | -7.5068E 05 | 9.4544E-02 |
| 0.05000000     | 6           | 5.3162E 03 | -3.9297E 06 | 1.1522E-01 |
| 0.06000000     | 6           | 1.2085E 04 | -7.1054E 06 | 2.1014E-01 |
| 0.06999999     | 3           | 5.4359E 04 | -7.0553E 06 | 3.2455E-01 |
| 0.07999998     | 3           | 3.5852E 04 | -2.5697E 06 | 1.9888E-01 |
| 0.08999997     | 1           | 3.8774E 04 | 2.7860E 06  | 2.1514E-01 |
| 0.09999996     | 1           | 5.1361E 04 | 1.0282E 07  | 3.3298E-01 |
| MAXIMUM VALUE: |             | 5.4359E 04 | 1.0282E 07  | 3.3298E-01 |
| MINIMUM VALUE: |             | 0.0        | -7.1054E 06 |            |

LOAD INTERACTION CURVE NO. 6 , BEAM NO. 3  
LOCATION: FS= 620.000 , BL= 0.0 , WL= 0.0

| TIME           | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|----------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0            | 2                            | 2.3901E 04        | 5.7091E 06        | 1.3381E-01         |
| 0.01000000     | 2                            | 2.3359E 04        | 5.6624E 06        | 1.3181E-01         |
| 0.02000000     | 2                            | 2.0812E 04        | 4.7697E 06        | 1.1399E-01         |
| 0.03000000     | 2                            | 1.7145E 04        | 2.5347E 06        | 7.6405E-02         |
| 0.04000000     | 1                            | 1.7726E 04        | 6.6759E 05        | 6.5577E-02         |
| 0.05000000     | 12                           | 5.3162E 03        | -3.5045E 06       | 7.7877E-02         |
| 0.06000000     | 12                           | 1.2085E 04        | -6.1387E 06       | 1.3641E-01         |
| 0.06999999     | 3                            | 5.4359E 04        | -2.7067E 06       | 2.0465E-01         |
| 0.07999998     | 9                            | 3.5852E 04        | 2.9855E 05        | 1.3085E-01         |
| 0.08999997     | 2                            | 3.8774E 04        | 5.8878E 06        | 1.7474E-01         |
| 0.09999996     | 10                           | 5.1361E 04        | 1.4391E 07        | 3.1979E-01         |
| MAXIMUM VALUE: |                              | 5.4359E 04        | 1.4391E 07        | 3.1979E-01         |
| MINIMUM VALUE: |                              | 0.0               | -6.1387E 06       |                    |

LOAD INTERACTION CURVE NO. 7 , BEAM NO. 4  
LOCATION: FS= 620.000 , BL= 0.0 , WL= 0.0

| TIME           | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|----------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0            | 2                            | 3.1956E 04        | 5.7088E 06        | 1.5476E-01         |
| 0.01000000     | 2                            | 3.2378E 04        | 5.5424E 06        | 1.5377E-01         |
| 0.02000000     | 1                            | 3.9180E 04        | 4.3801E 06        | 1.6059E-01         |
| 0.03000000     | 1                            | 4.5518E 04        | 2.3272E 06        | 1.7169E-01         |
| 0.04000000     | 9                            | 3.4936E 04        | 5.9864E 05        | 1.2750E-01         |
| 0.05000000     | 3                            | 5.8597E 04        | -3.8165E 06       | 2.2545E-01         |
| 0.06000000     | 3                            | 1.0030E 05        | -6.3104E 06       | 3.8471E-01         |
| 0.06999999     | 9                            | 1.0682E 05        | -2.3249E 06       | 3.8985E-01         |
| 0.07999998     | 9                            | 1.0936E 05        | -6.6179E 05       | 3.9914E-01         |
| 0.08999997     | 1                            | 1.1516E 05        | 5.6730E 06        | 4.3322E-01         |
| 0.09999996     | 2                            | 8.7665E 04        | 1.3921E 07        | 4.0273E-01         |
| MAXIMUM VALUE: |                              | 1.1516E 05        | 1.3921E 07        | 4.3322E-01         |
| MINIMUM VALUE: |                              | 0.0               | -6.3104E 06       |                    |

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 5 OF 10)

LOAD INTERACTION CURVE NO. 8 , BEAM NO. 5  
 LOCATION: FS= 960.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 1                            | 2.6029E 04        | 1.3903E 07        | 1.8948E-01         |
| 0.01000000 | 1                            | 3.3438E 04        | 1.3620E 07        | 1.8410E-01         |
| 0.02000000 | 7                            | 7.7627E 04        | 1.3860E 07        | 2.6954E-01         |
| 0.03000000 | 7                            | 1.4105E 05        | 1.9478E 07        | 4.8975E-01         |
| 0.04000000 | 2                            | 1.4238E 05        | 3.0446E 07        | 4.9932E-01         |
| 0.05000000 | 2                            | 1.7177E 05        | 3.6874E 07        | 6.0333E-01         |
| 0.06000000 | 7                            | 2.2831E 05        | 4.1785E 07        | 7.9275E-01         |
| 0.06999999 | 2                            | 1.9131E 05        | 4.7063E 07        | 7.1118E-01         |
| 0.07999998 | 1                            | 8.7044E 04        | 5.3087E 07        | 7.2583E-01         |
| 0.08999997 | 1                            | 1.5296E 05        | 5.0584E 07        | 6.7823E-01         |
| 0.09999996 | 2                            | 2.4960E 05        | 5.6226E 07        | 8.9400E-01         |

MAXIMUM VALUE: 2.4960E 05 5.6226E 07 8.9400E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 9 , BEAM NO. 6  
 LOCATION: FS= 960.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 1                            | 3.9303E 04        | 1.4143E 07        | 1.9029E-01         |
| 0.01000000 | 1                            | 4.1318E 04        | 1.4114E 07        | 1.8950E-01         |
| 0.02000000 | 2                            | 6.3622E 04        | 1.4524E 07        | 2.2913E-01         |
| 0.03000000 | 7                            | 1.1614E 05        | 1.9357E 07        | 4.0326E-01         |
| 0.04000000 | 7                            | 1.4935E 05        | 3.0596E 07        | 5.1859E-01         |
| 0.05000000 | 2                            | 1.6815E 05        | 3.8531E 07        | 6.0653E-01         |
| 0.06000000 | 2                            | 2.0004E 05        | 4.2754E 07        | 7.0138E-01         |
| 0.06999999 | 2                            | 1.7822E 05        | 4.8462E 07        | 6.9276E-01         |
| 0.07999998 | 1                            | 1.1828E 05        | 5.6003E 07        | 7.6065E-01         |
| 0.08999997 | 1                            | 1.2390E 05        | 5.3240E 07        | 7.2094E-01         |
| 0.09999996 | 2                            | 1.9407E 05        | 5.8359E 07        | 7.9092E-01         |

MAXIMUM VALUE: 2.0004E 05 5.8359E 07 7.9092E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 10 , BEAM NO. 6  
 LOCATION: FS=1000.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 1                            | 3.9303E 04        | 1.2568E 07        | 1.8553E-01         |
| 0.01000000 | 1                            | 4.1318E 04        | 1.2459E 07        | 1.9174E-01         |
| 0.02000000 | 1                            | 6.3622E 04        | 1.1974E 07        | 2.6373E-01         |
| 0.03000000 | 9                            | 1.1614E 05        | 1.4703E 07        | 4.5724E-01         |
| 0.04000000 | 1                            | 1.4935E 05        | 2.4612E 07        | 6.0381E-01         |
| 0.05000000 | 1                            | 1.6815E 05        | 3.1794E 07        | 6.9765E-01         |
| 0.06000000 | 1                            | 2.0004E 05        | 3.4739E 07        | 8.1648E-01         |
| 0.06999999 | 1                            | 1.7822E 05        | 4.1321E 07        | 7.7277E-01         |

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 6 OF 10)

0.07999998 2 1.1828E 05 5.1263E 07 6.9592E-01  
 0.08999997 2 1.2390E 05 4.8276E 07 6.6458E-01  
 0.09999996 1 1.9407E 05 5.0583E 07 8.6592E-01

MAXIMUM VALUE: 2.0004E 05 5.1263E 07 8.6592E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 11 , BEAM NO. 7  
 LOCATION: FS=1080.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 3                            | 2.3983E 04        | 1.0029E 07        | 1.7194E-01         |
| 0.01000000 | 3                            | 2.3995E 04        | 1.0004E 07        | 1.7155E-01         |
| 0.02000000 | 2                            | 2.5504E 04        | 9.0994E 06        | 1.6228E-01         |
| 0.03000000 | 2                            | 4.5198E 04        | 8.5146E 06        | 2.1695E-01         |
| 0.04000000 | 2                            | 8.9251E 04        | 1.4050E 07        | 4.0275E-01         |
| 0.05000000 | 2                            | 1.0990E 05        | 2.0777E 07        | 5.2819E-01         |
| 0.06000000 | 2                            | 1.0782E 05        | 2.1828E 07        | 5.3159E-01         |
| 0.06999999 | 2                            | 1.0645E 05        | 2.9461E 07        | 5.9827E-01         |
| 0.07999998 | 2                            | 1.1290E 05        | 4.1935E 07        | 7.3371E-01         |
| 0.08999997 | 3                            | 8.0235E 04        | 4.3049E 07        | 7.2362E-01         |
| 0.09999996 | 3                            | 9.6245E 04        | 3.9365E 07        | 6.7623E-01         |

MAXIMUM VALUE: 1.1290E 05 4.3049E 07 7.3371E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 12 , BEAM NO. 7  
 LOCATION: FS=1160.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 3                            | 2.3983E 04        | 8.0998E 06        | 1.9212E-01         |
| 0.01000000 | 3                            | 2.3995E 04        | 8.0736E 06        | 1.9161E-01         |
| 0.02000000 | 3                            | 2.5504E 04        | 7.0481E 06        | 1.7293E-01         |
| 0.03000000 | 2                            | 4.5198E 04        | 4.8792E 06        | 1.7986E-01         |
| 0.04000000 | 1                            | 8.9251E 04        | 6.8714E 06        | 3.4757E-01         |
| 0.05000000 | 2                            | 1.0990E 05        | 1.1939E 07        | 4.3823E-01         |
| 0.06000000 | 2                            | 1.0782E 05        | 1.3156E 07        | 4.4723E-01         |
| 0.06999999 | 3                            | 1.0645E 05        | 2.0900E 07        | 5.5110E-01         |
| 0.07999998 | 3                            | 1.1290E 05        | 3.2855E 07        | 7.9869E-01         |
| 0.08999997 | 3                            | 8.0235E 04        | 3.6596E 07        | 8.3308E-01         |
| 0.09999996 | 3                            | 9.6245E 04        | 3.1624E 07        | 7.5333E-01         |

MAXIMUM VALUE: 1.1290E 05 3.6596E 07 8.3308E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 13 , BEAM NO. 8  
 LOCATION: FS=1240.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL LOAD<br>LINE NUMBER | X LOAD<br>(NO. 3) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|------------------------------|-------------------|-------------------|--------------------|
| 0.0        | 12                           | 9.1594E 03        | 6.7598E 06        | 1.9314E-01         |
| 0.01000000 | 12                           | 9.1269E 03        | 6.7581E 06        | 1.9309E-01         |

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 7 OF 10)

|            |    |            |            |            |
|------------|----|------------|------------|------------|
| 0.02000000 | 12 | 6.9136E 03 | 6.5027E 06 | 1.8579E-01 |
| 0.03000000 | 12 | 9.6964E 02 | 4.6879E 06 | 1.3394E-01 |
| 0.04000000 | 2  | 1.1809E 04 | 2.2847E 06 | 7.4081E-02 |
| 0.05000000 | 2  | 3.3667E 04 | 4.2377E 06 | 1.6614E-01 |
| 0.06000000 | 3  | 2.0969E 04 | 9.4567E 06 | 2.7731E-01 |
| 0.06999999 | 3  | 4.1532E 04 | 1.6141E 07 | 4.7927E-01 |
| 0.07999998 | 3  | 7.7620E 04 | 2.2334E 07 | 6.8404E-01 |
| 0.08999997 | 3  | 7.9260E 04 | 2.9386E 07 | 8.7635E-01 |
| 0.09999996 | 3  | 4.9596E 04 | 3.0264E 07 | 8.6933E-01 |

MAXIMUM VALUE: 7.9260E 04 3.0264E 07 8.7635E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 14 , BEAM NO. 8  
 LOCATION: FS=1320.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL<br>LINE NUMBER | LOAD<br>(NO. 3) | X LOAD<br>(NO. 5) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|-------------------------|-----------------|-------------------|-------------------|--------------------|
| 0.0        | 8                       | 9.1594E 03      | 6.0106E 06        | 2.2098E-01        |                    |
| 0.01000000 | 8                       | 9.1269E 03      | 6.0115E 06        | 2.2101E-01        |                    |
| 0.02000000 | 8                       | 6.9136E 03      | 5.9372E 06        | 2.1828E-01        |                    |
| 0.03000000 | 8                       | 9.6964E 02      | 4.6086E 06        | 1.6943E-01        |                    |
| 0.04000000 | 1                       | 1.1809E 04      | 1.3188E 06        | 6.5427E-02        |                    |
| 0.05000000 | 1                       | 3.3667E 04      | 1.4842E 06        | 2.1132E-01        |                    |
| 0.06000000 | 8                       | 2.0969E 04      | 7.7417E 06        | 2.8462E-01        |                    |
| 0.06999999 | 8                       | 4.1532E 04      | 1.2744E 07        | 4.6854E-01        |                    |
| 0.07999998 | 2                       | 7.7620E 04      | 1.5986E 07        | 6.1986E-01        |                    |
| 0.08999997 | 8                       | 7.9260E 04      | 2.2904E 07        | 8.4206E-01        |                    |
| 0.09999996 | 8                       | 4.9596E 04      | 2.6208E 07        | 9.6353E-01        |                    |

MAXIMUM VALUE: 7.9260E 04 2.6208E 07 9.6353E-01  
 MINIMUM VALUE: 0.0 0.0

LOAD INTERACTION CURVE NO. 15 , BEAM NO. 9  
 LOCATION: FS=1400.000 , BL= 0.0 , WL= 0.0

| TIME       | CRITICAL<br>LINE NUMBER | LOAD<br>(NO. 3) | X LOAD<br>(NO. 5) | Y LOAD<br>(NO. 5) | MAX. LOAD<br>RATIO |
|------------|-------------------------|-----------------|-------------------|-------------------|--------------------|
| 0.0        | 3                       | 2.3090E 04      | 4.0092E 06        | 2.3738E-01        |                    |
| 0.01000000 | 3                       | 2.3089E 04      | 4.0089E 06        | 2.3736E-01        |                    |
| 0.02000000 | 3                       | 2.2937E 04      | 4.0195E 06        | 2.3775E-01        |                    |
| 0.03000000 | 3                       | 1.8054E 04      | 3.3308E 06        | 1.9598E-01        |                    |
| 0.04000000 | 1                       | 8.2390E 03      | 3.4136E 05        | 6.0506E-02        |                    |
| 0.05000000 | 1                       | 1.2675E 04      | -6.3077E 05       | 1.1410E-01        |                    |
| 0.06000000 | 3                       | 3.0582E 04      | 5.6778E 06        | 3.3385E-01        |                    |
| 0.06999999 | 3                       | 4.8597E 04      | 8.9195E 06        | 5.2507E-01        |                    |
| 0.07999998 | 3                       | 6.1157E 04      | 1.0004E 07        | 5.9621E-01        |                    |
| 0.08999997 | 3                       | 8.3528E 04      | 1.5607E 07        | 9.1709E-01        |                    |
| 0.09999996 | 3                       | 8.9178E 04      | 2.0268E 07        | 1.1699E 00        |                    |

MAXIMUM VALUE: 8.9178E 04 2.0268E 07 1.1699E 00  
 MINIMUM VALUE: 0.0 -6.3077E 05

SUMMARY OF MAXIMUM LOAD RATIOS

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 8 OF 10)

| INTERACTION<br>CURVE NO. | BEAM<br>NO. | INT. CURVE<br>FS | LOCATION<br>BL | WL  | MAXIMUM<br>LOAD RATIO |
|--------------------------|-------------|------------------|----------------|-----|-----------------------|
| 1                        | 1           | 300.000          | 0.0            | 0.0 | 3.6006E-02            |
| 2                        | 2           | 300.000          | 0.0            | 0.0 | 3.9399E-01            |
| 3                        | 2           | 400.000          | 0.0            | 0.0 | 4.8400E-01            |
| 4                        | 3           | 480.000          | 0.0            | 0.0 | 4.5667E-01            |
| 5                        | 3           | 540.000          | 0.0            | 0.0 | 3.3298E-01            |
| 6                        | 3           | 620.000          | 0.0            | 0.0 | 3.1979E-01            |
| 7                        | 4           | 620.000          | 0.0            | 0.0 | 4.3322E-01            |
| 8                        | 5           | 960.000          | 0.0            | 0.0 | 8.9400E-01            |
| 9                        | 6           | 960.000          | 0.0            | 0.0 | 7.9092E-01            |
| 10                       | 6           | 1000.000         | 0.0            | 0.0 | 8.6592E-01            |
| 11                       | 7           | 1080.000         | 0.0            | 0.0 | 7.3371E-01            |
| 12                       | 7           | 1160.000         | 0.0            | 0.0 | 8.3308E-01            |
| 13                       | 8           | 1240.000         | 0.0            | 0.0 | 8.7635E-01            |
| 14                       | 8           | 1320.000         | 0.0            | 0.0 | 9.6353E-01            |
| 15                       | 9           | 1400.000         | 0.0            | 0.0 | 1.1699E 00            |

OVERALL MAXIMUM LOAD RATIO = 1.1699E 00  
 CORRESPONDING INT. CURVE NO.= 15

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 9 OF 10)

TIME HISTORIES OF VEHICLE CG MOTIONS

| TIME     | DXI<br>VXI                 | DYI<br>VYI | DZI<br>VZI                 | FXI<br>AXI                  | FYI<br>AYI | FZI<br>AZI                  |
|----------|----------------------------|------------|----------------------------|-----------------------------|------------|-----------------------------|
| 0.0      | 0.0<br>3.14000D 03         | 0.0<br>0.0 | 0.0<br>3.00000D 02         | 7.16227D-12<br>-9.88461D-03 | 0.0<br>0.0 | -4.54747D-12<br>2.21054D-02 |
| 0.010000 | 3.13976D 01<br>3.13932D 03 | 0.0<br>0.0 | 2.99302D 00<br>2.97963D 02 | 5.96861D 04<br>-3.30717D-01 | 0.0<br>0.0 | 1.98954D 05<br>-1.04434D 00 |
| 0.020000 | 6.27826D 01<br>3.13753D 03 | 0.0<br>0.0 | 5.94653D 00<br>2.92227D 02 | 1.05983D 05<br>-5.79321D-01 | 0.0<br>0.0 | 3.53277D 05<br>-1.87156D 00 |
| 0.030000 | 9.41457D 01<br>3.13501D 03 | 0.0<br>0.0 | 8.82912D 00<br>2.84048D 02 | 1.29544D 05<br>-7.05133D-01 | 0.0<br>0.0 | 4.31816D 05<br>-2.29257D 00 |
| 0.040000 | 1.25482D 02<br>3.13230D 03 | 0.0<br>0.0 | 1.16250D 01<br>2.75235D 02 | 1.23940D 05<br>-6.73781D-01 | 0.0<br>0.0 | 4.13134D 05<br>-2.19246D 00 |
| 0.050000 | 1.56793D 02<br>3.12984D 03 | 0.0<br>0.0 | 1.43366D 01<br>2.67220D 02 | 1.13817D 05<br>-6.17434D-01 | 0.0<br>0.0 | 3.79396D 05<br>-2.01165D 00 |
| 0.060000 | 1.88079D 02<br>3.12729D 03 | 0.0<br>0.0 | 1.69683D 01<br>2.58889D 02 | 1.36810D 05<br>-7.38212D-01 | 0.0<br>0.0 | 4.56036D 05<br>-2.42251D 00 |
| 0.070000 | 2.19335D 02<br>3.12373D 03 | 0.0<br>0.0 | 1.95022D 01<br>2.47167D 02 | 2.02074D 05<br>-1.08618D 00 | 0.0<br>0.0 | 6.73580D 05<br>-3.58865D 00 |
| 0.080000 | 2.50551D 02<br>3.11965D 03 | 0.0<br>0.0 | 2.19053D 01<br>2.33676D 02 | 1.98194D 05<br>-1.06490D 00 | 0.0<br>0.0 | 6.60648D 05<br>-3.51937D 00 |
| 0.090000 | 2.81728D 02<br>3.11580D 03 | 0.0<br>0.0 | 2.41760D 01<br>2.20964D 02 | 1.60565D 05<br>-8.63368D-01 | 0.0<br>0.0 | 5.35217D 05<br>-2.84706D 00 |
| 0.100000 | 3.12871D 02<br>3.11290D 03 | 0.0<br>0.0 | 2.63361D 01<br>2.11426D 02 | 1.34529D 05<br>-7.23725D-01 | 0.0<br>0.0 | 4.48435D 05<br>-2.38189D 00 |

2-197

FIGURE 2-25. KRASH85 SUMMARY OUTPUT DATA (SHEET 10 OF 10)

$t = .0616$ , NEWPIN = 1 signifies that the coding has changed from fixed at the  $j$  end to pinned at the  $j$  end ( $j = 2$ ). This is the technique for forming a plastic hinge. At  $t = .0643$ , NEWPIN = 0 signifies that unloading has occurred, so that a fixed end condition is appropriate. Subsequent changes in NEWPIN define transition points on a hysteresis curve. NEWPIN = 0 always means a transition to fixed coding has taken place, due to unloading from a plastic hinge moment. NEWPIN = 1 always means that a transition to pinned coding has taken place, due to exceeding the input plastic hinge moment. DIRECTION = 5 in Figure 2-23 refers to moments about the  $y$  beam axis (6 would be moment about the  $z$  beam axis). DIRECTION = -5 means that the sign of the plastic hinge moment at that time is negative.

The energy summary showing the time variation of the different types of energy is presented. This summary facilitates visualizing the energy flow time variation; the one or two page summary is much easier to read than skimming through the basic time history print, which can run to hundreds of pages. Figure 2-25 shows an example of this output for the sample case. A quick glance at the "PERCENT TOTAL SYSTEM ENERGY" column tells the user how stable the solution is. The percent energy should stay within 99 - 101 percent, preferably within a  $\pm 0.2$  percent band. Any significant system instabilities will quickly manifest themselves in this output.

The column entitled "PERCENT MAXIMUM ENERGY DEVIATION" shows the maximum deviation from 100 percent of the total energy for each mass individually, i.e., at each time the worst deviation of all the masses is shown. These numbers will always indicate a greater departure from 100 percent than the "PERCENT TOTAL SYSTEM ENERGY" column, wherein all the masses constituting the system are included. The reason for this situation is that some of the masses have positive and some negative deviations from 100 percent, and when these are summed over the total system cancellations occur. Individual mass total energy deviations in the order of 10 percent may be tolerable, as long as the total system energy is acceptable. In the example shown in figure 2-25, the total system energy remains constant within .01 percent, while the maximum energy deviation is .02 percent at the conclusion of the analysis. The (+) in the heading for POTENTIAL ENERGY signifies that energy changes due to

applied force or acceleration input time histories are included in the numbers shown (refer to Section 2.2.3.2.5).

Time histories of interaction loads follow the energy summary. In the sample case, there are 15 of these time histories, requiring about  $5\frac{1}{2}$  pages of output. For each load interaction curve number, the following information is presented versus time:

- X load value, pounds or inch-pounds
- Y load value, pounds or inch-pounds
- Critical load line number. Of all the straight line segments making up the load envelope, the one which is most critical relative to the current X,Y combined loads is indicated. In general, the critical load line number will change with time as the X and Y loads change.
- Maximum load ratio. This is the ratio by which the current load vector length (pt. 0,0 to point X,Y) exceeds a line along this vector but terminating at the intersection of the vector and the critical load line (input). A ratio greater than 1.0 signifies an excursion outside the load envelope defined in the input data.

Each time history data block also includes the identification of the load interaction curve number, beam number and location (FS, BL and WL). Also, the directions of the X and Y loads are defined. In the sample case, the X load is always 3 (vertical shear, Fz) and the Y load is always 5 (bending moment about 7 axis). At the end of each time history data block, the maximum and minimum values of X load and Y load are shown, as well as the peak value of MAX.LOAD RATIO.

After the individual load interaction time histories, a summary of the peak values of the maximum load ratio is shown for all the input curves. This is followed by the overall maximum load ratio and the corresponding interaction curve number. For example, in figure 2-25, the overall maximum load ratio is 1.1699, which occurs for interaction curve number 15. This output gives a very quick indication of the severity of the impact being analyzed. However, maximum load ratios greater than 1.0 do not necessarily imply that the corresponding structural section would have completely failed. Refer to Section 3.1 for a discussion of the theory and usage of the load-interaction data.

If the interaction curves are used to obtain an overall section shear and moment (summation of all loads acting at a particular station) then the aforementioned printed summary is applicable to the sum of the forces acting and not an individual beam.

The final summary print output is a time history of the overall vehicle c.g. motions. The quantities included are

- c.g. translational accelerations, g's
- c.g. translational velocities, in/sec
- c.g. translational displacements, in (= 0 at time = 0)
- Net forces acting at the c.g., pounds

All these data are calculated in the same manner as the c.g. translational velocities, described in Section 1.3.9 of Volume I. Weighted averages of all the mass motions are used to arrive at a value for the entire system. The final results completely define the translational motions of an uncoupled 1-mass, 3 degree-of-freedom system. Rotational loads and motions are not presented.

These data have been used to determine vertical load-deflection characteristics for a large transport frame structure. Cross plots of DZI vs FZI from the KRASH analysis of a frame structure form a load-deflection curve that can be used to determine the external spring characteristics of a stick model of an entire airplane.

#### 2.3.3.4 Time History Plots

The final section of output data consists of time history plots of selected response quantities. Figure 2-26 illustrates typical output data. The sequential time history print of the three responses is shown on the left, while the plots are generated using three separate printer symbols. The scale factor for all three plots is shown in the upper right corner of the page. The plot summary is printed on a separate output page as are the various sets of data.

BEAM 11 I,M = 11, 1 J,N = 12, 0 AXIAL AND SHEAR FORCES(LB)

| TIME(SEC) | FX<br>*    | FY<br>=    | FZ<br>+    |
|-----------|------------|------------|------------|
| 0.0       | 1.118E 05  | 2.958E 04  | -2.167E 04 |
| 0.010     | 1.052E 05  | 2.512E 04  | -1.221E 04 |
| 0.020     | 8.173E 04  | 1.556E 04  | 1.089E 04  |
| 0.030     | 6.175E 04  | 7.573E 03  | 1.665E 04  |
| 0.040     | 4.526E 04  | 5.869E 03  | 1.412E 04  |
| 0.050     | 8.538E 03  | -6.437E 03 | 3.082E 04  |
| 0.060     | -1.183E 04 | -1.947E 04 | 3.329E 04  |
| 0.070     | -1.048E 04 | -7.815E 03 | 1.572E 04  |
| 0.080     | 9.491E 02  | 1.251E 04  | 6.732E 03  |
| 0.090     | 4.979E 03  | 4.551E 03  | 3.533E 04  |
| 0.100     | 2.677E 04  | -3.599E 04 | 7.308E 04  |

SCALE FACTOR = 1.760E 04

.....I.....I

FIGURE 2-26. KRASH85 SAMPLE OUTPUT TIME HISTORY PLOTS

## SECTION 3

### ADDITIONAL KRASH85 DATA REQUIREMENTS

This sections contains a description of those KRASH data requirements that are needed for KRASH85. These requirements are in addition to those items provided in Section 4 of reference 2.

#### 3.1 LOAD-INTERACTION CURVES

KRASH85 has provisions to include load interaction curve data for failure prediction. Figure 3-1 shows a typical set of interaction curves for fuselage bending and shear at a particular airplane fuselage station. Figure 3-2 identifies the stringers at a representative frame location. The input requirements for load-interaction curves are as follows:

- The user can specify interaction curves at a maximum of 40 locations, which can be anywhere. For each curve, either a Fuselage Station, Butt Line, or Water Line (only one) is input, as well as the corresponding beam number in a KRASH model. The location of the interaction curve can be anywhere along a given beam; the user is not restricted to using the end points of the beam. For essentially fore-aft beams, only F.S. is input, while for lateral and vertical beams B.L. and W.L., respectively, are input to define the location of a load interaction curve. For each load interaction curve, the user inputs the following additional information:
  - The two load directions for the interaction curve. In figure 3-1, the abscissa represents vertical shear (direction 3) and the ordinate represents vertical bending moment (direction 5). Any 2 of the 6 loads can be specified.
  - A user-specified load sign convention.
  - Horizontal and vertical load interaction lines (4 total).

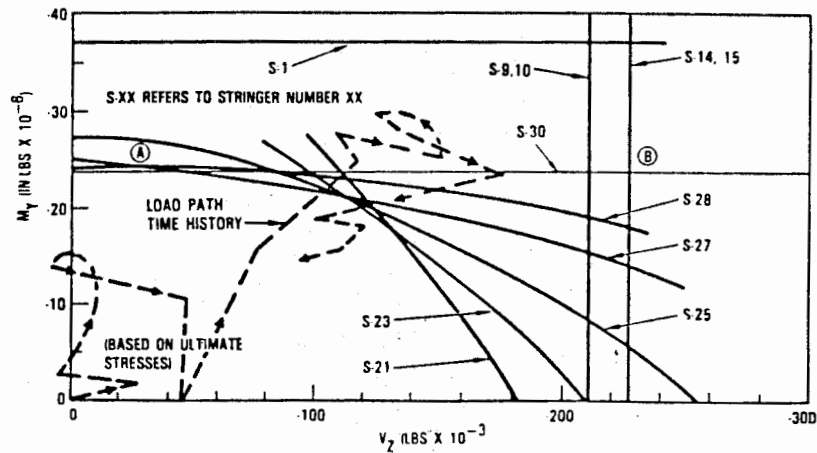


FIGURE 3-1. MAXIMUM ALLOWABLE MOMENT AND SHEAR ENVELOPE - NEGATIVE BENDING

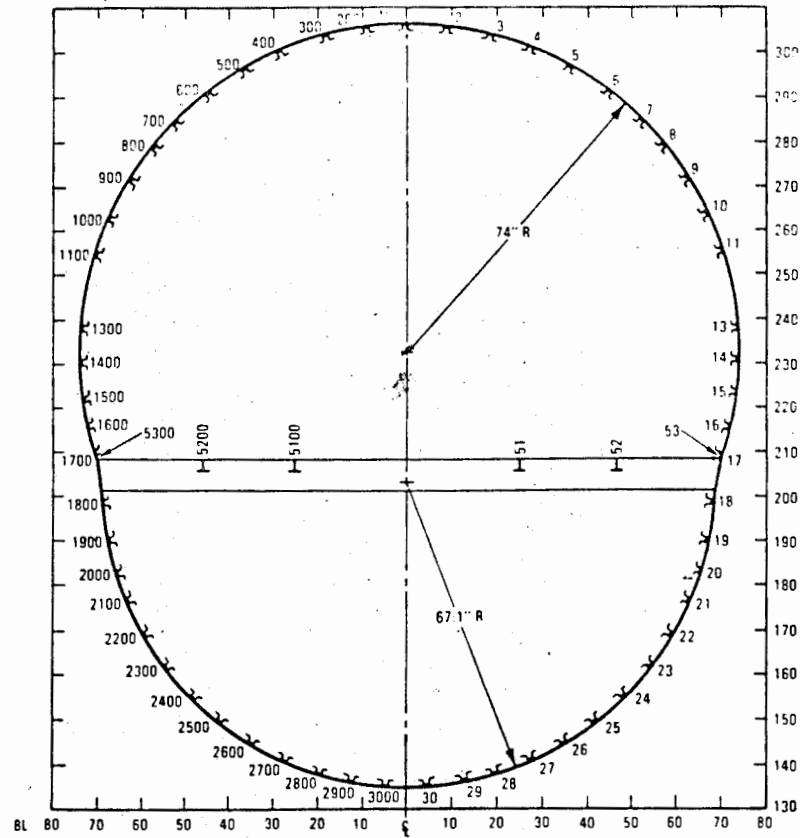


FIGURE 3-2. TYPICAL CROSS SECTION WITH STIFFENER LOCATIONS - REAR VIEW

- Up to 20 straight, sloping load interaction lines. The x and y axis intercepts are input for each line.
- A quantity called RUPRAT (rupture ratio), which is explained below.

The program is coded so that for the sloping interaction lines, data are input for any one quadrant (x and y axis intercepts). In addition, "mirror flags" are input to tell the program whether or not to generate mirror image lines about the x and/or y axes. For example, in figure 3-3 the data are input for line 1 (x and y intercepts), and both the x and y axis mirror flags are input as 1. The program then automatically generates lines 2, 3, and 4. If only a mirror about the y axis had been specified, then the program would generate only line 2.

At each location the program calculates the following:

- The internal beam loads, in KRASH sign convention, at the load interaction point.
  - These loads are transformed to correspond to the standard structural load sign convention employed by the Lockheed-California Company (Calac), shown in figure 3-4.
  - The Calac-convention loads are then transformed to a user-specified sign convention. One of ten such sign conventions may be selected by the user. If no convention is specified, the loads are left in the Calac sign convention.
  - The two interaction loads are selected from the 6 loads calculated.
  - A load ratio for each load interaction line. A ratio greater than one indicates that a load interaction curve has been exceeded, signifying that at least one element has failed in some manner. KRASH is coded to allow complete rupture of a beam element if an input maximum load ratio (RUPRAT) is exceeded.
1. A left handed coordinate system is used; moments employ left hand rule.
  2. Internal loads and moments are positive if the loads or moments applied by the part with the greater algebraic coordinate are positive in accordance with body axes conventions shown as x, y, z.

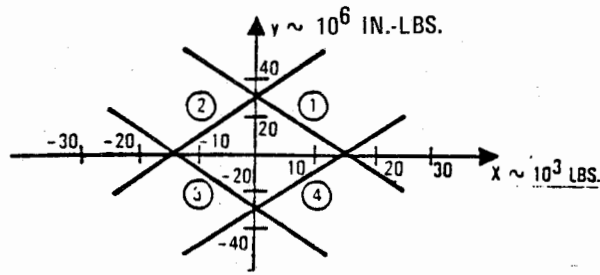


FIGURE 3-3. GENERATION OF LOAD-INTERACTION CURVES

Application of these rules to fuselage and wing loads are shown in the following sketch:

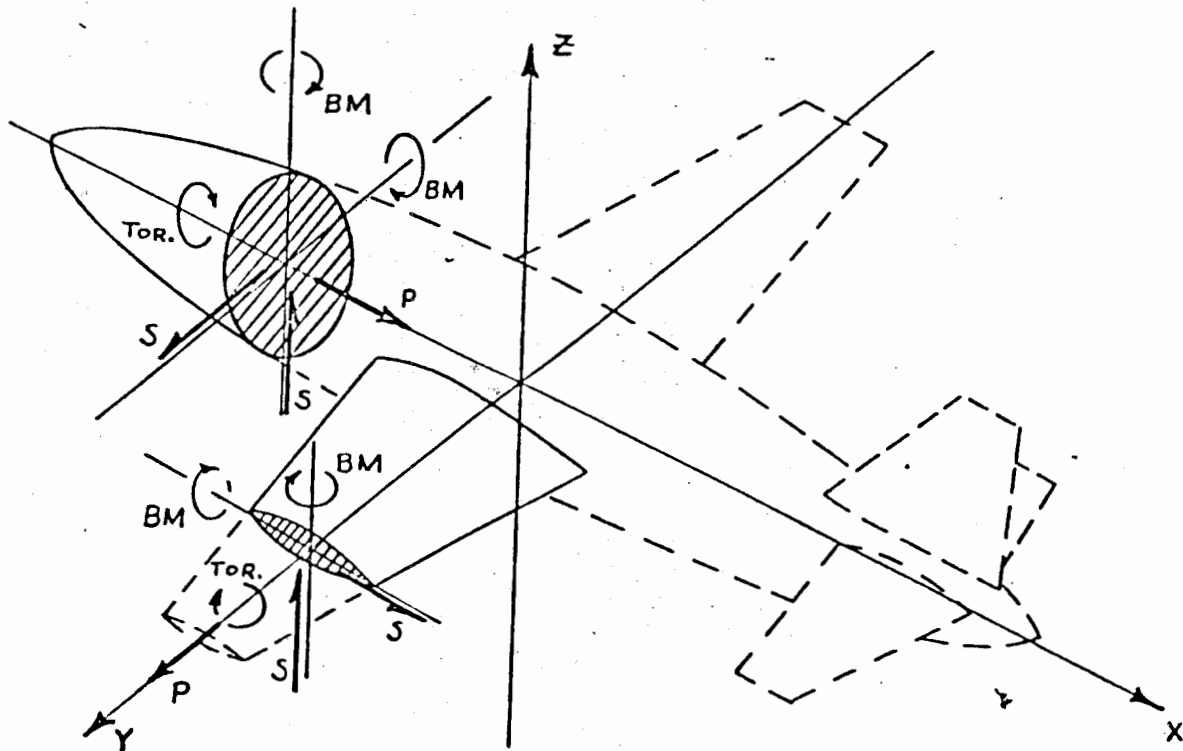


FIGURE 3-4. LOCKHEED LOAD SIGN CONVENTIONS

Loads shown are those applied to the cutplane by the parts with the greater algebraic coordinate (station).

At the conclusion of the computer run the following is printed:

- Time histories of the following quantities for each load interaction curve.
  - X Load (fuselage vertical shear in figure 3-1).
  - Y Load (fuselage vertical bending in figure 3-1).
  - Maximum load ratio at each time.
  - Input load interaction line number corresponding to the maximum load ratio at that time.
- A summary which shows the peak maximum load ratio for each interaction curve and the overall maximum load ratio.

The user has the option of saving the load-interaction curve time history data in an output file, which can be used for subsequent post-processing. These data can be plotted to show the time-varying path of the calculated x-y loads, superimposed on the load-interaction curve (as illustrated by the dashed lines in figure 3-1).

While the load interaction data output provides a great deal of useful information not previously available, considerable caution must be exercised by the user in its interpretation. A maximum load ratio greater than one does not, by itself, indicate complete failure of the corresponding fuselage section. The output data have been used in conjunction with the actual manufacturer-furnished interaction diagrams to assess the extent of damage at each location. For example, suppose that the computed combined loads were as shown by points A or B in figure 3-1. For point A stringers S27 through S30 could fail. For point B several additional stringer elements could fail (S-9 through S-15 and S-21 through S-30). Usually the input data to KRASH is the minimum necessary to define the inner boundary in figure 3-1. The current KRASH85 coding does not define which stringers fail; it only defines the critical load line at each time out.

### 3.2 ARBITRARY MASS NUMBERING

Program KRASH has been modified to accept user supplied mass point identification numbers. The modification can be thought of conceptually as a mass point number pre-processor and a mass point number post-processor. The pre-processor converts external mass point numbers to internal mass point numbers. The external mass point numbers are supplied by the user as part of the input while the internal mass point numbers are defined by the program. The internal mass numbers are consistent with the numbering system previously used in earlier versions of program KRASH. After conversion program KRASH85 is executed using the internal mass point numbers. After execution is completed the post-processor converts the internal mass point numbers to external mass point numbers for output. In the modification, two new subroutines (INPT and INPTPL) were added. In these subroutines, two arrays (MASS and IMASS) are defined which cross reference the external mass point numbers to internal mass point numbers and vice versa.

The external mass point identification numbers are input in column 71 and 72 on Card 200 (MASS POINT DATA). The identification numbers can not be less than zero or greater than 99. If they are, program execution will be halted. If any of the numbers are left blank or set equal to zero, the program will automatically assign sequential identification numbers to all mass points in the order of input. This option accommodates previously developed input data sets.

When the RUNMOD=2 option is used, the program automatically assigns an external mass point identification number to the image mass point generated under this option. The identification number assigned is 100 greater than the identification number of the mass point used in defining the image mass point. For example, if the input mass point identification number is 96 then the image mass point identification number will be 196.

## SECTION 4

### COMMON BLOCK REGIONS

KRASH85 is designed such that data storage and transfer is accomplished using the many common block regions defined within the program. A cross reference of the common block names and using subroutines is given in Table 4-1. Included in the cross reference summary are size requirements defined by the FORTRAN H/EXTENDED (OPT = 3) compiler.

TABLE 4-1. KRASH85 SUBROUTINE/COMMON REGION REFERENCE

| SUBROUTINE       |                | A<br>C<br>C<br>E<br>L<br>T | A<br>C<br>C<br>E<br>N | B<br>E<br>A<br>M | C<br>F<br>O<br>R<br>C<br>E | D<br>E<br>P<br>T<br>H | D<br>O<br>I<br>J | G<br>E<br>N<br>M<br>O<br>D | I<br>C | I<br>C<br>I<br>N<br>P<br>T | I<br>N<br>P<br>R<br>T | I<br>N<br>P<br>T | I<br>N<br>P<br>T<br>L | I<br>N<br>P<br>U<br>T | I<br>N<br>T<br>E<br>R<br>P | K<br>V<br>B | L<br>T<br>C<br>A<br>L<br>C | M<br>A<br>I<br>N | M<br>O<br>D<br>X<br>D<br>P | N<br>E<br>T<br>E<br>O<br>R | P<br>R<br>E<br>P<br>L<br>T | P<br>R<br>I<br>N<br>T | R<br>S<br>I<br>N | R<br>S<br>O<br>U<br>T | S<br>M<br>L<br>O<br>A<br>D |   |
|------------------|----------------|----------------------------|-----------------------|------------------|----------------------------|-----------------------|------------------|----------------------------|--------|----------------------------|-----------------------|------------------|-----------------------|-----------------------|----------------------------|-------------|----------------------------|------------------|----------------------------|----------------------------|----------------------------|-----------------------|------------------|-----------------------|----------------------------|---|
| COMMON<br>REGION | REGION<br>SIZE |                            |                       |                  |                            |                       |                  |                            |        |                            |                       |                  |                       |                       |                            |             |                            |                  |                            |                            |                            |                       |                  |                       |                            |   |
| ACCEDE           | 30             | *                          |                       |                  |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             |                            |                  |                            |                            |                            |                       |                  |                       |                            |   |
| ACCEIR           | 280            | *                          |                       |                  |                            | *                     |                  |                            |        | *                          |                       |                  |                       |                       |                            |             |                            |                  |                            |                            |                            |                       |                  |                       |                            |   |
| ACCSAV           | C8F4           |                            | *                     |                  |                            | *                     |                  | *                          |        | *                          |                       |                  |                       | *                     |                            |             | *                          | *                |                            |                            |                            |                       |                  |                       |                            |   |
| ACCSV1           | 10             |                            | *                     |                  |                            | *                     |                  | *                          |        | *                          |                       |                  |                       | *                     |                            |             | *                          | *                |                            |                            |                            |                       |                  |                       |                            |   |
| AERO1            | 104C           |                            | *                     |                  |                            | *                     |                  | *                          |        | *                          |                       |                  |                       | *                     |                            |             | *                          | *                |                            |                            |                            | *                     |                  |                       |                            |   |
| AERO2            | F00            |                            | *                     |                  |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                |                            |                            |                            | *                     |                  |                       |                            |   |
| AFENER           | 280            | *                          |                       |                  |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             |                            | *                |                            |                            |                            |                       | *                |                       | *                          |   |
| AIJIC            | 4              |                            |                       |                  |                            |                       | *                |                            |        |                            |                       |                  |                       |                       |                            |             |                            | *                | *                          |                            |                            |                       |                  | *                     |                            |   |
| AVDF             | 28A4           |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                |                            |                            |                            |                       |                  | *                     |                            |   |
| AVDFRS           | 780            |                            |                       |                  |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                |                            |                            |                            |                       | *                | *                     | *                          |   |
| BEAMDE           | 4210           |                            |                       | *                |                            | *                     |                  |                            | *      |                            |                       |                  |                       |                       |                            |             | *                          | *                |                            |                            |                            |                       | *                | *                     | *                          |   |
| BKMOD            | 4              |                            |                       | *                |                            |                       |                  |                            |        |                            |                       |                  |                       | *                     |                            |             |                            | *                |                            |                            |                            |                       | *                | *                     | *                          |   |
| BLANK            | 9980           |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                |                            | *                          |                            |                       | *                | *                     | *                          |   |
| BOMB             | 4              |                            |                       |                  |                            |                       |                  |                            |        |                            |                       |                  |                       | *                     |                            |             |                            | *                |                            |                            |                            |                       | *                | *                     | *                          |   |
| CFIC             | 58             |                            |                       |                  | *                          |                       |                  |                            | *      |                            |                       |                  |                       |                       |                            |             |                            | *                |                            | *                          |                            |                       |                  |                       |                            |   |
| CFINPU           | 140            |                            |                       |                  | *                          |                       |                  | *                          |        | *                          |                       |                  |                       | *                     |                            |             |                            | *                |                            | *                          |                            |                       |                  |                       |                            |   |
| CFIP             | 640            |                            |                       |                  | *                          |                       |                  |                            |        | *                          |                       |                  |                       |                       |                            |             |                            | *                |                            | *                          |                            |                       |                  |                       |                            |   |
| CFPR             | 840            |                            |                       |                  | *                          |                       |                  |                            |        |                            |                       |                  |                       |                       |                            |             |                            | *                |                            | *                          |                            | *                     | *                | *                     | *                          | * |
| COMALL           | 1C088          | *                          |                       | *                | *                          | *                     | *                | *                          | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| COMMI2           | 804            |                            |                       |                  |                            |                       |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| COMMI4           | 938            |                            |                       |                  |                            |                       |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| COMMR4           | 2FD0           |                            |                       |                  |                            |                       |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| COMMR8           | 480            |                            |                       |                  |                            |                       |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| COMNEW           | 18             |                            |                       |                  |                            |                       |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DFIC             | 260            |                            |                       | *                |                            | *                     |                  |                            | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DEIN             | 1022C          | *                          |                       | *                |                            | *                     |                  | *                          |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DFINPR           | 4880           |                            |                       | *                |                            | *                     | *                | *                          | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DFIR             | 12C0           |                            |                       | *                |                            | *                     |                  |                            |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DEMA             | 8              |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          |   |
| DEPR             | 67B0           |                            |                       | *                |                            | *                     |                  |                            |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DYNICP           | 2044           |                            |                       | *                |                            | *                     |                  | *                          | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DOIN             | 480            |                            |                       | *                |                            | *                     | *                | *                          | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DRIFLG           | 140            |                            |                       |                  |                            |                       |                  |                            | *      | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| DRIMAS           | 140            |                            |                       | *                |                            | *                     |                  |                            |        | *                          | *                     | *                | *                     | *                     | *                          | *           | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| ENERGY           | 16B8           |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          |   |
| FBPLT            | C8             |                            |                       |                  |                            |                       |                  |                            |        |                            |                       |                  |                       | *                     |                            |             |                            |                  |                            | *                          | *                          | *                     | *                | *                     | *                          |   |
| FLGSET           | 5C             |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       |                       |                            |             |                            | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          |   |
| FSIJIJ           | 3840           |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       | *                     |                            |             |                            | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |
| GRASAV           | 8              |                            |                       | *                |                            | *                     |                  |                            |        |                            |                       |                  |                       | *                     |                            |             | *                          | *                | *                          | *                          | *                          | *                     | *                | *                     | *                          | * |

TABLE 4-1. KRASH85 SUBROUTINE/Common REGION REFERENCE (CONTINUED)

| SUBROUTINE       |      | A<br>C<br>C<br>E<br>L<br>T | A<br>C<br>C<br>E<br>N | B<br>E<br>A<br>M | C<br>F<br>O<br>R<br>C<br>E | D<br>F<br>R<br>I<br>V | D<br>O<br>A<br>I<br>J | G<br>E<br>N<br>M<br>O<br>D | I<br>C | I<br>C<br>I<br>N<br>P<br>T | I<br>N<br>P<br>R<br>N<br>T | I<br>N<br>P<br>R<br>T<br>1 | I<br>N<br>P<br>T | I<br>N<br>P<br>T<br>L | I<br>N<br>P<br>U<br>T | I<br>N<br>T<br>E<br>R<br>P | K<br>V<br>R | L<br>Y<br>C<br>A<br>L<br>C | M<br>A<br>I<br>N | M<br>O<br>D<br>X<br>D<br>P | N<br>E<br>T<br>F<br>O<br>R | P<br>R<br>E<br>P<br>L<br>T | P<br>P<br>I<br>N<br>T | R<br>S<br>I<br>N | R<br>S<br>O<br>U<br>T | S<br>M<br>L<br>O<br>A<br>D |
|------------------|------|----------------------------|-----------------------|------------------|----------------------------|-----------------------|-----------------------|----------------------------|--------|----------------------------|----------------------------|----------------------------|------------------|-----------------------|-----------------------|----------------------------|-------------|----------------------------|------------------|----------------------------|----------------------------|----------------------------|-----------------------|------------------|-----------------------|----------------------------|
| COMMON<br>REGION | SIZE |                            |                       |                  |                            |                       |                       |                            |        |                            |                            |                            |                  |                       |                       |                            |             |                            |                  |                            |                            |                            |                       |                  |                       |                            |
| IRALL            | 50   |                            |                       |                  |                            |                       |                       |                            |        |                            | *                          |                            |                  |                       | *                     |                            |             |                            |                  |                            |                            |                            |                       |                  |                       |                            |
| ICDFLG           | 8    |                            |                       | *                |                            |                       |                       |                            |        |                            | *                          |                            |                  |                       | *                     |                            |             |                            |                  | *                          |                            |                            |                       |                  |                       |                            |
| ICDX             | 1380 |                            |                       |                  |                            |                       |                       | *                          |        | *                          | *                          |                            |                  |                       | *                     |                            |             |                            | *                | *                          | *                          |                            |                       |                  |                       |                            |
| ICNETF           | F48  |                            |                       |                  |                            |                       |                       |                            | *      |                            | *                          |                            |                  |                       | *                     |                            | *           |                            | *                | *                          |                            |                            |                       |                  |                       |                            |
| INAC             | A284 | *                          |                       |                  |                            |                       |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          |             | *                          |                  | *                          |                            |                            |                       |                  |                       |                            |
| INCF             | DC8  |                            |                       |                  | *                          |                       |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          |             | *                          |                  | *                          |                            |                            |                       |                  |                       |                            |
| INCFIC           | 8    |                            |                       |                  | *                          |                       |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          |             | *                          |                  | *                          |                            |                            |                       |                  |                       |                            |
| INDEAC           | 4    | *                          |                       | *                |                            | *                     |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          |             | *                          | *                | *                          |                            |                            |                       |                  |                       |                            |
| INIC             | CD8  |                            |                       | *                |                            | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          | *                          |                            |                       |                  |                       | *                          |
| INIDCP           | 280  |                            | *                     | *                | *                          | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          | *                          |                            | *                     |                  |                       | *                          |
| ININPR           | 24   |                            |                       |                  |                            |                       |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     |                  |                       | *                          |
| INOUT            | E    |                            |                       |                  |                            |                       |                       |                            |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     |                  |                       |                            |
| INPR             | 8    |                            |                       | *                | *                          | *                     |                       | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| IPIC             | 4    |                            |                       |                  |                            |                       |                       |                            | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| IRDE             | 8    |                            |                       | *                |                            | *                     |                       | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| IUNAST           | 4    |                            |                       |                  |                            |                       |                       |                            |        |                            |                            |                            |                  |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| KRUL             | 1E00 |                            |                       | *                |                            |                       |                       |                            |        |                            |                            |                            |                  |                       |                       |                            | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| LTC              | 4240 |                            |                       |                  |                            | *                     | *                     |                            |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| LTCI             | 209C |                            |                       |                  |                            | *                     | *                     |                            |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MACF             | 3E84 |                            |                       |                  | *                          |                       |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MACFIN           | C    |                            |                       | *                | *                          | *                     |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MADE             | 4B04 |                            |                       | *                |                            | *                     |                       | *                          |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MAPR             | 12CC |                            |                       |                  |                            |                       |                       |                            |        |                            |                            |                            |                  |                       |                       |                            | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MAPR1            | 976  |                            |                       |                  |                            |                       |                       |                            |        |                            |                            |                            |                  |                       |                       |                            | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MASSES           | 460  |                            |                       |                  |                            |                       | *                     | *                          | *      | *                          | *                          |                            | *                | *                     | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MAX              | 2B98 |                            |                       | *                |                            | *                     | *                     | *                          | *      | *                          | *                          |                            | *                | *                     | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| MCFI11           | 8    |                            | *                     | *                | *                          | *                     |                       | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     | *                          |
| METPIN           | 290C |                            |                       | *                |                            | *                     |                       | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NHIUGM           | 144  |                            |                       |                  |                            | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP0012           | 320  |                            |                       | *                | *                          | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP0014           | 4    |                            |                       | *                | *                          | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP00R8           | 4B0  |                            |                       | *                | *                          | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP0112           | F0   |                            |                       | *                | *                          | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP01R8           | 1C20 |                            |                       | *                |                            | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP0212           | 780  |                            |                       |                  |                            | *                     | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| NP02R8           | 4B0  |                            |                       |                  | *                          |                       | *                     | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| OLEO             | 82C  |                            |                       | *                |                            | *                     |                       | *                          | *      | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| OTPLT            | F72  |                            |                       |                  |                            |                       |                       |                            |        |                            |                            |                            |                  |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |
| PPLTS            | 4CA  |                            |                       |                  |                            |                       |                       |                            |        | *                          | *                          |                            | *                |                       | *                     | *                          | *           | *                          | *                | *                          |                            | *                          | *                     | *                | *                     |                            |

TABLE 4-1. KRASH85 SUBROUTINE/Common REGION REFERENCE (CONTINUED)

| SUBROUTINE |      | A | A | B | C | D | D | G | I | I | I | I | I | I | I | I | K | L | M | M | N | P | P | R | R | S |
|------------|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|            |      | C | C | E | F | E | O | E | C | C | N | N | N | N | N | N | V | I | A | O | F | R | R | S | S | M |
|            |      | E | E | M | R | J | I | N | I | N | P | P | P | P | P | P | B | C | I | D | T | E | T | I | O | I |
|            |      | L | N |   | C | V | J | O |   | P | N | T | T | T | T | T |   | L |   | X | F | P | N | N | U | A |
| COMMON     | SIZE | T |   |   | E |   |   | D | T | T | T | T | T | T | T | P |   | C |   | P | R | T |   |   |   | D |
| REGION     |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| PRALL      | 4    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | * |   |   |   | * |   |   |   |
| PRMA       | 2490 |   |   | * |   | * |   |   |   |   |   |   |   |   |   |   |   | * | * |   |   | * | * | * |   |   |
| PRNFAC     | 4800 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | * |   | * |   |   |   |   |
| RESTR      | 30   |   |   | * |   | * |   |   |   |   | * |   |   |   | * |   |   | * | * |   |   |   |   |   |   |   |
| SMLDS      | 1004 |   |   |   |   |   |   |   |   |   | * |   |   |   | * |   |   |   |   |   |   |   |   |   |   | * |
| STUFF      | 3A0  |   |   |   |   |   |   | * |   |   | * |   |   |   | * |   |   |   |   | * |   |   |   |   |   |   |
| UB         | 70C  |   |   | * |   | * |   | * |   |   | * |   |   |   | * |   | * | * | * |   |   |   |   |   |   |   |
| UBICD      | E10  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | * | * |   |   |   |   |   |   |   |   |
| UBIUNA     | 258  |   |   |   |   |   |   |   |   |   |   |   |   |   | * |   | * |   |   |   |   |   |   |   |   |   |
| VARINT     | 40   |   |   | * |   | * |   |   |   |   | * |   |   |   | * |   | * | * | * |   |   |   | * |   |   |   |
| VBEAM      | 258  |   |   | * |   | * | * | * |   |   | * |   |   |   |   |   | * | * |   |   |   |   | * |   |   |   |

#### REFERENCES

1. Gamon, M. A., "KRASH User's Manual; Theory Volume I," FAA-RD-77-189I, Lockheed-California Company, Sept. 1979
2. Gamon, M. A., Wittlin, G., "KRASH User's Manual, Input-Output, Techniques and Applications," Lockheed-California Company, FAA-RD-77-189II (Revised), Sept. 1979

## APPENDIX A

### SHOCK STRUT ELEMENT DESCRIPTION

#### A.1 GENERAL

The use of a shock strut element in KRASH is available for, but not limited to, landing gear oleo struts. The following discussion will be oriented to landing gear oleo strut usage. The axial strut motion is assumed to be uncoupled from the transverse displacements. Axial forces are produced by an air spring force,  $F_{Ai}$ , a hydraulic damping force,  $F_{Oi}$ , a friction force,  $F_{Fi}$ , and forces produced by elastic stops which limit the travel of the piston within the cylinder at full extension and full compression. Each of these forces is discussed separately.

#### A.2 AIR SPRING FORCE

The expression for the air spring force is

$$F_{Ai} = F_{AOi} \left( \frac{E_i}{E_i - y_i} \right)^{n_i} - F_{AAi} \quad (A.1)$$

where

$E_i$  = effective total strut cylinder length (Figure A-1)

$F_{AOi}$  = strut air preload at  $y_i = 0$

$F_{AAi}$  = cylinder load due to ambient air

$n_i$  = polytropic exponent

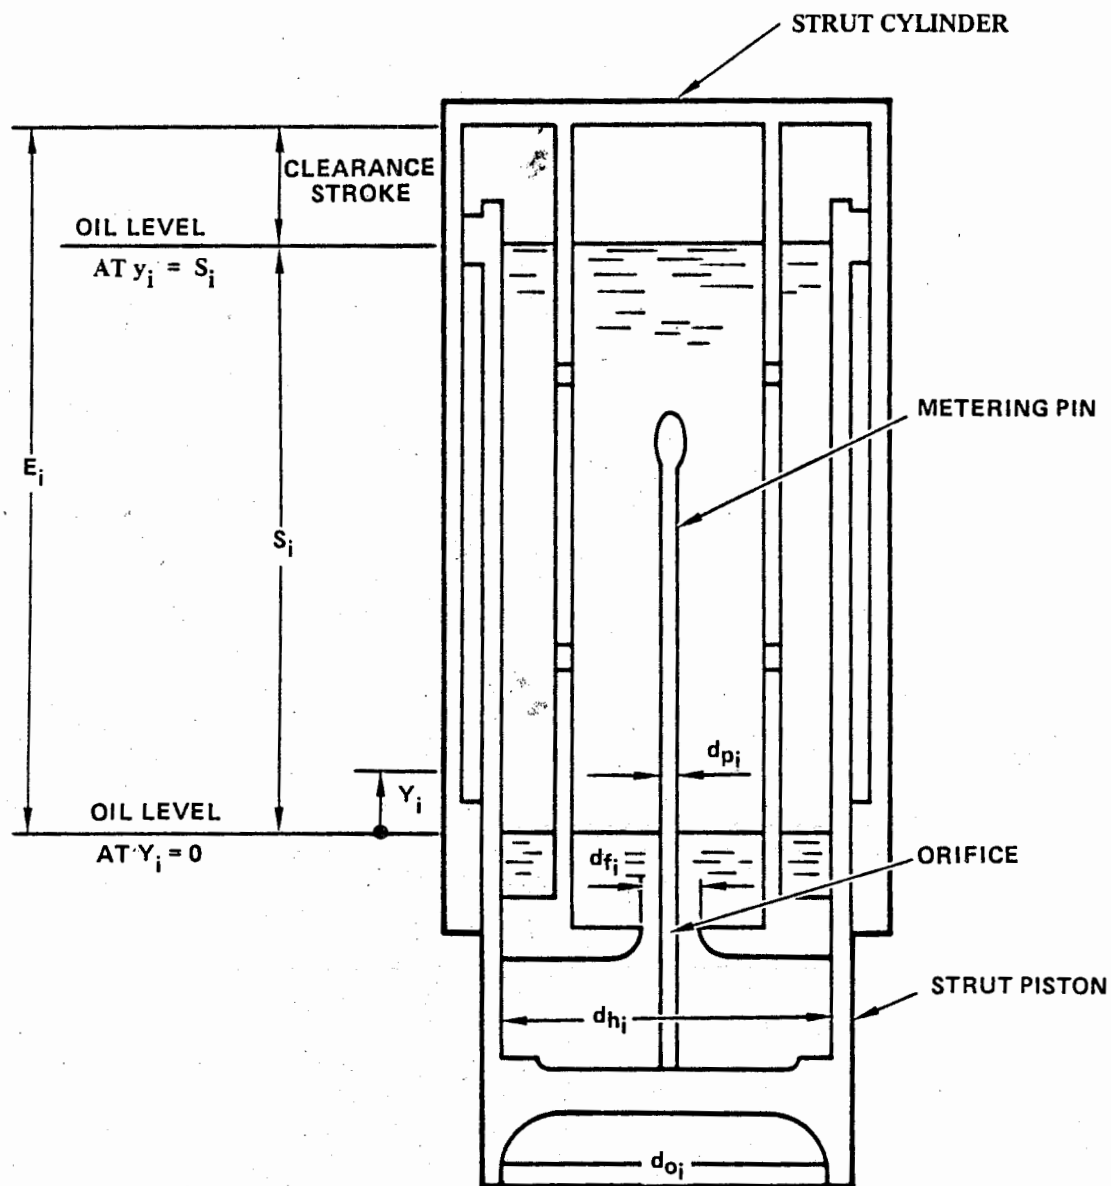


FIGURE A-1. SCHEMATIC OF OLEO STRUT

$y_i$  = shock strut closure displacement, varying with time  $F_{A_{oi}}$  is given by

$$F_{A_{oi}} = \pi/4 \left( p_{oi} d_{oi}^2 \right) \quad (A.2)$$

where  $p_{oi}$  is the absolute air pressure in the upper chamber of the shock strut at full extension ( $y_i = 0$ ) and  $d_{oi}$  is the effective pneumatic diameter as shown in Figure A.1.

If  $F_{A_{si}}$  is the strut bottoming load at  $y_i = s_i$ , the value of  $E_i$  can be obtained from equation (A.1) as

$$E_i = \frac{S_i}{1 - \left( \frac{F_{A_{oi}}}{F_{A_{si}} + F_{A_{Ai}}} \right)^{1/n_i}} \quad (A.3)$$

where  $S_i$  is the stroke. For high velocity impact conditions, a polytropic exponent of 1.4, representing adiabatic conditions, is appropriate.

In the program the values of  $E_i$ ,  $F_{A_{oi}}$ ,  $F_{A_{Ai}}$ ,  $S_i$  and  $n_i$  are input as EOLEO, FAO, FAA, YMAX and EXPOLE, respectively.

### A.3 HYDRAULIC DAMPING

The hydraulic damping force  $F_{oi}$  is given by

$$F_{oi} = C_{zi} \left| \dot{y}_i \right| \dot{y}_i \quad (A.4)$$

where

$\dot{y}_i$  = shock strut closure velocity, varying with time

$|y_i|$  is the absolute value of  $y_i$  and  $C_{z_i}$  is a damping constant which is a function of the strut orifice characteristics  $B_i$  and of the characteristics  $B_{r_i}$  of a strut rebound valve.  $C_{z_i}$  is defined as

$$\begin{aligned} C_{z_i} &= B_i \text{ if } \dot{y}_i \geq 0 \\ C_{z_i} &= B_i + B_{r_i} \text{ if } \dot{y}_i < 0 \end{aligned} \quad (A.5)$$

$B_i$  is defined by

$$B_i = \frac{\gamma A_{h_i}^3}{2g (A_{f_i} C_d)^2} \quad (A.6)$$

where

$$A_{f_i} = \pi/4 (d_{f_i}^2 - d_{p_i}^2) = \text{net orifice area}$$

$$C_d = \text{orifice discharge coefficient (typical value} = 0.85)$$

$$\gamma/g = \text{oil density (typical value} = 0.992 \text{ E-4 } \frac{\text{lb-sec}^2}{\text{in}^4})$$

$$A_{h_i} = \pi/4 (d_{h_i}^2) = \text{effective hydraulic area}$$

$d_{f_i}$ ,  $d_{p_i}$  and  $d_{h_i}$  are the orifice, metering pin and effective hydraulic diameters, respective (see Figure A.1).

$B_i$  and  $B_{r_i}$  are input into the program as BOLEO and BROLEO. A metering pin can be modeled by inputting a table of BOLEO versus YOLEO. YOLEO is the oleo compression,  $y$ , measured from the fully extended position.

Another feature of KRASH is the ability to solve for the metering pin shape that yields a desired oleo load-deflection characteristic curve. If this option is employed, the metering pin input table (POLEO versus YOLEO) is

interpreted as a table of total axial oleo load ( $F_i$  in equation A.10) versus oleo compression. This option is termed the inverse metering pin option, and is employed by specifying a negative number for MPTAB on card 1400. The inverse metering pin coding is useful for two situations.

- Landing gear drop data are available, but the basic gear data (metering pin shape) is not. KRASH can be used to calculate the variation of BOLEO versus YOLEO that will duplicate the observed test data, which is used as input data with the inverse metering pin coding. Once the BOLEO vs YOLEO data is calculated and output by KRASH, it can be used as input data for subsequent runs to analyze different conditions involving that gear.
- Metering pin design studies can be conducted using KRASH with the inverse metering pin option. In this situation, a metering pin characteristic can be determined that will yield a specified ideal oleo load-deflection curve.

When the inverse metering pin option is employed, the KRASH output data includes a table of YOLEO vs. BOLEO for each oleo specified. The data point spacing for the table is determined by the output point times specified by DP/DT on card 110. The data will be output in uniform time steps, which means that the YOLEO increments will not be uniform.

#### A.4 FRICTION FORCE

Coulomb friction is modeled, so that the magnitude of the friction force is independent of velocity, while the direction of the force is opposite to the direction of the strut velocity.

The friction forces,  $F_{F_i}$ , are given by

$$F_{F_i} = C_i f(\dot{y}_i) \quad (A.7)$$

where  $f(\dot{y}_i)$  is a function whose sign is always equal to that of  $\dot{y}_i$  and whose magnitude is 1.

Strictly speaking,  $f(\dot{y}_i)$  should be equal to 1.0 for all positive values of  $\dot{y}_i$  and equal to -1.0 for all negative values of  $\dot{y}_i$ . However, since the

friction force is a passive force and is only present as a reaction to an applied force, the friction force will be able to attain its full value only if the applied force is greater than  $C_i$ . If this situation is not the case, stops will occur in the motion. A rigorous treatment of this problem would introduce unwarranted complications into the program. A very good approximate solution which avoids the difficulty can be obtained by letting the friction force vary sufficiently slowly from  $C_i$  to  $-C_i$  at small values of  $\dot{y}_i$ , so that at each step in the integration process equilibrium of the forces is obtained without introducing large discontinuities. The following form is therefore assumed for  $f(\dot{y}_i)$ :

$$f(\dot{y}_i) = \tanh(\dot{y}_i/\alpha_o) \quad (A.8)$$

This function is plotted in Figure A-2 for various values of  $\alpha_o$ . The value of  $\alpha_o$  should be small enough to simulate the friction force with sufficient accuracy, but not so small as to introduce discontinuities. The minimum value will depend on the integration interval. Generally a value of  $\alpha_o = 1$  is found to be suitable. The expression for the friction force becomes

$$F_{F_i} = C_i \tanh(\dot{y}_i/\alpha_o) \quad (A.9)$$

The values of  $\alpha_o$  and  $C_i$  are input as ALPHAP and FCOUL in the program.

#### A.5 ELASTIC STOPS

Two elastic stops of stiffness  $K_{E_i}$  and  $K_{C_i}$  are present which limit the travel of the piston at full extension and full compression, respectively. The forces generated by these stops are, therefore, equal to  $K_{E_i} Y_i$  when  $y_i < 0$  and  $K_{C_i} (y_i - S_i)$  when  $y_i > S_i$ .

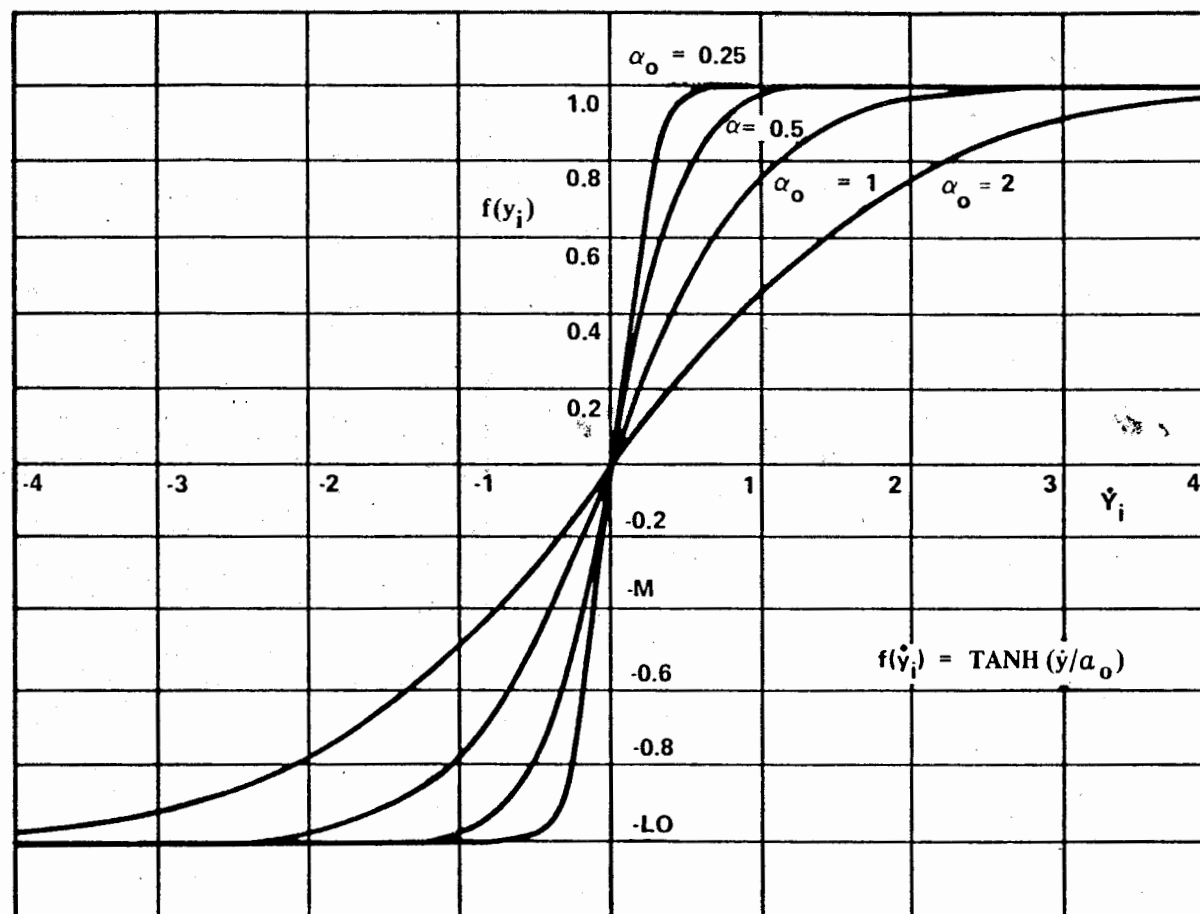


FIGURE A-2. FRICTION FORCE COEFFICIENT AS FUNCTION OF STRUT CLOSURE VELOCITY

Collecting all the above terms the total axial force  $F_i$  can be written as

$$F_i = F_{A_i} + F_{O_i} + F_{F_i} + F_{EXT_i} + F_{COMP_i} \quad (A.10)$$

The terms  $K_{E_i}$ ,  $K_{C_i}$ , and  $S_i$  are input into the program as XKEXT, XKCOMP, and YMAX, respectively.