

copy 2

DOT/FAA/CT-87/26


FAA Technical Center
Atlantic City International Airport
N.J. 08405

Longitudinal Impact Test of a Transport Airframe Section

FAA WJH Technical Center
00025821

Richard Johnson
Federal Aviation Administration Technical Center

Barry Wade
Transportation Research Center of Ohio

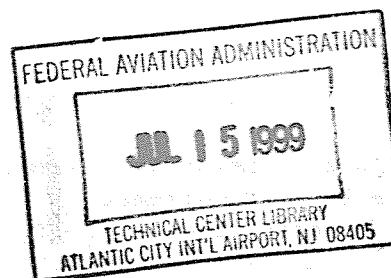

July 1988


Final Report

This document is available to the U.S. public
through the National Technical Information
Service, Springfield, Virginia 22161.

DOT/FAA
CT-87/26



U.S. Department of Transportation
Federal Aviation Administration



V DOT/FAA Longitudinal impact test of
ti CT-87/26 a transport airframe section.
L

00025821

NOTICE

This document is disseminated under the sponsorship of the U. S. Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturers' names appear herein solely because they are considered essential to the objective of this report.

1. Report No. DOT/FAA/CT-87/26	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle LONGITUDINAL IMPACT TEST OF A TRANSPORT AIRFRAME SECTION		5. Report Date July 1988	
		6. Performing Organization Code ACT-330	
7. Author(s) Barry Wade and Dick Johnson		8. Performing Organization Report No. DOT/FAA/CT-87/26	
9. Performing Organization Name and Address Transportation Research Center of Ohio East Liberty, Ohio 43319 Federal Aviation Administration Atlantic City Int. Airport, NJ 08405		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. DTFA03-87-C-00013	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Technical Center Atlantic City Int. Airport, NJ 08405		13. Type of Report and Period Covered Final Feb. - Oct., 1987	
		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract This report presents the results of longitudinally impact testing a 10-foot section of a transport airplane at peak acceleration and corresponding velocity changes of 7.4g (22.4 ft/sec) and 14.2g (36 ft/sec), respectively. The purpose of the tests was to measure the responses of the fuselage and floor structure to simulated dynamic crash loads. The airframe test section included a full complement of seats and dummies. Acceleration and load/deflection response measurements were obtained from the instrumented fuselage, floor and seat/dummy installation.			
17. Key Words Airframe Section		18. Distribution Statement This document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 281	22. Price



PREFACE

This report was jointly prepared by the Federal Aviation Administration (FAA) Technical Center and the Transportation Research Center of Ohio (TRC) under Contract DTFA03-87-00013. The report contains a description of the longitudinal impact tests which were performed using a FAA furnished airframe section and TRC's 24-inch diameter Hyge Shock Tester. The project was administered by Mr. Dick Johnson, FAA Transport Program Manager with contractor facility support provided by Mr. Jim Blaker, TRC Technical Program Manager. Technical assistance was provided by Mr. Stephen Soltis, FAA Crash Dynamics National Research Specialist.

The report was prepared by the Federal Bureau of Investigation (FBI) and the Central Intelligence Agency (CIA) in response to a request from the Department of Defense (DoD) for information regarding the activities of the Soviet Union in the field of electronics. The report contains information regarding the activities of the Soviet Union in the field of electronics, including the development of electronic equipment, the training of personnel, and the export of electronic equipment to other countries. The report also contains information regarding the activities of the Soviet Union in the field of electronics, including the development of electronic equipment, the training of personnel, and the export of electronic equipment to other countries. The report also contains information regarding the activities of the Soviet Union in the field of electronics, including the development of electronic equipment, the training of personnel, and the export of electronic equipment to other countries.

TABLE OF CONTENTS

	PAGE
EXECUTIVE SUMMARY	ix
INTRODUCTION	1
DESCRIPTION	2
TEST SPECIMEN	2
FACILITY AND TEST METHOD	2
INSTRUMENTATION	5
DISCUSSION	7
TEST DATA	7
DATA EXPLANATIONS	7
POST-TEST OBSERVATIONS	11
SUMMARY OF RESULTS	13
CONCLUSIONS	14
REFERENCES	15
APPENDICES	
A - INSTRUMENTATION LIST	
B - DATA PLOTS	
C - CALIBRATION DATA	
D - FACILITY DESCRIPTION	
E - DISTRIBUTION LIST	

LIST OF ILLUSTRATIONS

FIGURE	DESCRIPTION	PAGE
1.	AIRFRAME TEST SECTION/FLOOR PLAN	16
2.	MODIFICATIONS	17
3.	FUSELAGE ATTACHMENT - VIEW 1	18
4.	FUSELAGE ATTACHMENT - VIEW 2	18
5.	FUSELAGE ATTACHMENT - VIEW 3	19
6.	FUSELAGE ATTACHMENT - VIEW 4	19
7.	FUSELAGE ATTACHMENT - CLOSEUP	20
8.	TEST FIXTURE	20
9.	SLED EXTENSION	21
10.	ONBOARD CAMERA LOCATION - VIEW 1	21
11.	ONBOARD CAMERA LOCATION - VIEW 2	22
12.	INSTRUMENTATION LOCATIONS	22
13.	TYPICAL SEAT TRACK ACCELEROMETER PLACEMENT	23
14.	TYPICAL FUSELAGE ACCELEROMETER PLACEMENT	23
15.	TYPICAL STRAIN GAGE PLACEMENT	24
15a.	GAGE LOCATION	25
16.	TYPICAL STRING POTENTIOMETER PLACEMENT	24
17.	TYPICAL STRING POTENTIOMETER PLACEMENT - CLOSEUP	26
18.	PRE-TEST 01 FRONT VIEW	26
19.	PRE-TEST 01 FRONT VIEW CLOSEUP	27
20.	PRE-TEST 01 RIGHT FRONT 3/4 VIEW 1	27
21.	PRE-TEST 01 RIGHT FRONT 3/4 VIEW 2	28
22.	PRE-TEST 01 REAR VIEW	28
23.	POST-TEST 01 FRONT - VIEW 1	29
24.	POST-TEST 01 FRONT - VIEW 2	29
25.	POST-TEST 01 BELT ATTACHMENT BUCKLE	30
26.	PRE-TEST 02 FRONT - VIEW 1	30
27.	PRE-TEST 02 FRONT - VIEW 2	31
28.	PRE-TEST 02 FRONT - VIEW 3	31
29.	PRE-TEST 02 LEFT FRONT 3/4 VIEW	32
30.	PRE-TEST 02 RIGHT REAR 3/4 VIEW	32
31.	PRE-TEST 02 REAR VIEW	33
32.	POST-TEST 02 FRONT - VIEW 1	33

LIST OF ILLUSTRATIONS CONT

FIGURE	DESCRIPTION	PAGE
33.	POST-TEST 02 FRONT - VIEW 2	34
34.	POST-TEST 02 FRONT - VIEW 3	34
35.	POST-TEST 02 REAR VIEW	35
36.	POST-TEST 02 SECOND ROW LEFT SIDE SEAT LOCKS	35
37.	POST-TEST 02 SECOND ROW LEFT SIDE INBOARD SEAT LOCK	36
38.	POST-TEST 02 SECOND ROW LEFT SIDE OUTBOARD SEAT LOCK	36
39.	POST-TEST 02 SECOND ROW RIGHT SIDE SEAT LOCKS	37
40.	POST-TEST 02 SECOND ROW RIGHT SIDE INBOARD SEAT LOCK	37
41.	POST-TEST 02 SECOND ROW RIGHT SIDE OUTBOARD SEAT LOCK	38
42.	POST-TEST 02 FRONT CROSS TUBE	38
43.	POST-TEST 02 TUBE BUCKLING	39
44.	POST-TEST 02 SEAT BELT RETAINING CLIP	39
45.	POST-TEST 02 CENTER SEAT BACK	40
46.	POST-TEST 02 HEAD STRIKE MARK	40
47.	POST-TEST 02 REAR CROSS TUBE	41
48.	POST-TEST 02 FLOOR - VIEW 1	41
49.	POST-TEST 02 FLOOR - VIEW 2	42
50.	POST-TEST 02 FLOOR - VIEW 3	42
51.	POST-TEST 02 FLOOR - VIEW 4	43
C-1	FUSELAGE AND TEST FIXTURE - VIEW 1	C-3
C-2	FUSELAGE AND TEST FIXTURE - VIEW 2	C-3
C-3	LOAD APPLICATION	C-4
C-4	PORT DISPLACEMENT POTENTIOMETERS	C-4
C-5	PORT OUTBOARD DISPLACEMENT POTENTIOMETERS	C-5
C-6	PORT INBOARD DISPLACEMENT POTENTIOMETER	C-5
C-7	STARBOARD DISPLACEMENT POTENTIOMETERS	C-6
C-8	STARBOARD INBOARD DISPLACEMENT POTENTIOMETERS	C-6
C-9	STARBOARD OUTBOARD DISPLACEMENT POTENTIOMETER	C-7
C-10	PORT OUTBOARD TEST SETUP	C-7
C-11	PORT OUTBOARD TEST SETUP - CLOSEUP	C-8

LIST OF ILLUSTRATIONS CONTD

C-12	PORT INBOARD TEST SETUP	C-8
C-13	PORT INBOARD TEST SETUP - CLOSEUP	C-9
C-14	STARBOARD INBOARD TEST SETUP	C-9
C-15	STARBOARD INBOARD TEST SETUP -CLOSEUP	C-10
C-16	STARBOARD OUTBOARD TEST SETUP	C-10
C-17	STARBOARD OUTBOARD TEST SETUP - CLOSEUP	C-11
D-1	TEST AREA	D-2
D-2	HYGE SHOCK TESTER	D-3
D-3	HYGE ACTUATOR	D-4
D-4	METERING PIN AND ORIFICE PLATE	D-6
D-5	METERING PINS FOR TRIANGLE SHAPE AND CHILD RESTRAINT PULSES	D-6
D-6	TRC SLED PULSES	D-7
D-7	TEST SLED	D-8
D-8	VELOCITY MEASURING SYSTEM	D-8
D-9	DATA ACQUISITION SYSTEM	D-10
D-10	DATA PROCESSING SYSTEM	D-10
D-11	MOTION PICTURE CAMERAS	D-12
D-12	TEST BUCK WITH CAMERAS	D-12
D-13	MOTION PICTURE PROCESSOR	D-13
D-14	COMPUTER GRAPHICS	D-13

LIST OF TABLES

TABLE	PAGE
1. AIRFRAME TEST SECTION INSTALLATION WEIGHT	4
2. INSTRUMENTATION	6
3. DATA SUMMARY	8-10
4. POST-TEST SEAT TRACK VERTICAL MEASUREMENTS	12

EXECUTIVE SUMMARY

A 10-foot section from a transport airframe was longitudinally impact tested at the Transportation Research Center of Ohio (TRC). The purpose of the test was to measure the structural responses and interaction between the fuselage/floor structure and the cabin/occupant restraint systems under simulated, potentially survivable, impact conditions. Utilizing TRC's 24-inch Hyge shock tester, two tests were conducted at peak acceleration and corresponding velocity changes of 7.4g (22.4 ft/sec) and 14.2g (36 ft/sec), respectively. The airframe test section was loaded to include a full complement of passenger seats and dummies.

Accelerations and load/deflection response measurements were obtained from the instrumented fuselage, floor, seats and anthropomorphic dummy test specimens. The input acceleration pulses were triangular in shape. Peak longitudinal floor acceleration levels ranged from 7.6g to 7.8g and 14.7g to 15.0g for the first and second tests, respectively. The six modified seats and dummy test specimens remained intact and totally restrained during both the 7.4g and 14.2g impact tests. Some structural deformation of the seat cross and spreader tubes was observed during post-test examinations. The fuselage and cabin floor structure exhibited neither visible damage nor deformation during the tests.

INTRODUCTION

The longitudinal impact test of a transport airframe section is one in a series of section and full-scale tests conducted in support of the Federal Aviation Administration's (FAA) current Crash Dynamics and Engineering Development Program (reference 1). Such tests included the Full-Scale Transport Controlled Impact Demonstration (reference 2) and subsequent Vertical Drop Test of a Transport Airframe Section (reference 3). The objective of the subject test was to determine the interaction between a transport airplane fuselage and floor structure and the cabin/occupant restraint systems under longitudinal impact conditions which are considered potentially survivable. Baseline response data obtained from these tests will be used to determine the dynamic response characteristics of the airplane and verifying analytical computer programs such as the lumped mass model "KRASH" (reference 4).

In tests conducted at the Transportation Research Center of Ohio's Impact Simulator Test Facility, a 10-foot long airframe section was longitudinally impact tested at peak acceleration and corresponding velocity changes of 7.4g (22.4 ft/sec) and 14.2g (36 ft/sec), respectively. These impact levels were selected from a structural analysis of the airframe section as verified by static testing of a similar section specimen (reference 5). The airframe section was fully loaded to include a maximum configuration of cabin seats and dummy occupants. Structural response data were obtained during impact from instrumentation installed in the fuselage structure, floor structure, seats, and dummy test specimens. The location of this instrumentation is included in appendix A. The traces of recorded acceleration and load/deflection responses are included in appendix B, with calibration data contained in appendix C. Also included in appendix C are data and photographs from static pull tests that were conducted on the seat tracks above the beam at BS1180 and subsequent to the subject longitudinal impact tests. The report also includes pre-test and post-test photographs of the airframe test section and cabin installations.

DESCRIPTION

TEST SPECIMEN

The airframe test specimen was a 10-foot section cut from the aft fuselage of a B707 transport airplane. As shown in figure 1, the section structure, characterized by a tapered lower fuselage shell area, was separated just forward of the rear galley between body stations (BS) 1120 and 1240. The section was configured with three rows of two triple passenger seats. Each of the triple seats was strengthened to meet the higher load requirements. Also, these seats, Burns Aero Model 799, were positioned fore and aft to accommodate a representative floor test load condition (34-inch pitch) and to assure that the middle row of seats would maximize the dynamic loading of the floor beam at BS 1180. Each seat pan contained an anthropomorphic dummy weighing approximately 165 pounds. The dummies were restrained by standard American Safety model 500082 seatbelts.

To ensure structural integrity and the elimination of inherent open-end effect, the section floor structure was modified, as illustrated in figure 2A. This modification consisted of reinforcing the end floor beams by adding additional beams of BS 1120 and 1240. These beams and existing beams were tied together with (5) longitudinal hat section stringers. These stringers replaced the original under floor cargo liner attachment members which had been inadvertently removed. Such members also provided for stability of the floor beams. In addition, the shear strength provided by the outboard floor panel attachment fasteners was increased by doubling the number of fasteners around the periphery of each outboard panel.

Each of the six seats was structurally modified to absorb, without failure, the higher expected impact loads. Illustrated in figure 2B, these modifications involved the installation of reinforcement gussets at both fore and aft leg locations. In addition, the seat spreader tubes were filled with epoxy to prevent collapse resulting from the occupant seat belt loads. Verification of performance associated with these seat modifications was accomplished through separate dynamic impact sled tests conducted at the FAA Civil Aeromedical Institute (CAMI) (reference 6). These tests also provide for a basis to calibrate the output from strain gages installed on the six seat leg structures.

Table 1 provides a list of the airframe section and equipment installation weights. Excluding the onboard equipment, i.e., seats, dummies, etc., the bare airframe section weighed 1900 pounds. The total weight of the test section with seats and dummies was 5498 pounds.

FACILITY AND TEST METHOD

The test specimen was longitudinally impact tested at the Transportation Research Center of Ohio's Impact Simulator Facility. A description of the facility is contained in appendix D.

A test fixture was designed and fabricated to attach the fuselage section to the test sled. The critical design constraints were to keep the weight to a minimum and to minimize the effect of the fixture on the structural

TABLE 1 AIRFRAME TEST SECTION INSTALLATION WEIGHT

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>LOCATION*</u>	<u>TOTAL WEIGHT (lb.)</u>
AIRFRAME SECTION		BS1120-1240	1900
SEAT A	BURNS-AERO	6.5 IN. AFT	100
	MOD. 799 S/N 80226	OF BS 1140	
SEAT B	BURNS-AERO	6.5 IN. AFT	102
	MOD. 799 S/N 84700	OF BS 1140	
SEAT C	BURNS-AERO	2.5 IN. AFT	102
	MOD. 799 S/N 102844	OF BS 1180	
SEAT D	BURNS-AERO	2.5 IN. AFT	96
	MOD. 799 S/N 85049	OF BS 1180	
SEAT E	BURNS-AERO	3.5 IN. FORWARD	101
	MOD. 799 S/N 84729	OF BS 1220	
SEAT F	BURNS-AERO	3.5 IN. FORWARD	101
	MOD. 799 S/N 89028	OF BS 1220	
<u>DUMMIES</u>			
SEAT A	DOT PART 572	WINDOW SEAT	167
	DOT PART 572	CENTER SEAT	167
	DOT PART 572	aisle SEAT	167
SEAT B	DOT PART 572	WINDOW SEAT	167
	DOT PART 572	CENTER SEAT	167
	DOT PART 572	aisle SEAT	167
SEAT C	DOT PART 572	WINDOW SEAT	167
	DOT PART 572	CENTER SEAT	167
	DOT PART 572	aisle SEAT	167
SEAT D	DOT PART 572	WINDOW SEAT	167
	DOT PART 572	CENTER SEAT	167
	DOT PART 572	aisle SEAT	167
SEAT E	DOT PART 572	WINDOW SEAT	167
	VIP 50	CENTER SEAT	165
	HYBIRD III	aisle SEAT	164
SEAT F	VIP 50	WINDOW SEAT	165
	DOT PART 572	CENTER SEAT	167
	HYBRID III	aisle SEAT	164

*MEASUREMENTS TO REAR LEG OF EACH SEAT

integrity of the airframe by not altering the floor-fuselage shell interface load path. Figures 3 through 7 illustrate the method of attaching the test specimen to the test fixture and the test fixture to the test sled.

The fuselage attachment design was based on separating the reacting loads into horizontal and vertical components; the horizontal loads resulting from the longitudinal acceleration and vertical loads resulting from the test specimen weight and the over-turning moment from the longitudinal acceleration.

The horizontal loads were transferred to the test fixture by two horizontal attachments on each side of the fuselage. These attachments were located at waterlines 196 and 238 and consisted of 1/8" thick X 6" wide steel plates bolted to the fuselage skin. Epoxy adhesive K-200 was also used to bond the steel plates to the fuselage. These attachments are illustrated from the outside by figure 3 and from the inside by figure 4.

The vertical loads were transferred to the test fixture by two vertical attachments on each side of the fuselage. These attachments were located at body stations 1120 and 1240 and consisted of 1/8" thick X 4" wide steel plates bolted to the fuselage skin. Epoxy adhesive was also used to bond these plates. These attachments are illustrated from the outside by figure 5 and from the inside by figures 6 and 7.

These attachments were then bolted to the test fixture along these same horizontal and vertical locations.

To help react the over-turning moment, an extension to the sled was designed and fabricated. The fixture with the sled extension is shown in figures 8 and 9.

Trial tests were conducted to verify the input pulse parameters and the structural integrity of the test fixture. To simulate the weight and moment of the test specimen, I-beams weighing 6,000 pounds were attached to the top of the fixture. Trial tests were conducted at peak acceleration and corresponding velocity changes of 7.1g's (23.6 ft/sec) and 13.2g's (39.2 ft/sec), respectively. The input pulse was triangular shaped with durations of 183 and 174 milliseconds, respectively. Inspection of the test fixture and a review of the trial test film did not reveal any evidence of damage.

After successful completion of the trial tests, the fuselage section and its contents were installed. Two tests were conducted. The first test was conducted with a peak acceleration level of 7.4g and the second with a peak acceleration level of 14.2g. Eight high-speed cameras (500 frames per second), one real-time and one video camera were used to photograph each longitudinal impact. Three of the high-speed cameras were onboard. The other five high-speed cameras, the real-time and the video camera viewed the test from offboard. The onboard camera locations are shown in figures 10 and 11.

INSTRUMENTATION

The airframe section and seat installations were instrumented with accelerometers, strain gages, and load cells as identified in table 2. Figures 12 through 17 show the general placement of each sensor installation and appendix A provides a further description of these sensors with exact X, Y, and Z position coordinates. As shown in figure 12, the majority of instrumentation was installed at BS 1180 which involved the floor beam, track and fuselage frame. Accelerometers were mounted on the two inboard tracks forward of BS 1180, and on one inboard track at BS 1120 and 1240. A typical installation is identified in figure 13. In addition, accelerometers were also installed at three above-floor-frame locations at BS 1180 as shown in figure 14. Also, the floor beam at BS 1180 included four web mounted strain gage bridges and four string potentiometers at each track intersection location as shown in figures 15, 16, and 17. Instrumentation of the modified seat specimens involved triaxial accelerometers placed at the aft cross tube of both center row seats (#C and #D). Accelerometers and seat belt load cells were also installed on the anthropomorphic dummy at each of these center seat positions. In addition, each of the six seats contained axial strain gage bridges installed at their forward leg(s) and diagonal structure(s) as illustrated in figure 15a. These gages were calibrated from sled tests performed previously at CAMI (reference 6). The calibrated sled tests involved subjecting each seat with anthropomorphic dummies to low energy triangular impact pulses of 9g's (26 ft/sec, 180 msec). Resulting seat strain gage data were recorded along with measured loads obtained from load cells located at each leg-track attachment point. From the seat strain gage responses measured during the subject longitudinal tests, floor reaction forces can be determined from the CAMI calibration data. Calibration of the floor beam at BS 1180 was accomplished in a similar manner but subsequent to the completion of the two longitudinal impact tests. A static floor calibration method and results are described in appendix C. Such tests involved statically loading the floor beam at each track intersection and measuring the load, deflection and corresponding strain gage reading at each gage location.

TABLE 2 INSTRUMENTATION

	Accelerometer			Strain		Load	String	Crack		
	Long	Lat	Vert	Gage	Cell	Pot.	Detect	Vel.	Channel	
Fuselage	3	-	-	-	-	-	-	-	-	3
Floor	4	3	3	4	-	4	5	-	-	23
Seats	2	2	2	14	-	-	-	-	-	20
Seat Belts	-	-	-	-	4	-	-	-	-	4
*Dummies (Pelvis)	2	-	2	-	-	-	-	-	-	4
Drive Fixture/Sled	2	-	-	-	-	-	-	-	-	2
TOTAL										56
*Seats C and D center positioned dummy only										

DISCUSSION

TEST DATA

The airframe test section was longitudinally impact tested at both low and high energy impact conditions. The first test (test 01) involved subjecting the airframe and contents to a 7.4g peak acceleration. This test was conducted primarily to check test setup and verify that the seat strain gage readings were within the data range of data obtained from the previous CAMI tests (which involved a comparable test procedure). Figures 18 through 22 illustrate the test setup. Figures 23 and 24 illustrate the post-test positions of the dummies. No visual evidence of any deformation of the floor or seats was observed following this test. No failure at the crack detection wires was observed. However, one seatbelt did come loose from its anchor point. This occurred on the middle row, left-hand window seat. Figure 25 shows the released belt (later considered to have released as the result of being incorrectly installed.)

For the high energy condition, the airframe and its contents were then subjected to a 14.2g peak acceleration (test 02). Figures 26 through 31 illustrate the test setup and figures 32 through 35 provide post-test documentation of the dummies and seats. Again no visible evidence of deformation or damage to the fuselage or test fixture was observed. None of the installed crack detection wires failed. Some structural deformation occurred to the seats which was comparable to deformation observed under similar test conditions at CAMI. This deformation is documented in the post-test observations section.

Table 3 summarizes the peak longitudinal accelerations, peak seatbelt loads and maximum deflection of the floor. Table 3 also provides strain data (in millivolt units) as obtained from the floor beam and seat and diagonal brace strain gage installations. A complete set of data plots is included in appendix B. A conversion to floor reaction loads from the aforementioned strain gage readings is contained in appendix C.

DATA EXPLANATIONS

TEST 01

The Port Inboard Beam Strain (PIBS) and the Starboard Inboard Beam Strain (SIBS) data are suspect due to the great difference in magnitude.

TEST 02

The Seat C Longitudinal acceleration (SECXG) did not return to zero after the test. An accurate velocity integration could not be computed.

The Seat D Longitudinal acceleration (SEDXG) did not return to zero after the test. An accurate velocity integration could not be computed.

The Port Inboard Beam Strain (PIBS) and the Starboard Inboard Beam Strain (SIBS) data exceeded the requested full scale value.

TABLE 3. DATA SUMMARY

CHANNEL	TEST 01		TEST 02	
PEAK DECELERATION (g)	MAXIMUM	TIME	MAXIMUM	TIME
& DELTA VELOCITY (ft/sec)		(msec)		(msec)
SLED LONGITUDINAL	7.4	102.4	14.2	81.8
VELOCITY	22.4	176.6	36.2	159.8
PORT INBOARD SEAT TRACK	7.6	99.9	14.7	79.6
LONGITUDINAL - MID				
VELOCITY	22.1	175.8	35.5	171.0
STARBOARD INBOARD SEAT TRACK	7.7	95.8	14.7	79.1
LONGITUDINAL - AFT				
VELOCITY	22.3	171.0	35.7	162.1
STARBOARD INBOARD SEAT TRACK	7.8	94.9	14.7	80.3
LONGITUDINAL - MID				
VELOCITY	22.2	170.9	35.8	158.1
STARBOARD INBOARD SEAT TRACK	7.7	94.5	15.0	79.5
LONGITUDINAL - FORWARD				
VELOCITY	22.4	173.9	36.0	162.5
PORT FUSELAGE LONGITUDINAL	7.9	96.0	15.2	79.6
VELOCITY	22.4	180.1	35.9	169.1
TOP FUSELAGE LONGITUDINAL	8.3	98.6	15.4	90.5
VELOCITY	22.7	172.3	37.1	168.6
STARBOARD FUSELAGE LONGITUDINAL	7.9	101.4	15.0	78.1
VELOCITY	22.4	174.1	35.2	148.5
SEAT C LONGITUDINAL	8.2	123.0	13.8	80.0*
VELOCITY	21.8	167.8	35.1	199.9*
SEAT D LONGITUDINAL	7.5	91.5	14.0	76.6*
VELOCITY	23.5	164.0	37.7	340.0*
SEAT C CENTER DUMMY PELVIS	7.9	136.5	10.6	106.3
LONGITUDINAL				
VELOCITY	10.7	174.5	8.1	124.4
SEAT D CENTER DUMMY PELVIS	9.1	146.6	21.5	107.6
LONGITUDINAL				
VELOCITY	9.5	160.5	16.8	141.4

TABLE 3. DATA SUMMARY CONTINUED

CHANNEL	TEST 01		TEST 02	
	MAXIMUM	TIME (msec)	MAXIMUM	TIME (msec)
LAP BELT LOADS (lb)				
SEAT C CENTER DUMMY OUTBOARD LAP BELT	335.0	135.8	799.0	156.5
SEAT C CENTER DUMMY INBOARD LAP BELT	587.6	132.9	1130.3	156.5
SEAT D CENTER DUMMY OUTBOARD LAP BELT	569.5	136.3	1011.6	102.6
SEAT D CENTER DUMMY INBOARD LAP BELT	813.3	136.6	1116.2	168.5
<u>SEAT TRACK DEFLECTION (in)</u>				
PORT OUTBOARD SEAT TRACK	0.13	139.6	0.35	152.9
PORT INBOARD SEAT TRACK	0.29	142.1	0.66	152.1
STARBOARD INBOARD SEAT TRACK	0.34	140.6	0.60	160.5
STARBOARD OUTBOARD SEAT TRACK	0.25	135.5	0.44	156.8
<u>1180 BEAM STRAIN (mv)</u>				
PORT OUTBOARD	3.0	120.6	9.3	106.0
PORT INBOARD	6.3	143.8*	15.4	139.9*
STARBOARD INBOARD	12.6	135.0*	15.0	102.9*
STARBOARD OUTBOARD	4.7	132.8	7.4	155.8
<u>SEAT A STRAIN (mv)</u>				
OUTBOARD FORWARD LEG	6.4	151.5	12.0	202.8
OUTBOARD DIAGONAL STRUT	10.4	149.4	24.5	115.9
<u>SEAT B STRAIN (mv)</u>				
INBOARD FORWARD LEG	5.3	139.4	14.9	137.8

TABLE 3. DATA SUMMARY CONTINUED

SEAT C STRAIN (mv)	TEST 01		TEST 02	
	MAXIMUM	TIME (msec)	MAXIMUM	TIME (msec)
OUTBOARD FORWARD LEG	13.5	144.3	18.3	237.5
OUTBOARD DIAGONAL STRUT	8.3	124.8	20.8	115.8
INBOARD FORWARD LEG	3.8	258.3	18.6	219.3
INBOARD DIAGONAL STRUT	7.1	143.5	12.9	118.4
<u>SEAT D STRAIN (mv)</u>				
OUTBOARD FORWARD LEG	7.1	147.0	11.4	114.3
OUTBOARD DIAGONAL STRUT	10.7	145.8	21.0	115.4
INBOARD FORWARD LEG	5.0	136.1	9.7	115.1
INBOARD DIAGONAL STRUT	7.1	135.4	15.8	115.6
<u>SEAT E STRAIN (mv)</u>				
OUTBOARD FORWARD LEG	2.8	151.4	12.7	164.0
OUTBOARD DIAGONAL STRUT	10.1	146.5	19.6	118.1
<u>SEAT F STRAIN (mv)</u>				
OUTBOARD FORWARD LEG	2.5	148.1	9.7	242.6

*See DATA EXPLANATIONS

POST-TEST OBSERVATIONS

Seats (General) - The six modified seat and dummy test specimens remained intact and totally restrained during the 14.2g impact test (test 02). Post-test observation of each triple seat revealed no visible deformation of the basic leg and diagonal support structures while some structural deformation was noticed at each fore and aft cross tubes, primarily at the window side locations. Minor buckling was also observed at each of the seat frame spreader tubes and forward of the respective seatbelt retention ring attachment area. Both the first and second row seats experienced variable damage at the rear side of each seat back. This damage was caused by the head and/or knee strike from each of the aft positioned dummies.

Seat A (Row #1 LH) - As shown in figure 36, seat A experienced typical down bending of the left and forward window side cross tube. Compression buckling was also noticed at each of the three epoxy filled spreader tubes. Figure 37 depicts such tube buckling or wrinkling which is shown initiating at the seat belt ring attachment area. The three dummies in seat A were effectively restrained by each seatbelt system. Notwithstanding this restraint, a deformed seatbelt retaining clip shown in figure 38 was observed at the aisle seat position. The crush and separation of the aft lower structure of the window and middle seat back was also observed in figure 39. This damage was caused by head and/or knee strikes stemming from dummies placed in the aft-position of seat C.

Seat B (Row #1 RH) - Front row seat B was observed to be in a similar post-test condition as seat A. The front and rear legs and diagonal support structure of seat B remained unaffected while deformation of cross tubes and spreader tube buckling (similarly observed from seat A) was evident. In addition, the rear aisle side spreader tube was found fractured at a doubler attachment point. Figure 40 shows typical head strike marks on the rear of each seat back and tray location.

Seat C (Row #2 LH) - The structure of seat C was found to have incurred the same type of impact deformation and buckling as subject to the forward row seats A and B. However, the bending of cross tubes was significantly less. Also, the crushing of each lower rear seat back (from aft located dummies) was not noticed in any of the seat positions. In view of this condition, figure 40 does show the separation of a tray section of the aisle position seat.

Seat D (Row #2 RH) - Like adjacent seat C in the second row, seat D experienced no leg damage with only minor deformation and buckling of the cross and spreader tubes. Similar seat back strike marks were identified from the rear positioned dummies.

Seat E (Row #3 LH) - Seat E also was observed to have experienced deformation and buckling of the cross tubes and spreader tubes. The aft cross tube at the aisle location was typically bent up with the forward tube bent down. Figure 41 shows the aft cross tube in a cracked condition.

Seat F (Row #3 RH) - As other seats, seat F was found with deformed and buckled cross tube and spreader tubes.

Seat Position Lock

Figures 42 through 47 show overviews and closeups of the locks which hold the seats in the seat tracks. Figure 42 shows both second row left side seat locks. Figure 43 shows the second row left side inboard seat lock and figure 44 shows the second row left side outboard seat lock. Figures 45, 46 and 47 show both second row right side seat tracks. Figure 46 shows the second row right side inboard seat lock and figure 47 shows the outboard seat lock. Some of the locks showed some tendency to raise up some during the 14.2g test but none released.

Seat Tracks

Figures 48 through 51 illustrate the seat tracks following the test. The seat tracks were measured for vertical deformation after the removal of all test articles. Only minor deformation was noted which may or may not be attributed to the test. The data are contained in table 4. Body stations 1120 and 1240 were used as reference points for each track.

TABLE 4

POST-TEST SEAT TRACK VERTICAL MEASUREMENTS

BODY STATION	LH OUTBOARD	LH INBOARD	RH INBOARD	RH OUTBOARD
1120	0.00	0.0	0.0	0.0
1140	0.00	-0.05	-0.04	-0.01
1160	+0.01	-0.03	-0.02	+0.02
1180	+0.03	+0.02	+0.03	+0.03
1200	+0.01	0.00	0.00	-0.03
1220	+0.07	+0.07	+0.06	+0.05
1240	0.00	0.00	0.00	0.00

MEASUREMENTS IN INCHES.

POSITIVE = ABOVE REFERENCE POINT

NEGATIVE = BELOW REFERENCE POINT

SUMMARY OF RESULTS

A Boeing 707 airframe section was instrumented and longitudinally impact tested at input energy levels of 7.4g (22 ft/sec) and 14.2g (36 ft/sec), respectively. The test objective, which involved the measurement of fuselage, floor and seat structure responses to these simulated dynamic crash loads, were met. Response data pertinent to the occupant/seat restraint system performance were also recorded. From a post-test examination of the fuselage, floor and seat/occupant restraint system and related response traces, a summary of results are as follows:

1. The cabin fuselage shell and floor structure were observed to have no visible separation or structural damage.

2. The passenger seats were found to have experienced some buckling of their legs and structural cross tube members while remaining attached to the cabin floor-track structure.

3. The seatbelted dummies remained restrained within each seat location while head and leg contact was noted to have occurred between the second and third row dummies and forward seat back positions.

4. At the maximum impact conditions, peak longitudinal accelerations measured at the fuselage floor and seat structure locations were in the 14-15g range.

5. Individual lap belt loads measured at the two center positioned dummies varied between 335 and 813 pounds.


6. From string potentiometer data, the maximum floor-track deflections at impact were recorded at values between 0.35 and 0.66 inches.

CONCLUSIONS


1. The 24-inch Hyge Shock Tester provides an effective system for dynamically impact testing large full-scale aircraft fuselage sections.
2. The fuselage, floor and seat restraint system structures of large transport airplanes are capable of absorbing high dynamic impact loads in excess of current static load criteria.
3. Baseline response data have been obtained for use in the assessment of transport aircraft dynamic impact environments and occupant survivability characteristics.

REFERENCES

1. Crash Dynamics and Engineering Development Program, Federal Register, Volumn 49, No. 185, September 21, 1984.
2. Johnson, D., Garodz, L., Crashworthiness Experiment Summary - Full-Scale Transport Controlled Impact Demonstration Program, FAA Report DOT/FAA/CT-85/20, John 1986.
3. Johnson, D., Wilson, T., Vertical Drop Test of a Transport Airframe Section, FAA Report DOT/FAA/CT-TN 86/34, October 1986.
4. Wittlin, G., Analytical Modeling of Transport Aircraft Crash Scenarios to Obtain Floor Pulses, FAA Report DOT/FAA/CT-82/83, April 1983.
5. Johnson, D., Floor Pull Test of Transport Airframe Section, FAA Report DOT/FAA/CT-87/27, February 1988.
6. Gowdy, V., Burns Aero Calibration Seat Test, AAM-119-87-7, October 1987.

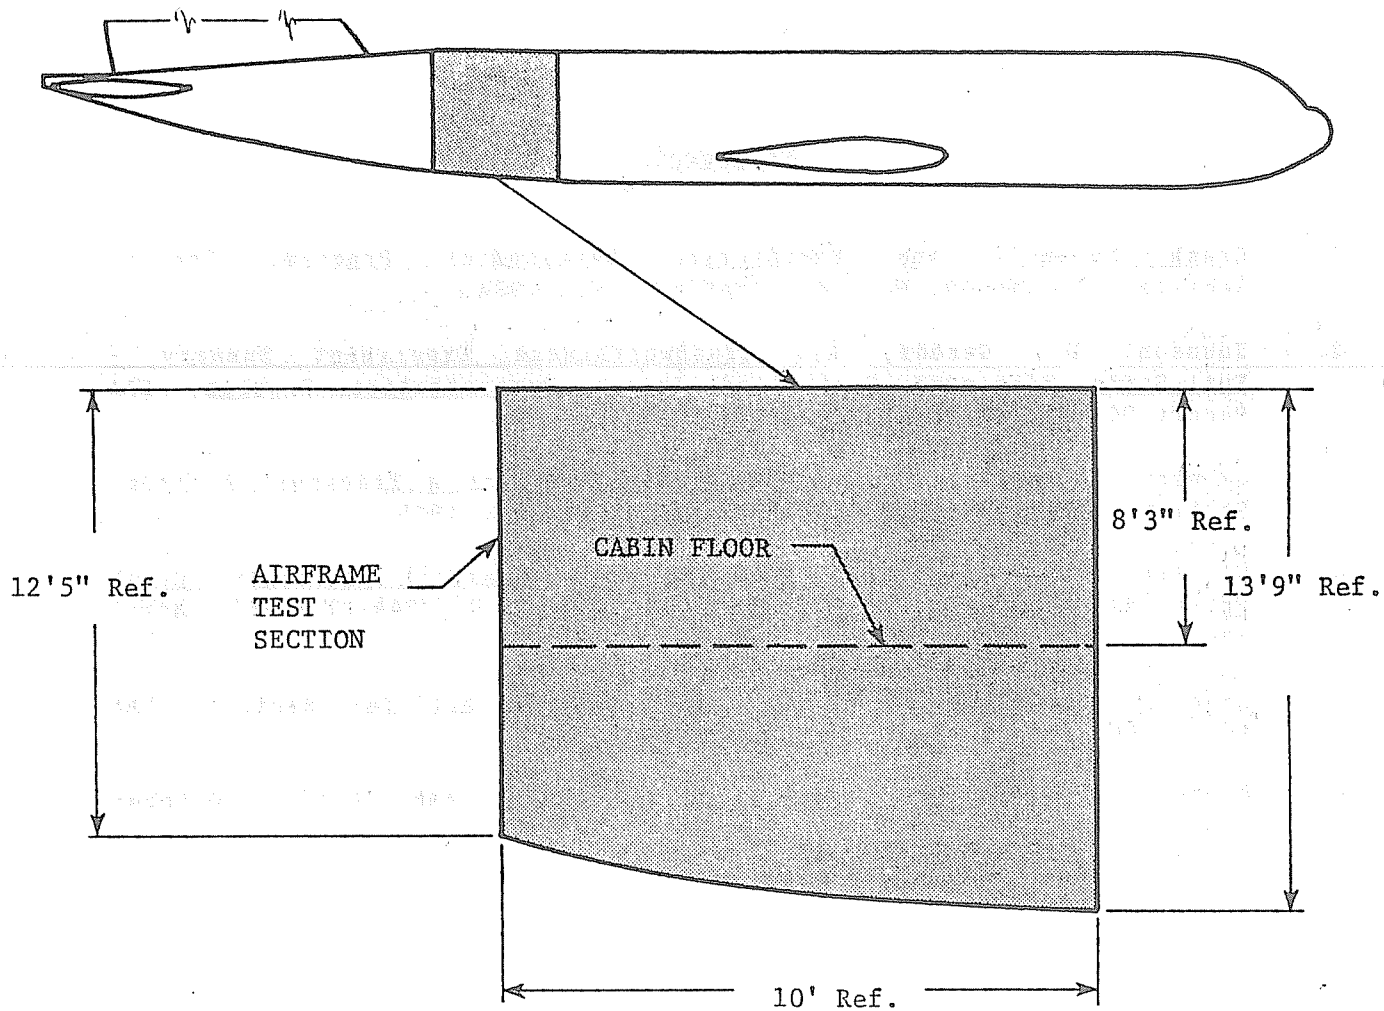

TRIPLE
PASSENGER SEAT
(TYPICAL)

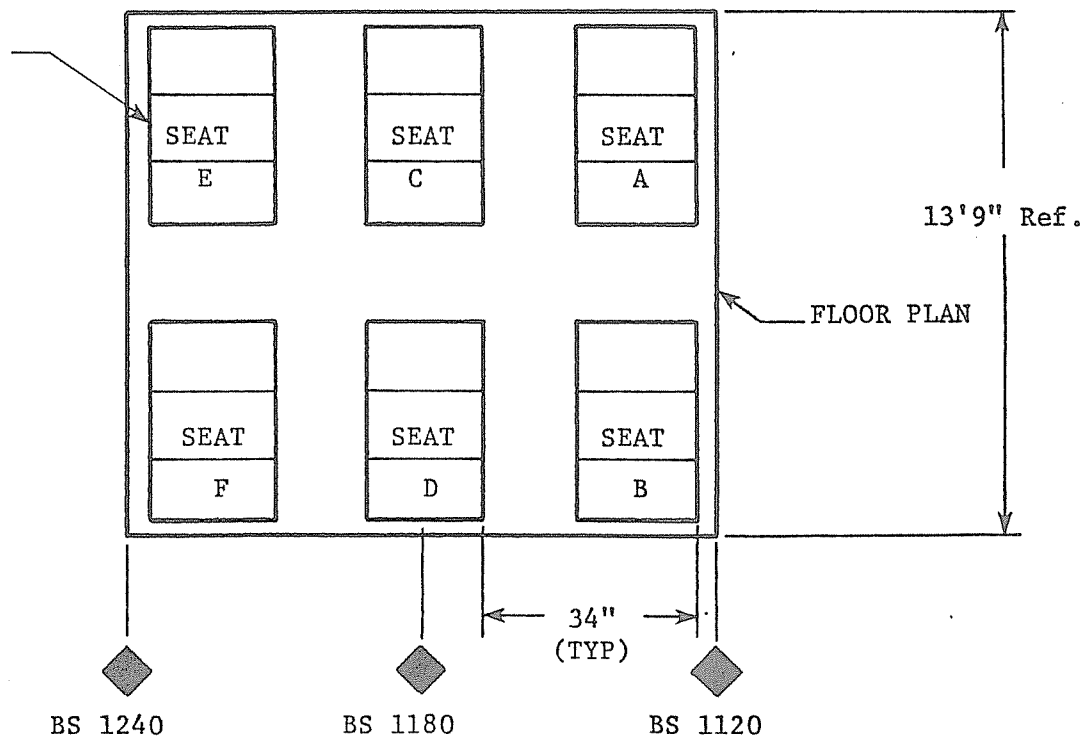

AIRFRAME TEST SECTION/FLOOR PLAN

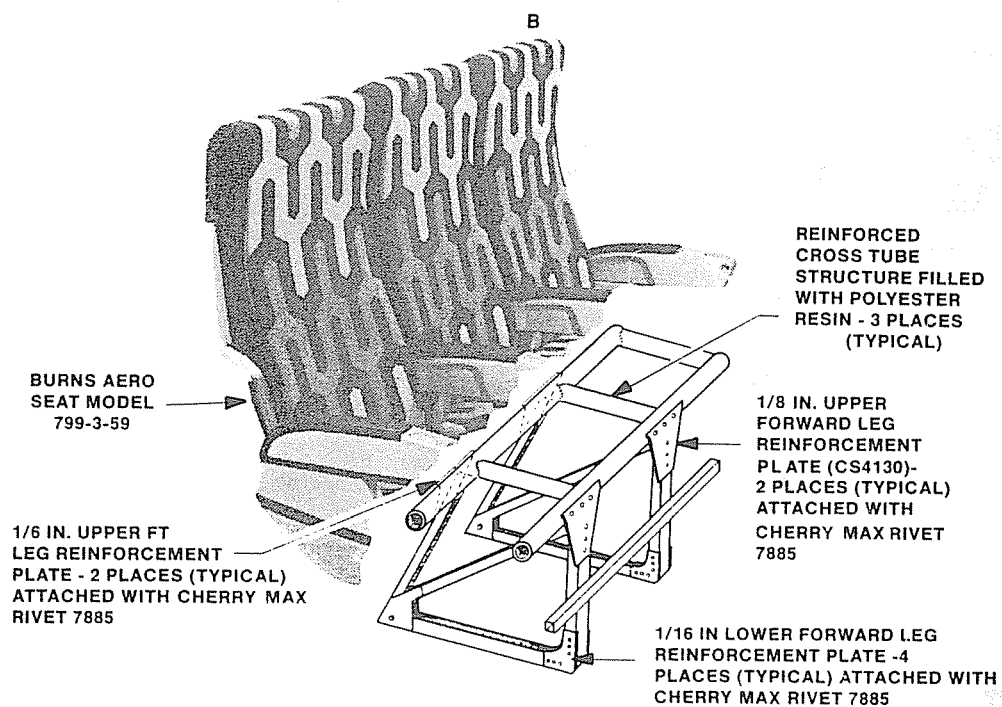
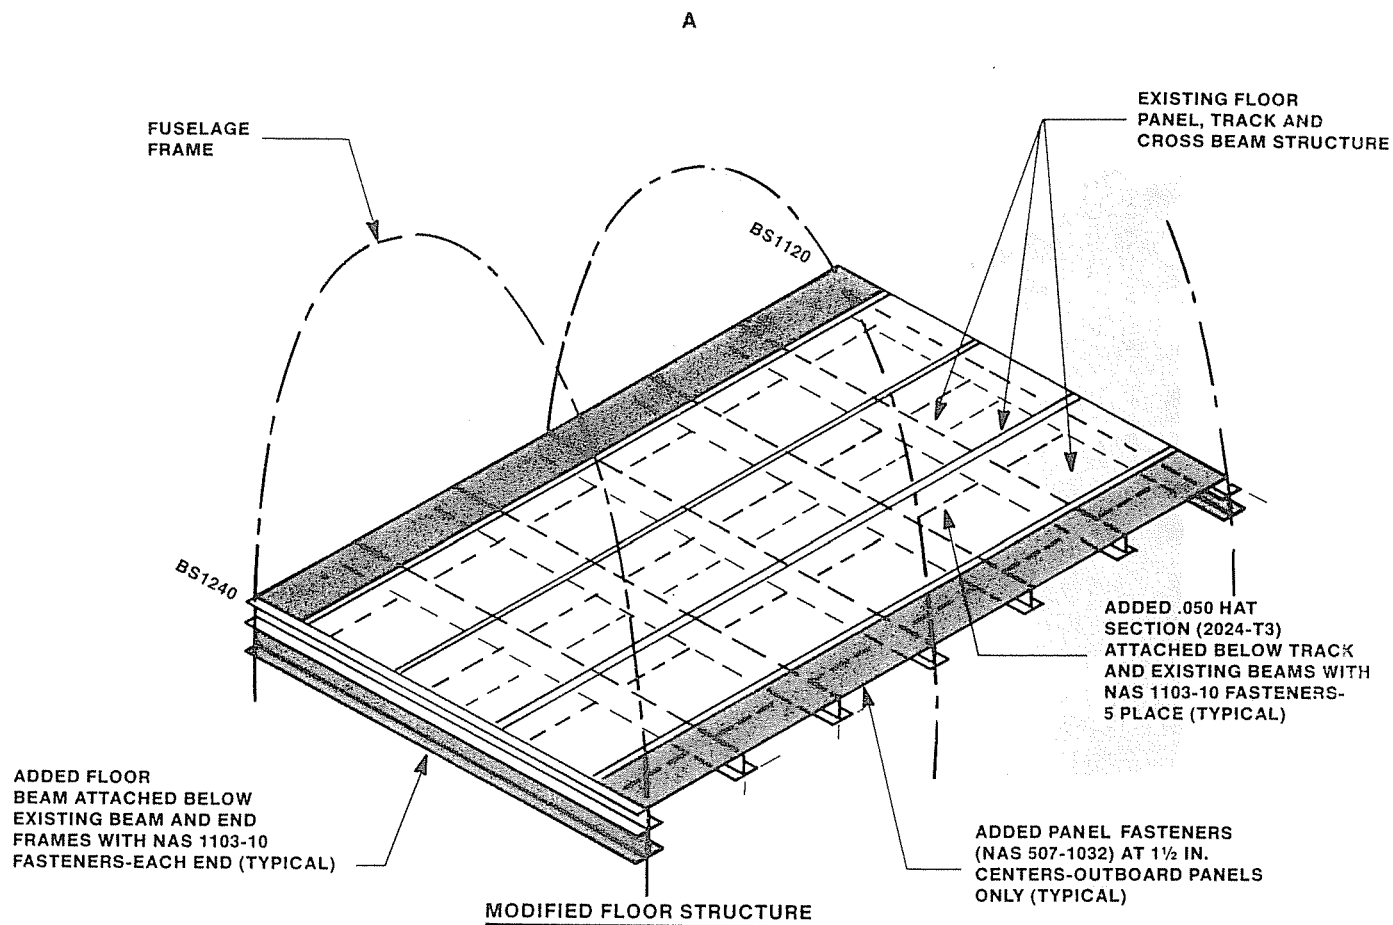


FIGURE 2 - MODIFICATIONS



Figure 3. FUSELAGE ATTACHMENT - VIEW 1

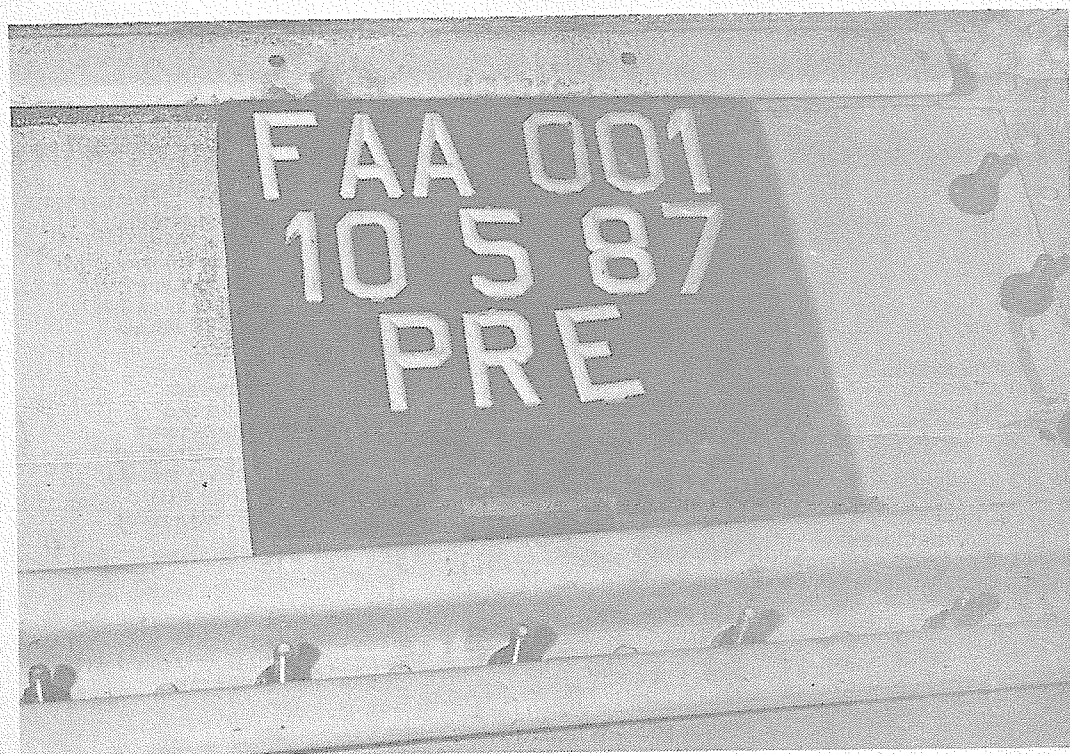


Figure 4. FUSELAGE ATTACHMENT - VIEW 2

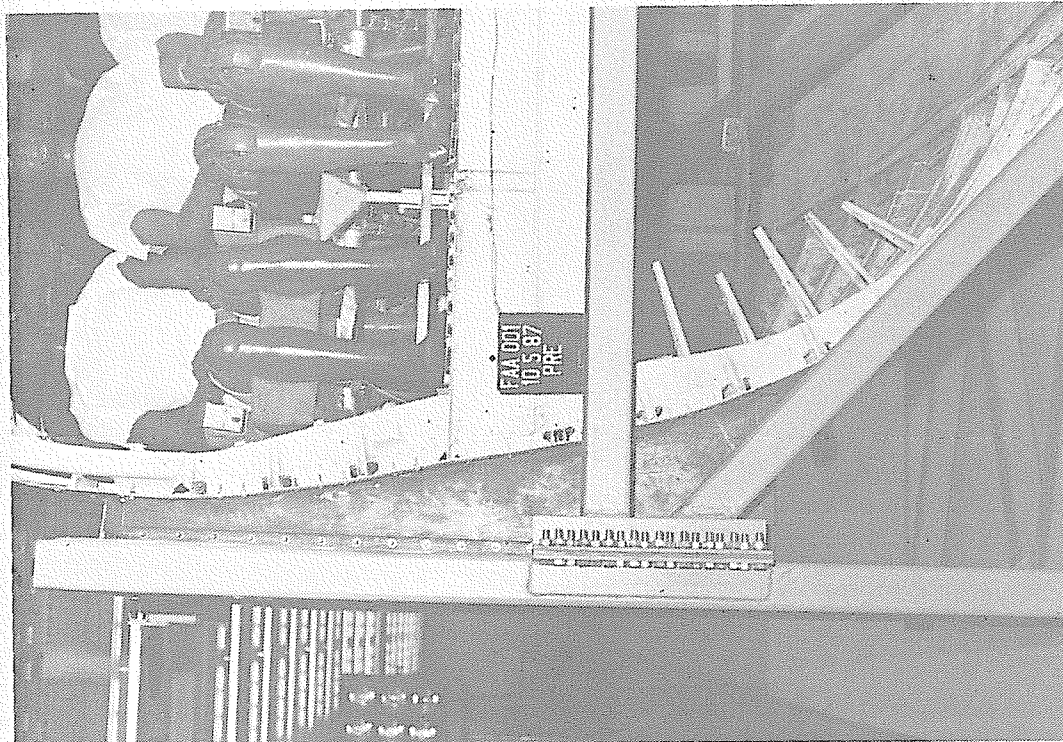


Figure 5. FUSELAGE ATTACHMENT - VIEW 3

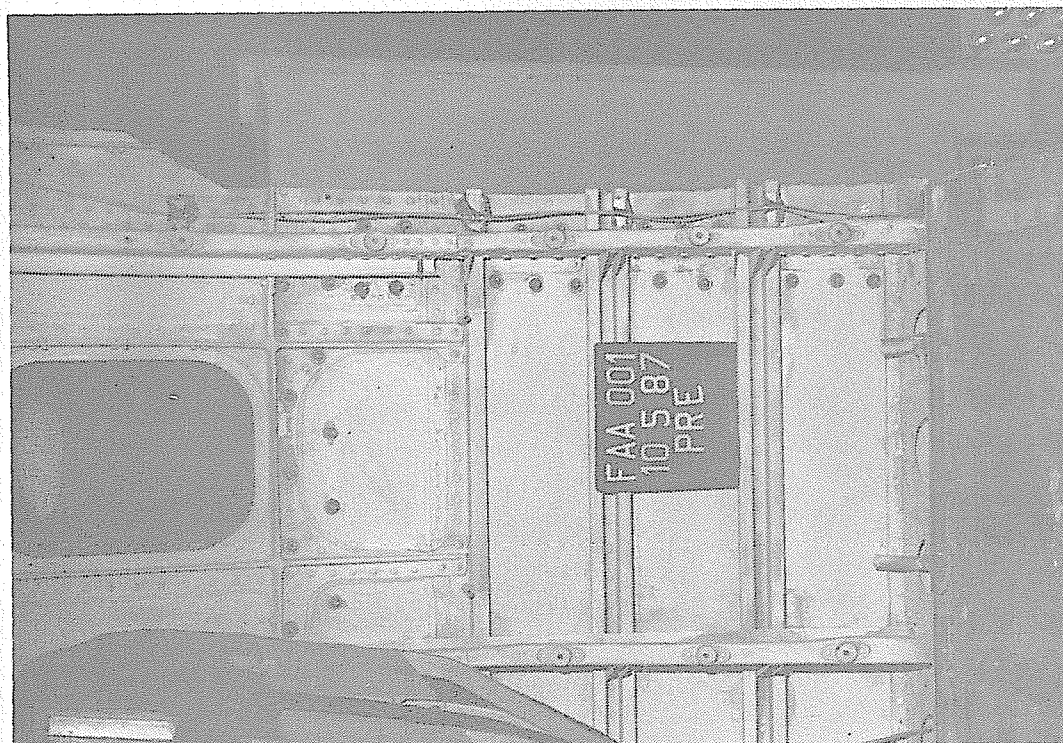


Figure 6. FUSELAGE ATTACHMENT - VIEW 4



Figure 7. FUSELAGE ATTACHMENT - CLOSEUP

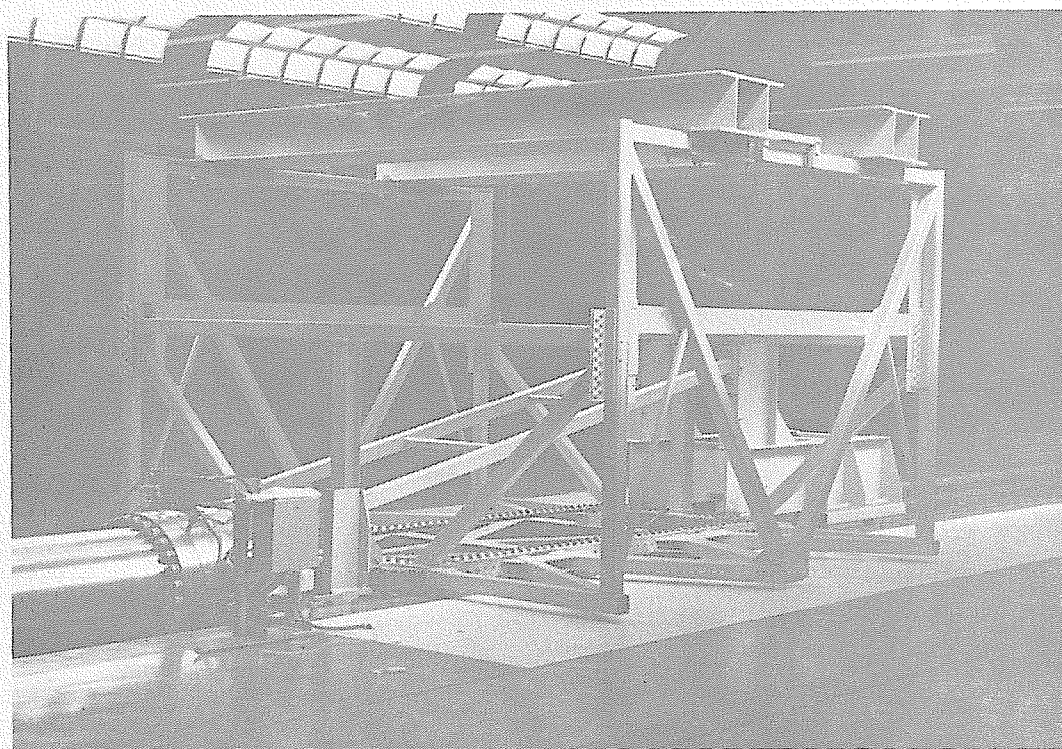


Figure 8. TEST FIXTURE

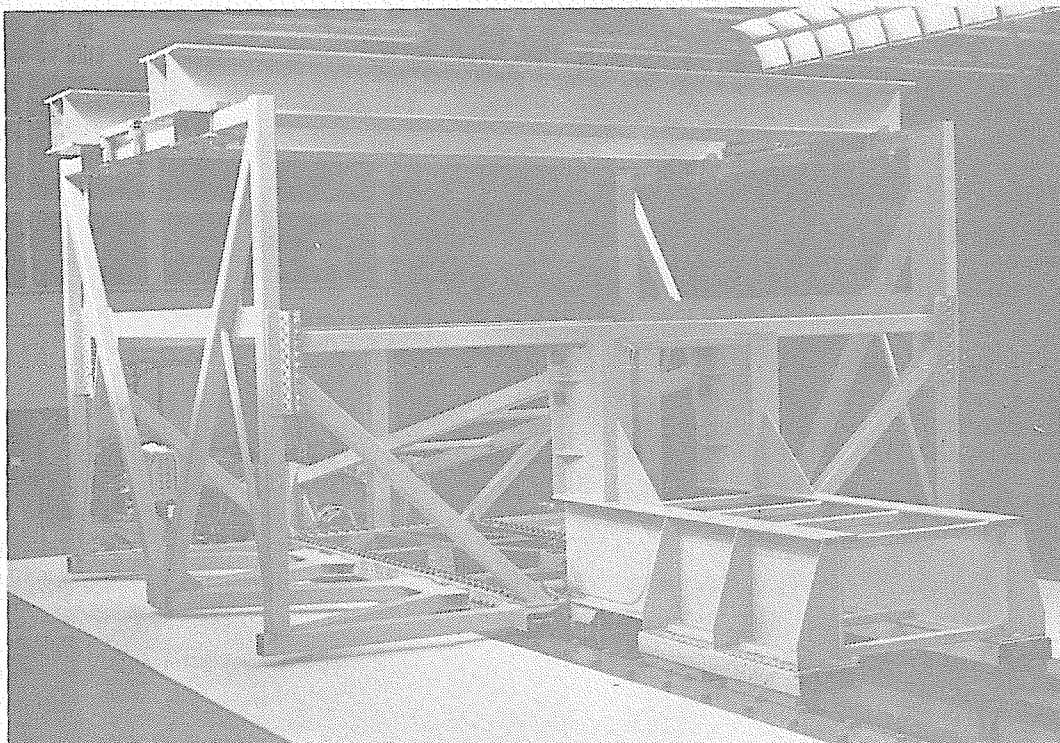


Figure 9. SLED EXTENSION

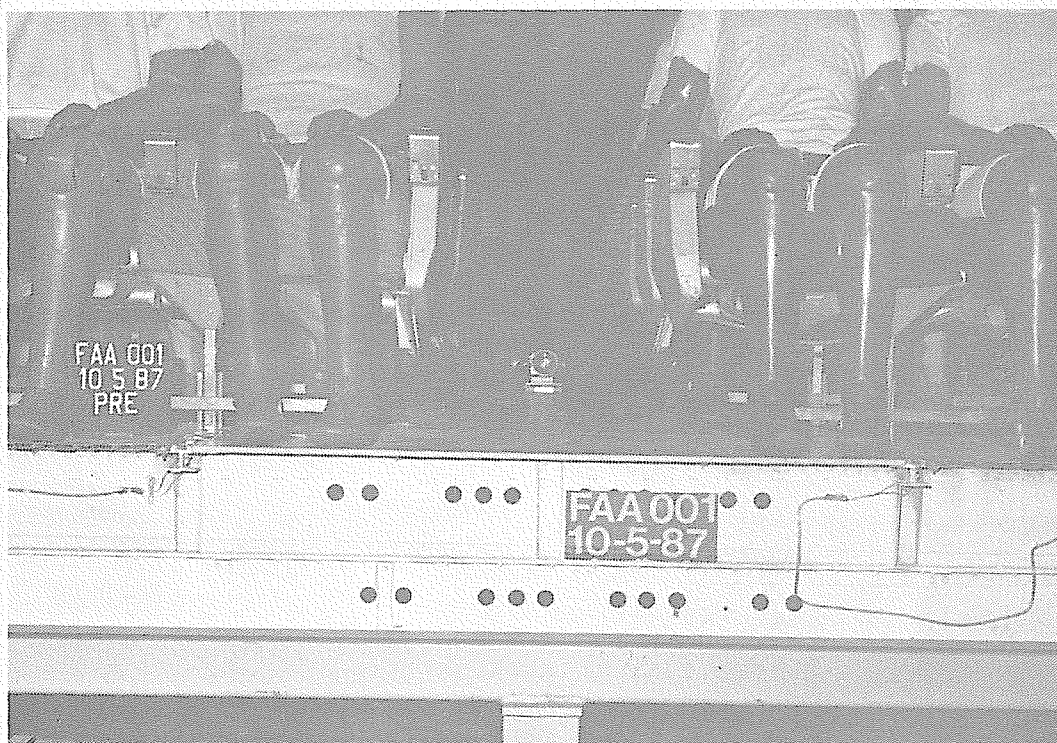


Figure 10. ONBOARD CAMERA LOCATION - VIEW 1



Figure 11. ONBOARD CAMERA LOCATION - VIEW 2

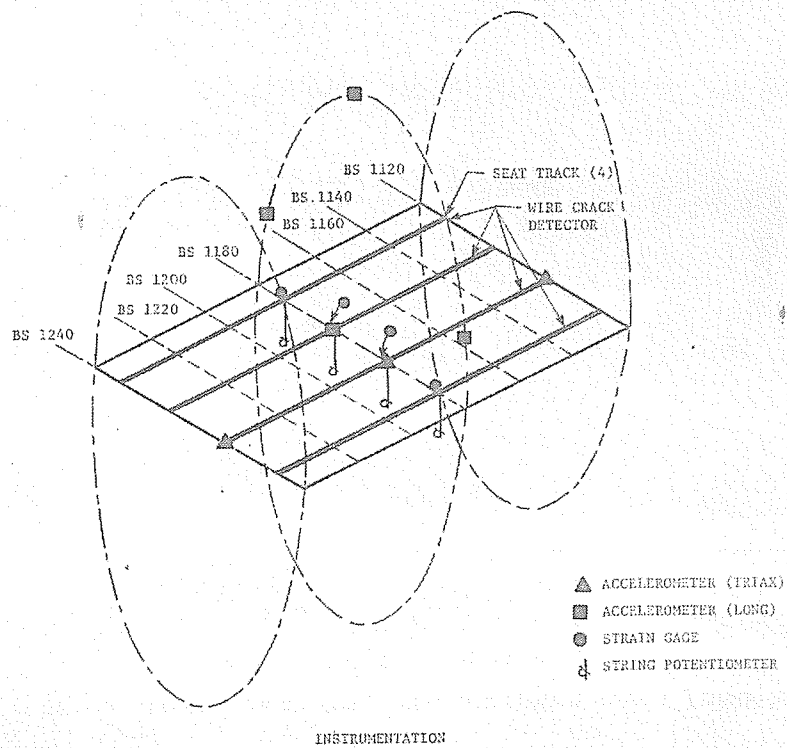


Figure 12. INSTRUMENTATION LOCATIONS

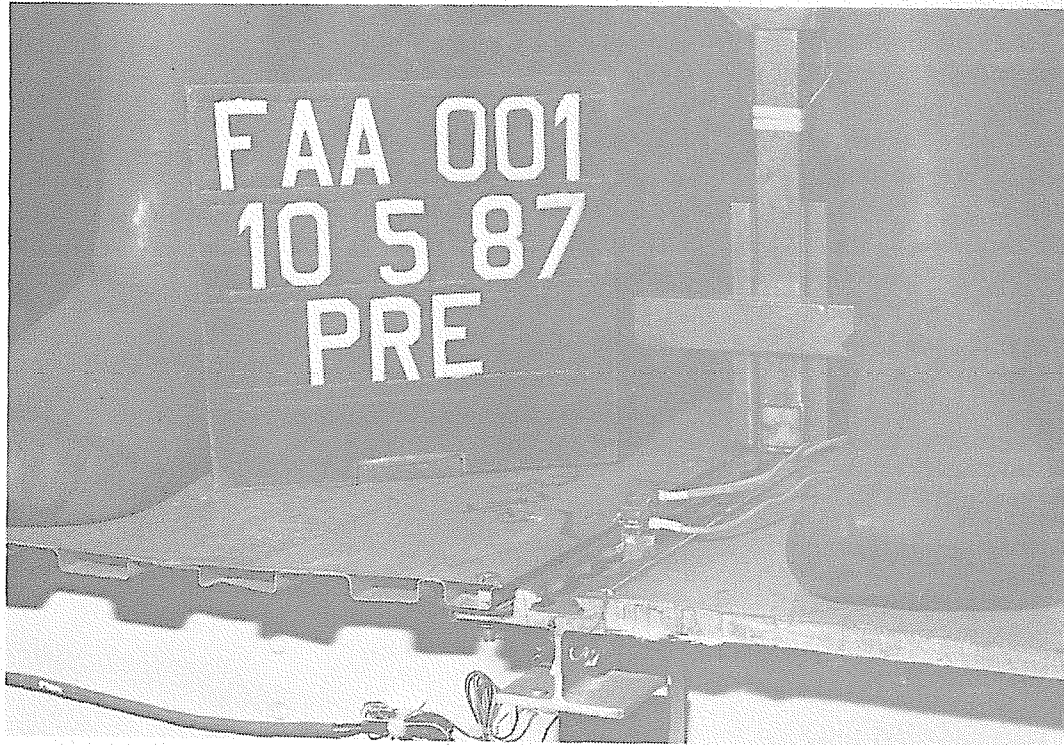


Figure 13. TYPICAL SEAT TRACK ACCELEROMETER PLACEMENT



Figure 14. TYPICAL FUSELAGE ACCELEROMETER PLACEMENT



Figure 15. TYPICAL STRAIN GAGE PLACEMENT

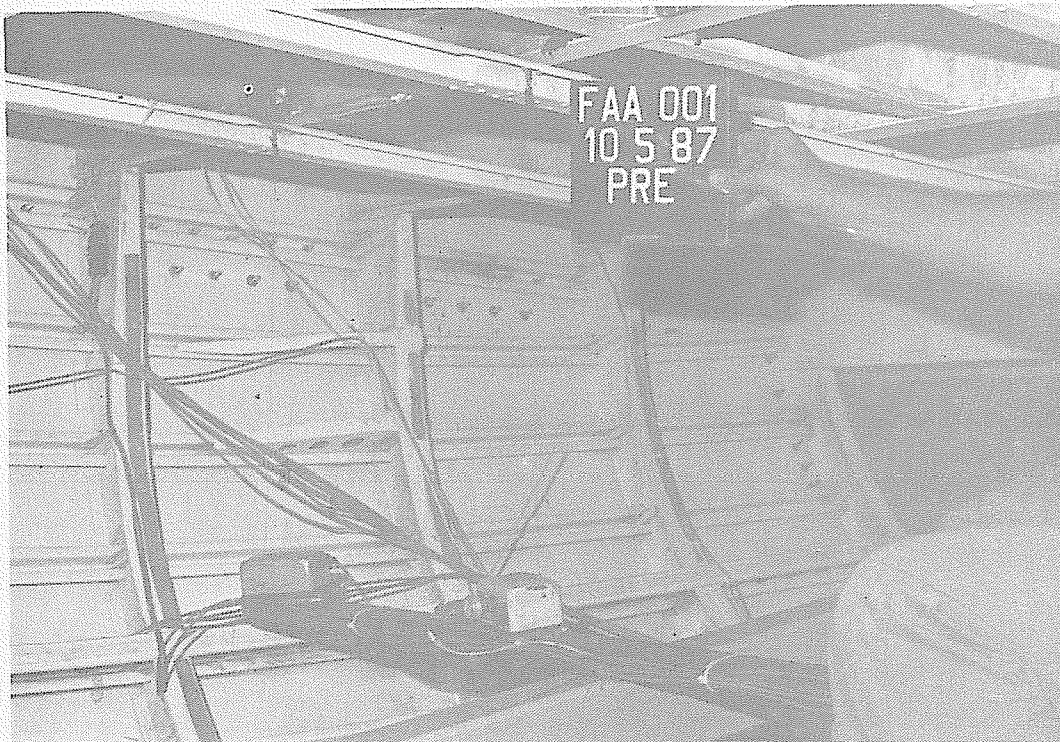


Figure 16. TYPICAL STRING POTENTIOMETER PLACEMENT

GAGE	LOCATION
1	LEFT FRONT
2	LEFT DIAGONAL
3	LEFT REAR
4	RIGHT FRONT
5	RIGHT DIAGONAL
6	RIGHT REAR

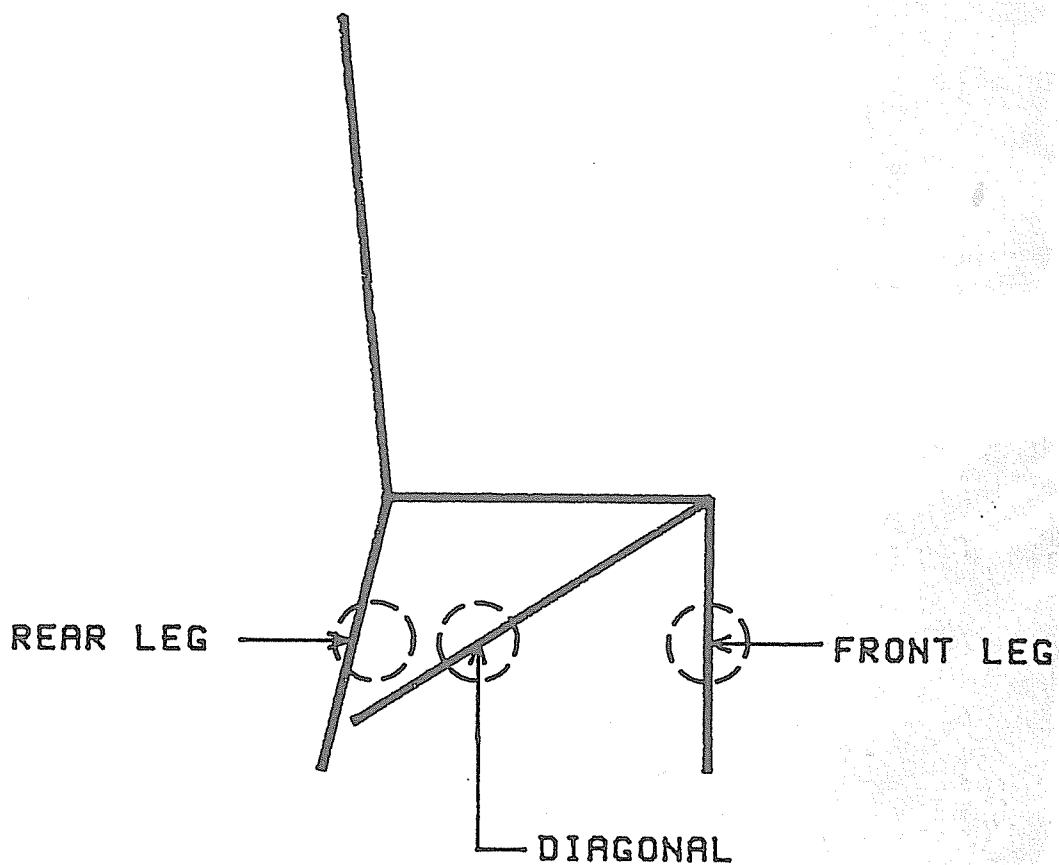


Figure 15a - Gage Locations

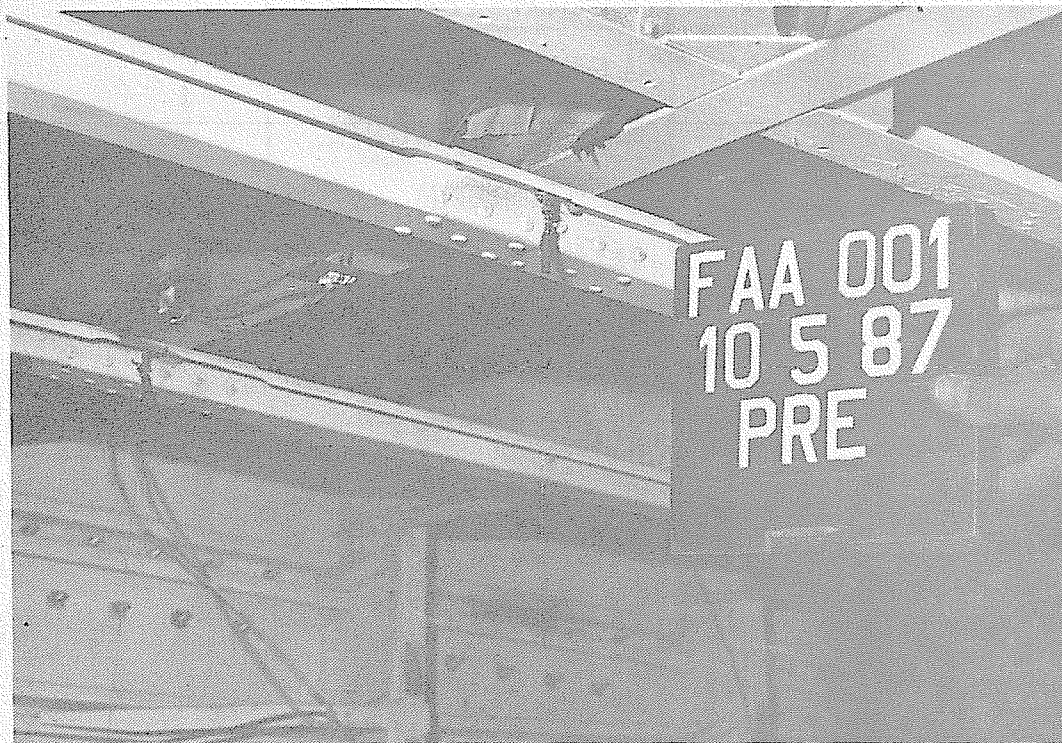


Figure 17. TYPICAL STRING POTENTIOMETER PLACEMENT - CLOSEUP

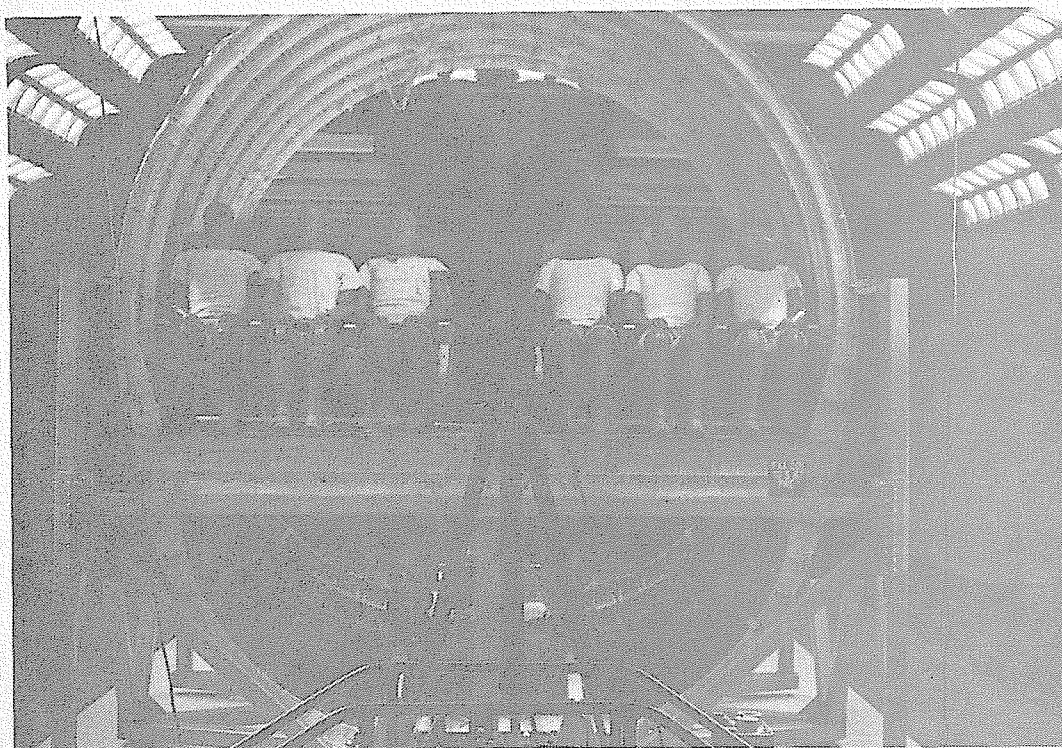


Figure 18. PRE-TEST 01 FRONT VIEW

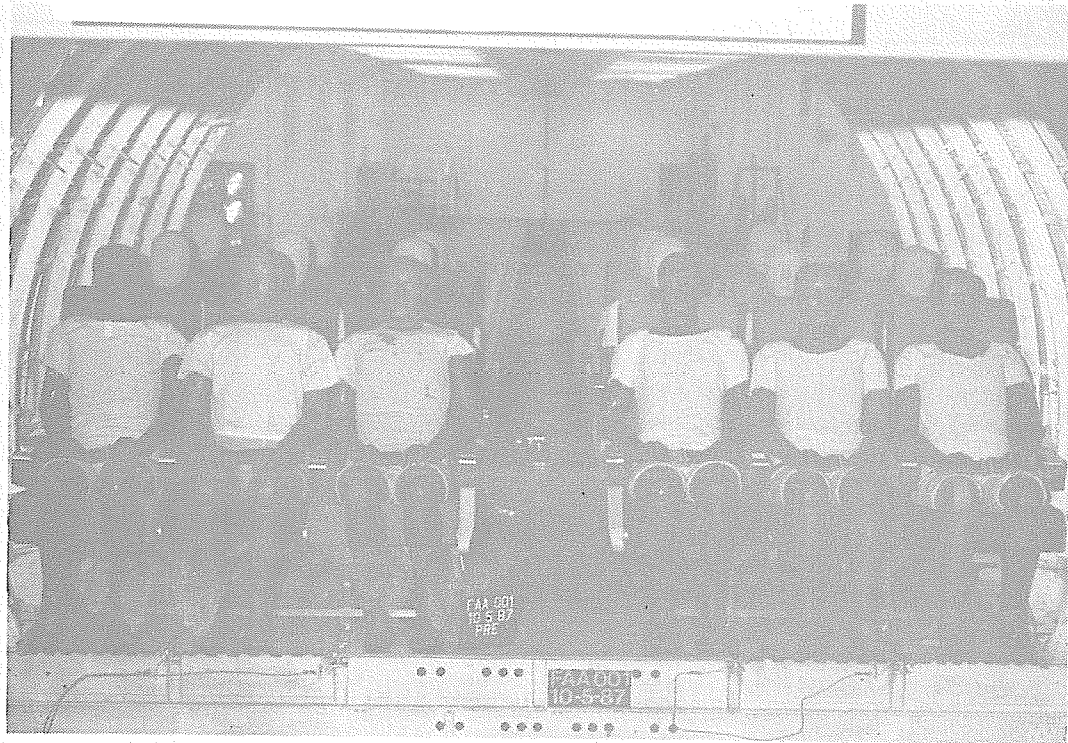


Figure 19. PRE-TEST 01 FRONT VIEW CLOSEUP



Figure 20. PRE-TEST 01 RIGHT FRONT 3/4 VIEW 1



Figure 21. PRE-TEST 01 RIGHT FRONT 3/4 VIEW 2

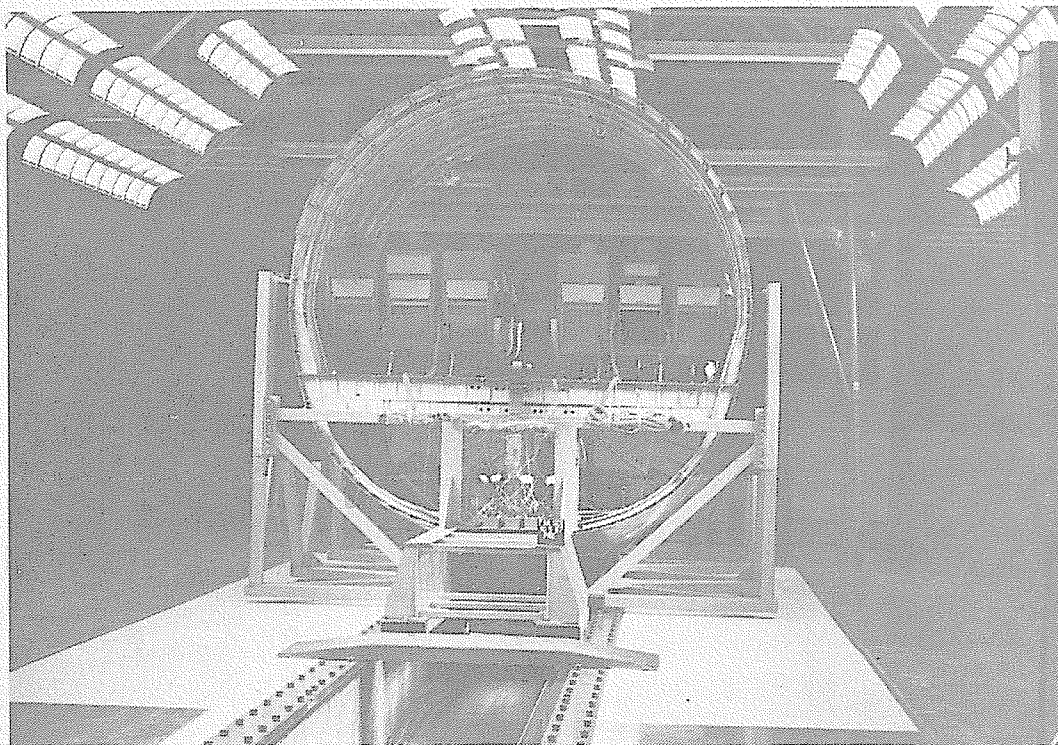


Figure 22. PRE-TEST 01 REAR VIEW

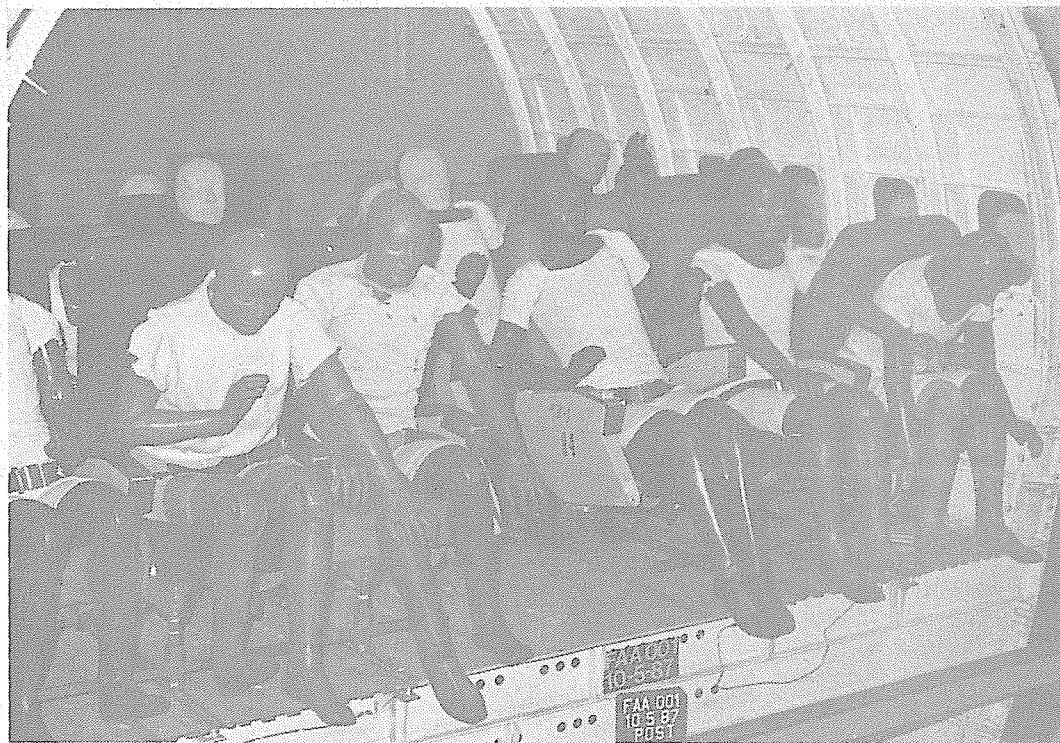


Figure 23. POST-TEST 01 FRONT - VIEW 1

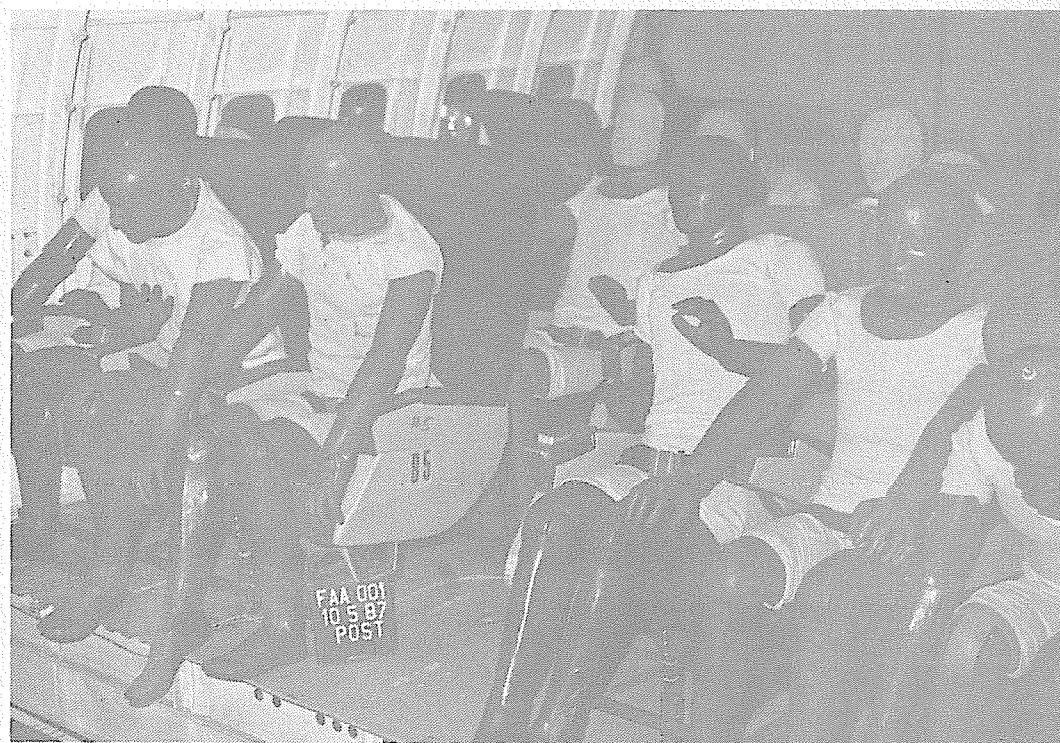


Figure 24. POST-TEST 01 FRONT - VIEW 2



Figure 25. POST-TEST 01 BELT ATTACHMENT BUCKLE

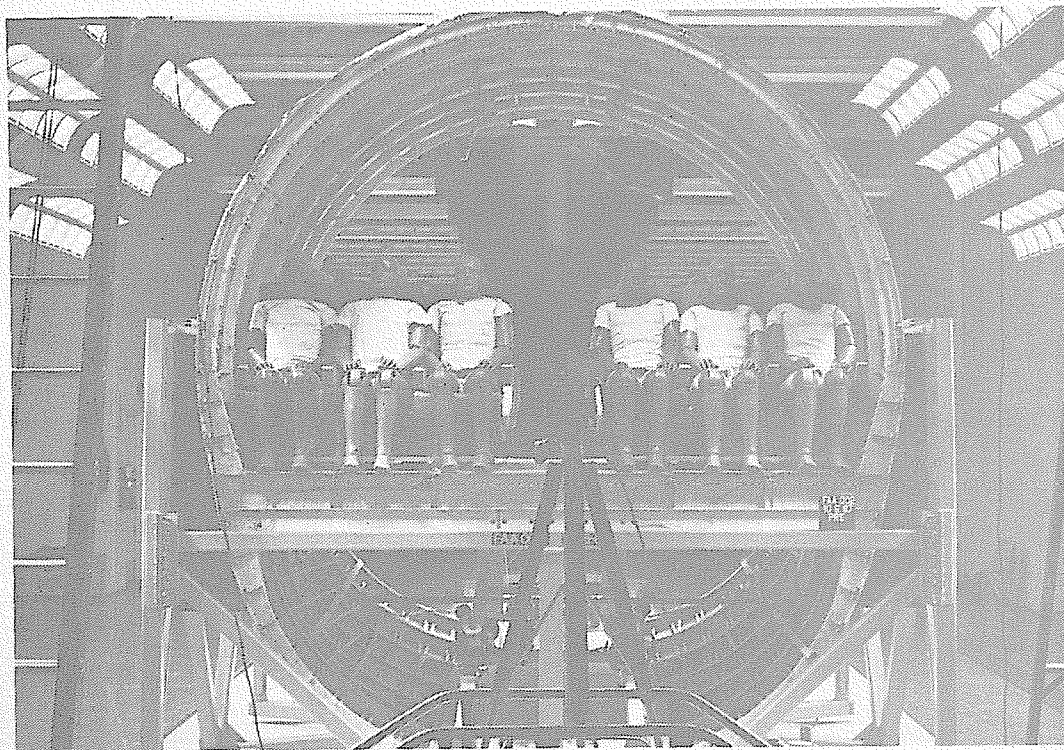


Figure 26. PRE-TEST 02 FRONT - VIEW 1



Figure 27. PRE-TEST 02 FRONT - VIEW 2



Figure 28. PRE-TEST 02 FRONT - VIEW 3

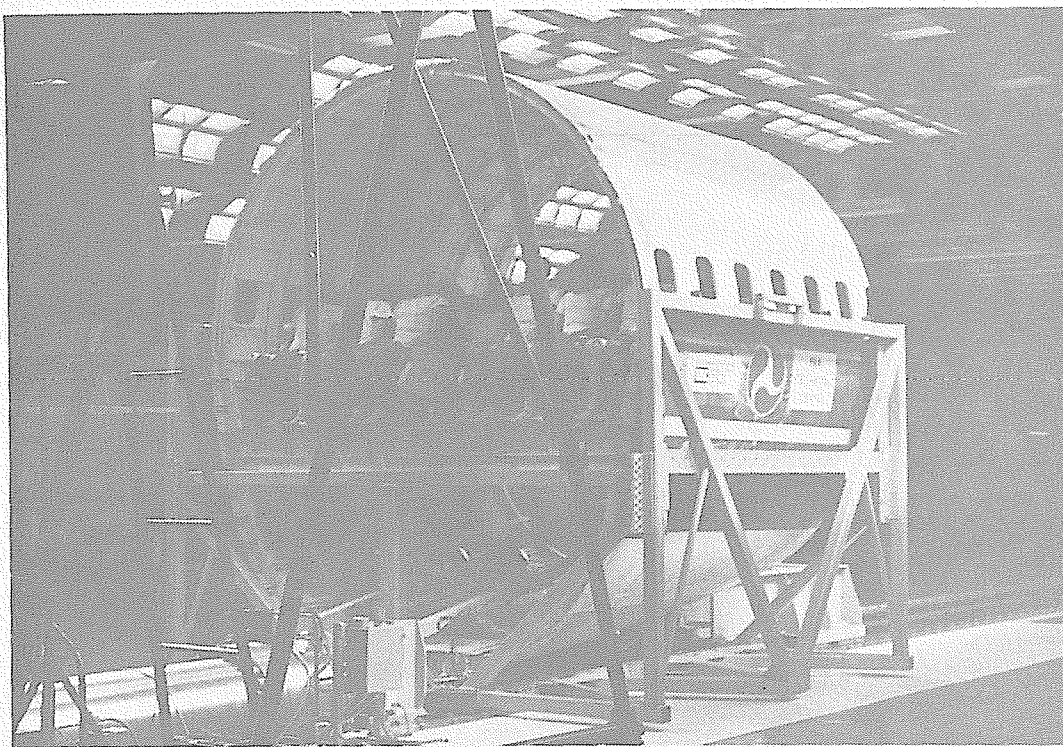


Figure 29. PRE-TEST 02 LEFT FRONT 3/4 VIEW

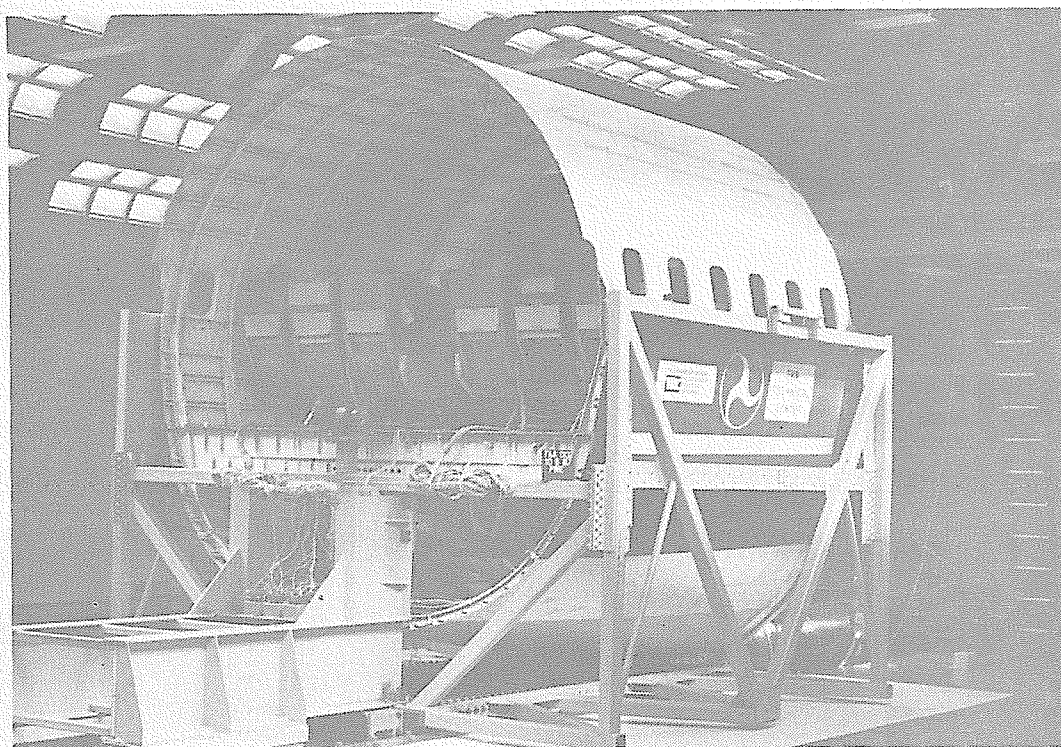


Figure 30. PRE-TEST 02 RIGHT REAR 3/4 VIEW

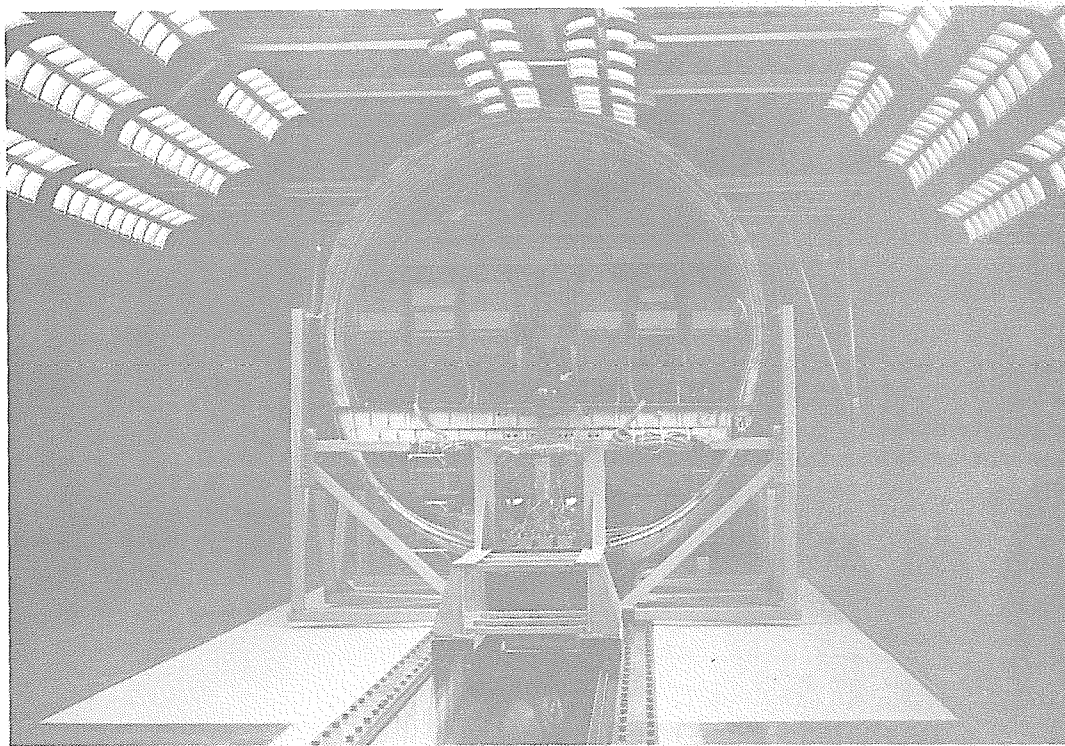


Figure 31. PRE-TEST O2 REAR VIEW

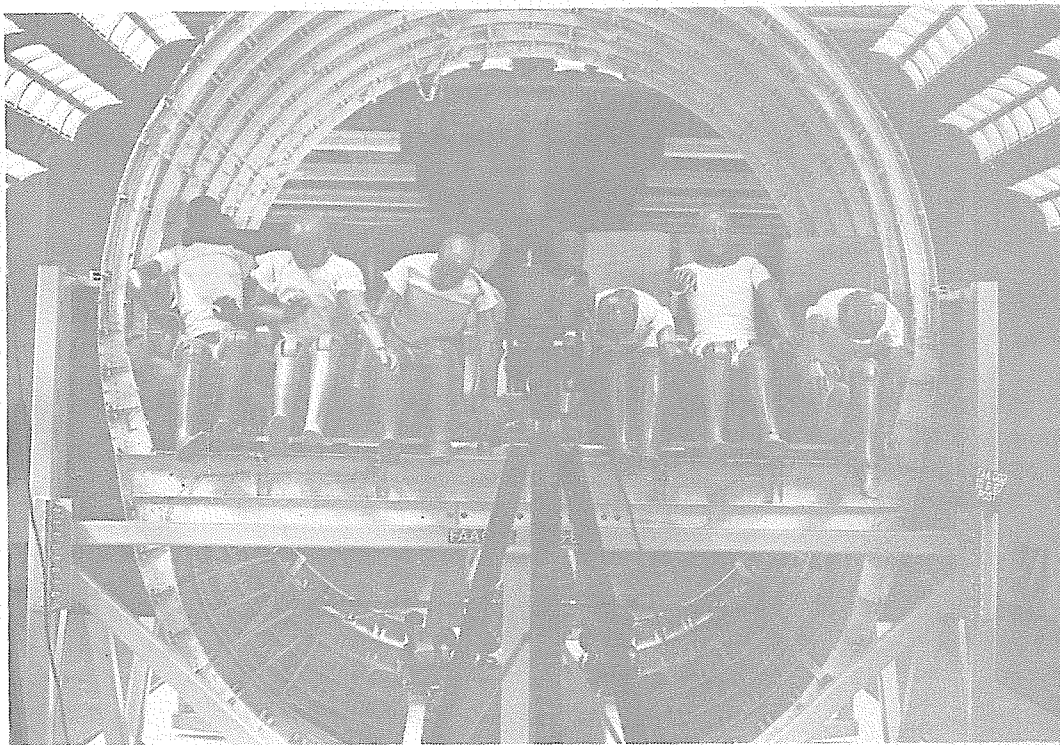


Figure 32. POST-TEST O2 FRONT - VIEW 1



Figure 33. POST-TEST 02 FRONT - VIEW 2



Figure 34. POST-TEST 02 FRONT - VIEW 3



Figure 35. POST-TEST 02 REAR VIEW

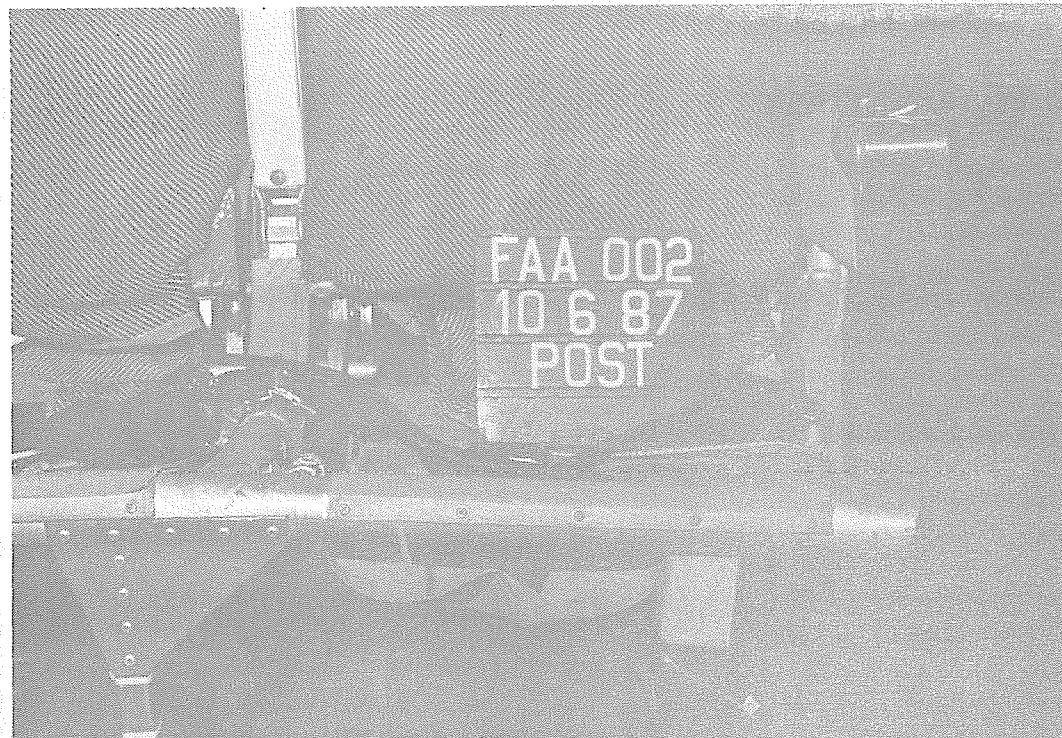


Figure 36. POST-TEST 02 FRONT CROSS TUBE

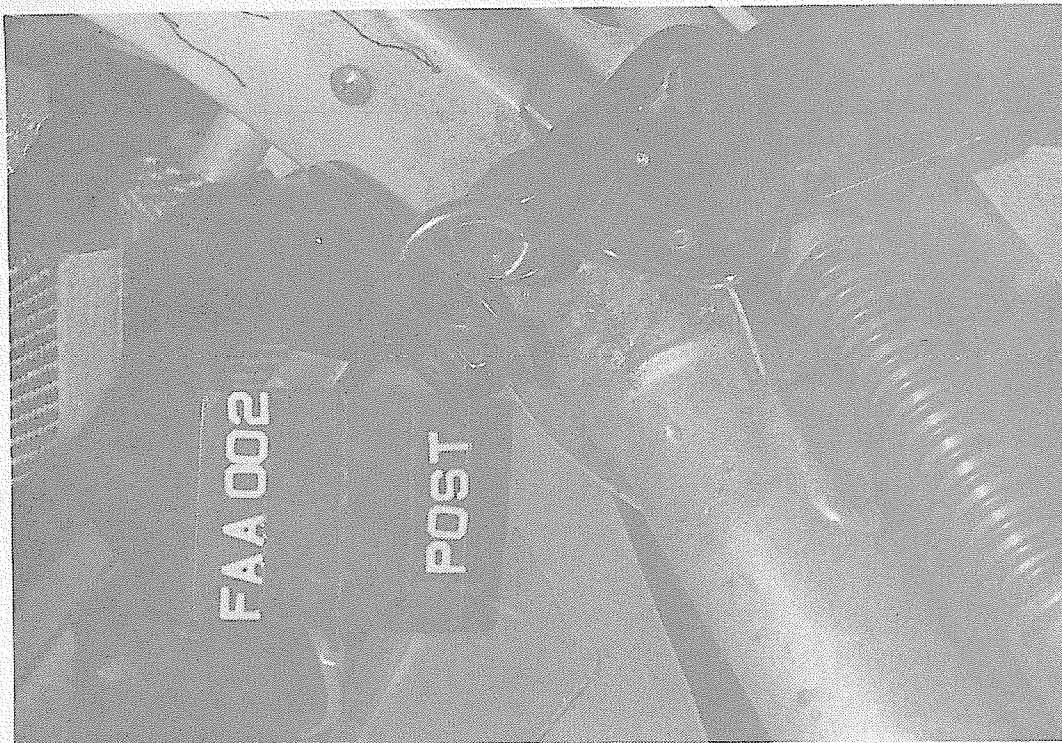


Figure 37. POST-TEST 02 TUBE BUCKLING



Figure 38. POST-TEST 02 SEAT BELT RETAINING CLIP

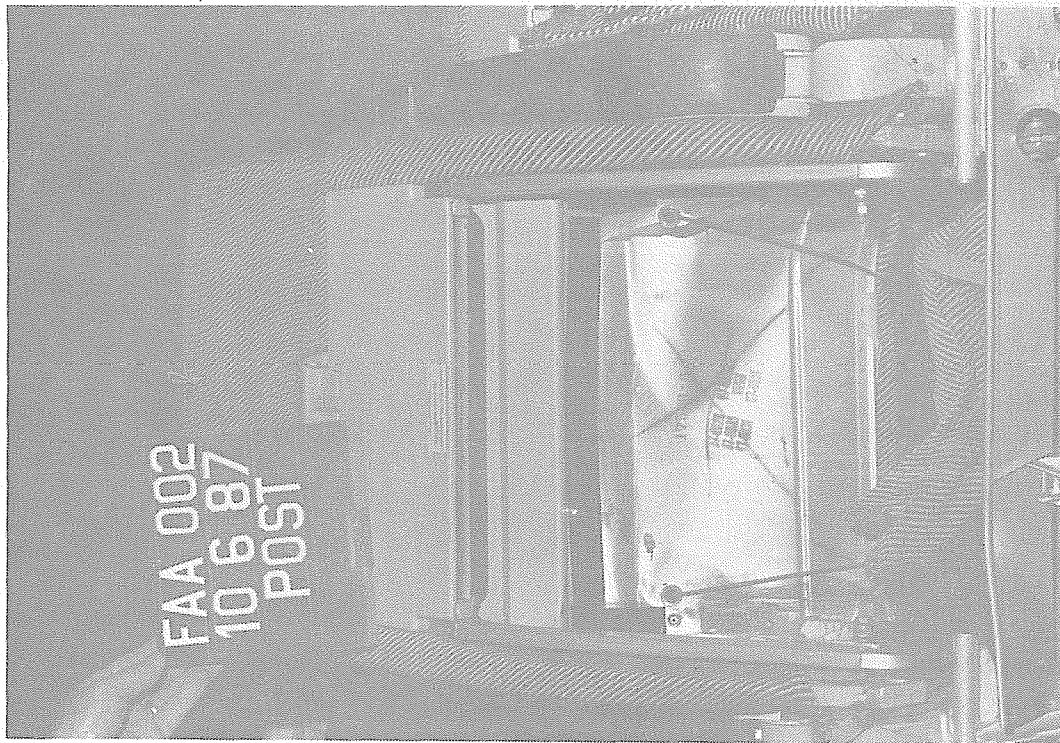


Figure 39. POST-TEST 02 CENTER SEAT BACK

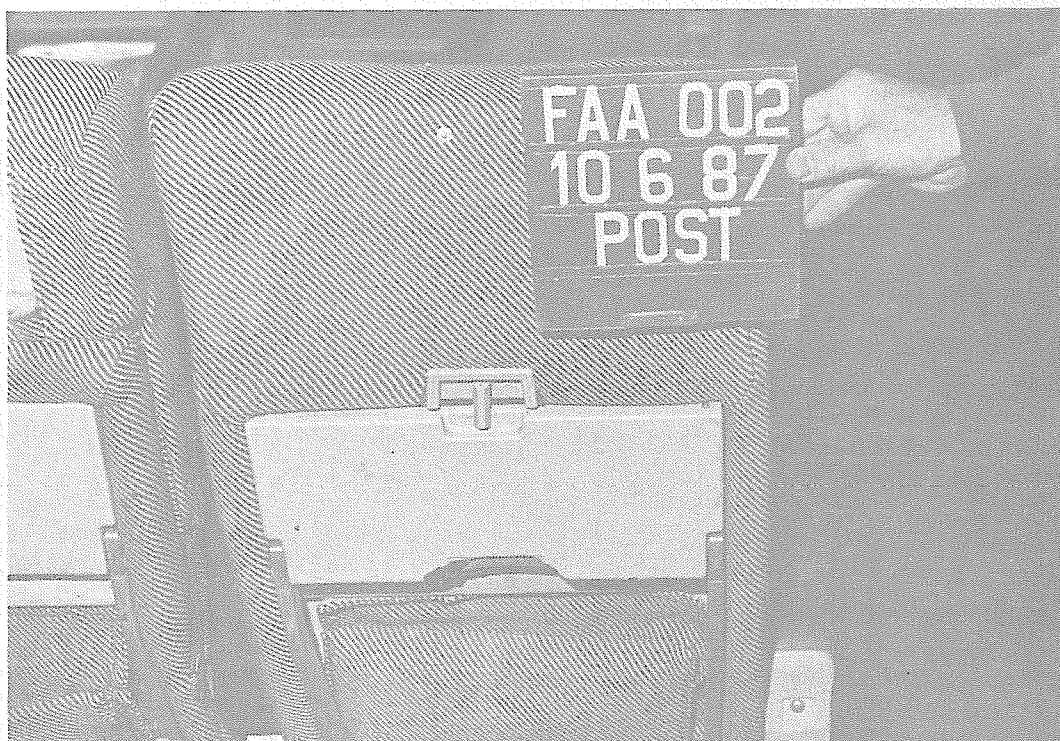


Figure 40. POST-TEST 02 HEAD STRIKE MARK

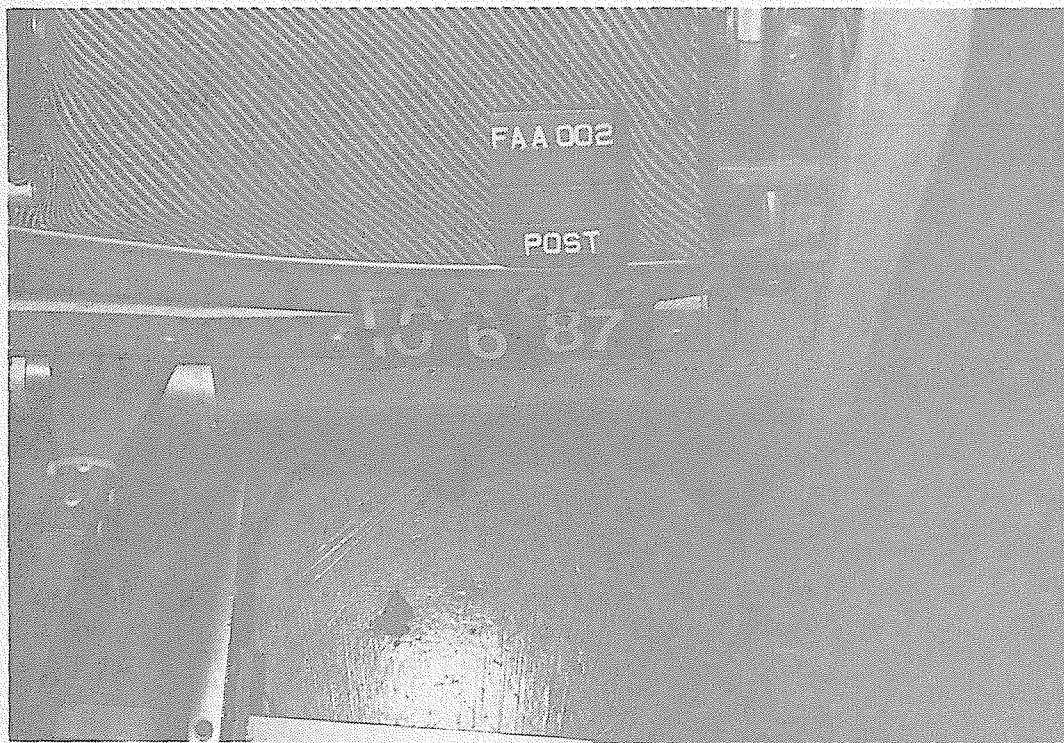


Figure 41. POST-TEST 02 REAR CROSS TUBE

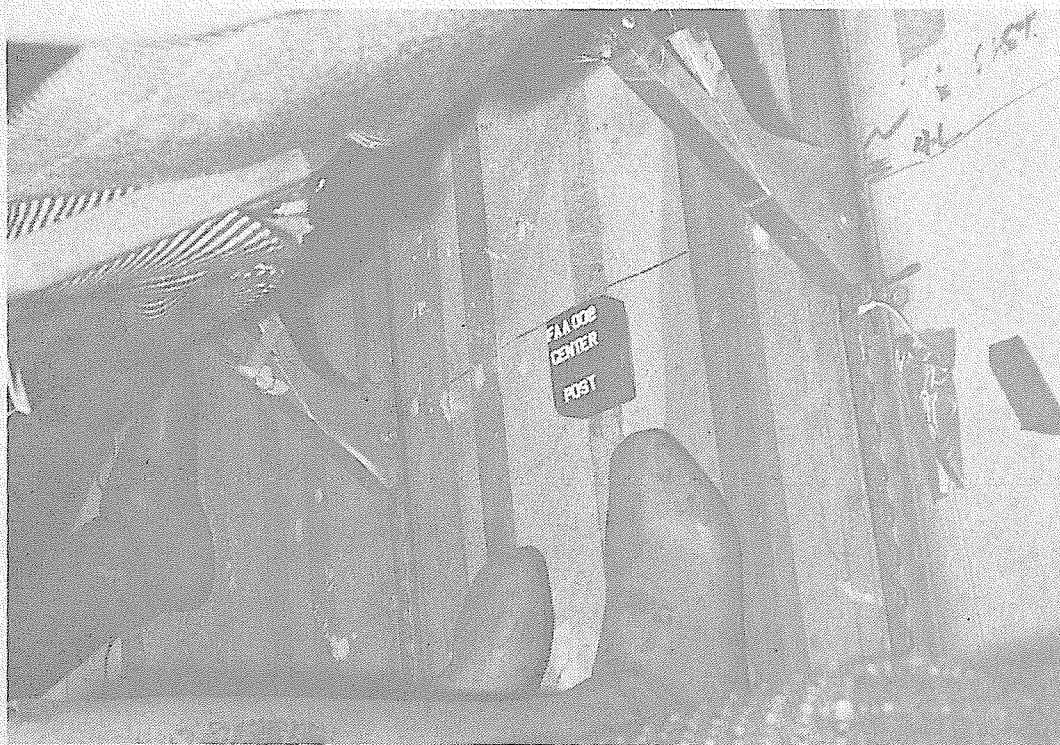


Figure 42. POST-TEST 02 SECOND ROW LEFT SIDE SEAT LOCKS



Figure 43. POST-TEST 02 SECOND ROW LEFT INBOARD SEAT LOCK



Figure 44. POST-TEST 02 SECOND ROW LEFT SIDE OUTBOARD SEAT LOCK



Figure 45. POST-TEST 02 SECOND ROW RIGHT SIDE SEAT LOCKS



Figure 46. POST-TEST 02 SECOND ROW RIGHT INBOARD SEAT LOCK

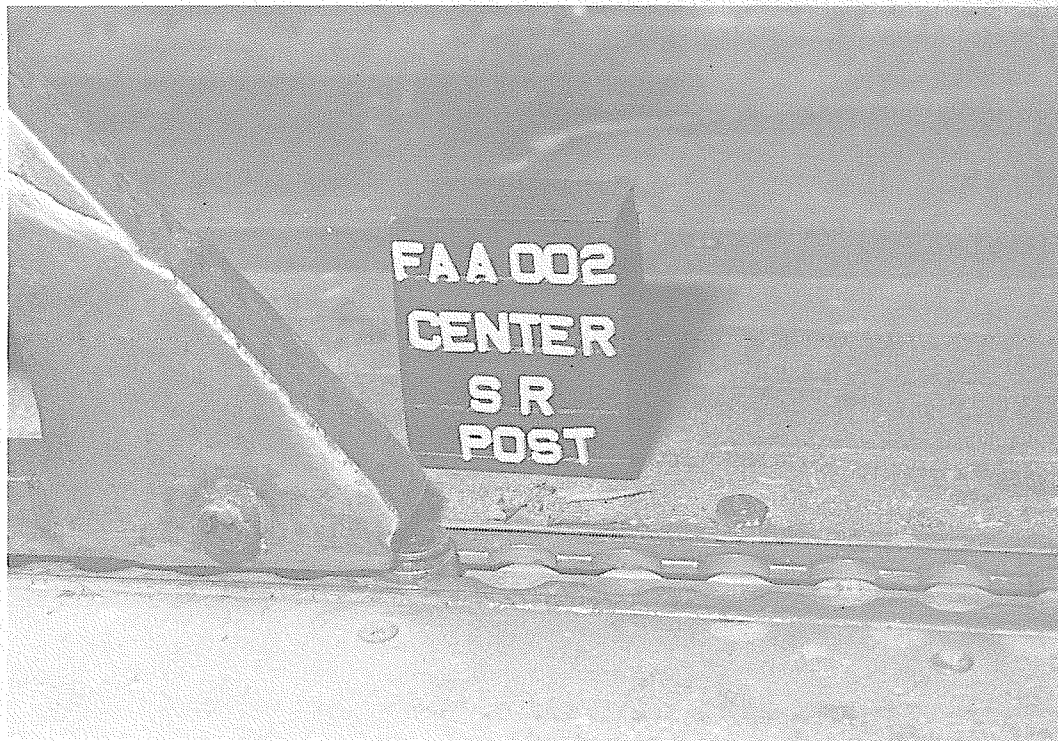


Figure 47. POST-TEST 02 SECOND ROW RIGHT SIDE OUTBOARD SEAT LOCK

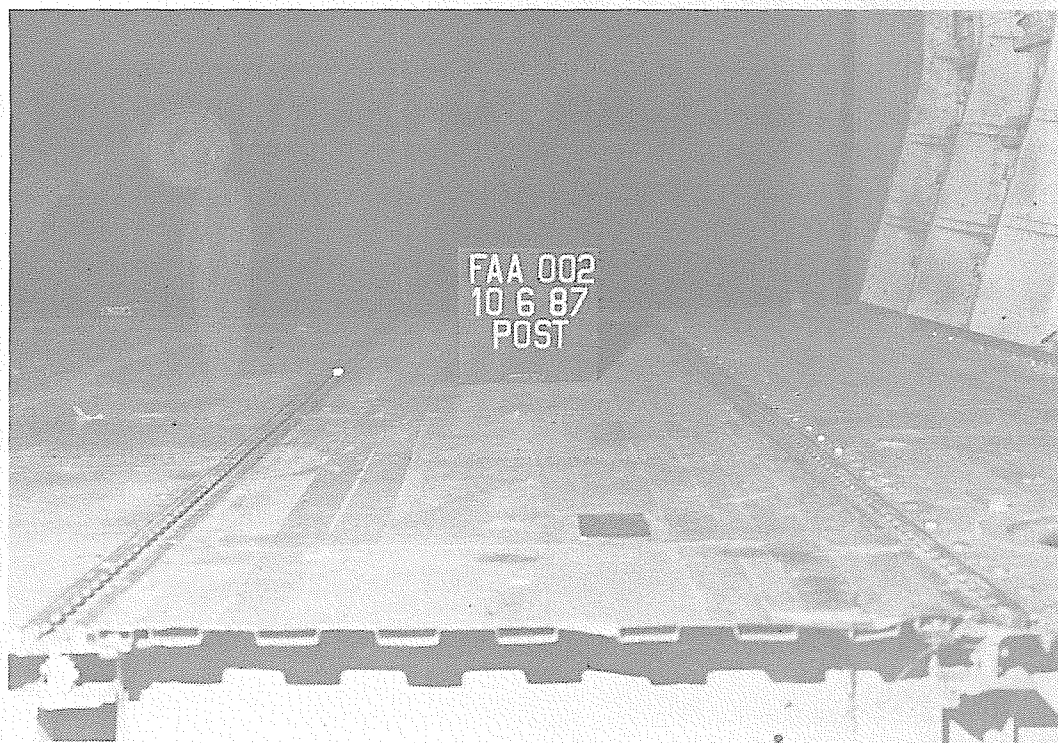


Figure 48. POST-TEST 02 FLOOR - VIEW 1



Figure 49. POST-TEST 02 FLOOR - VIEW 2



Figure 50. POST-TEST 02 FLOOR - VIEW 3



Figure 51. POST-TEST 02 FLOOR - VIEW 4

APPENDIX A

INSTRUMENTATION LIST

DUMMY AND SEAT BELT INSTRUMENTATION LIST

CHANNEL	CHANNEL	INSTRUMENT	INSTRUMENT
ABBREVIATION	TITLE	MANUFACTURER	SERIAL NO.
PEVXG1	SEAT D CENTER DUMMY	ENDEVCO 7264	CC77H
	PELVIS LONGITUDINAL ACCEL.		
PEVZG1	SEAT D CENTER DUMMY	ENDEVCO 7264	CB07H
	PELVIS VERTICAL ACCEL.		
PEVXG2	SEAT C CENTER DUMMY	ENDEVCO 7264	BK96J
	PELVIS LONGITUDINAL ACCEL.		
PEVZG2	SEAT C CENTER DUMMY	ENDEVCO 7264	BY82J
	PELVIS VERTICAL ACCEL.		
LBOF1	SEAT D CENTER DUMMY	LEBOW 3419	127
	OUTBOARD LAP BELT LOAD		
LBIF1	SEAT D CENTER DUMMY	LEBOW 3419	236
	INBOARD LAP BELT LOAD		
LBOF2	SEAT C CENTER DUMMY	LEBOW 3419	234
	OUTBOARD LAP BELT LOAD		
LBIF2	SEAT C CENTER DUMMY	LEBOW 3419	718
	INBOARD LAP BELT LOAD		

FUSELAGE INSTRUMENTATION LIST

CHANNEL	INSTRUMENT	INSTRUMENT	INSTRUMENT		LOCATION
<u>ABBREVIATION</u>	<u>MANUFACTURER</u>	<u>SERIAL NO.</u>	<u>BODY STATION</u>	<u>LATERAL*</u>	<u>VERTICAL*</u>
FUSXG1	ENDEVCO 7264	CF11H	1180	-63.9	54.5
FUSXG2	ENDEVCO 7264	CE23H	1180	0.0	95.7
FUSXG3	ENDEVCO 7264	CD74H	1180	63.9	54.5
FLMXG1	ENDEVCO 7264	CE49H	1180	-24.75	0.0
FLAXG2	ENDEVCO 7264	CE79H	1240	24.75	0.0
FLAYG2	ENDEVCO 7264	CA57H	1240	24.75	0.0
FLAZG2	ENDEVCO 7264	CC01H	1240	24.75	0.0
FLMXG3	ENDEVCO 7264	CE63H	1180	24.75	0.0
FLMYG3	ENDEVCO 7264	CC02H	1180	24.75	0.0
FLMZG3	ENDEVCO 7264	BY18J	1180	24.75	0.0
FLFXG4	ENDEVCO 7264	CE72H	1120	24.75	0.0
FLFYG4	ENDEVCO 7264	CE91H	1120	24.75	0.0
FLFZG4	ENDEVCO 7264	CE21H	1120	24.75	0.0
POBS	STRAIN GAGE		1180	-45.5	-0.7
PIBS	STRAIN GAGE		1180	-24.75	-0.7
SIBS	STRAIN GAGE		1180	24.75	-0.7
SOBS	STRAIN GAGE		1180	45.5	-0.7
POSTZD	STRING POT		1180	-45.5	-8.0
PISTZD	STRING POT		1180	-24.75	-8.0
SISTZD	STRING POT		1180	24.75	-8.0
SOSTZD	STRING POT		1180	45.5	-8.0
POSTCD	CRACK DETECTOR		1120-1240	-45.50	0.0
PISTCD	CRACK DETECTOR		1120-1240	-24.75	0.0
SISTCD	CRACK DETECTOR		1120-1240	24.75	0.0
SOSTCD	CRACK DETECTOR		1120-1240	45.50	0.0
CBCD	CRACK DETECTOR		1180	-70.5-70.5	-0.7

*REFERENCE AND SIGN CONVENTION

	<u>POSITIVE</u>	<u>NEGATIVE</u>
LATERAL: FUSELAGE CENTERLINE	RIGHT	LEFT
VERTICAL: TOP OF FLOOR	UP	DOWN

SEAT INSTRUMENTATION LIST

<u>CHANNEL</u> <u>ABBREVIATION</u>	<u>CHANNEL</u> <u>TITLE</u>	<u>INSTRUMENT</u> <u>MANUFACTURER</u>	<u>INSTRUMENT</u> <u>SERIAL NO.</u>
SECXC	SEAT C LONGITUDINAL ACCELERATION	ENTRAN	A1-1
SECYG	SEAT C LATERAL ACCELERATION	ENTRAN	A2-2
SECZG	SEAT C VERTICAL ACCELERATION	ENTRAN	J1-1
SEDXC	SEAT D LONGITUDINAL ACCELERATION	ENTRAN	J3-3
SEDYG	SEAT D LATERAL ACCELERATION	ENTRAN	J10-1
SEDZG	SEAT D VERTICAL ACCELERATION	ENTRAN	78-5
SAOFLS	SEAT A OUTBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87-84-01
SBIFLS	SEAT B INBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87085-01
SCOFLS	SEAT C OUTBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87088-01
SCODSS	SEAT C OUTBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87088-02
SCIFLS	SEAT C INBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87088-04
SCIDSS	SEAT C INBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87088-05
SDOFLS	SEAT D OUTBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87090-04
SDODSS	SEAT D OUTBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87090-05
SDIFLS	SEAT D INBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87090-02
SDIDSS	SEAT D INBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87090-01

SEAT INSTRUMENTATION LIST

<u>CHANNEL</u> <u>ABBREVIATION</u>	<u>CHANNEL</u> <u>TITLE</u>	<u>INSTRUMENT</u> <u>MANUFACTURER</u>	<u>INSTRUMENT</u> <u>SERIAL NO.</u>
SEODSS	SEAT E OUTBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87087-02
SAODSS	SEAT A OUTBOARD DIAGONAL STRUT STRAIN	STRAIN GAGE	A87084-02
SEOFLS	SEAT E OUTBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87087-01
SFOFLS	SEAT F OUTBOARD FORWARD LEG STRAIN	STRAIN GAGE	A87089-04

APPENDIX B

DATA PLOTS

TESTS 01 AND 02

FRA , TEST 01

CRASH SIMULATION

87278

SLOXG

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -7.44B 102.38 , 0.74 B 201.88

20.00

7.50

5.00

-5.00

-17.50

-30.00


-42.50

-55.00

-67.50

-80.00

B-1

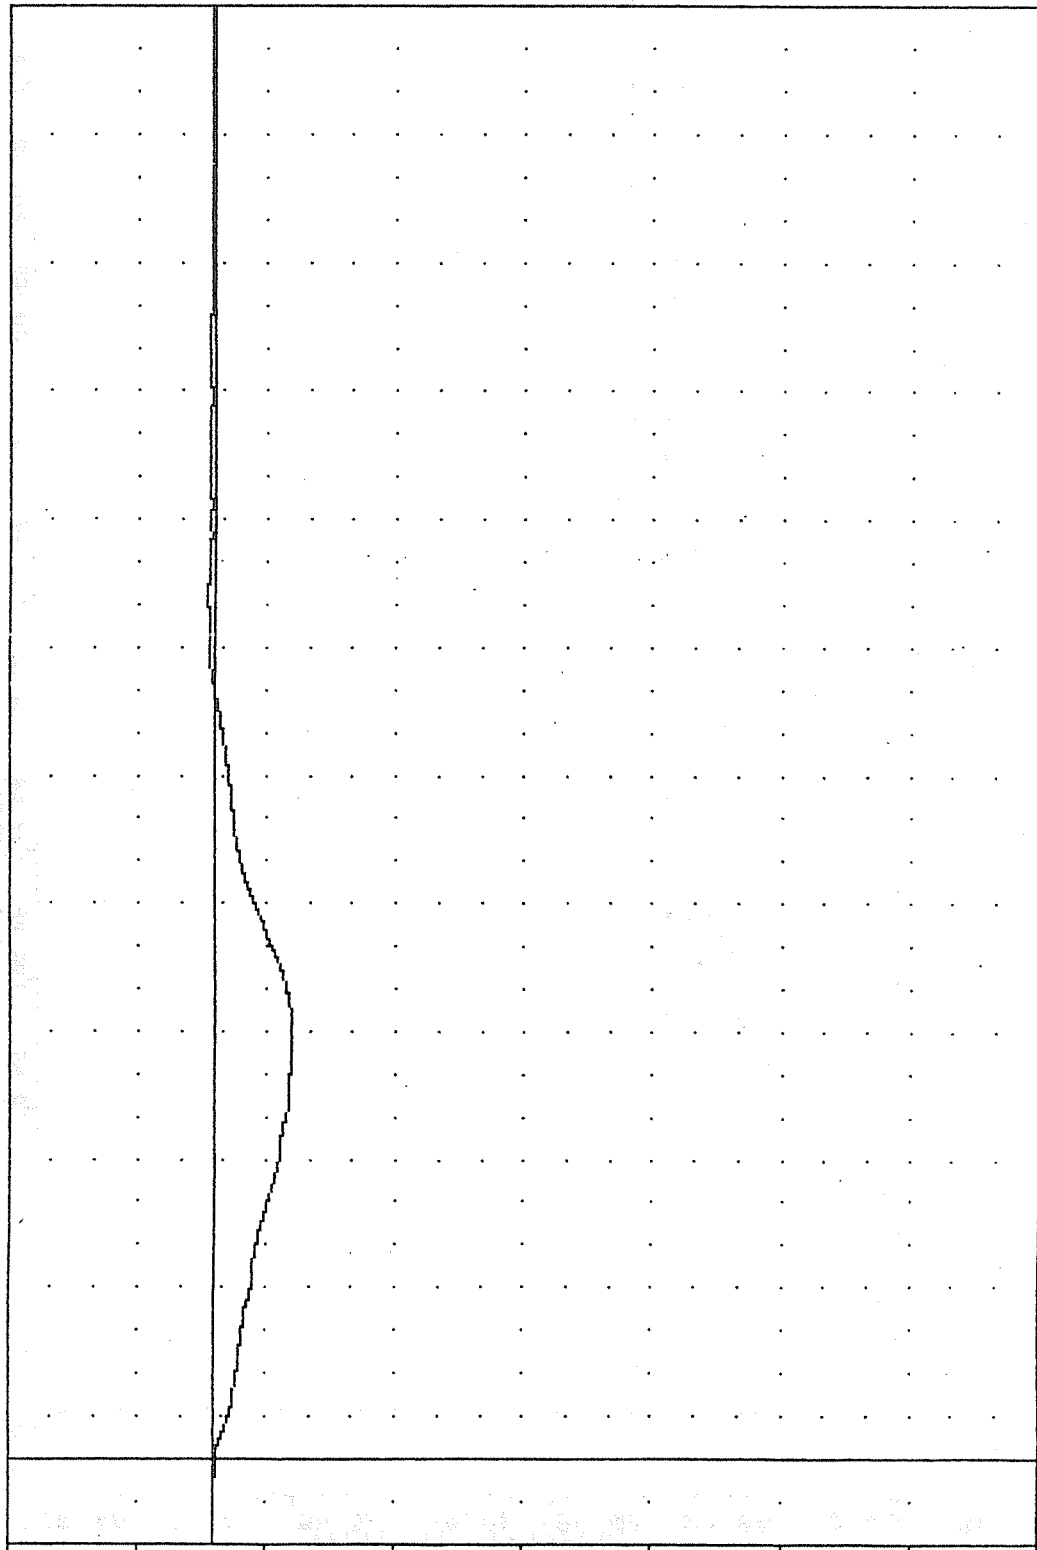


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

SLED LONGITUDINAL ACCELERATION

FRA , TEST 01
 CRASH SIMULATION
 87278
 SLDXV

FILTER = BLPF 300/ 949/ -40
 MIN, MAX VALUES = -22.38 176.63, 0.00 e -20.00

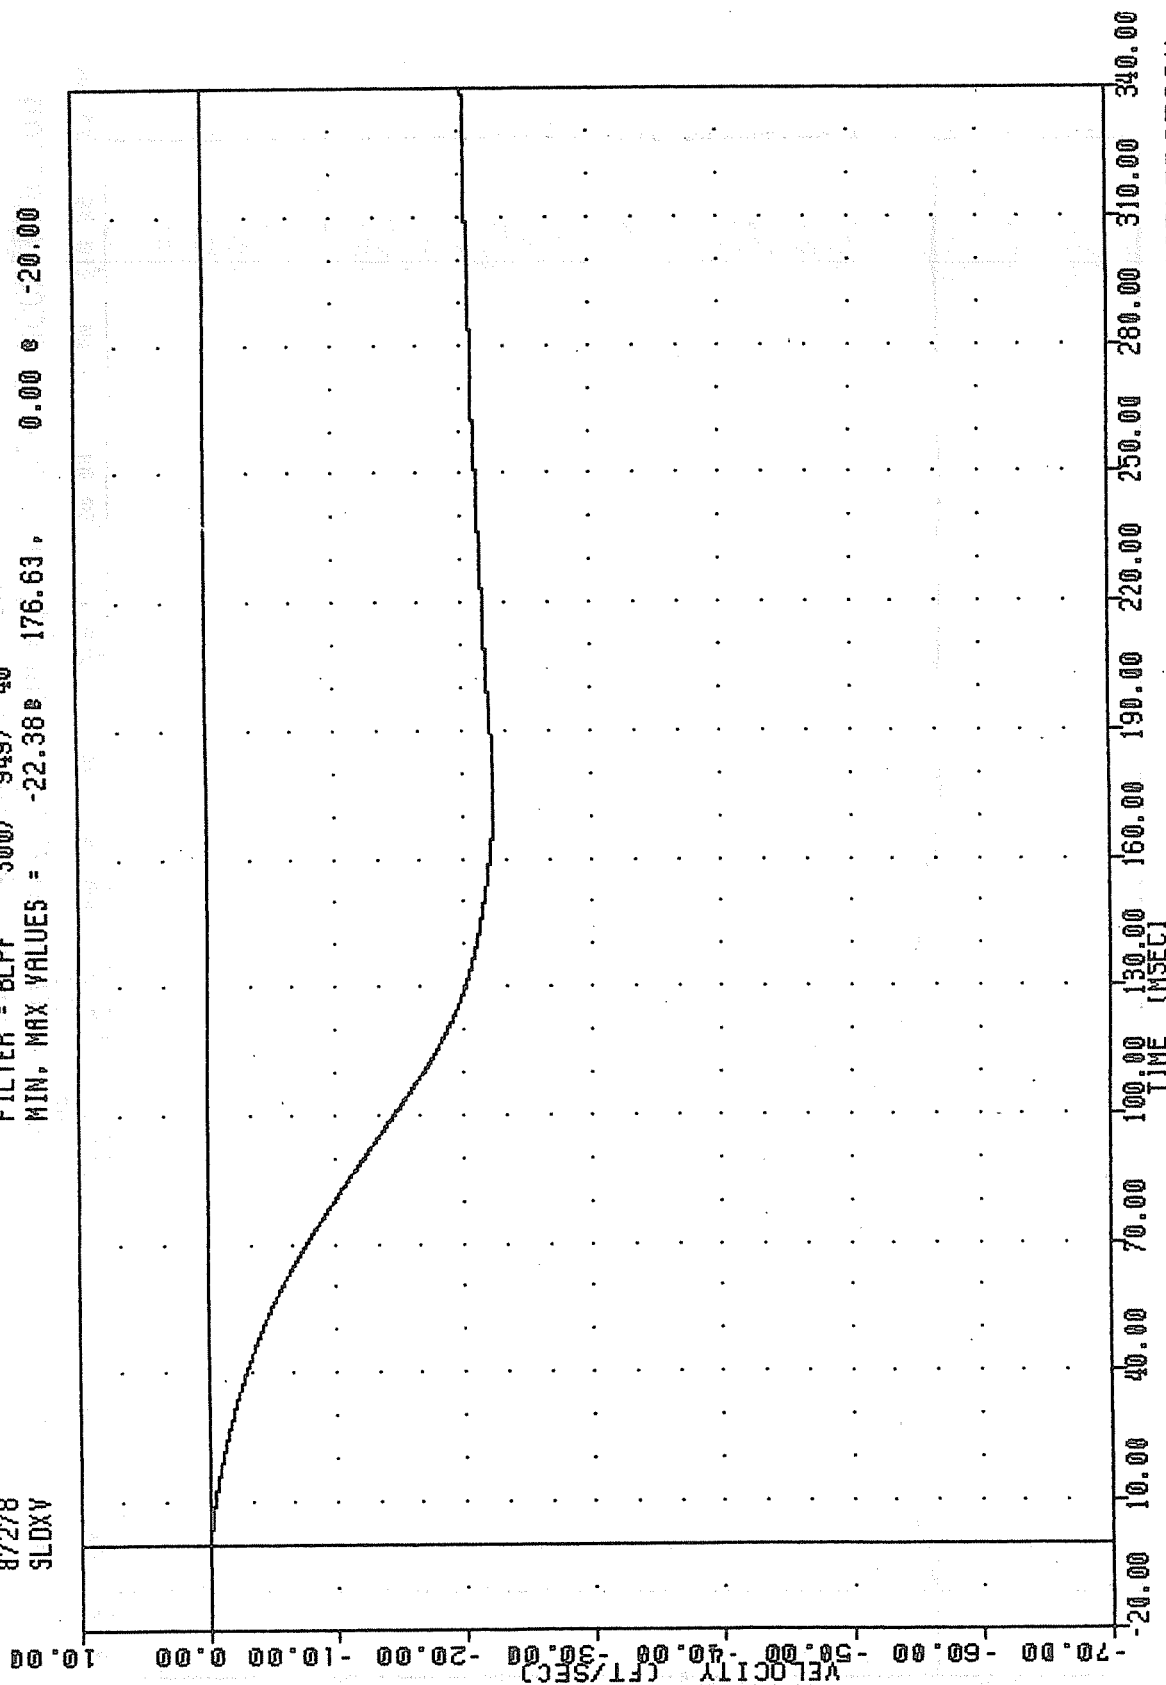

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SLED LONGITUDINAL VELOCITY

FAR , TEST 01

CARSH SIMULATION

87278

FLXG1

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES =

-7.62e

99.88,

1.42 e

190.63

100.00

75.00

50.00

25.00

0.00


-25.00

-50.00

-75.00

-100.00

B-3

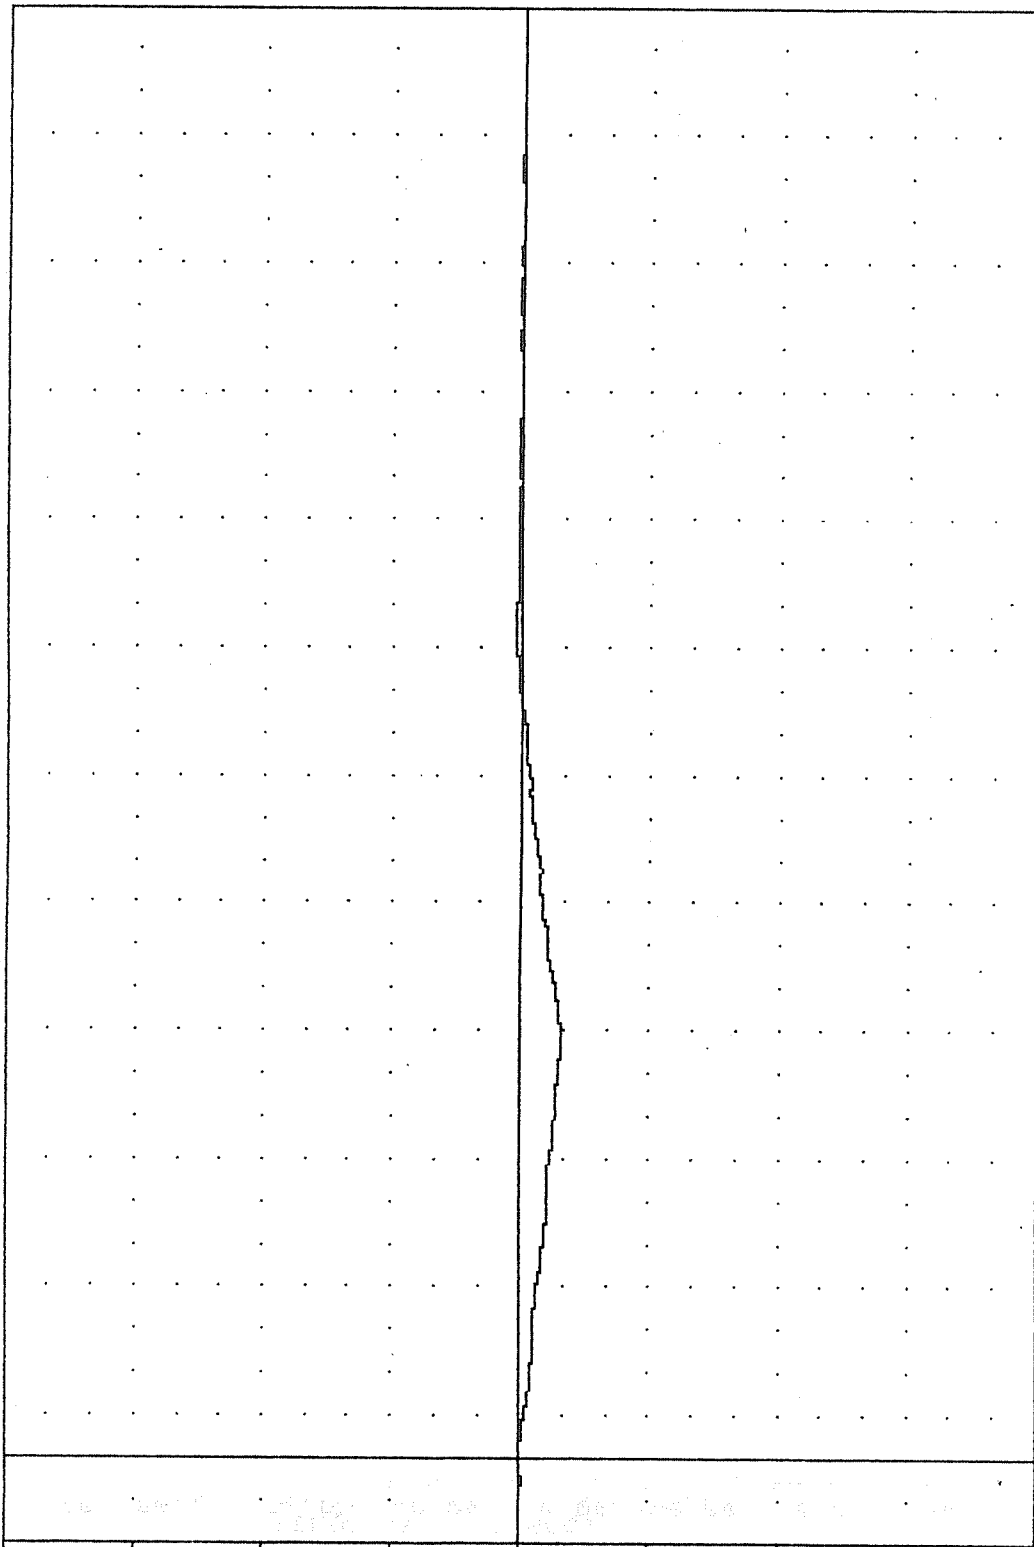

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
PORT INBOARD SEAT TRACK LONGITUDINAL ACCELERATION - MID

FAR , TEST 01
 CRASH SIMULATION
 87278
 FLMXV1

FILTER = BLPF 300/ 949/ -40
 MIN. MAX VALUES = -22.13e 175.75 , 0.01 e -14.88

10.00

0.00

-10.00

-20.00

-30.00

-40.00

-50.00

-60.00

-70.00

-80.00

-90.00

-100.00

-110.00

-120.00

-130.00

-140.00

-150.00

-160.00

-170.00

-180.00

-190.00

-200.00

-210.00

-220.00

-230.00

-240.00

-250.00

-260.00

-270.00

-280.00

-290.00

-300.00

-310.00

-320.00

-330.00

-340.00

-350.00

-360.00

-370.00

-380.00

-390.00

-400.00

-410.00

-420.00

-430.00

-440.00

-450.00

-460.00

-470.00

-480.00

-490.00

-500.00

-510.00

-520.00

-530.00

-540.00

-550.00

-560.00

-570.00

-580.00

-590.00

-600.00

-610.00

-620.00

-630.00

-640.00

-650.00

-660.00

-670.00

-680.00

-690.00

-700.00

-710.00

-720.00

-730.00

-740.00

-750.00

-760.00

-770.00

-780.00

-790.00

-800.00

-810.00

-820.00

-830.00

-840.00

-850.00

-860.00

-870.00

-880.00

-890.00

-900.00

-910.00

-920.00

-930.00

-940.00

-950.00

-960.00

-970.00

-980.00

-990.00

-1000.00

-1010.00

-1020.00

-1030.00

-1040.00

-1050.00

-1060.00

-1070.00

-1080.00

-1090.00

-1100.00

-1110.00

-1120.00

-1130.00

-1140.00

-1150.00

-1160.00

-1170.00

-1180.00

-1190.00

-1200.00

-1210.00

-1220.00

-1230.00

-1240.00

-1250.00

-1260.00

-1270.00

-1280.00

-1290.00

-1300.00

-1310.00

-1320.00

-1330.00

-1340.00

-1350.00

-1360.00

-1370.00

-1380.00

-1390.00

-1400.00

-1410.00

-1420.00

-1430.00

-1440.00

-1450.00

-1460.00

-1470.00

-1480.00

-1490.00

-1500.00

-1510.00

-1520.00

-1530.00

-1540.00

-1550.00

-1560.00

-1570.00

-1580.00

-1590.00

-1600.00

-1610.00

-1620.00

-1630.00

-1640.00

-1650.00

-1660.00

-1670.00

-1680.00

-1690.00

-1700.00

-1710.00

-1720.00

-1730.00

-1740.00

-1750.00

-1760.00

-1770.00

-1780.00

-1790.00

-1800.00

-1810.00

-1820.00

-1830.00

-1840.00

-1850.00

-1860.00

-1870.00

-1880.00

-1890.00

-1900.00

-1910.00

-1920.00

-1930.00

-1940.00

-1950.00

-1960.00

-1970.00

-1980.00

-1990.00

-2000.00

-2010.00

-2020.00

-2030.00

-2040.00

-2050.00

-2060.00

-2070.00

-2080.00

-2090.00

-2100.00

-2110.00

-2120.00

-2130.00

-2140.00

-2150.00

-2160.00

-2170.00

-2180.00

-2190.00

-2200.00

-2210.00

-2220.00

-2230.00

-2240.00

-2250.00

-2260.00

-2270.00

-2280.00

-2290.00

-2300.00

-2310.00

-2320.00

-2330.00

-2340.00

-2350.00

-2360.00

-2370.00

-2380.00

-2390.00

-2400.00

-2410.00

-2420.00

-2430.00

-2440.00

-2450.00

-2460.00

-2470.00

-2480.00

-2490.00

-2500.00

-2510.00

-2520.00

-2530.00

-2540.00

-2550.00

-2560.00

-2570.00

-2580.00

-2590.00

-2600.00

-2610.00

-2620.00

-2630.00

-2640.00

-2650.00

-2660.00

-2670.00

-2680.00

-2690.00

-2700.00

-2710.00

-2720.00

-2730.00

-2740.00

-2750.00

-2760.00

-2770.00

-2780.00


FAR , TEST 01
 CRASH SIMULATION
 87278
 FLXG2

FILTER = 8LPF 100/ 316/ -40
 MIN, MAX VALUES = -7.66e 95.75 , 1.27 e 191.75

100.00
 75.00
 50.00
 25.00
 0.00
 -25.00
 -50.00
 -75.00
 -100.00

ACCELERATION (G)

B-5

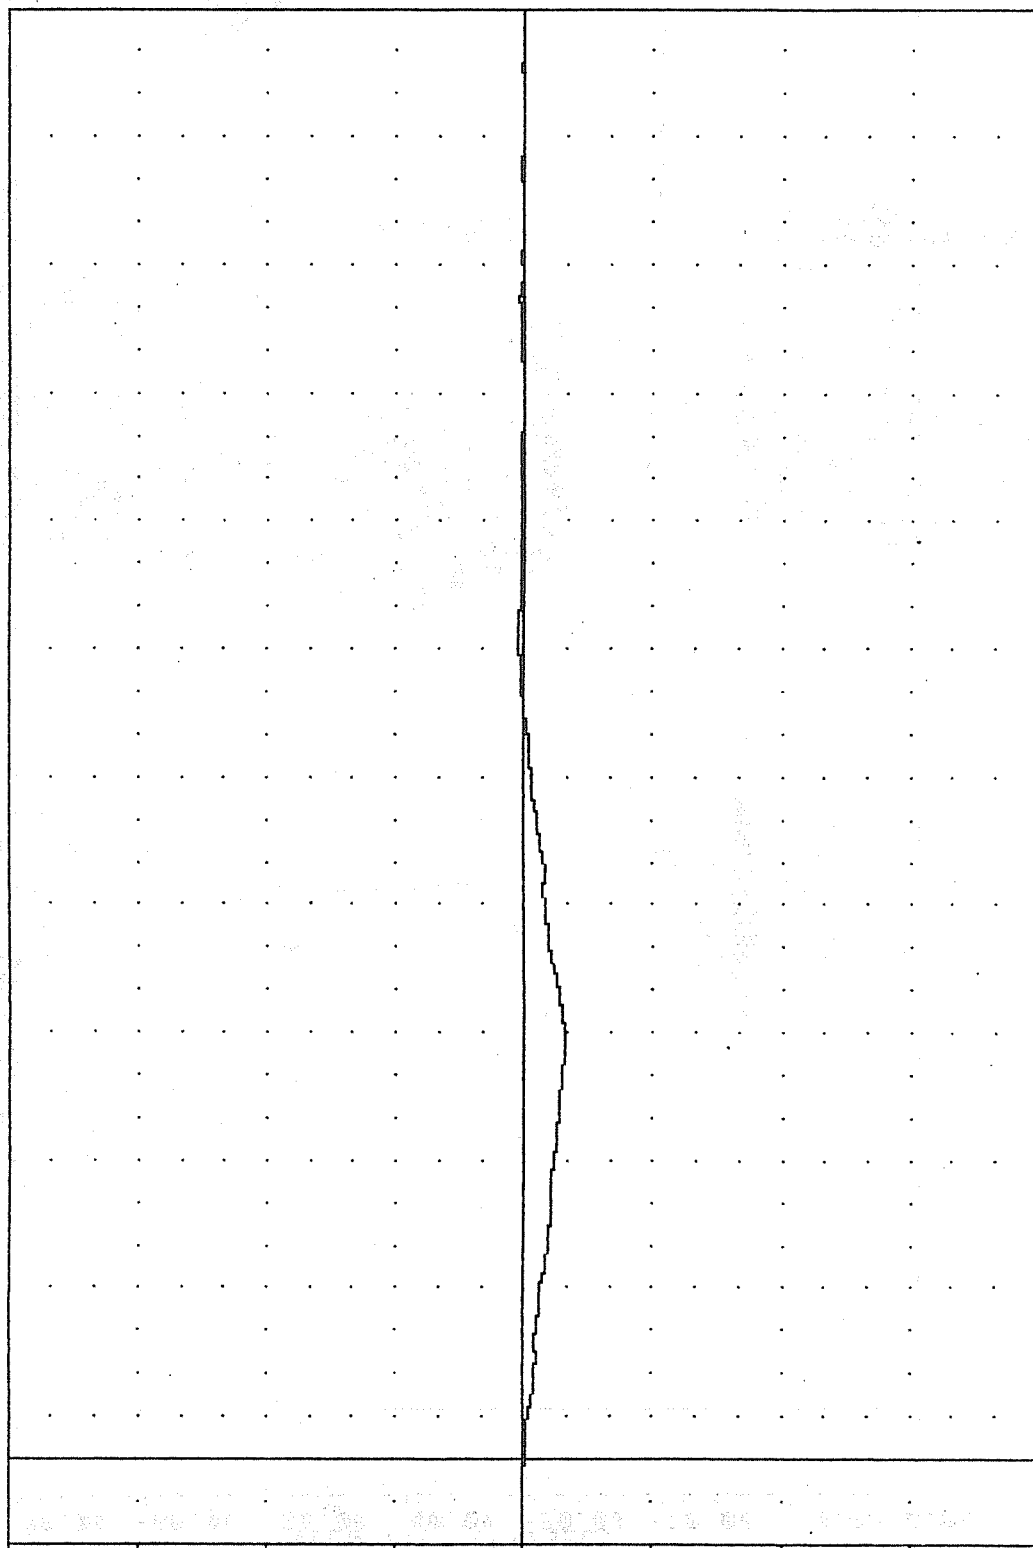


20.00 40.00 60.00 80.00 100.00 120.00 140.00 160.00 180.00 200.00 220.00 240.00 260.00 280.00 300.00 320.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK LONGITUDINAL ACCELERATION - AFT

FAR , TEST 01
 CRASH SIMULATION
 87278
 FLAXV2

FILTER = 6LFF 300/ 949/ -40
 MIN. MAX VALUES = -22.258 171.00 0.00 8 -20.00

10.00
 0.00
 -10.00
 -20.00
 -30.00
 -40.00
 -50.00
 -60.00
 -70.00
 -80.00
 -90.00
 -100.00
 -110.00
 -120.00
 -130.00
 -140.00
 -150.00
 -160.00
 -170.00
 -180.00
 -190.00
 -200.00
 -210.00
 -220.00
 -230.00
 -240.00
 -250.00
 -260.00
 -270.00
 -280.00
 -290.00
 -300.00
 -310.00
 -320.00
 -330.00
 -340.00
 -350.00
 -360.00
 -370.00
 -380.00
 -390.00
 -400.00
 -410.00
 -420.00
 -430.00
 -440.00
 -450.00
 -460.00
 -470.00
 -480.00
 -490.00
 -500.00
 -510.00
 -520.00
 -530.00
 -540.00
 -550.00
 -560.00
 -570.00
 -580.00
 -590.00
 -600.00
 -610.00
 -620.00
 -630.00
 -640.00
 -650.00
 -660.00
 -670.00
 -680.00
 -690.00
 -700.00
 -710.00
 -720.00
 -730.00
 -740.00
 -750.00
 -760.00
 -770.00
 -780.00
 -790.00
 -800.00
 -810.00
 -820.00
 -830.00
 -840.00
 -850.00
 -860.00
 -870.00
 -880.00
 -890.00
 -900.00
 -910.00
 -920.00
 -930.00
 -940.00
 -950.00
 -960.00
 -970.00
 -980.00
 -990.00
 -1000.00

B-6

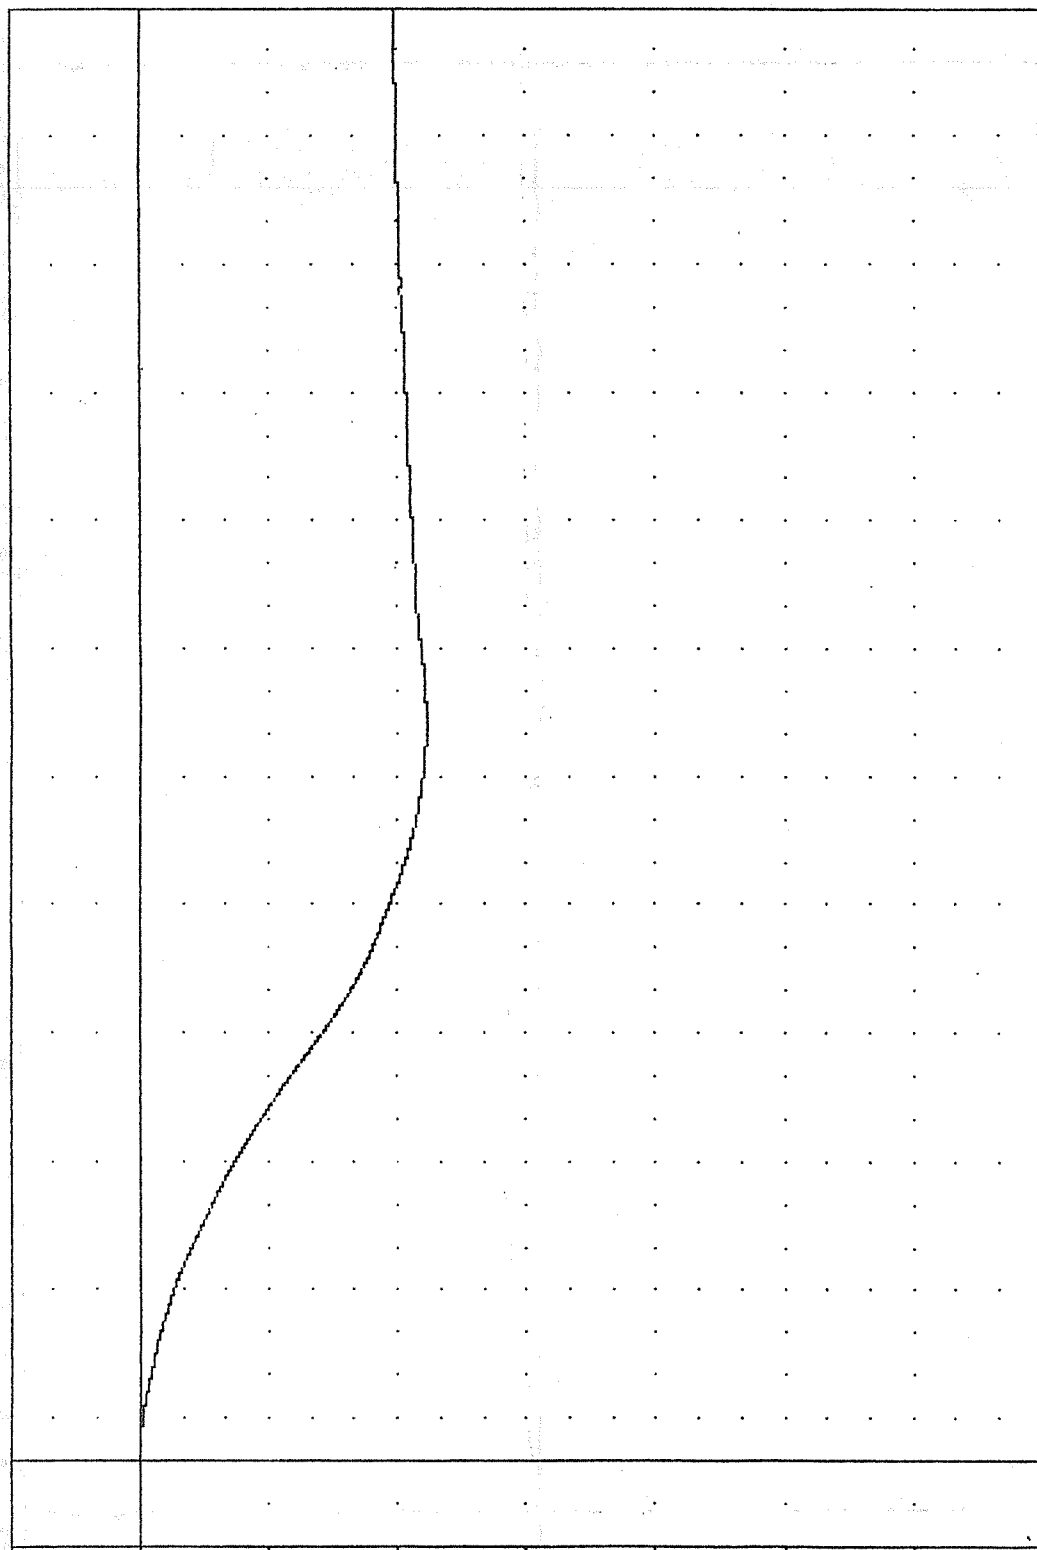

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK LONGITUDINAL VELOCITY - AFT

FAR TEST 01
 CRASH SIMULATION

87278

FLY62

FILTER = BLPF 100/ 316/ -40


MIN. MAX VALUES = -0.28e 148.13

0.25 e 253.25

100.00
75.00
50.00
25.00
0.00
-25.00
-50.00
-75.00
-100.00

ACCELERATION (G)

B-7

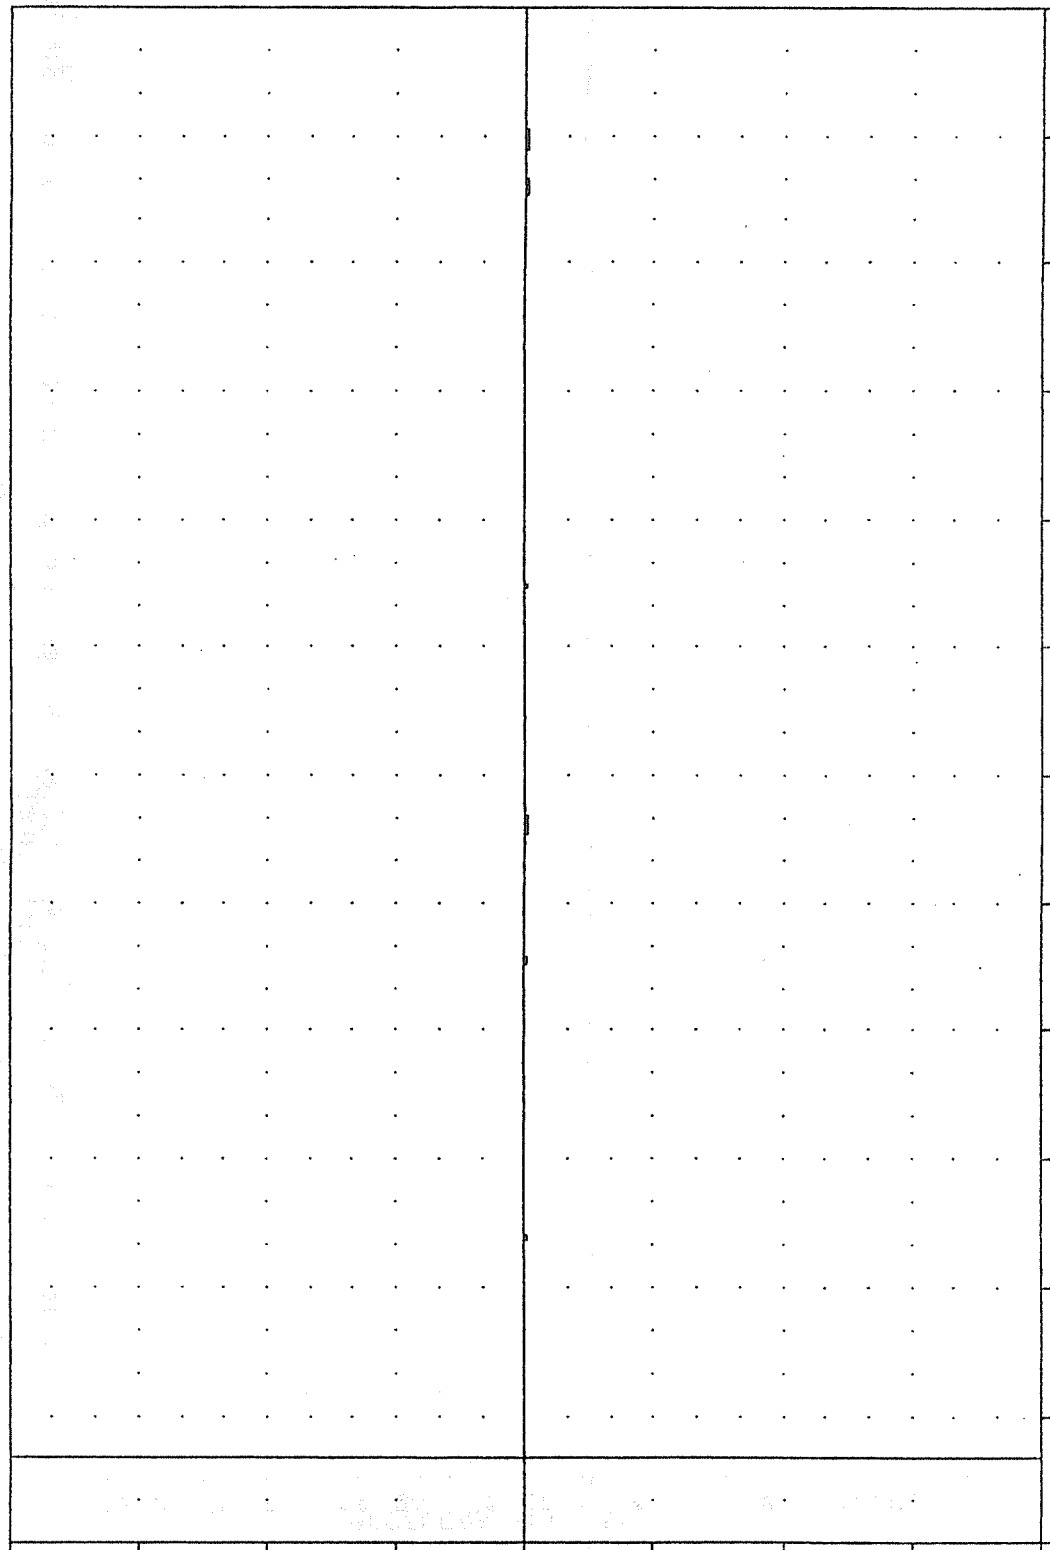

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - AFT

FAR , TEST 01
 CRASH SIMULATION
 87278
 FLAZ62

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -1.548 46.00 , 1.21 8 275.88

100.00

75.00

50.00

25.00

0.00

8-B

ACCELERATION [G]


-100.00

-75.00

-50.00

-25.00


0.00

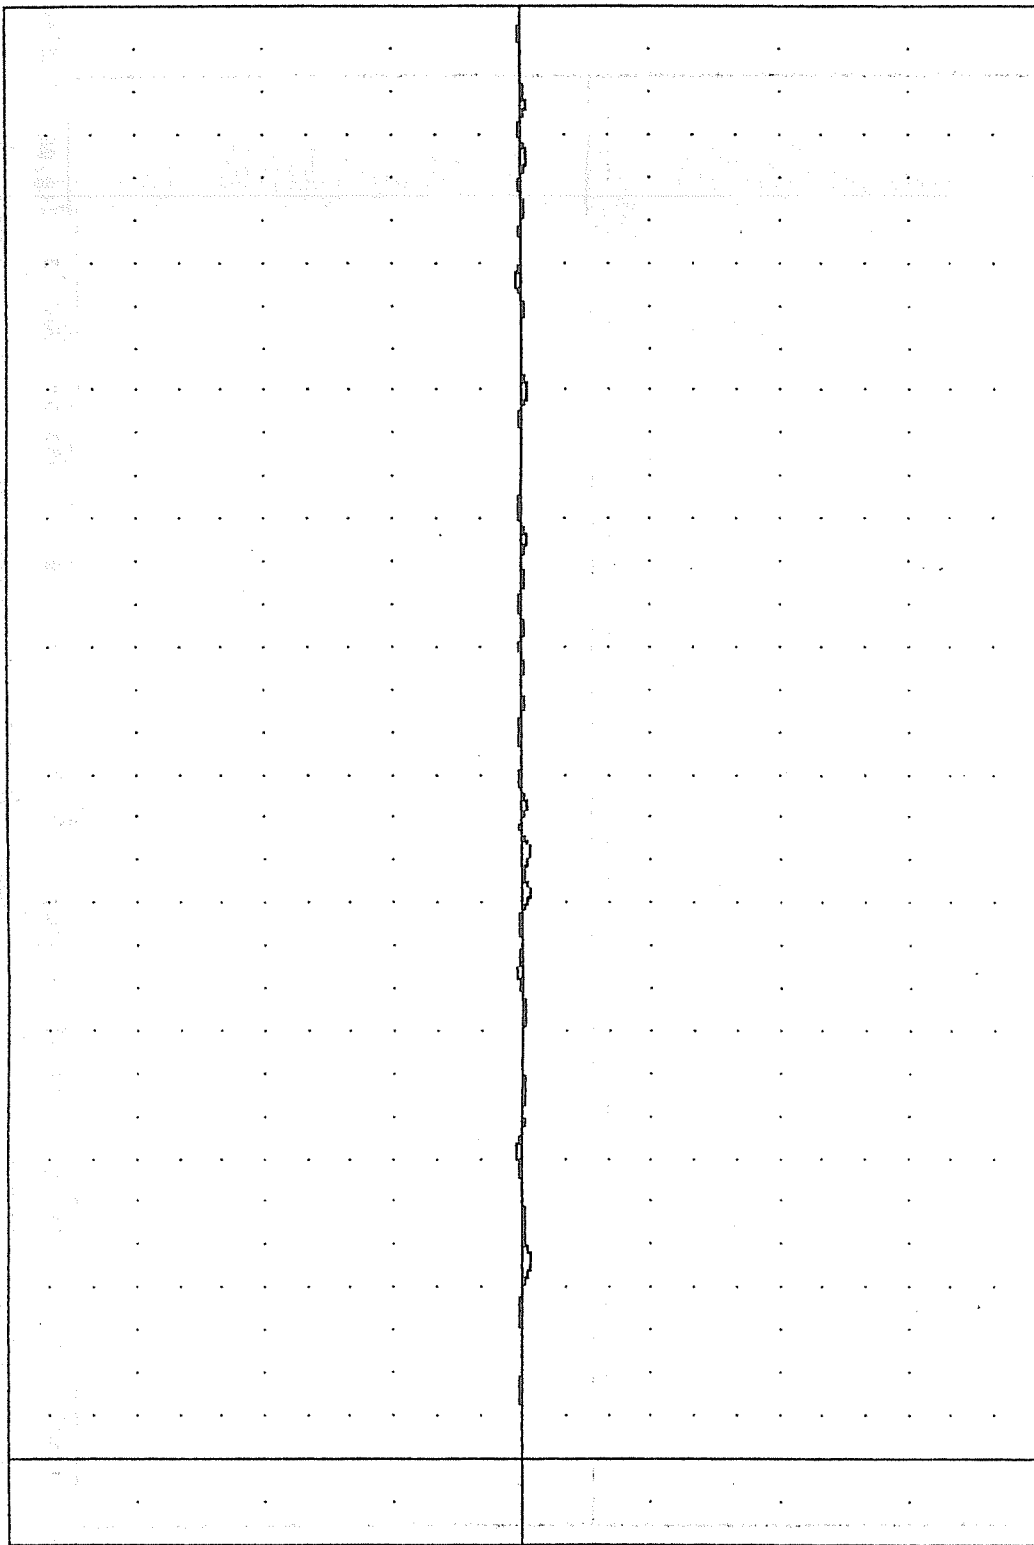

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK VERTICAL ACCELERATION - AFT

FAR TEST 01
 CRASH SIMULATION
 87278
 FLARE2

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.018 -19.25, 7.66 0 95.75

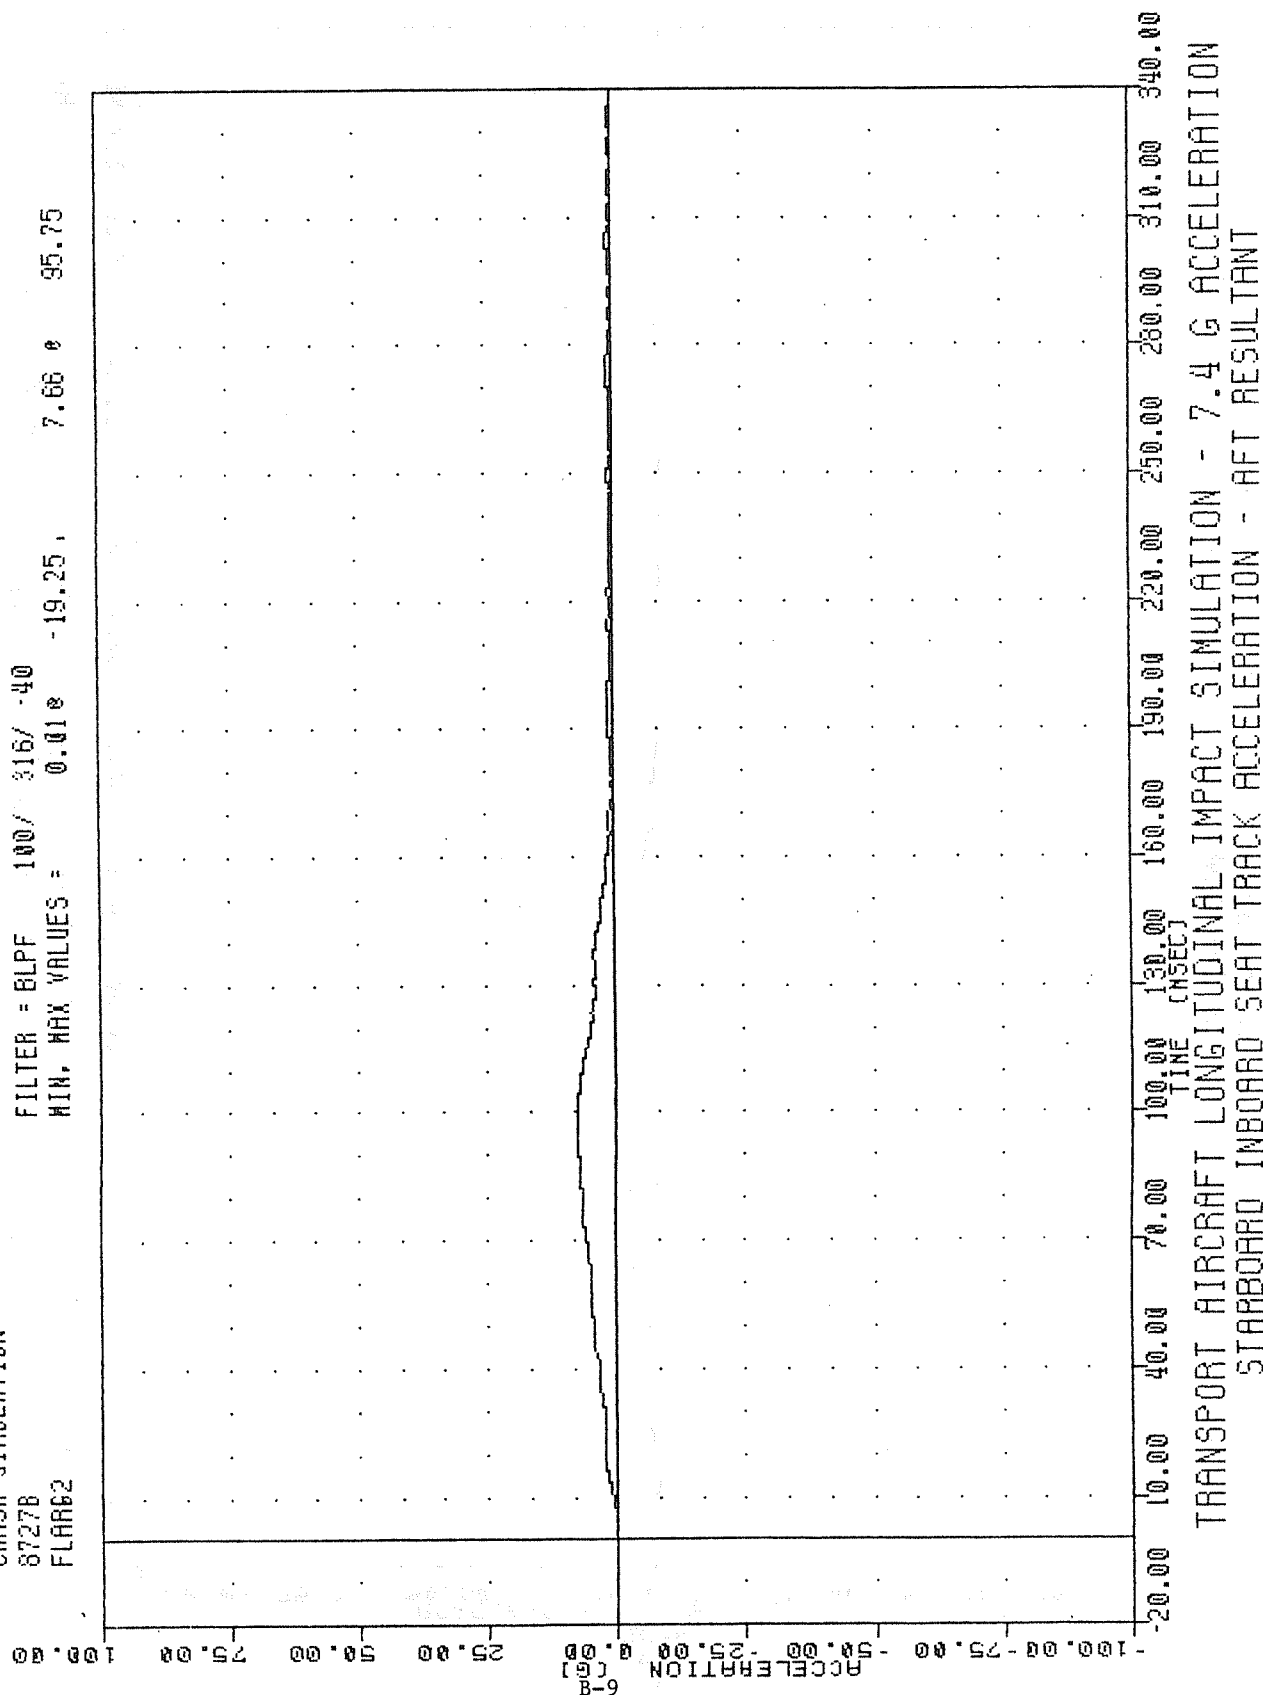

FAR , TEST 01

CARSH SIMULATION


8727B

FLMX63

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -7.788 94.88 1.15 e 195.63

ACCELERATION (G)

B-10

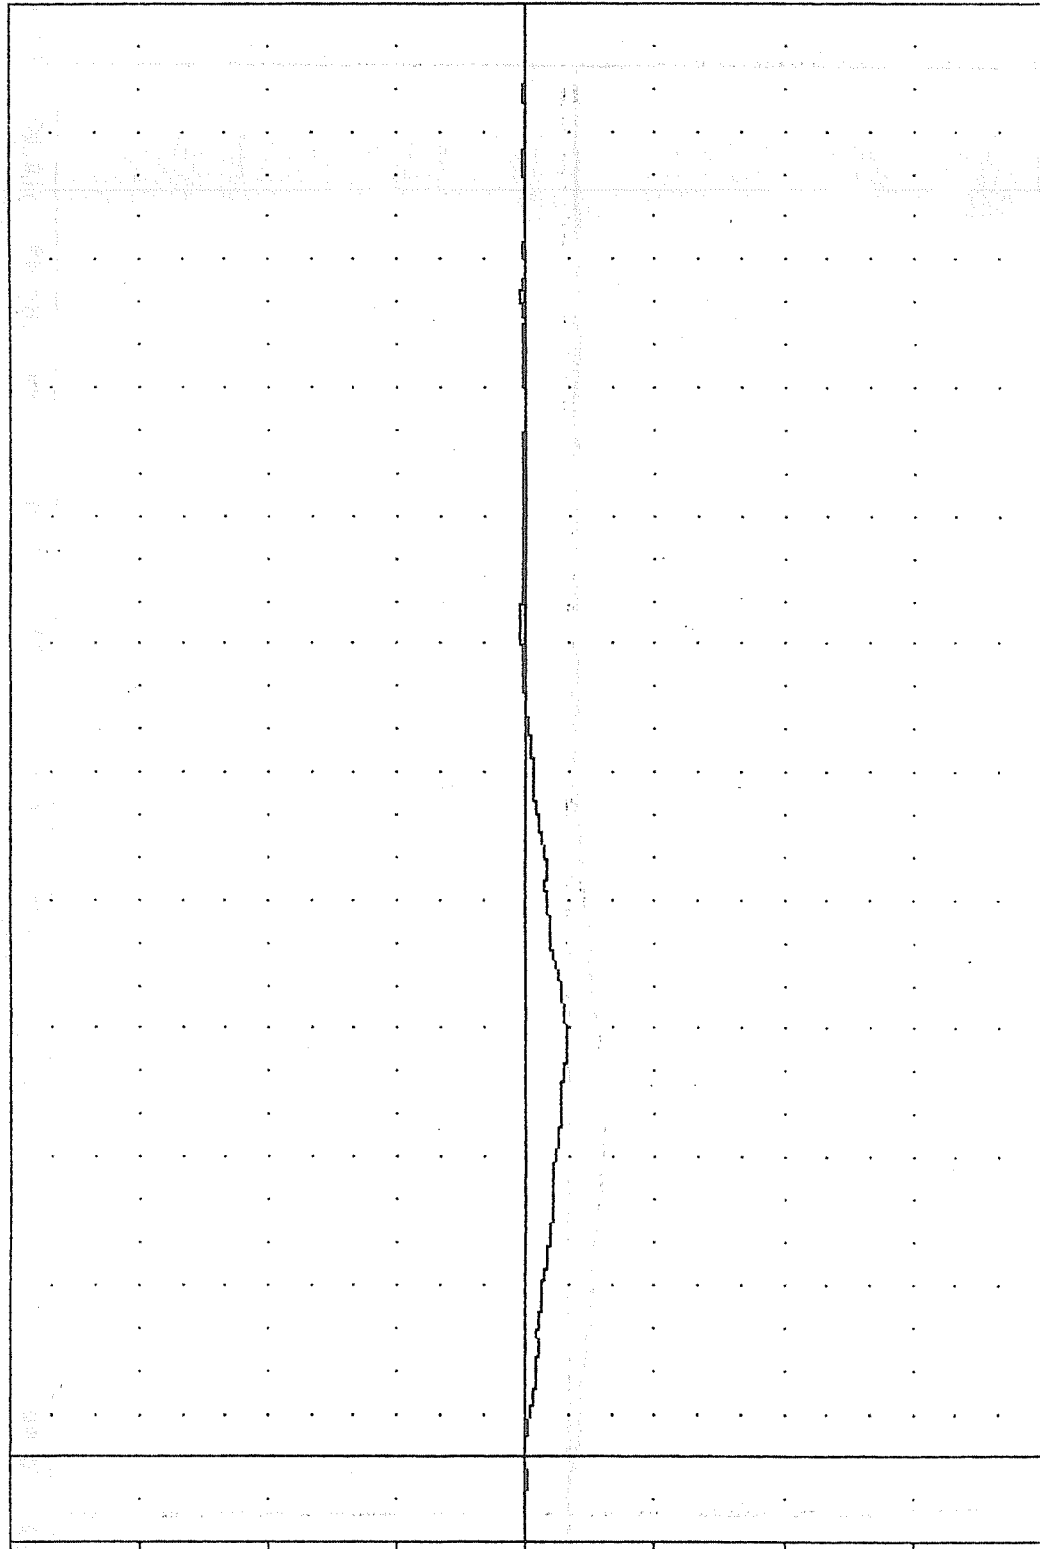

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LONGITUDINAL ACCELERATION - MID

FRA , TEST 01

CRASH SIMULATION

87278

FLMXV3

FILTER = BLPF 300/ 949/ -40

MIN, MAX VALUES =

-22.21%

170.88,

0.01 %

-15.38

10.00

0.00

-10.00

-20.00

-30.00

-40.00


-50.00

-60.00

-70.00

VELOCITY (FT/SEC)

B-11

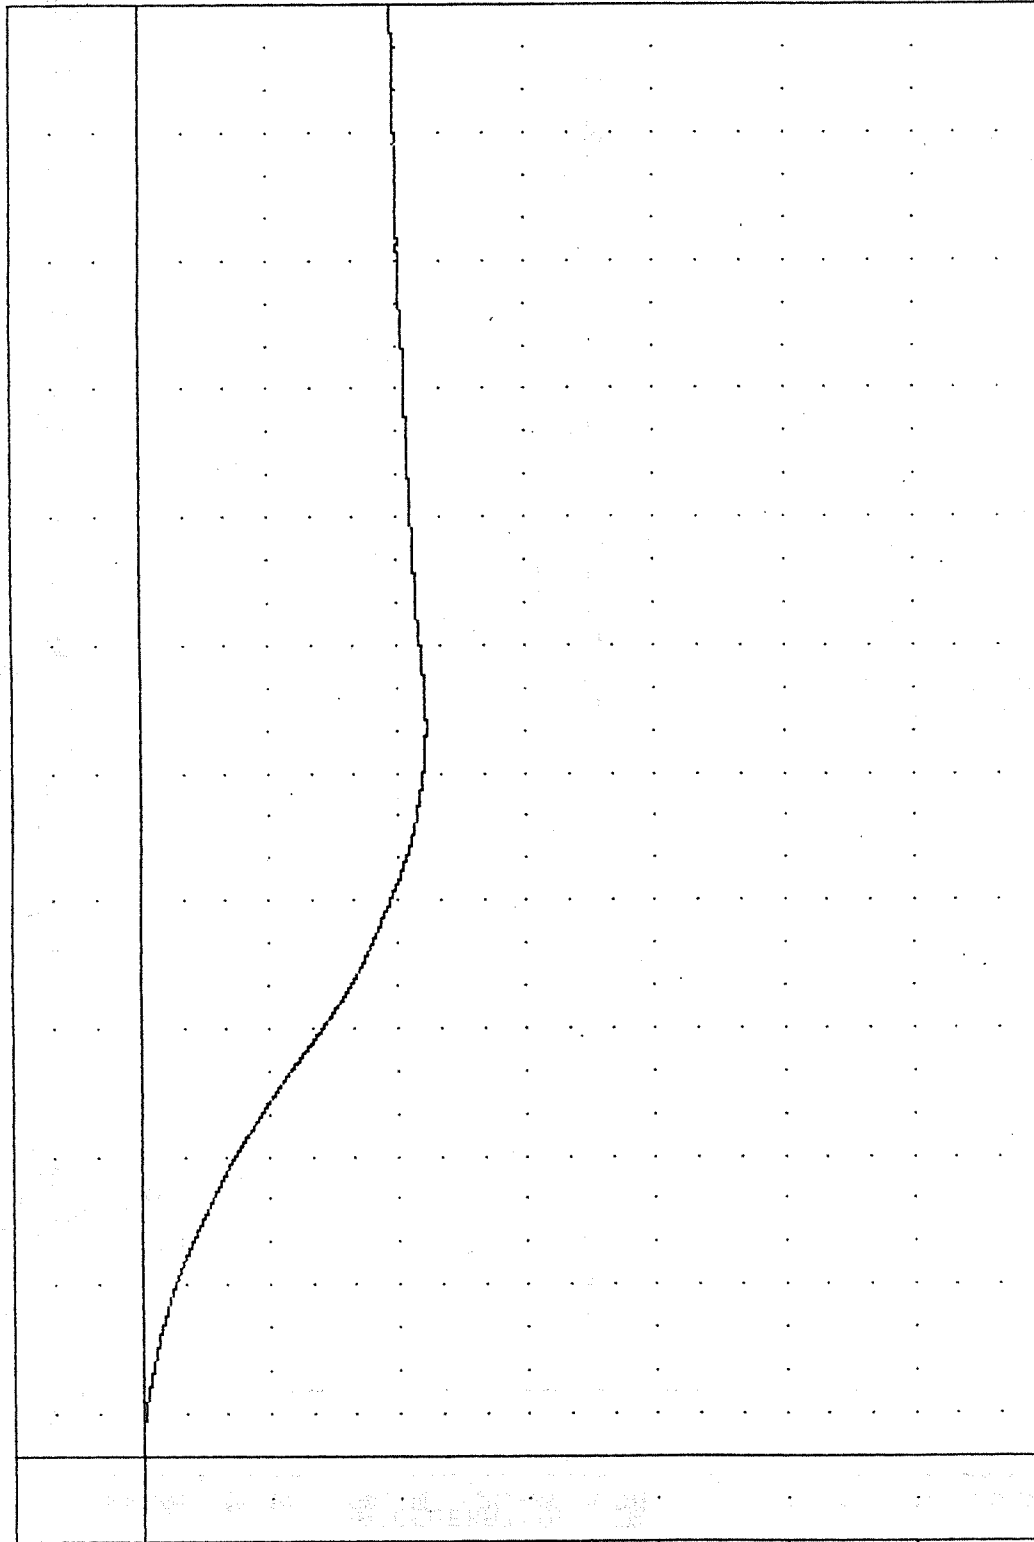

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

STARBOARD INBOARD SEAT TRACK LONGITUDINAL VELOCITY - MID

FAR TEST 01

CRASH SIMULATION

87278

FLY63

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.358 261.00 0.29 152.75

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

ACCELERATION (G)

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - MID

FAR , TEST 01

CRASH SIMULATION

87278

FLN263


FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -3.10 140.38 ,

4.57 171.63

ACCELERATION (G)

B-13

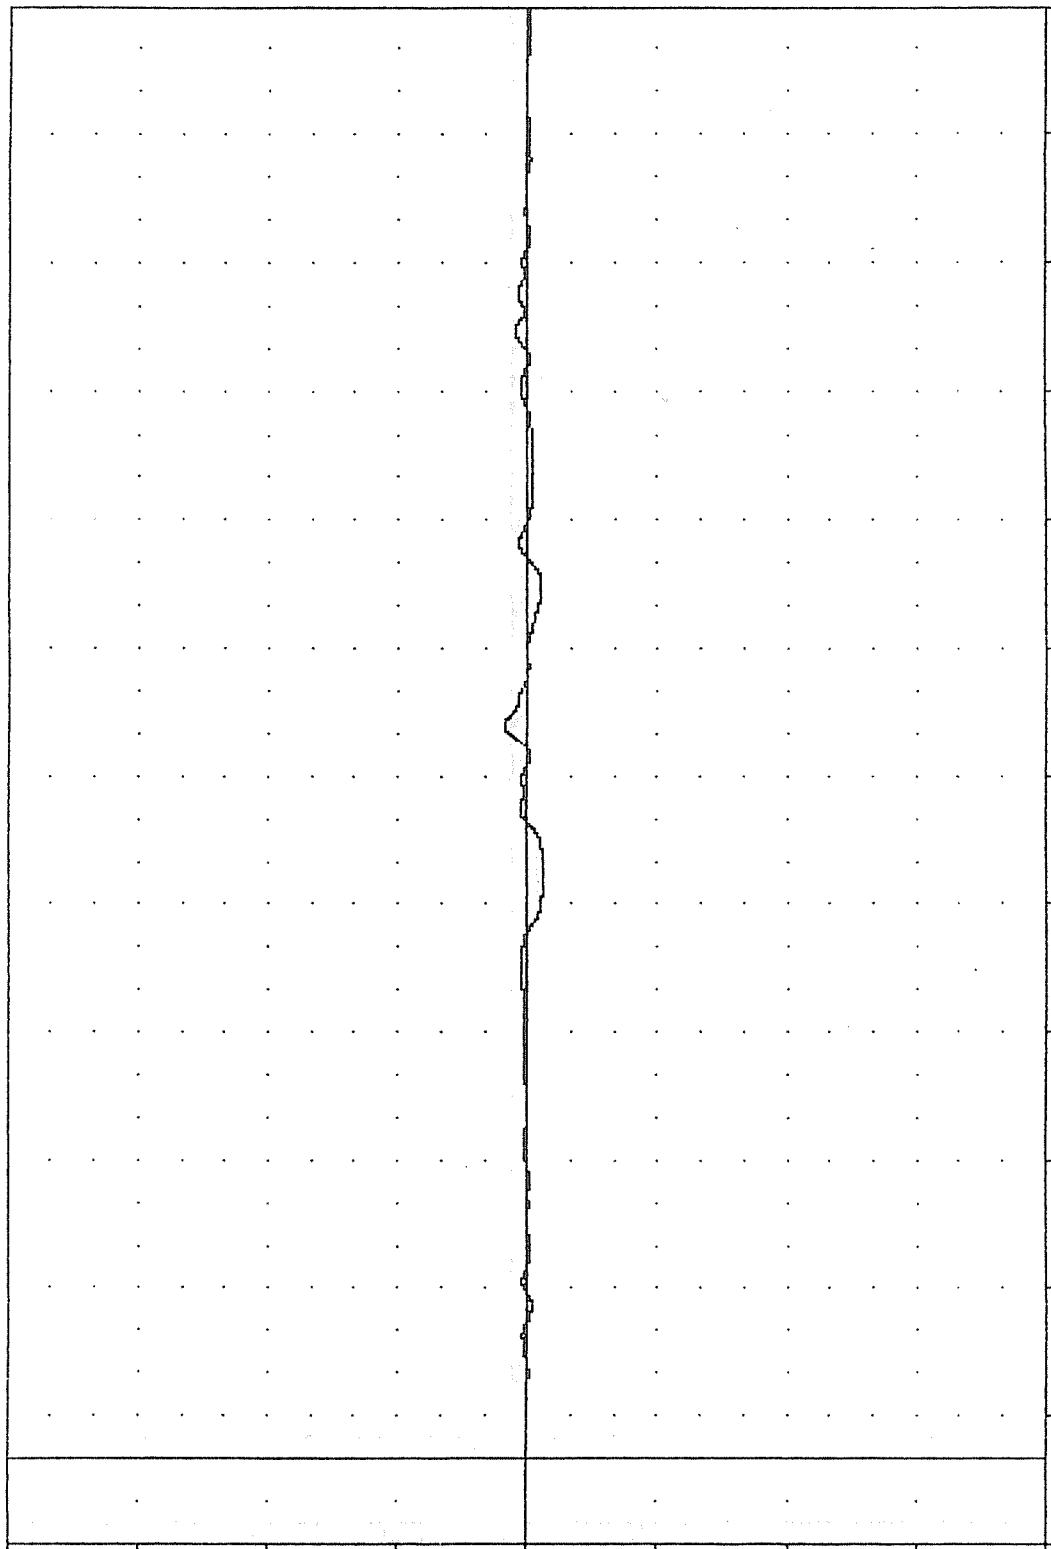

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TIME (MSEC)


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

STARBOARD INBOARD SEAT TRACK VERTICAL ACCELERATION - MID

FAR , TEST 01
 CRASH SIMULATION
 87278
 FLNRG3

FILTER = BLPF 100/ 316/ -10
 MIN, MAX VALUES = 0.04e -11.63, 7.81 e 94.75

ACCELERATION (G)
 100.00
 75.00
 50.00
 25.00
 0.00
 -25.00
 -50.00
 -75.00
 -100.00

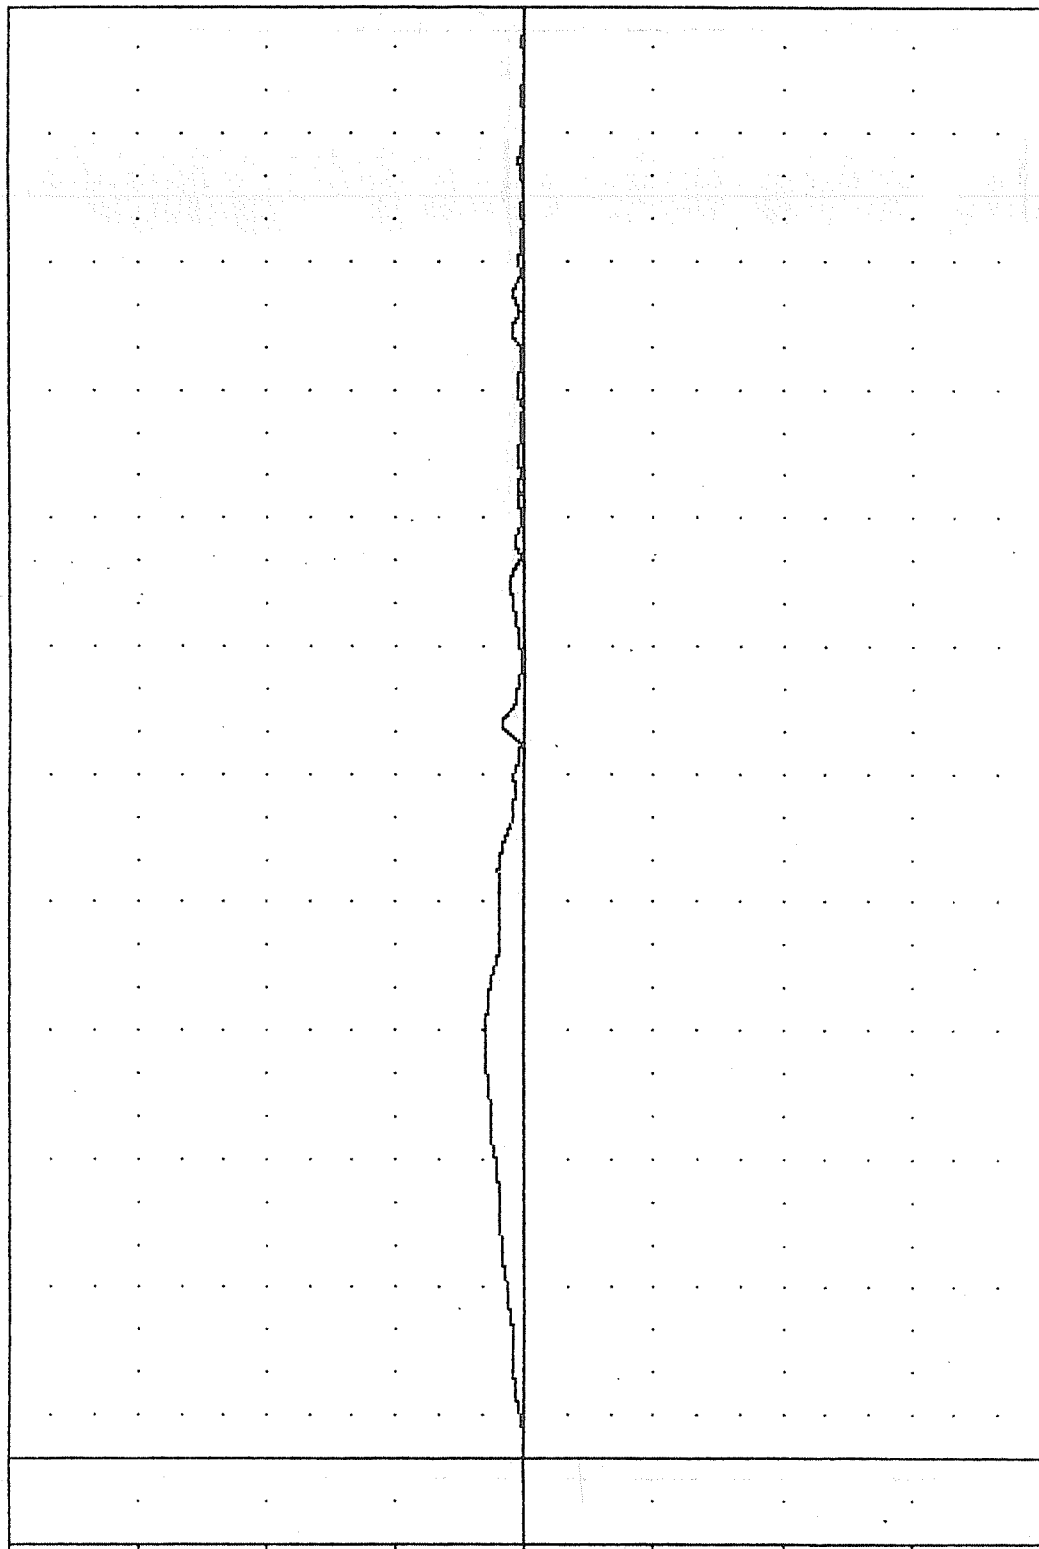

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK ACCELERATION - MID RESULTANT

FHA , TEST 01

CRASH SIMULATION

87278


FLFY64

FILTER = BLPF 100/ 315/ -40

MIN. MAX VALUES = -0.280 67.00 ,

0.43 @ 180.25

ACCELERATION (G)

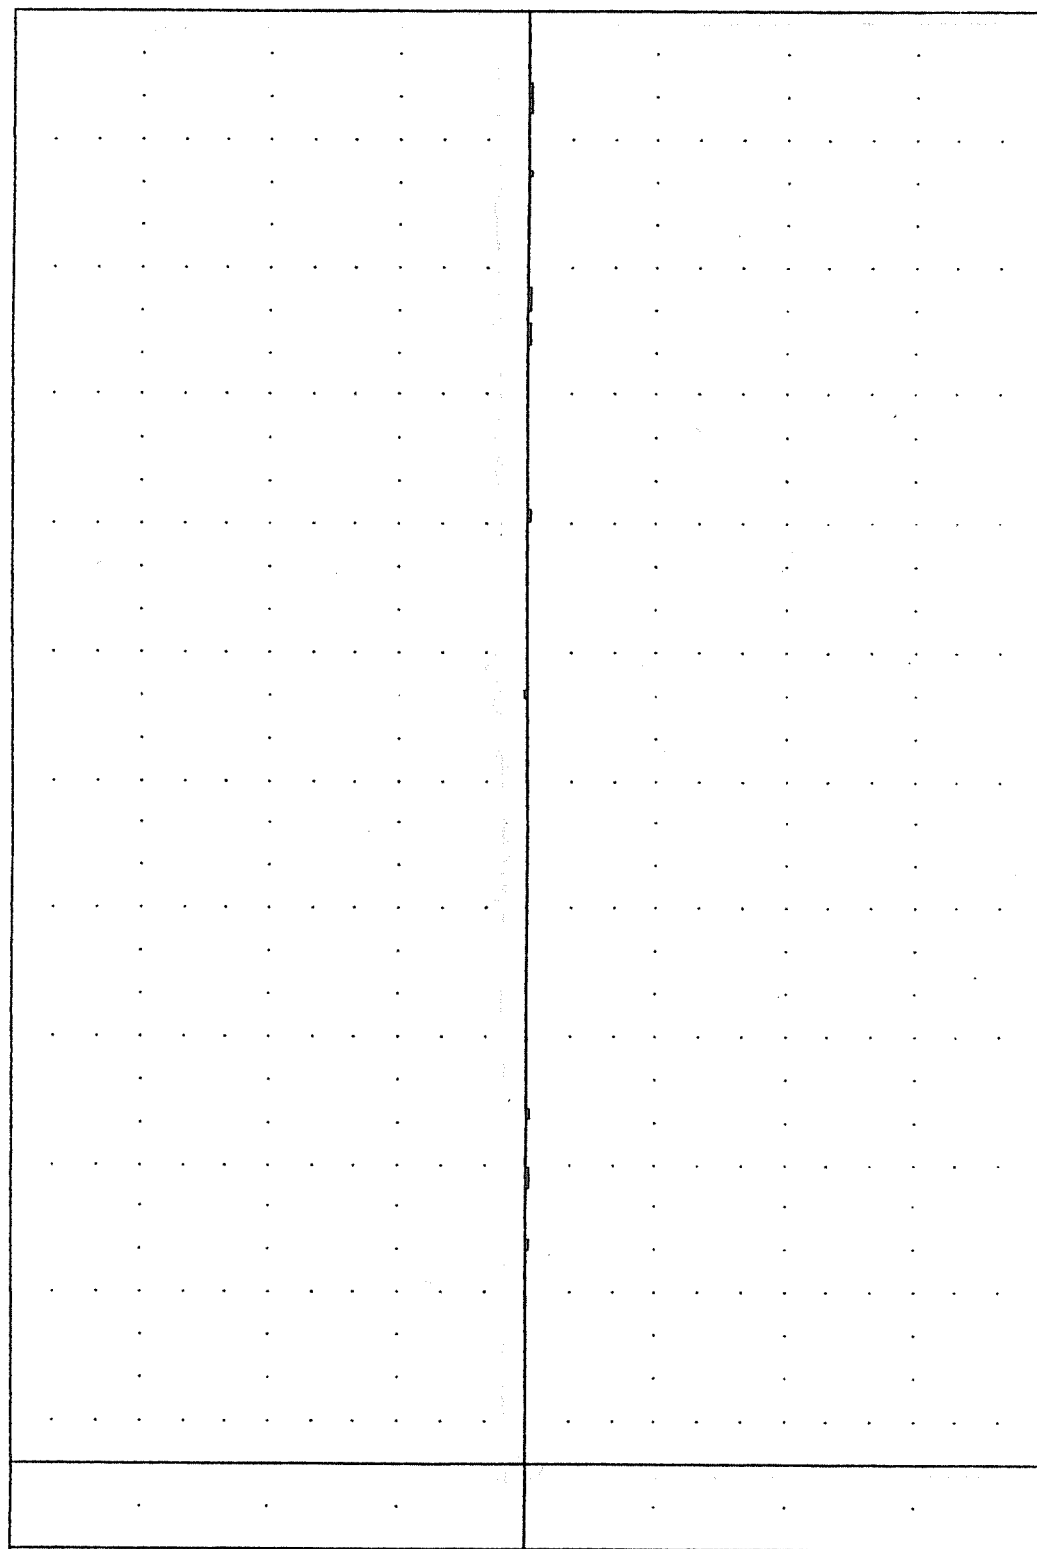

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - FORWARD

FAR TEST 01
 CRASH SIMULATION

87278
 FLFZG4

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -2.83e 189.38 , 2.29 e 262.75

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-20.00

10.00

40.00

70.00

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK VERTICAL ACCELERATION - FORWARD

FRA , TEST 01

CRASH SIMULATION

87278

FLFRG4

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = 0.020 -18.75, 7.75 0 94.75

100.00

75.00

50.00

25.00

0.00

B-19


-25.00

-50.00

-75.00

-100.00

-

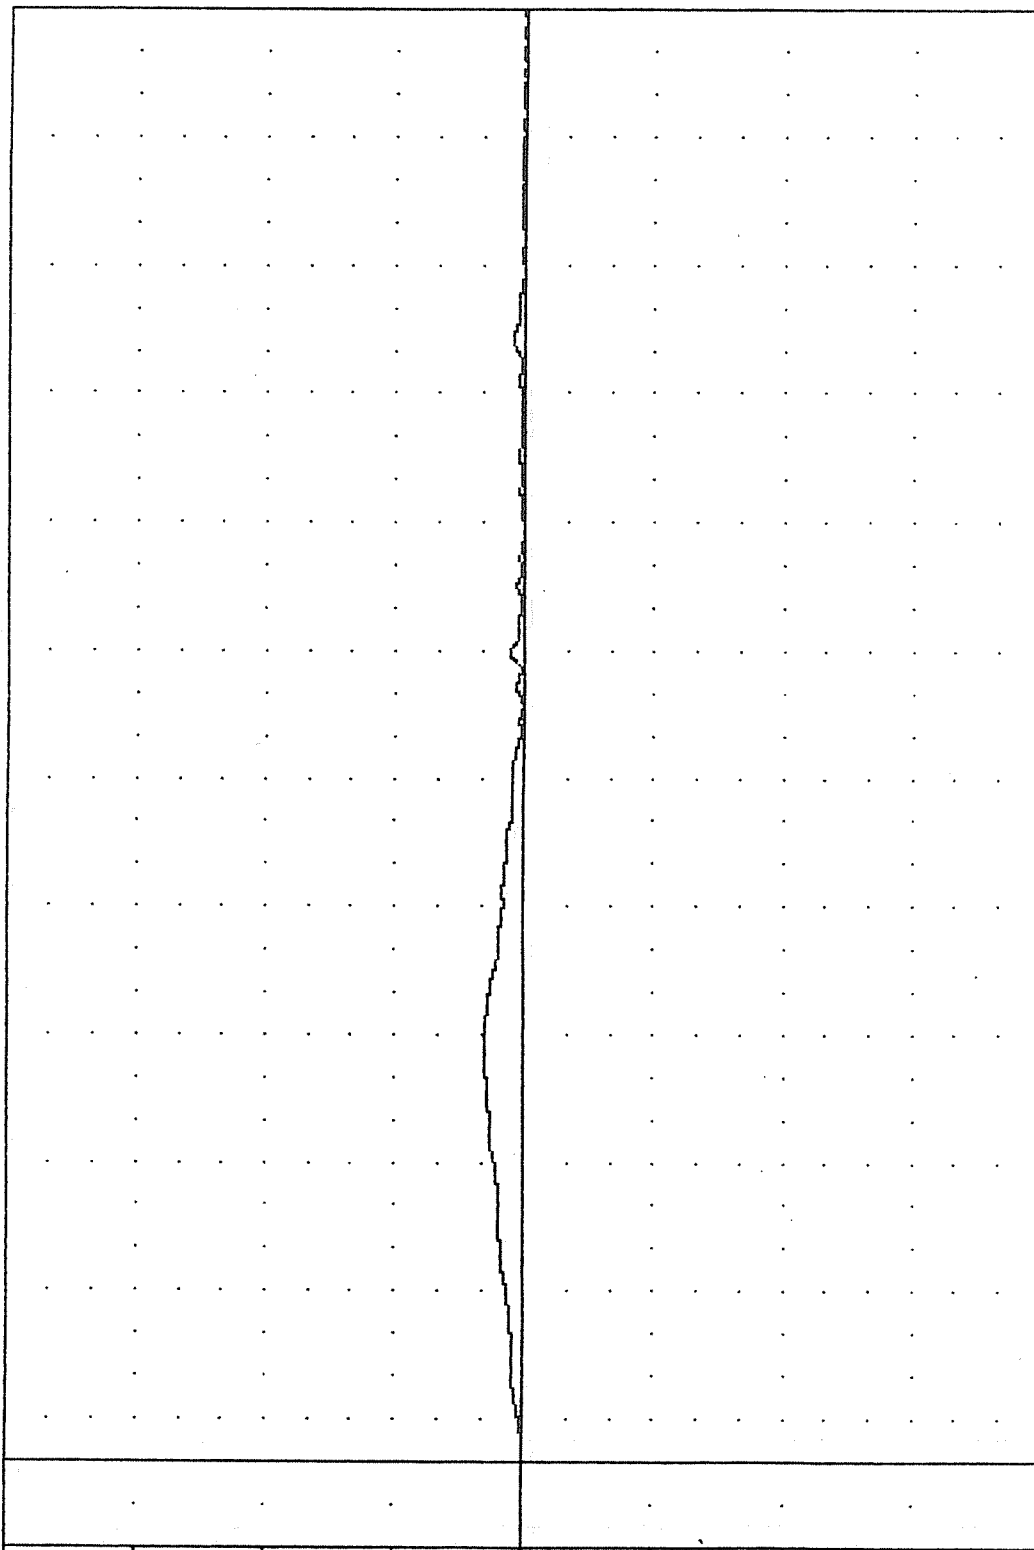


20.00 10.00 0.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
STARBOARD INBOARD SEAT TRACK ACCELERATION - FORWARD RESULTANT

FRA TEST 01
 CRASH SIMULATION
 87278
 FUSXG1

FILTER = 8LFF 100/ 316/ -40
 MIN, MAX VALUES = -7.928 96.00, 1.76 191.25

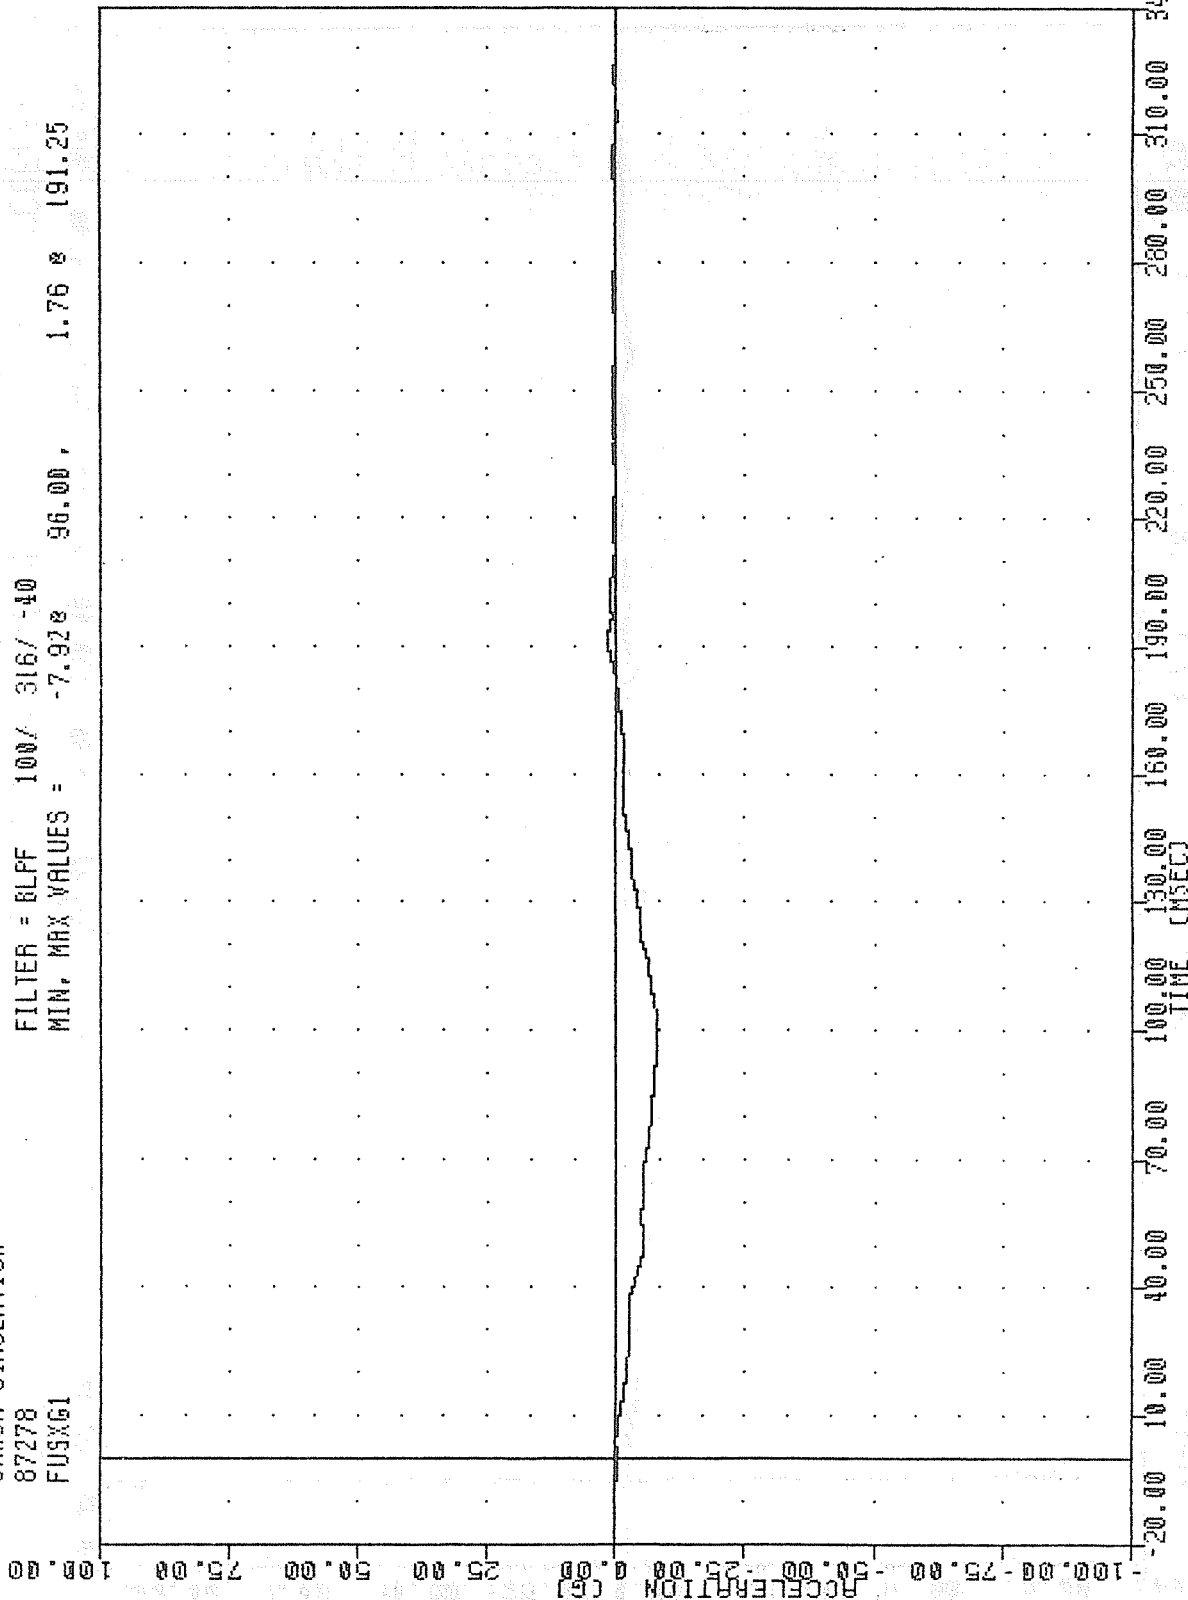


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 PORT FUSELAGE LONGITUDINAL ACCELERATION

FAR TEST 01
 CRASH SIMULATION
 87278
 FUSXV1

FILTER = BLPF 300/ 949/ 40
 MIN. MAX VALUES = -22.448 180.13, 0.00 * -11.75

10.00

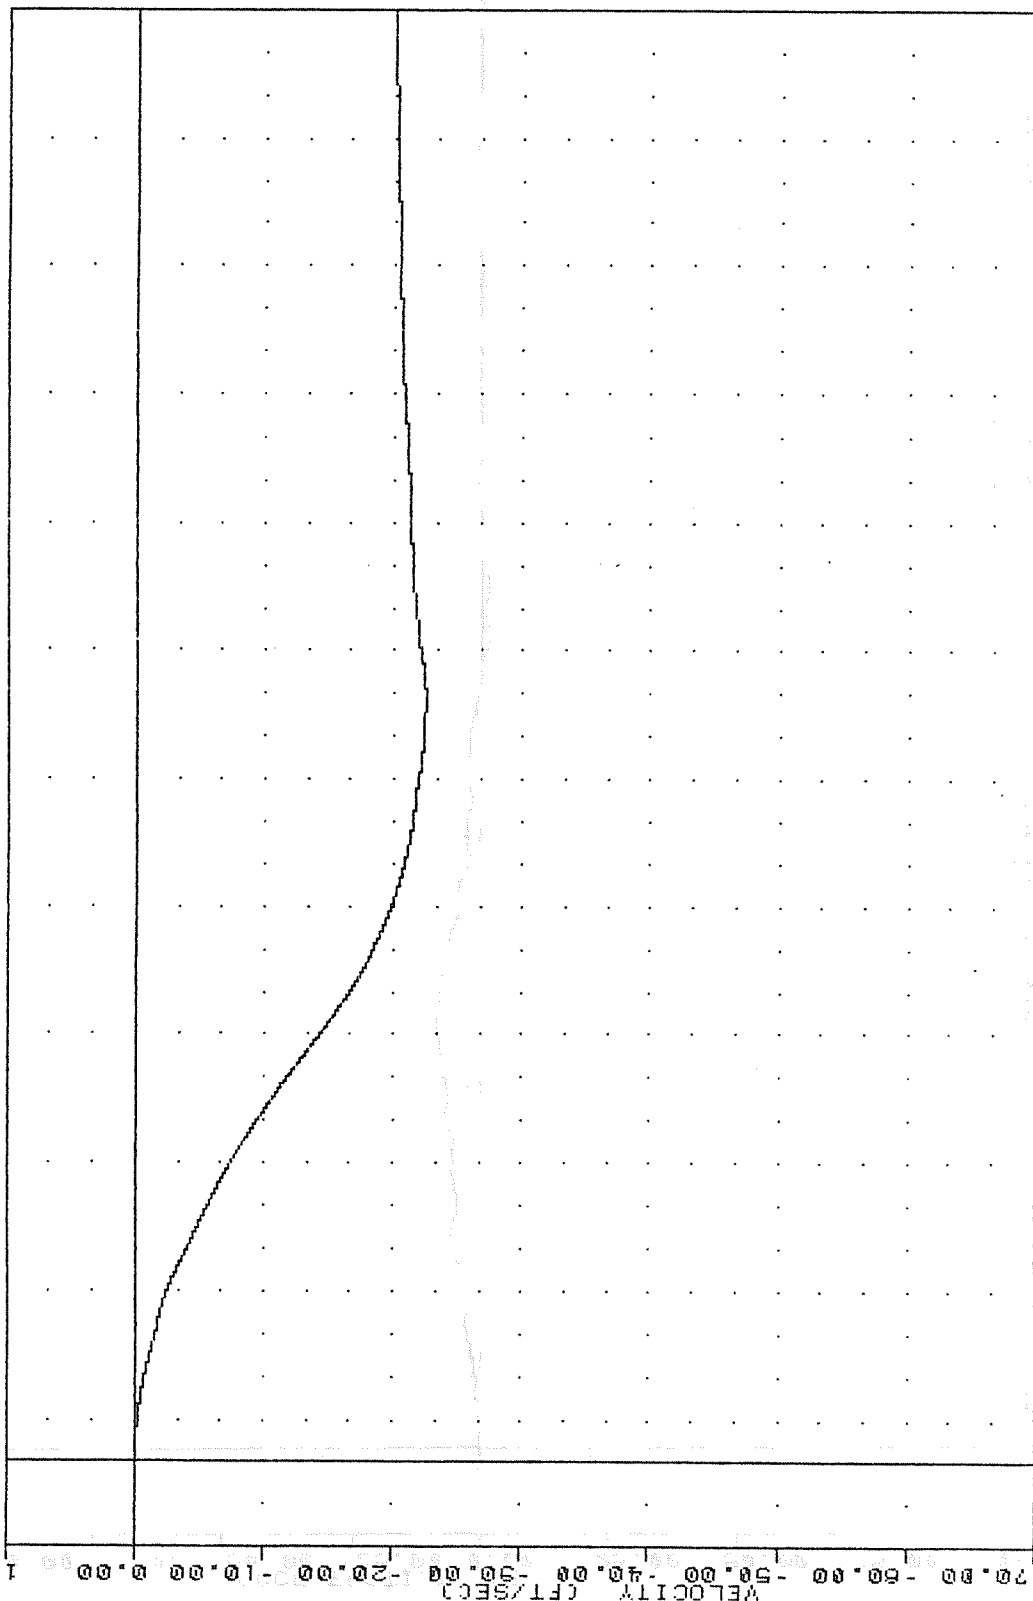

VELOCITY (FT/SEC)

B-21

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 PORT FUSELAGE LONGITUDINAL VELOCITY

FRA TEST 01

CRASH SIMULATION

87278

FUSX62

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -8.298 98.63, 2.11 e 189.63

100.00

75.00

50.00

25.00

0.00


-25.00

-50.00

-75.00

-100.00

ACCELERATION (G)

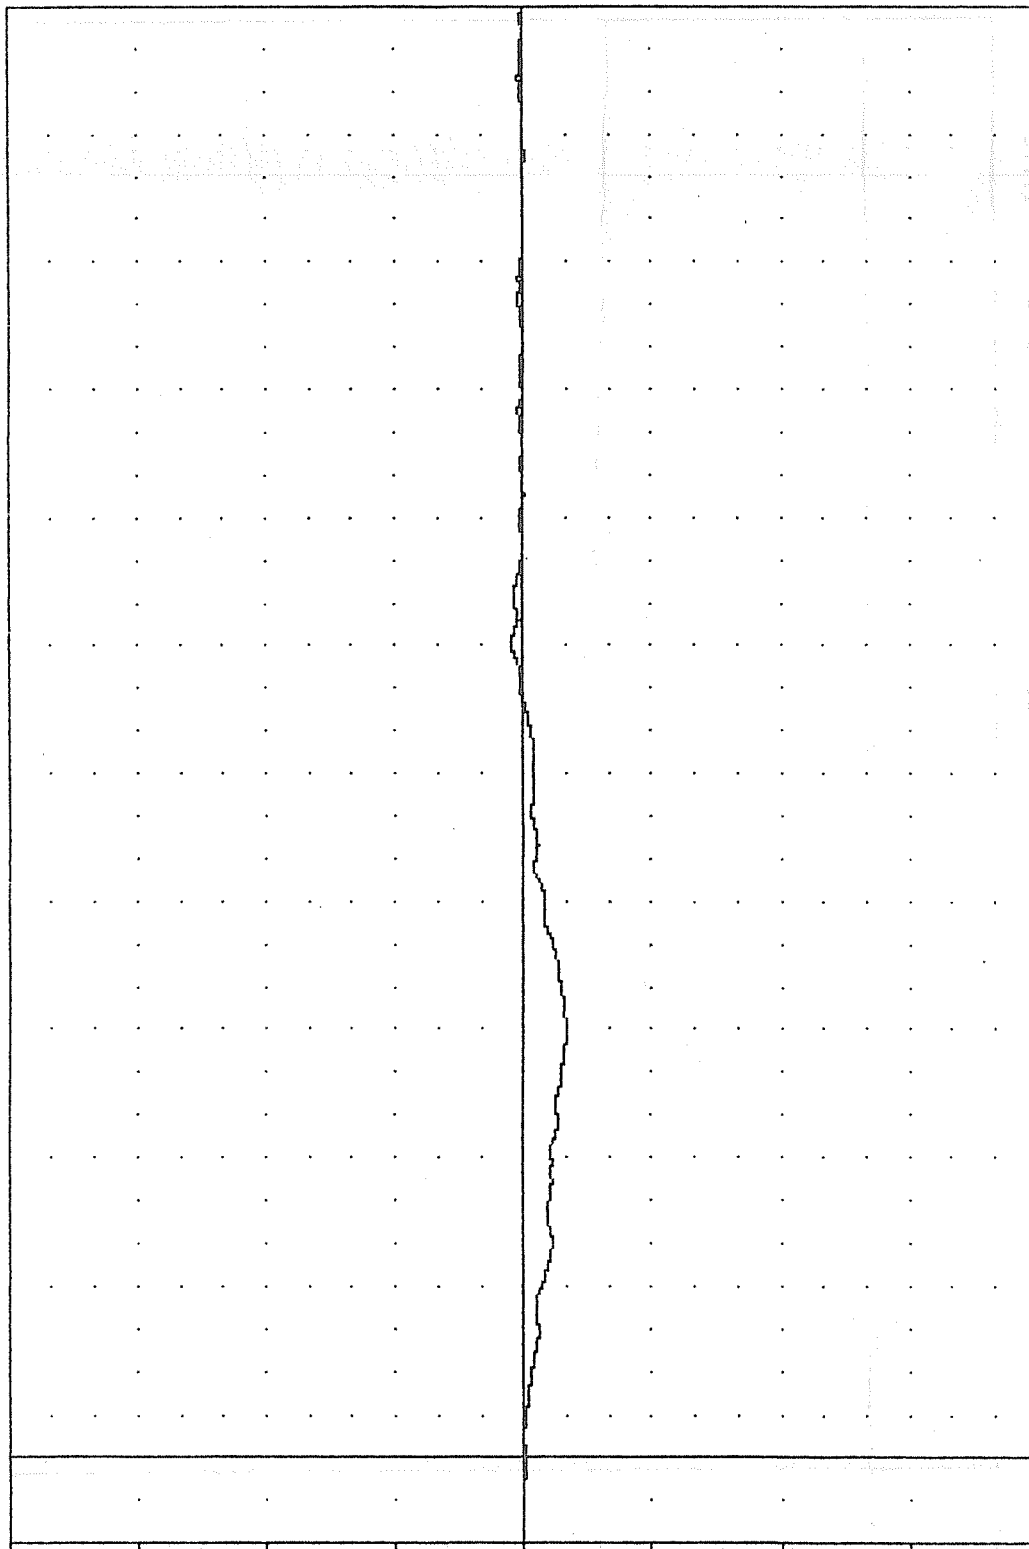


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

TOP FUSELAGE LONGITUDINAL ACCELERATION

FAR , TEST 01
CARSH SIMULATION
87278
FUSXV2

FILTER = BLPF 300/ 949/ -40
MIN. MAX VALUES = -22.70e 172.25 , -0.01 e -11.88

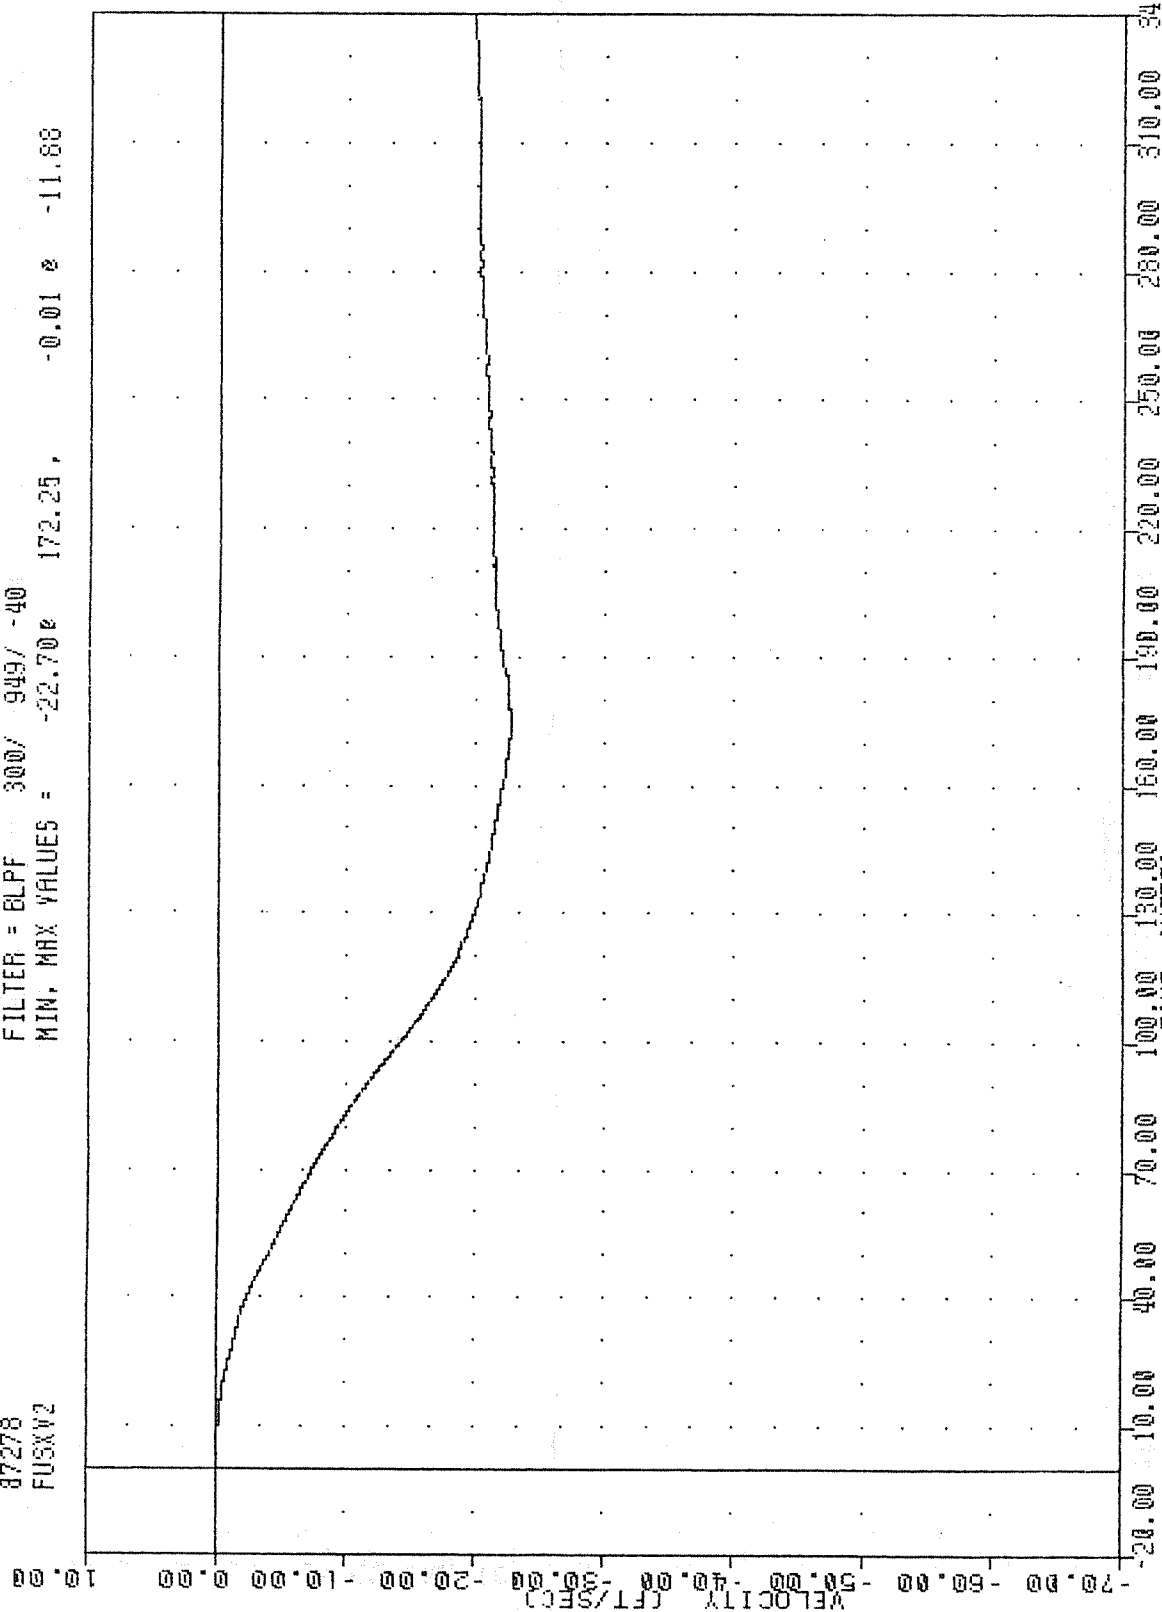


B-23

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
TOP FUSELAGE LONGITUDINAL VELOCITY


FAR TEST 01
 CRASH SIMULATION
 87278
 FUSXG3

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -7.91e 101.38, 1.45 e 191.13

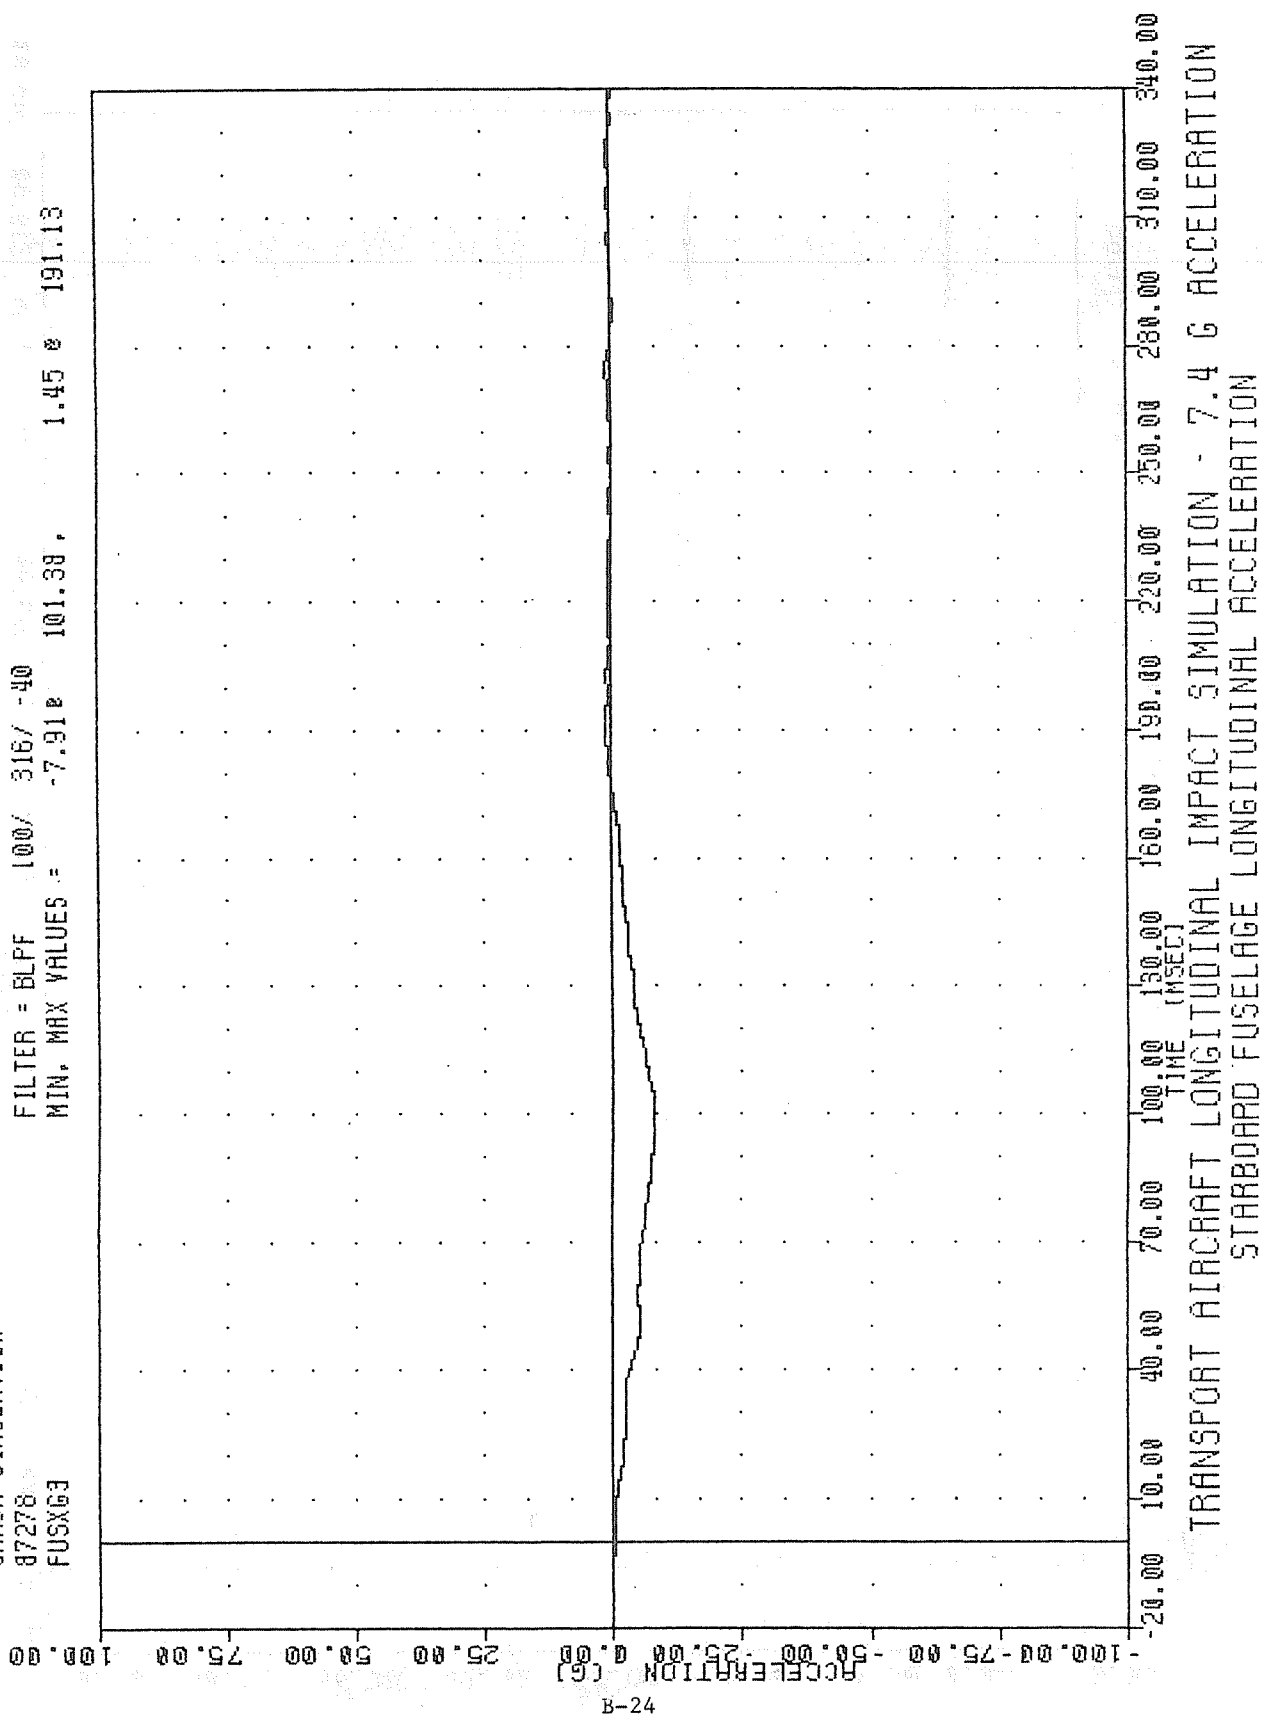

FAR , TEST 01
 CRASH SIMULATION
 87278
 FUSXV3

FILTER = 6LPF 300/ 949/ -40
 MIN. MAX VALUES = -22.378 174.13, 0.00 8 -20.00

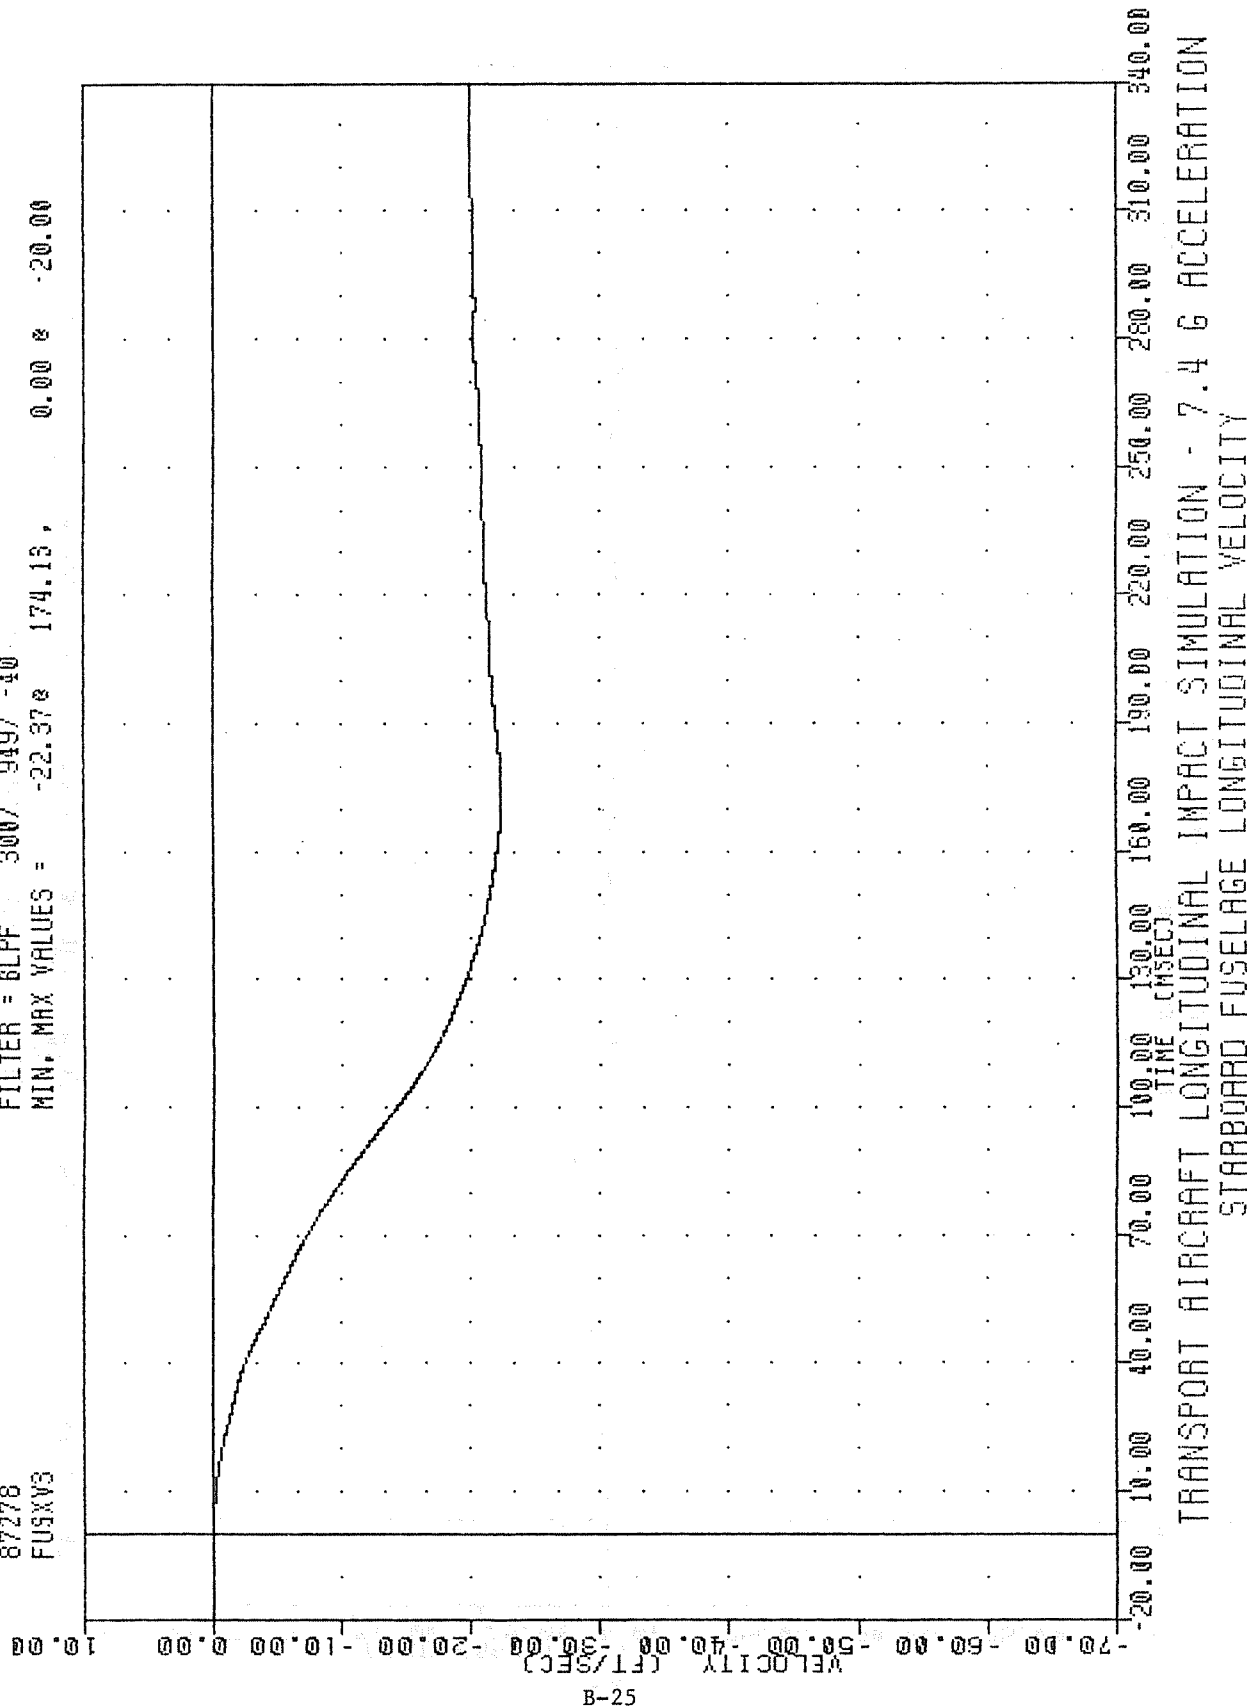

FRA , TEST 01

CRASH SIMULATION

8727B

SECX6

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -8.16e

2.06 e 191.50

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-20.00

10.00

40.00

70.00

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

ACCELERATION (G)

TIME (SEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C LONGITUDINAL ACCELERATION

FRA TEST 01

CRASH SIMULATION

87278


SECXV

FILTER = 8LFF 300/ 949/ -40

MIN. MAX VALUES = -21.82e 169.75, 0.00 e -20.00

10.00 0.00 -10.00 -20.00 -30.00 -40.00 -50.00 -60.00 -70.00 -80.00 -90.00 -100.00

VELOCITY (FT/SEC)

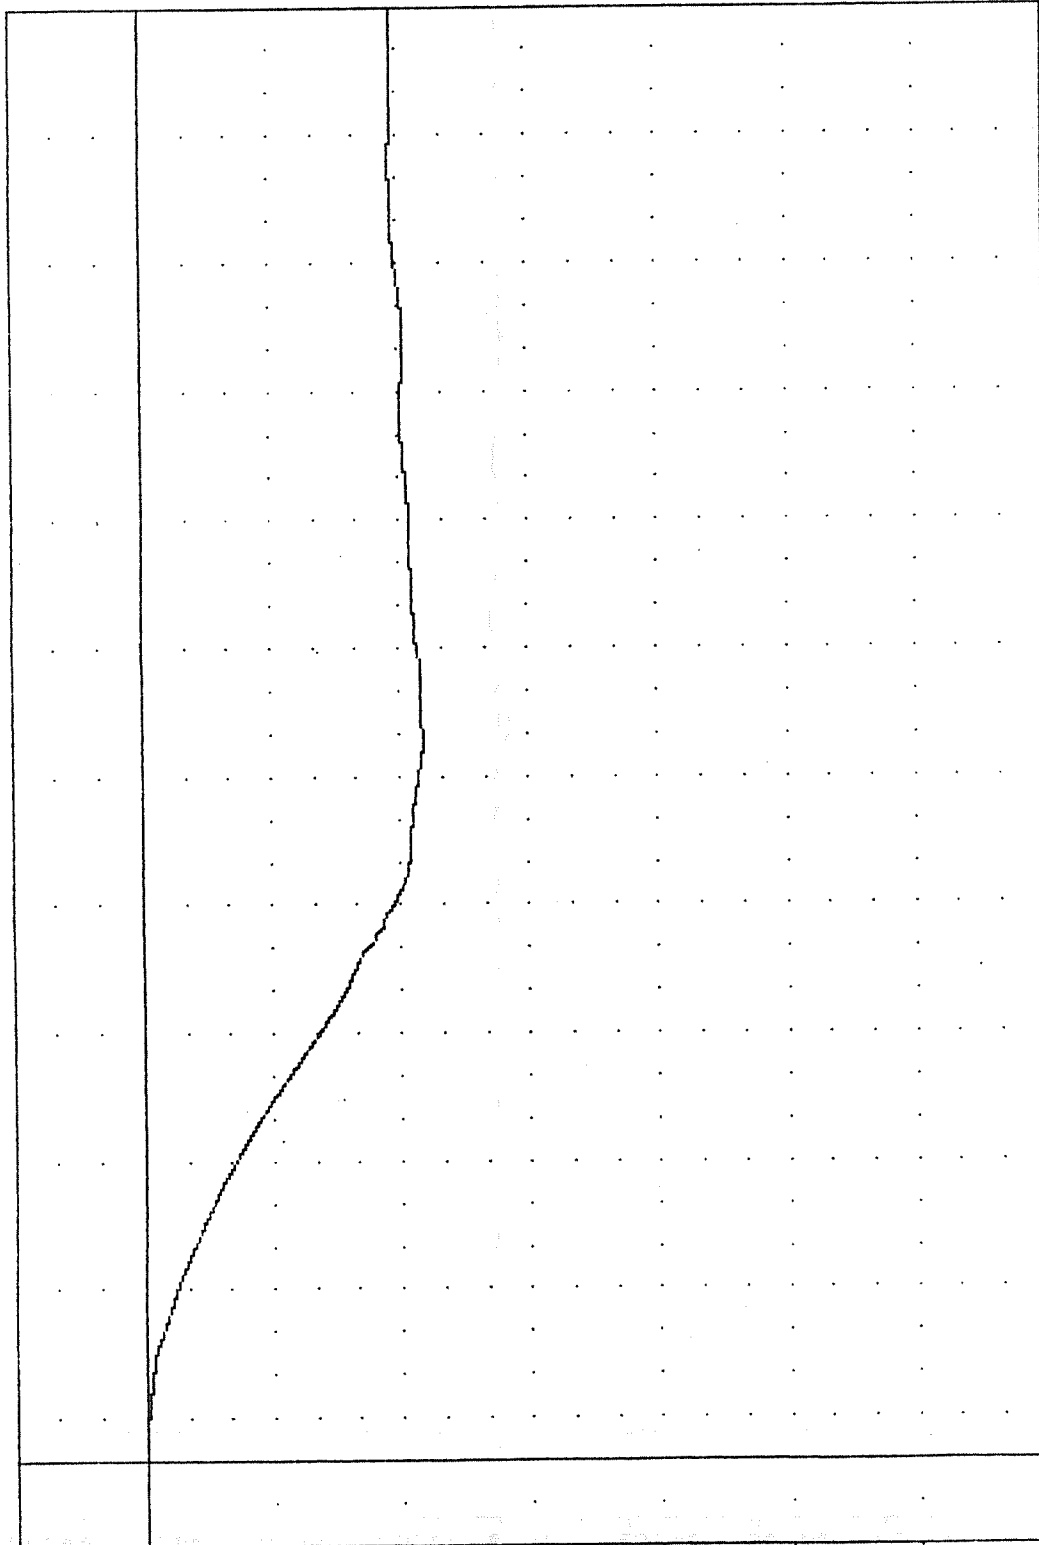

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00


TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C LONGITUDINAL VELOCITY

FRA , TEST 01
 CRASH SIMULATION
 87278
 SECZG

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -2.03B 139.88 , 2.74 @ 165.00

ACCELERATION (G)

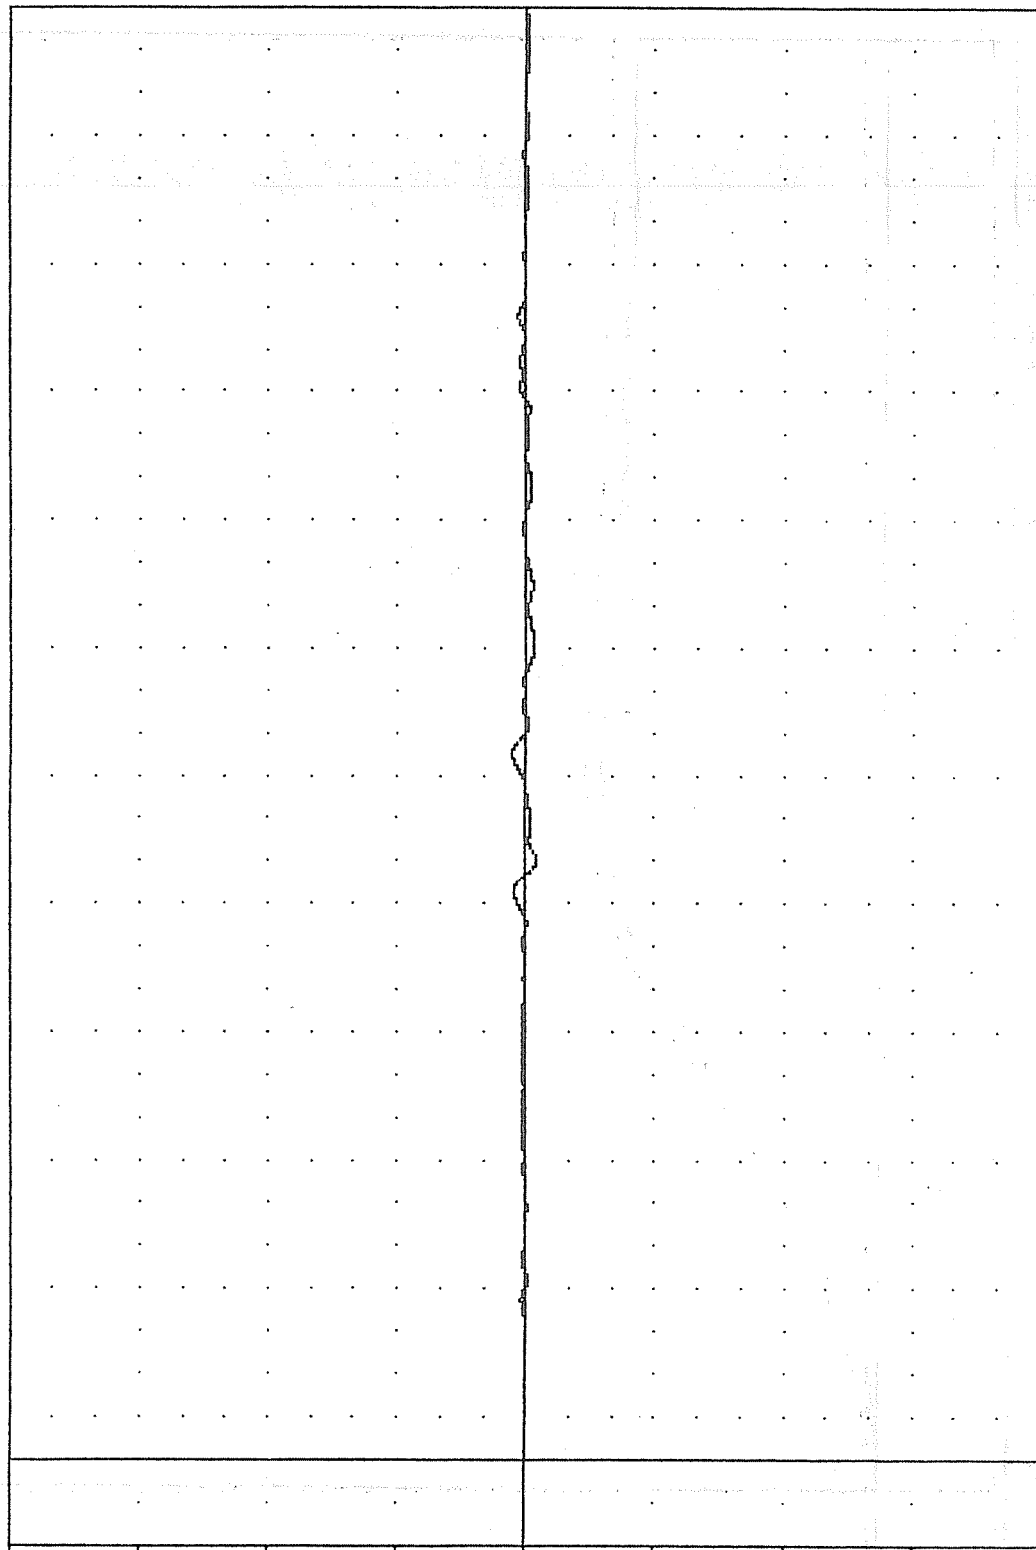

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT C VERTICAL ACCELERATION

FRA , TEST 01

CRASH SIMULATION

87276

SEDXG

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -7.54e 91.50 , 3.40 e 194.75

100.00

75.00

50.00

25.00

0.00


-25.00

-50.00

-75.00

-100.00

B-29

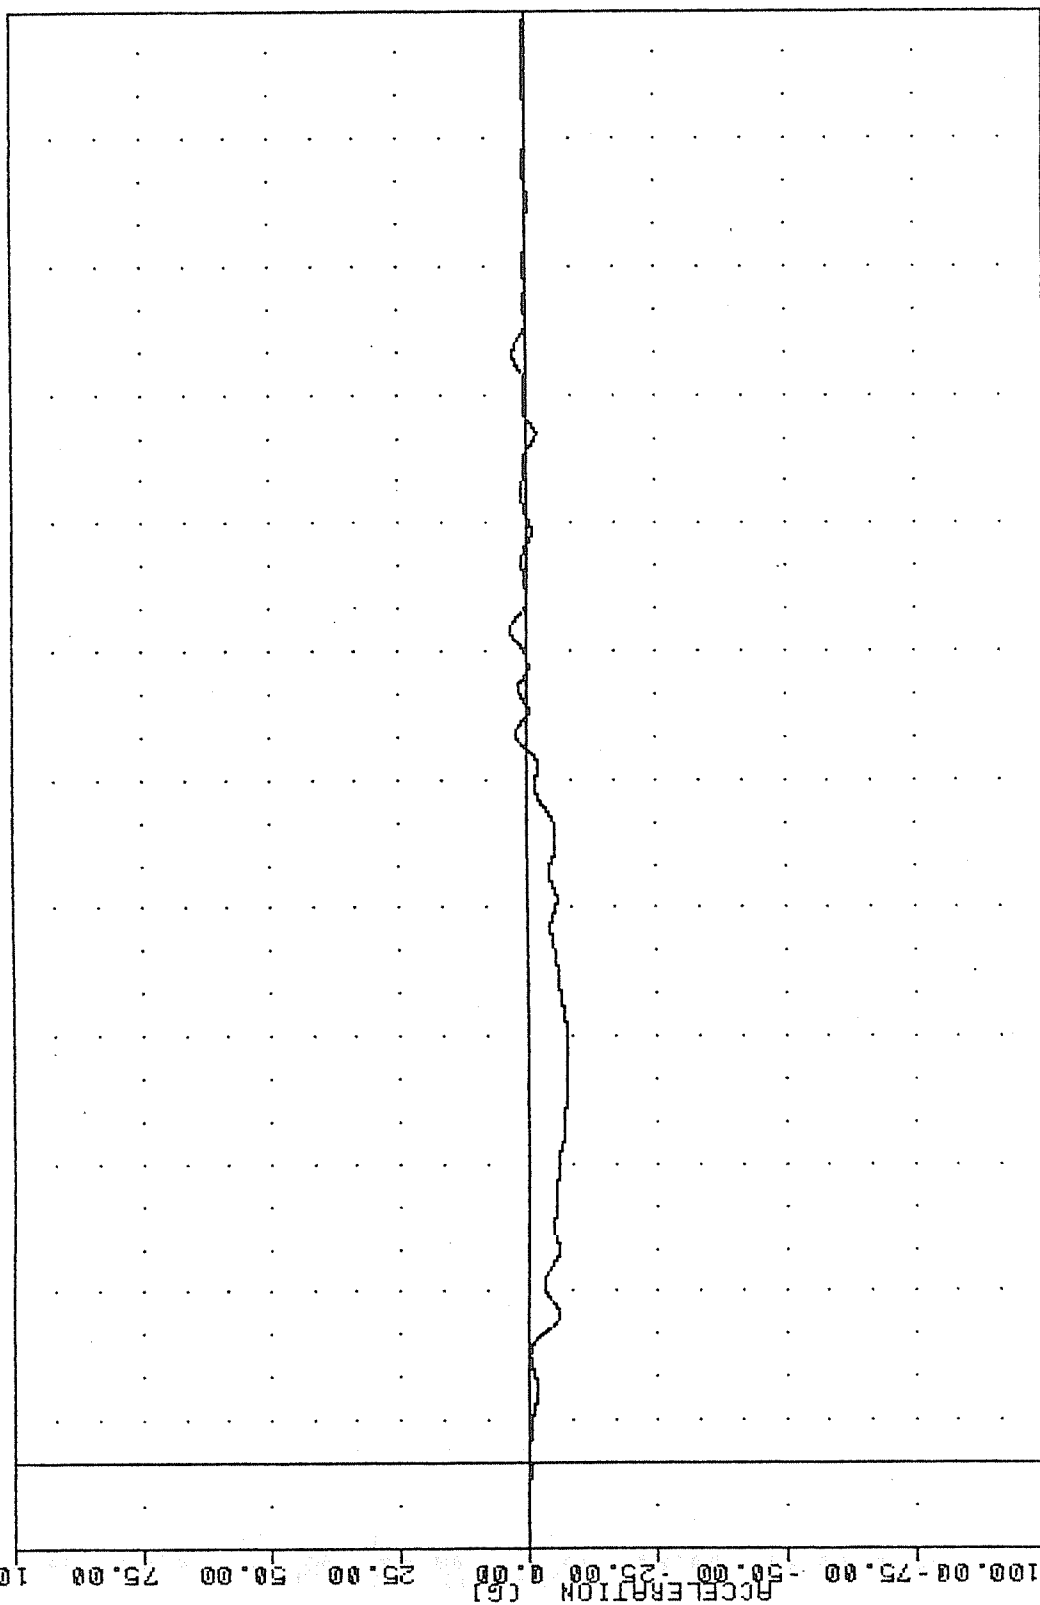


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

FRA
CRASH SIMULATION
8727B
SEDXV

FILTER = BLPF 300/ 949/ -40
MIN. MAX VALUES = -23.52 164.00 0.00 0 -16.75

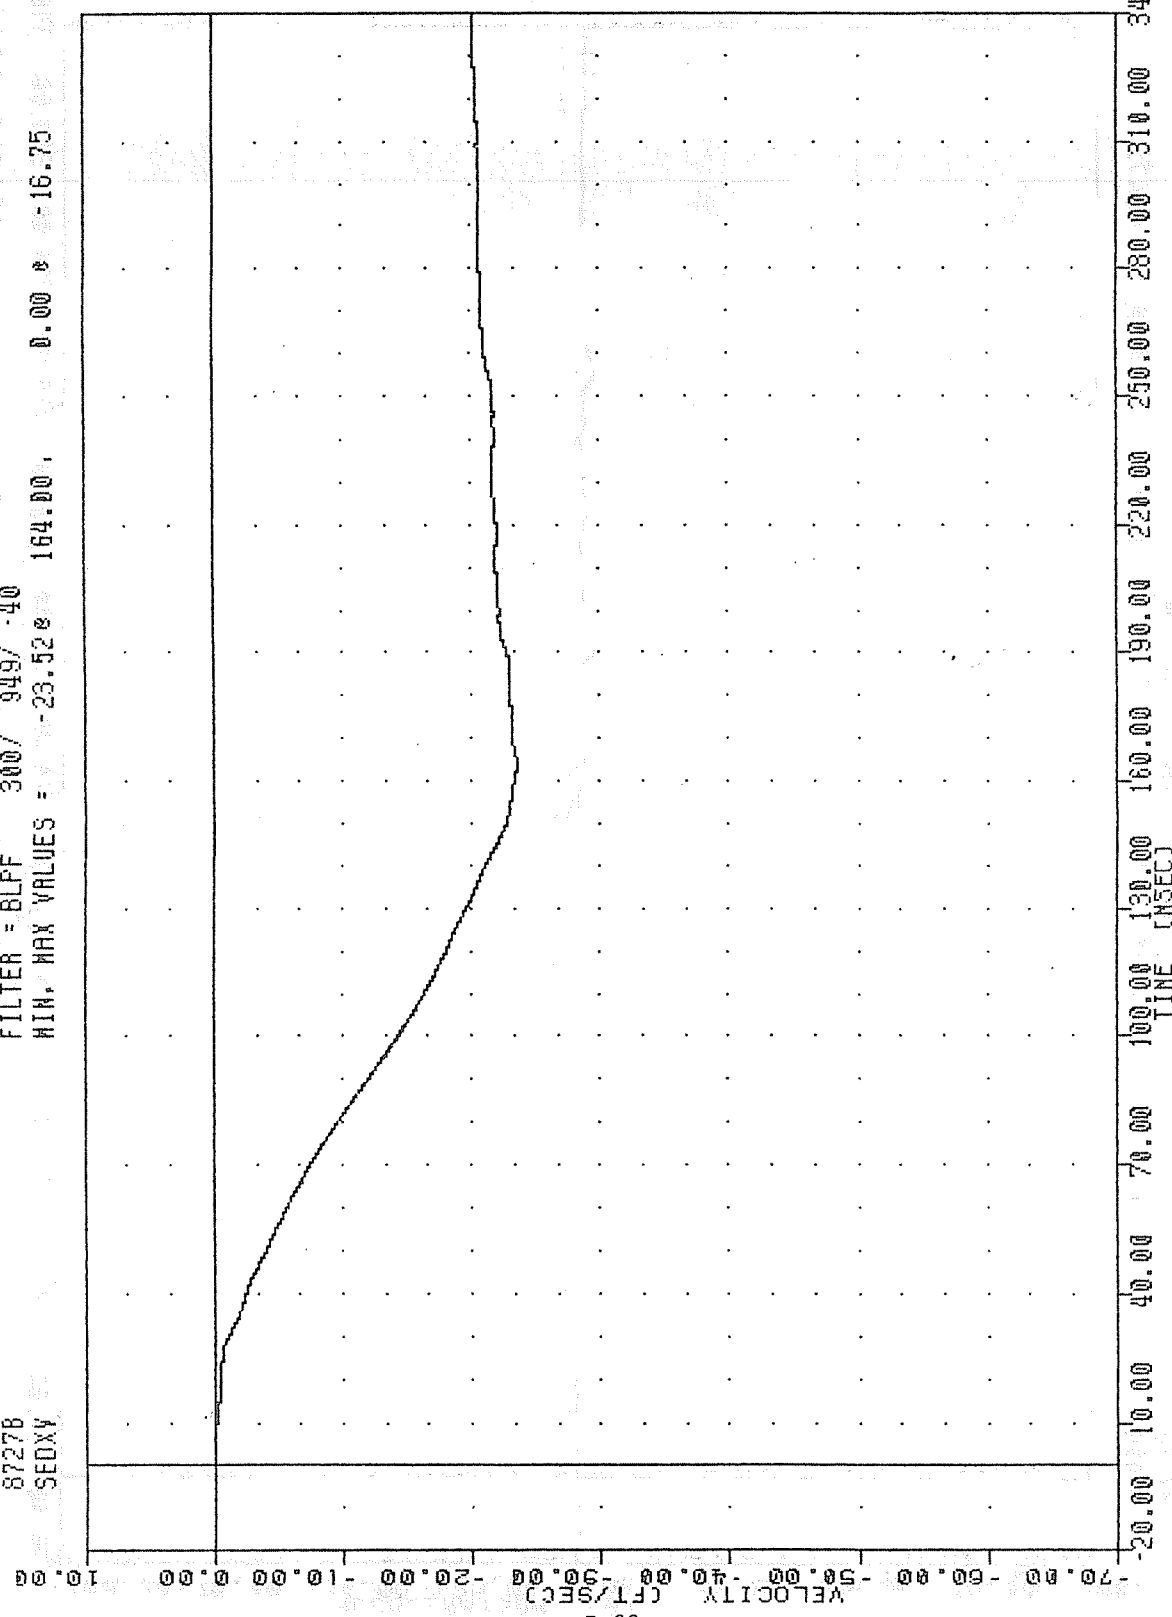

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT 0 LONGITUDINAL VELOCITY

FAR , TEST 01

CRASH SIMULATION

87278

SEDY6

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -3.068 191.25 , 1.76 * 203.38

100.00

75.00

50.00

25.00

0.00


-25.00

-50.00

-75.00

-100.00

B-31

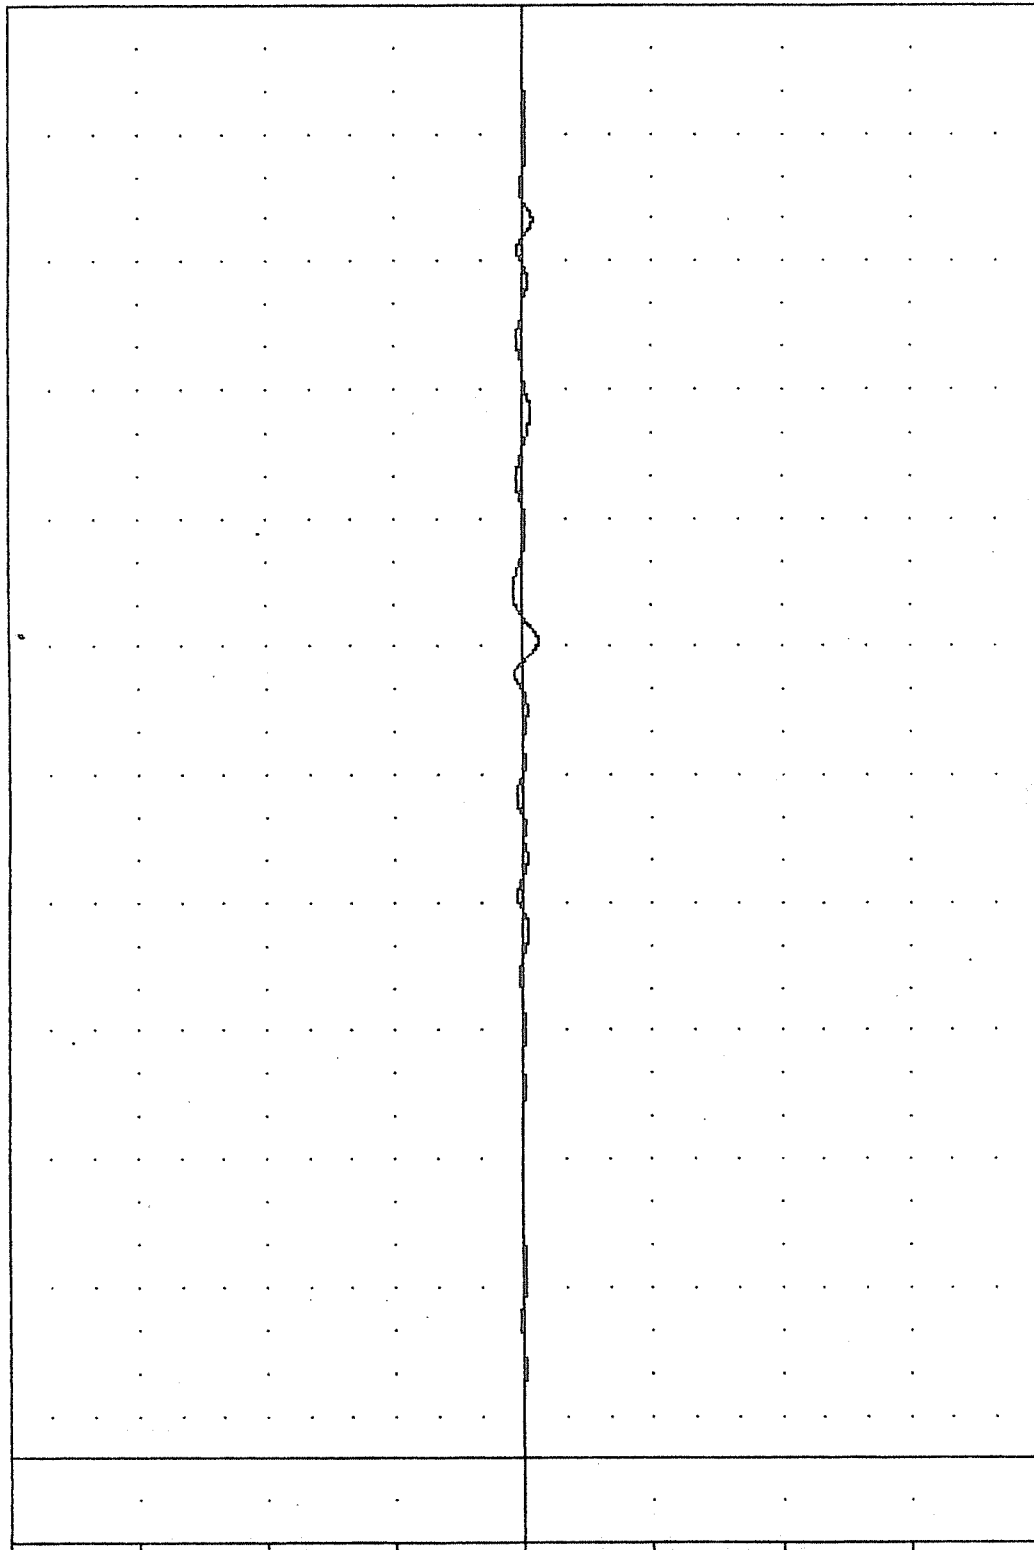


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D LATERAL ACCELERATION

FRA , TEST 01
 CRASH SIMULATION
 87278
 SE02G

FILTER = 8LPP 100/ 316/ -40
 MIN, MAX VALUES = -1.96e 206.75, 2.29 e 159.25

ACCELERATION [G]
 -100.00 -75.00 -50.00 -25.00 0.00 25.00 50.00 75.00 100.00

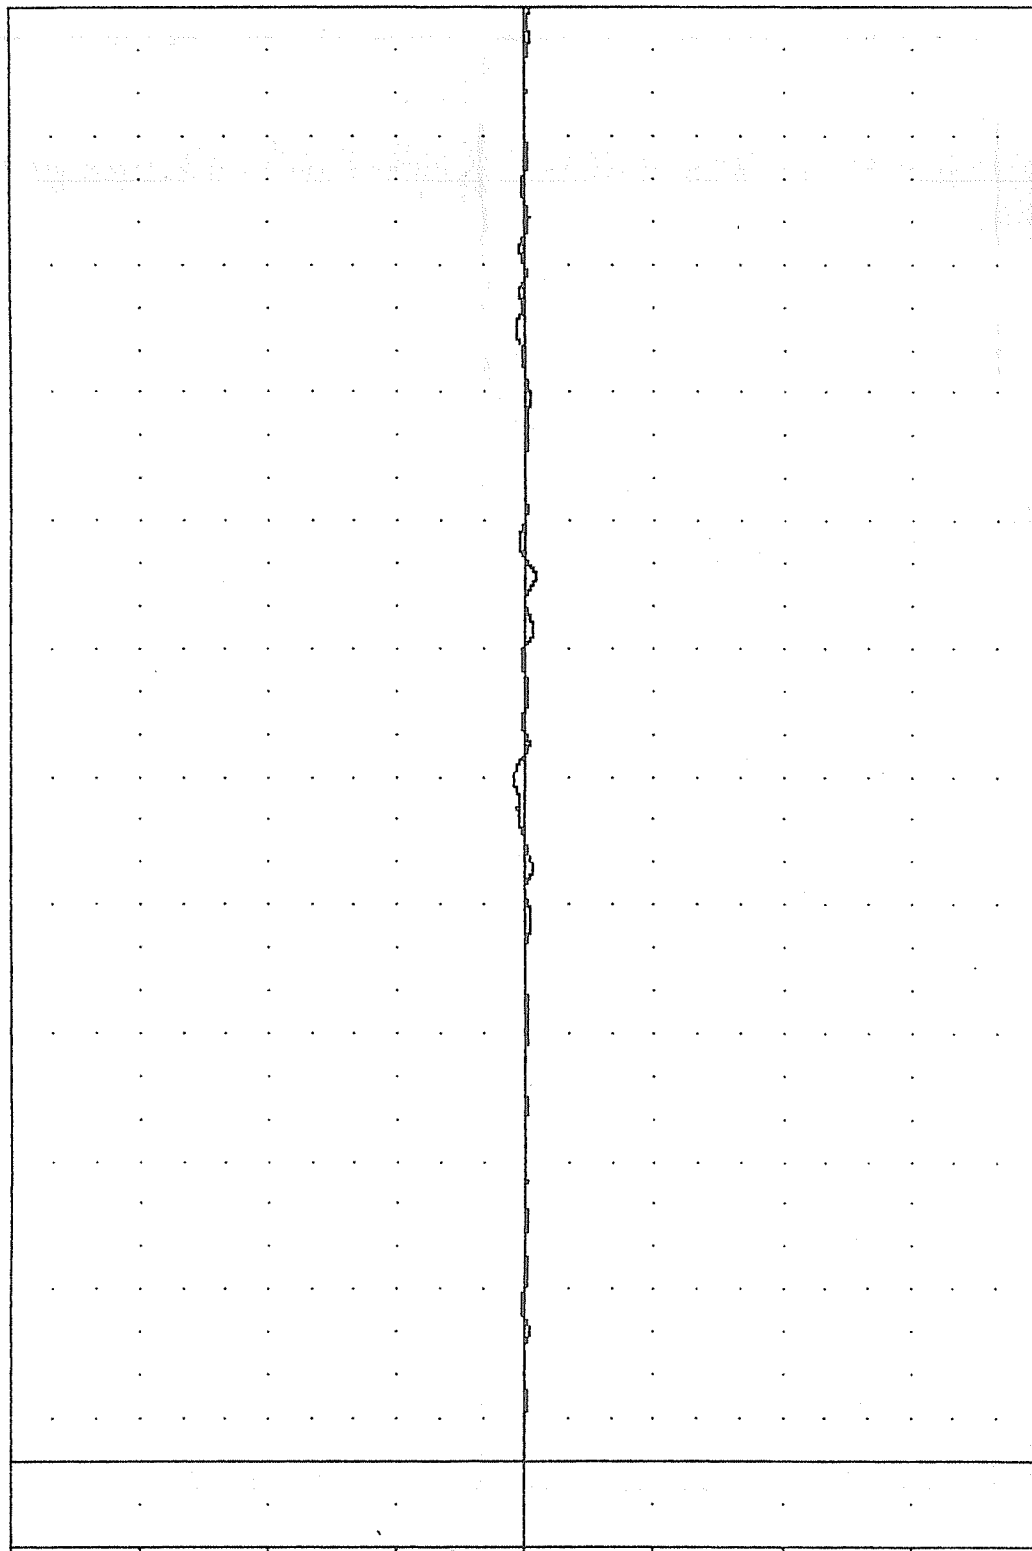

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT D VERTICAL ACCELERATION

FAR , TEST 01
 CRASH SIMULATION

87278

3EDRG

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = 0.048 -15.75 ,

7.54 e 91.50

70.00

60.00

50.00

40.00

30.00

20.00


10.00

0.00

-10.00

-20.00

ACCELERATION (G)

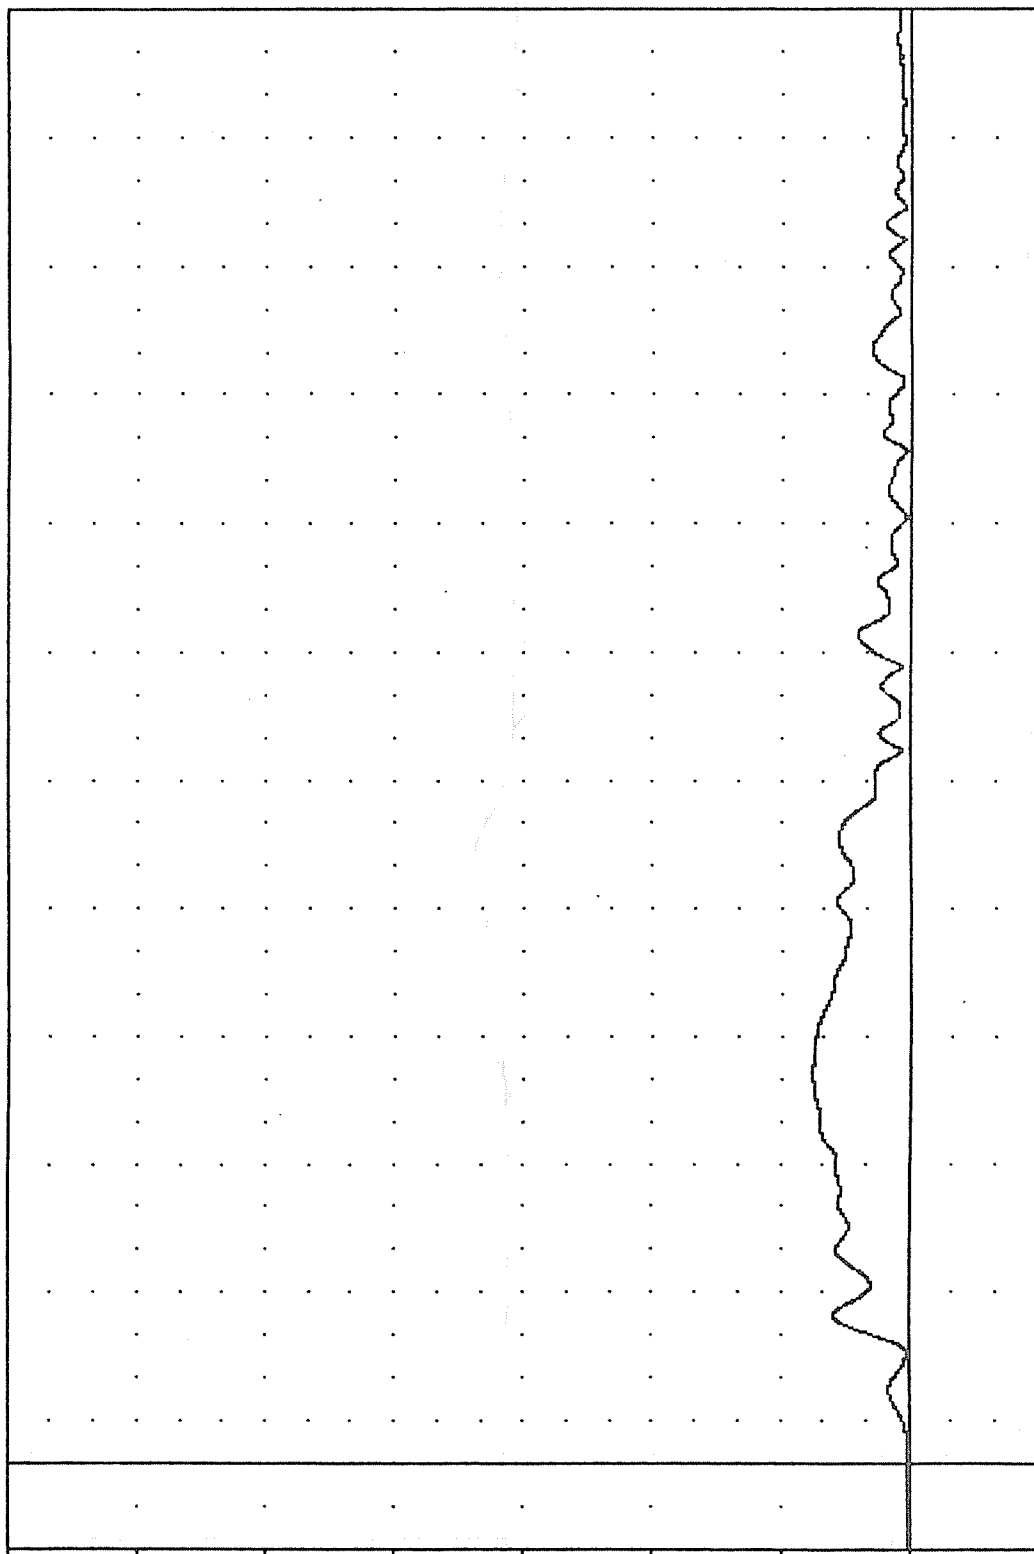

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT D ACCELERATION RESULTANT

FAR , TEST 01

CRASH SIMULATION

87278

PEVX62


FILTER = BLPF 300/-949/-40

MIN. MAX VALUES = -7.92 136.50

4.35 198.75

ACCELERATION (G)

100.00 75.00 50.00 25.00 0.00 -25.00 -50.00 -75.00 -100.00

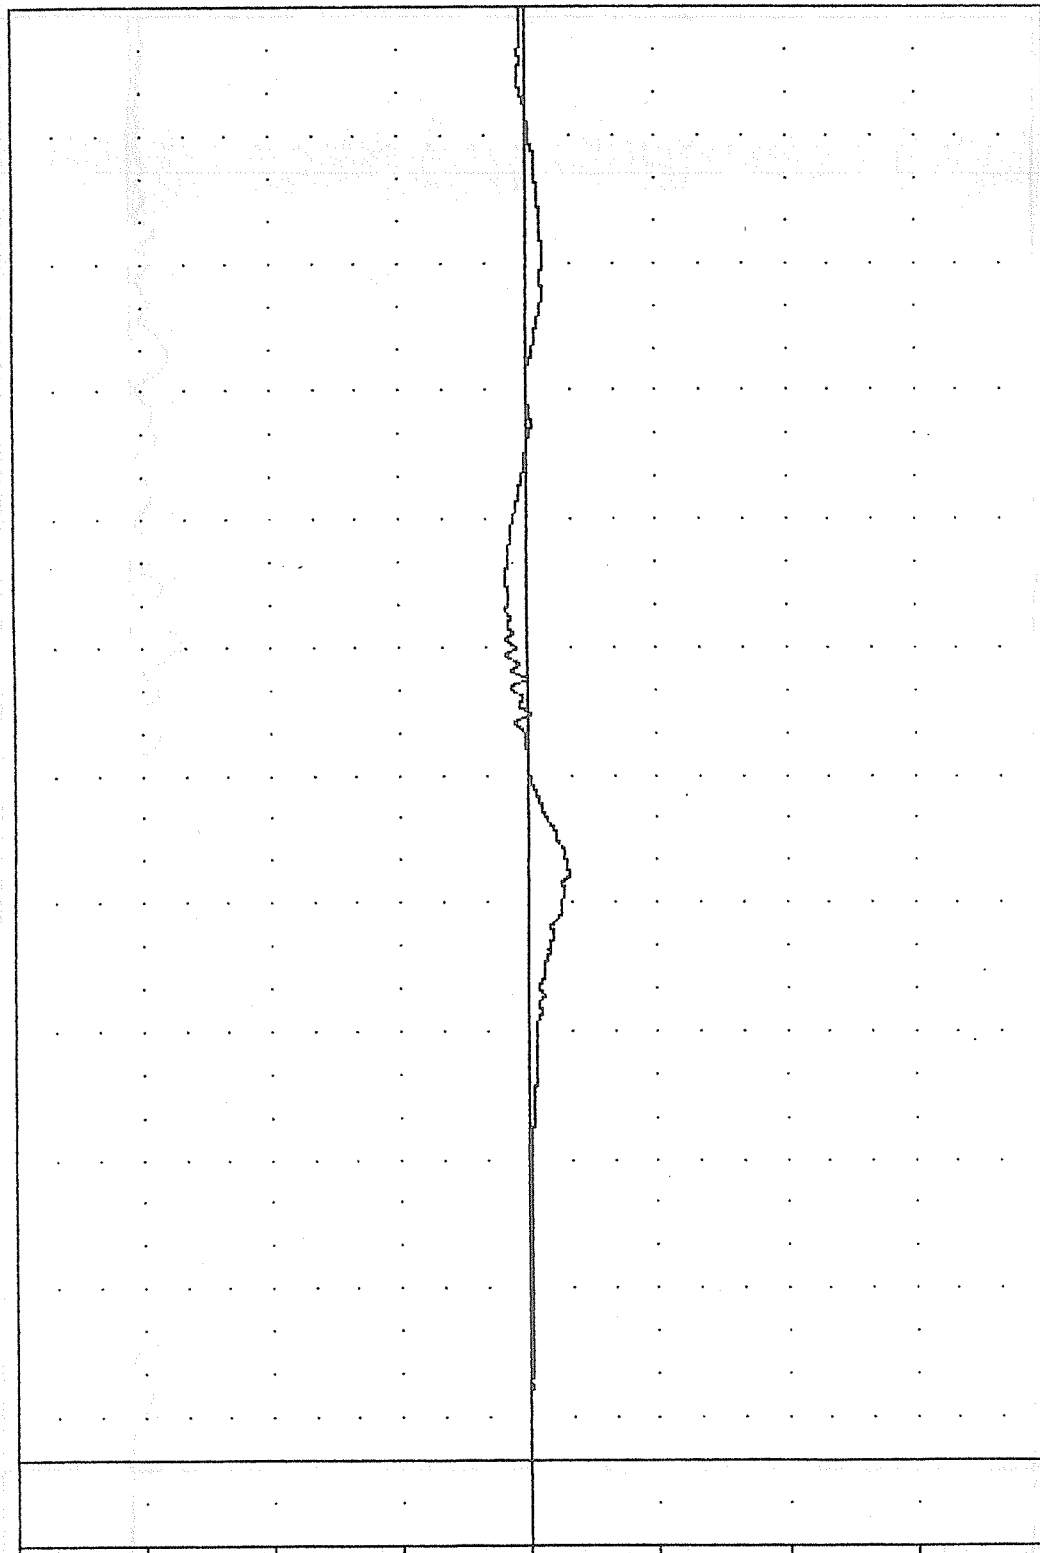


20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C CENTER DUMMY PELVIS LONGITUDINAL ACCELERATION

FAR , TEST 01
 CRASH SIMULATION
 87278
 PEVXV1

FILTER = BLPF 300/ 949/ -40
 MIN, MAX VALUES = -10.69e 174.50 , 0.00 e -12.38

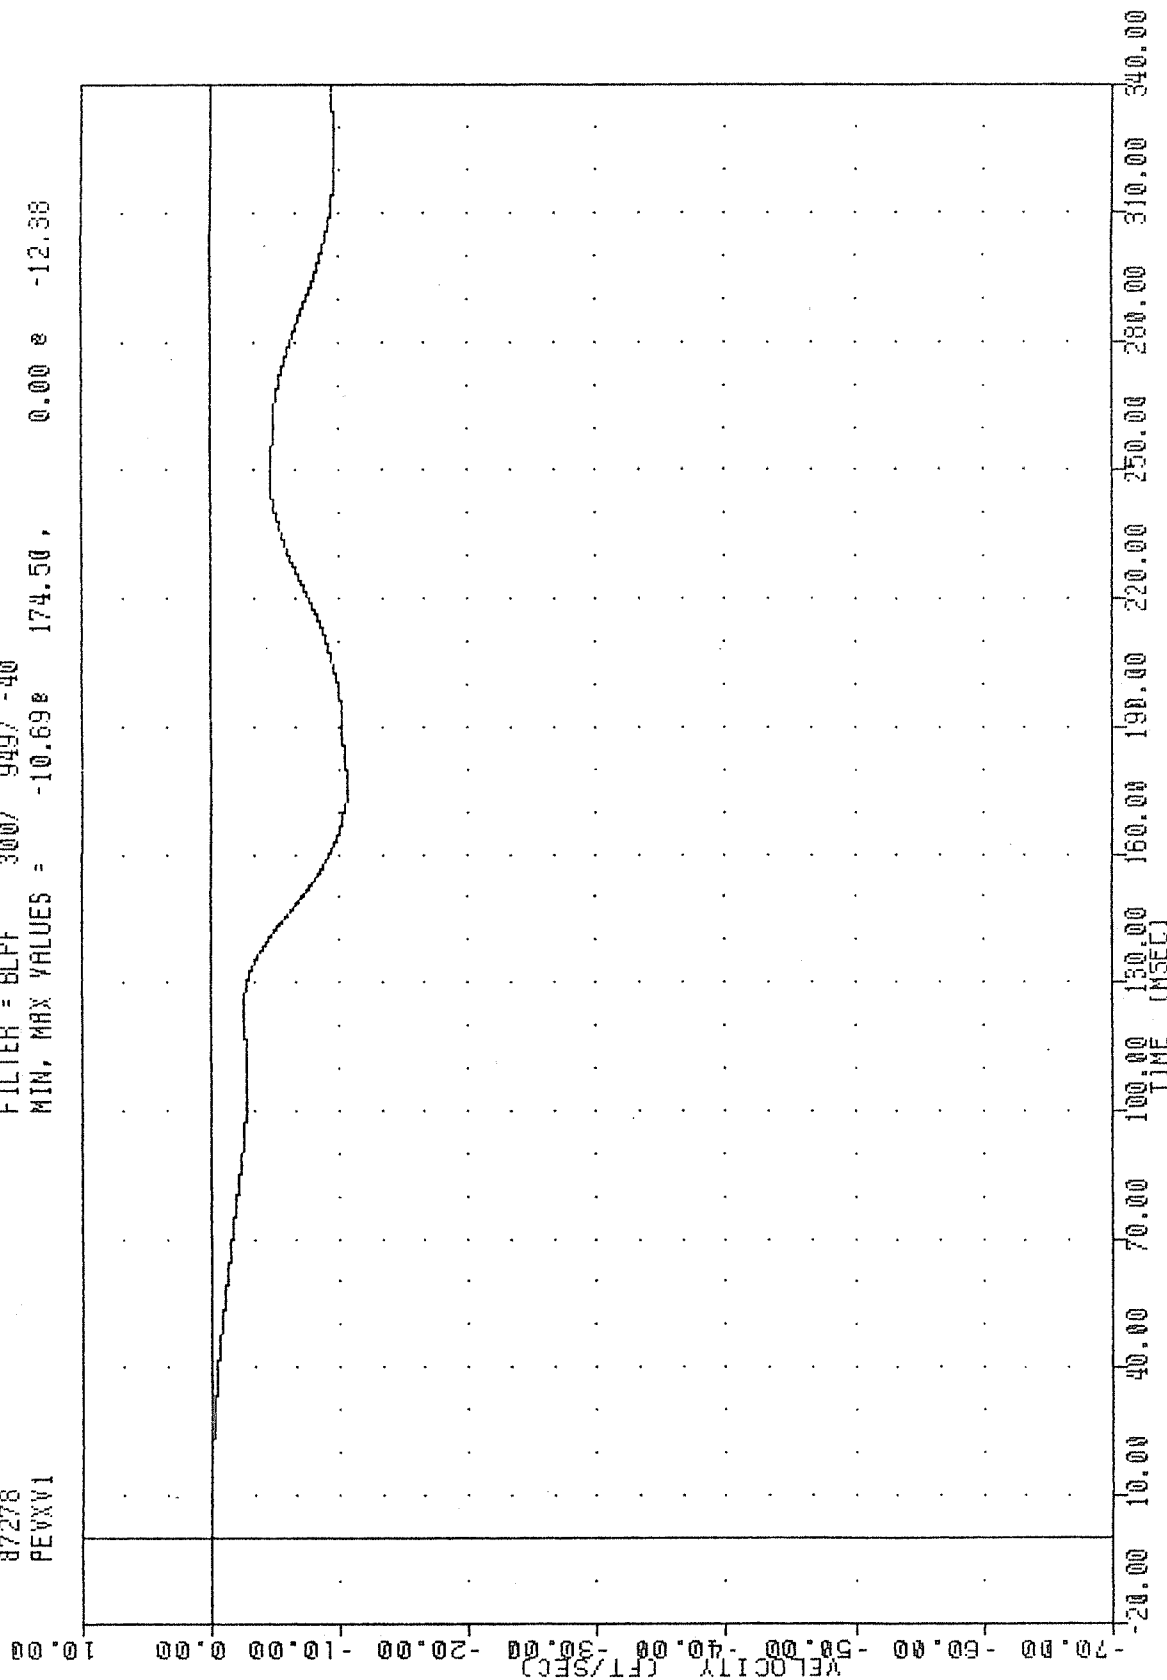


B-35

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT D CENTER DUMMY PELVIS LONGITUDINAL VELOCITY

FAR , TEST 01
 CRASH SIMULATION
 87278
 PEVZG2

FILTER = BLPF 30N/ 949/ -40
 MIN, MAX VALUES = -4.78e 180.13, 14.88 e 129.75

ACCELERATION [G]
 -100.00 -75.00 -50.00 -25.00 0.00 25.00 50.00 75.00 100.00

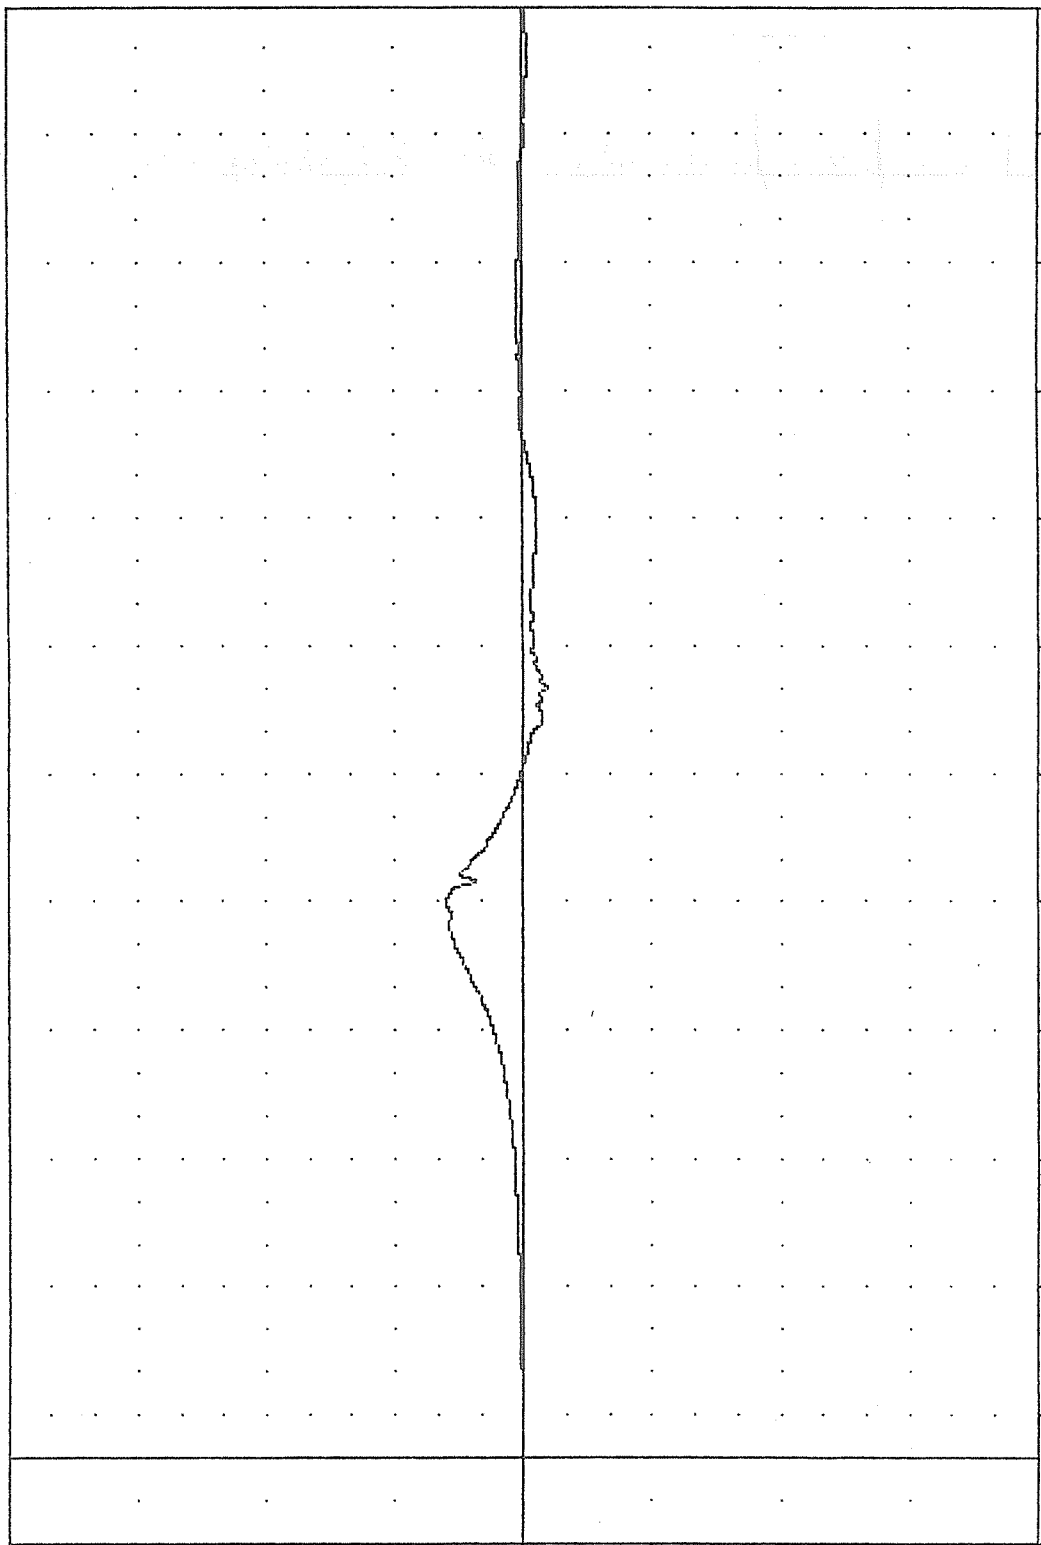


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT C CENTER DUMMY PELVIS VERTICAL ACCELERATION

FAR , TEST 01
 CRASH SIMULATION
 87278
 PENXG1

FILTER = BLPF 300/ 949/ -40
 MIN, MAX VALUES = -9.10e 146.63, 5.03 & 221.13

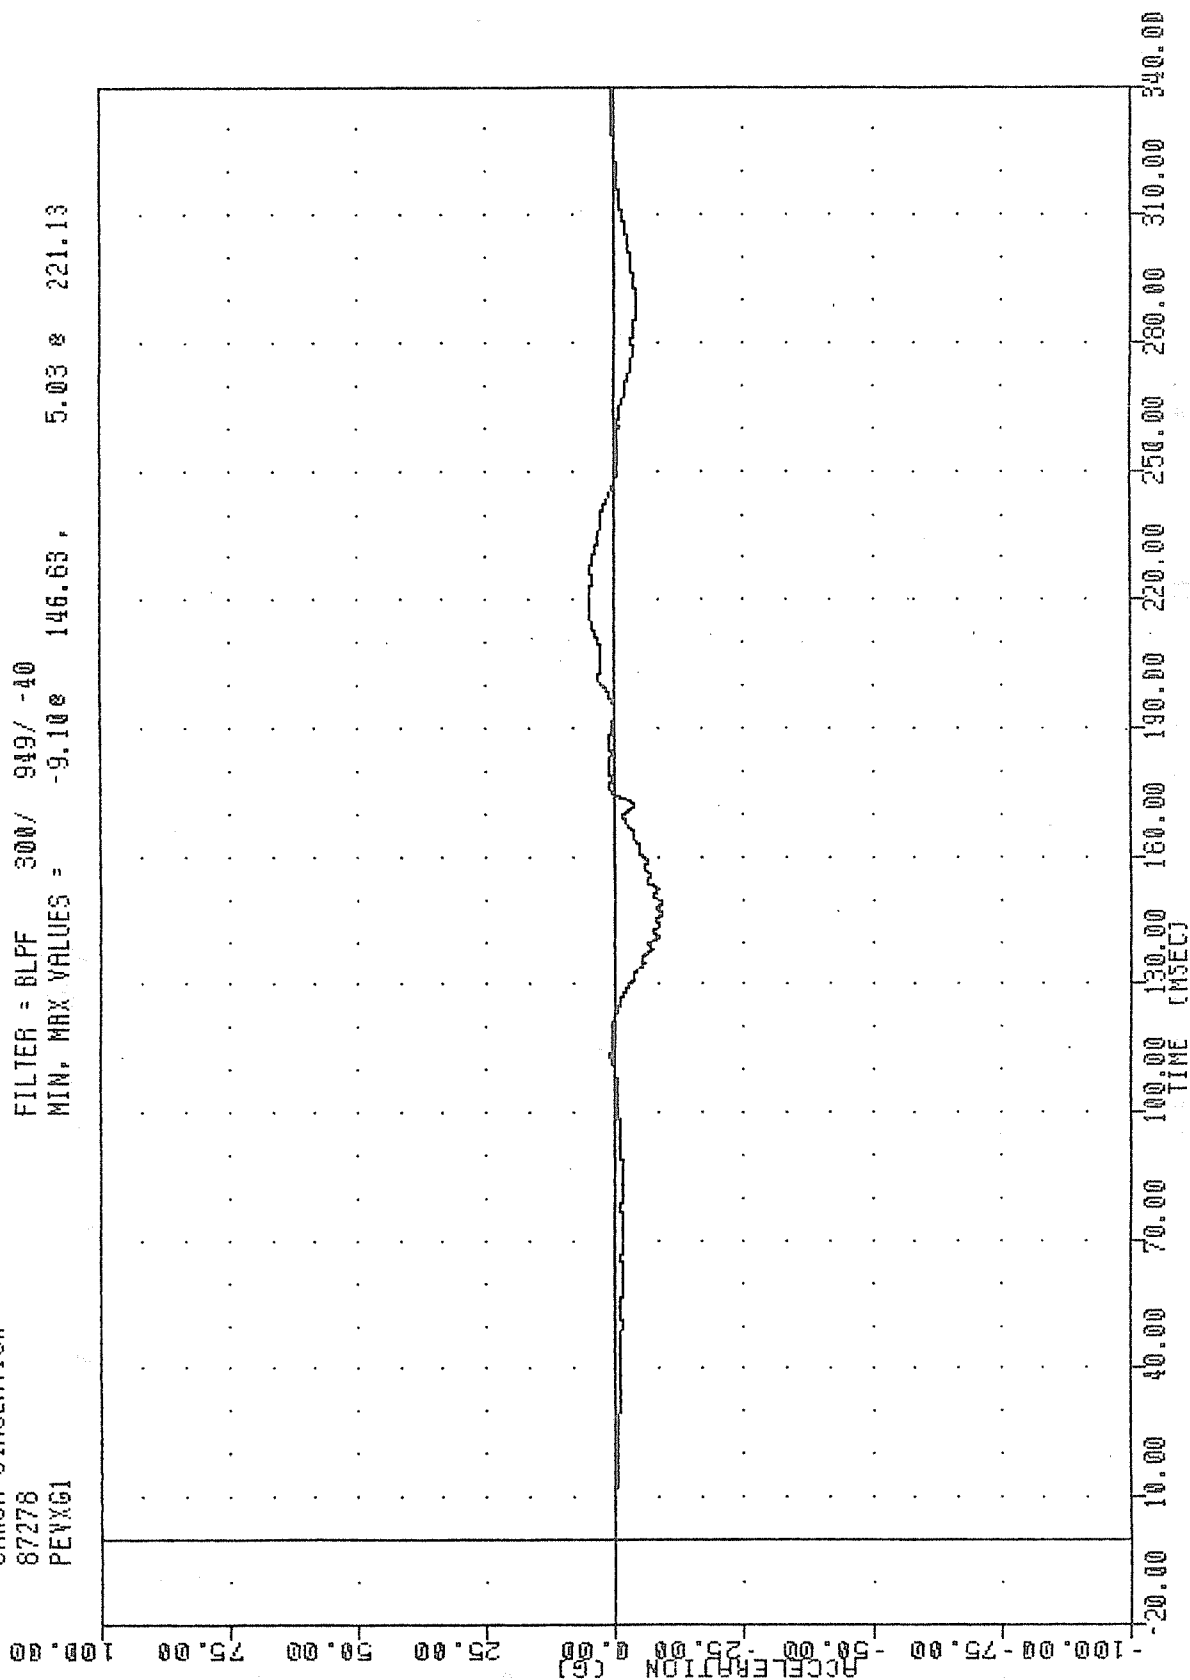

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT D CENTER DUMMY PELVIS LONGITUDINAL ACCELERATION

FAR , TEST 01

CASH SIMULATION

87276

PEVXV2

FILTER = BLPF 300/ 949/ -40

MIN. MAX VALUES = -9.53 160.50 , 0.00 2 -12.50

10.00

0.00

-10.00

-20.00

-30.00

-40.00

-50.00

-60.00

-70.00

-80.00

-90.00

-100.00

-110.00

-120.00

-130.00

-140.00

-150.00

-160.00

-170.00

-180.00

-190.00

VELOCITY (FT/SEC)

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C CENTER DUMMY PELVIS LONGITUDINAL VELOCITY

FAR , TEST 01

CARSH SIMULATION

8727B


PEVZ61

FILTER = 8LFF 300/ 949/ -40

MIN. MAX VALUES = -1.86 241.75 12.55 128.88

ACCELERATION (G)


B-39

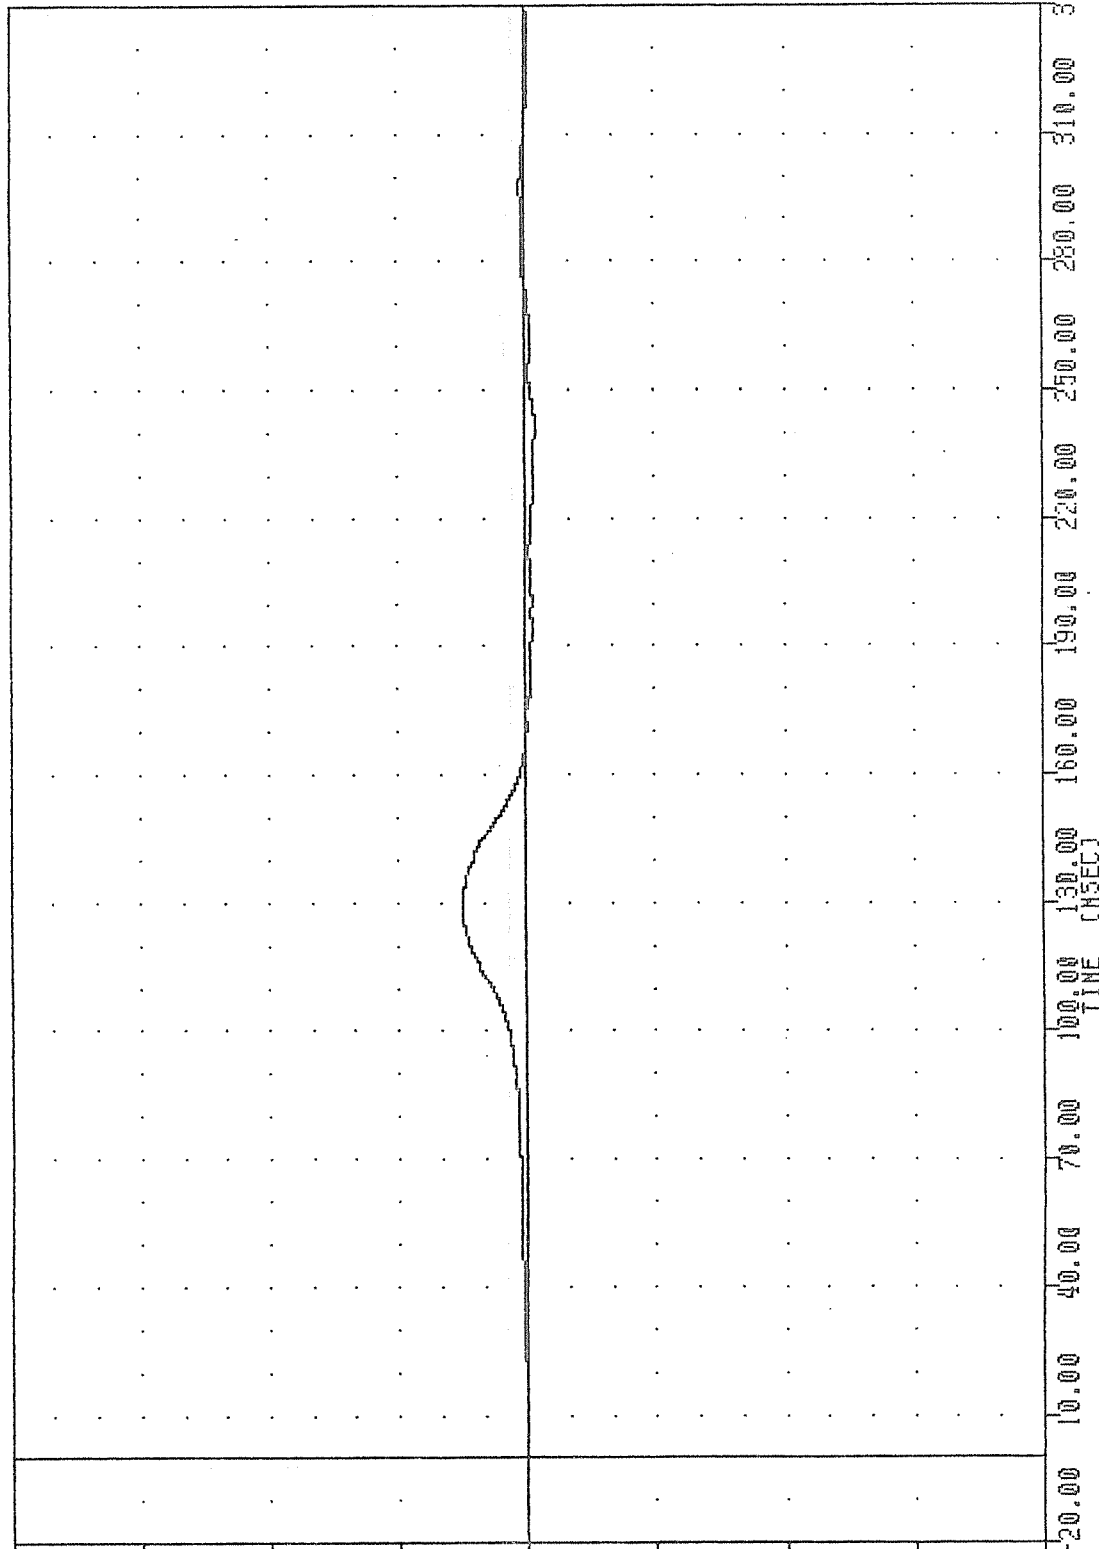

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D CENTER DUMMY PELVIS VERTICAL ACCELERATION

FAR , TEST 01
 CRASH SIMULATION
 87278
 POSTZO

FILTER = 8LFF 100/ 316/ -40
 MIN, MAX VALUES = -0.12e 278.25 , 0.13 e 139.63

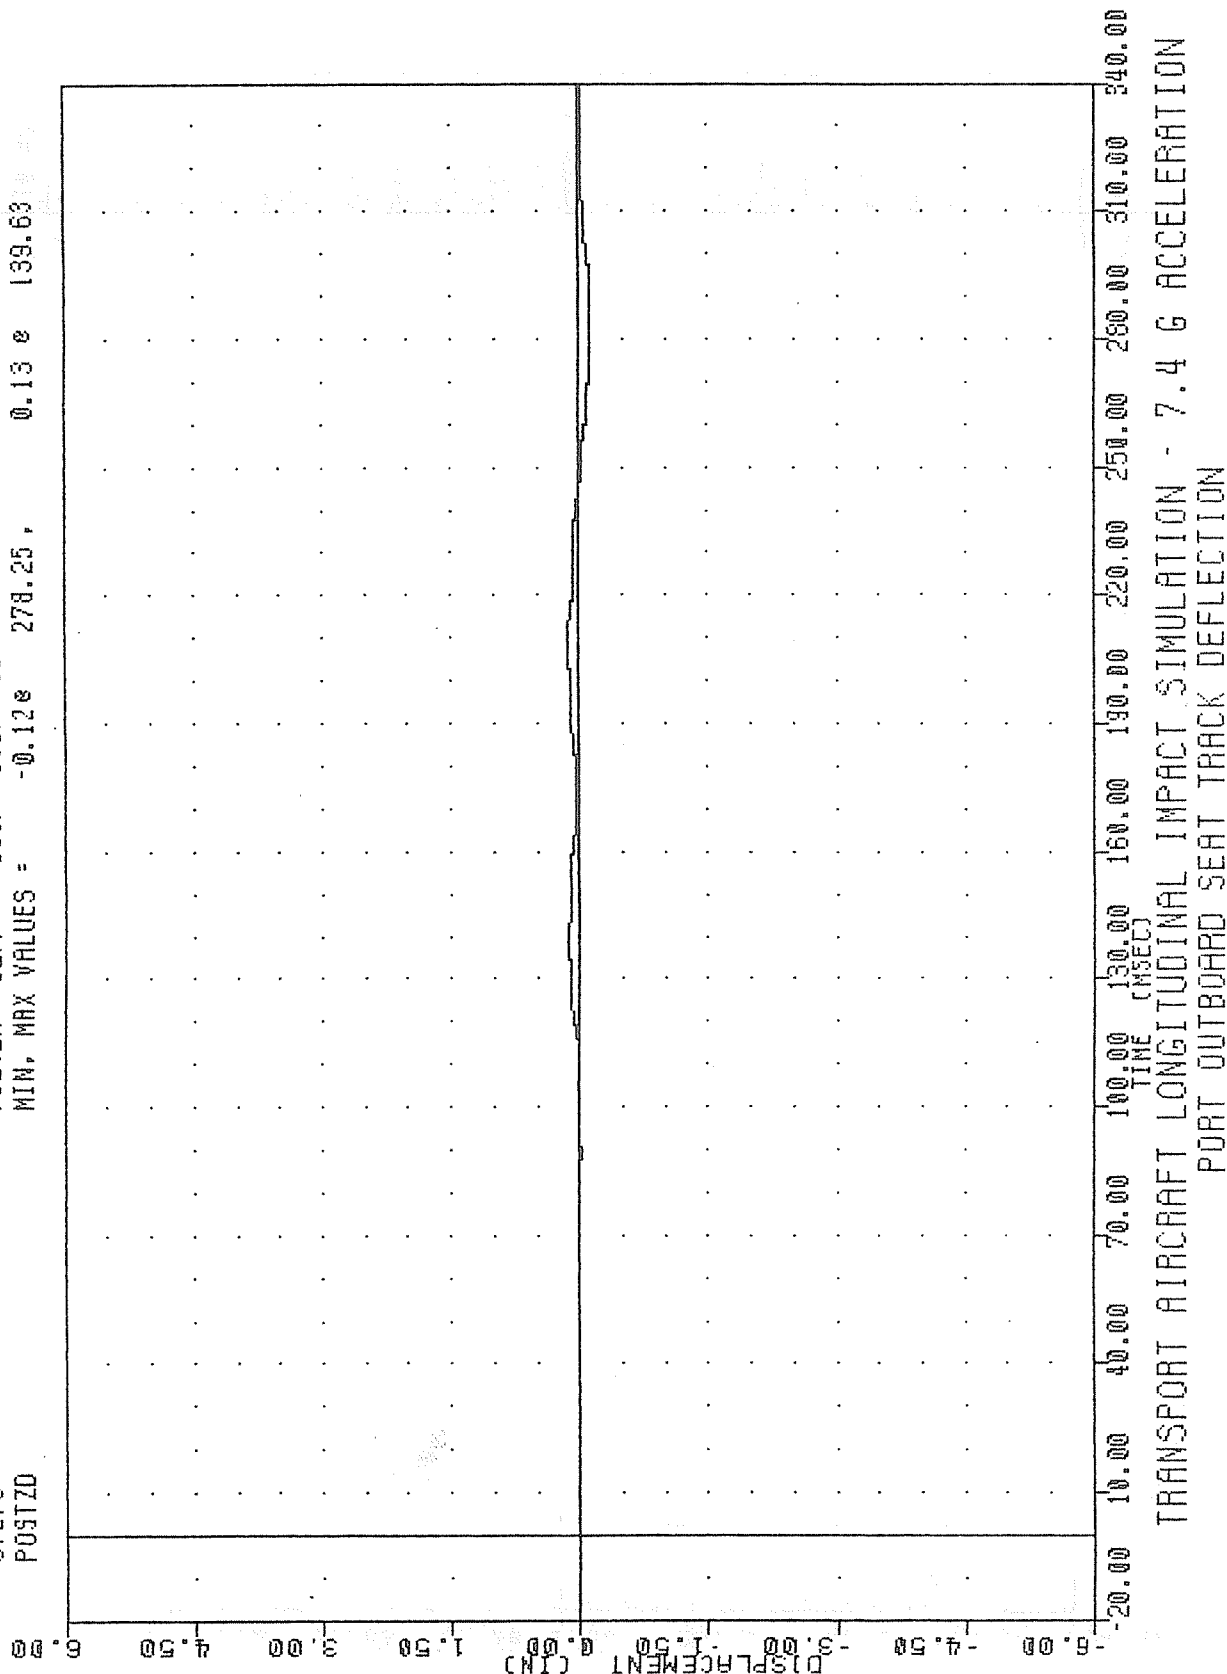

FAR , TEST 01
CRASH SIMULATION
87278
PISTZO

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -0.210 275.00 0.29 142.13

6.00

4.50

3.00

1.50

0.00

-1.50

-3.00

-4.50

-6.00

-8.00

-10.00

-12.00

-14.00


-16.00

-18.00

-20.00

DISPLACEMENT (IN)

B-41

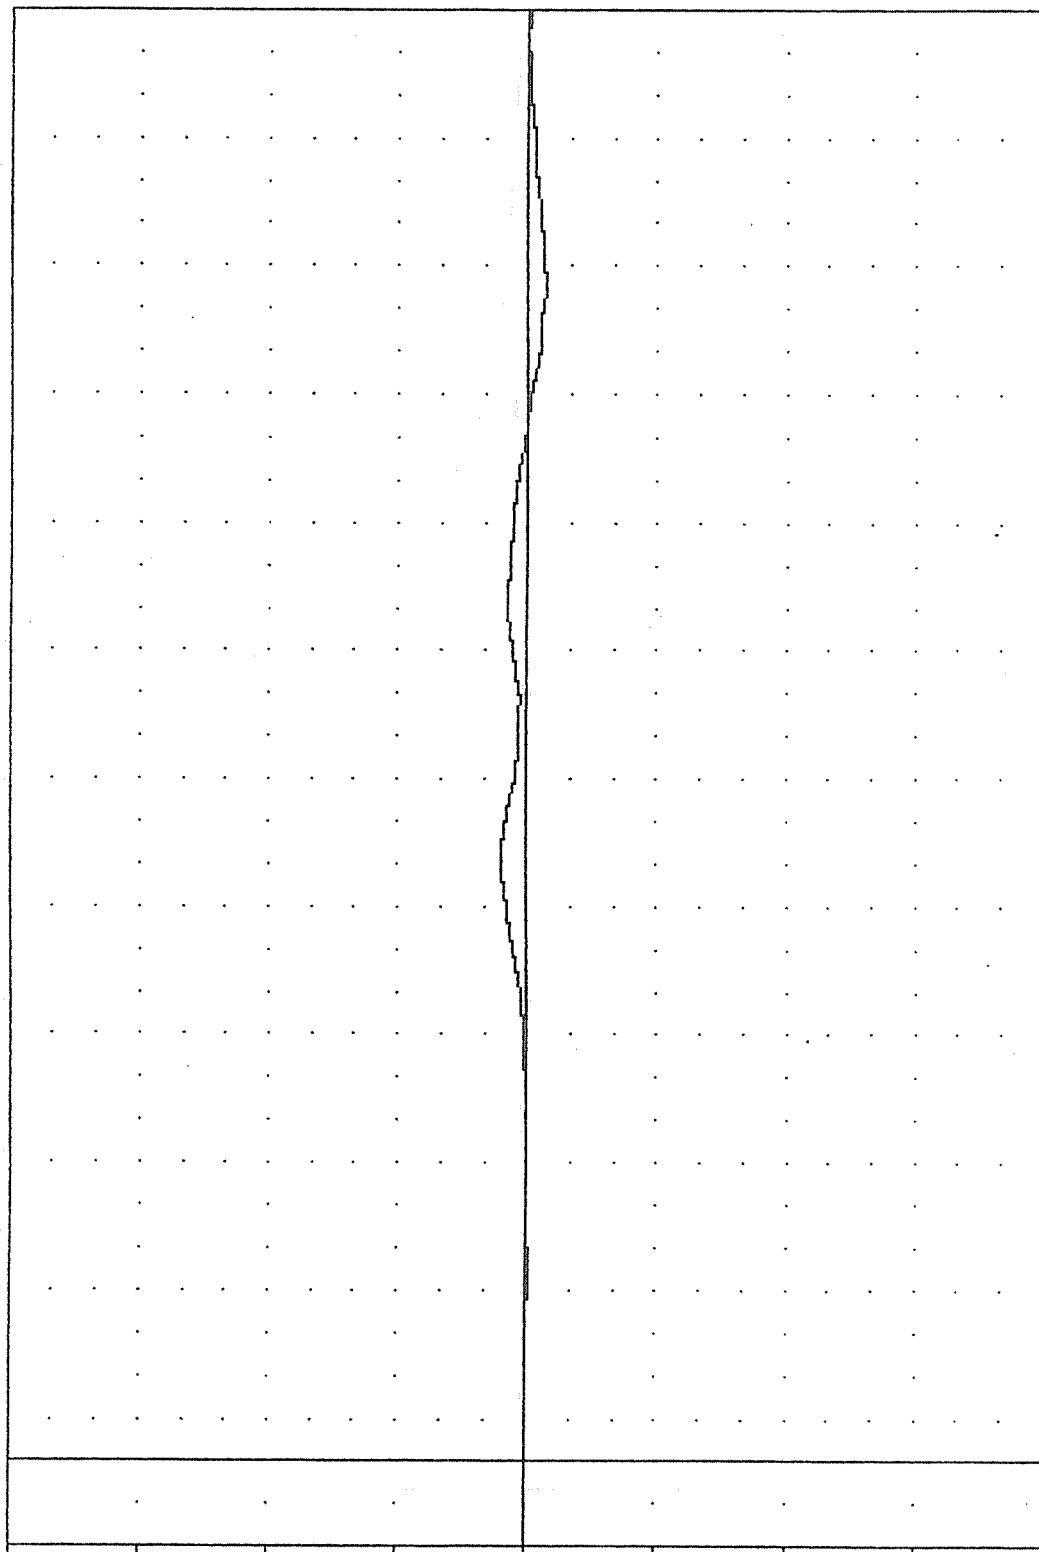


0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
PORT INBOARD SEAT TRACK DEFLECTION


FRA , TEST 01
 CRASH SIMULATION
 87278
 SISIZO

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.218 278.00 , 0.34 140.63

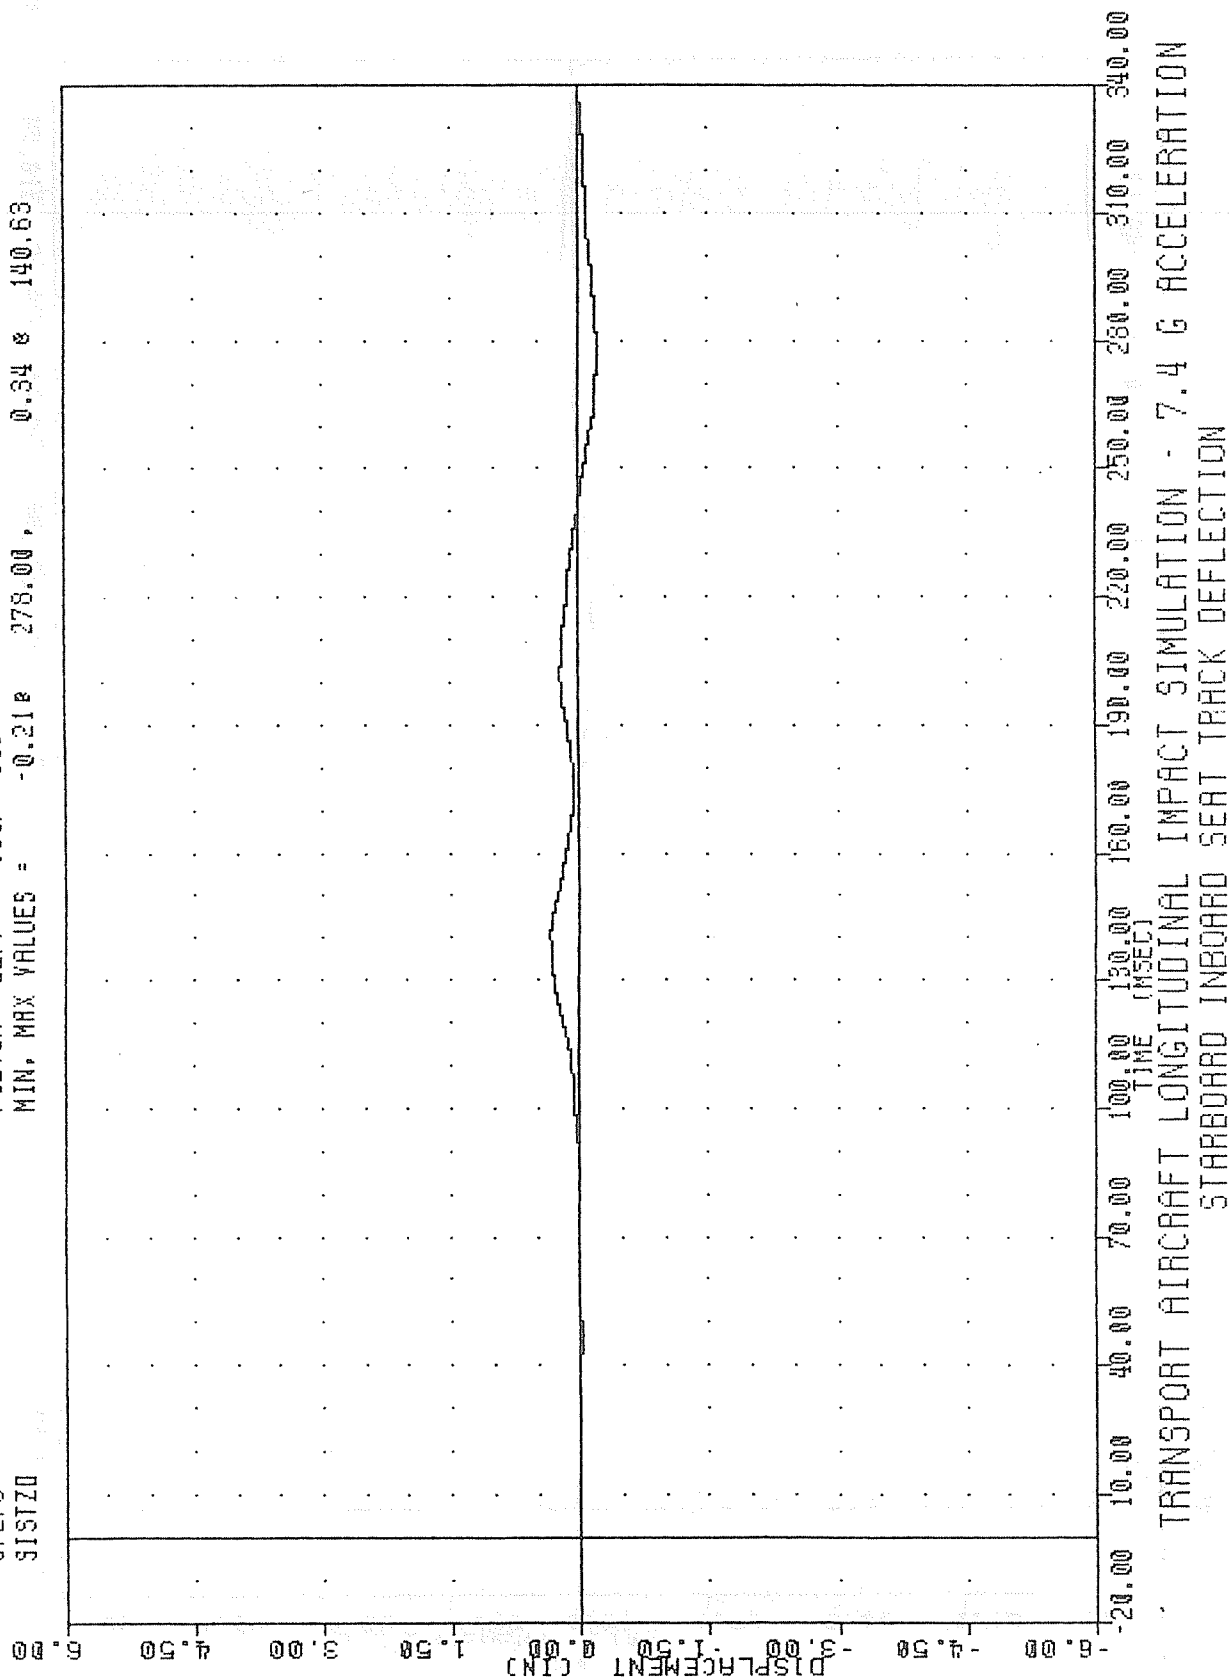

FRA , TEST 01
 CRASH SIMULATION
 87278
 SOSTZO

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.200 294.63, 0.25 135.50

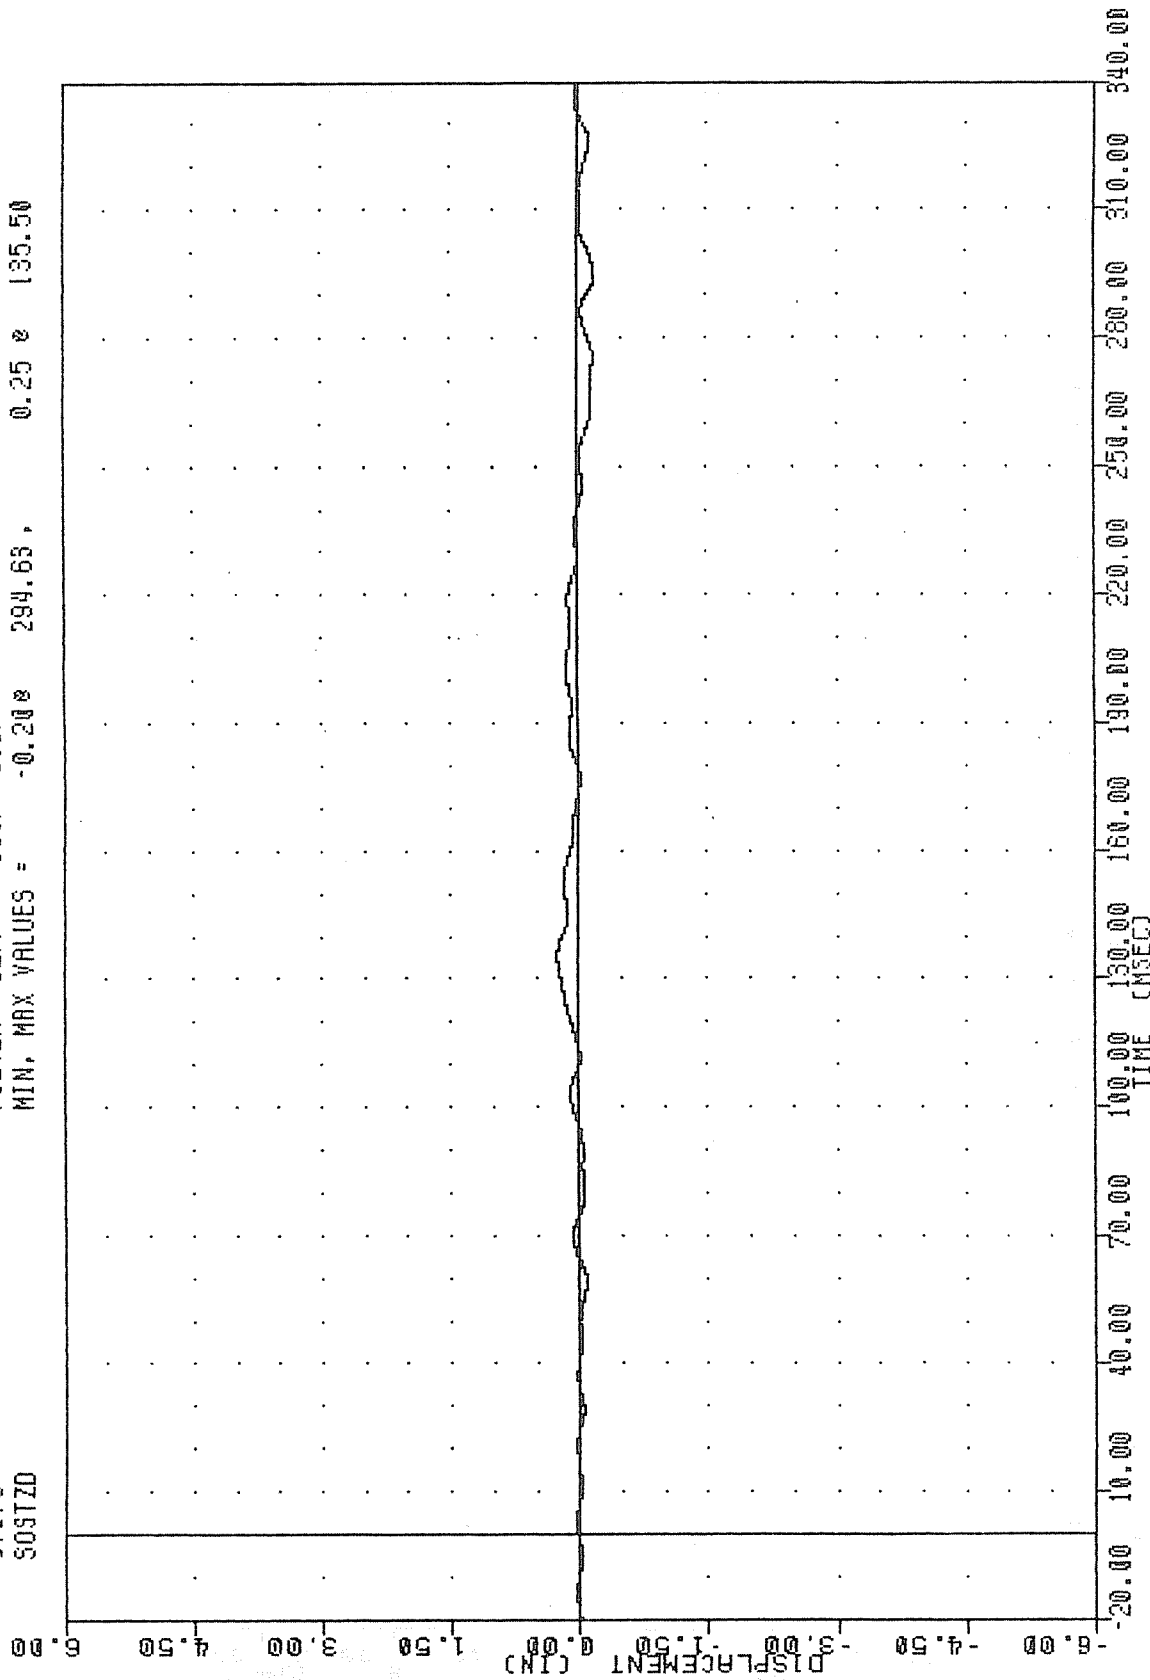


B-43

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD OUTBOARD SEAT TRACK DEFLECTION

FAR , TEST 01
 CRASH SIMULATION
 87276
 L80F2

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -63.12 279.25 334.98 135.75

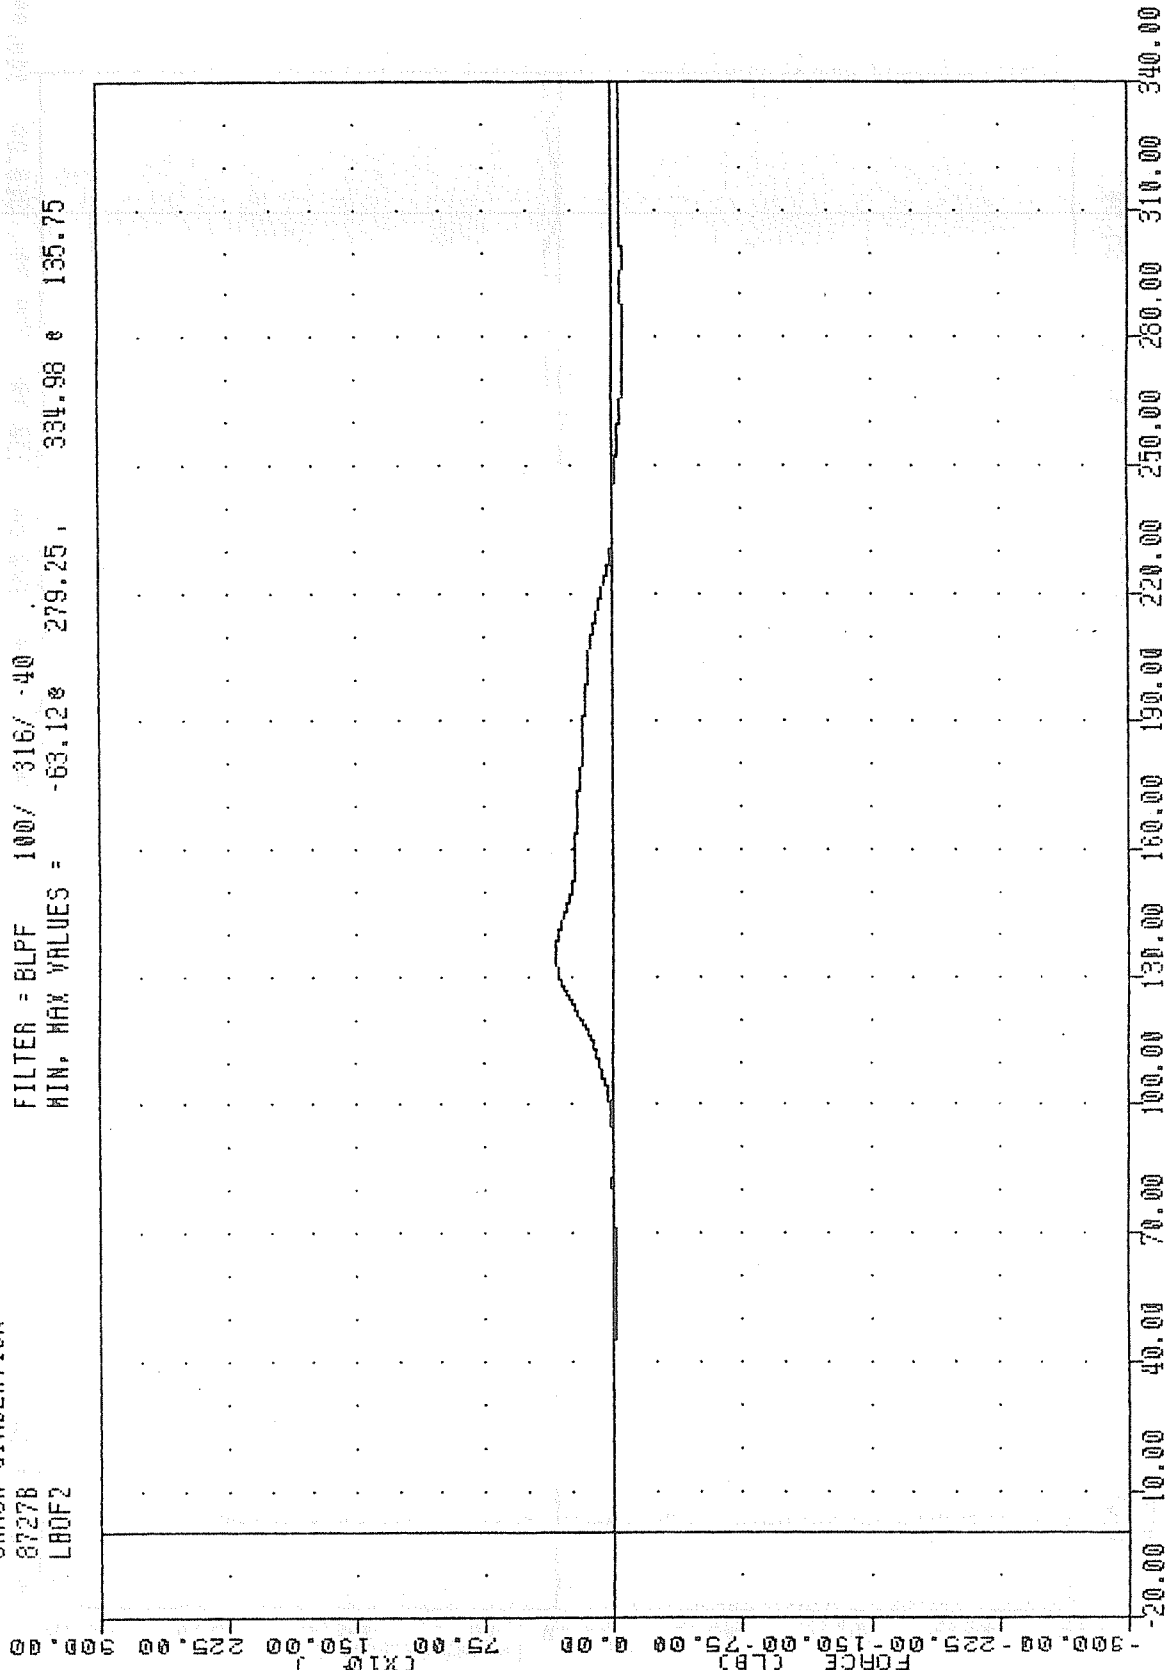


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT C CENTER DUMMY OUTBOARD LAP BELT LOAD

FRA , TEST 01
CRASH SIMULATION

87278
LBIF2

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -0.72g 324.38 , 587.61 g 132.88


FORCE (LB)
TIME (MSEC)

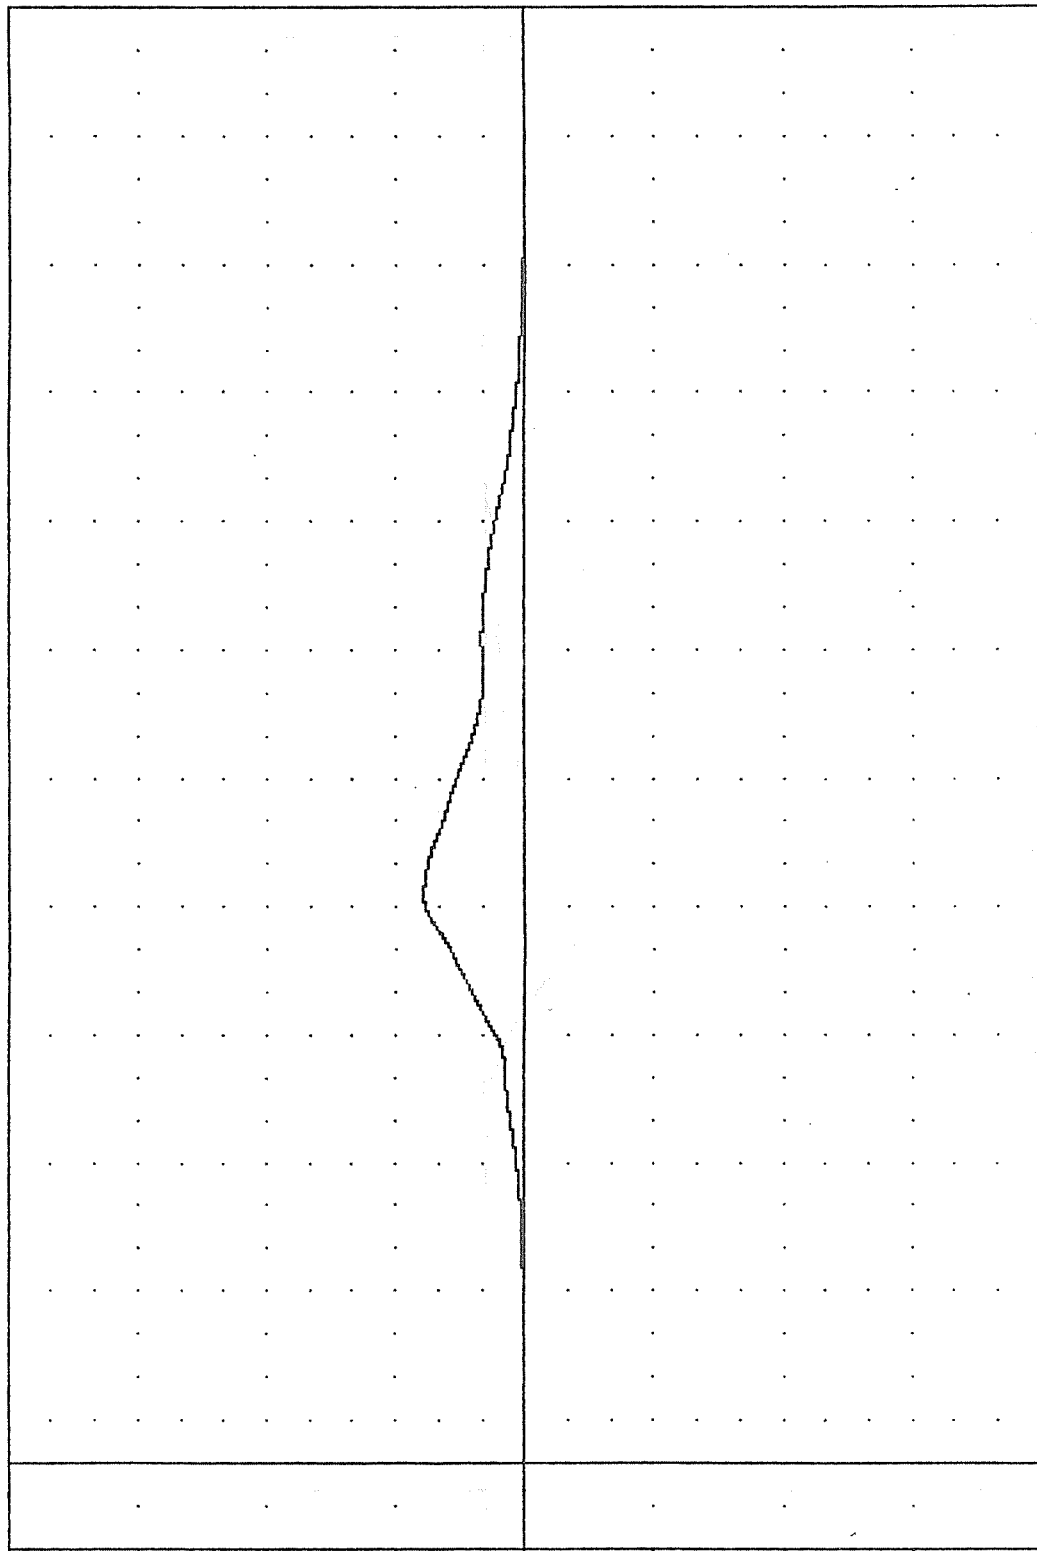

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C CENTER DUMMY INBOARD LAP BELT LOAD

14097
97278

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -13.288

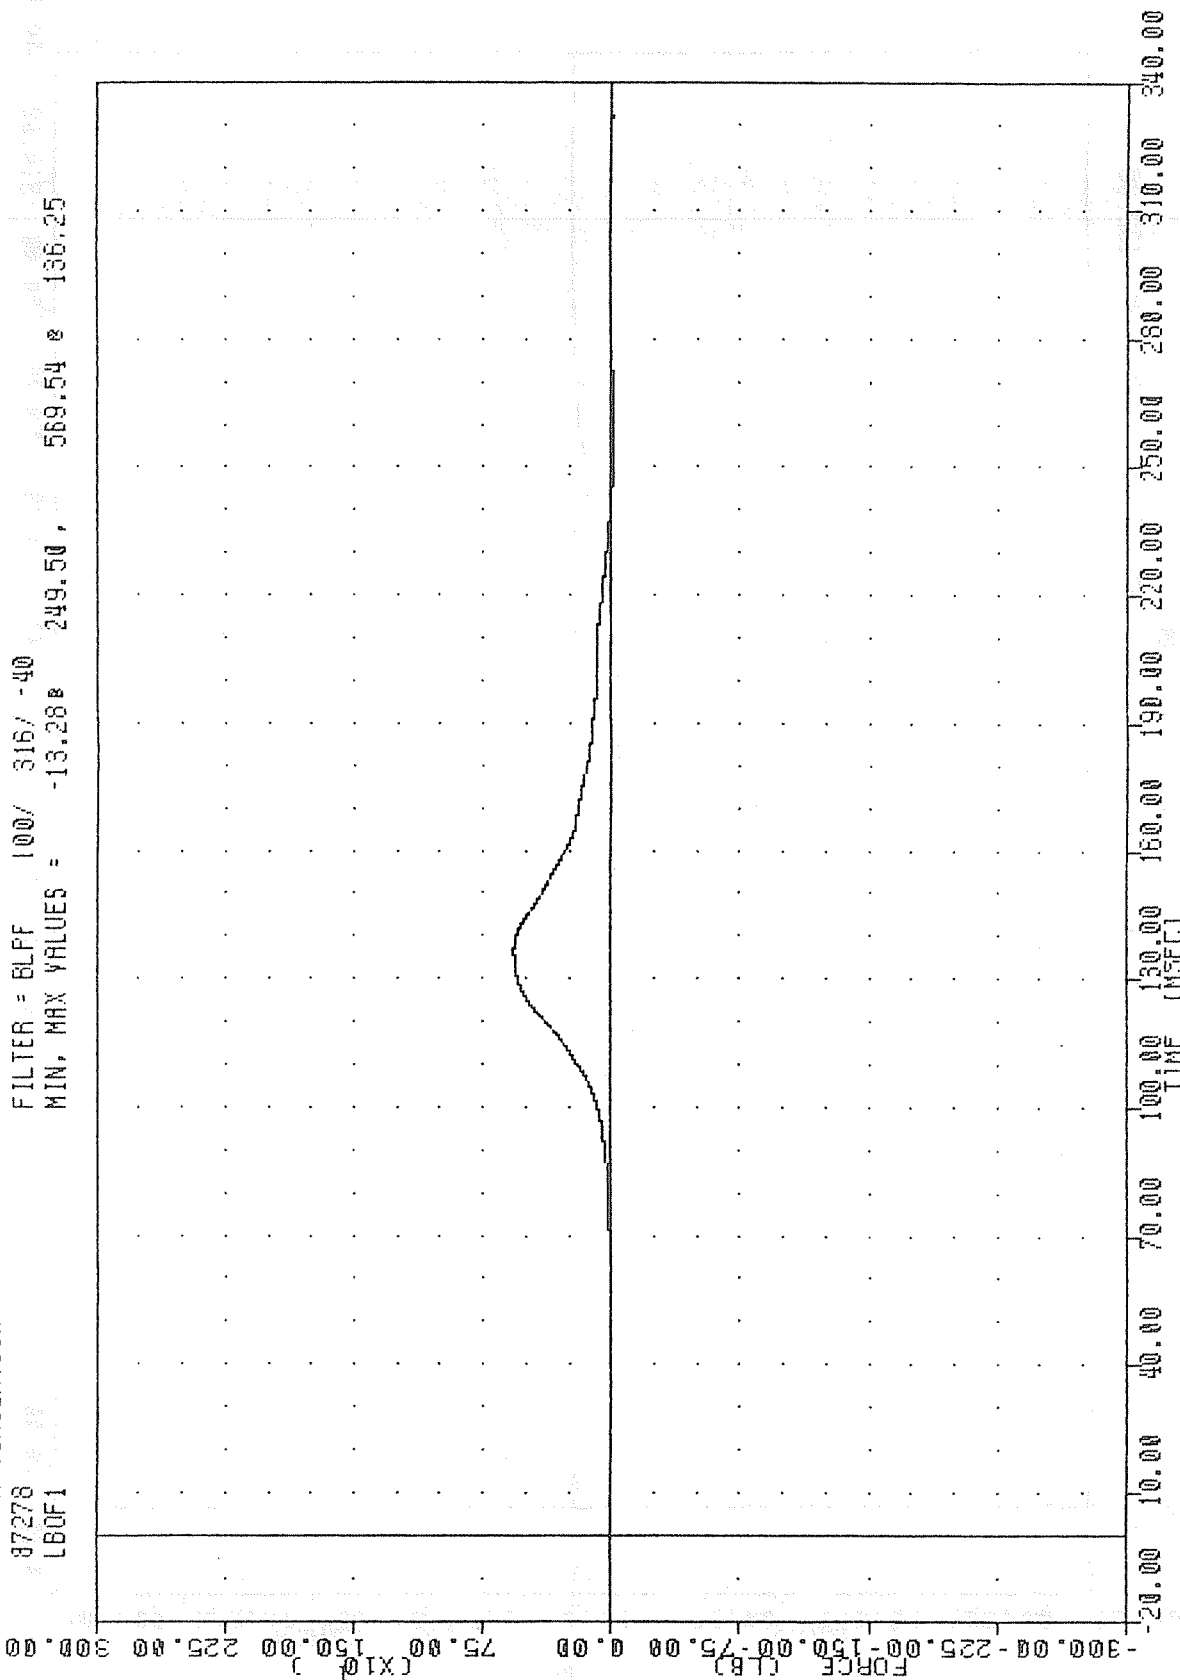

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D CENTER DUMMY OUTBOARD LAP BELT LOAD

FHA TEST 01

CRASH SIMULATION


87278

LBIF1

FILTER = 8LPF 100/ 316/ -40

MIN, MAX VALUES = -2.928 -1.88, 813.28 136.63

FORCE (LB)
-300.00
-225.00
-150.00
-75.00
0.00
75.00
150.00
225.00
300.00

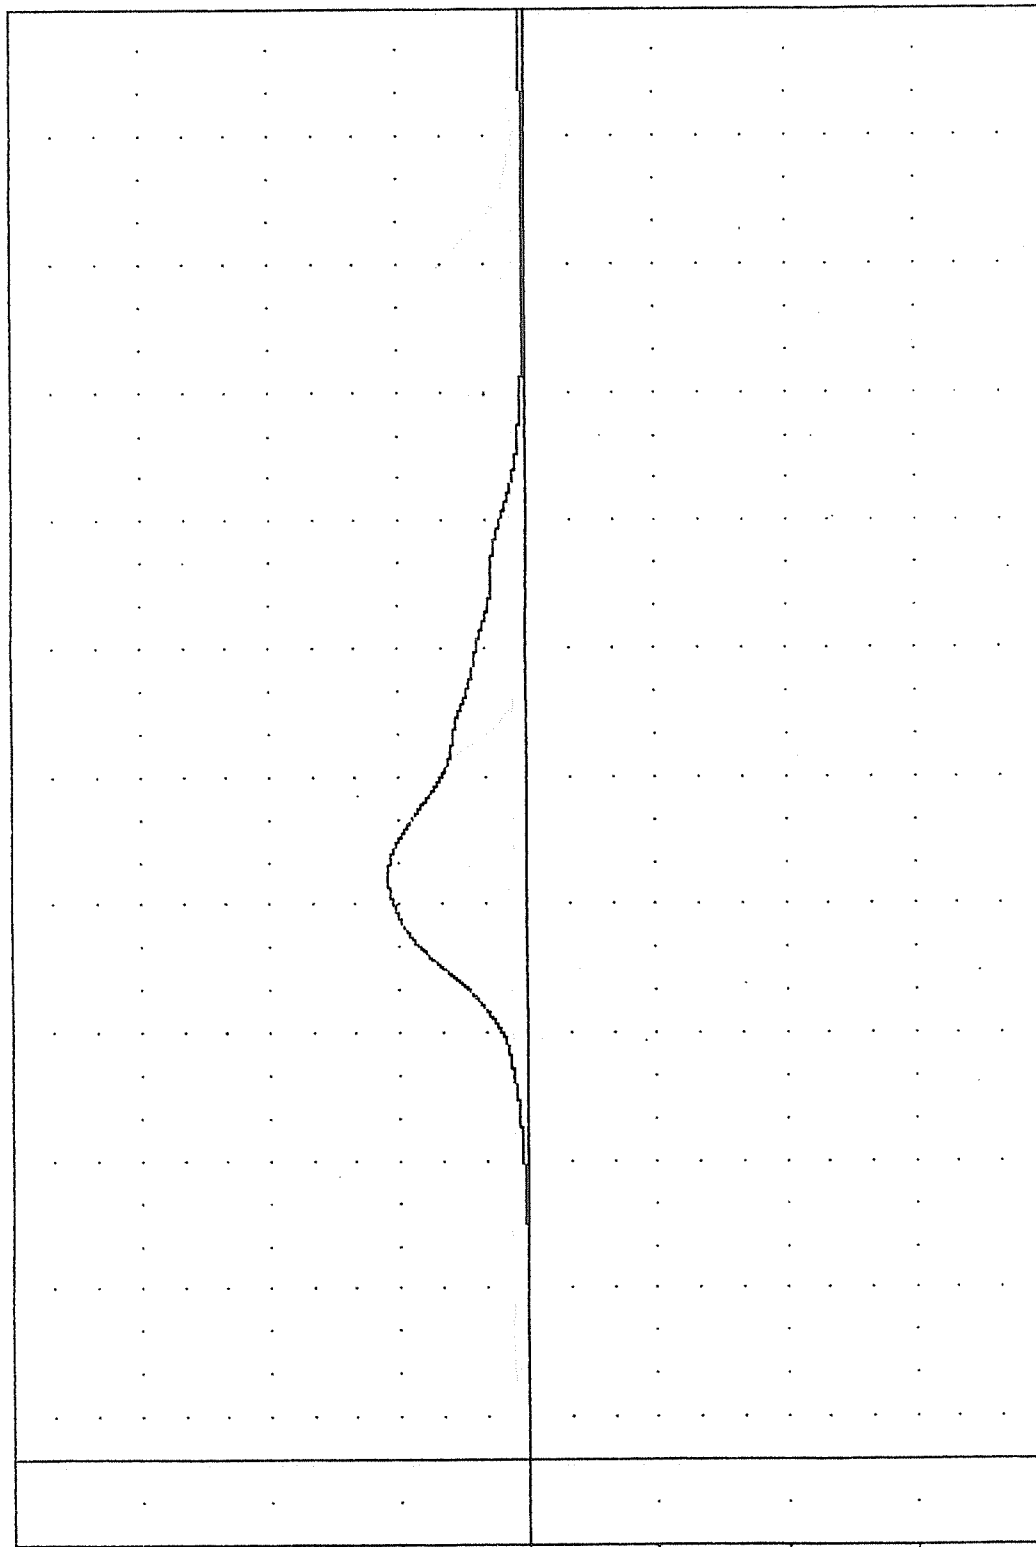

TIME (msec)
-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D CENTER DUMMY INBOARD LAP BELT LOAD

FAR TEST 01

CRASH SIMULATION

87278

POBS


FILTER = BLFF 100/ 316/ -40

MIN. MAX VALUES = -3.17# 269.68#

3.02 # 120.63

VOLTAGE (MW) -20.00 -15.00 -10.00 -5.00 0.00 5.00 10.00 15.00 20.00

B-48

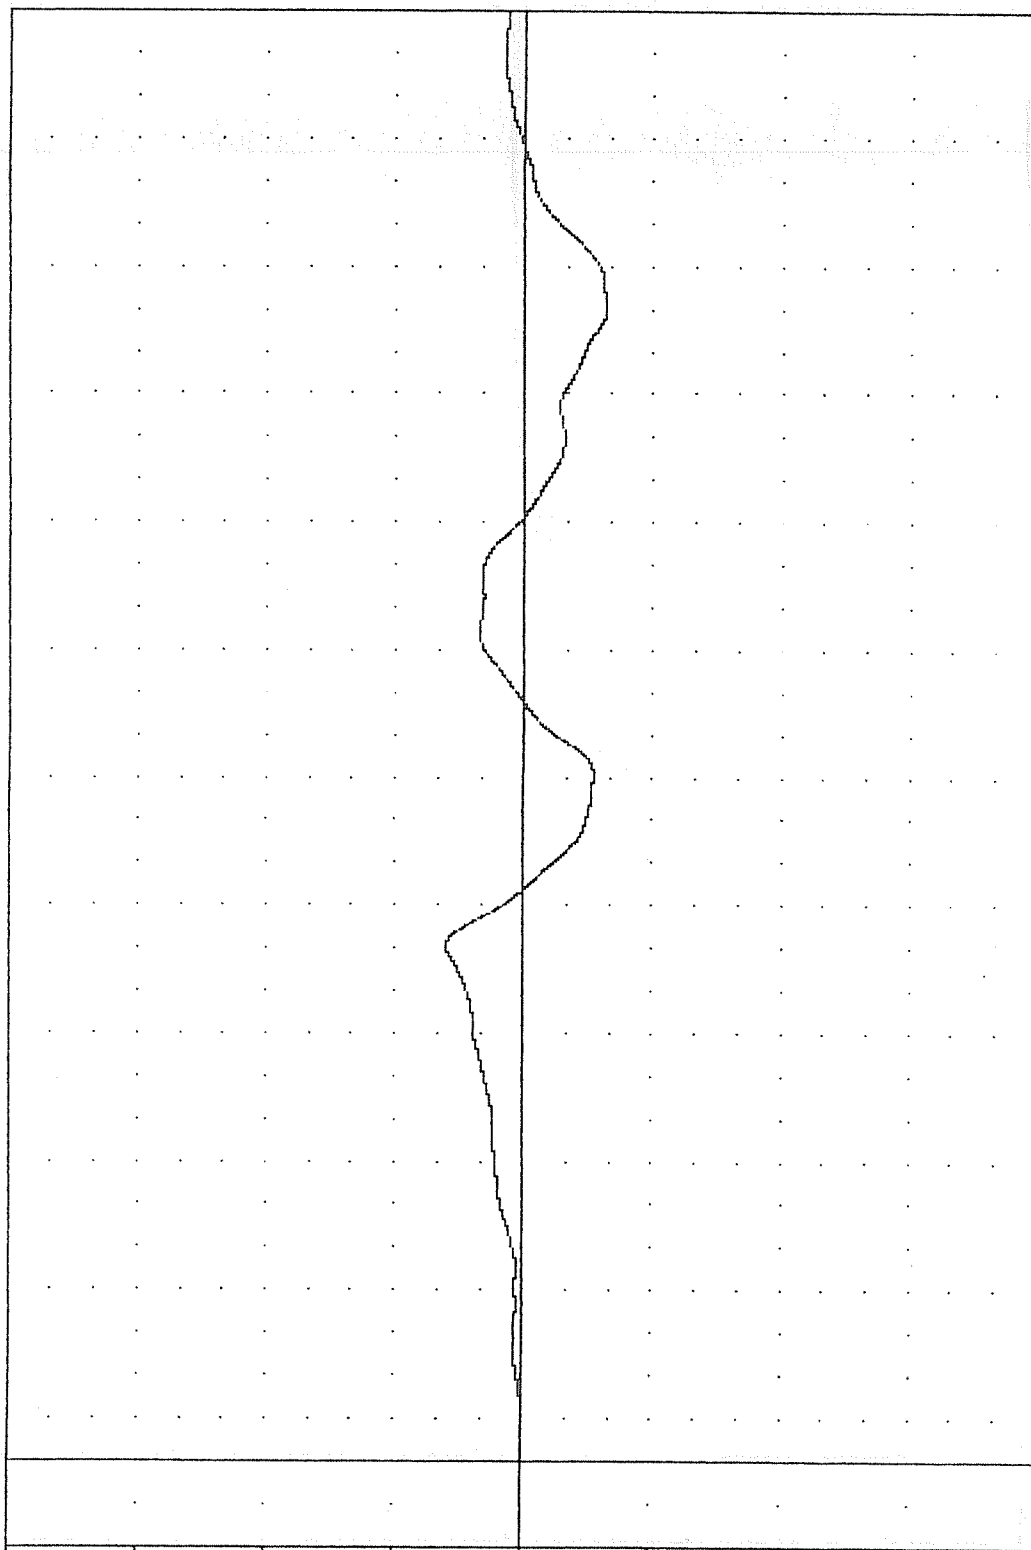


TIME (MSEC) 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

FAR , TEST 01
 CRASH SIMULATION
 87278
 P185

FILTER = 6LPF 100/ 316/ -40
 MIN, MAX VALUES = -5.278 280.00, 6.29 & 143.75

VOLTAGE (MV)
 -20.00
 -15.00
 -10.00
 -5.00
 0.00
 5.00
 10.00
 15.00
 20.00

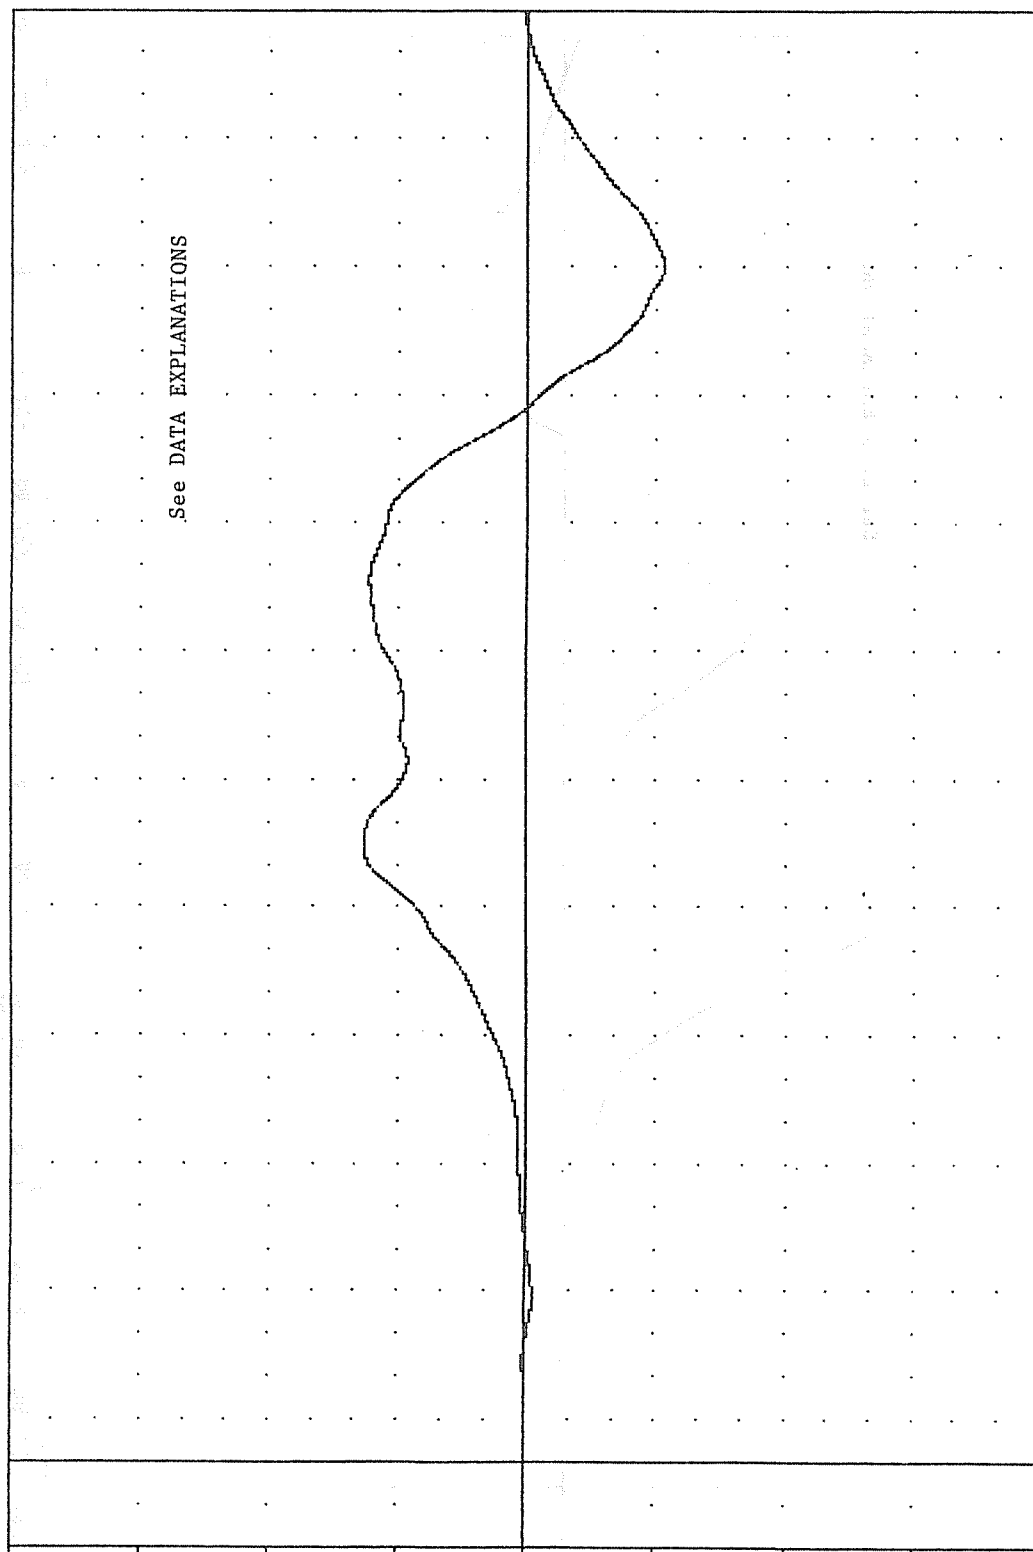


10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00
 TIME (msec)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 PORT INBOARD BEAM STRAIN

FRAH , TEST 01
 CRASH SIMULATION
 87278
 SIBS

FILTER = BLPF 100/ 316/ 40
 MIN. MAX VALUES = -3.74 12.64 135.00

20.00

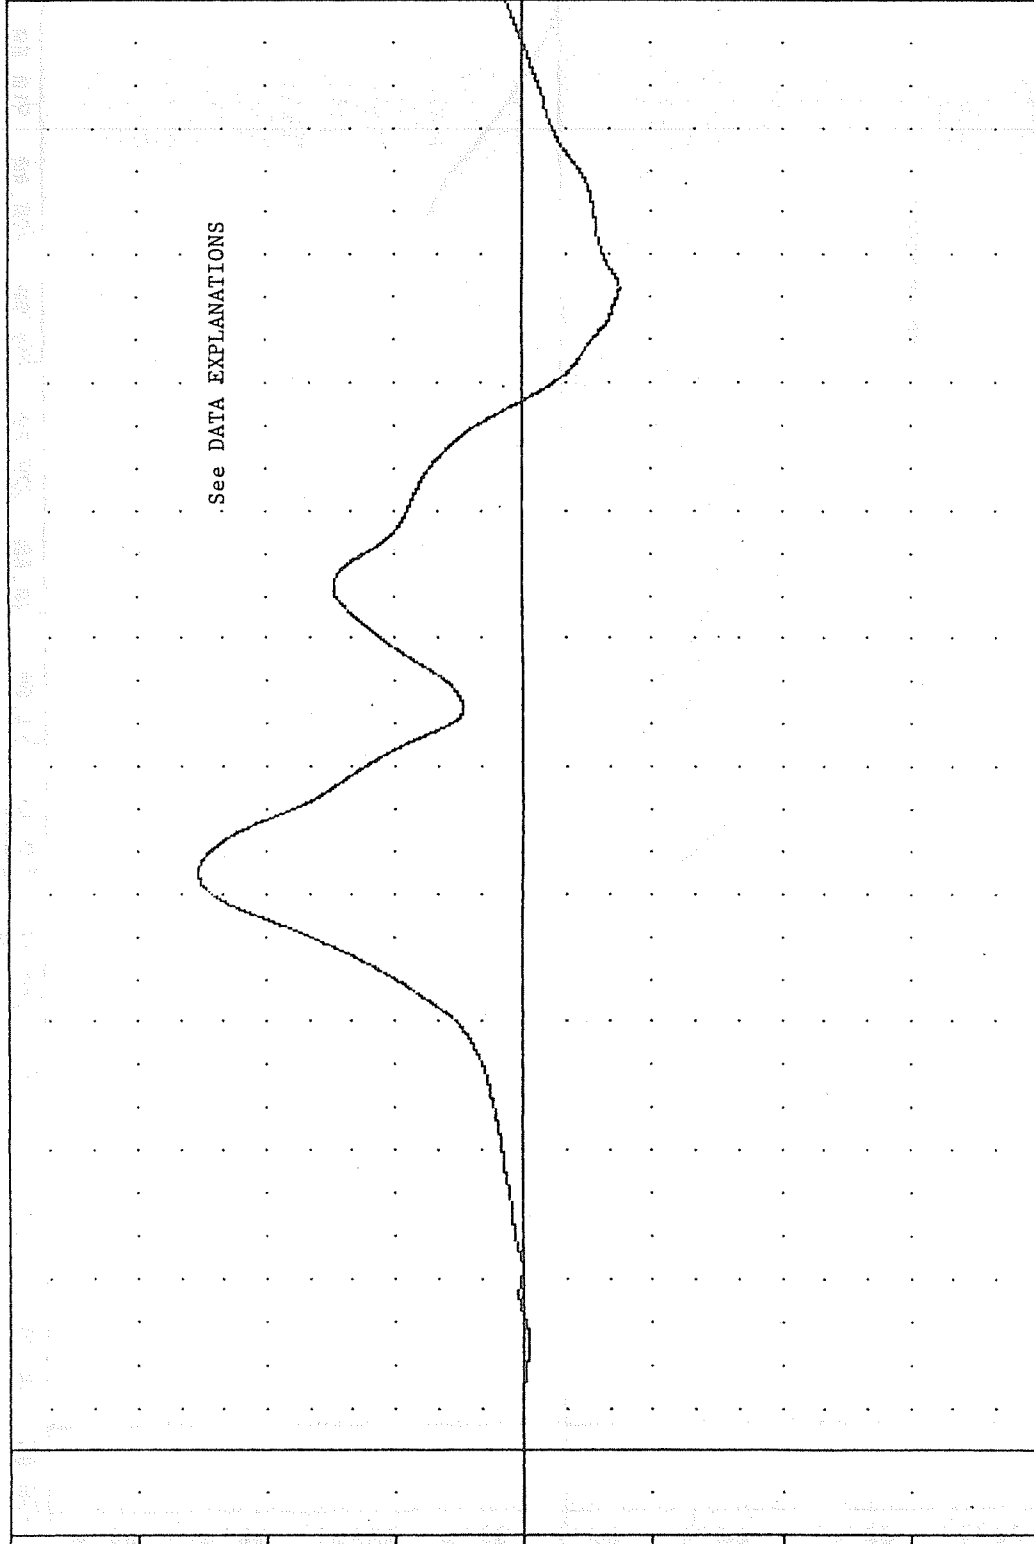

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME CNSEC

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 STARBOARD INBOARD BEAM STRAIN

05-B

FHA , TEST 01


CRASH SIMULATION

87278

50BS

FILTER = 5LFF 100/ 316/ -40

MIN, MAX VALUES = -4.74e 132.75, 1.94e 265.38

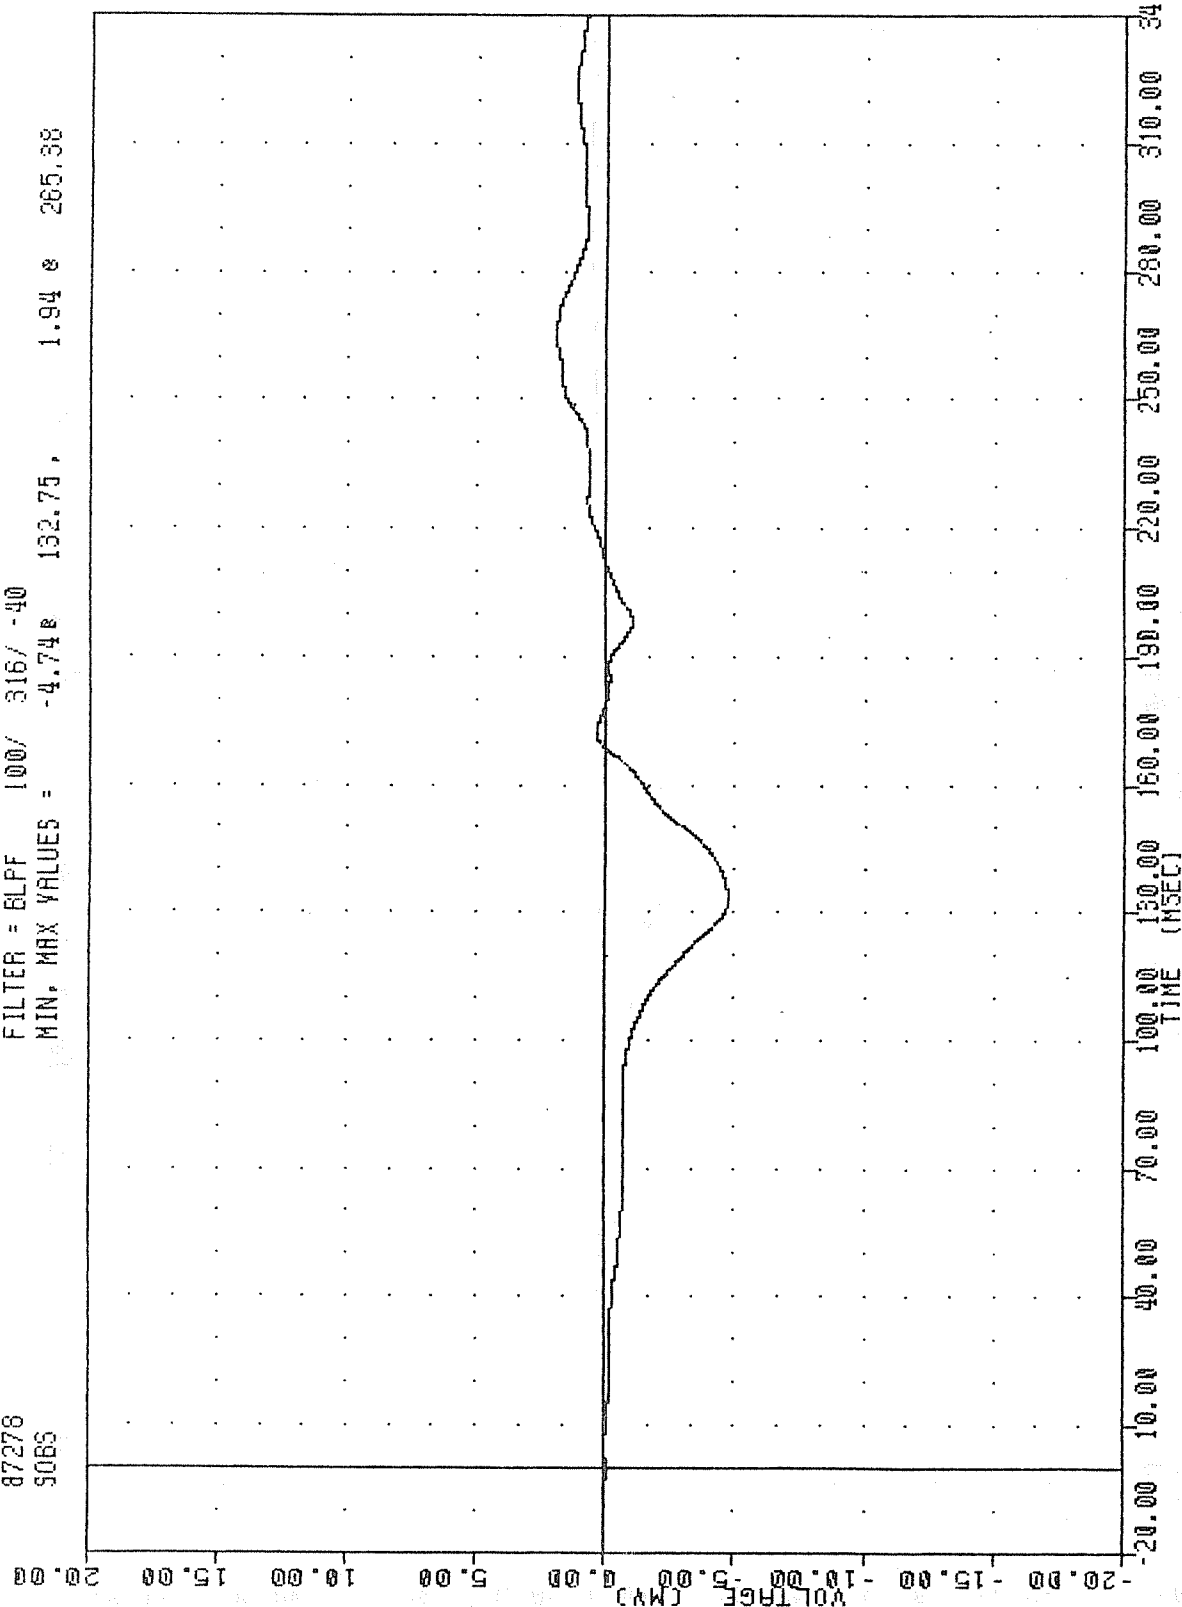


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
STARBOARD OUTBOARD BEAM STRAIN

FRA , TEST 01
 CRASH SIMULATION
 87278
 5A0FL3

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.538 288.63 , 6.43 151.50

VOLTAGE (MV)

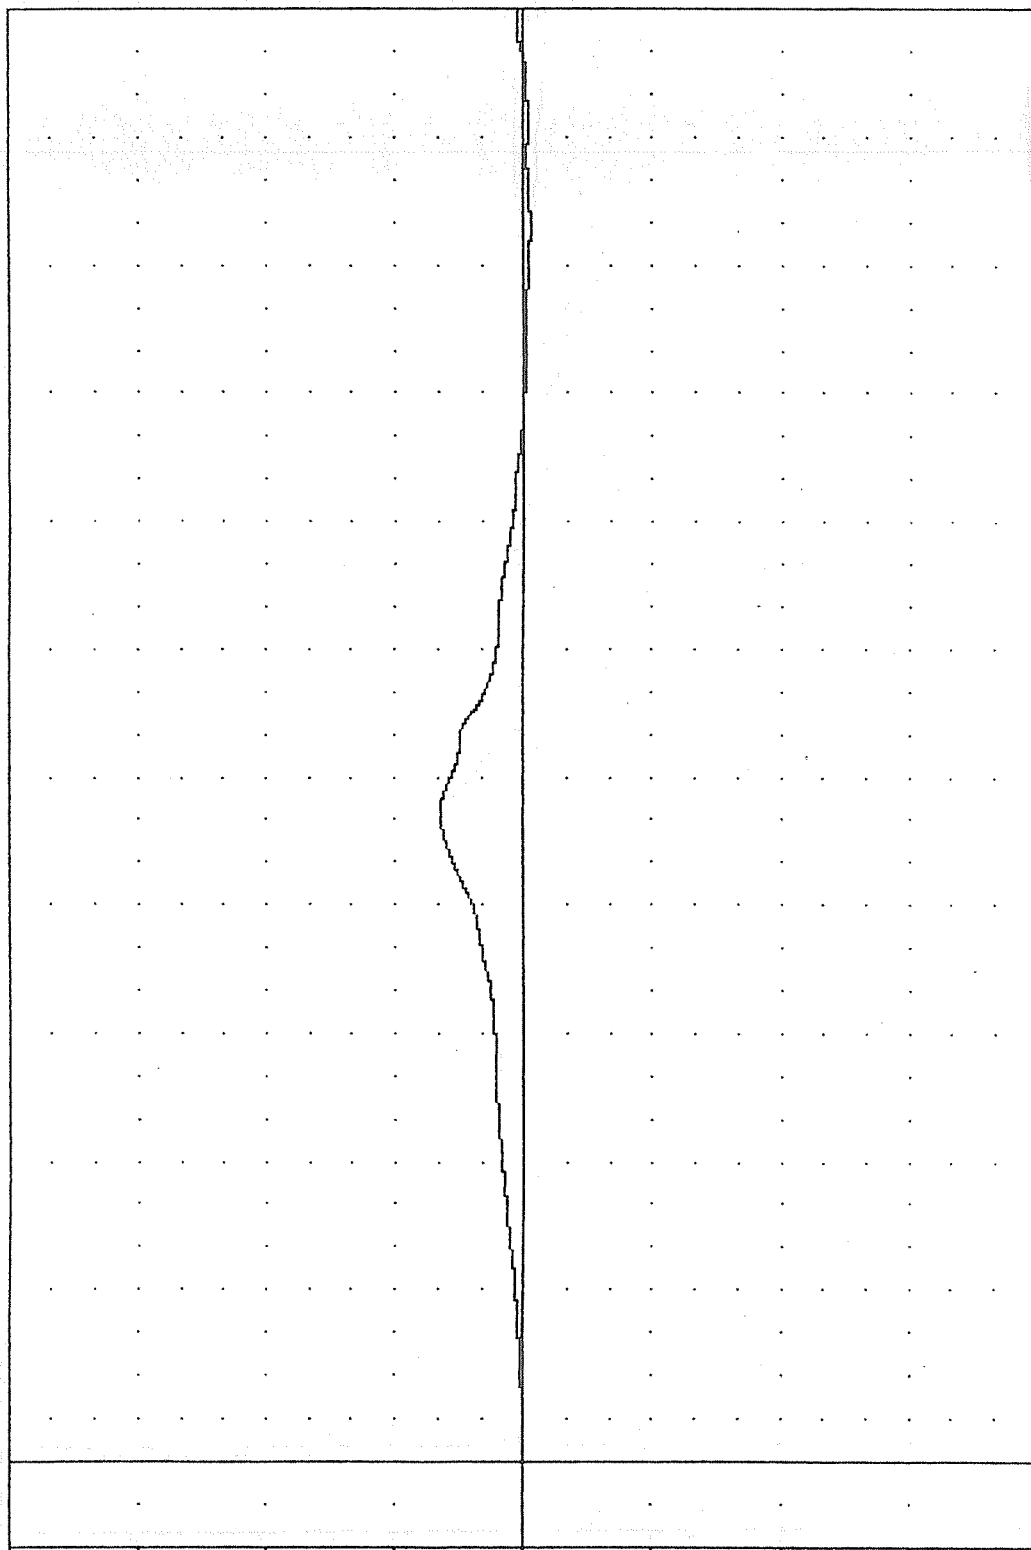


20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT A OUTBOARD FORWARD LEG STRAIN

FHA , TEST 01
 CRASH SIMULATION
 87278
 SADDSS

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -10.438 149.38 , 1.32 316.00

40.00
 30.00
 20.00
 10.00
 0.00
 -10.00
 -20.00
 -30.00
 -40.00

B-53

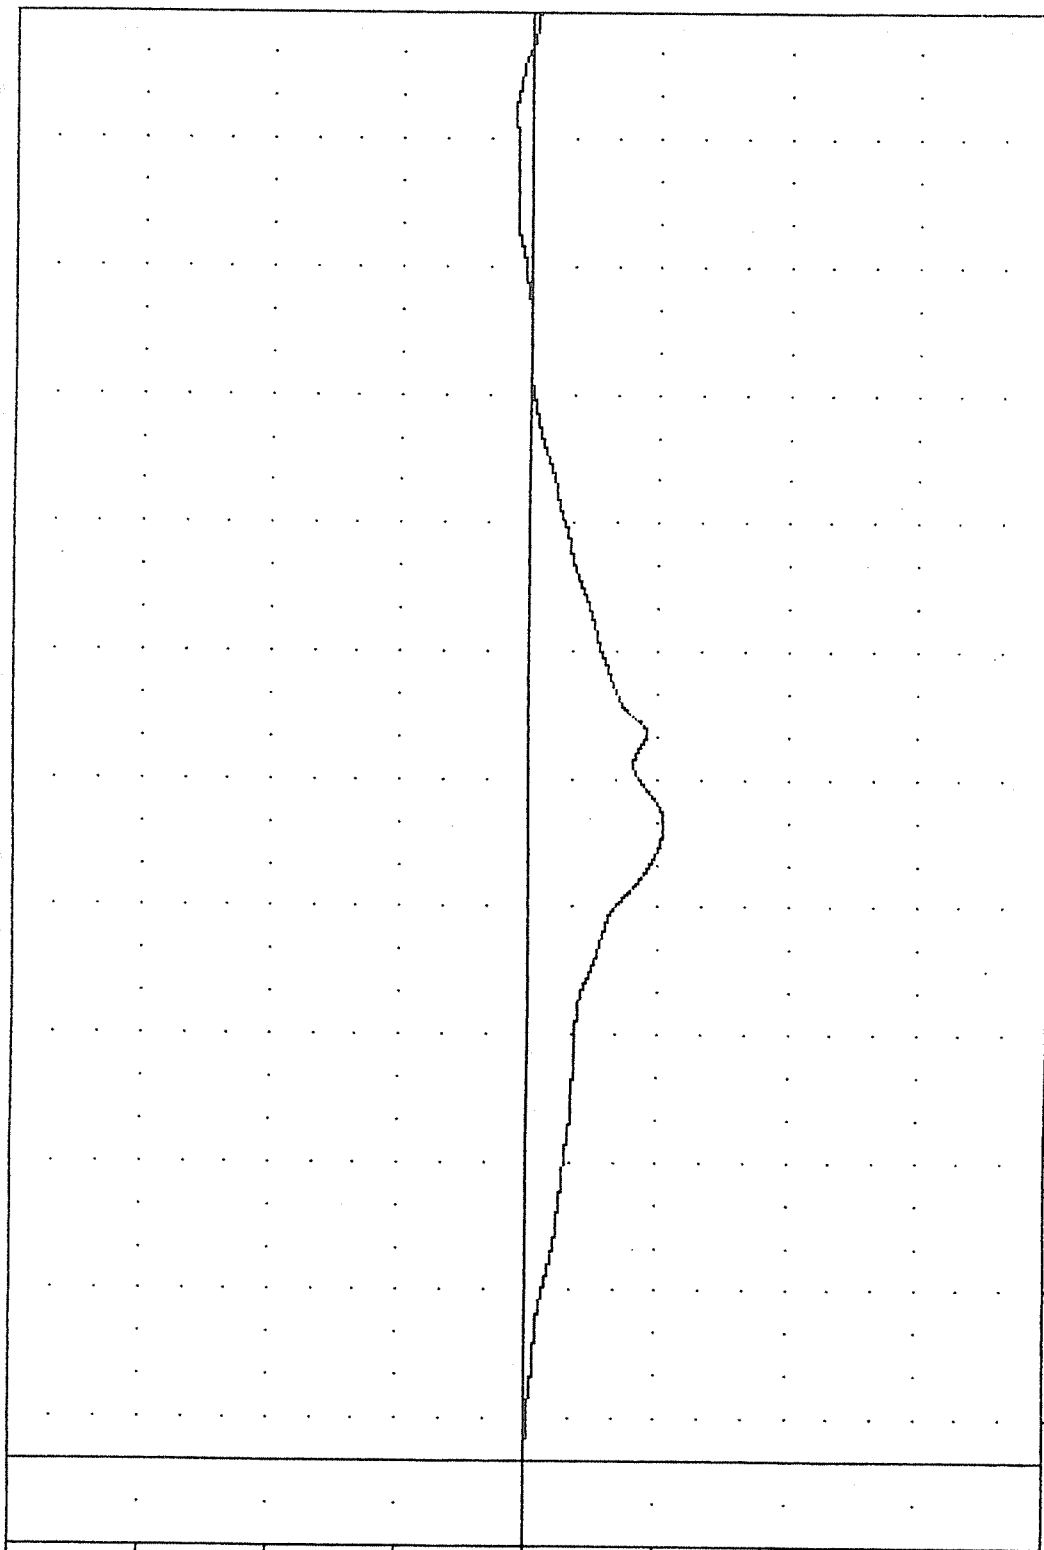

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT A OUTBOARD DIAGONAL STRUT STRAIN

FRA , TEST 01

CRASH SIMULATION

87278


SBIFLS

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -5.29 139.36 , 1.79 302.38

VOLTAGE (MV)

40.00 30.00 20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00

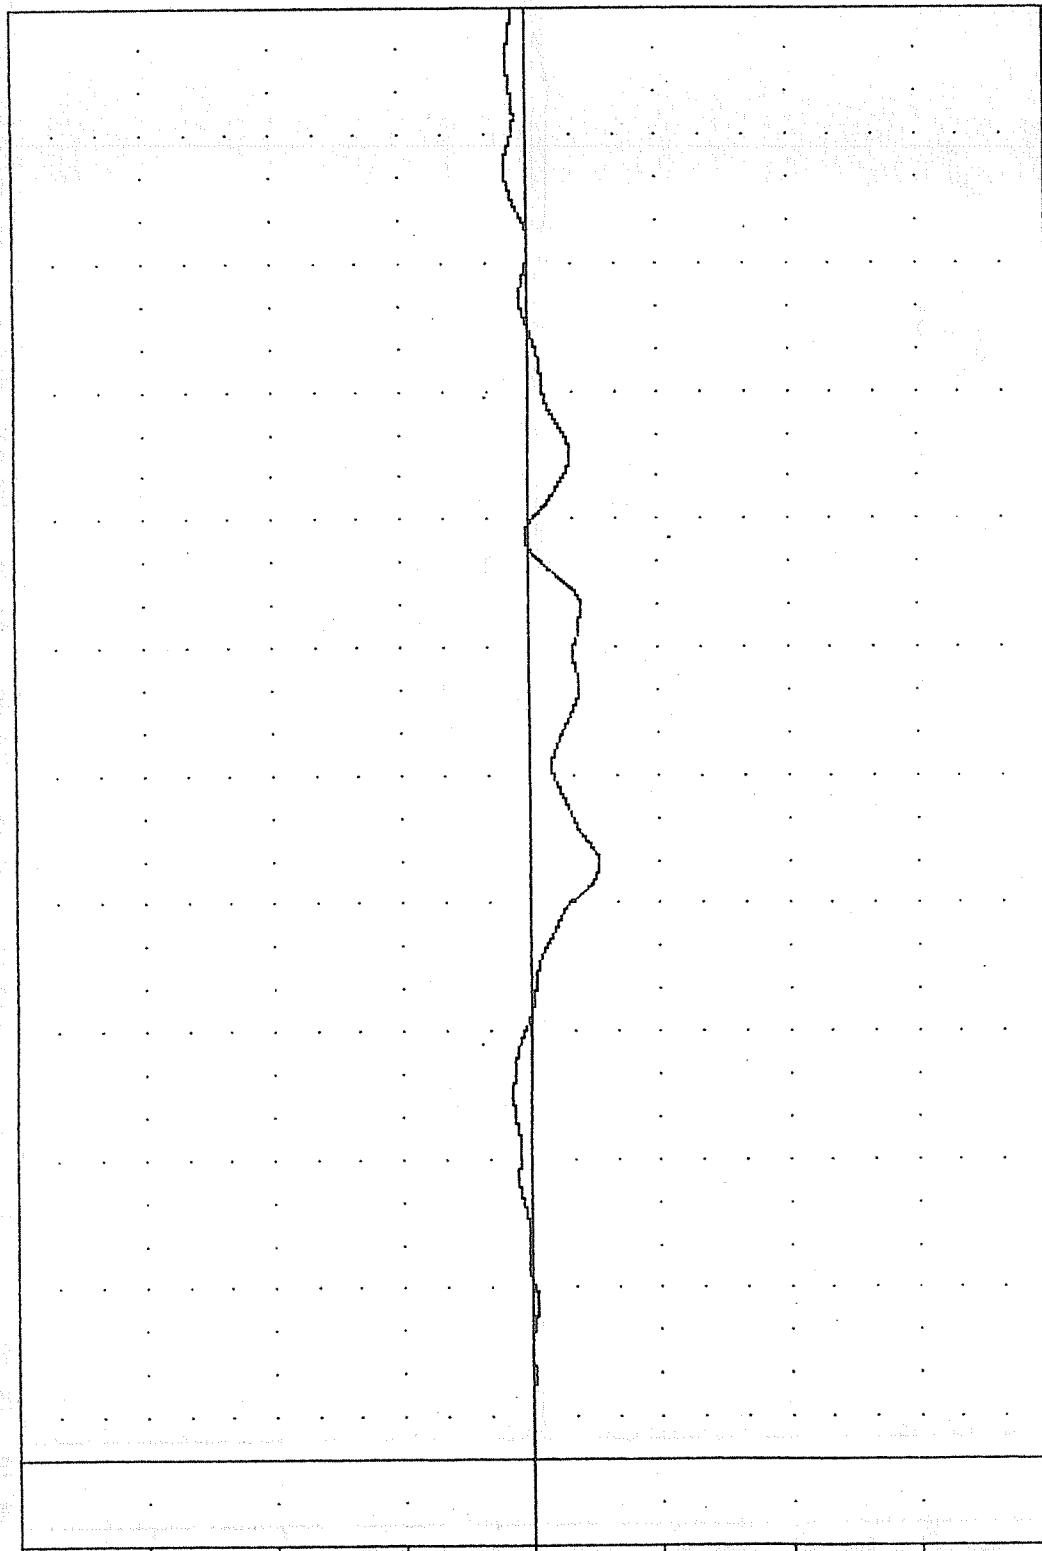


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION

SEAT B INBOARD FORWARD LEG STRAIN

FRA , TEST 01
 CRASH SIMULATION
 87278
 SCOFLS

FILTER = 6LFF 100/ 316/ -40
 MIN, MAX VALUES = -13.51 144.25, 5.60 265.63

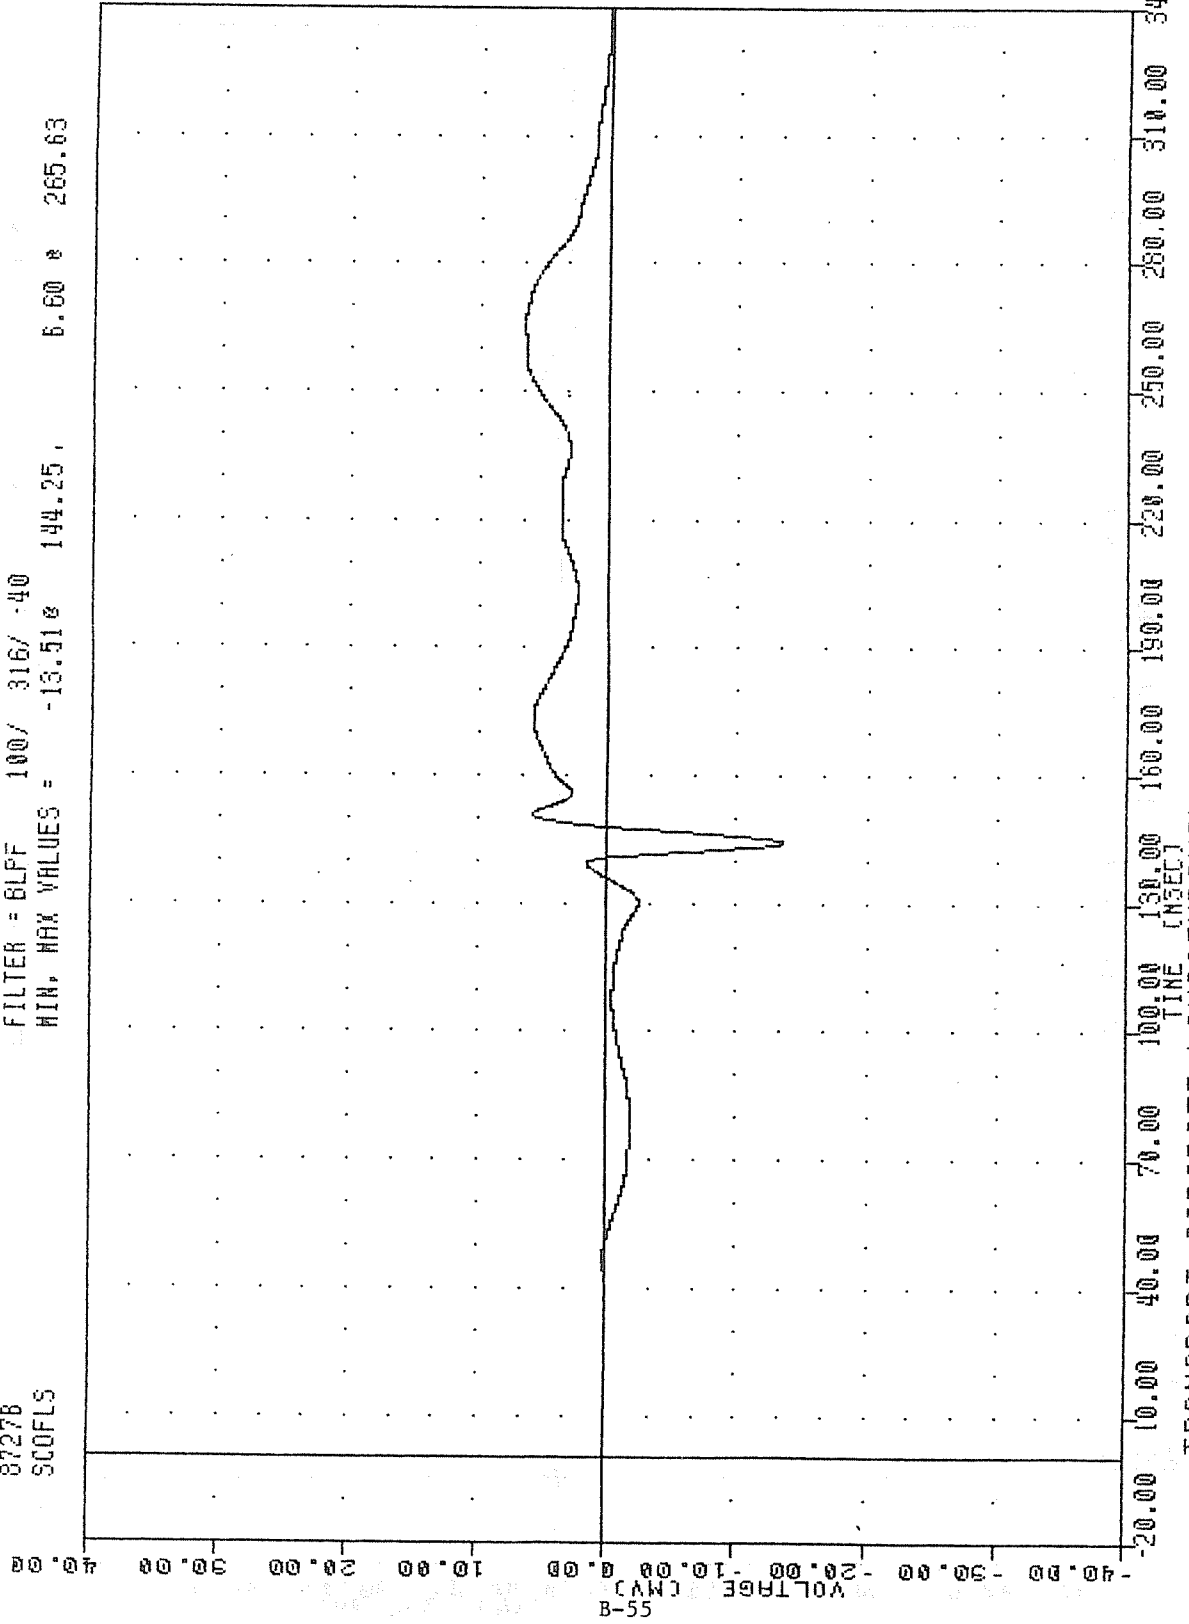


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT C OUTBOARD FORWARD LEG STRAIN

FRA , TEST 01
 CRASH SIMULATION
 87278
 900059

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -8.27e 124.75, 1.06 e 300.00

VOLTAGE (MV)

B-56

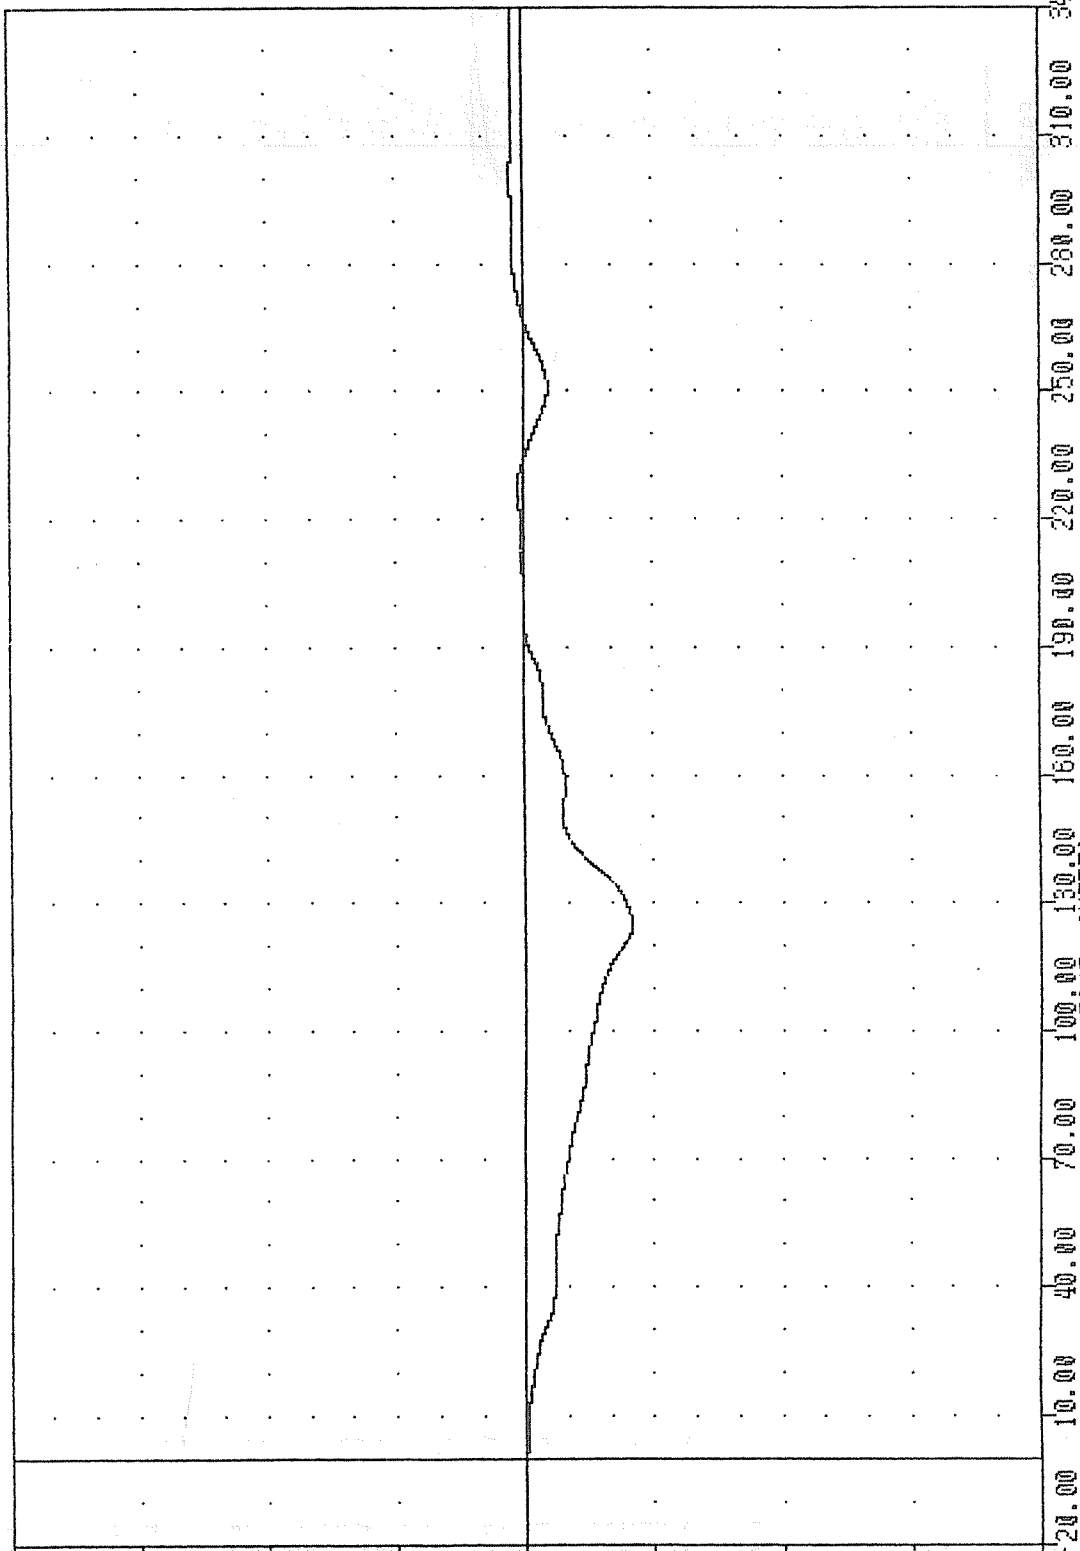

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT C OUTBOARD DIAGONAL STRUT STRAIN


FAR , TEST 01
CRASH SIMULATION

87278
SCIFLS

FILTER = BLFF 100/ 316/ -40
MIN, MAX VALUES = -2.29e 201.63 , 3.76 e 258.25

VOLTAGE CMVJ


B-57

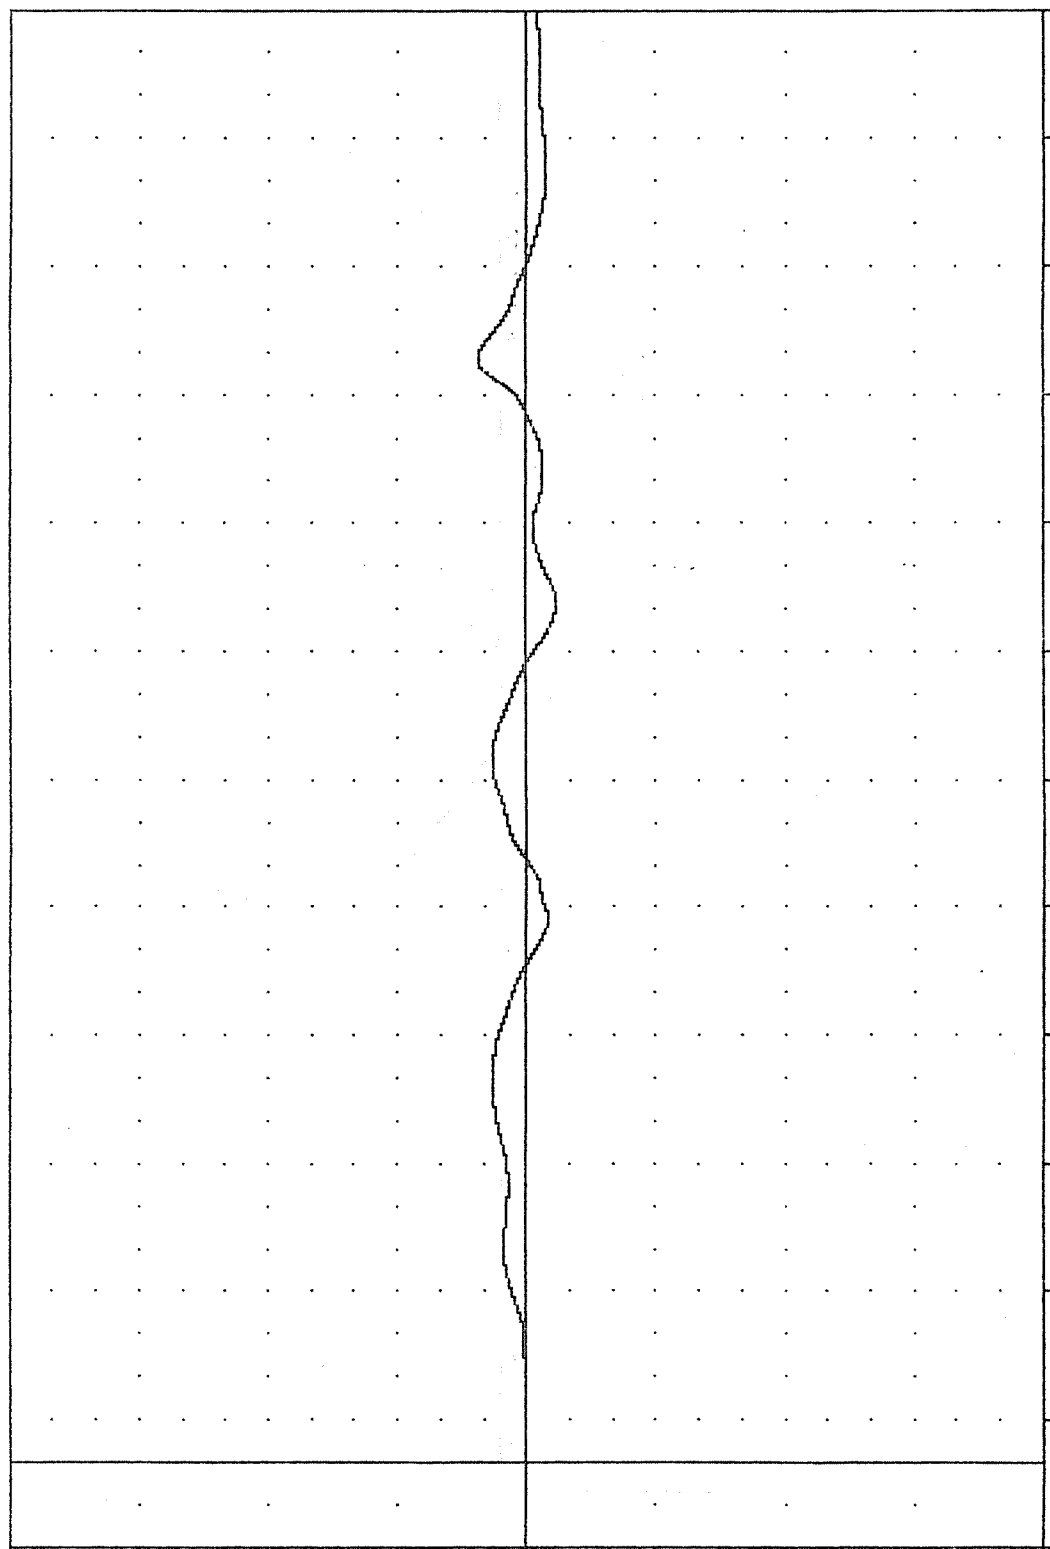

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C INBOARD FORWARD LEG STRAIN

FRA
CRASH SIMULATION
8727B
SCIDSS


FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -7.11e 143.50 , 1.09 e 275.13

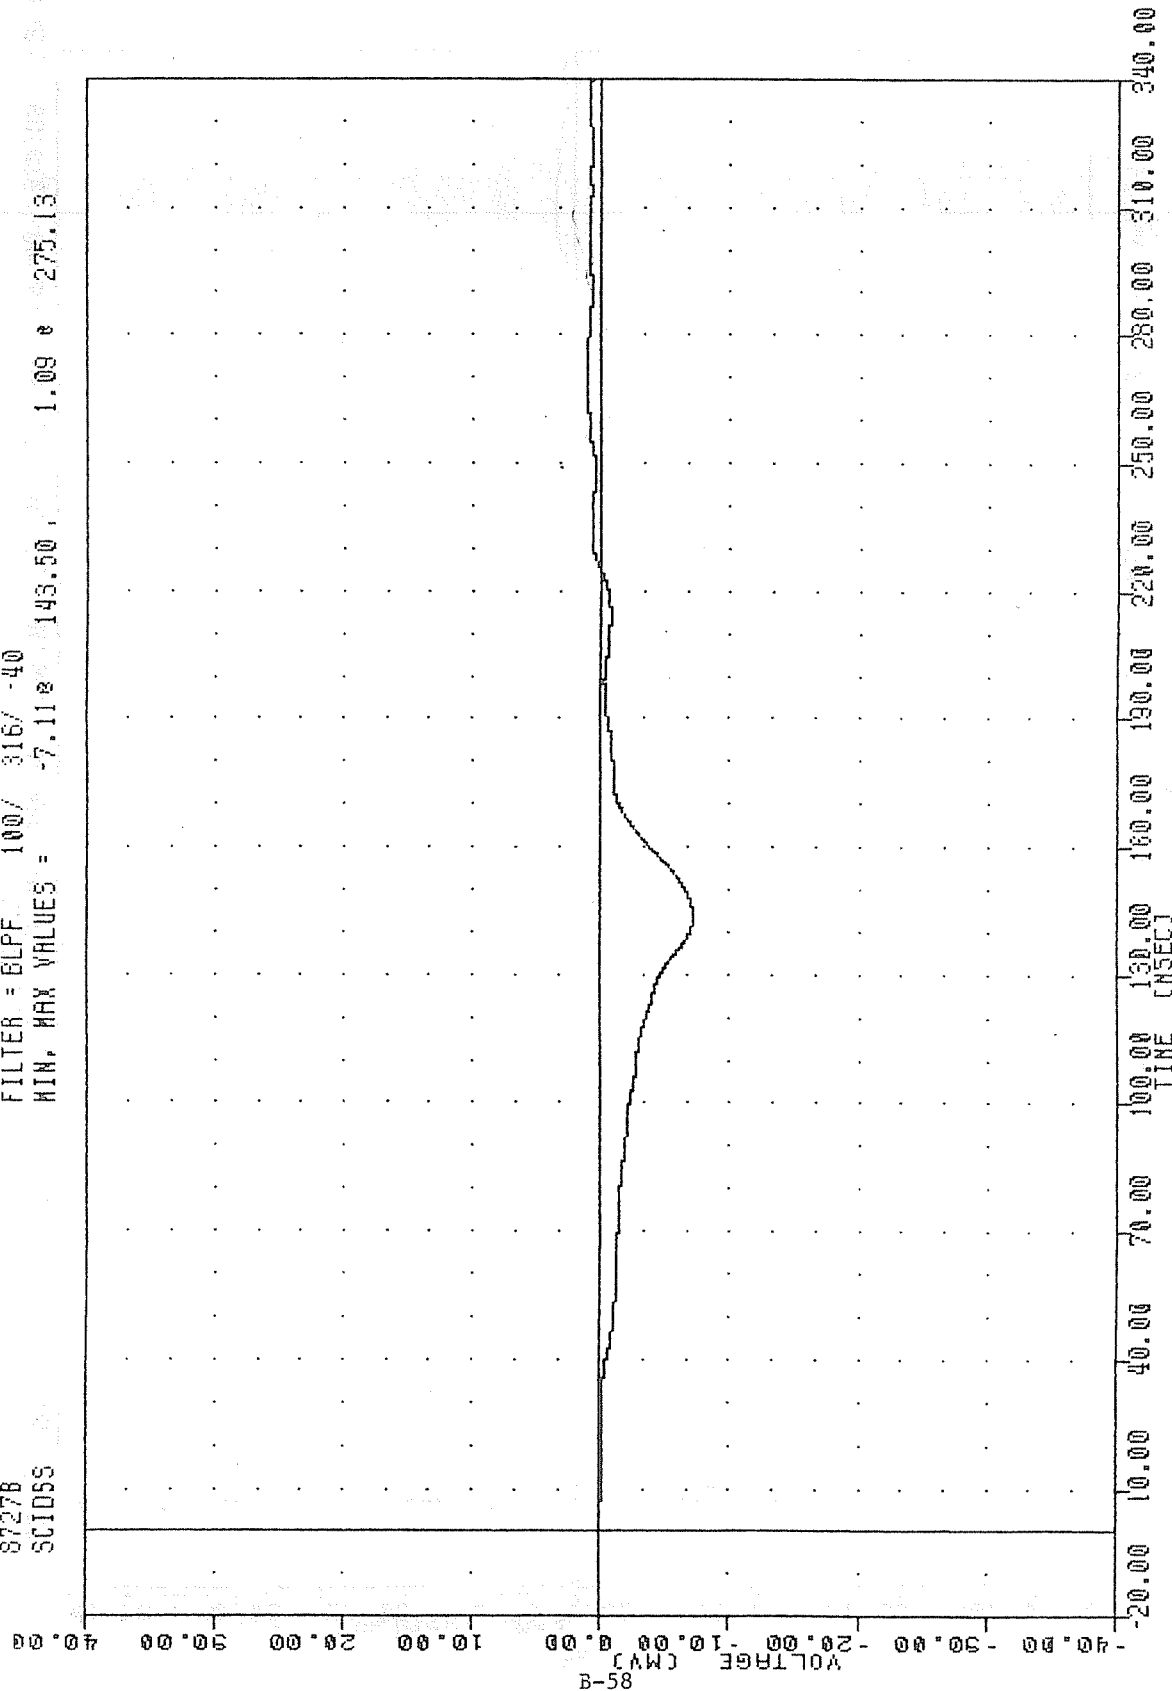

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT C INBOARD DIAGONAL STRUT STRAIN

FRA
CRASH SIMULATION
87278
500FLS

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -0.11e 324.88, 7.14 e 147.00

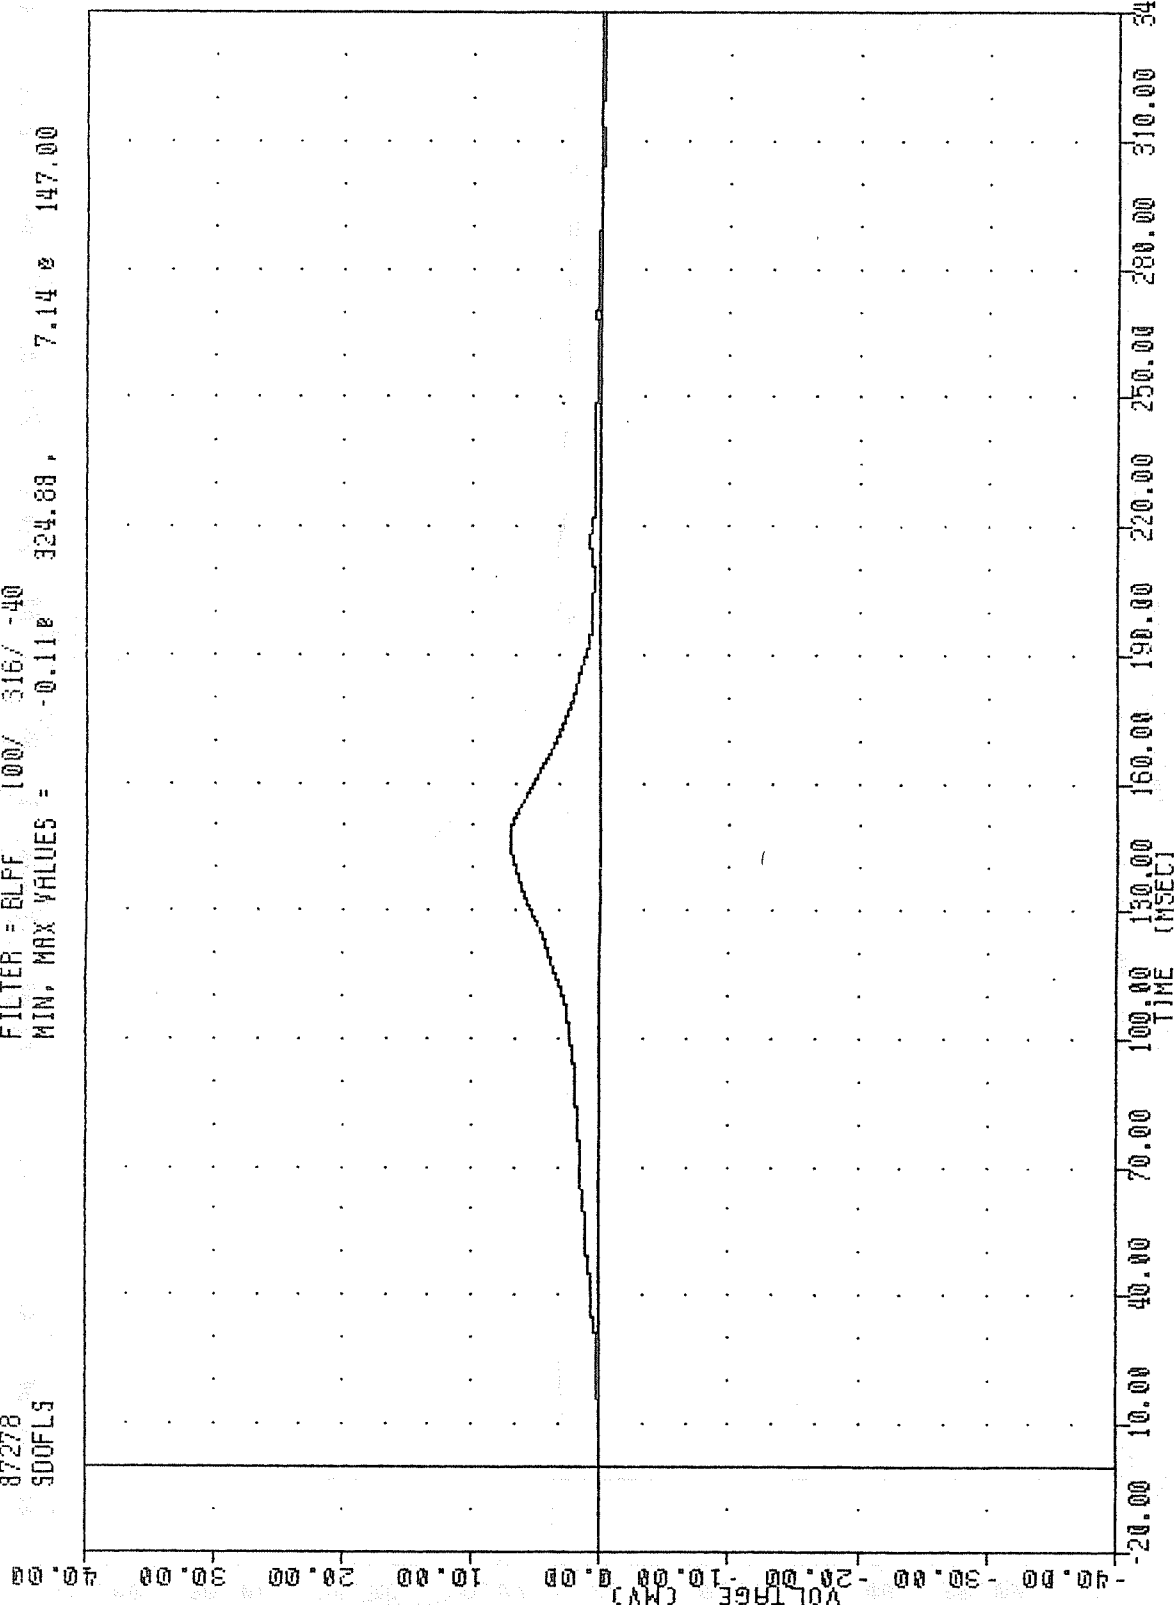

B-59


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D OUTBOARD FORWARD LEG STRAIN

FAR , TEST 01
CARSH SIMULATION
87278
SD00SS

FILTER = 6LFF 100/ 316/ -40
MIN, MAX VALUES = -10.698 145.75 , 1.28 305.00

VOLTAGE (MW)
-40.00 -30.00 -20.00 -10.00 0.00 10.00 20.00 30.00 40.00

B-60

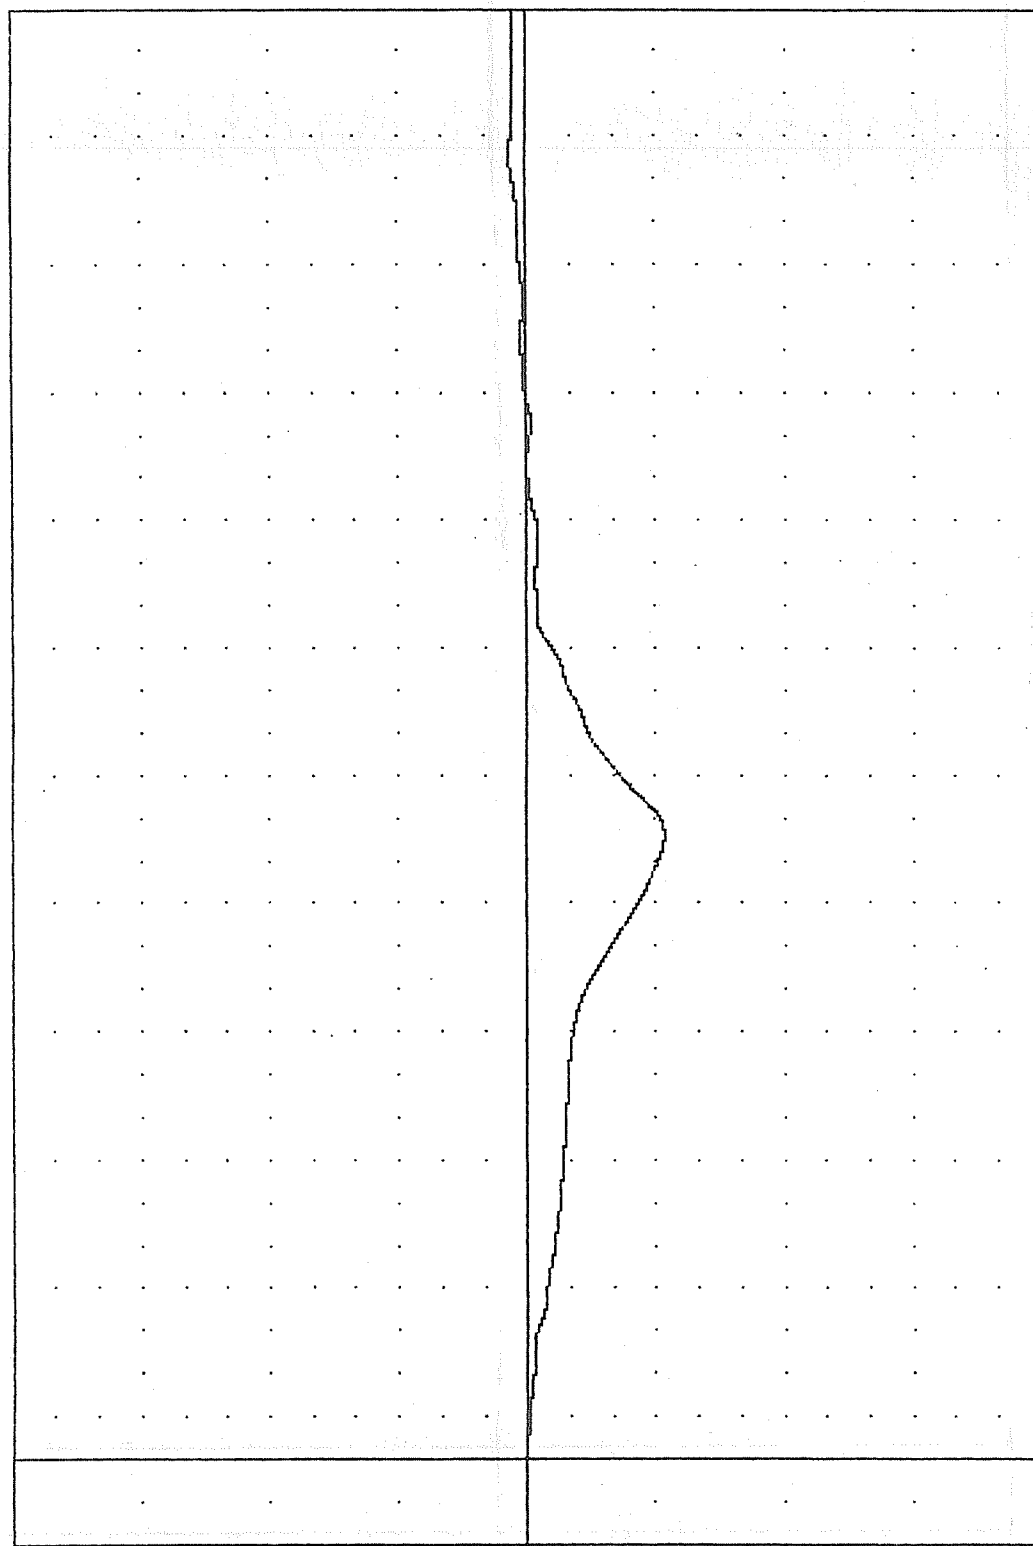


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)
TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT D OUTBOARD DIAGONAL STRUT STRAIN

FHA , TEST 01
 CRASH SIMULATION
 87276
 SOIFLS

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -0.270 257.75 , 4.97 e 136.13

VOLTAGE (MVD)

B-61

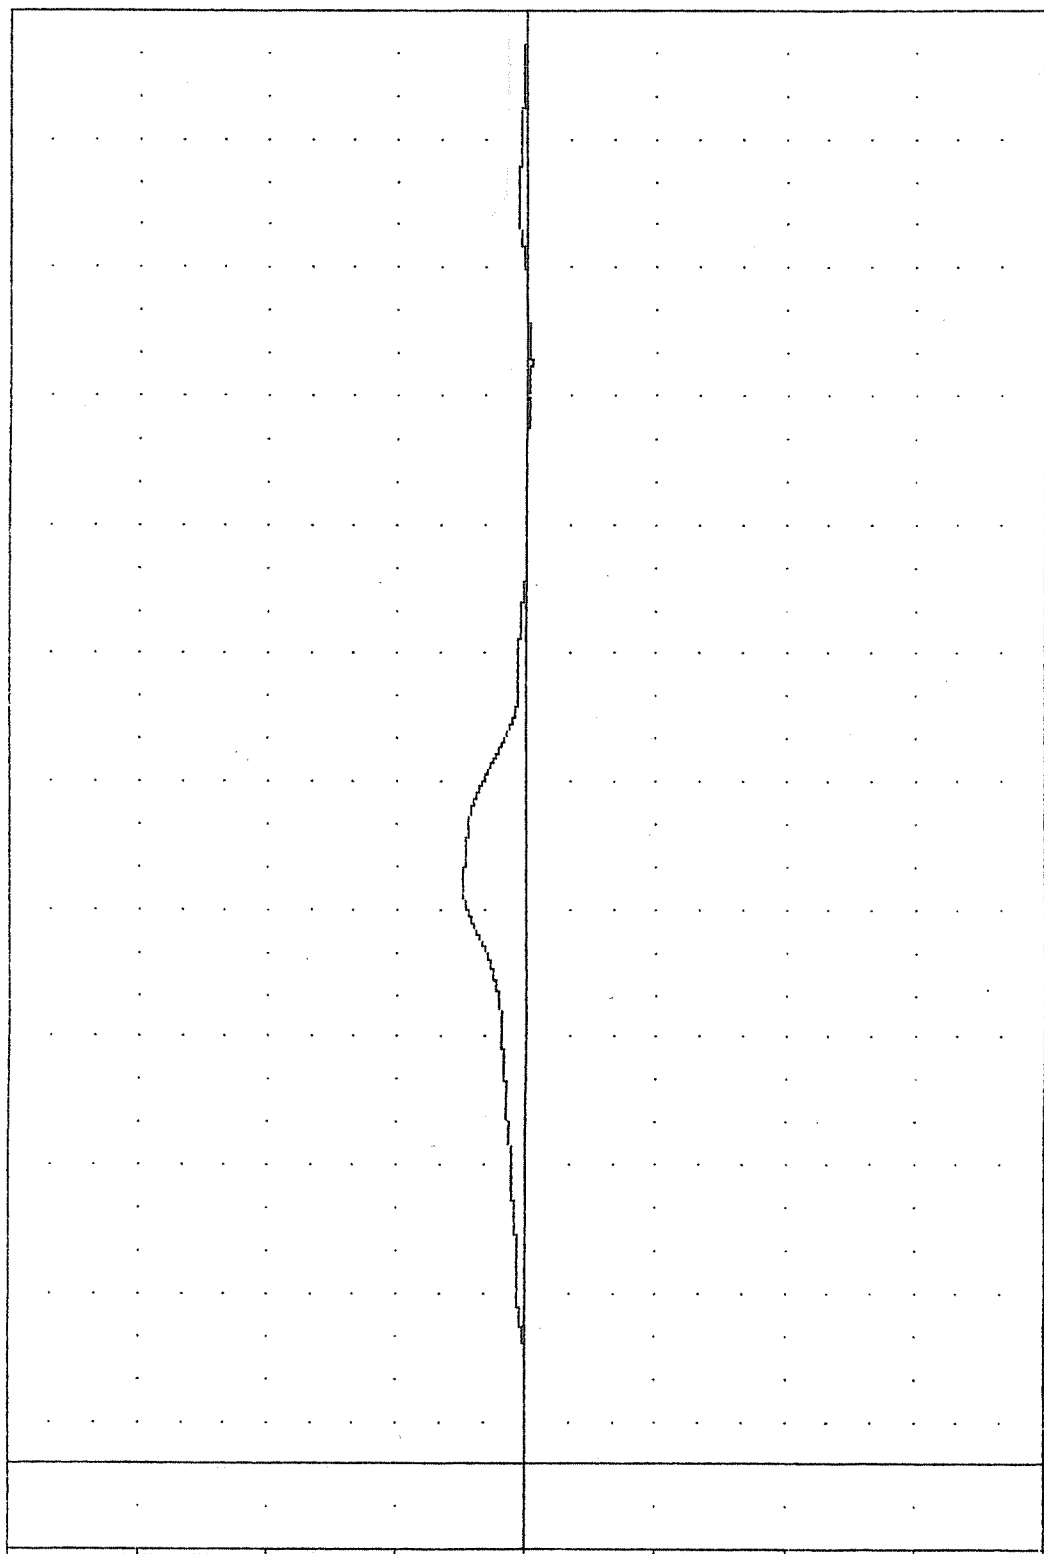


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT D INBOARD FORWARD LEG STRAIN

FAH , TEST 01
 CRASH SIMULATION
 87278
 501033

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -7.11E 155.38, 0.36 E 268.63

VOLTAGE (MV)

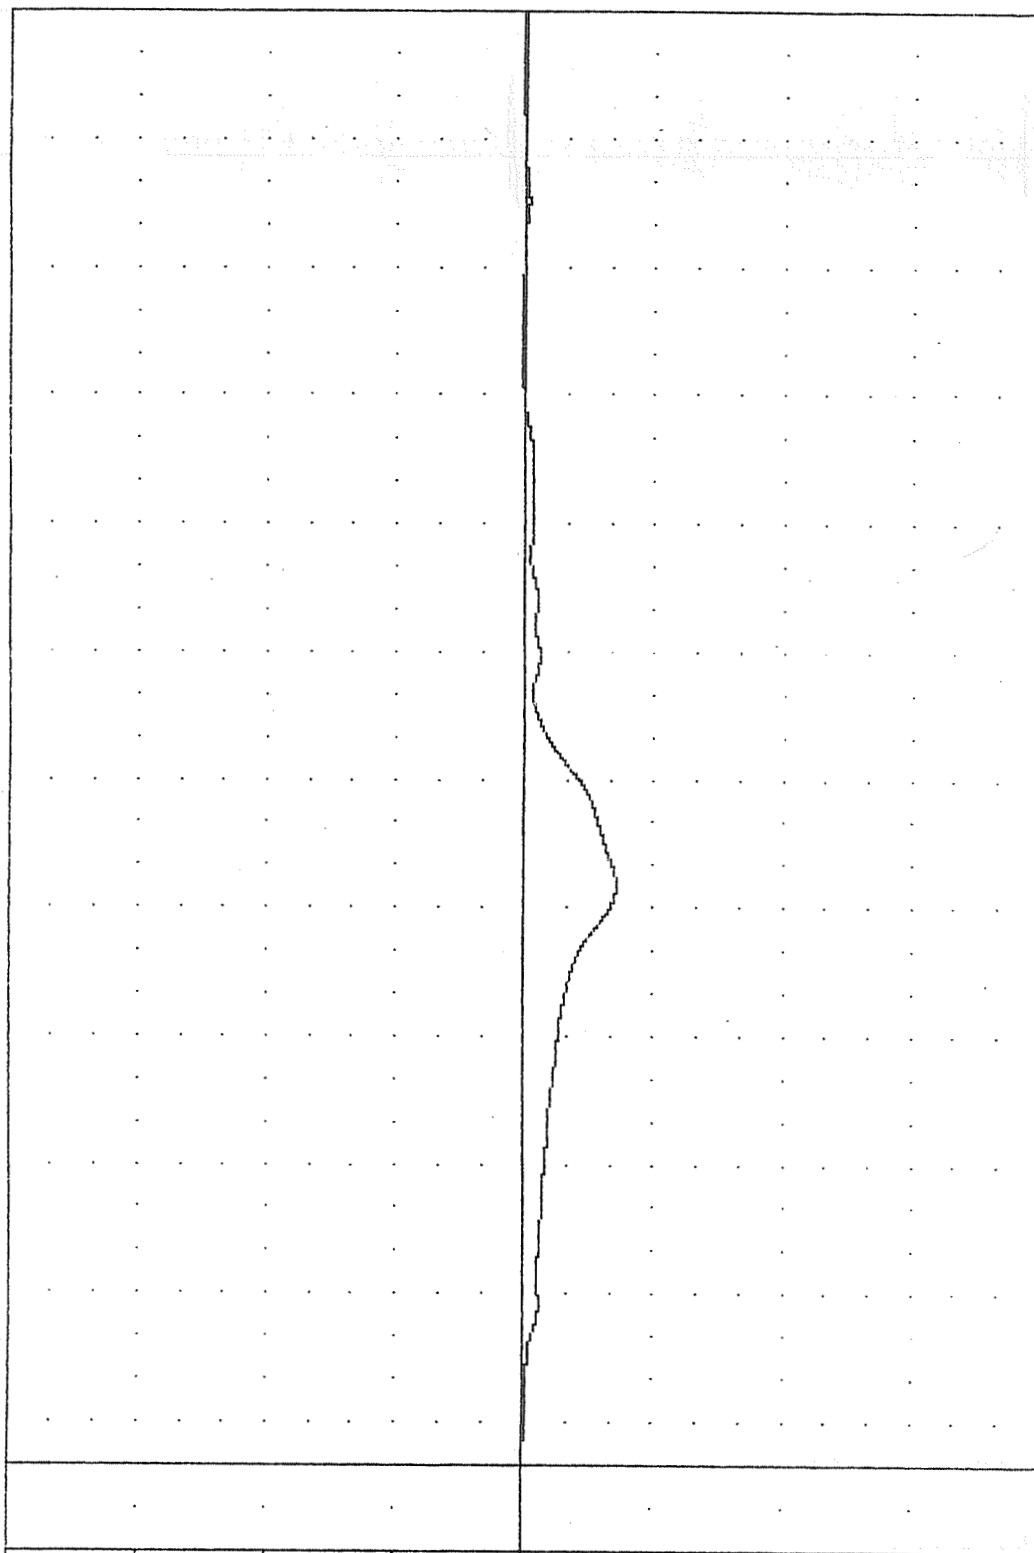

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT 0 INBOARD DIAGONAL STRUT STRAIN

FAR , TEST 01

CRASH SIMULATION

87278

SE0FLS

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.192 220.00 ,

2.80 151.38

40.00

30.00

20.00

10.00

0.00

-10.00


-20.00

-30.00

-40.00

B-53

VOLTAGE (KV)

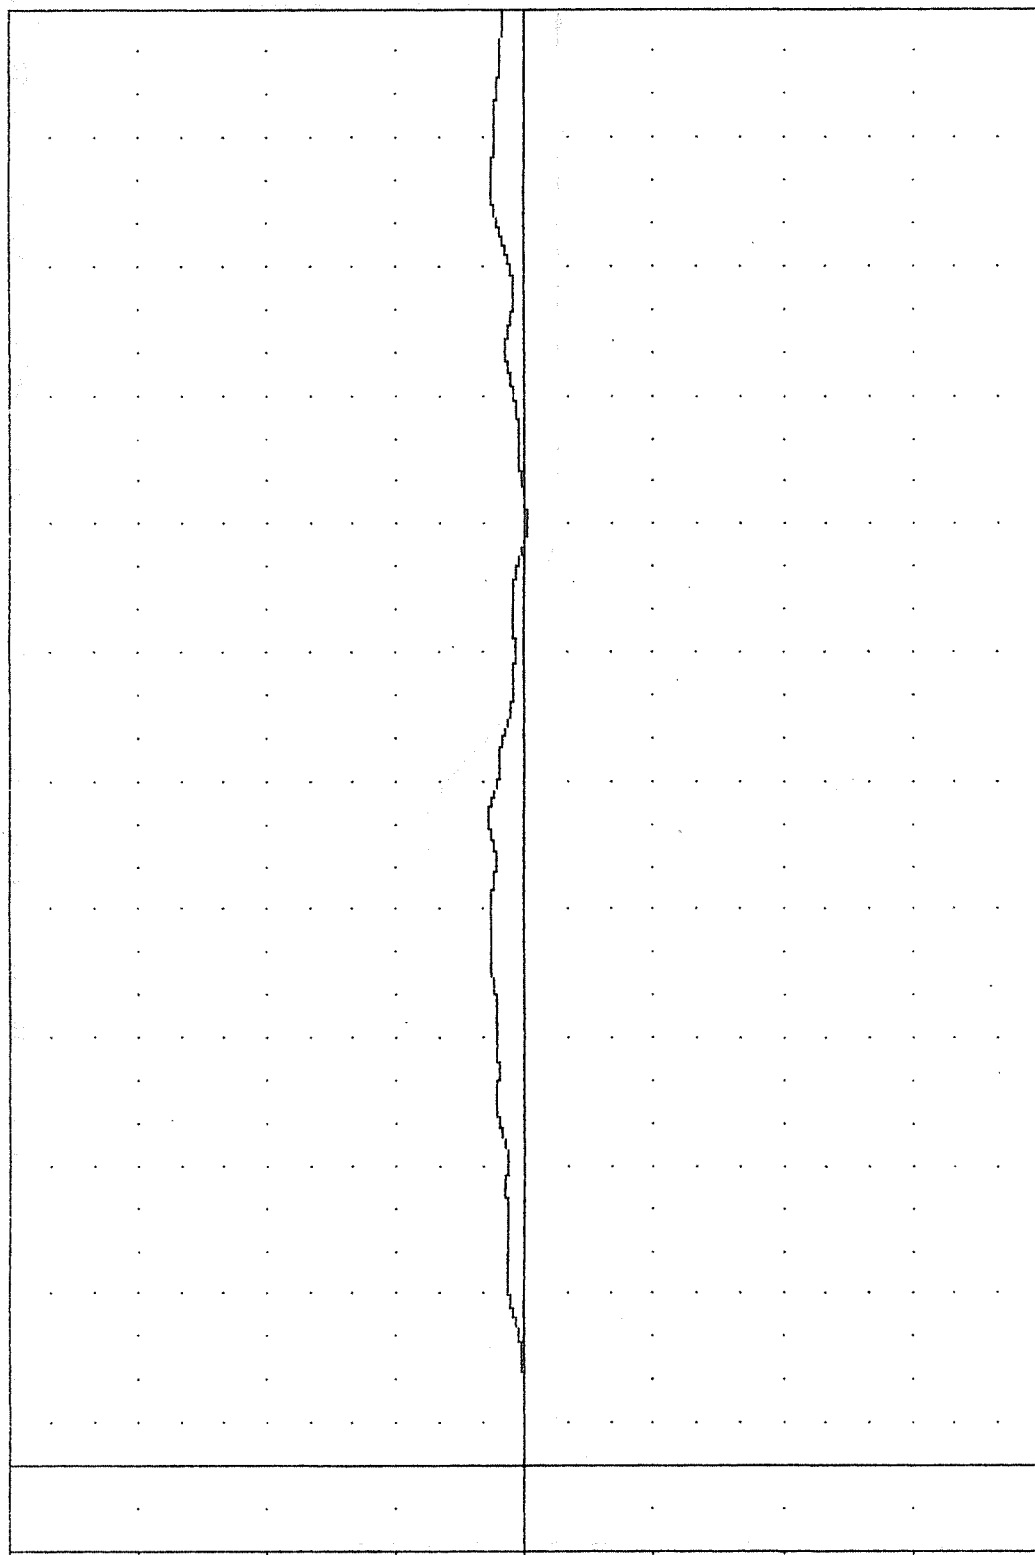


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (msec)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT E OUTBOARD FORWARD LEG STRAIN

FAR TEST 01
 CRASH SIMULATION
 87276
 SE0053

FILTER = 6LPF 100/ 316/ -40
 MIN. MAX VALUES = -10.11 146.50 0.85 * 249.00

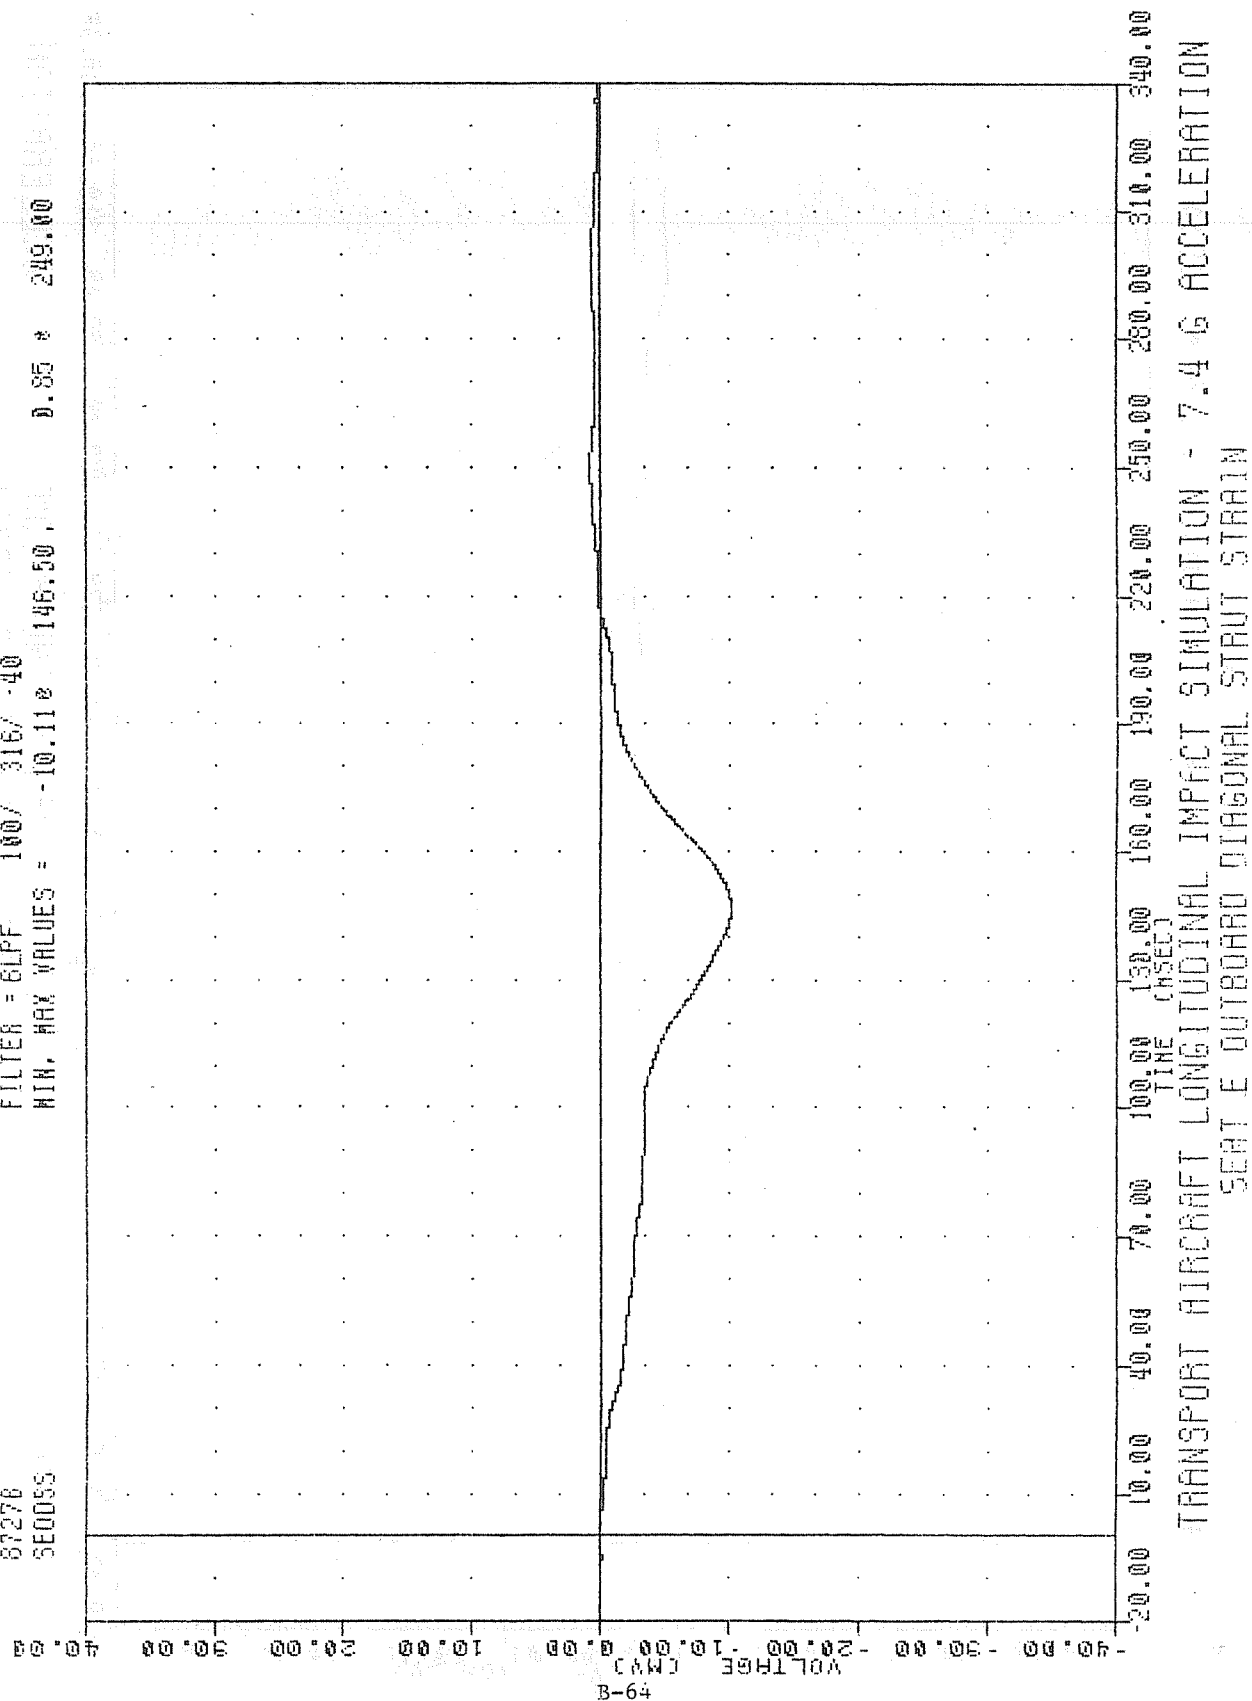

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
 SEAT E OUTBOARD DIAGONAL STRUT STRAIN

FAR TEST 01

CARSH SIMULATION

8727B

SFOFLS

FILTER = BLPF 100/ 316/ -40


MIN. MAX VALUES = -2.47e

148.13

2.41 e

127.63

VOLTAGE (MVC)
B-65

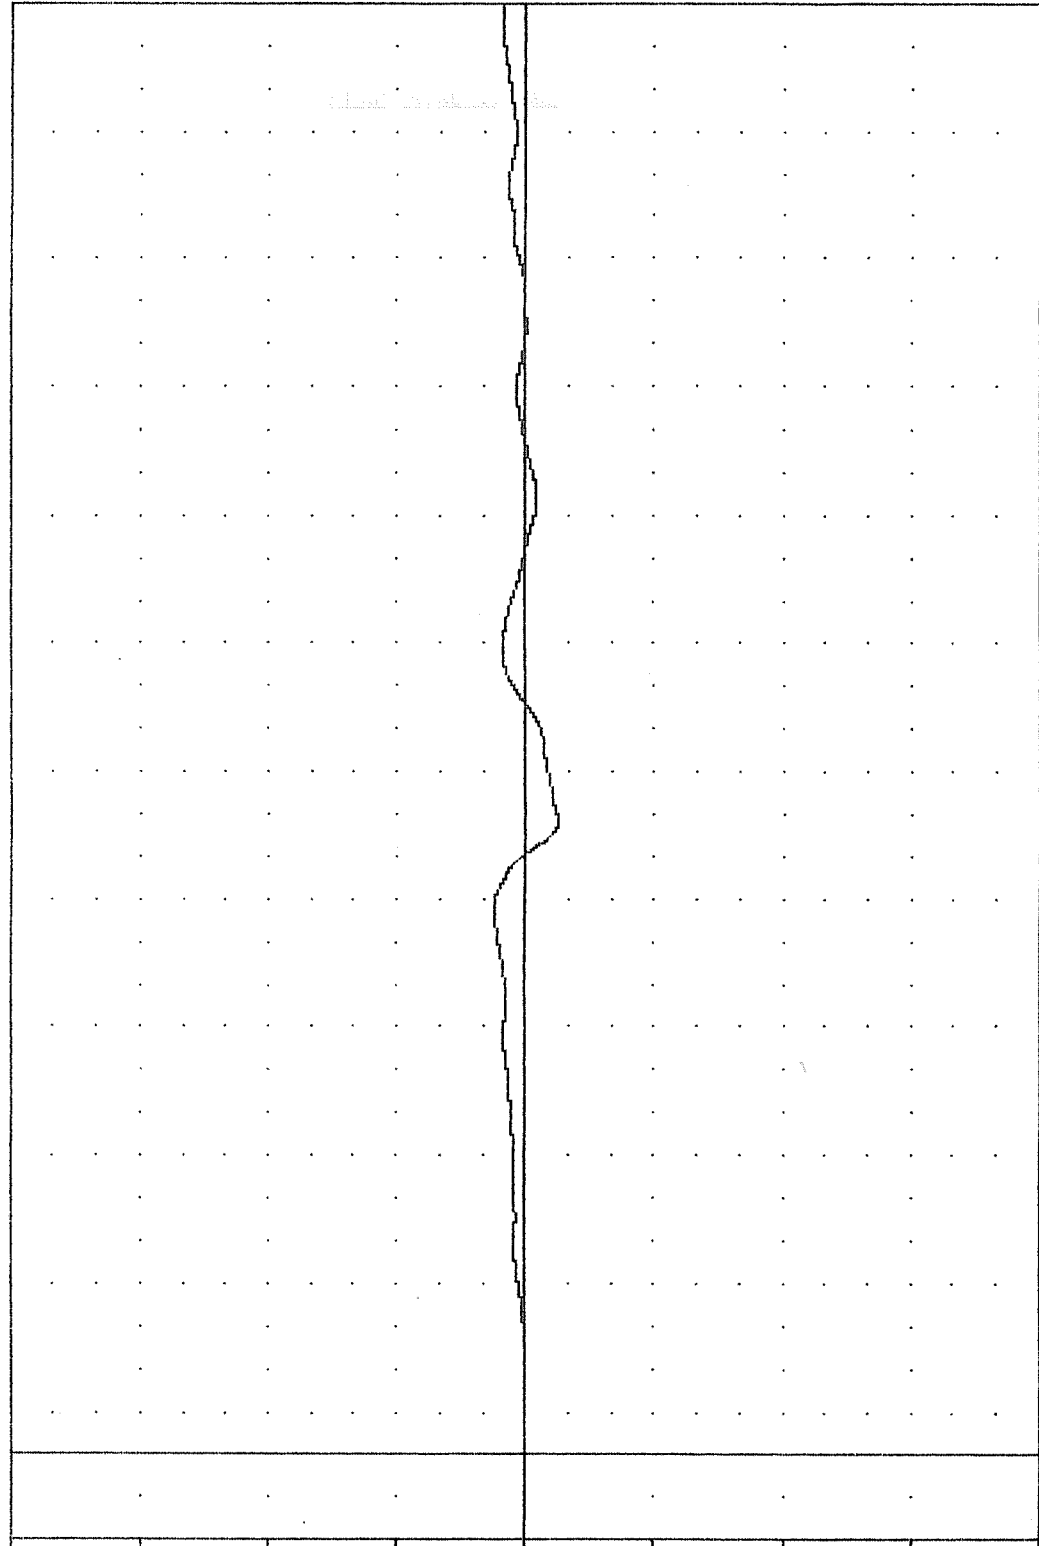

20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 7.4 G ACCELERATION
SEAT F OUTBOARD FORWARD LEG STRAIN

TEST 02 DATA PLOTS

FRA , TEST 02

CRASH SIMULATION

87279

SIXDG

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES =

-14.19e

81.75,

1.69 e 180.38

20.00

7.50

-5.00

-17.50

-30.00


-42.50

-55.00

-67.50

-80.00

B-67

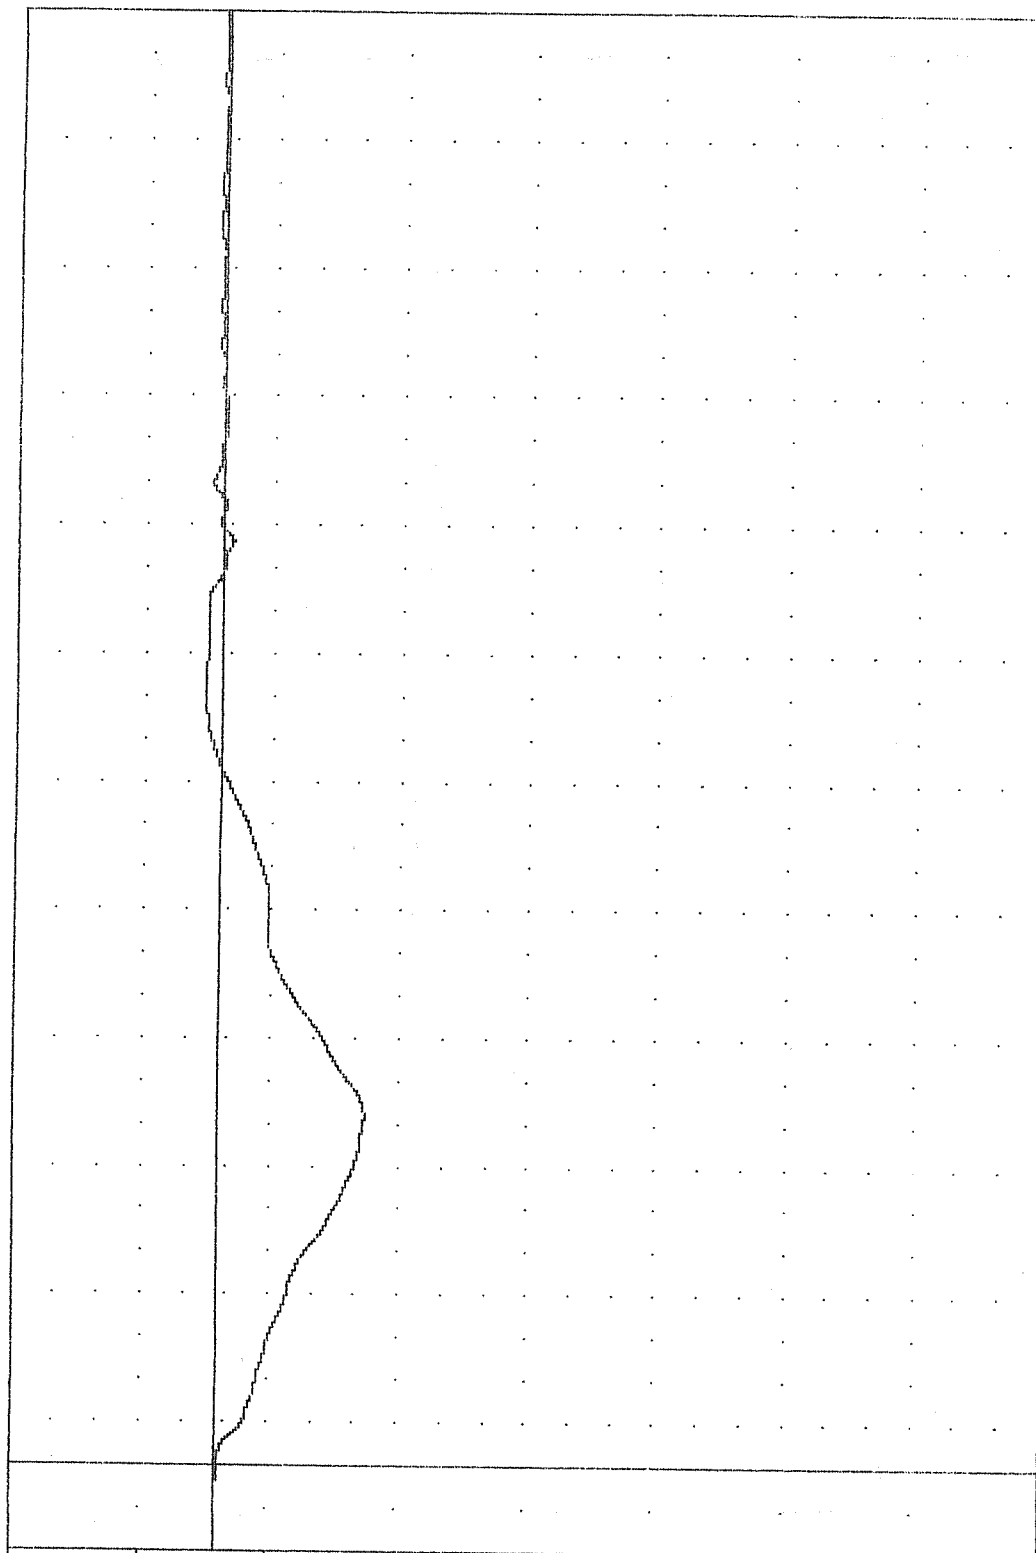

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SLED LONGITUDINAL ACCELERATION

FAR TEST 02
CRASH SIMULATION


87279
SLDXV

FILTER = BLPF 300/ 949/ -40
MIN. MAX VALUES = -36.17 159.75

0.00 0.00 -20.00

10.00
0.00
-10.00
-20.00
-30.00
-40.00
-50.00
-60.00
-70.00
-80.00
VELOCITY (FT/SEC)


B-68

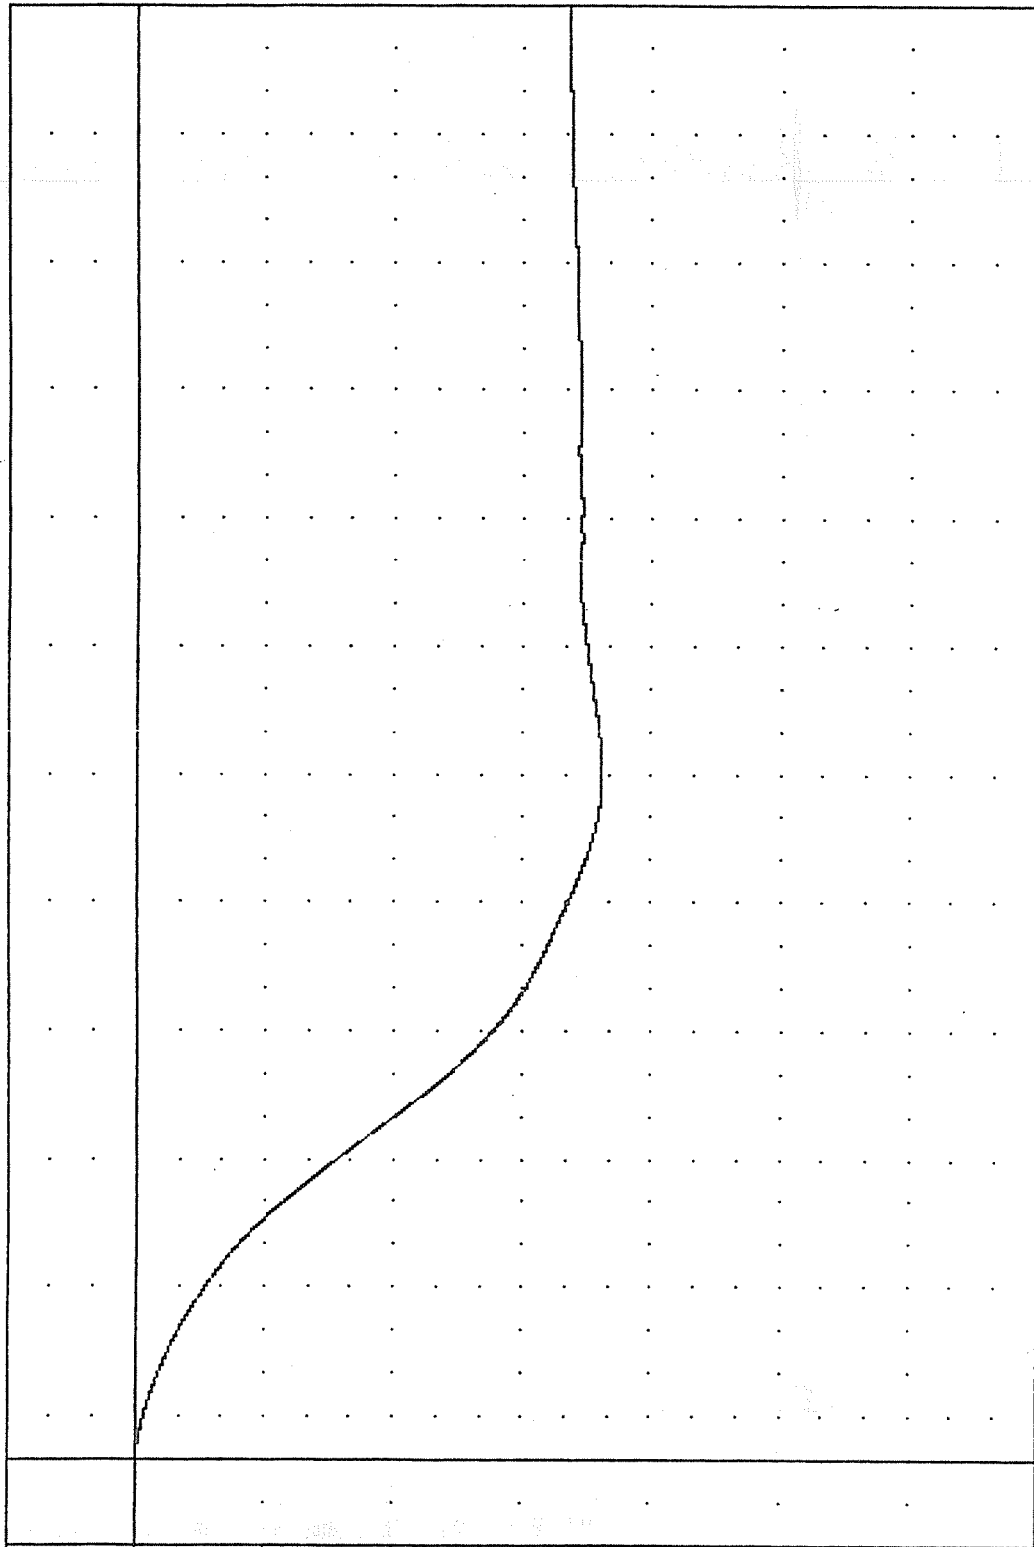

20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00 -50.00 -60.00 -70.00 -80.00
TIME (MSEC)
TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SLED LONGITUDINAL VELOCITY


FRA , TEST 02
 CRASH SIMULATION
 87279
 FLXG1

FILTER = 6LPF 100/ 316/ -40
 MIN, MAX VALUES = -14.70e 79.63 , 4.39 e 317.00

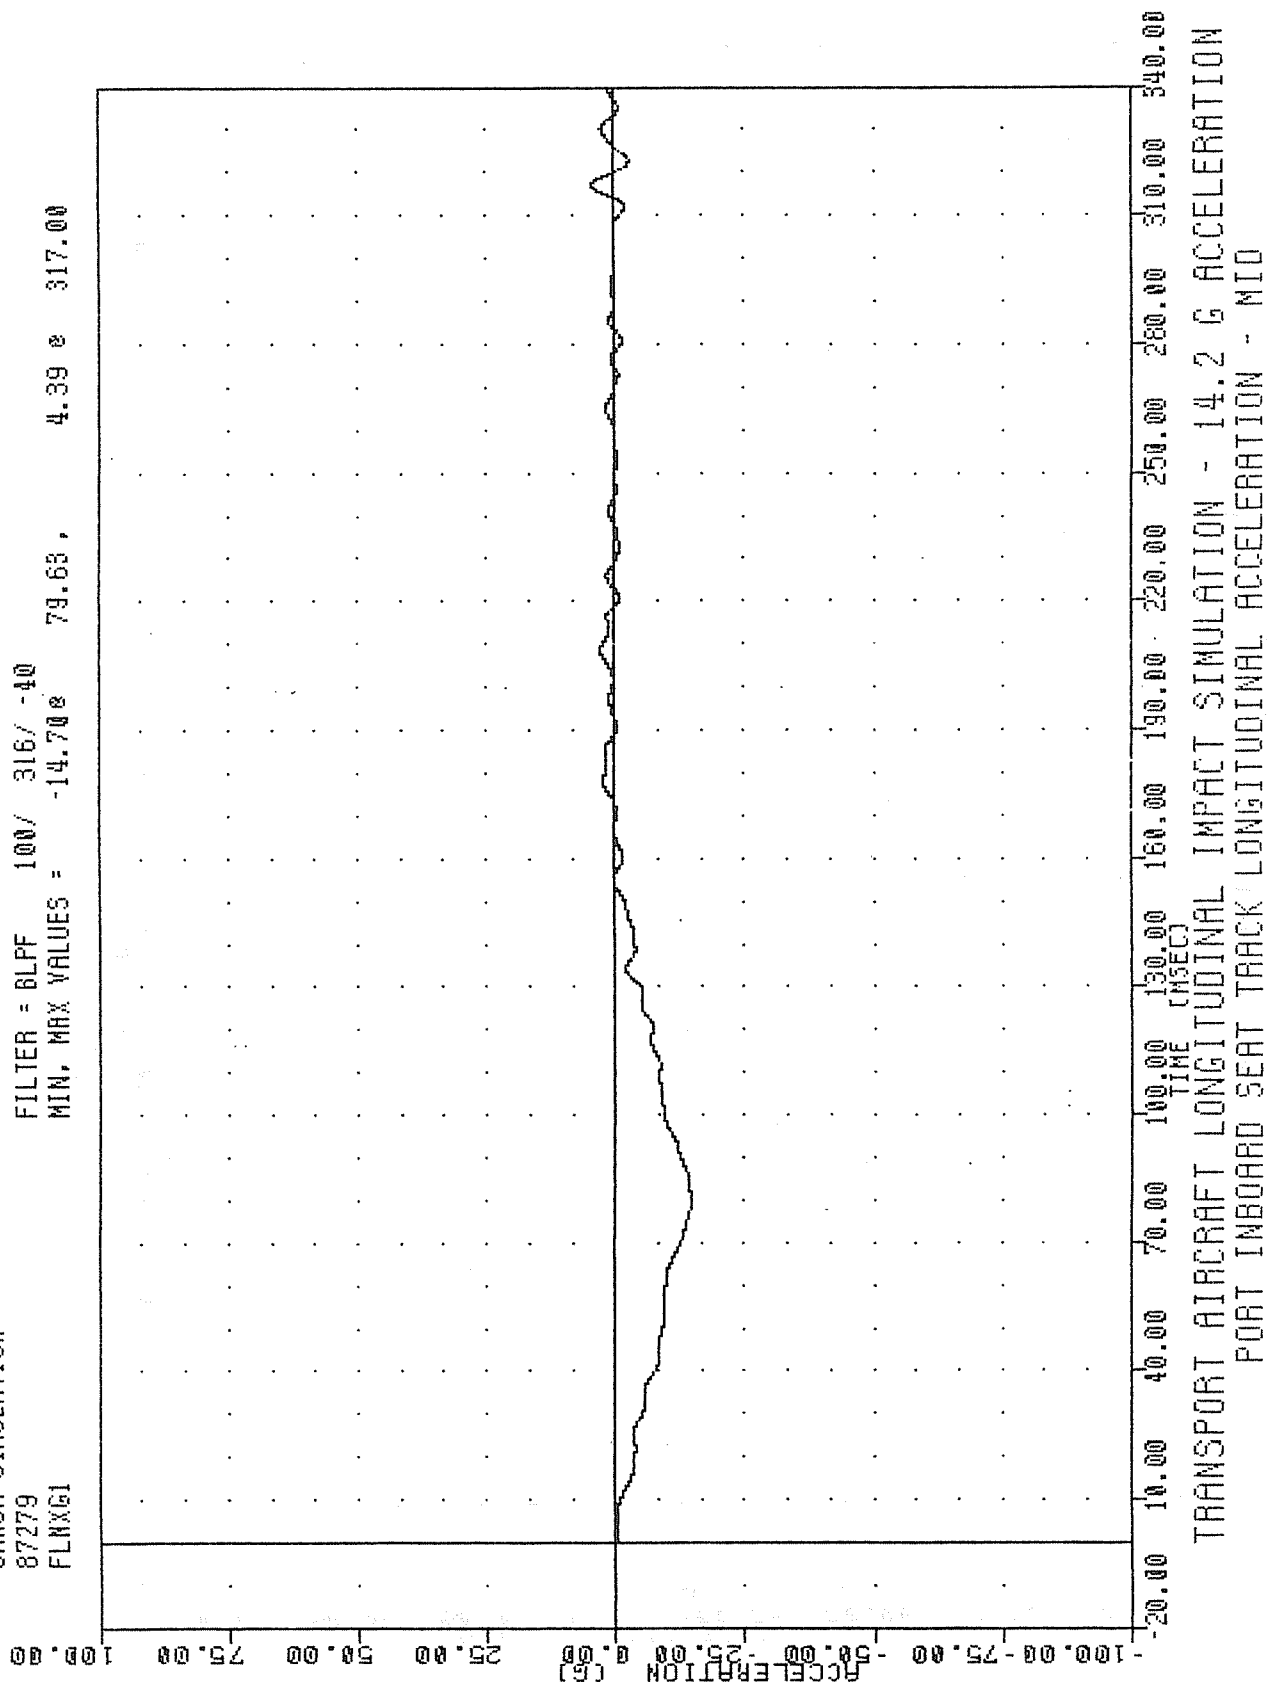

FAR TEST 02
 CRASH SIMULATION
 87279
 FLXV1

FILTER = BLPF 300/ 949/ -40
 MIN, MAX VALUES = -35.458 171.00 0.00 0.00 0.00 0.00

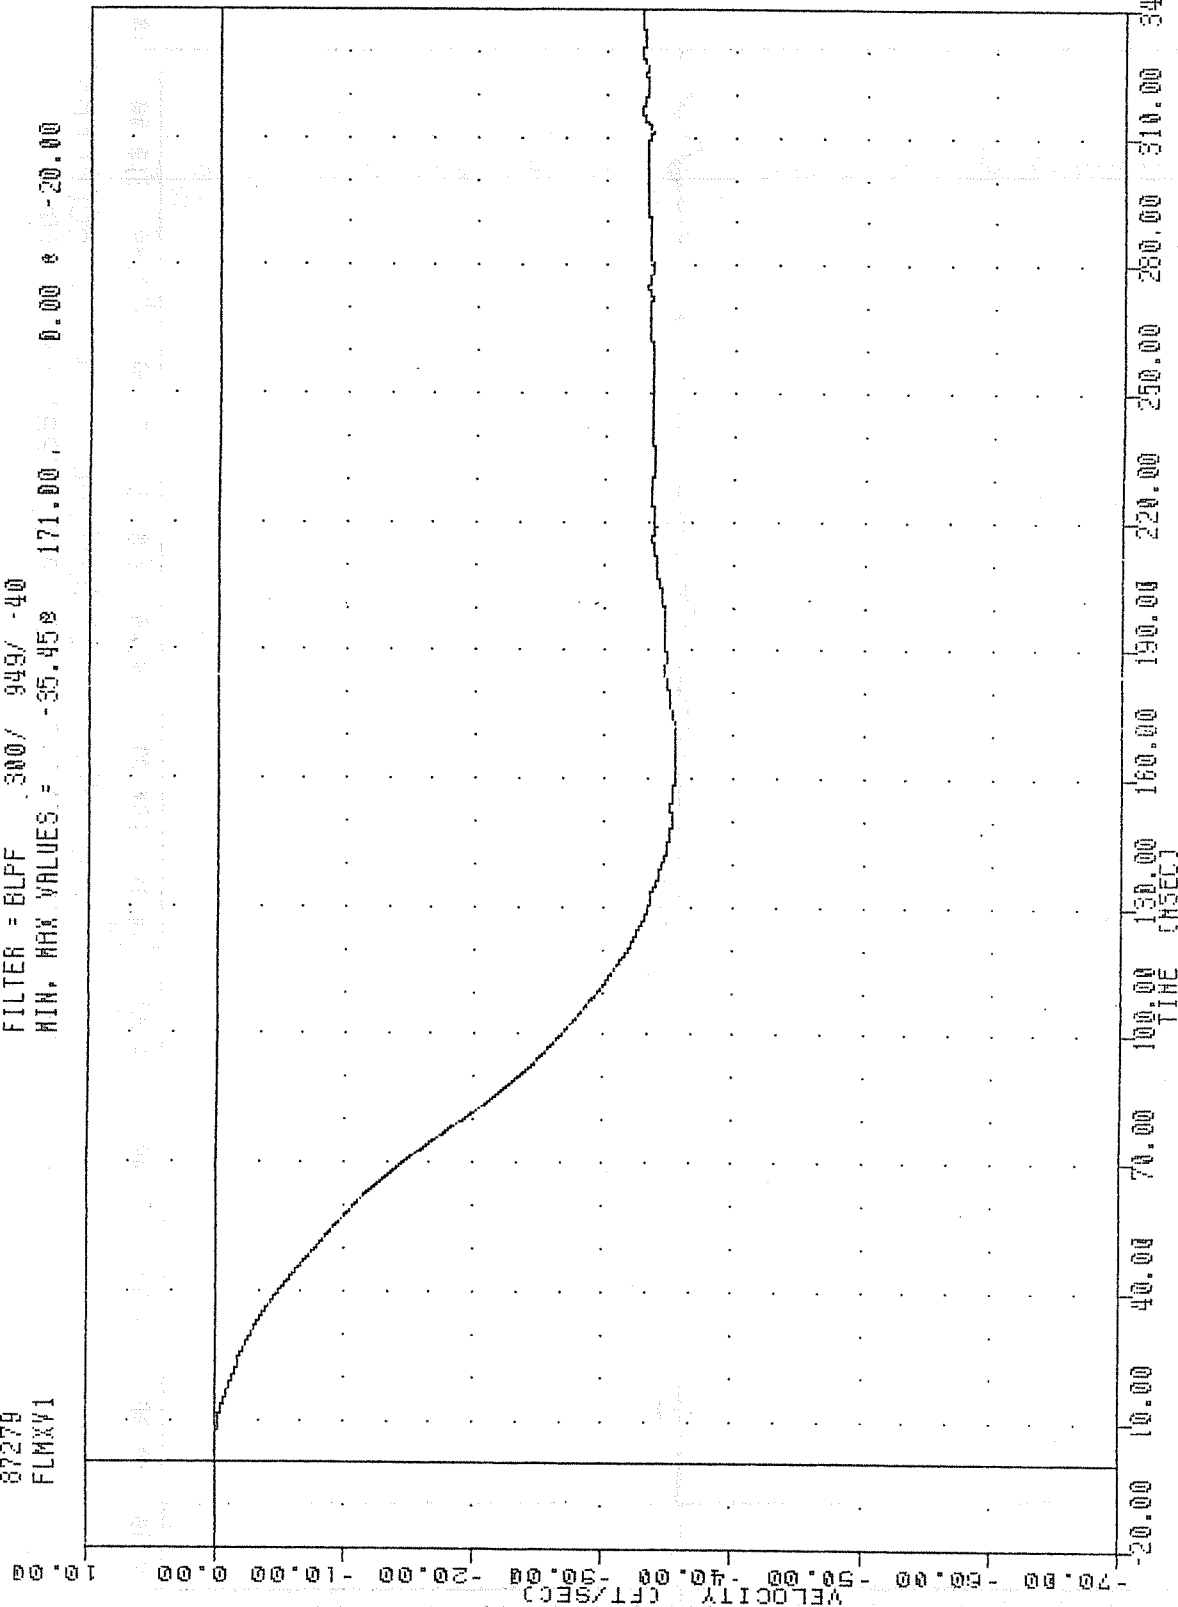

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 PORT INBOARD SEAT TRACK LONGITUDINAL VELOCITY - MIN

FRA , TEST 02

CRASH SIMULATION

87279

FLXG2

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -14.680 79.13, 3.84 0 317.38

ACCELERATION (G)

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

TIME (MSEC)

20.00

40.00

60.00

80.00

100.00

120.00

140.00

160.00

180.00

200.00

220.00

240.00

260.00

280.00

300.00

320.00

340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LONGITUDINAL ACCELERATION - AFT


FAR , TEST 02

CARSH SIMULATION

87279

FLAXV2

FILTER = BLPF 300/ 949/ -40
MIN. MAX VALUES = -35.650 162.13, 0.00 0 -20.00

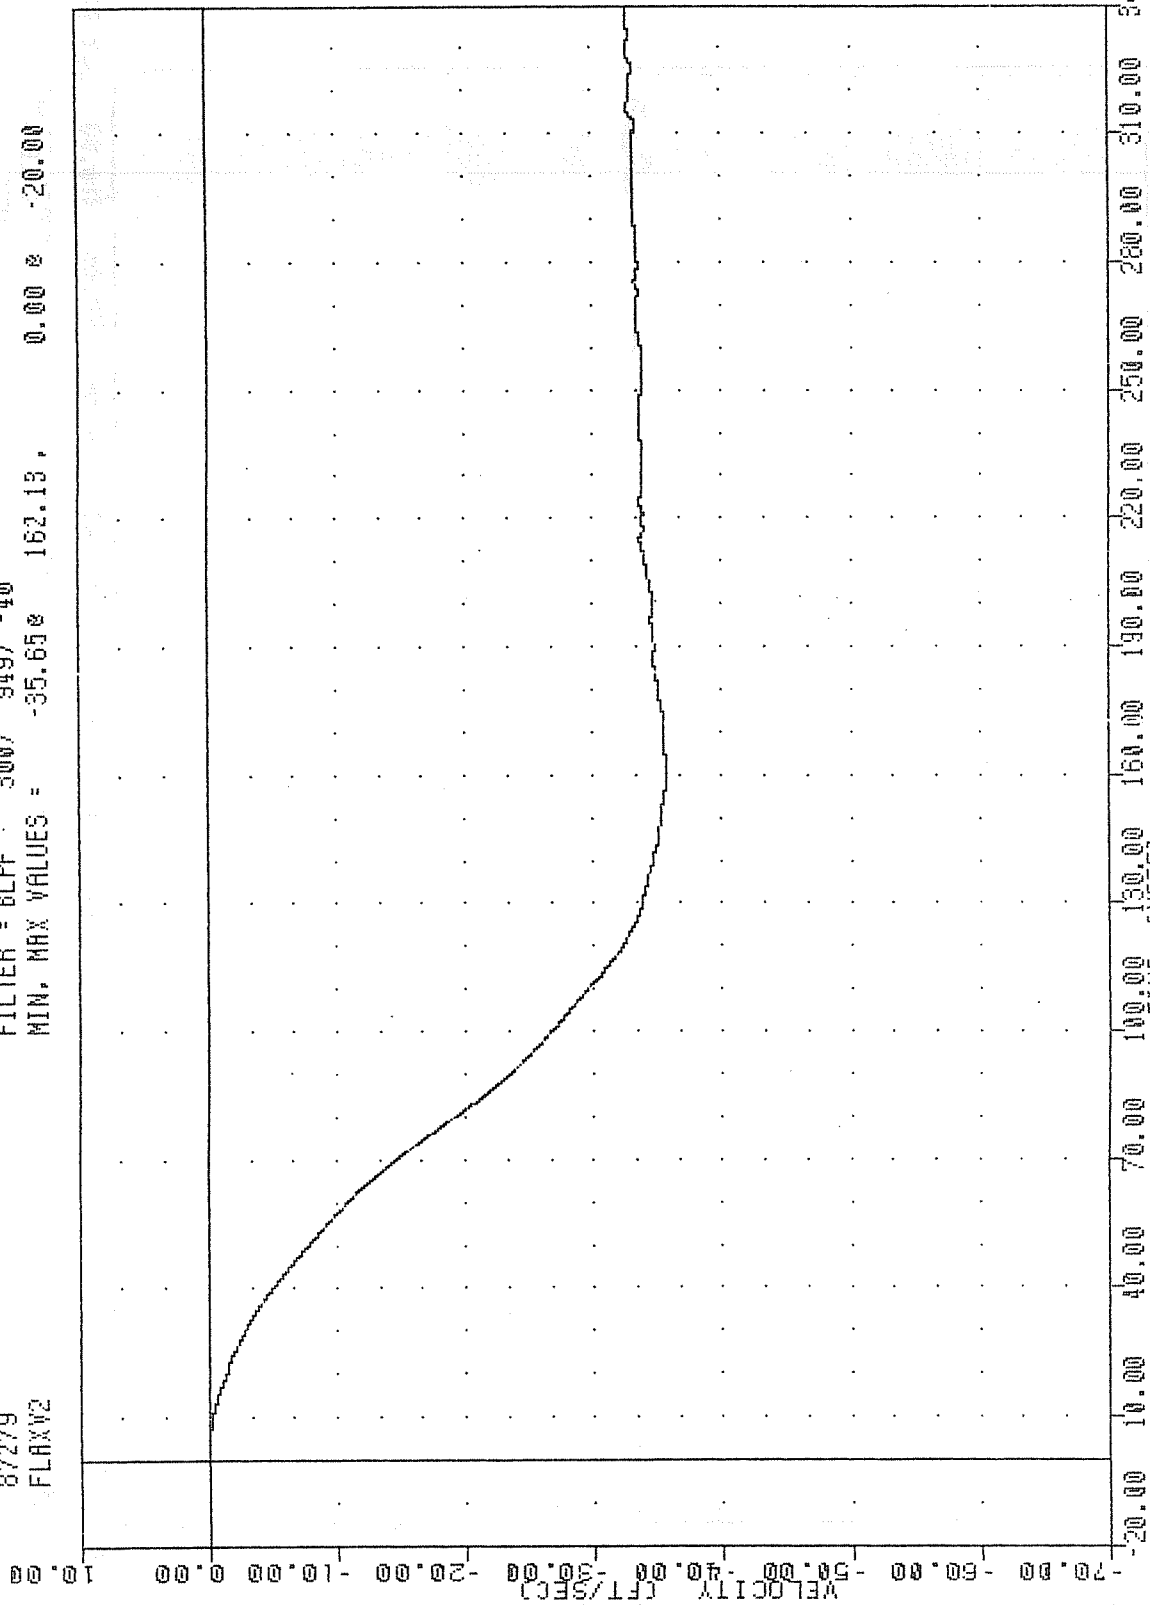


B-72

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LONGITUDINAL VELOCITY - AFT

FAR , TEST 02
 CRASH SIMULATION
 87279
 FLAY62

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -1.00e 297.38, 0.75 e 261.38

ACCELERATION (G)
 100.00
 75.00
 50.00
 25.00
 0.00
 -25.00
 -50.00
 -75.00
 -100.00

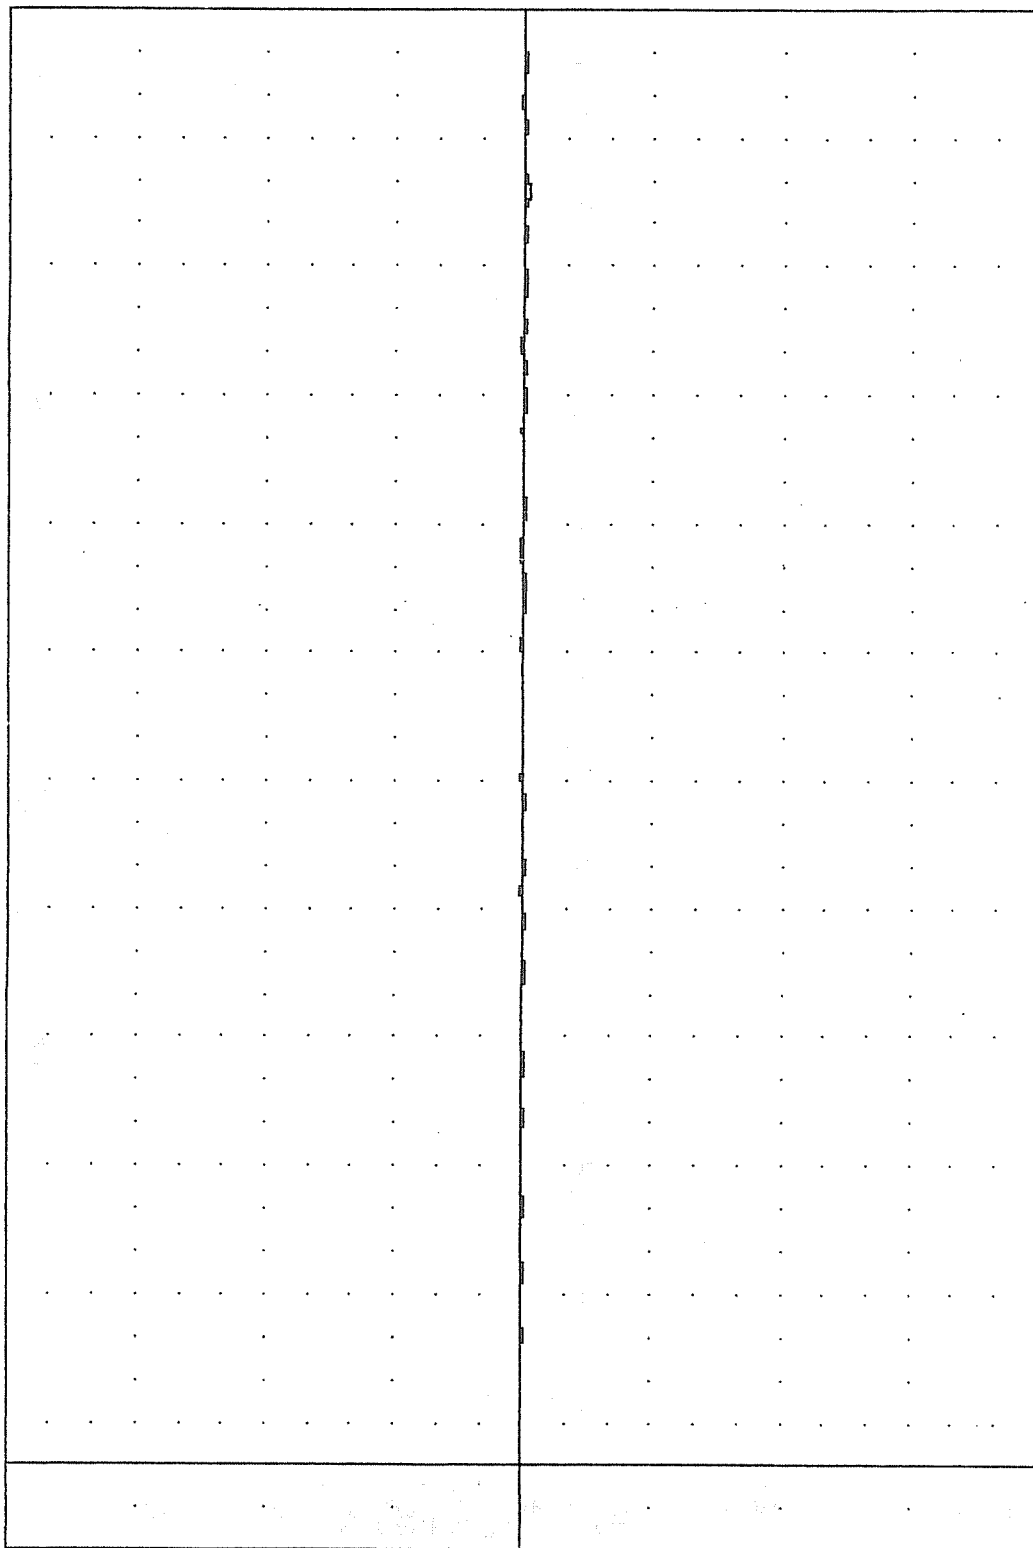

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (NSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - AFT

FRA , TEST 02

CRASH SIMULATION


87279

FLAZG2

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -3.920 281.38 , 3.73 235.38

ACCELERATION (G)

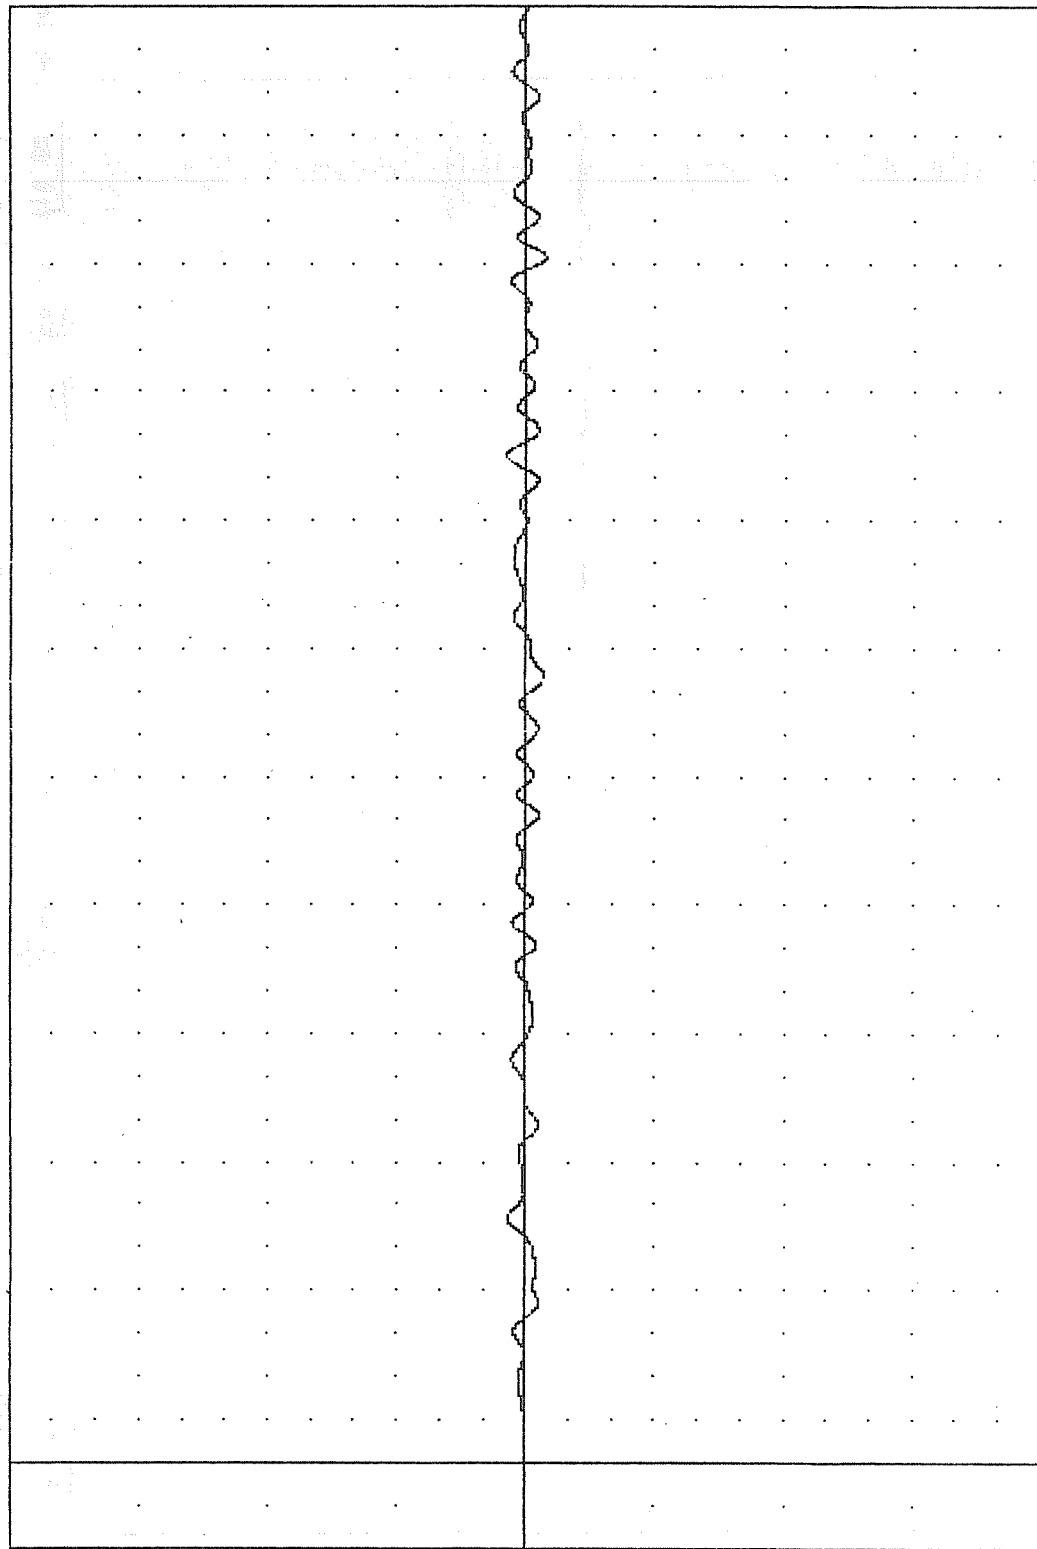

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION

STARBOARD INBOARD SEAT TRACK VERTICAL ACCELERATION - AFT

FAR , TEST 02

CRASH SIMULATION

87279

FLARE2

FILTER = BLFF 100/ 316/ -40

MIN, MAX VALUES = 0.01e

14.89 e 79.00

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-20.00

10.00

40.00

70.00

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION

STARBOARD INBOARD SEAT TRACK ACCELERATION - AFT RESULTANT

ACCELERATION (G)

FRA TEST 02


CRASH SIMULATION

87279

FLMX63

FILTER = BLPF 100/ 316/ -40

WIN, MAX VALUES = -14.65 80.25 3.81 317.38

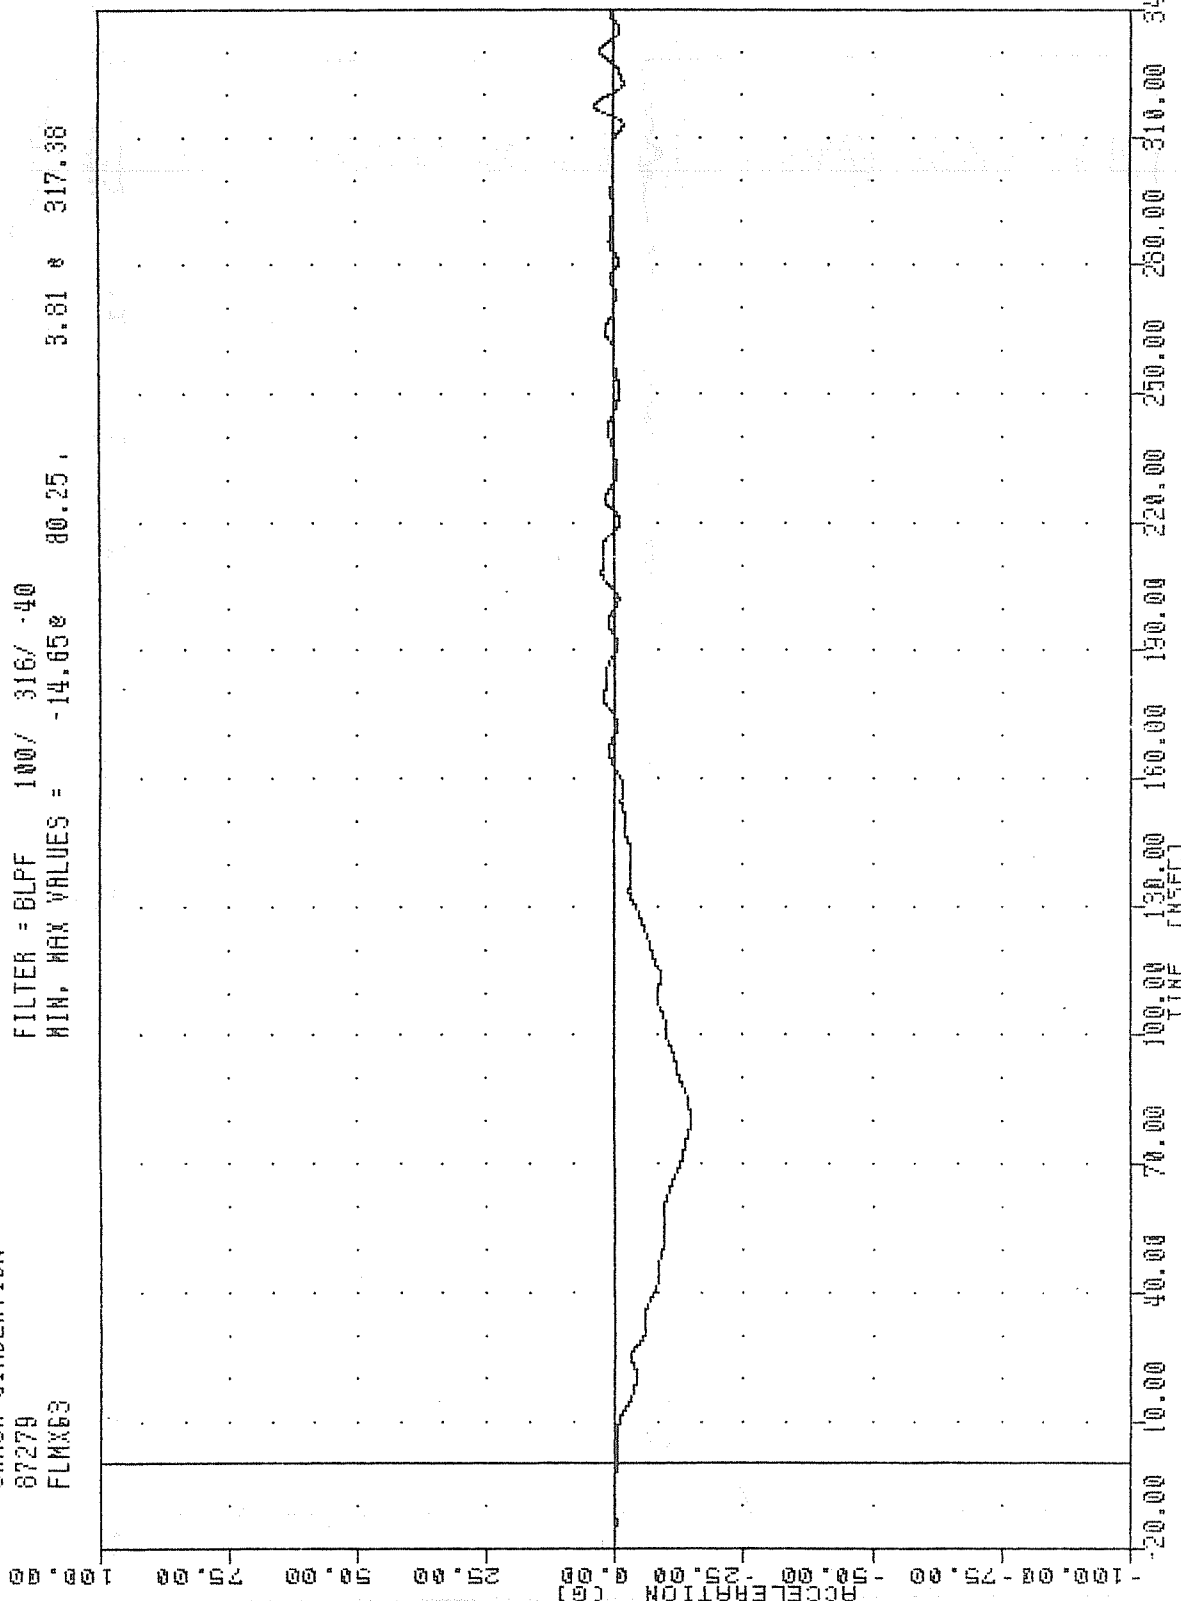

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LONGITUDINAL ACCELERATION - MID

FHA , TEST 02

CRASH SIMULATION


87279

FLMXV3

FILTER = BLPF 300/ 949/ -40

MIN. MAX VALUES = -35.81% 158.13, 0.00% -20.00

VELOCITY (FT/SEC)

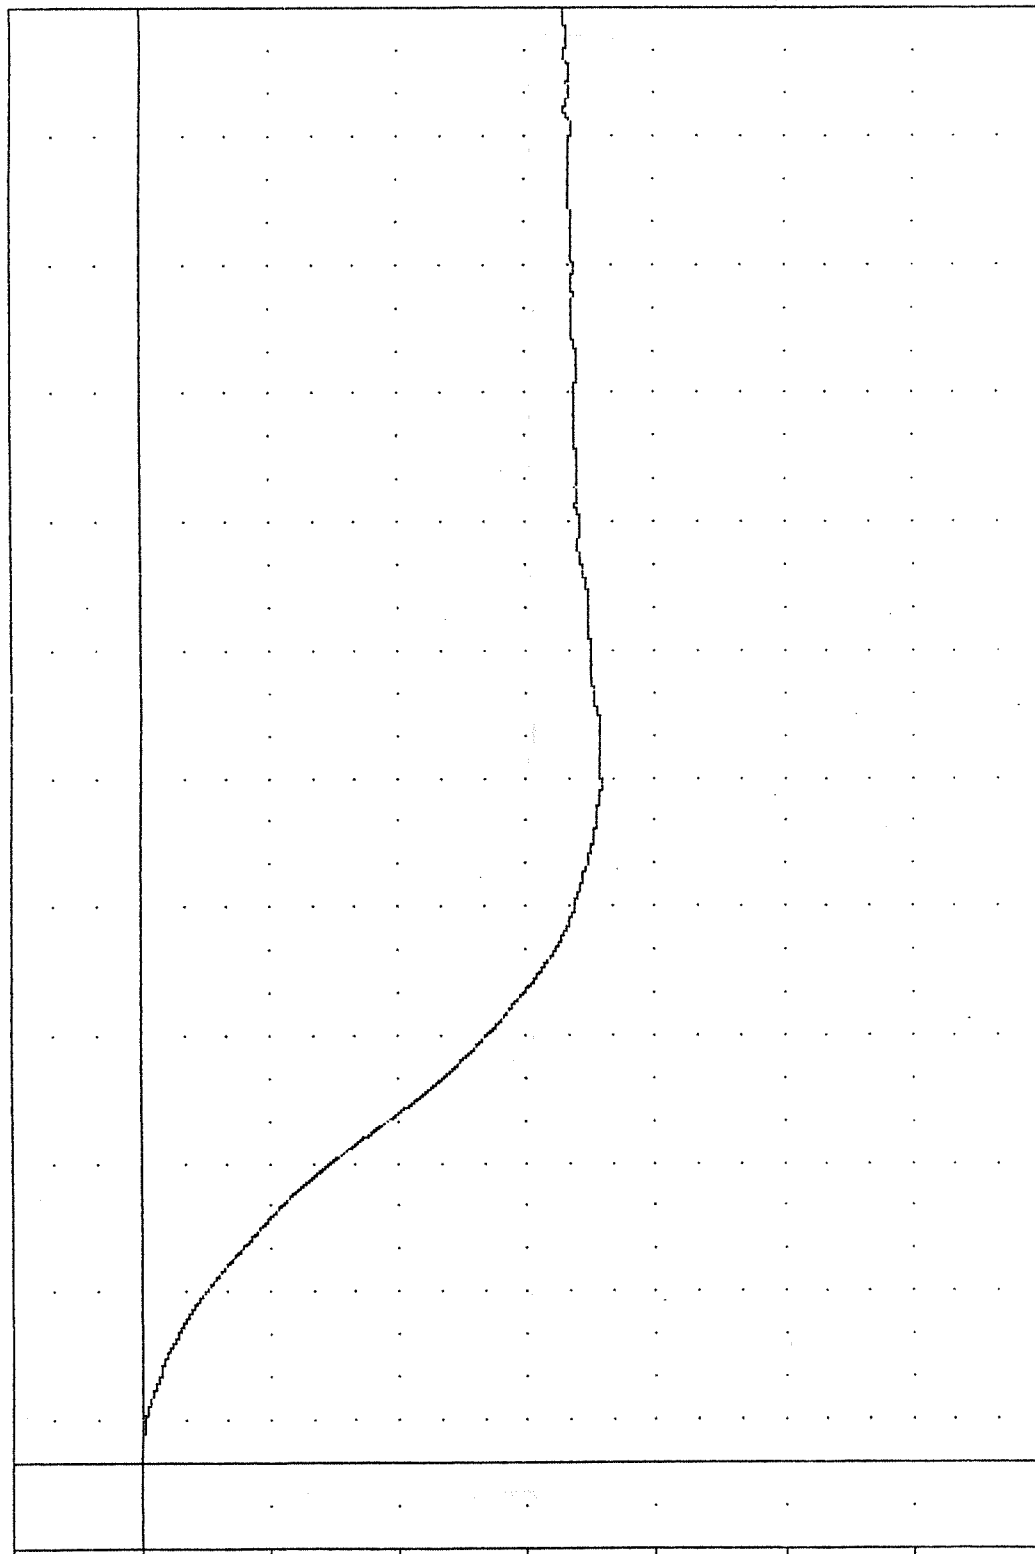

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION

STARBOARD INBOARD SEAT TRACK LONGITUDINAL VELOCITY - MIN

FRA , TEST 02

CRASH SIMULATION


87279

FLYCG3

FILTER = 6LFF 100/ 316/ -40

MIN, MAX VALUES = -0.94e 136.25, 1.07 e 162.75

ACCELERATION [G]

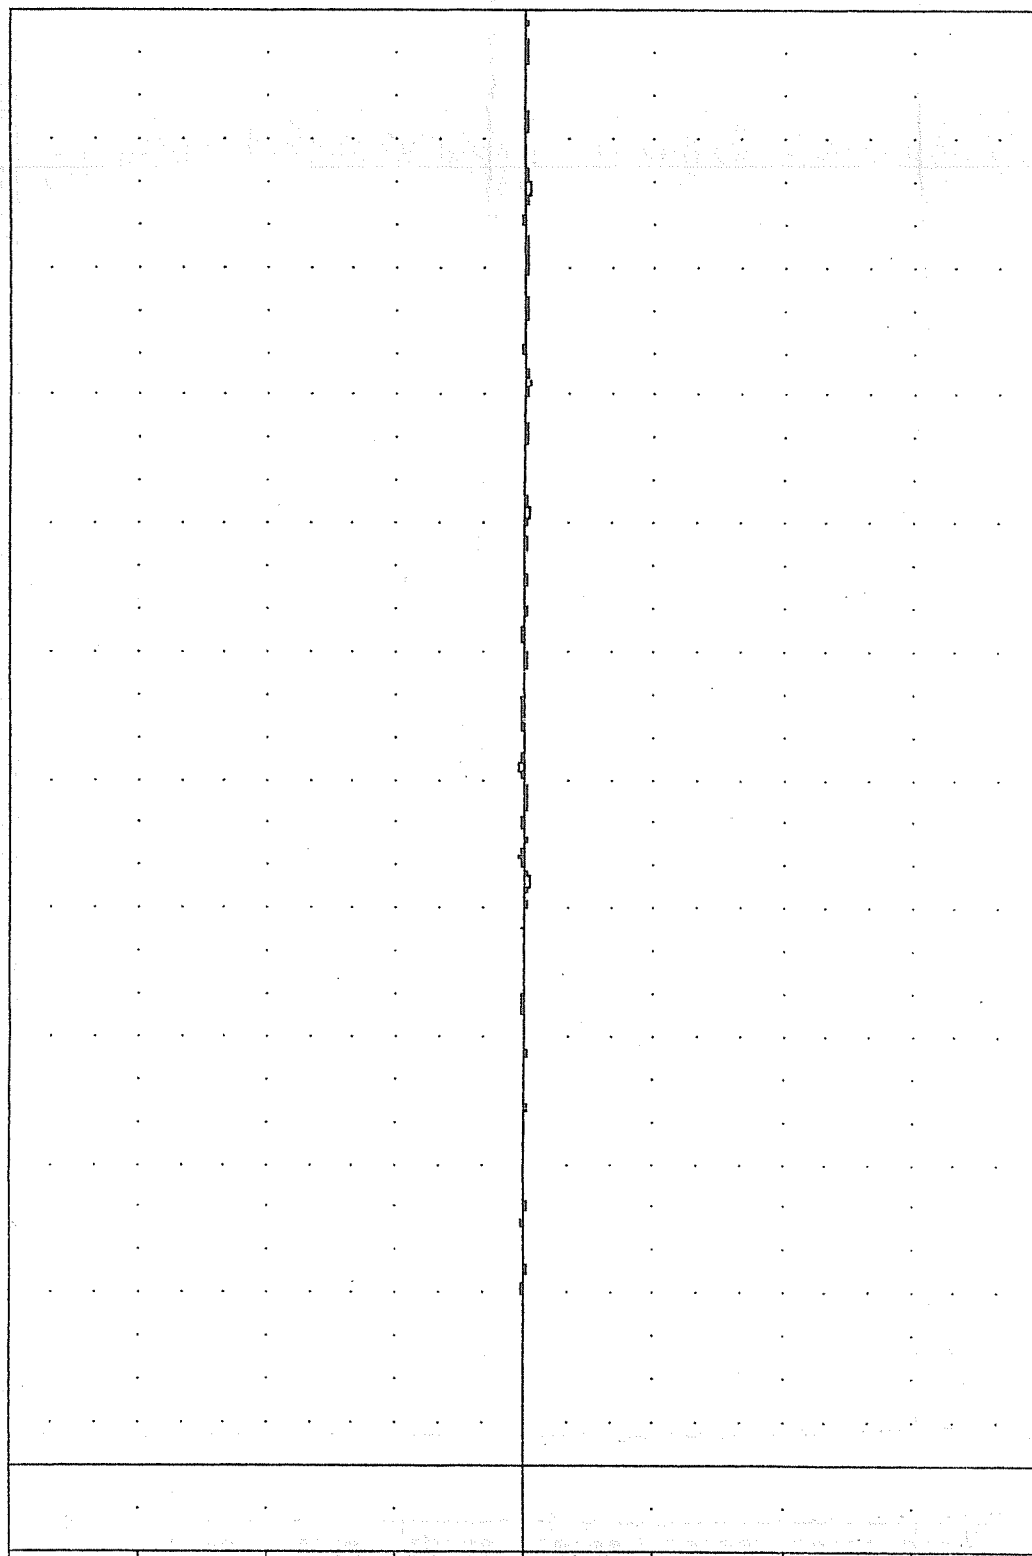

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - MID

FRA , TEST 02

CRASH SIMULATION

87279

FLNZ63

FILTER = 6LPF 100/ 316/ -40

MIN. MAX VALUES = -11.84g 179.75 , 7.56 g 213.63

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-120.00

100.00
TIME (MSEC)

70.00

40.00

10.00

-20.00

-40.00

-60.00

-80.00

-100.00

-120.00

-140.00

-160.00

-180.00

-200.00

-220.00

-240.00

-260.00

-280.00

-300.00

-320.00

-340.00

-360.00

-380.00

-400.00

-420.00

-440.00

-460.00

-480.00

-500.00

-520.00

-540.00

-560.00

-580.00

-600.00

-620.00

-640.00

-660.00

-680.00

-700.00

-720.00

-740.00

-760.00

-780.00

-800.00

-820.00

-840.00

-860.00

-880.00

-900.00

-920.00

-940.00

-960.00

-980.00

-1000.00

-1020.00

-1040.00

-1060.00

-1080.00

-1100.00

-1120.00

-1140.00

-1160.00

-1180.00

-1200.00

-1220.00

-1240.00

-1260.00

-1280.00

-1300.00

-1320.00

-1340.00

-1360.00

-1380.00

-1400.00

-1420.00

-1440.00

-1460.00

-1480.00

-1500.00

-1520.00

-1540.00

-1560.00

-1580.00

-1600.00

-1620.00

-1640.00

-1660.00

-1680.00

-1700.00

-1720.00

-1740.00

-1760.00

-1780.00

-1800.00

-1820.00

-1840.00

-1860.00

-1880.00

-1900.00

-1920.00

-1940.00

-1960.00

-1980.00

-2000.00

-2020.00

-2040.00

-2060.00

-2080.00

-2100.00

-2120.00

-2140.00

-2160.00

-2180.00

-2200.00

-2220.00

-2240.00

-2260.00

-2280.00

-2300.00

-2320.00

-2340.00

-2360.00

-2380.00

-2400.00

-2420.00

-2440.00

-2460.00

-2480.00

-2500.00

-2520.00

-2540.00

-2560.00

-2580.00

-2600.00

-2620.00

-2640.00

-2660.00

-2680.00

-2700.00

-2720.00

-2740.00

-2760.00

-2780.00

-2800.00

-2820.00

-2840.00

-2860.00

-2880.00

-2900.00

-2920.00

-2940.00

-2960.00

-2980.00

-3000.00

-3020.00

-3040.00

-3060.00

-3080.00

-3100.00

-3120.00

-3140.00

-3160.00

-3180.00

-3200.00

-3220.00

-3240.00

-3260.00

-3280.00

-3300.00

-3320.00

-3340.00

-3360.00

-3380.00

-3400.00

-3420.00

-3440.00

-3460.00

-3480.00

-3500.00

-3520.00

-3540.00

-3560.00

-3580.00

-3600.00

-3620.00

-3640.00

-3660.00

-3680.00

-3700.00

-3720.00

-3740.00

-3760.00

-3780.00

-3800.00

-3820.00

-3840.00

-3860.00

-3880.00

-3900.00

-3920.00

-3940.00

-3960.00

-3980.00

-4000.00

-4020.00

-4040.00

-4060.00

-4080.00

-4100.00

-4120.00

-4140.00

-4160.00

-4180.00

-4200.00

-4220.00

-4240.00

-4260.00

-4280.00

-4300.00

-4320.00

-4340.00

-4360.00

-4380.00

-4400.00

-4420.00

-4440.00

-4460.00

-4480.00

-4500.00

-4520.00

-4540.00

-4560.00

-4580.00

-4600.00

-4620.00

-4640.00

-4660.00

-4680.00

-4700.00

-4720.00

-4740.00

-4760.00

-4780.00

-4800.00

-4820.00

-4840.00

-4860.00

-4880.00

-4900.00

-4920.00

-4940.00

-4960.00

-4980.00

-5000.00

-5020.00

-5040.00

-5060.00

-5080.00

-5100.00

-5120.00

-5140.00

-5160.00

-5180.00

-5200.00

-5220.00

-5240.00

-5260.00

-5280.00

-5300.00

-5320.00

-5340.00

-5360.00

-5380.00

-5400.00

-5420.00

-5440.00

-5460.00

-5480.00

-5500.00


-5520.00

-5540.00

FAR , TEST 02
 CRASH SIMULATION
 87279
 FLNR63

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.028 -19.00, 14.80 e 80.13


ACCELERATION (G)
 100.00
 75.00
 50.00
 25.00
 0.00
 -25.00
 -50.00
 -75.00
 -100.00

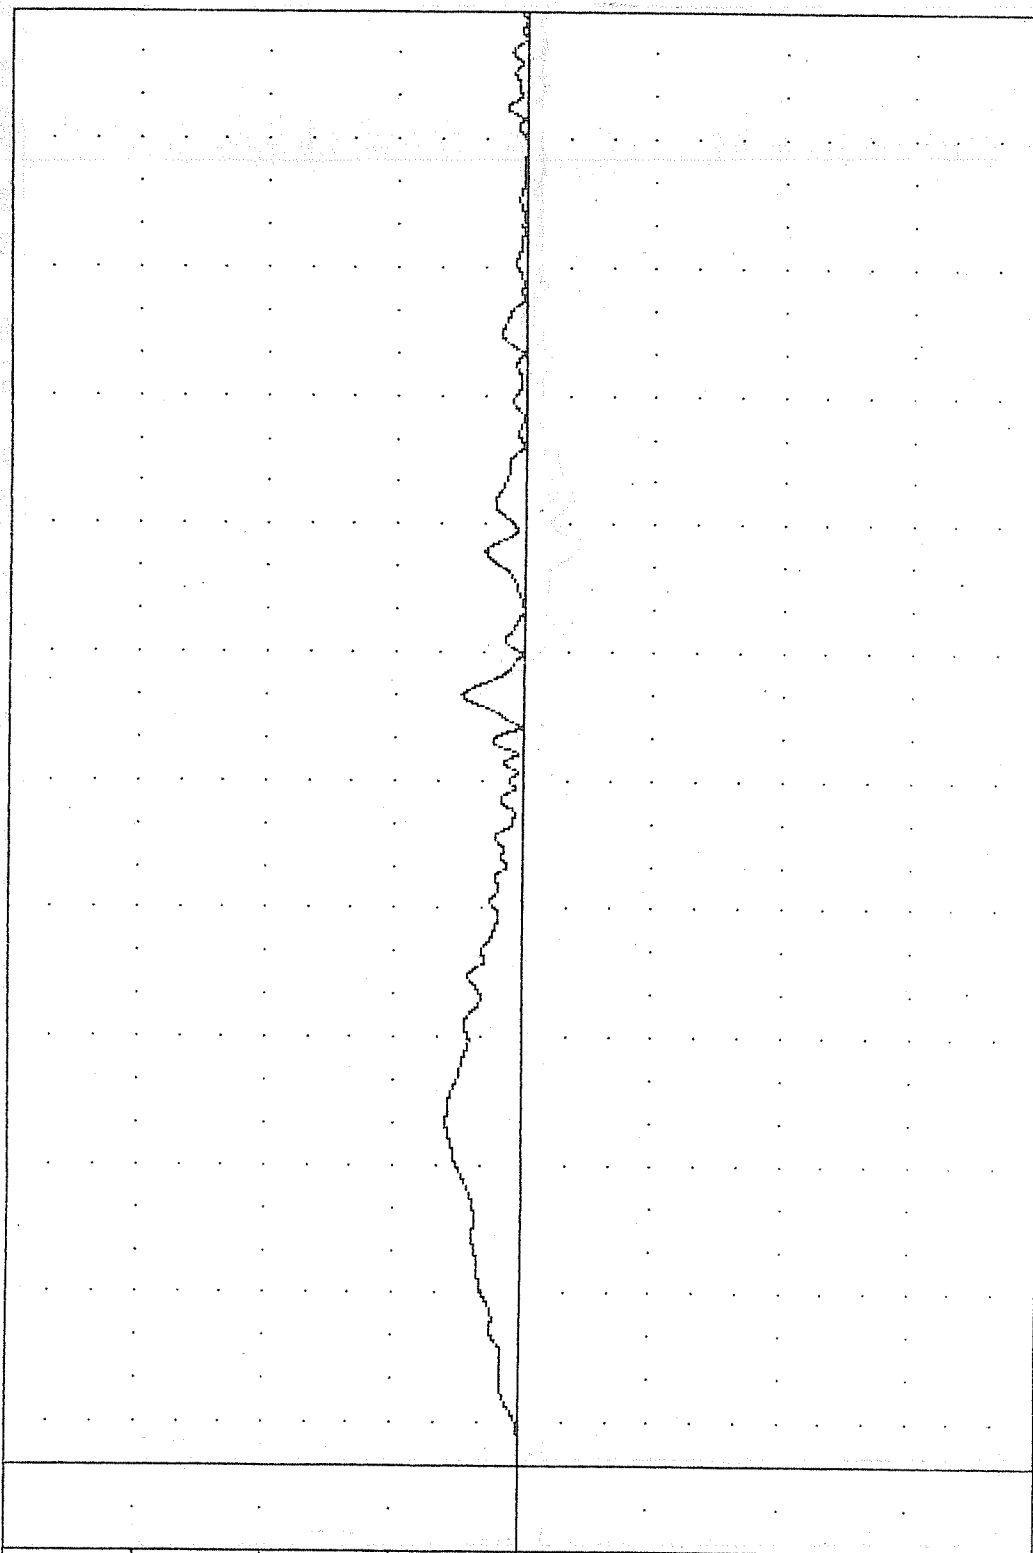

20.00 40.00 60.00 80.00 100.00 120.00 140.00 160.00 180.00 200.00 220.00 240.00 260.00 280.00 300.00 320.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 STABBOARD INBOARD SEAT TRACK ACCELERATION - NIN RESULTANT

FAR , TEST 02
 CRASH SIMULATION
 87279
 FLFX64

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -15.02e 79.50 , 3.82 e 317.25

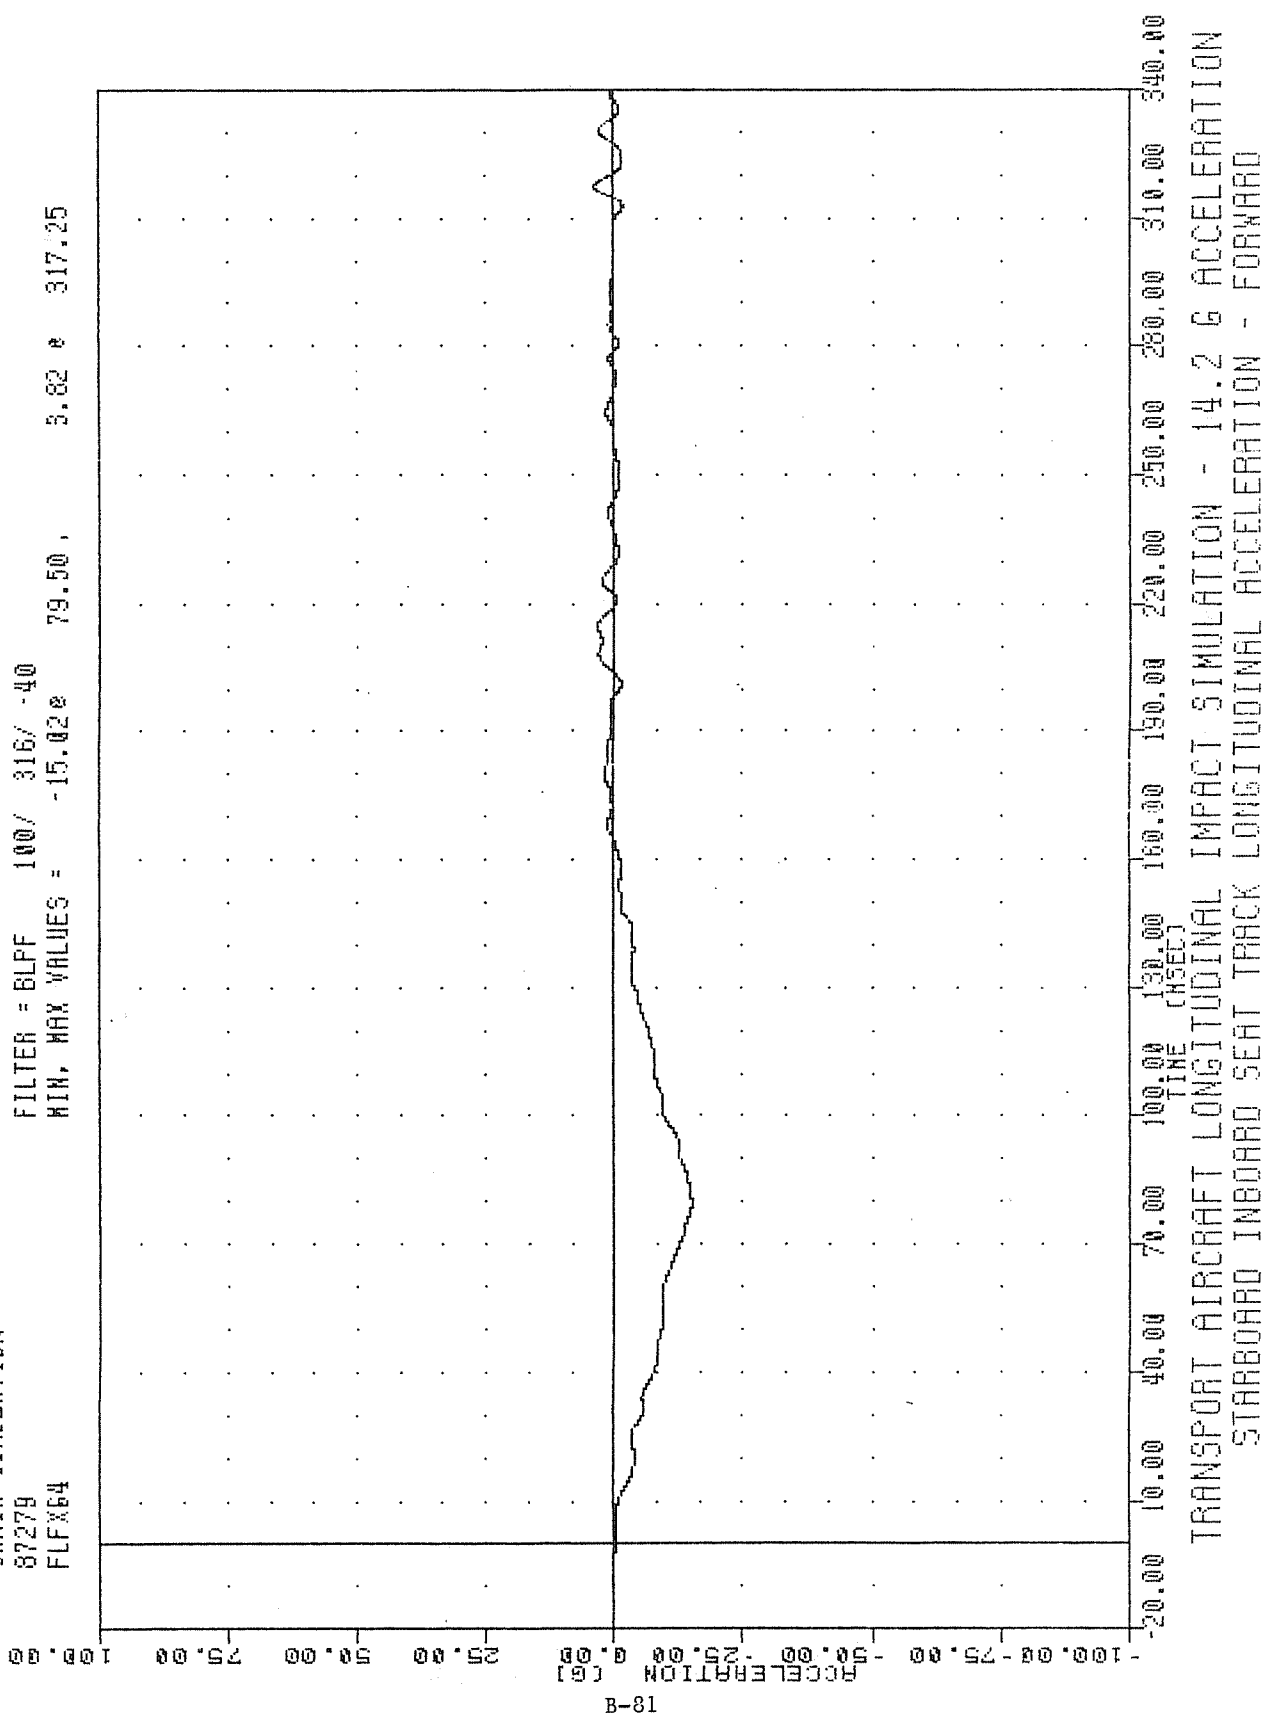


FAR , TEST 02
 CRASH SIMULATION

87279
 FLFXV4

FILTER = BLPF 300/ 949/ -40

MIN, MAX VALUES = -36.00e 162.50 , 0.00 e -20.00

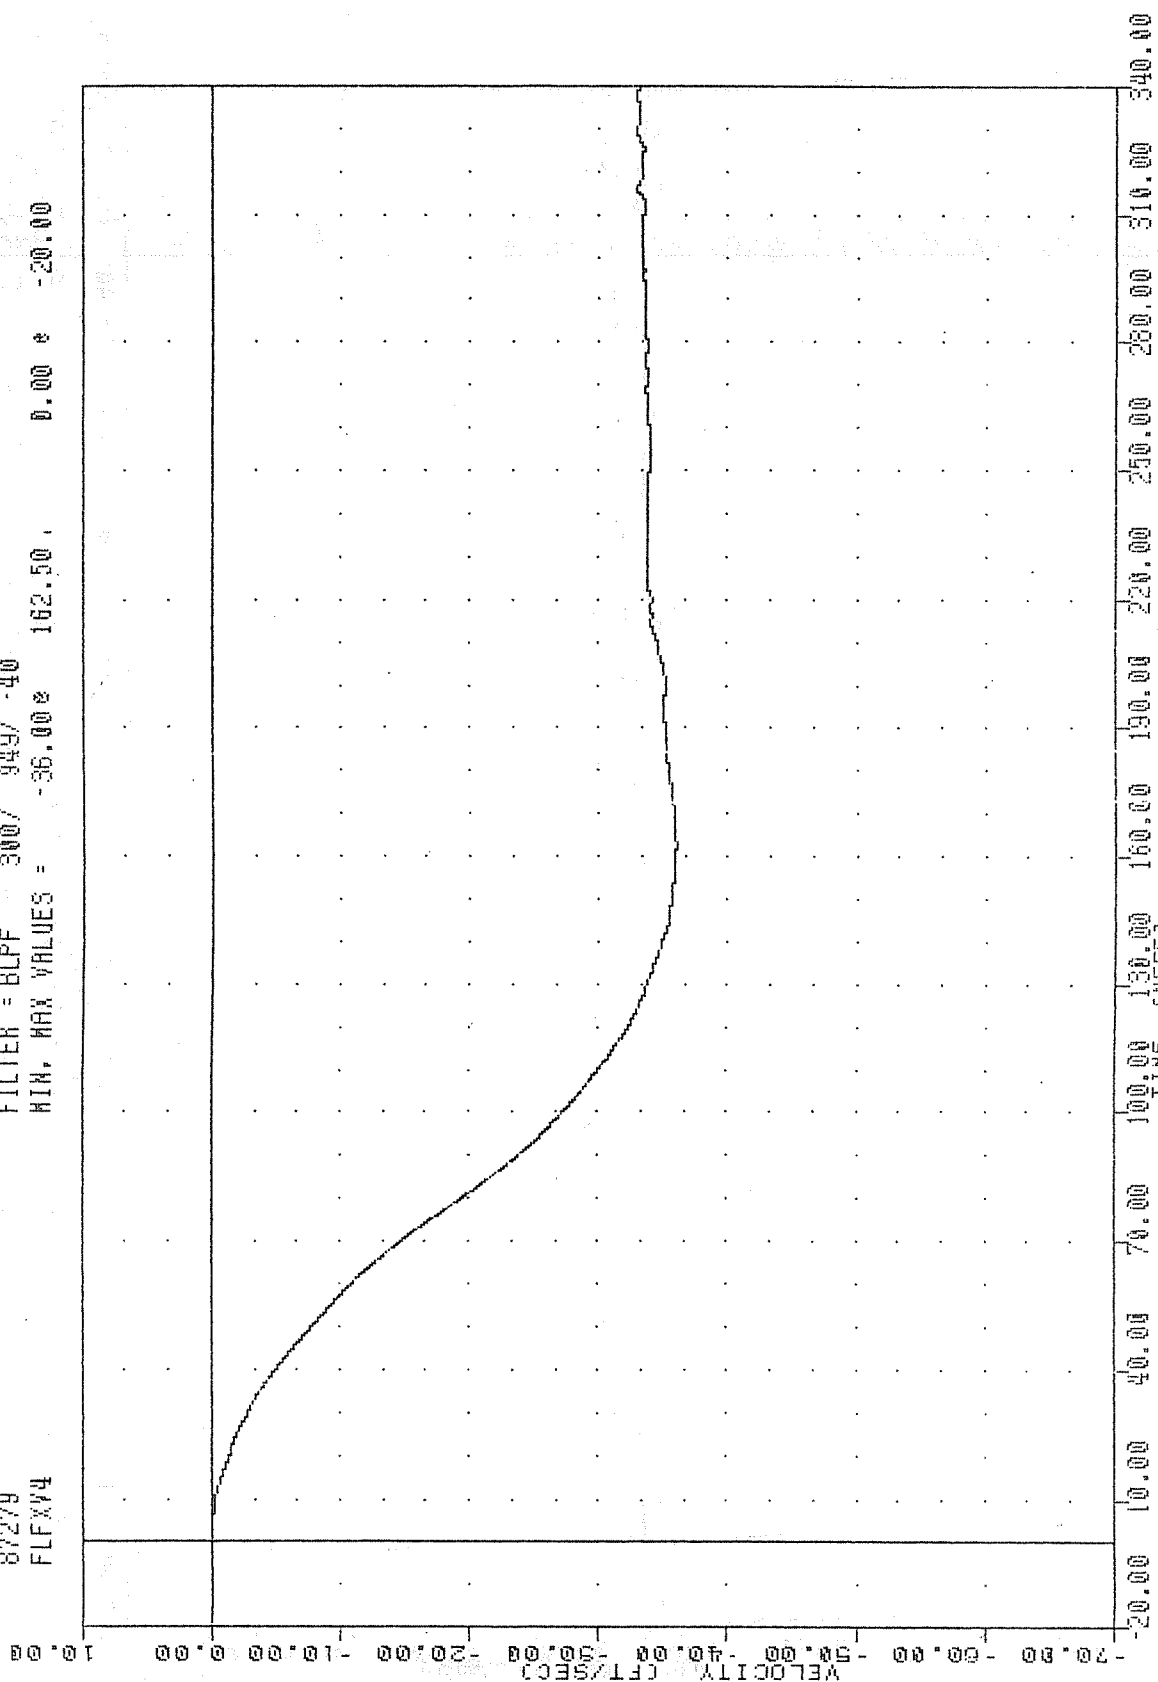

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK LONGITUDINAL VELOCITY - FORWARD

FAR , TEST 02

CRASH SIMULATION

87279

FLFY64

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.77e 216.13 , 0.67 e 243.38

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-20.00

10.00

40.00

70.00

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK LATERAL ACCELERATION - FORWARD

FRAH , TEST 02


CRASH SIMULATION

87279

FLFZ64

FILTER = 8LFF 100/ 316/ -40

MIN, MAX VALUES = -4.84g 185.25, 7.00 g 220.38

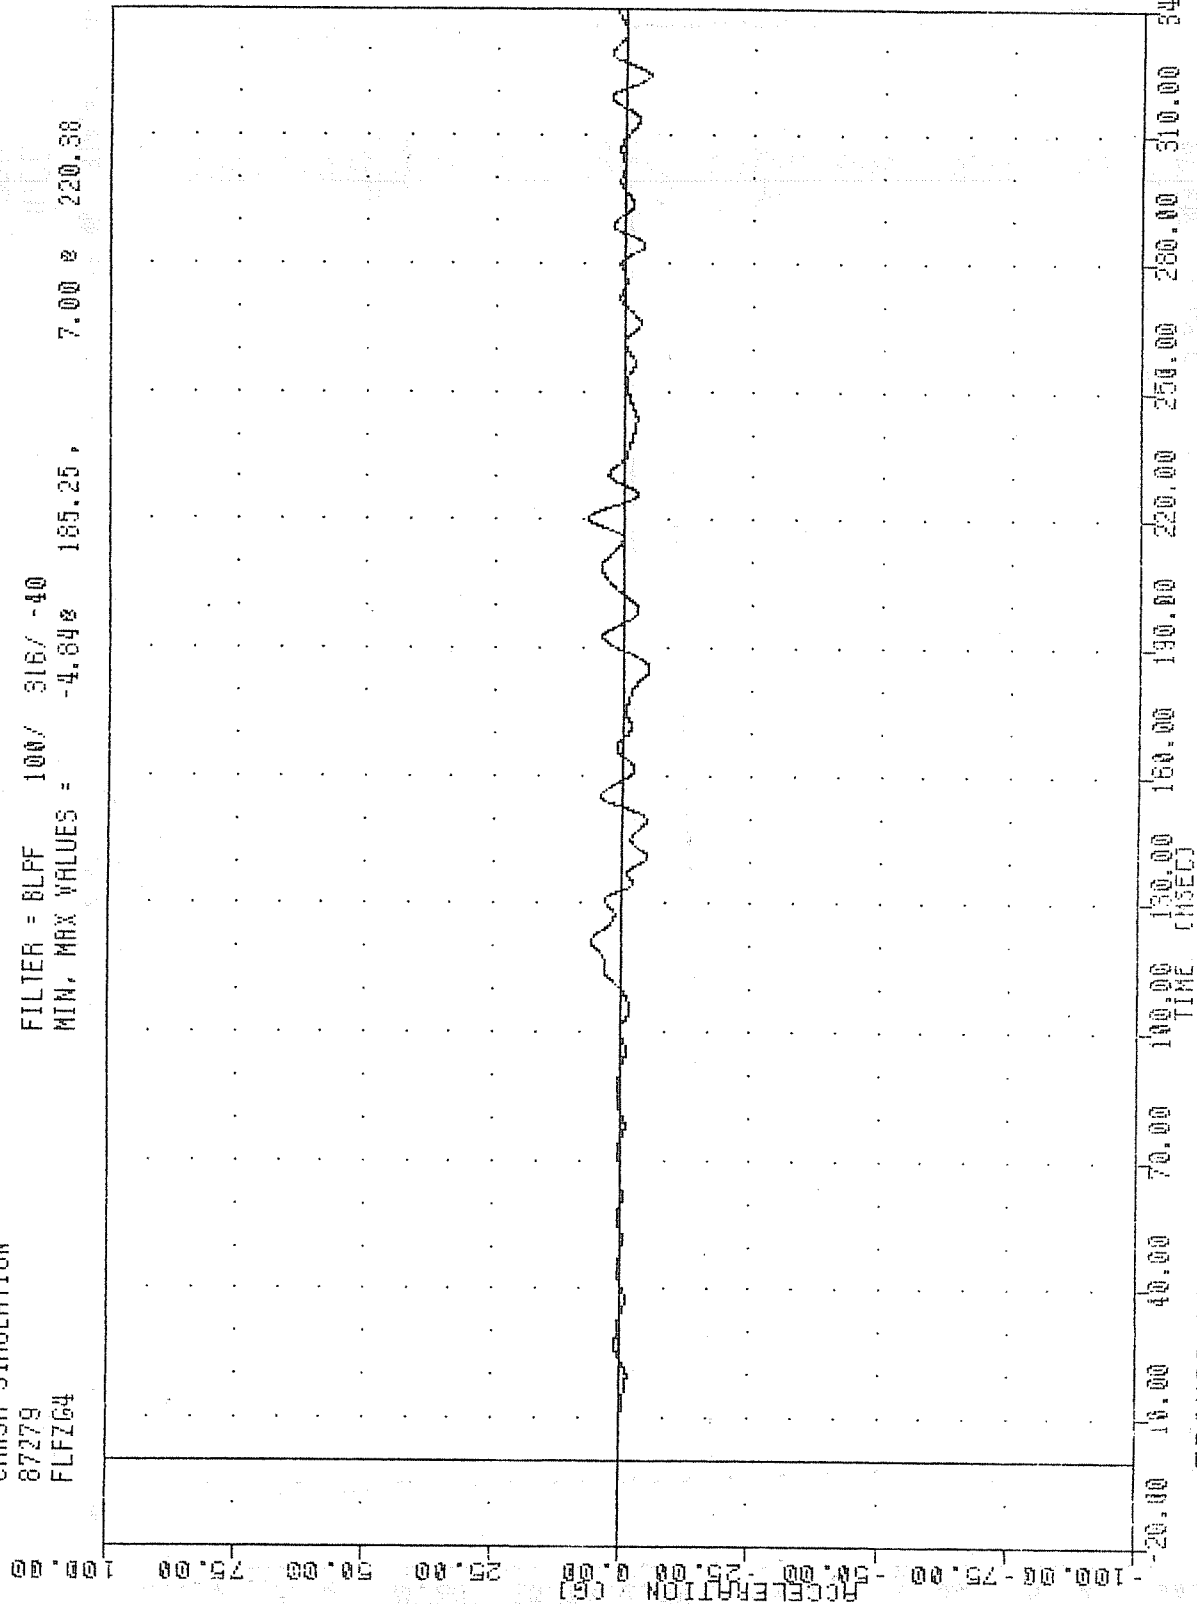


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK VERTICAL ACCELERATION - FORWARD

FAR , TEST 02
 CRASH SIMULATION
 87279
 FLFRG4

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.028 -19.00, 15.03 8 79.50

ACCELERATION (G)

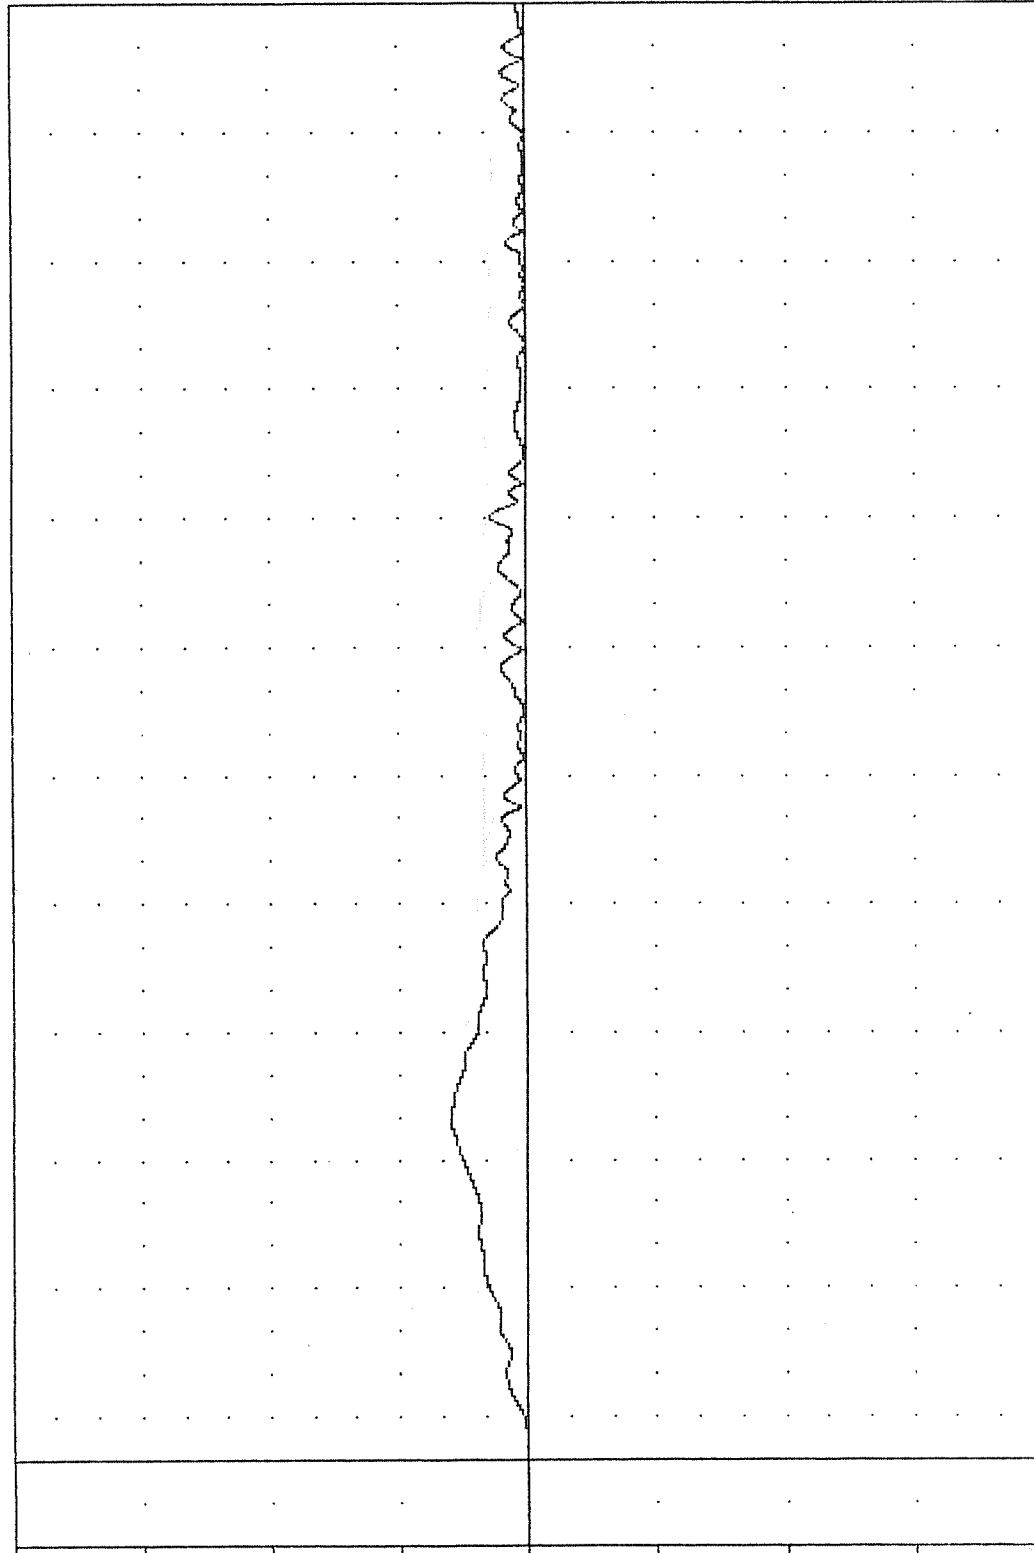

-20.00 10.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 STARBOARD INBOARD SEAT TRACK ACCELERATION - FORWARD RESULTANT

FAR TEST 02

CRASH SIMULATION

87279

FUSXG1

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES =


-15.218

79.63

2.77

187.63

ACCELERATION (G)

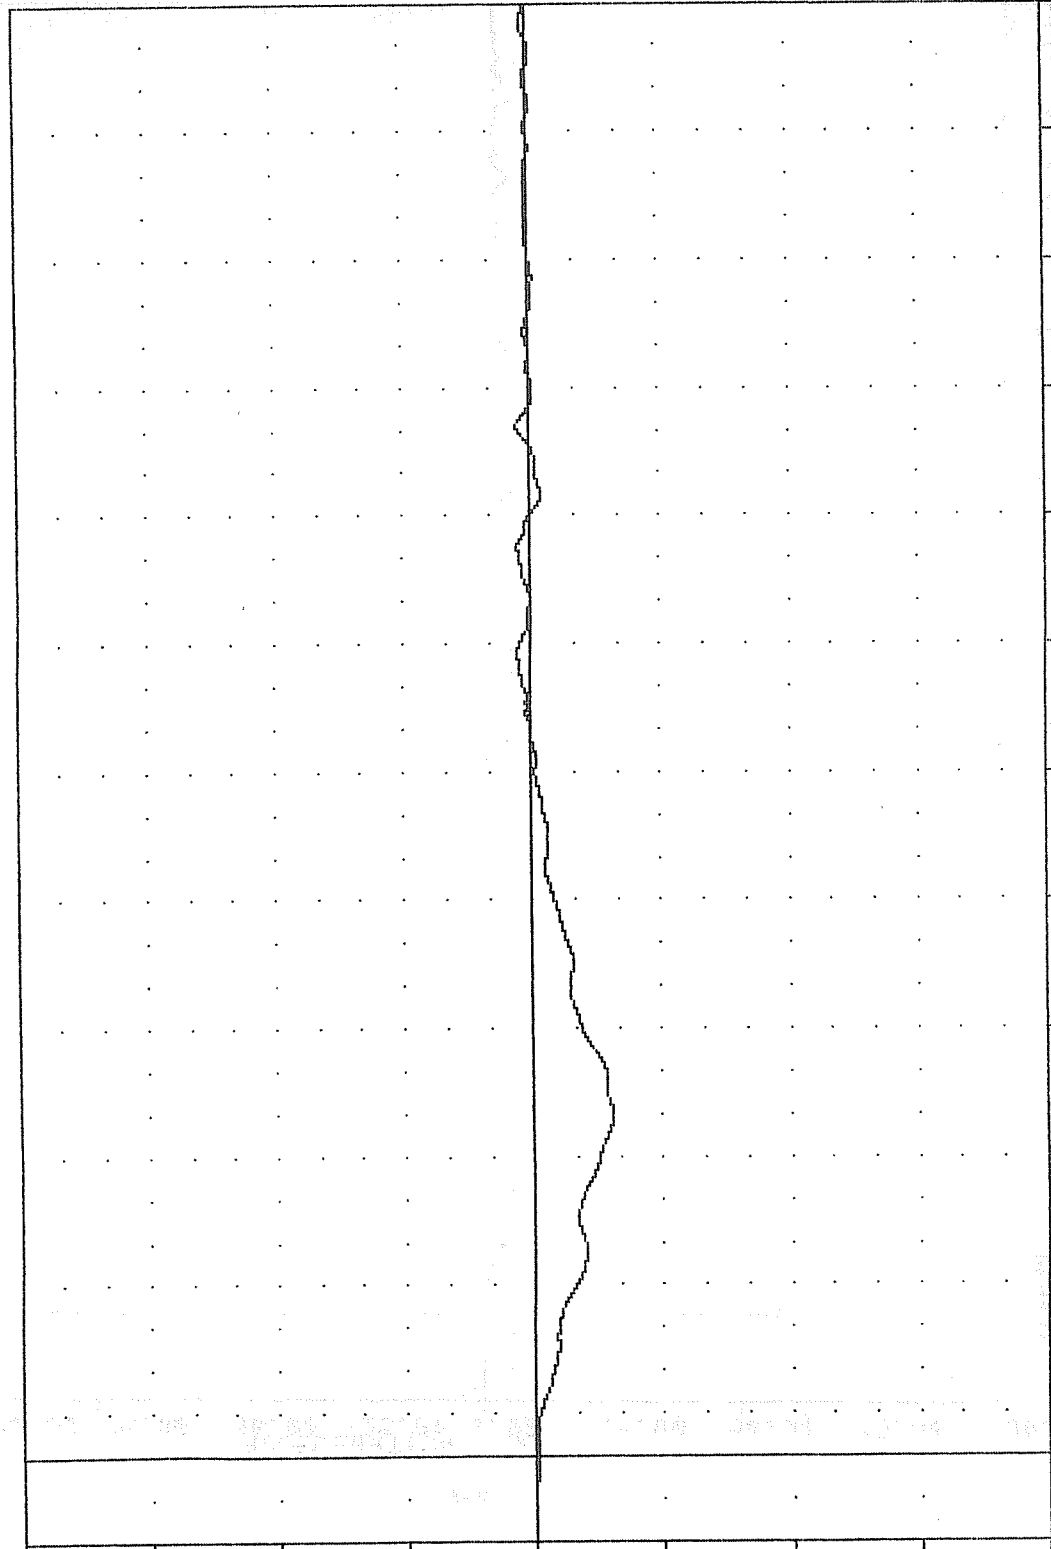

100.00 75.00 50.00 25.00 0.00 -25.00 -50.00 -75.00 -100.00


0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TIME (MSEC)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
PORT FUSELAGE LONGITUDINAL ACCELERATION

FAR , TEST 02
 CRASH SIMULATION
 87279
 FUSXV1

FILTER = BLPF 300/ 949/ -40
 MIN. MAX VALUES = -35.94e 169.13 , 0.00 e -11.50

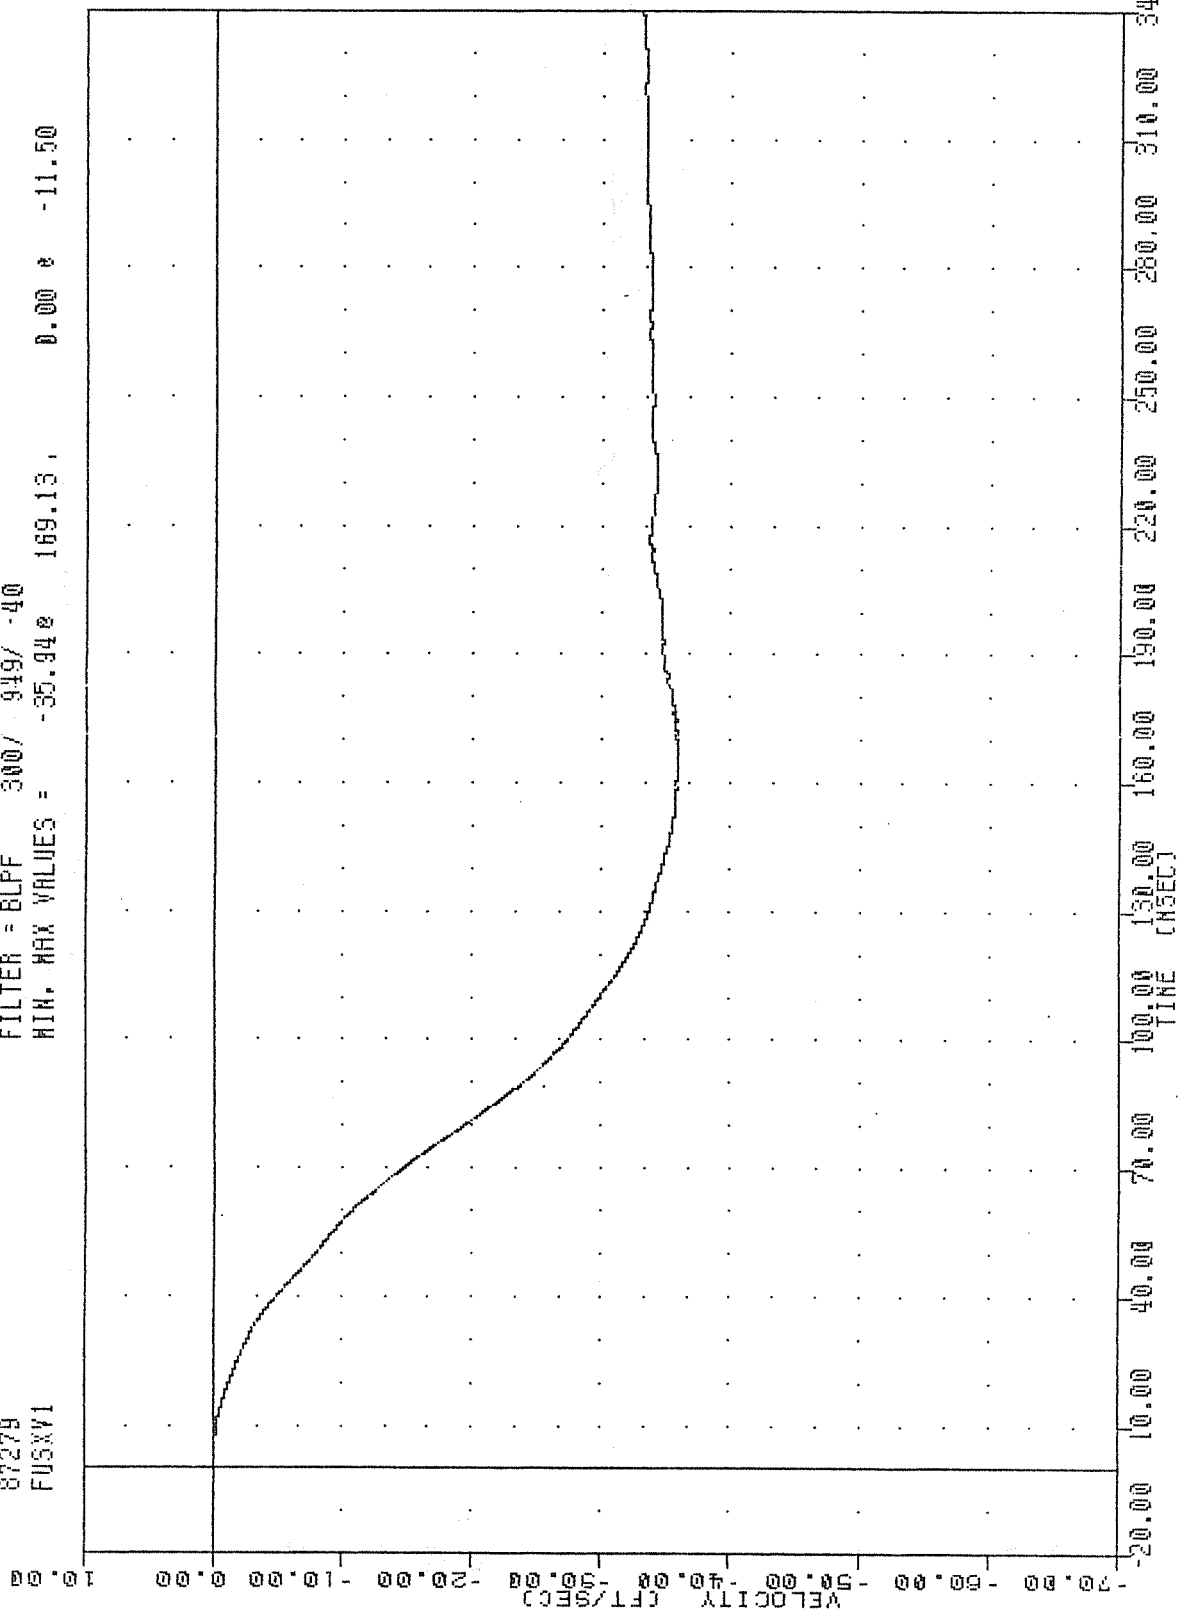


B-87

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 PORT FUSELAGE LONGITUDINAL VELOCITY

FAR , TEST 02
 CRASH SIMULATION
 87279
 FUSX62


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -15.39 90.50 , 5.16 e 186.63

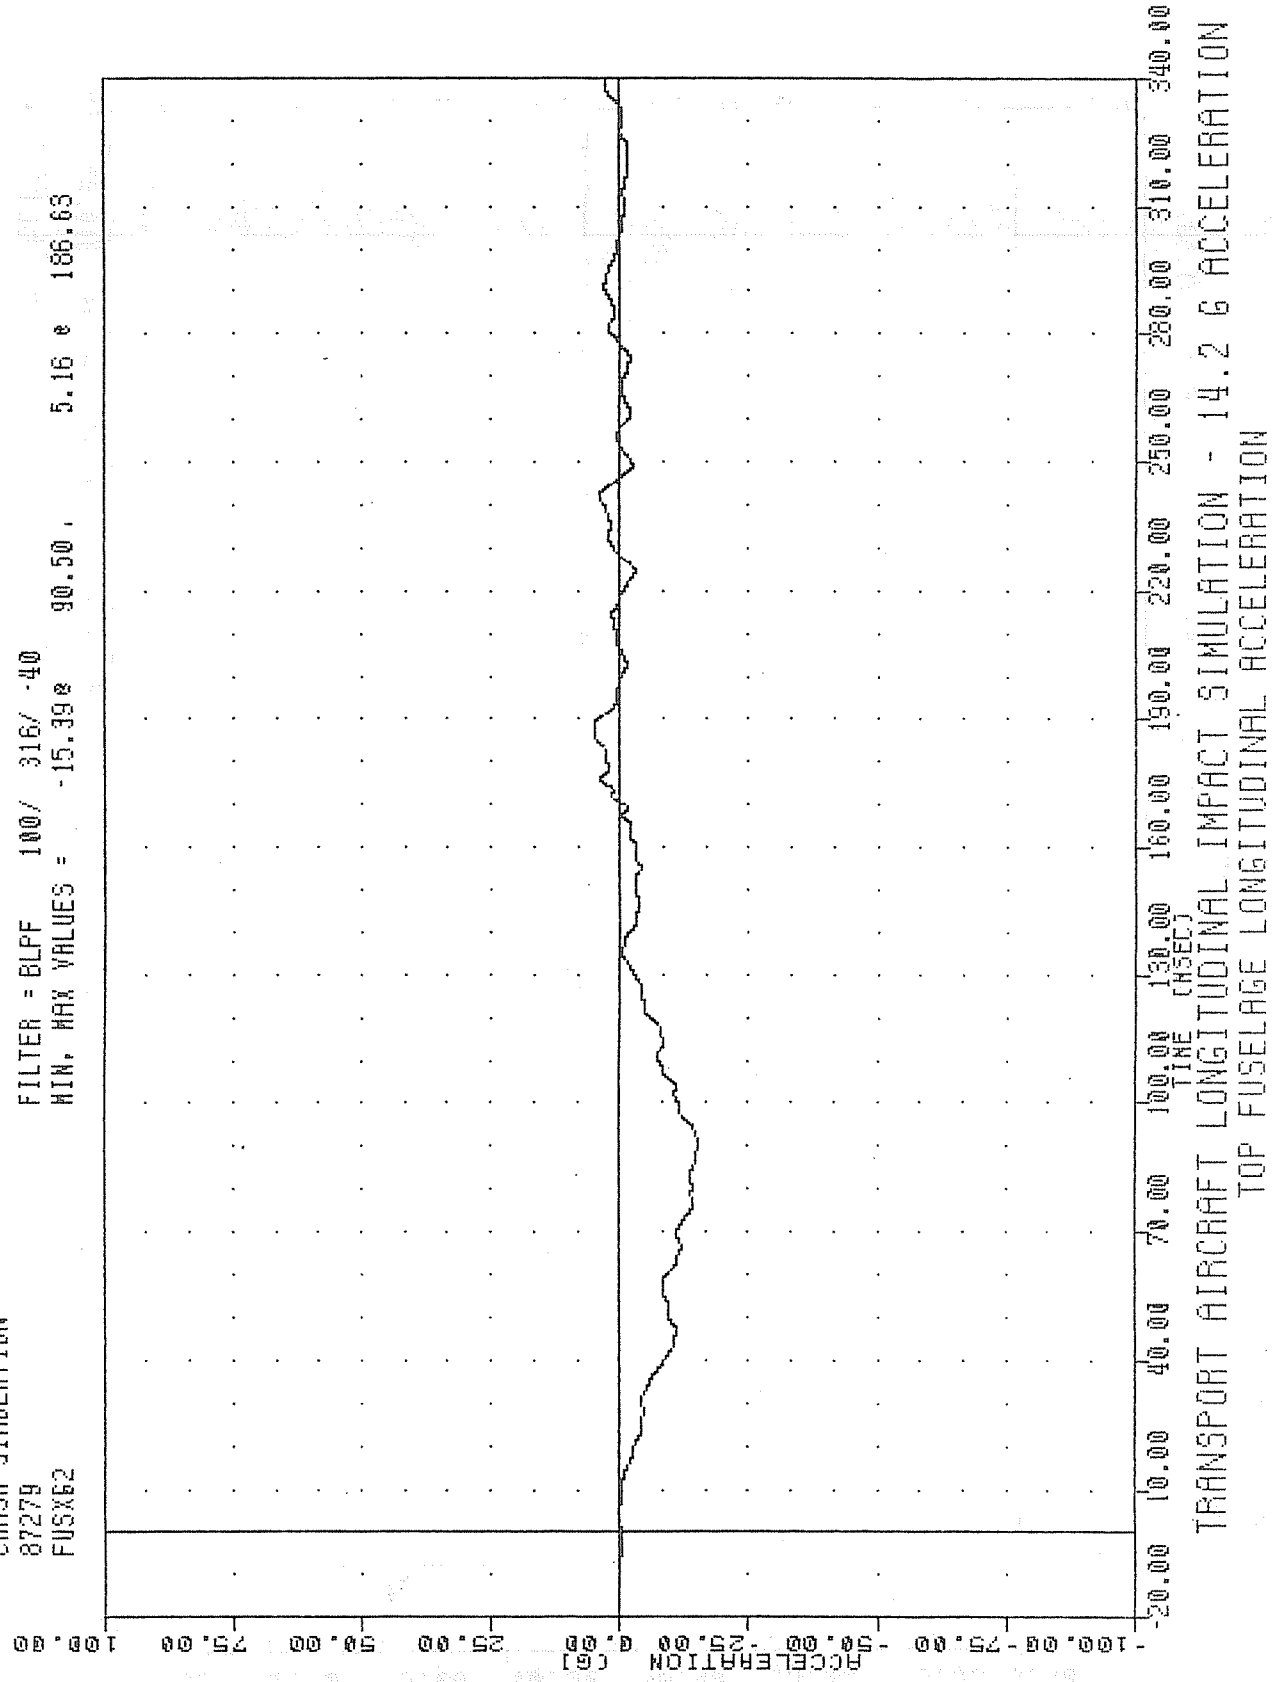

FAR , TEST 02
 CRASH SIMULATION
 87279
 FUSXV2

FILTER = BLPF 300/ 949/ -40
 MIN. MAX VALUES = -37.12 168.63, 0.01 e -11.25

VELOCITY (FT/SEC)

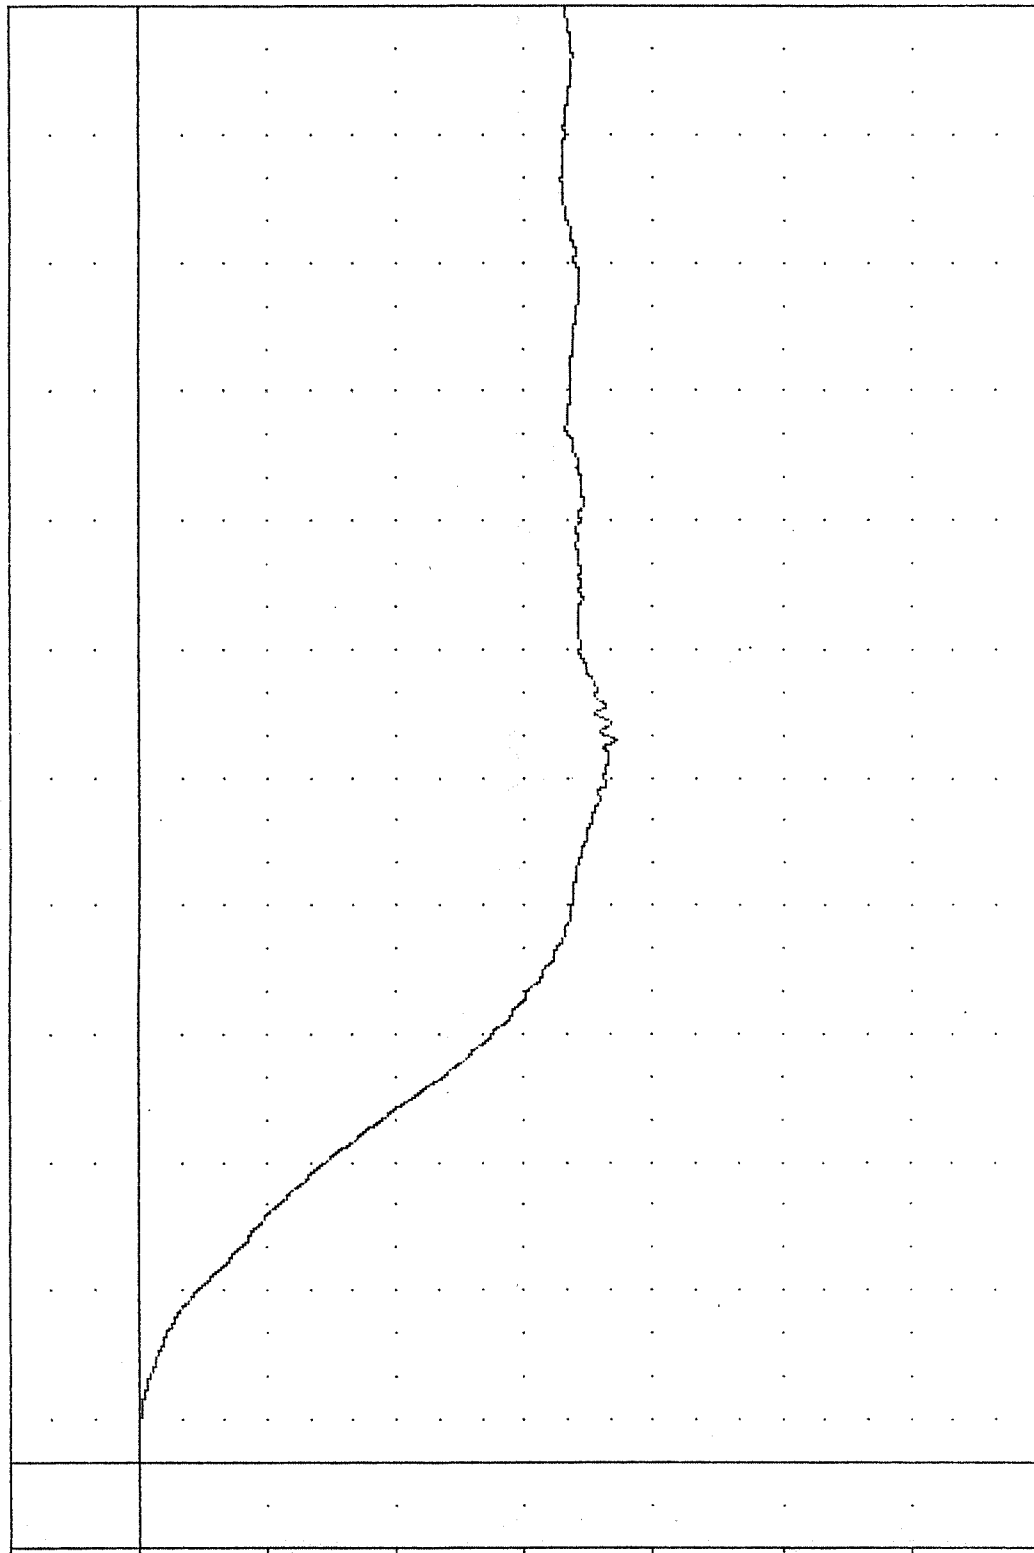

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 TOP FUSELAGE LONGITUDINAL VELOCITY

FAR , TEST 02


CRASH SIMULATION

87279

FUSAGE

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -15.01 78.13 7.18 154.63

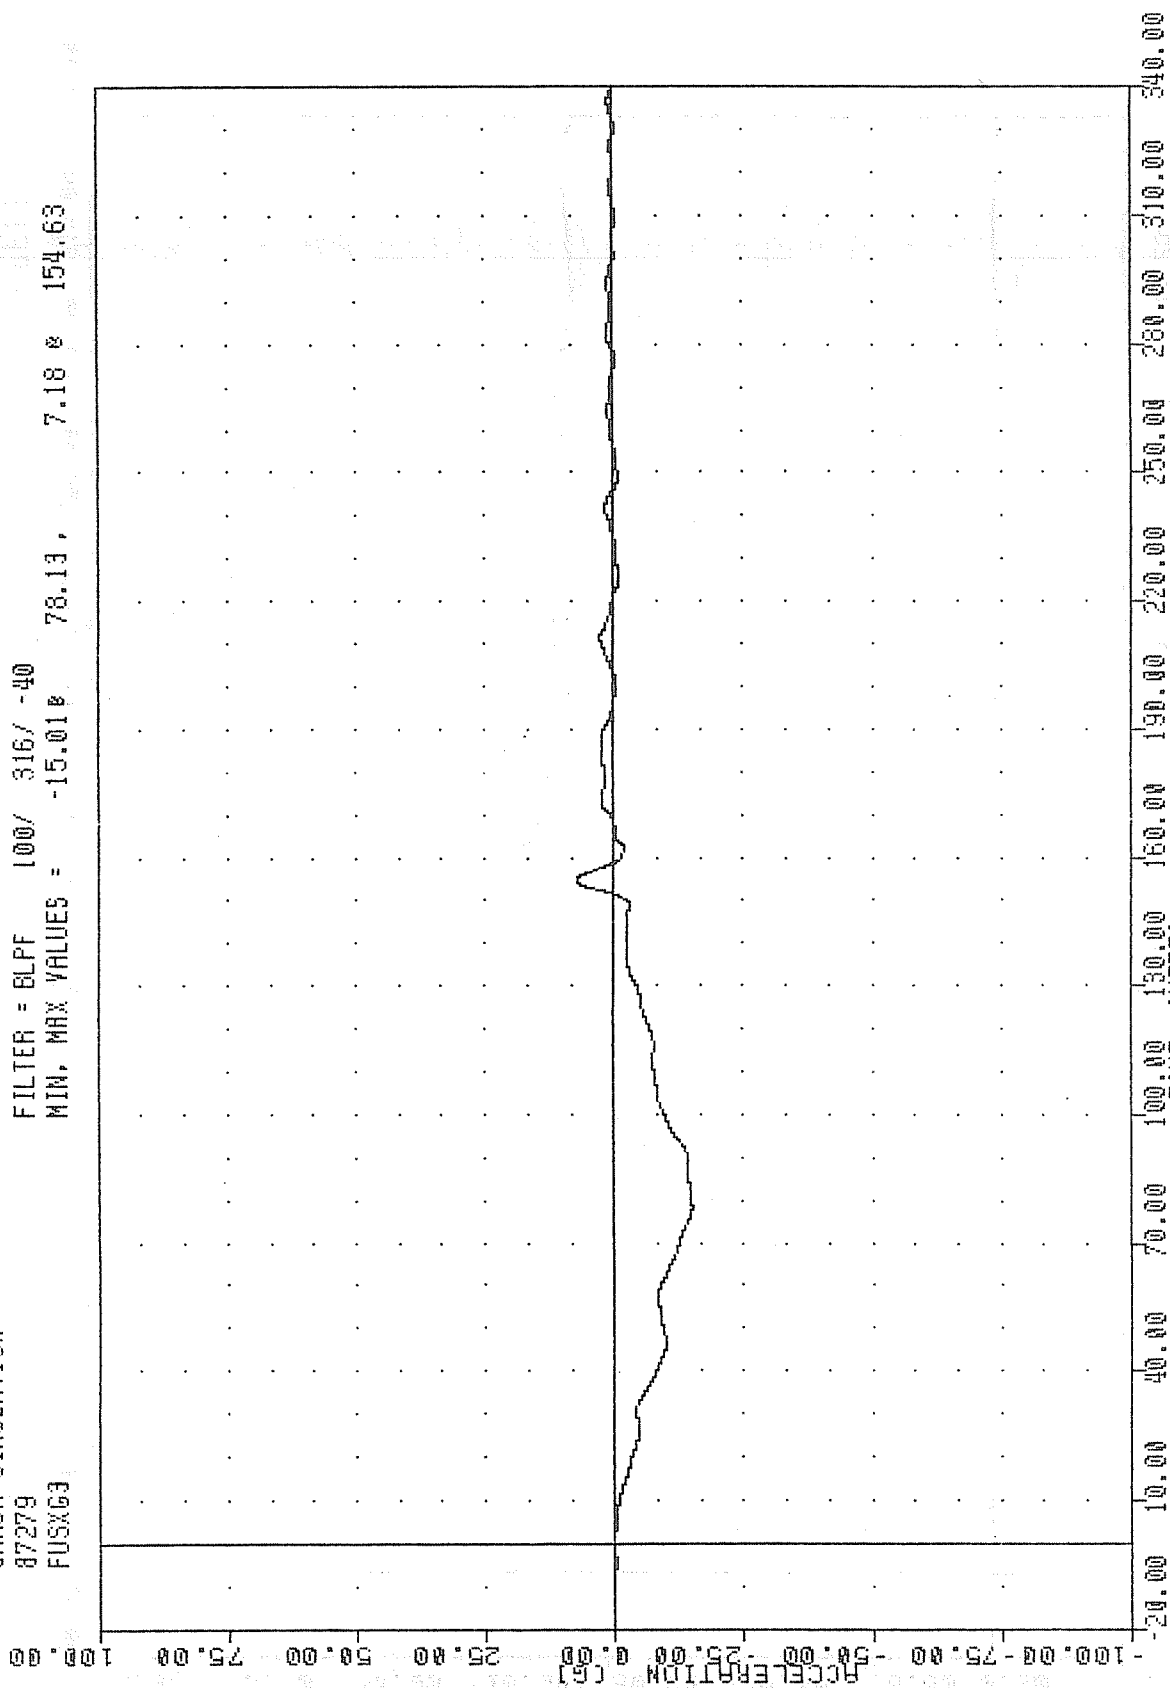

B-90

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD FUSELAGE LONGITUDINAL ACCELERATION

FAR TEST 02


CRASH SIMULATION

87279

FUSXV3

FILTER = 8LPF 300/ 949/ -40

MIN. MAX VALUES = -35.22 148.50 0.01 0 -15.38

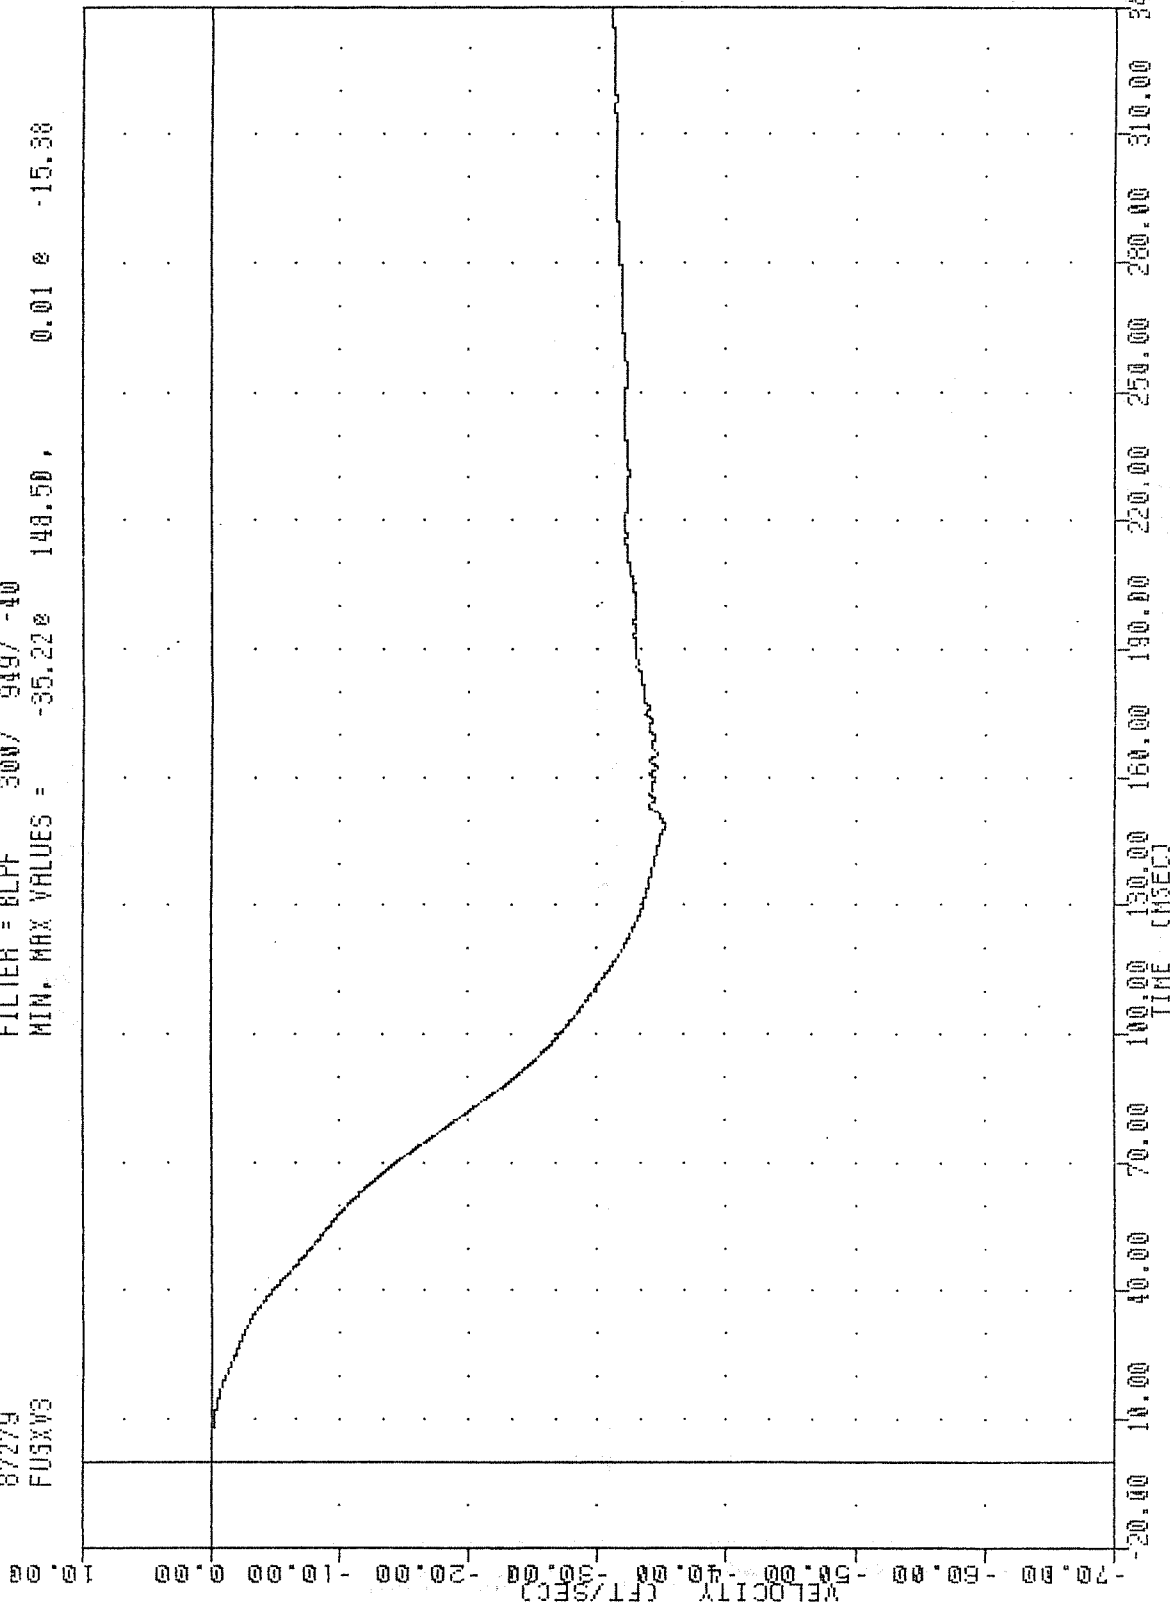


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD FUSELAGE LONGITUDINAL VELOCITY

FAR TEST 02
 CRASH SIMULATION
 87279
 SECX6

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -13.76 80.00 1.25 136.50

ACCELERATION (G)

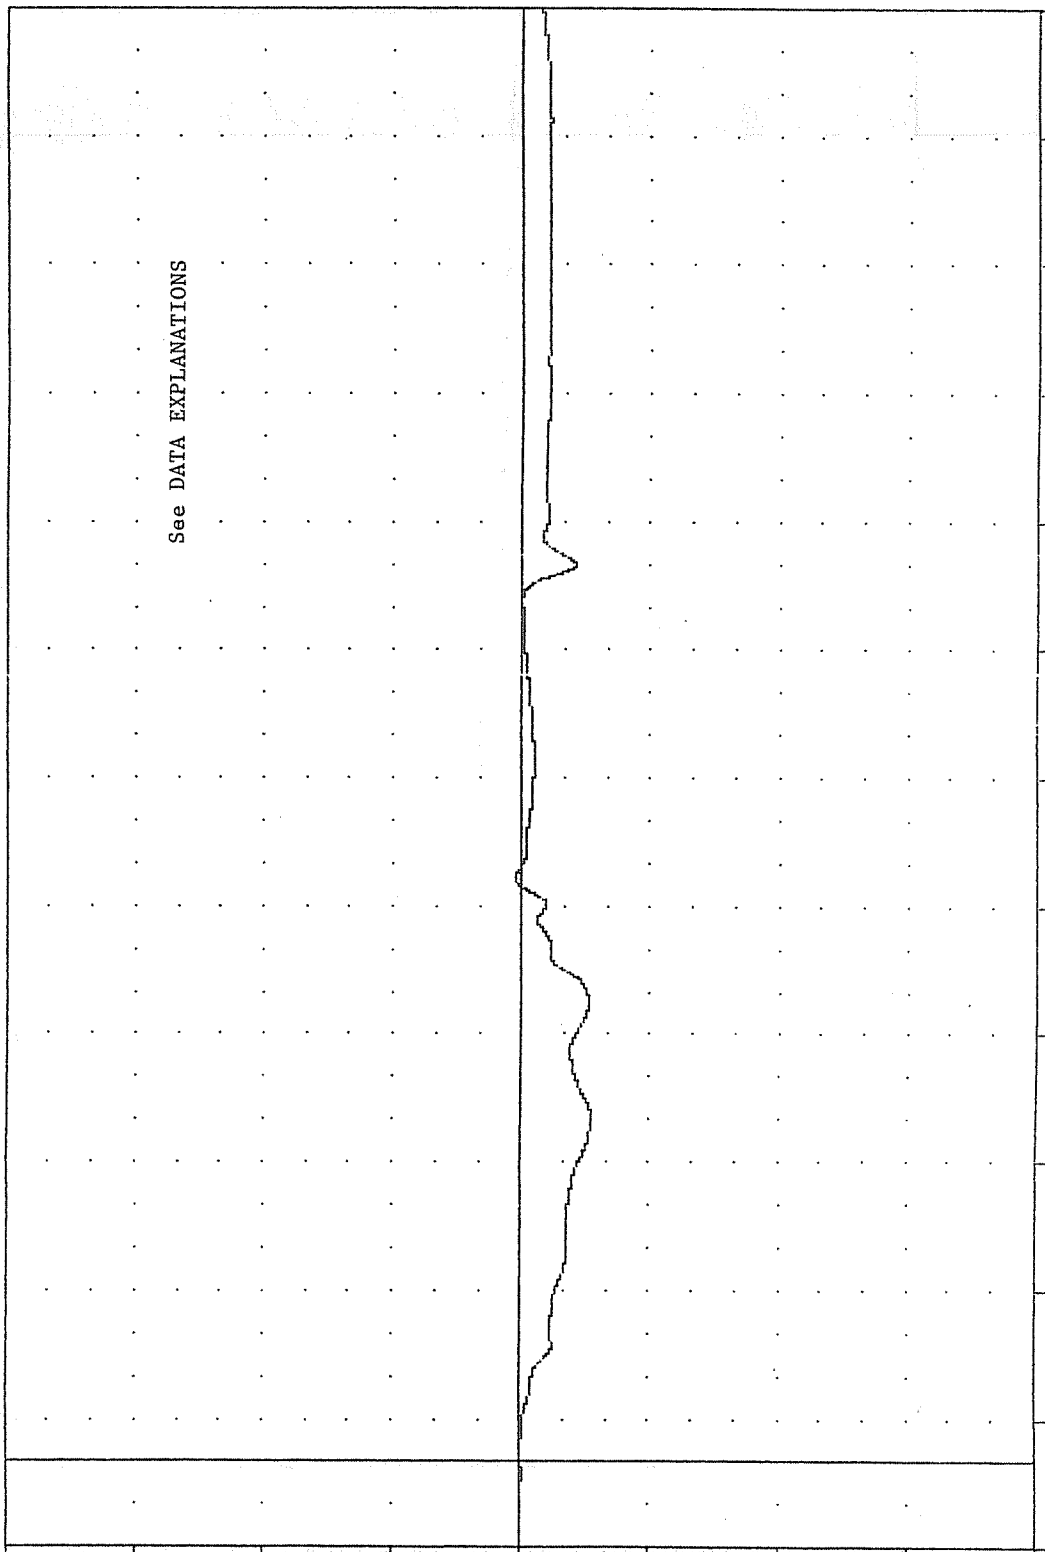

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT C LONGITUDINAL ACCELERATION


FAR , TEST 02
CRASH SIMULATION

87279
SECXV

FILTER = BLPF 300/ 949/ -40

MIN. MAX VALUES = -57.732 340.00 0.00 0 -12.75

VELOCITY (FT/SEC)

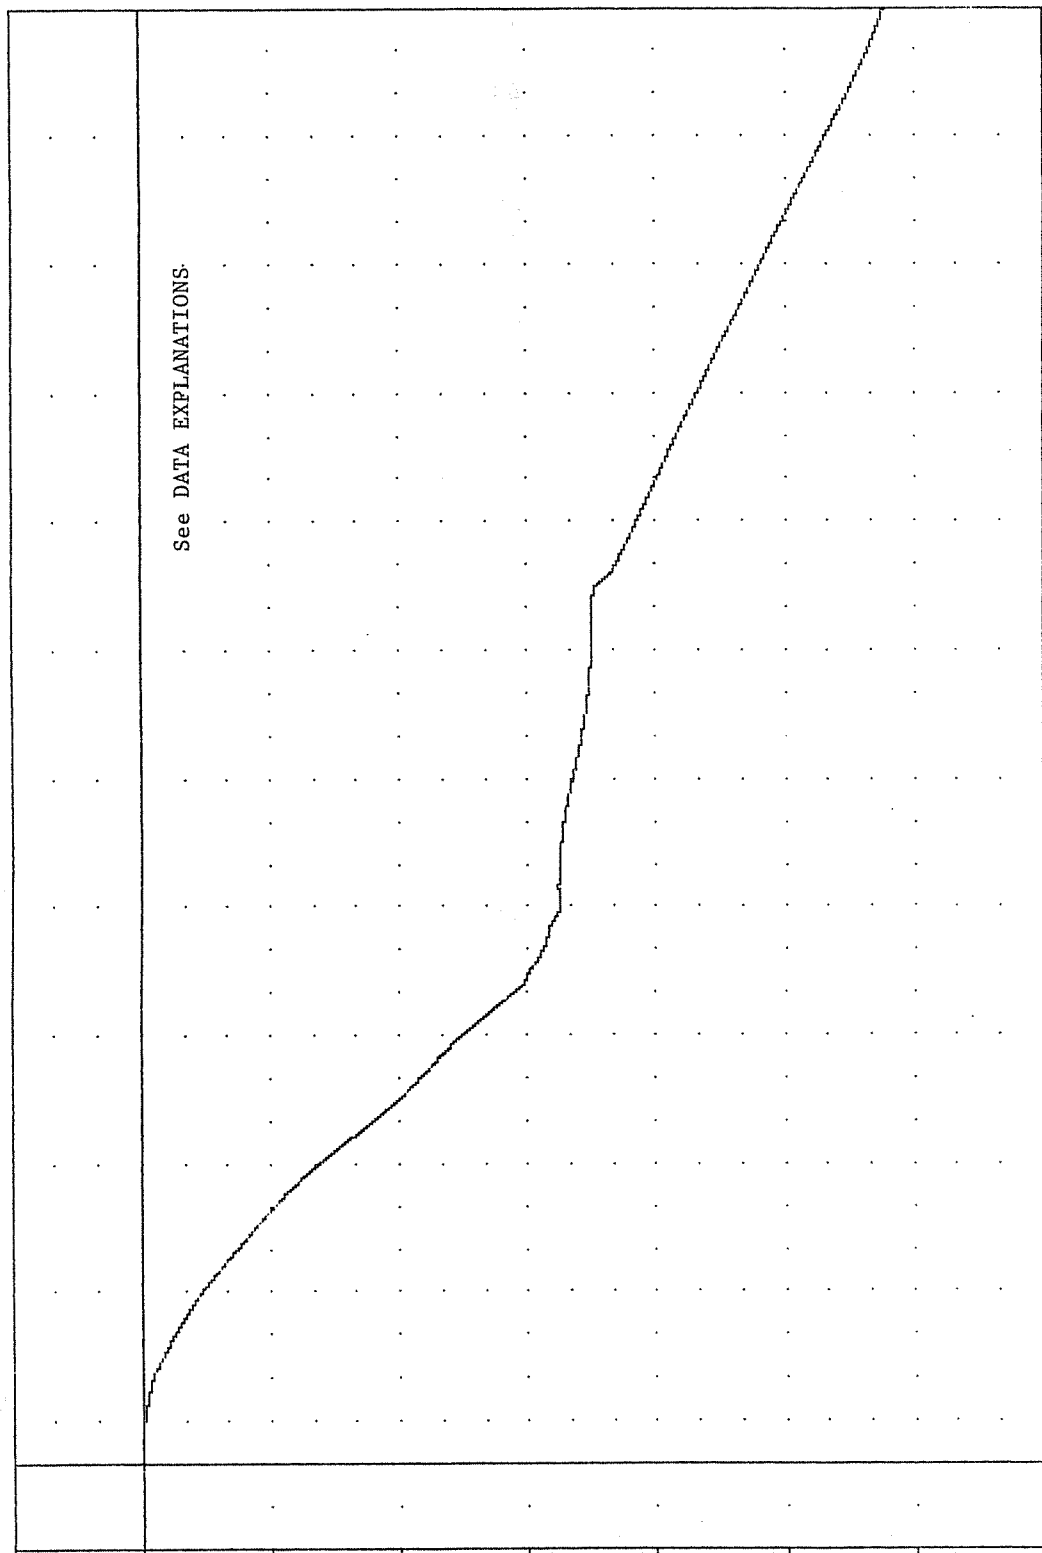

See DATA EXPLANATIONS.

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C LONGITUDINAL VELOCITY


FAR , TEST 02
CRASH SIMULATION

87279
SECZG

FILTER = BLPF 100/ 316/ -40
MIN. MAX VALUES = -4.88% 163.38 , 2.34 % 111.75

ACCELERATION (G)

B-94

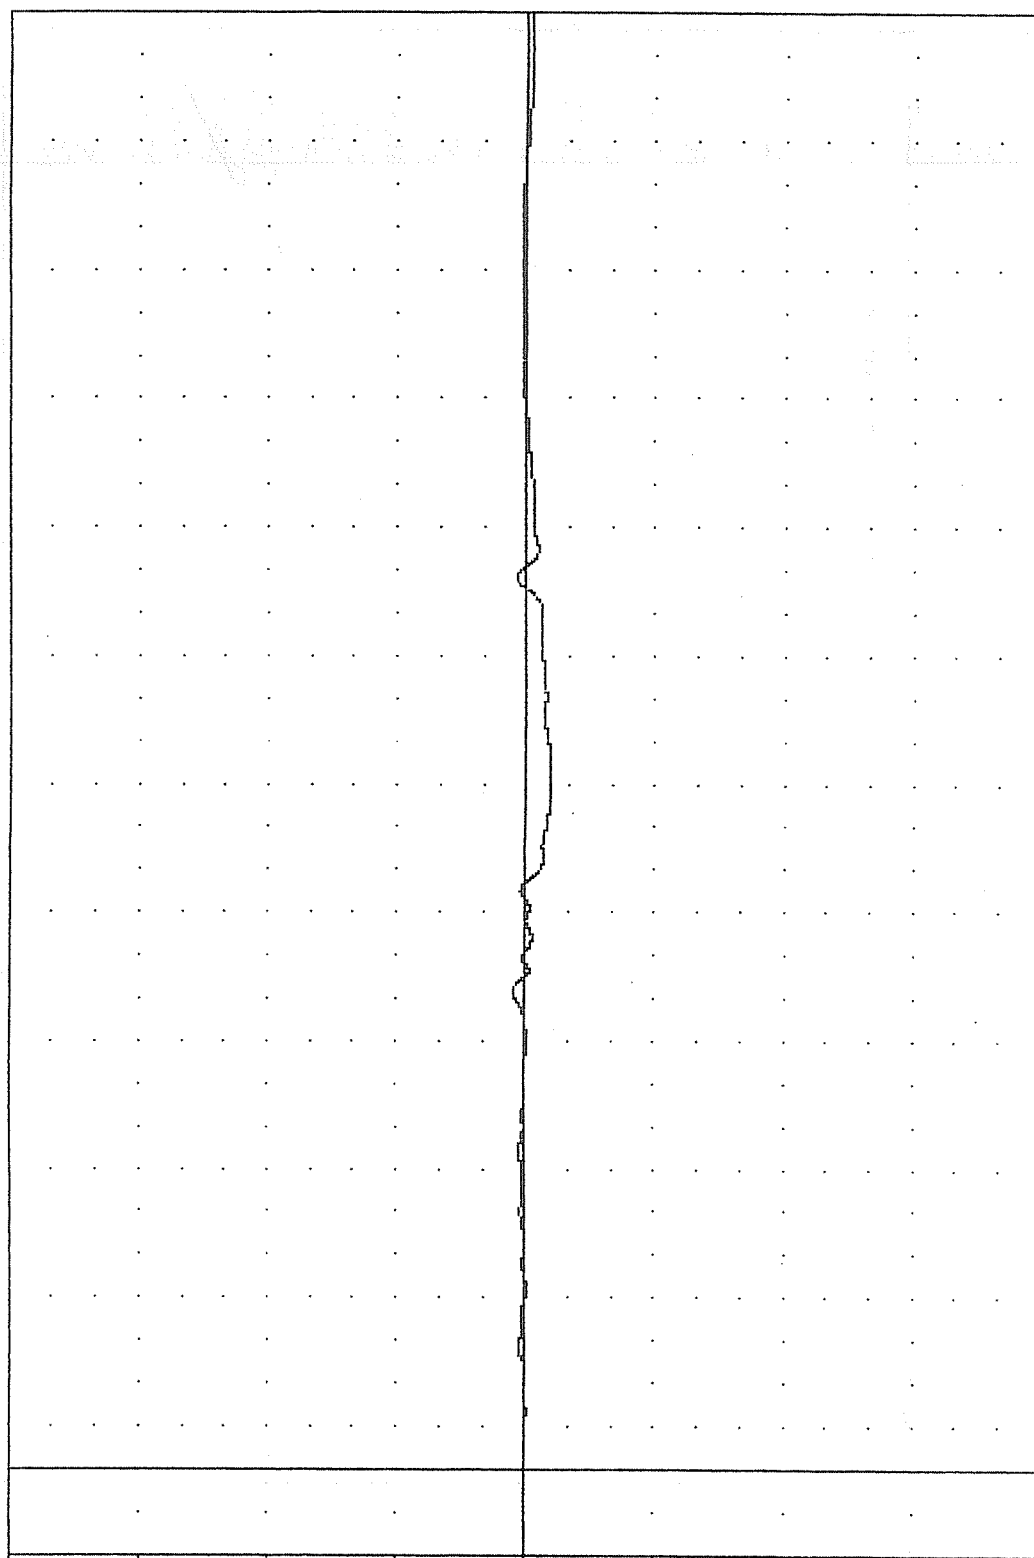

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C VERTICAL ACCELERATION

FAR TEST 02

CRASH SIMULATION

87279

SEDXG

FILTER = 8LPE 100/ 316/ -40

MIN. MAX VALUES = -13.97 76.63

2.46 244.13

100.00

75.00

50.00

25.00

0.00

-25.00

-50.00

-75.00

-100.00

-20.00

10.00

40.00

70.00

100.00

130.00

160.00

190.00

220.00


250.00

280.00

310.00

340.00

B-95

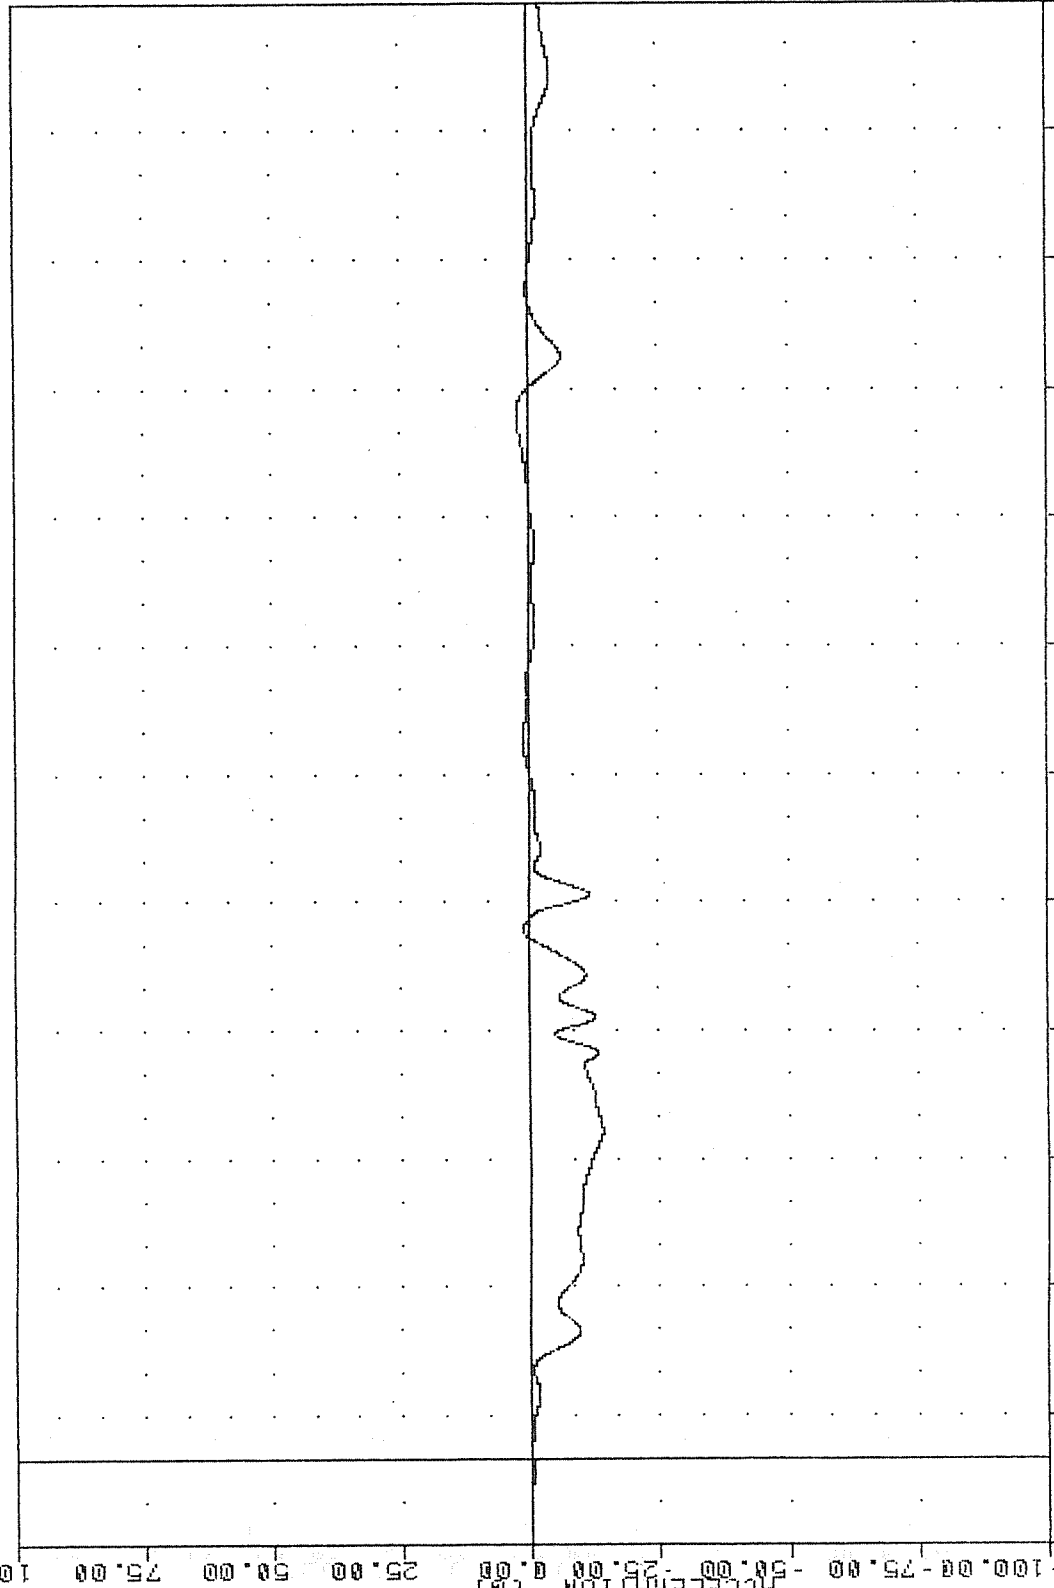

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D LONGITUDINAL ACCELERATION

CRASH SIMULATION


6220

SEX

07- 1676 300 949- 40
FILTER = BLPF J478 = H31713

MIN, MAX VALUES = -37.748 340.001

0.00 & -15.00

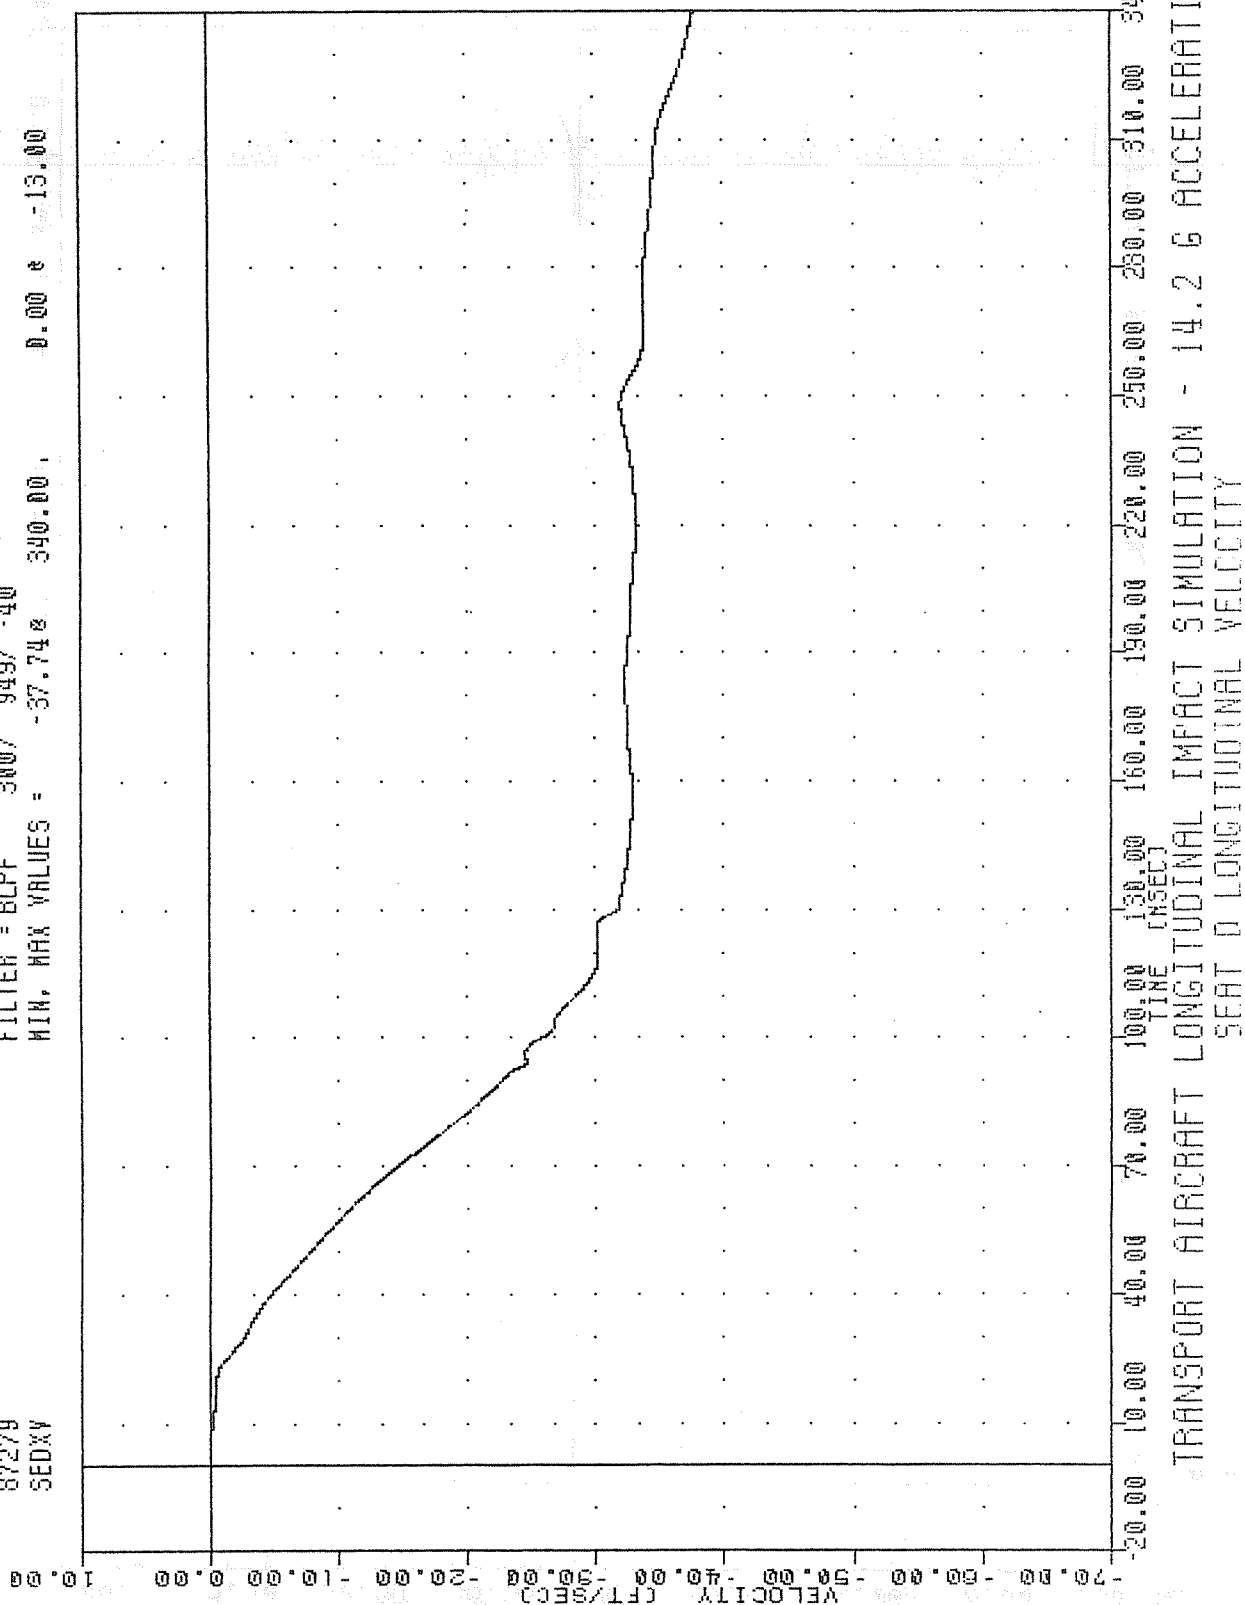

FAR , TEST 02


CARSH SIMULATION

87279

SE0Y6

FILTER = BLPF 100/ 316/ -40
MIN. MAX VALUES = -10.468 2.08 145.88

100.00 75.00 50.00 25.00 0.00 -25.00 -50.00 -75.00 -100.00

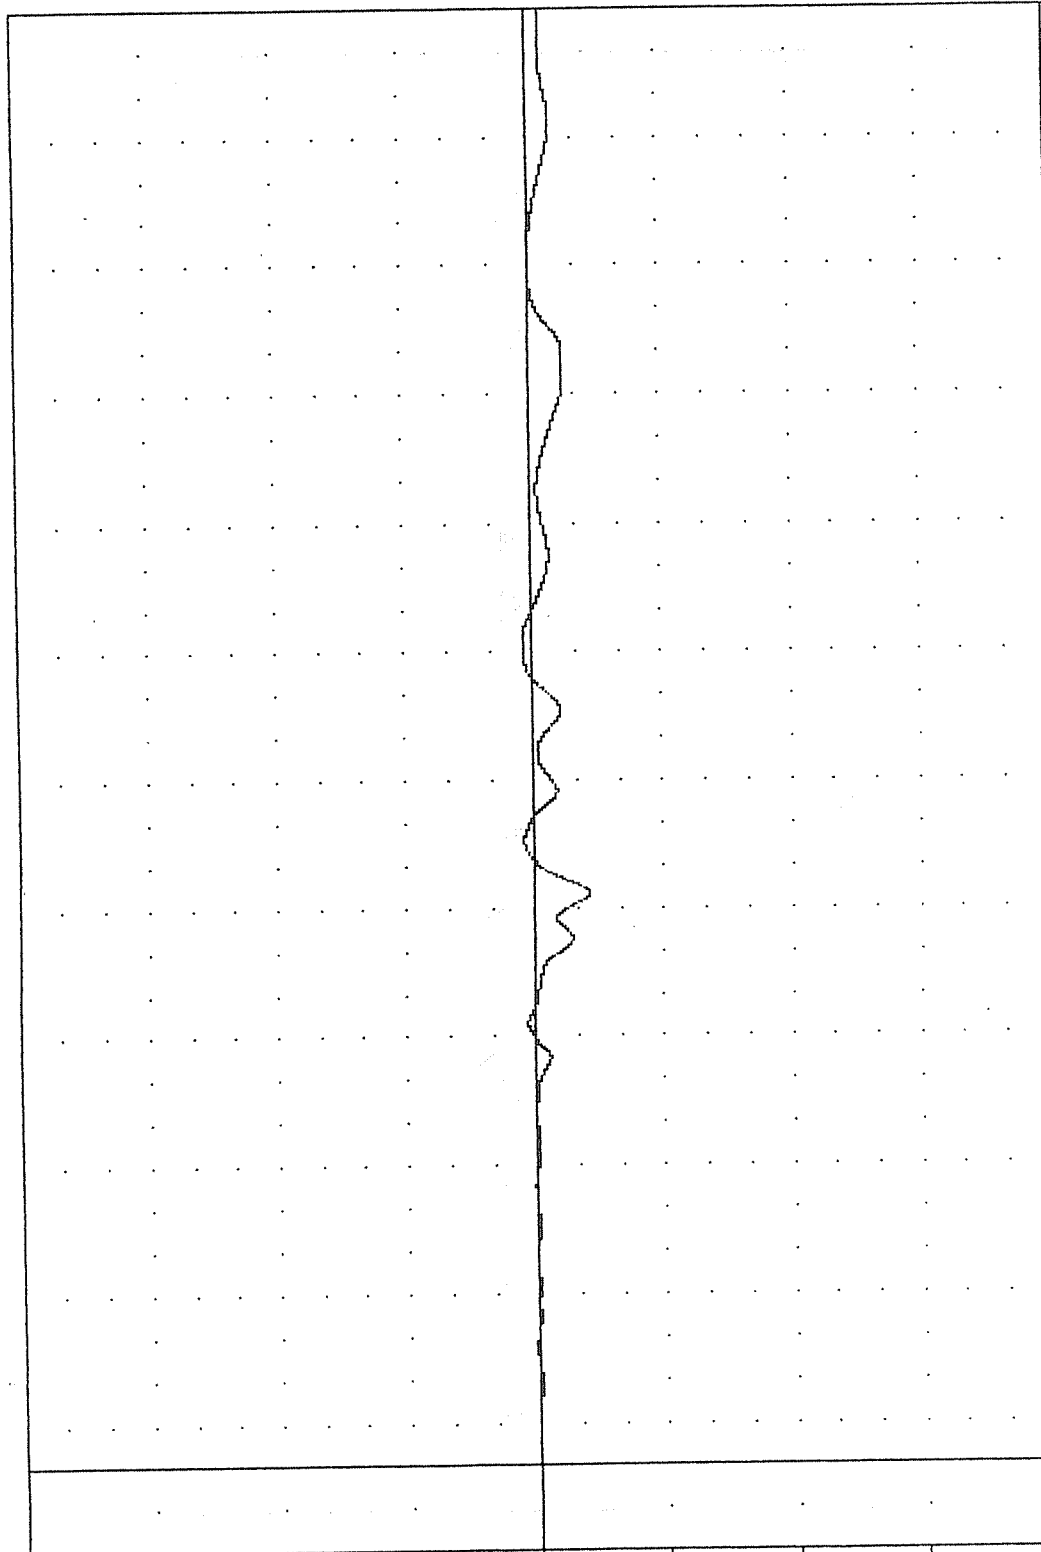

-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D LATERAL ACCELERATION

FAR , TEST 02
CRASH SIMULATION

87279
9E0Z6

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -4.98e 95.13, 15.27 e 131.88

ACCELERATION (G)
-100.00 -75.00 -50.00 -25.00 0.00 25.00 50.00 75.00 100.00

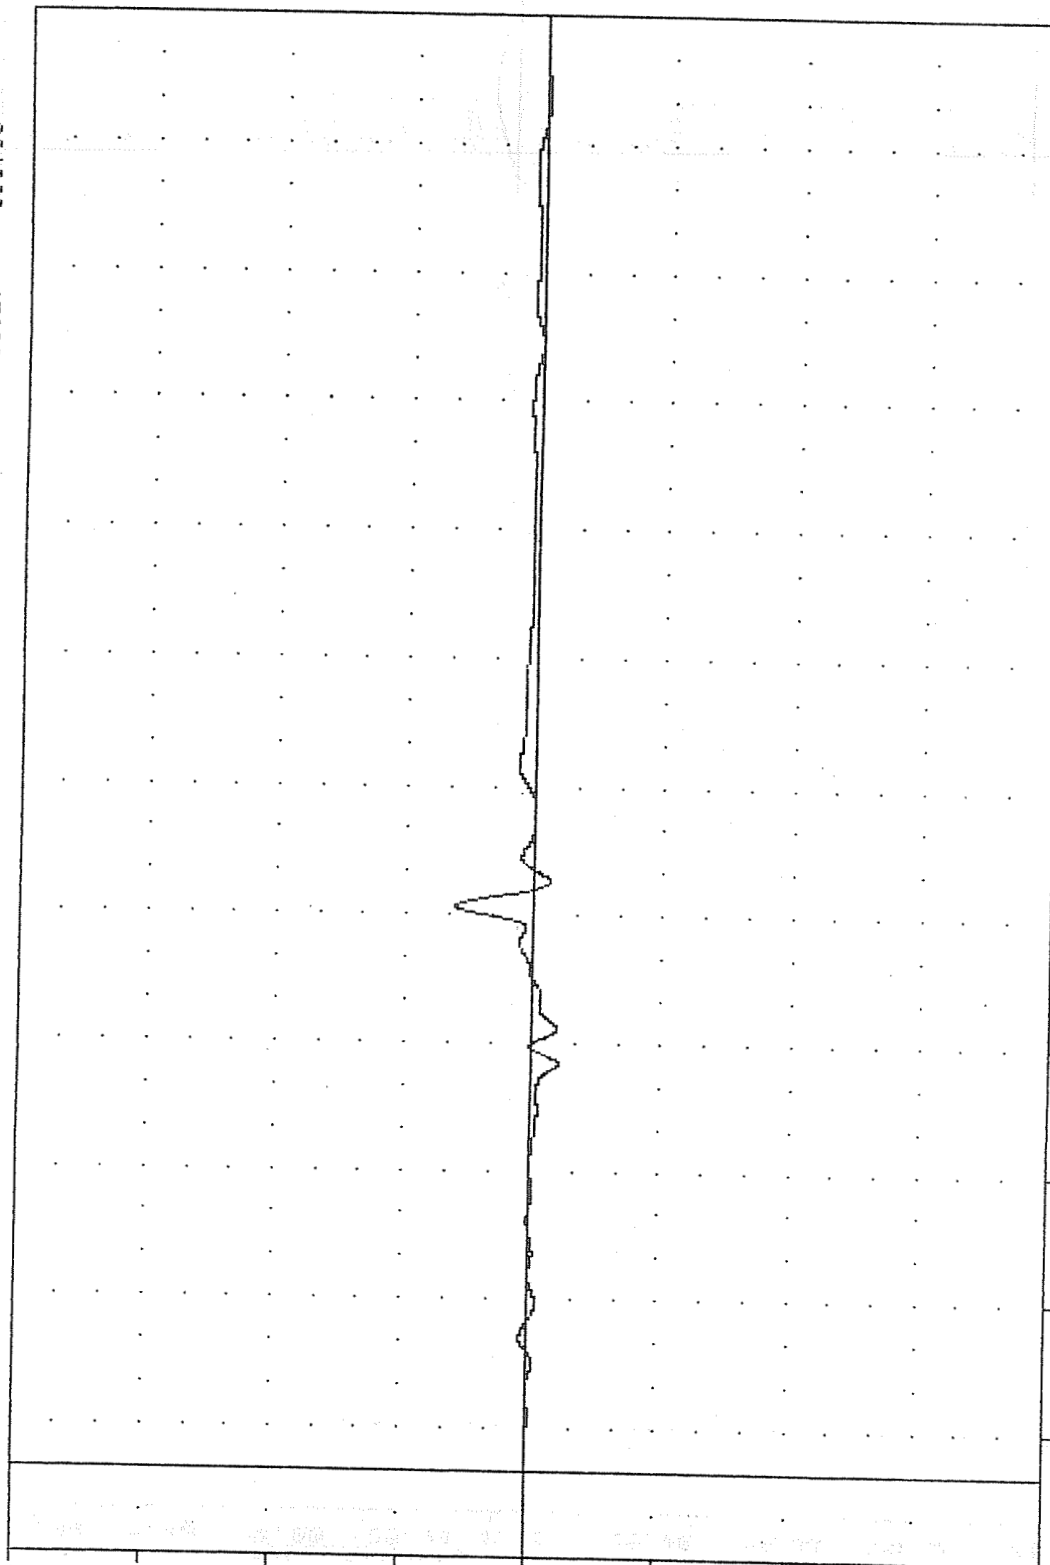

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)
TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT 0 VERTICAL ACCELERATION

FAR , TEST 02

CRASH SIMULATION


87279

SEDRG

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = 0.038 -17.00 ,

21.26 8 132.00

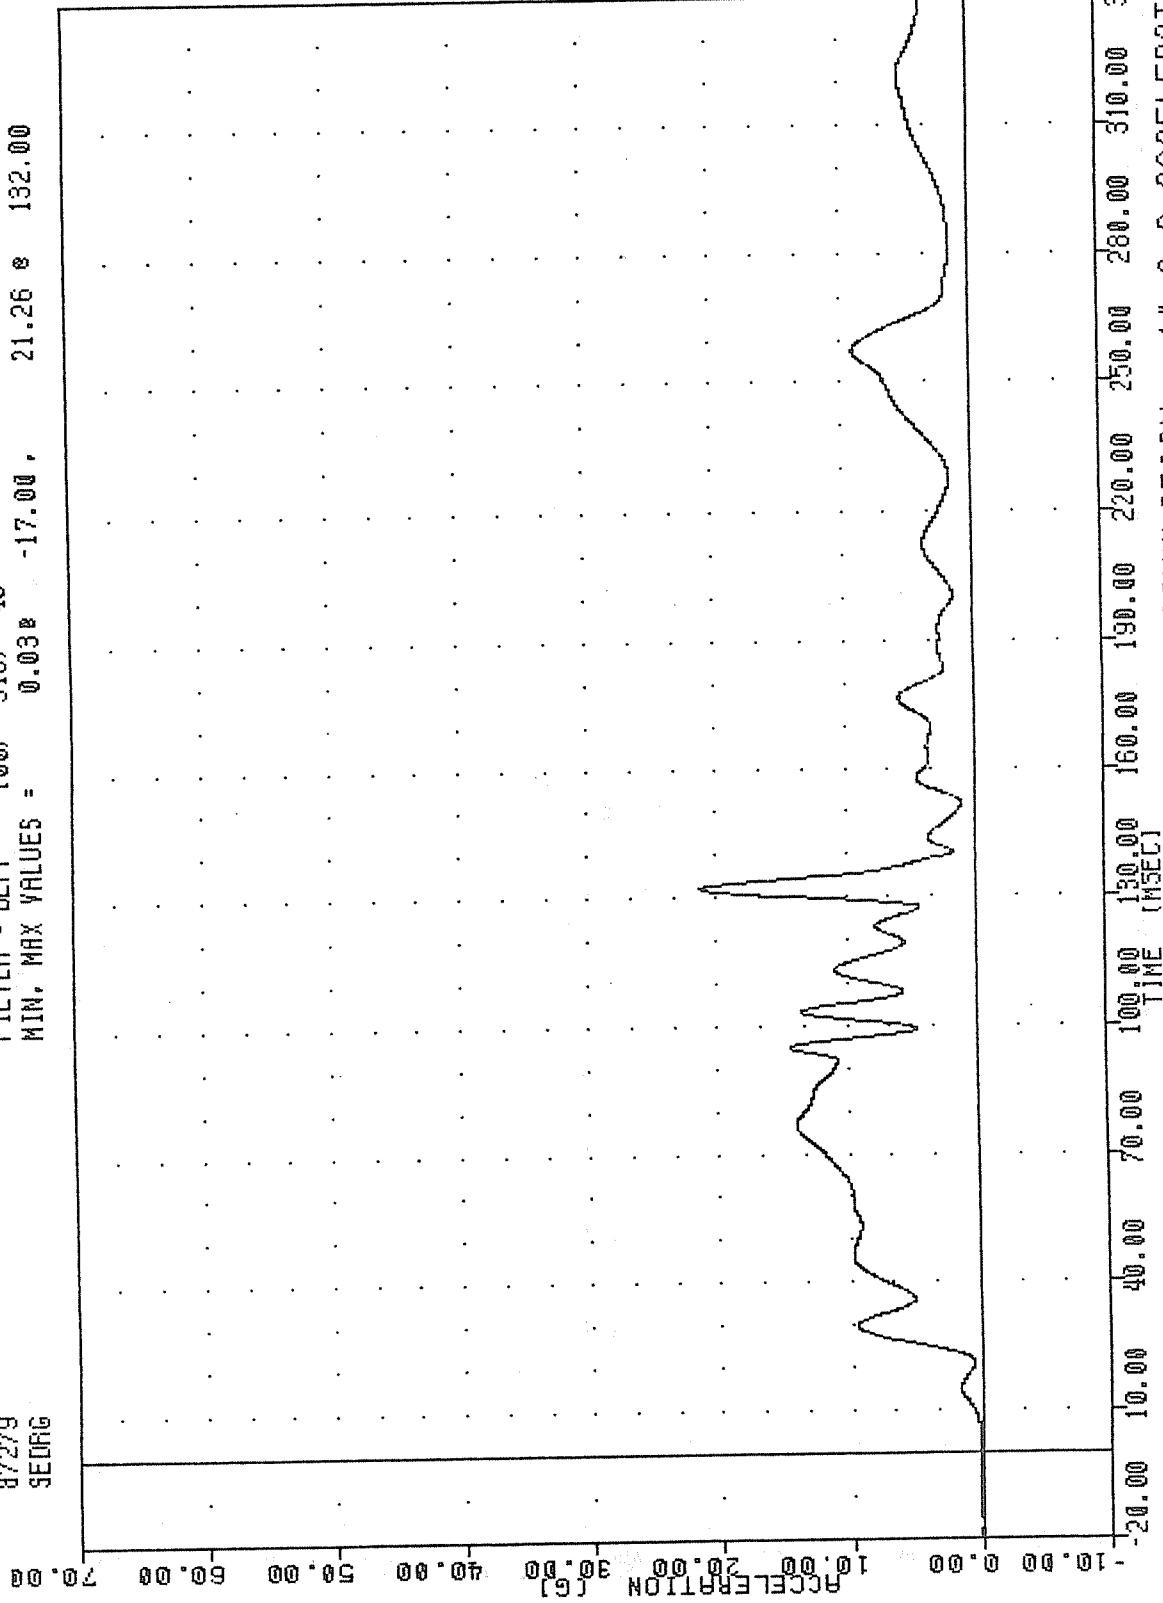


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D ACCELERATION RESULTANT

FAR , TEST 02
 CRASH SIMULATION
 87279
 PEY62

FILTER = BLPF 300/ 949/ -40
 MIN, MAX VALUES = -10.58e 106.25, 18.06 e 162.50

ACCELERATION (G)

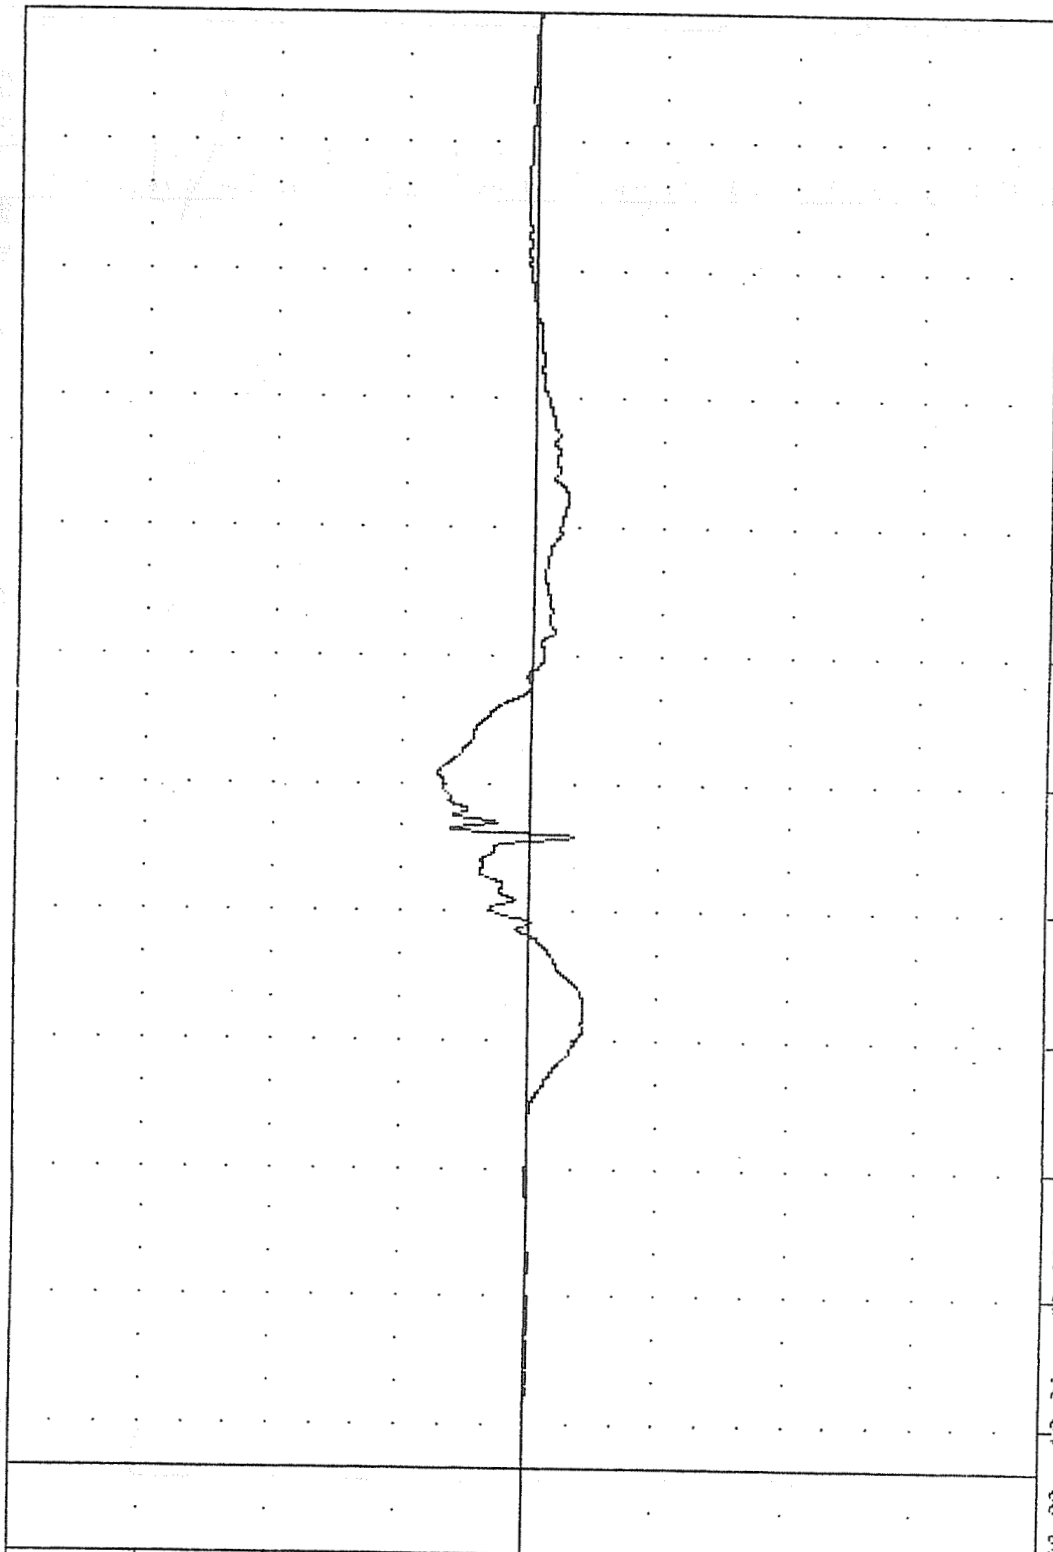

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT C CENTER DUMMY PELVIS LONGITUDINAL ACCELERATION

FRA , TEST 02

CRASH SIMULATION


87279

PEXXV2

FILTER = 8LPF 300/ -40

MIN, MAX VALUES = -8.08e 124.38 ,

8.75 e 186.38

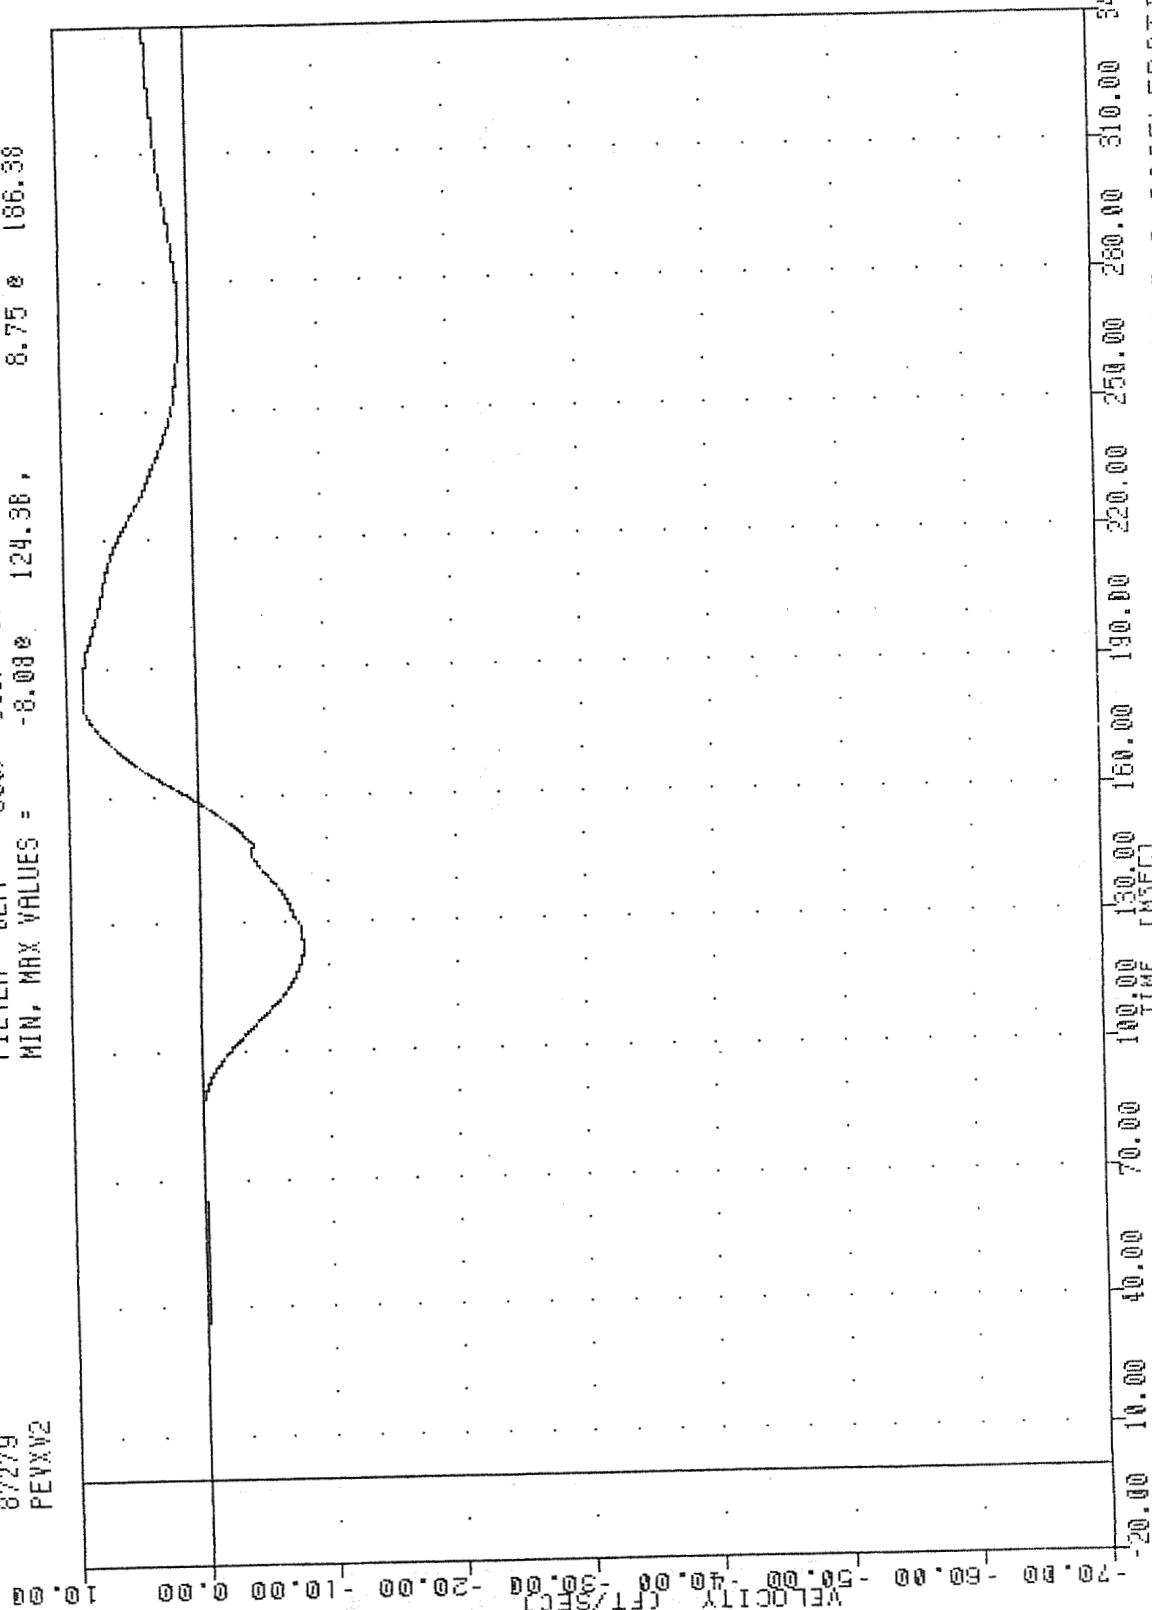


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C CENTER DUMMY PELVIS LONGITUDINAL VELOCITY

FAR , TEST 02
 CRASH SIMULATION
 87279
 PEV262

FILTER = 8LPF 300/ 949/ -40
 MIN, MAX VALUES = -8.75e 26.46 e 96.25

ACCELERATION (G)
 -100.00 -75.00 -50.00 -25.00 0.00 25.00 50.00 75.00 100.00

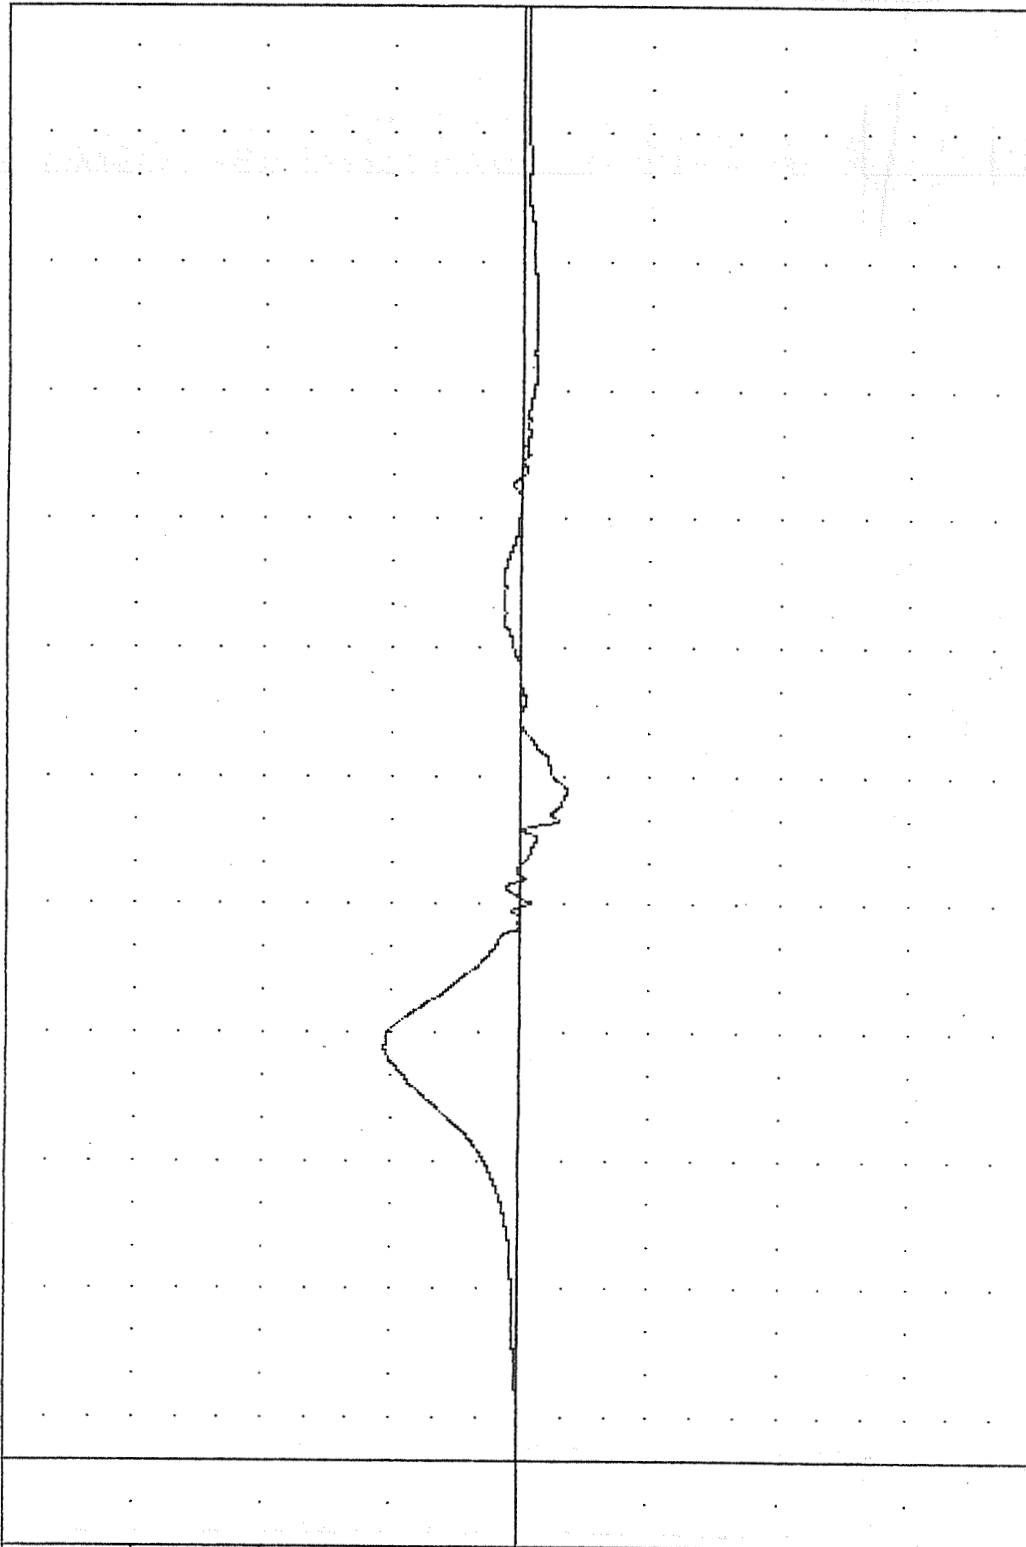

TIME (MSEC)
 -20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT C-CENTER DUMMY PELVIS VERTICAL ACCELERATION

FRA , TEST 02

CRASH SIMULATION

87279

PEVXG1

FILTER = 8LPF 300/ 949/ -40

MIN, MAX VALUES = -21.528


16.83 @ 182.25

107.63 ,

16.83 @ 182.25

ACCELERATION (G)

B-103

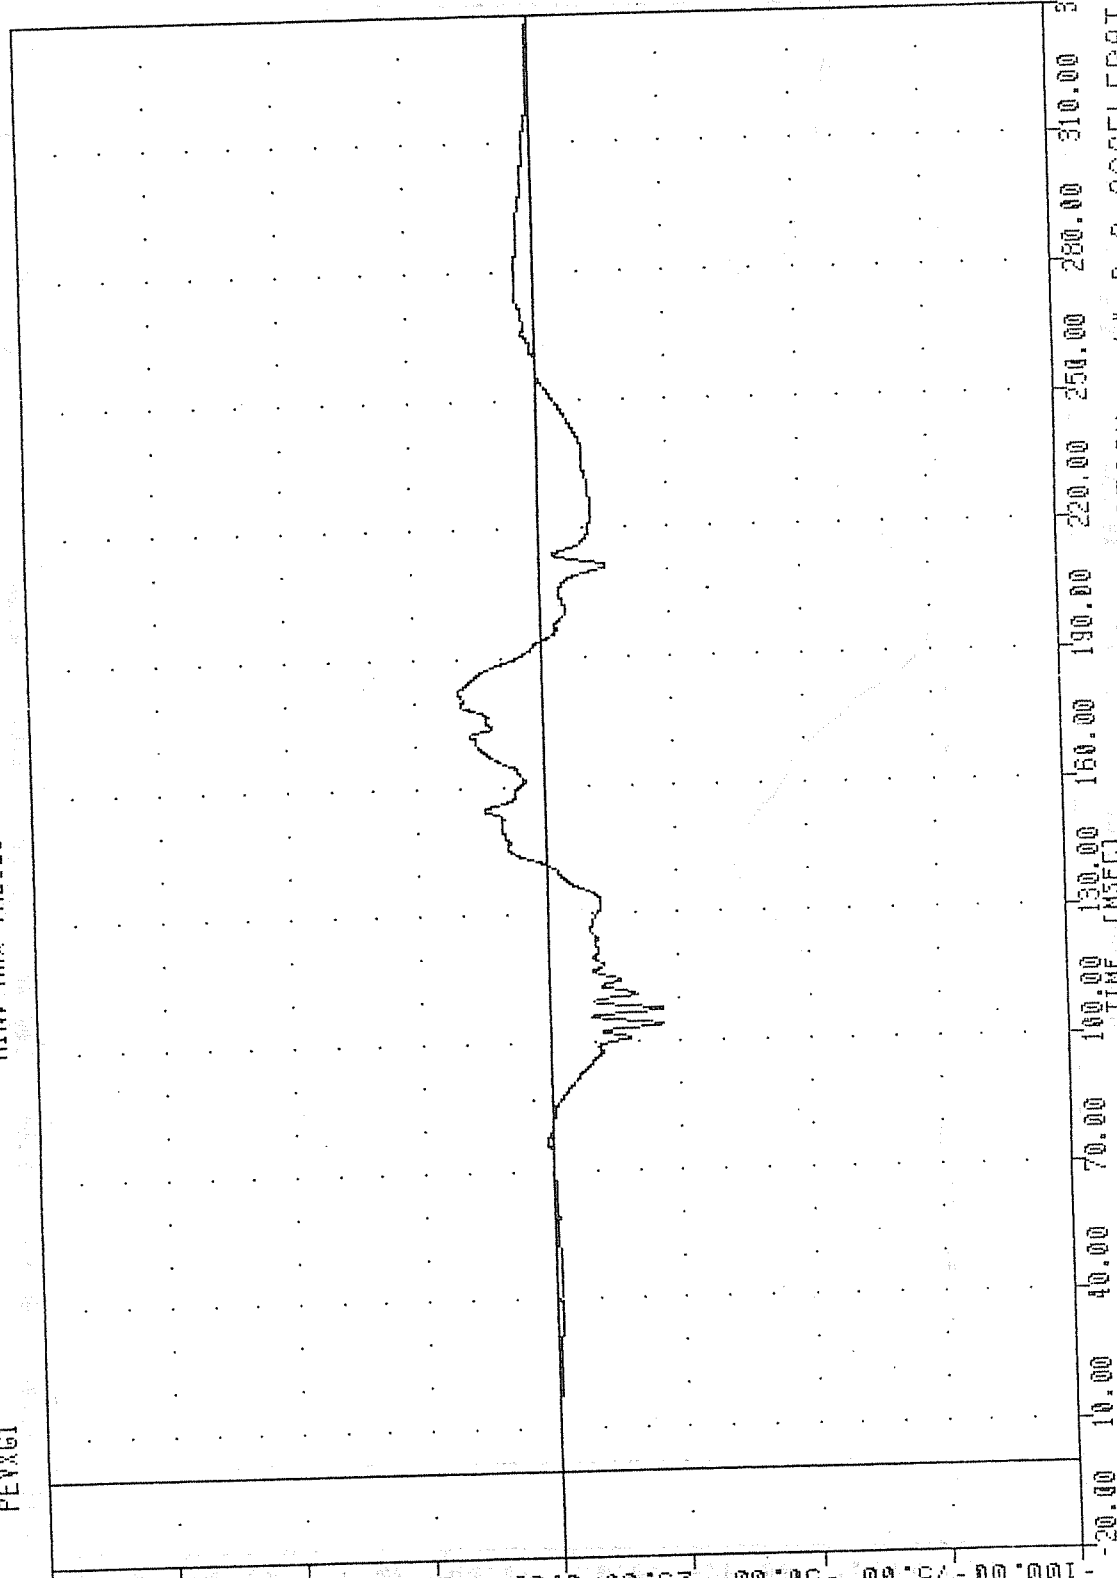


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D CENTER DUMMY PELVIS LONGITUDINAL ACCELERATION

FAR TEST 02
 CRASH SIMULATION
 87279
 PEVXV1

FILTER = BLPF 300/ 949/ -40
 MIN. MAX VALUES = -16.76e 141.38, 0.00 e -17.25

10.00
 0.00
 -10.00
 -20.00
 -30.00
 -40.00
 -50.00
 -60.00
 -70.00
 -80.00

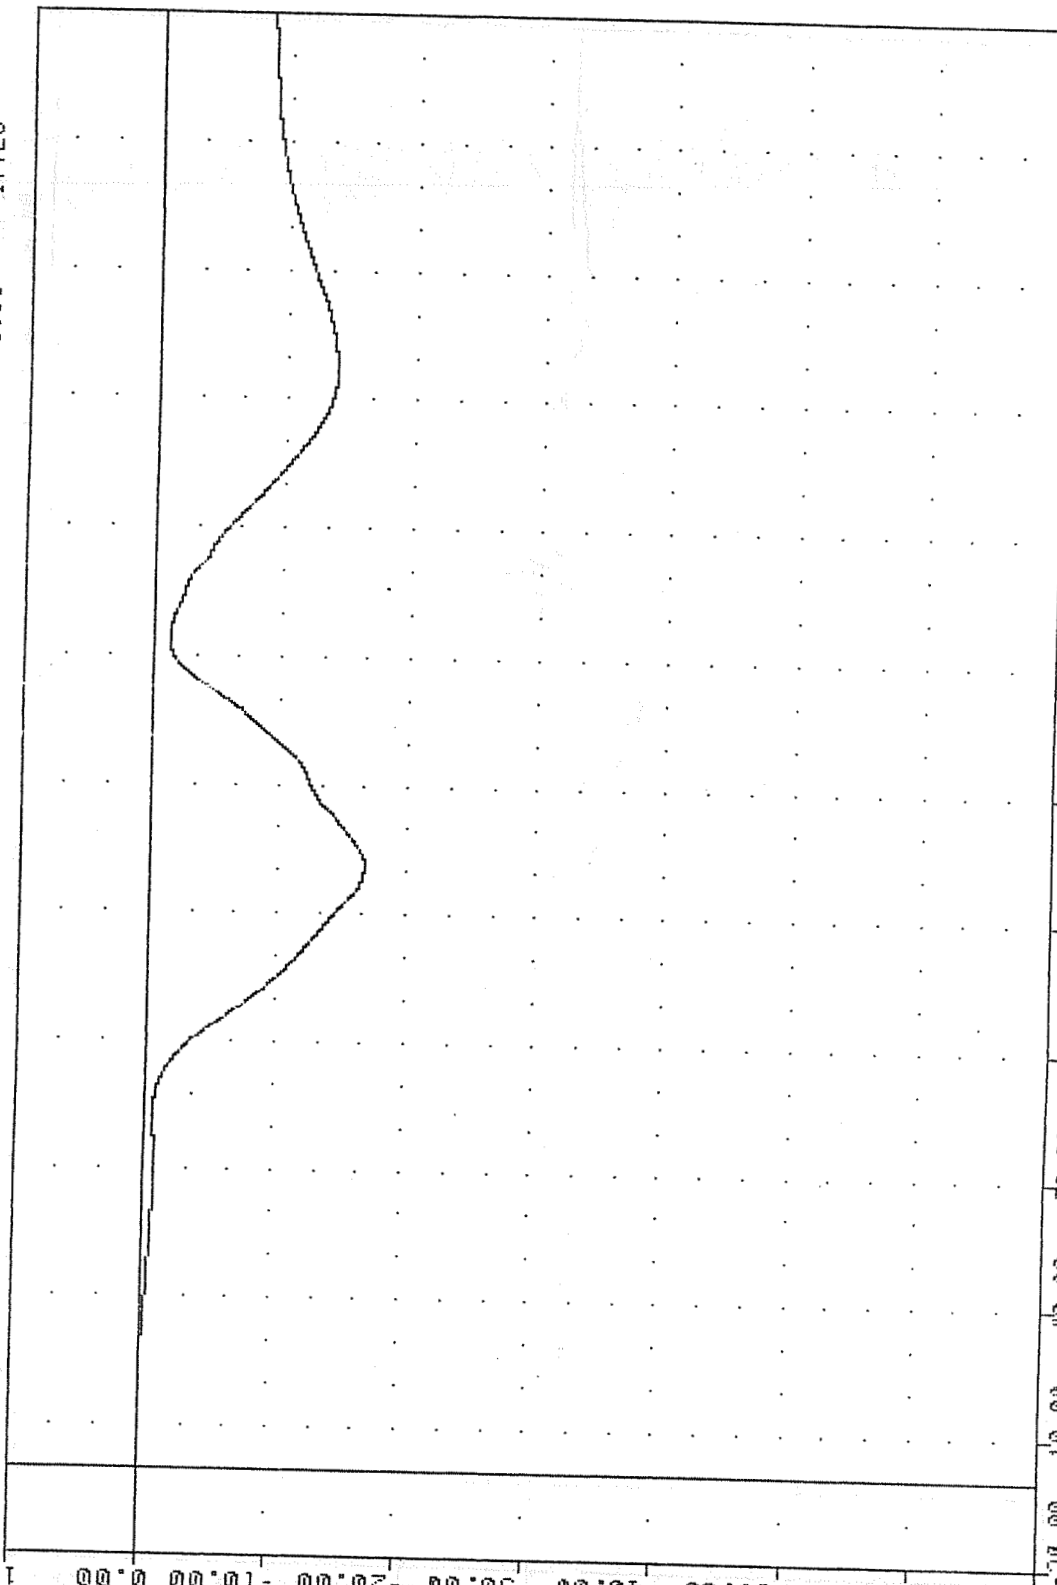

20.00 10.00 0.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT D CENTER DUMMY PELVIS LONGITUDINAL VELOCITY

FAR TEST 02

CRASH SIMULATION

87279

POSTED

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.398 235.50

0.35 @ 152.88

DISPLACEMENT (IN)

6.00 4.50 3.00 1.50 0.00 -1.50 -3.00 -4.50 -6.00

TIME (MSEC)

20.00 40.00 60.00 80.00 100.00 120.00 140.00 160.00 180.00 200.00 220.00 240.00 260.00 280.00 300.00 320.00 340.00


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION

PORT OUTBOARD SEAT TRACK DEFLECTION

FAR TEST 02
 CRASH SIMULATION
 87279
 PIST2D

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.57e 227.25, 0.66 e 152.13

DISPLACEMENT (IN)
 -8.00 -4.50 -3.00 -1.50 0.00 1.50 3.00 4.50 6.00

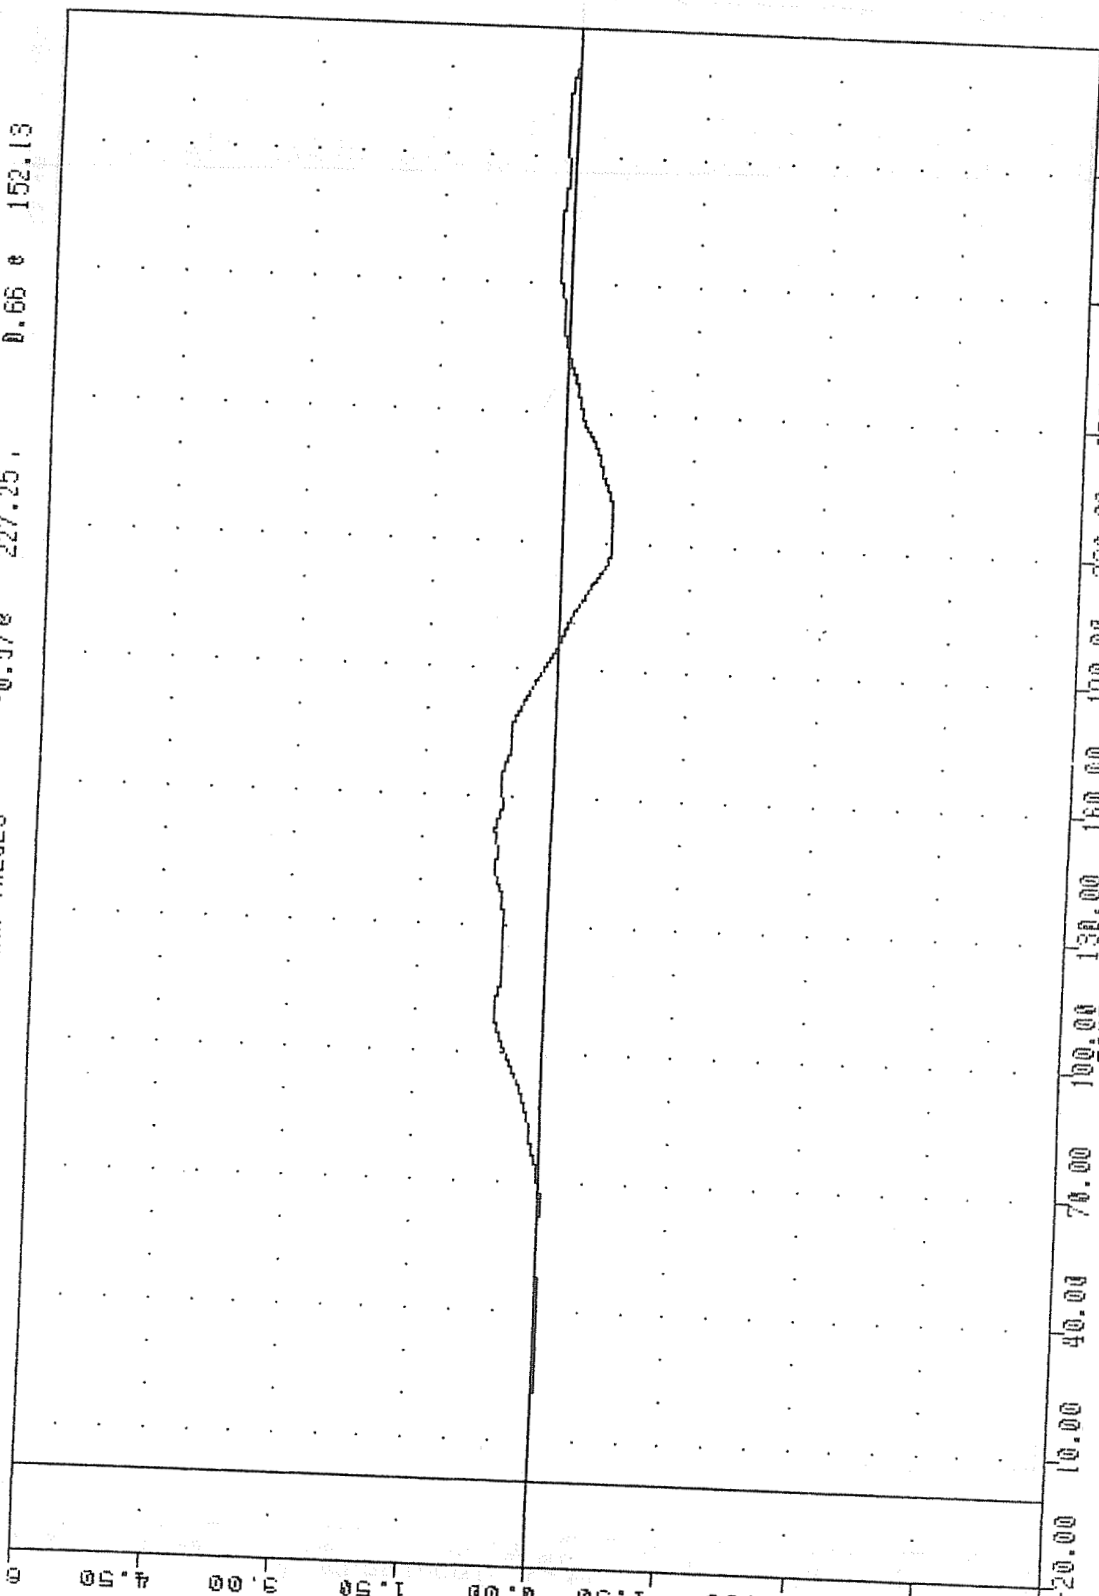

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 PORT INBOARD SEAT TRACK DEFLECTION

FAR , TEST 02


CRASH SIMULATION

87279

315720

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.62g 226.50 , 0.60 g 160.50

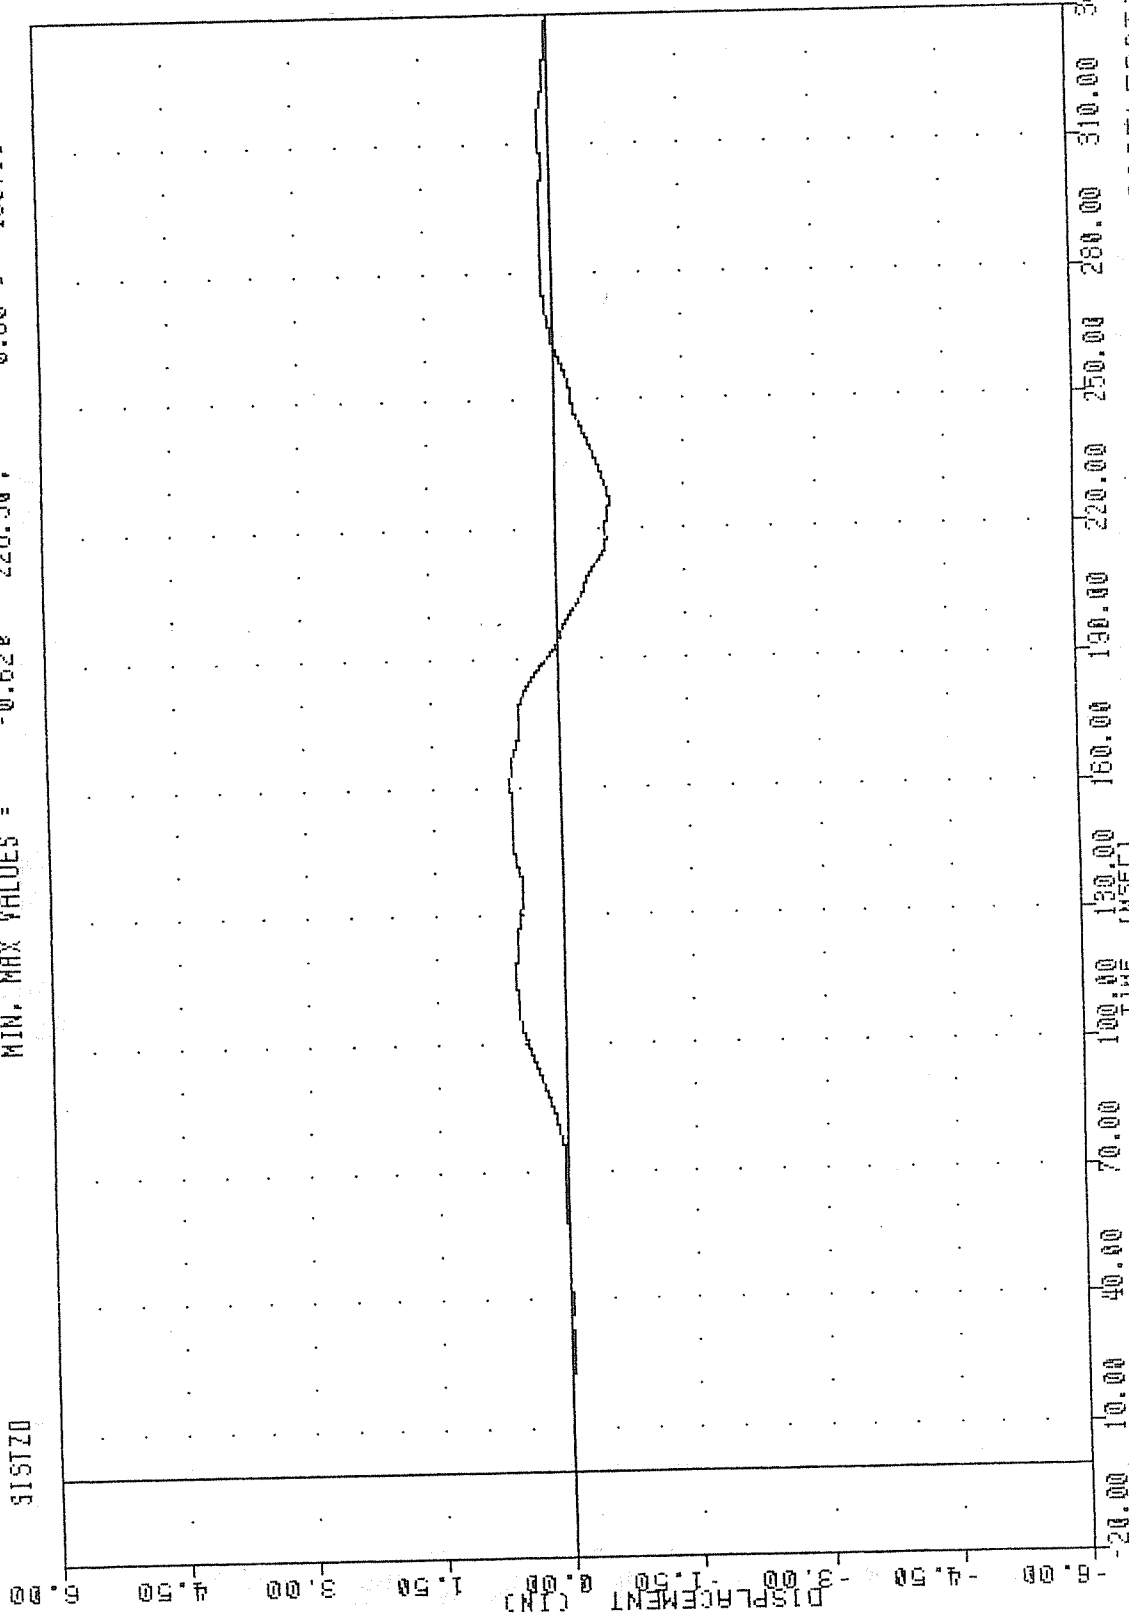


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD SEAT TRACK DEFLECTION

FAR , TEST 02
CRASH SIMULATION
87279
S03T2D

FILTER = BLPF 100/ 316/ -40
MIN. MAX VALUES = -0.46e 229.13 , 0.44 e 156.75

DISPLACEMENT (IN) -5.00 -4.50 -4.00 -3.50 -3.00 -2.50 -2.00 -1.50 -1.00 -0.50 0.00 0.50 1.00 1.50 2.00 2.50 3.00 3.50 4.00 4.50 5.00

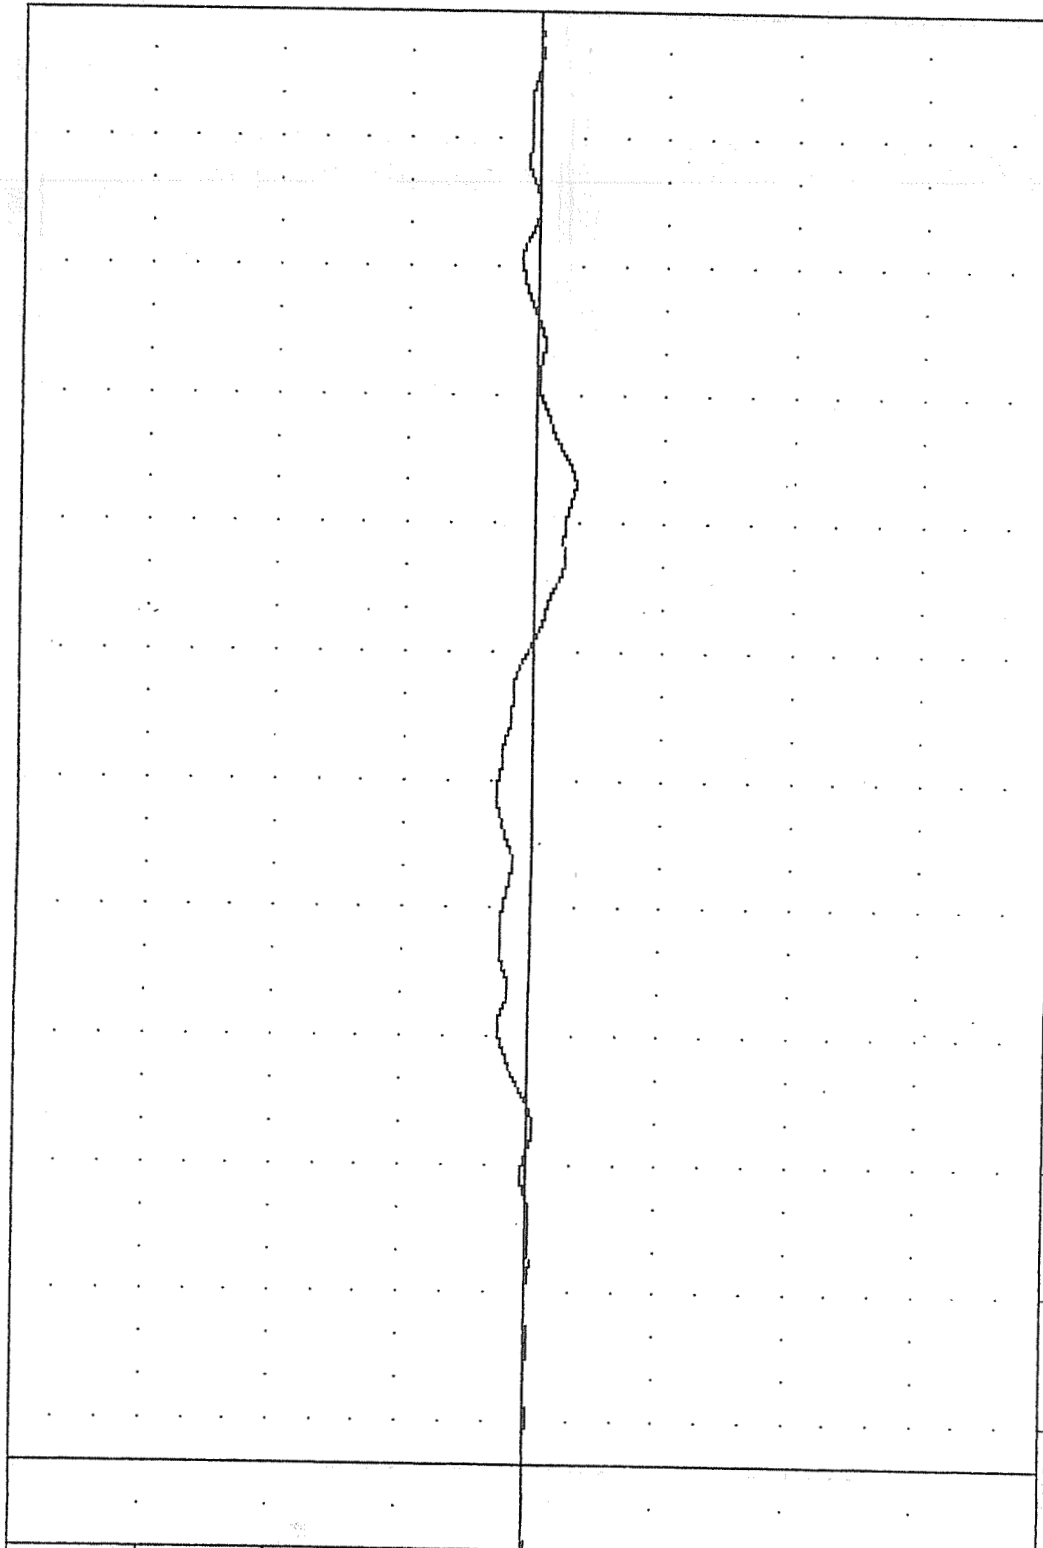


801-9
-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
TIME (MSEC)
TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD OUTBOARD SEAT TRACK DEFLECTION

FAR , TEST 02
 CRASH SIMULATION
 87279
 LB0F2

FILTER = BLPF 100/ 316/ -40
 WIN, MAX VALUES = -90.48e 208.75, 798.99 e 158.50

FORCE (LB)
 (X10³)

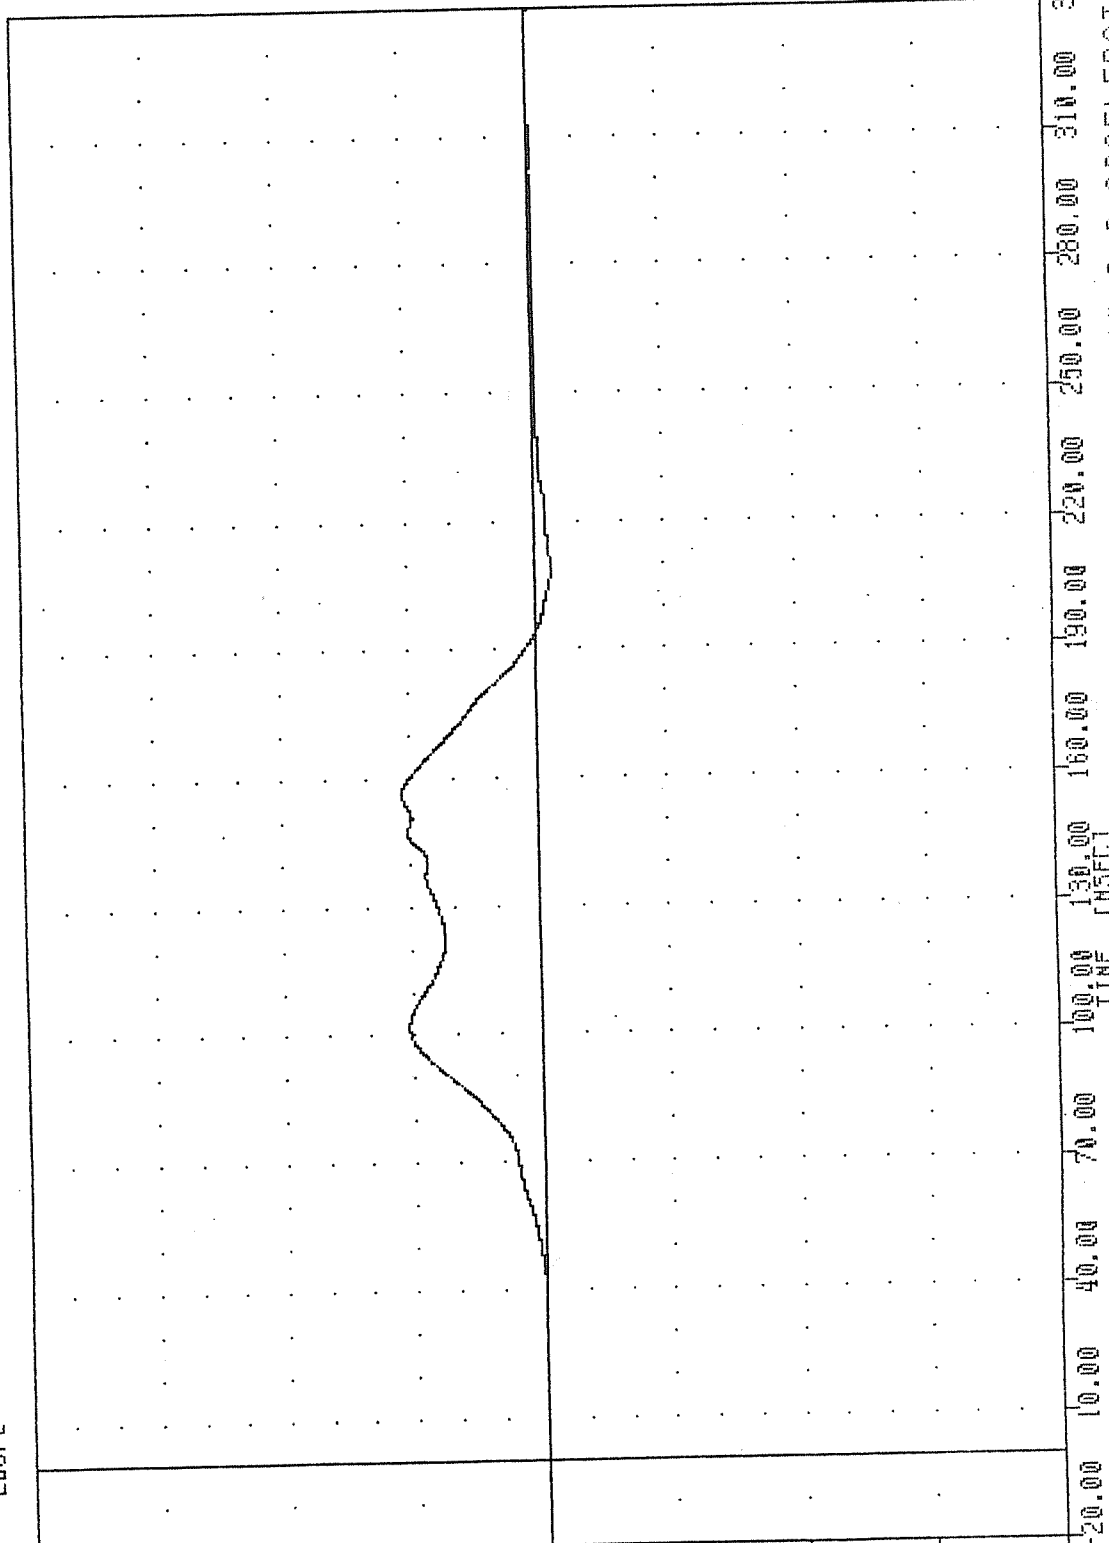

B-109

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT C CENTER DUMMY OUTBOARD LAP BELT LOAD

FAR , TEST 02

CRASH SIMULATION

87279


LBIF2

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -7.750

250.75 , 1130.28 @ 156.50


FORCE (LB)
-300.00 -225.00 -150.00 -75.00 0.00 75.00 150.00 225.00 300.00
(X10)

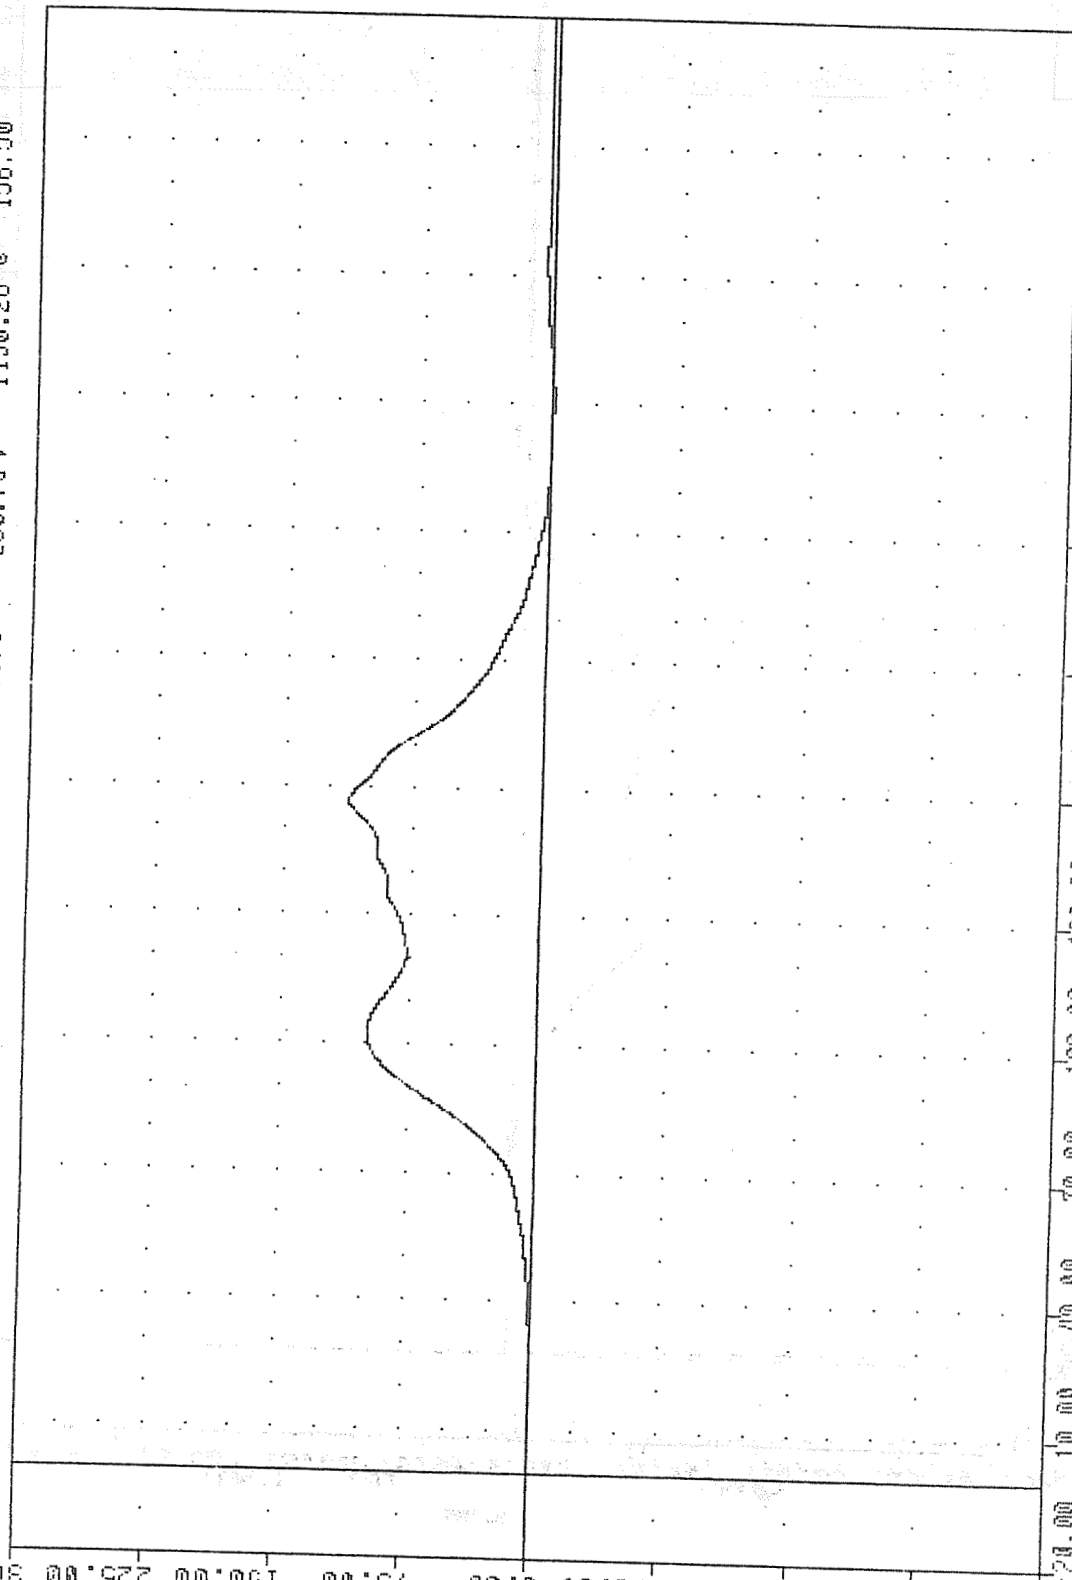

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C CENTER DUMMY INBOARD LAP BELT LOAD

FRA TEST 02
 CRASH SIMULATION
 87279
 LB0F1


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -42.39e 1011.63 e 102.63

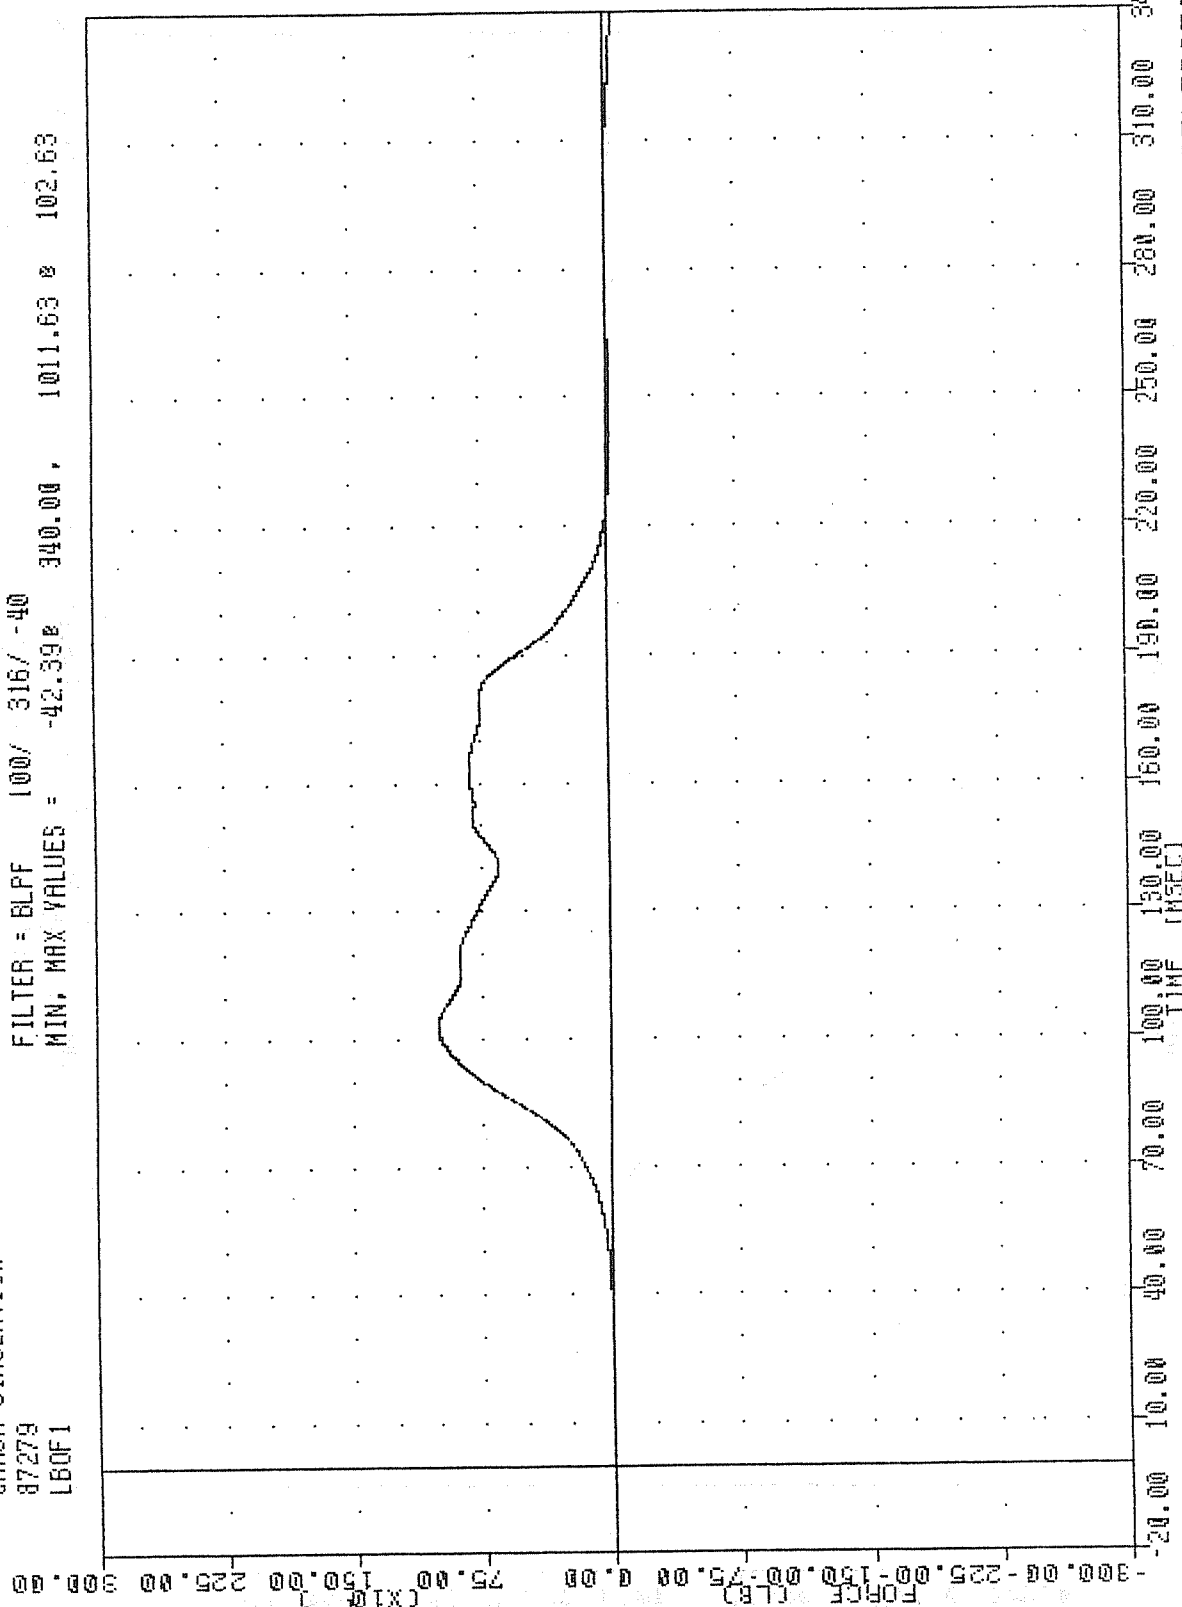

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT D CENTER DUNNY OUTBOARD LAP BELT LOAD

FRA , TEST 02
 CRASH SIMULATION
 87279
 LBIF1

FILTER = 6LPF 100/ 316/ -40
 MIN. MAX VALUES = -2.90e 41.63, 1116.21 e 168.50

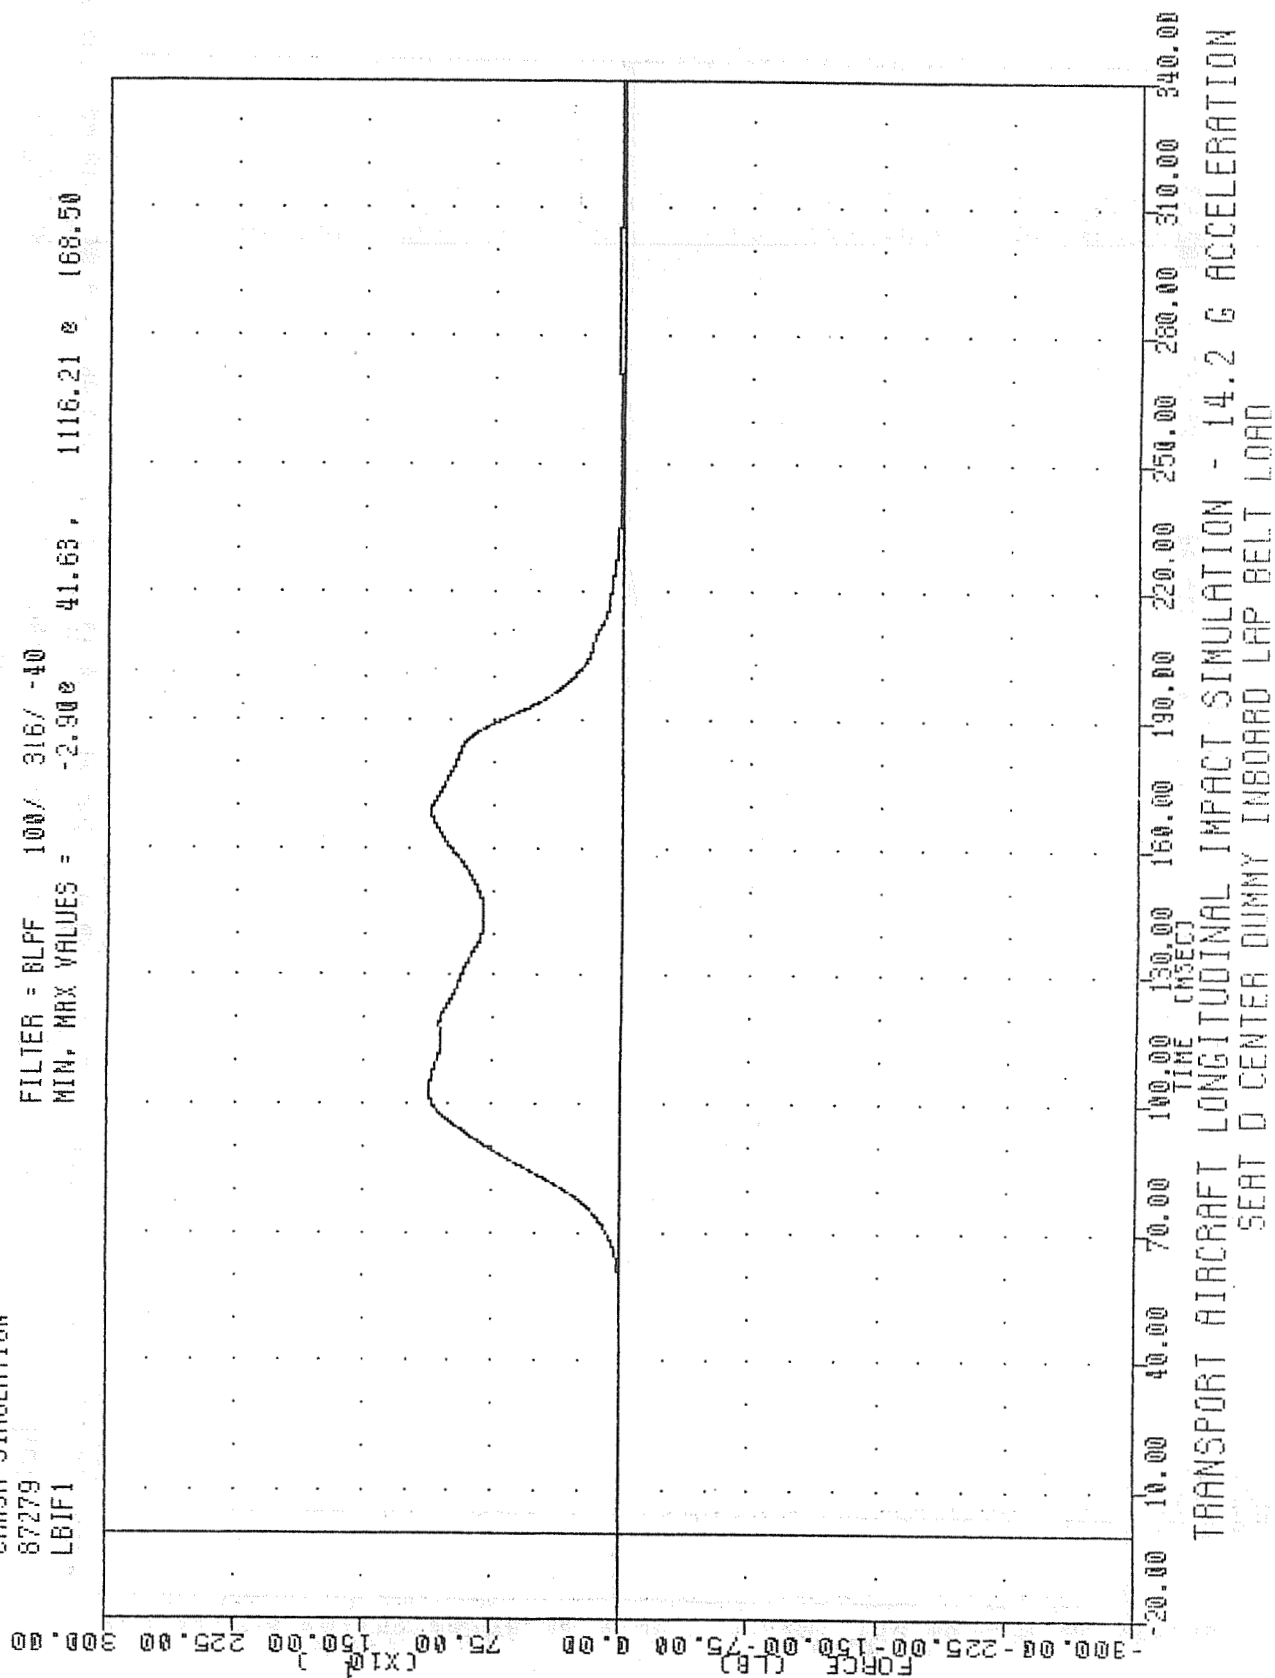

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT D CENTER DUMMY INBOARD LAP BELT LOAD

FRA , TEST 02

CRASH SIMULATION

87279

POBS

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -7.39e 219.50 ,

9.27 e 106.00

20.00

15.00

10.00

5.00

0.00

-5.00

-10.00

-15.00

-20.00

VOLTAGE (MW)

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00

TIME (MSEC)

100.00

130.00

160.00

190.00

220.00

250.00

280.00

310.00

340.00


TIME (MSEC)

100.00

FHA , TEST 02
CRASH SIMULATION
87279
PIBS

FILTER = BLPF 100/ 316/ -40
MIN. MAX VALUES = -12.430 219.80 15.36 139.80

VOLTAGE (MV)
-20.00 -15.00 -10.00 -5.00 0.00 5.00 10.00 15.00 20.00

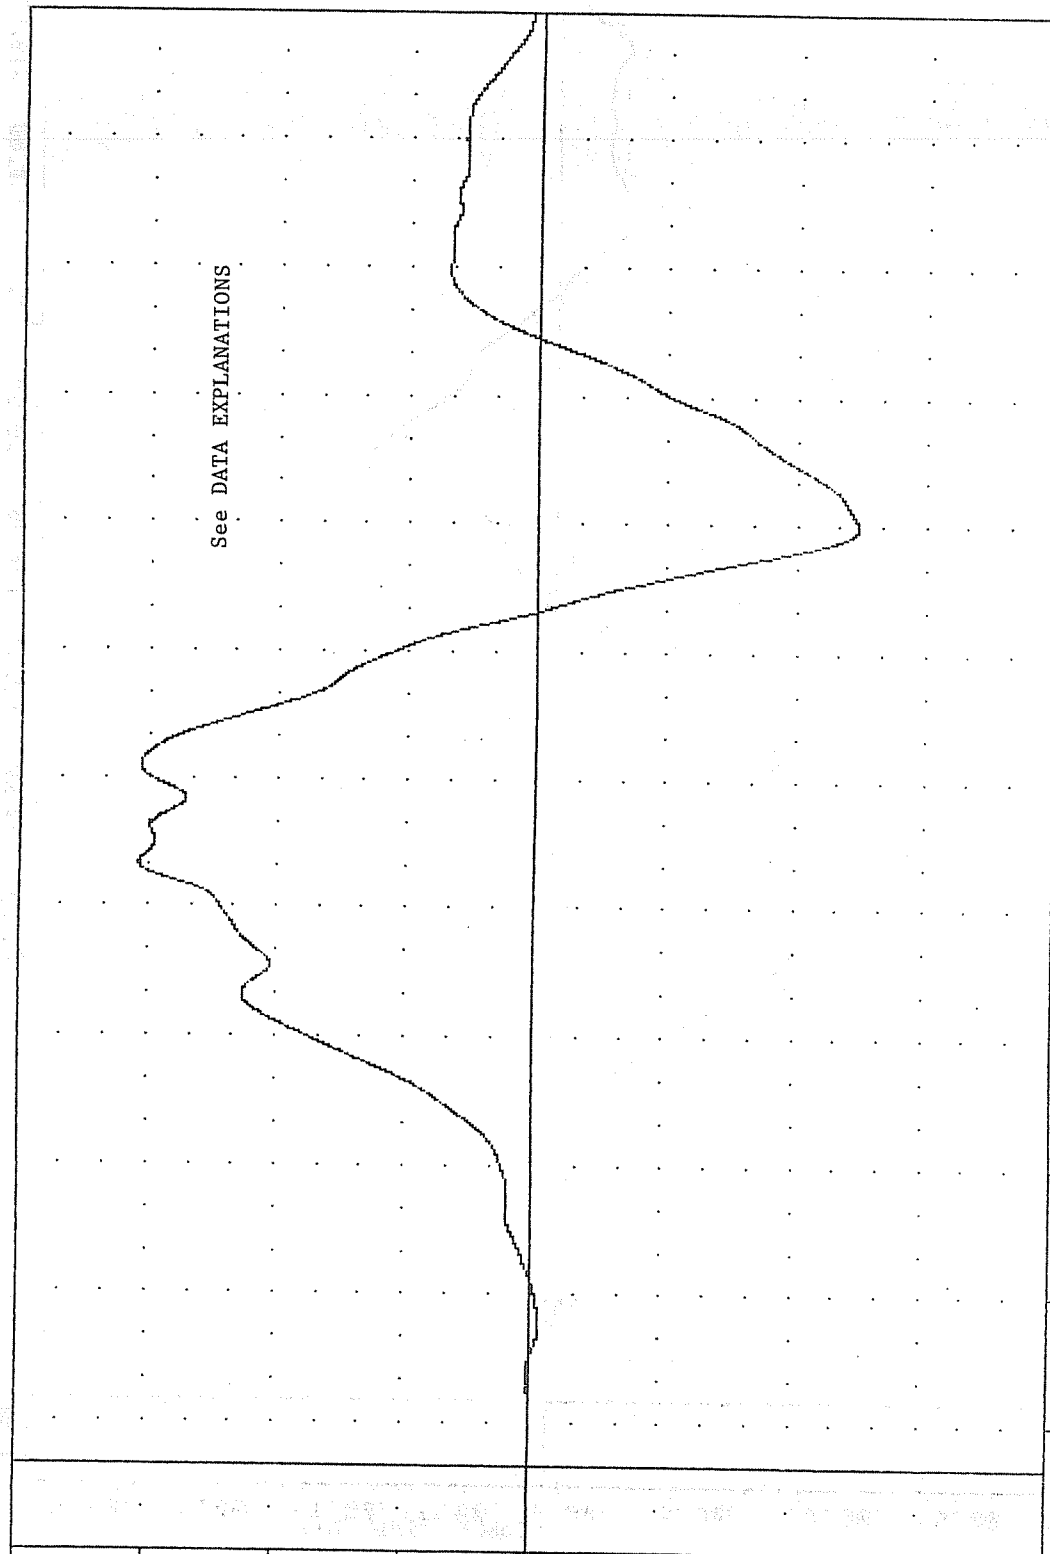

TIME (MSEC)
0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
PORT INBOARD BEAM STRAIN

FRA TEST 02


CRASH SIMULATION

87279

SIBS

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -15.45 213.88 15.02 e 102.88

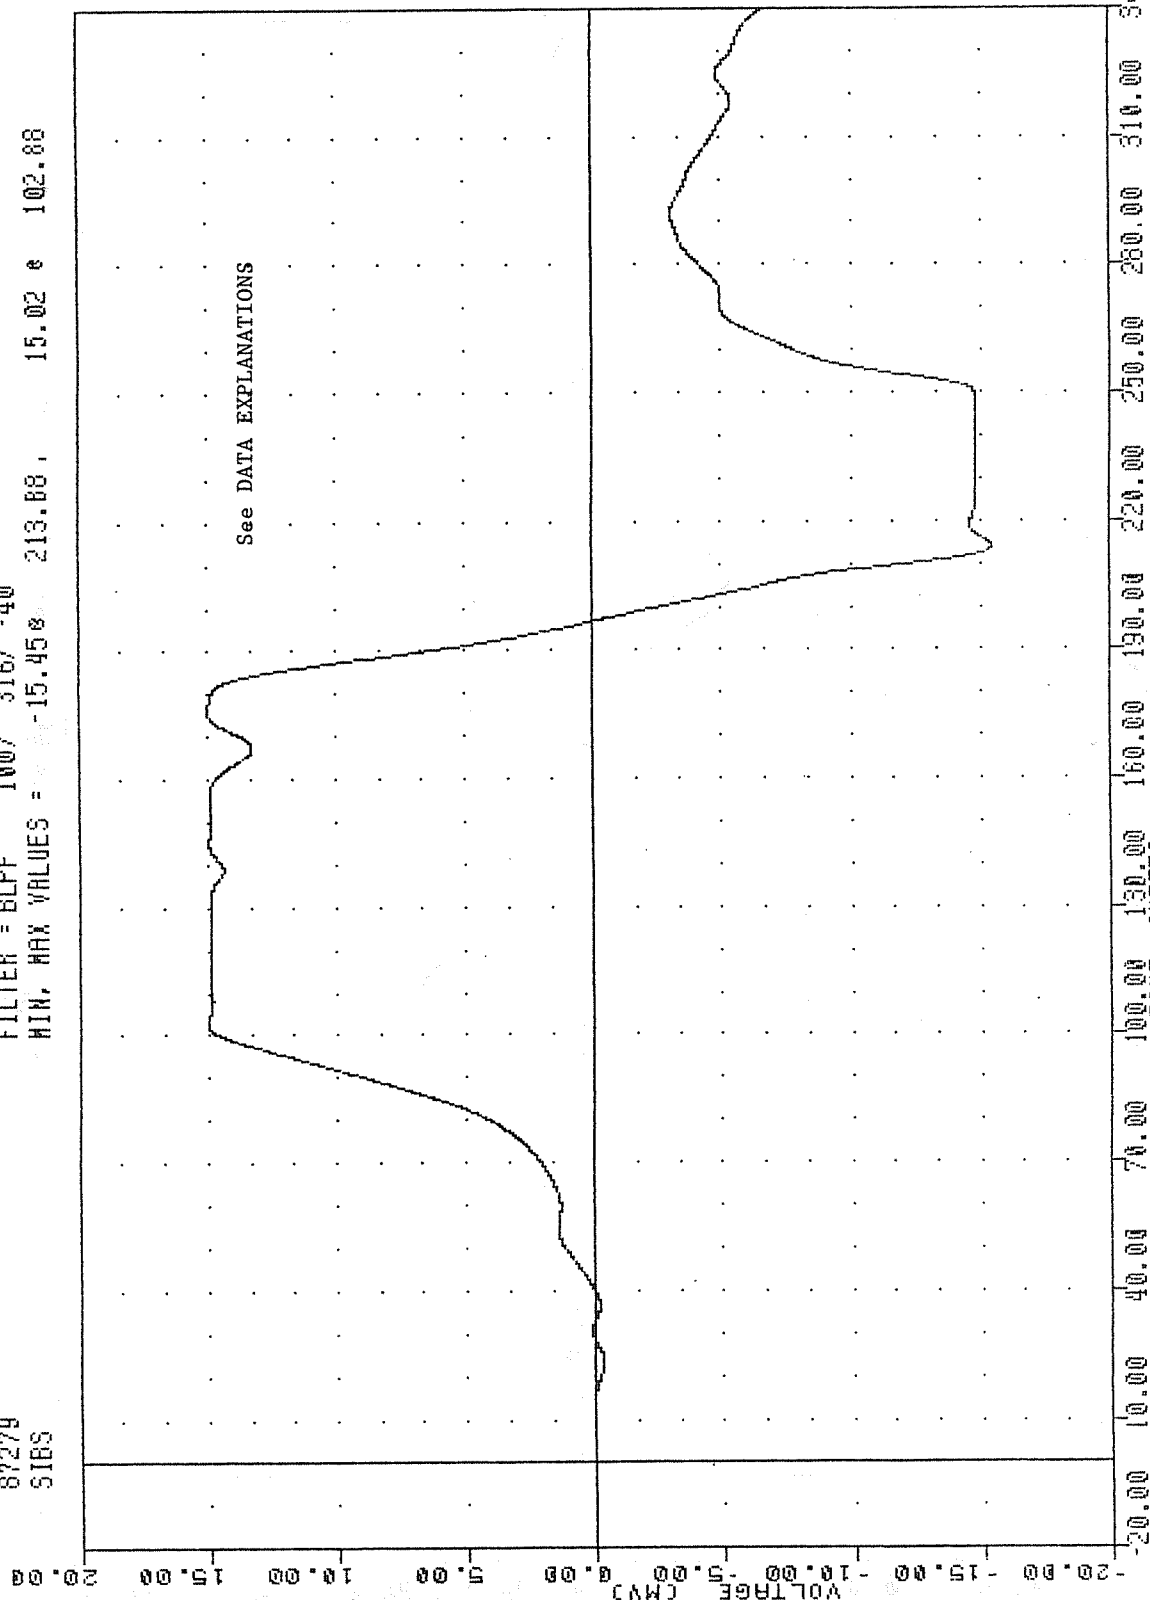

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD INBOARD BEAM STRAIN

FAR , TEST 02
CRASH SIMULATION
87279
3085

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -7.45e 155.75 , 6.59 e 218.63

VOLTAGE (MV)

R-116



TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
STARBOARD OUTBOARD BEAM STRAIN

FAR , TEST 02

CRASH SIMULATION

87278

9ADFLS

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -0.01e

-7.75, 12.01 @ 202.75

VOLTAGE (MV)

40.00

30.00

20.00

10.00


0.00

-10.00

-20.00

-30.00


-40.00

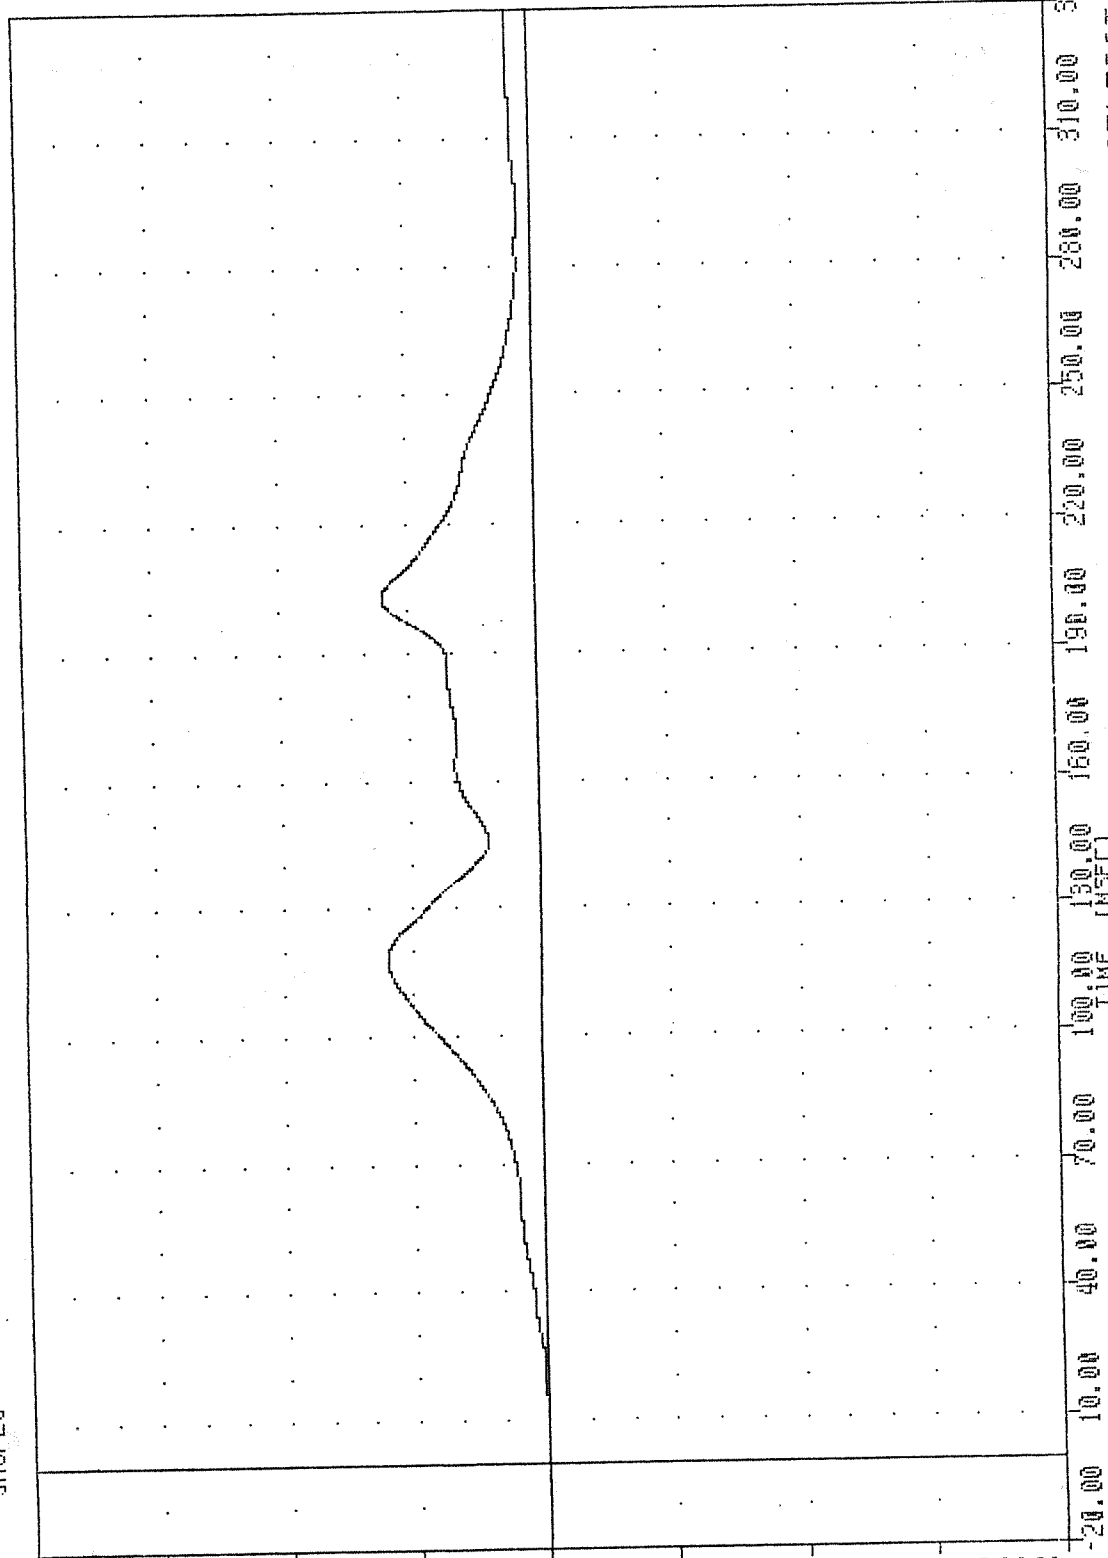

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT A OUTBOARD FORWARD LEG STRAIN

FRA , TEST 02
 CRASH SIMULATION
 87279
 SH0035

FILTER = 8LFF 10N/ 316/ -40
 MIN, MAX VALUES = -24.50% 115.88, 0.00 & -20.00

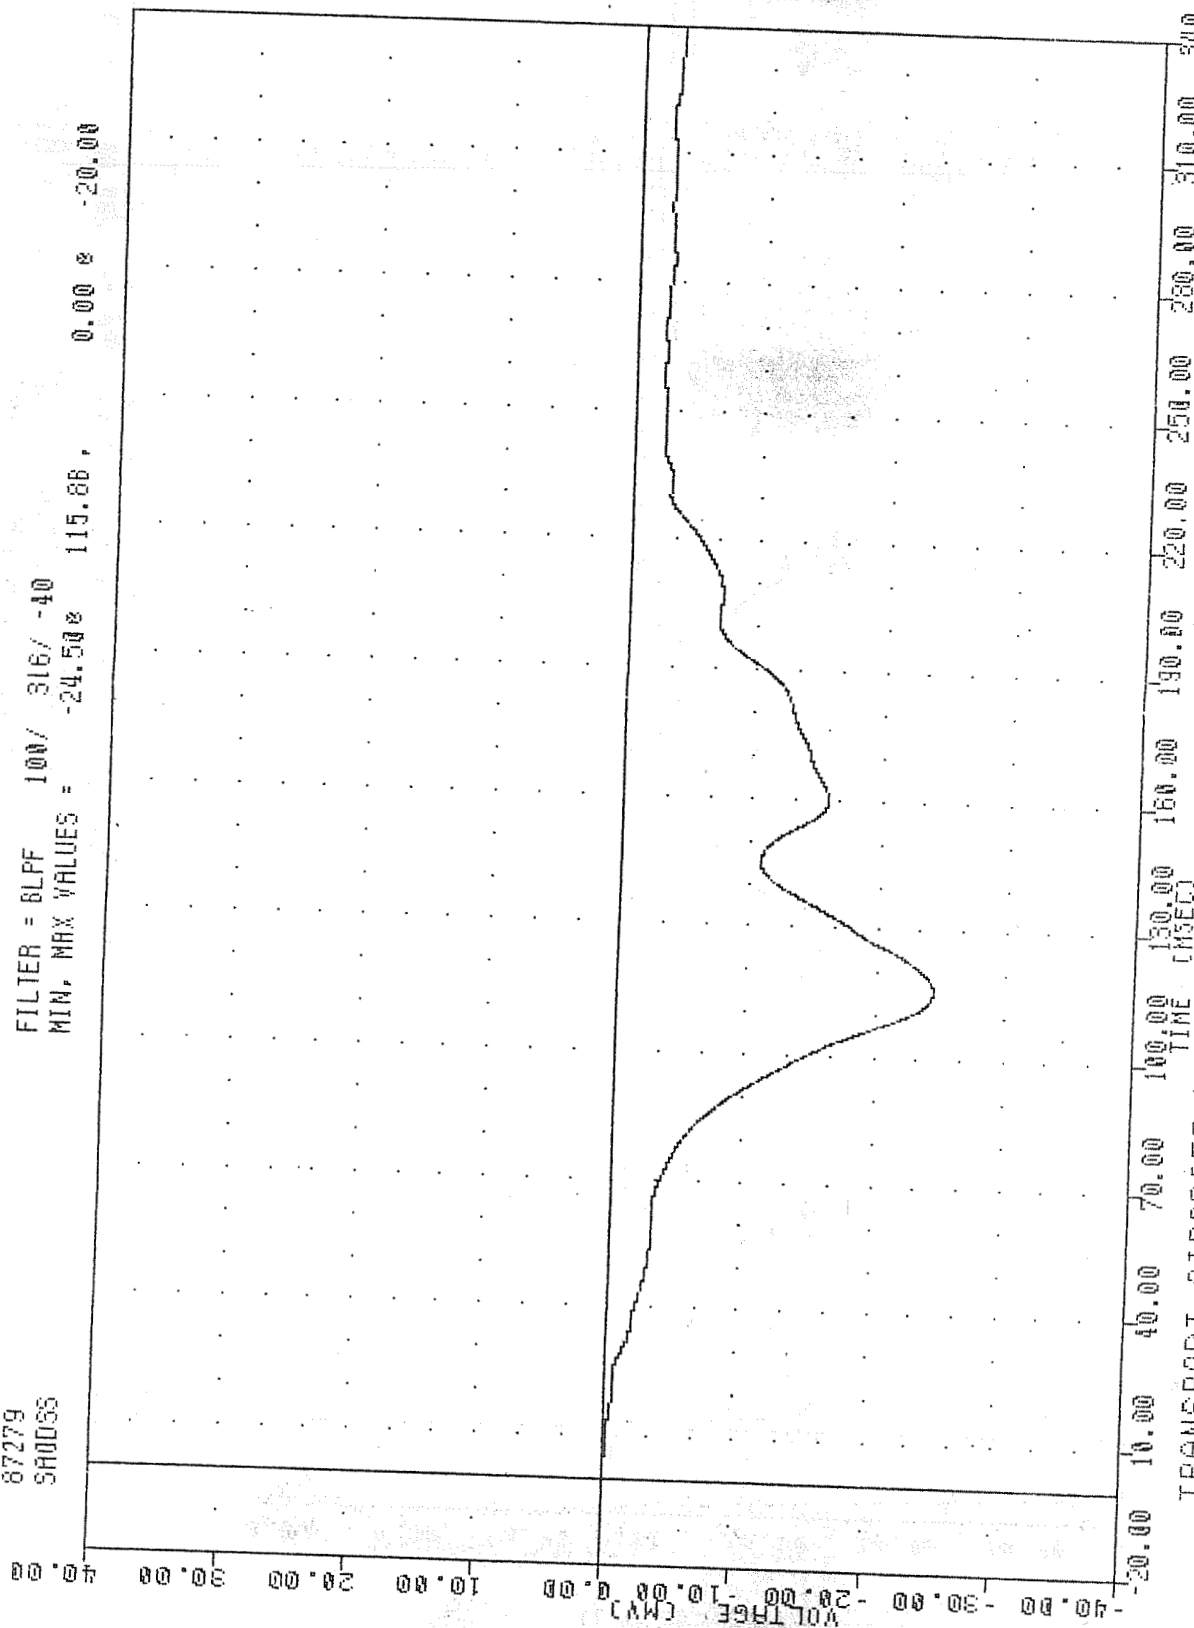

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT A OUTBOARD DIAGONAL STRUT STRAIN

FRA , TEST 02

CRASH SIMULATION


87279

SBIFLS

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -14.91e 137.75 ,

11.93 e 221.50

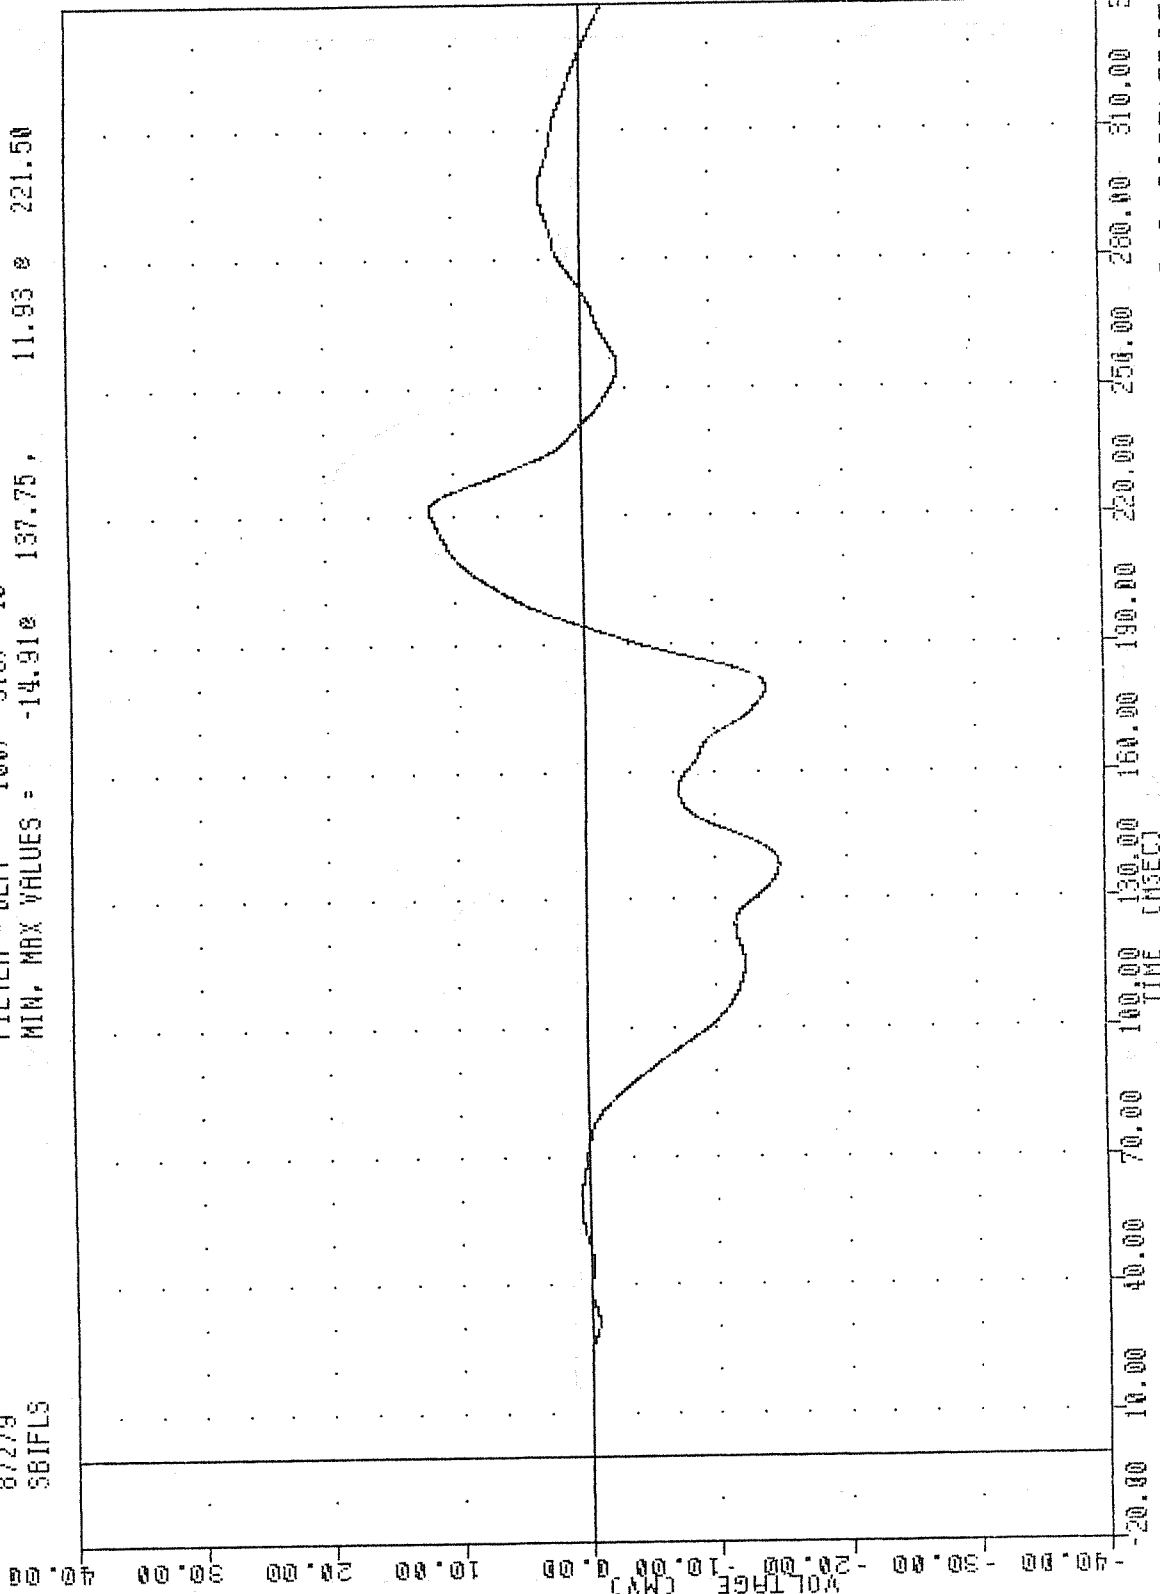

B-119

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT B INBOARD FORWARD LEG STRAIN


FRA
CRASH SIMULATION
87279
SCOFIS

TEST 02

FILTER = 6LPF 100/ 316/ -40

MIN, MAX VALUES = -18.31e 237.50, 5.31 e 181.75

VOLTAGE (MV)

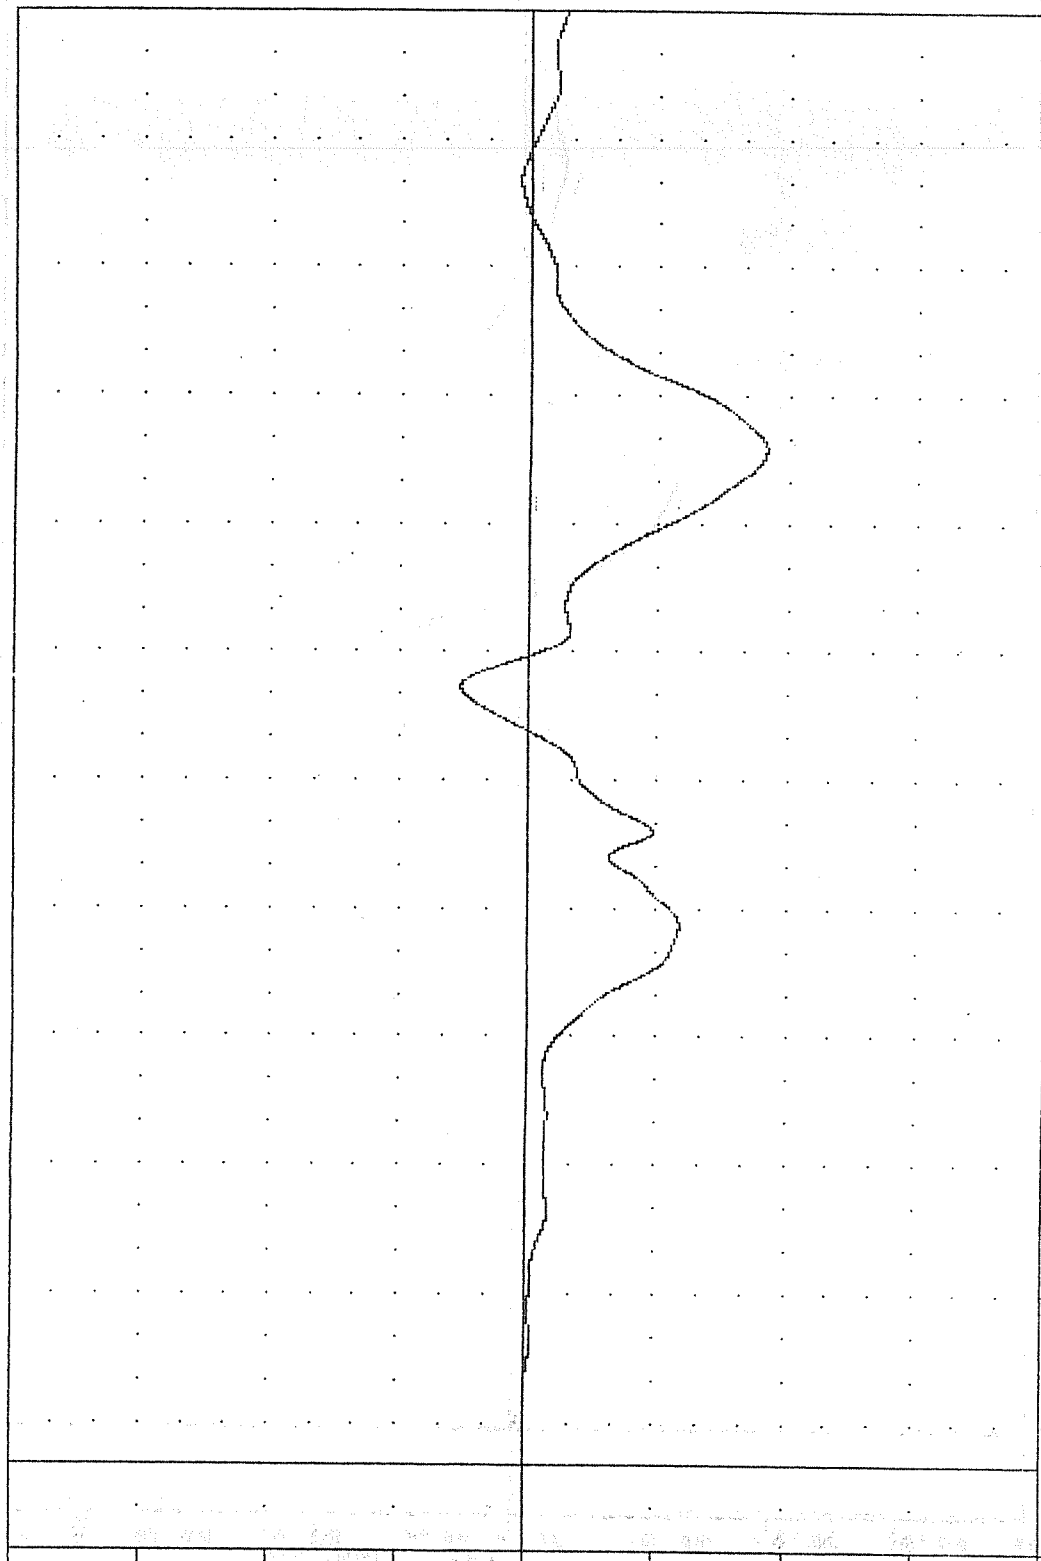

20.00 30.00 40.00 50.00 60.00 70.00 80.00 90.00 100.00 110.00 120.00 130.00 140.00 150.00 160.00 170.00 180.00 190.00 200.00 210.00 220.00 230.00 240.00 250.00 260.00 270.00 280.00 290.00 300.00 310.00 320.00 330.00 340.00

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C OUTBOARD FORWARD LEG STRAIN

FAR , TEST 02

CRASH SIMULATION

87279

SC0053

FILTER = BLPF 100/ 316/ -40

MIN, MAX VALUES = -20.84e


115.75,

3.31 e

225.75

VOLTAGE (MV)

B-121

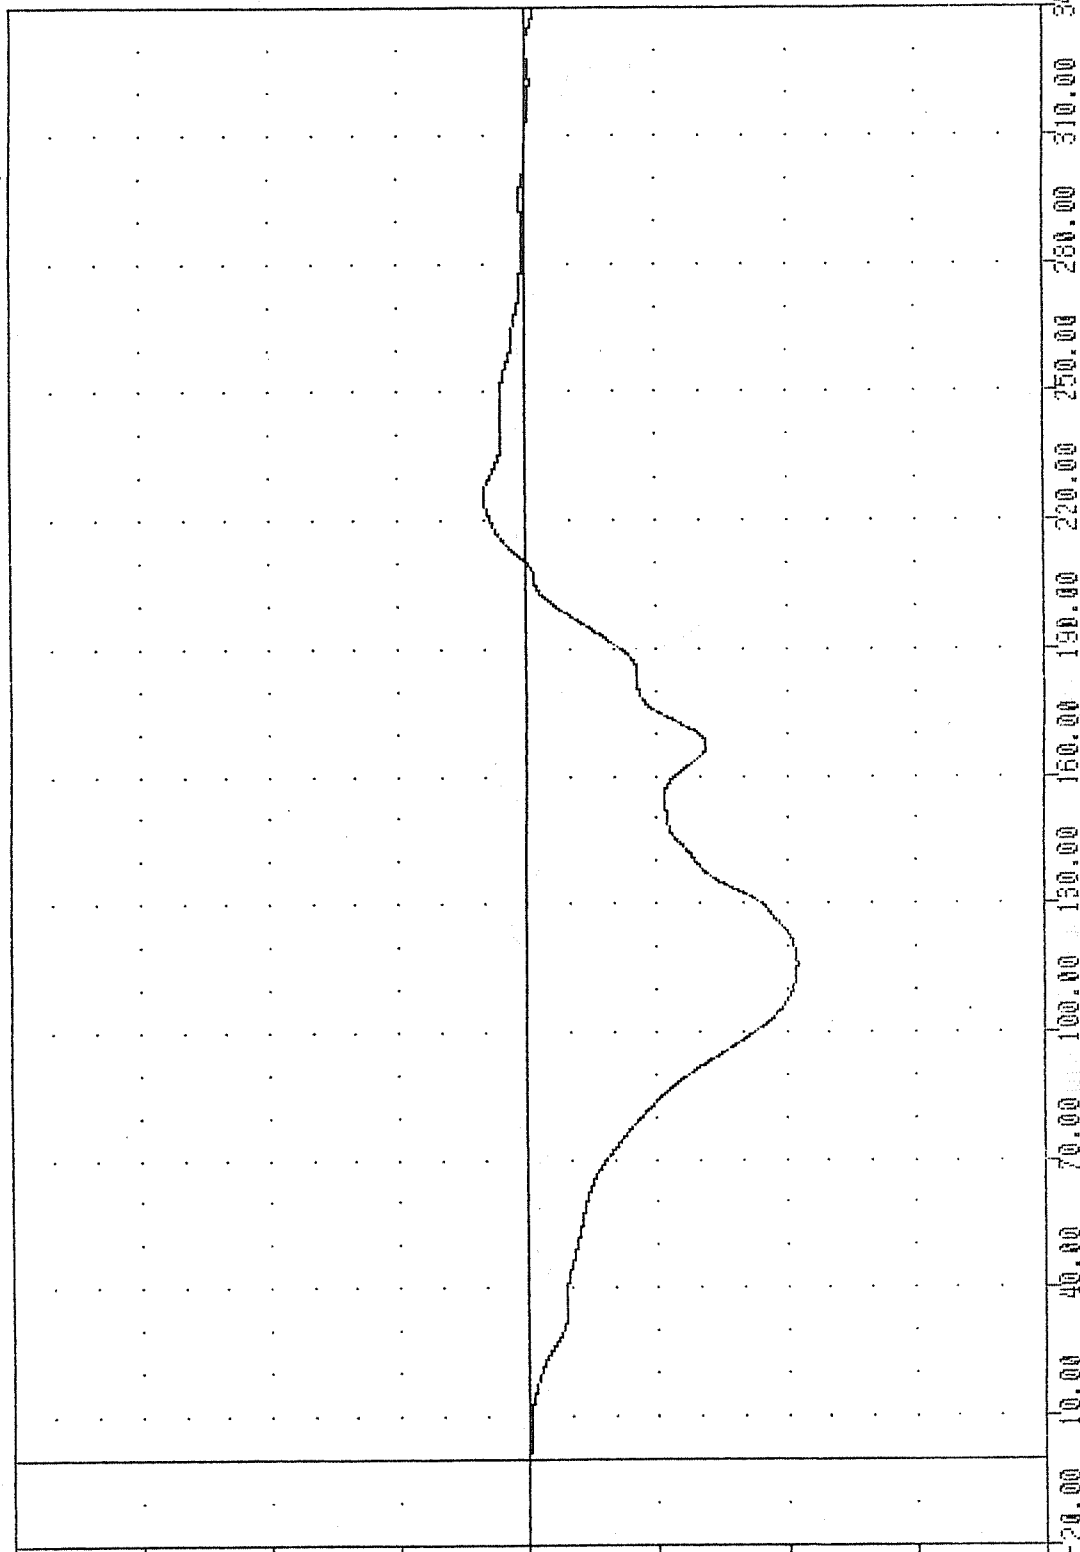


TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C OUTBOARD DIAGONAL STRUT STRAIN

FRA
CRASH SIMULATION
87279
SCIFLS

FILTER = 8LFF 100/ 316/ -40

MIN, MAX VALUES = -4.032 105.63 18.55 219.25


VOLTAGE (MV)

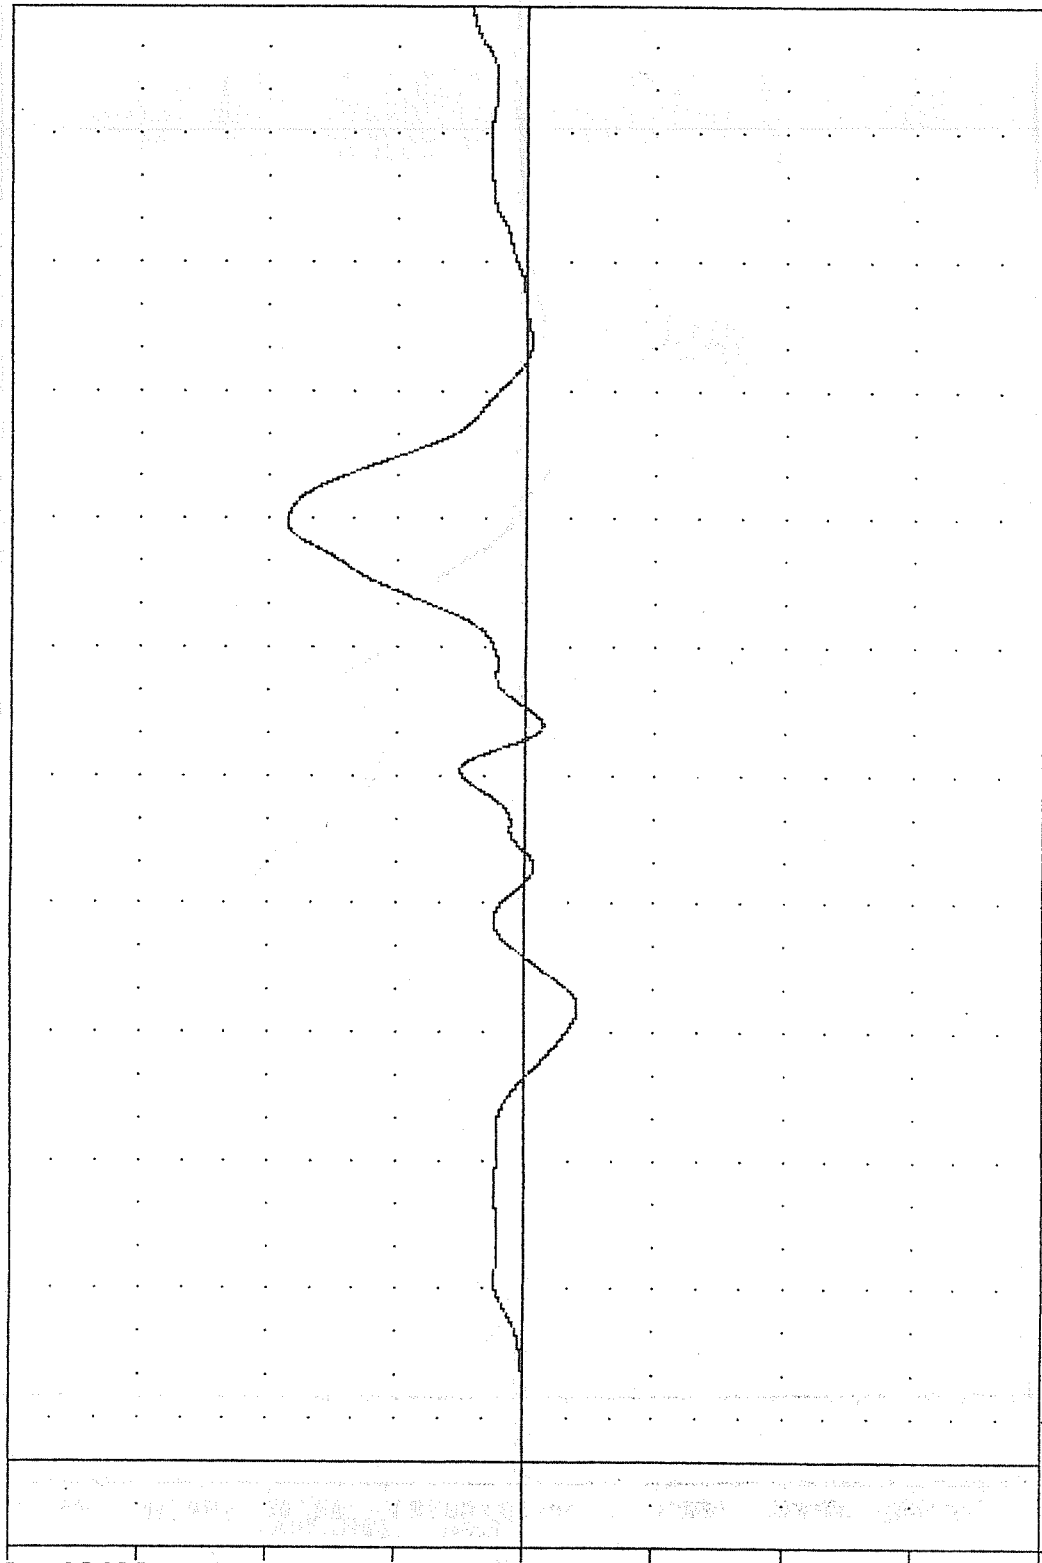

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT C INBOARD FORWARD LEG STRAIN

FHA , TEST 02
 CRASH SIMULATION
 87279
 SCIDSS

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -12.868 118.38 , 0.32 e 255.38

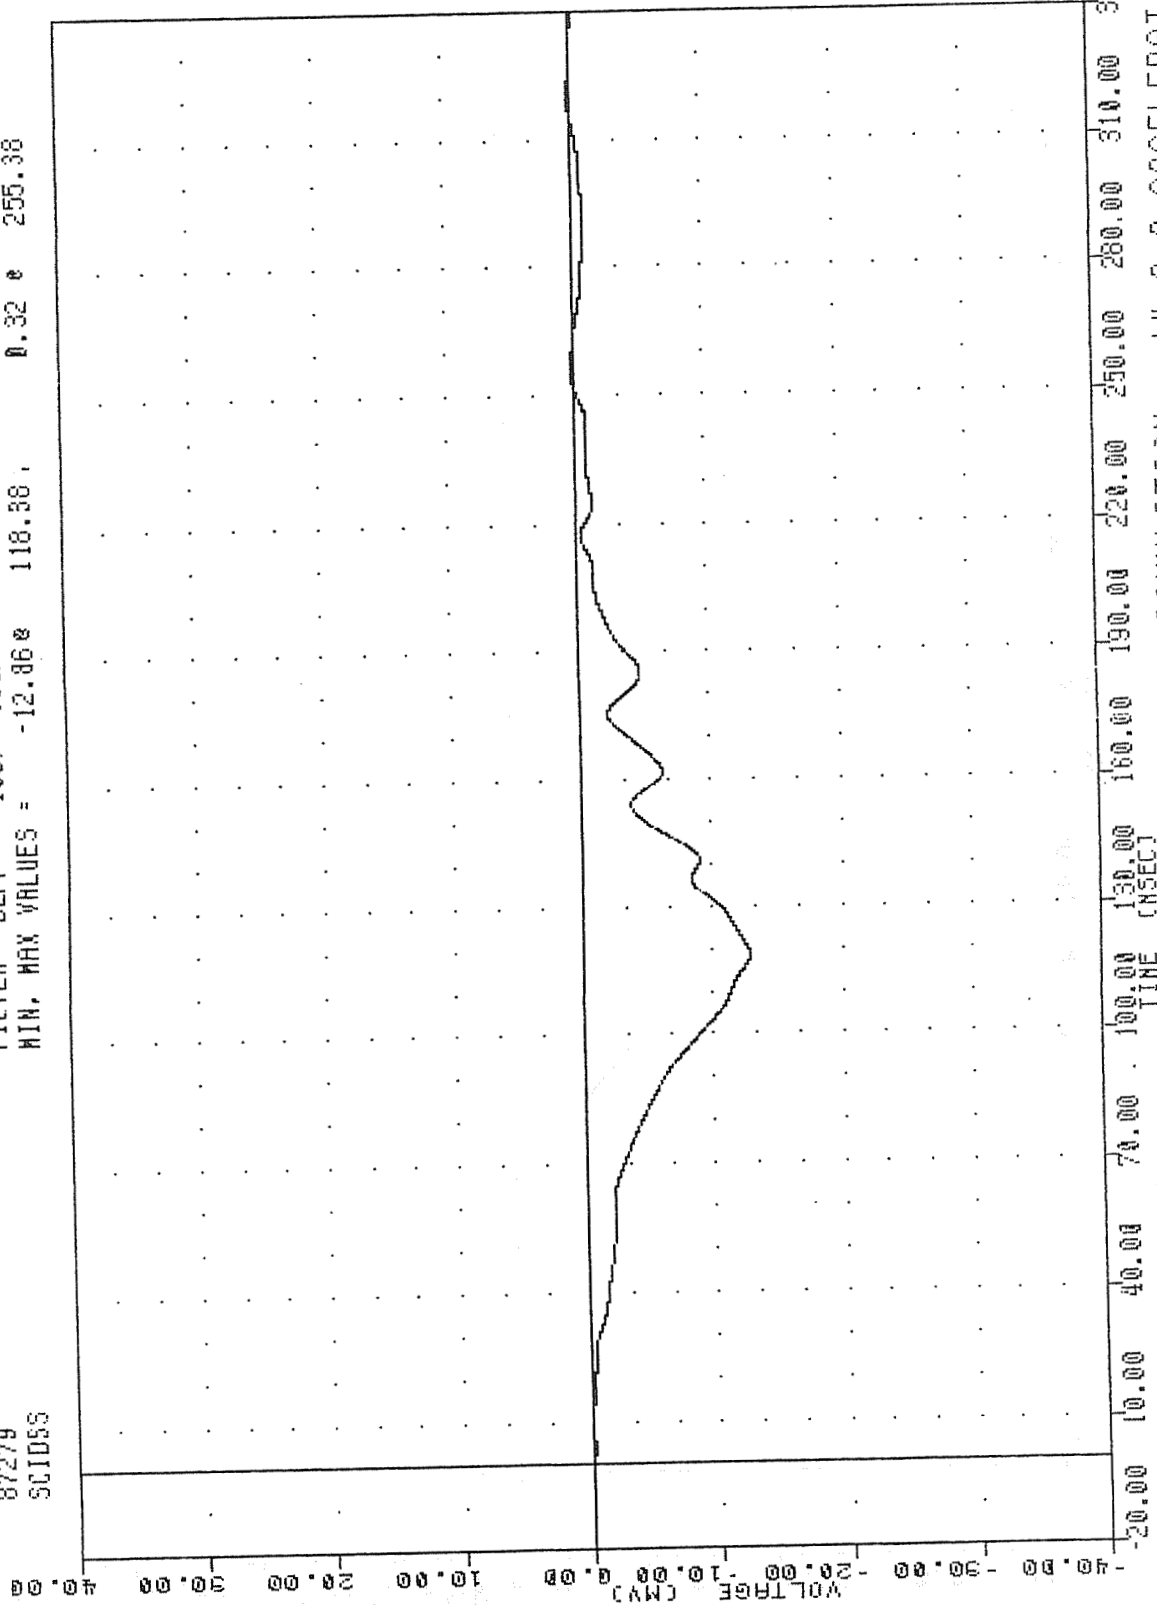


B-123

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT C INBOARD DIAGONAL STRUT STRAIN

FAR TEST 02
 CRASH SIMULATION
 87279
 300FL3

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.74e 269.75, 11.39 e 114.25

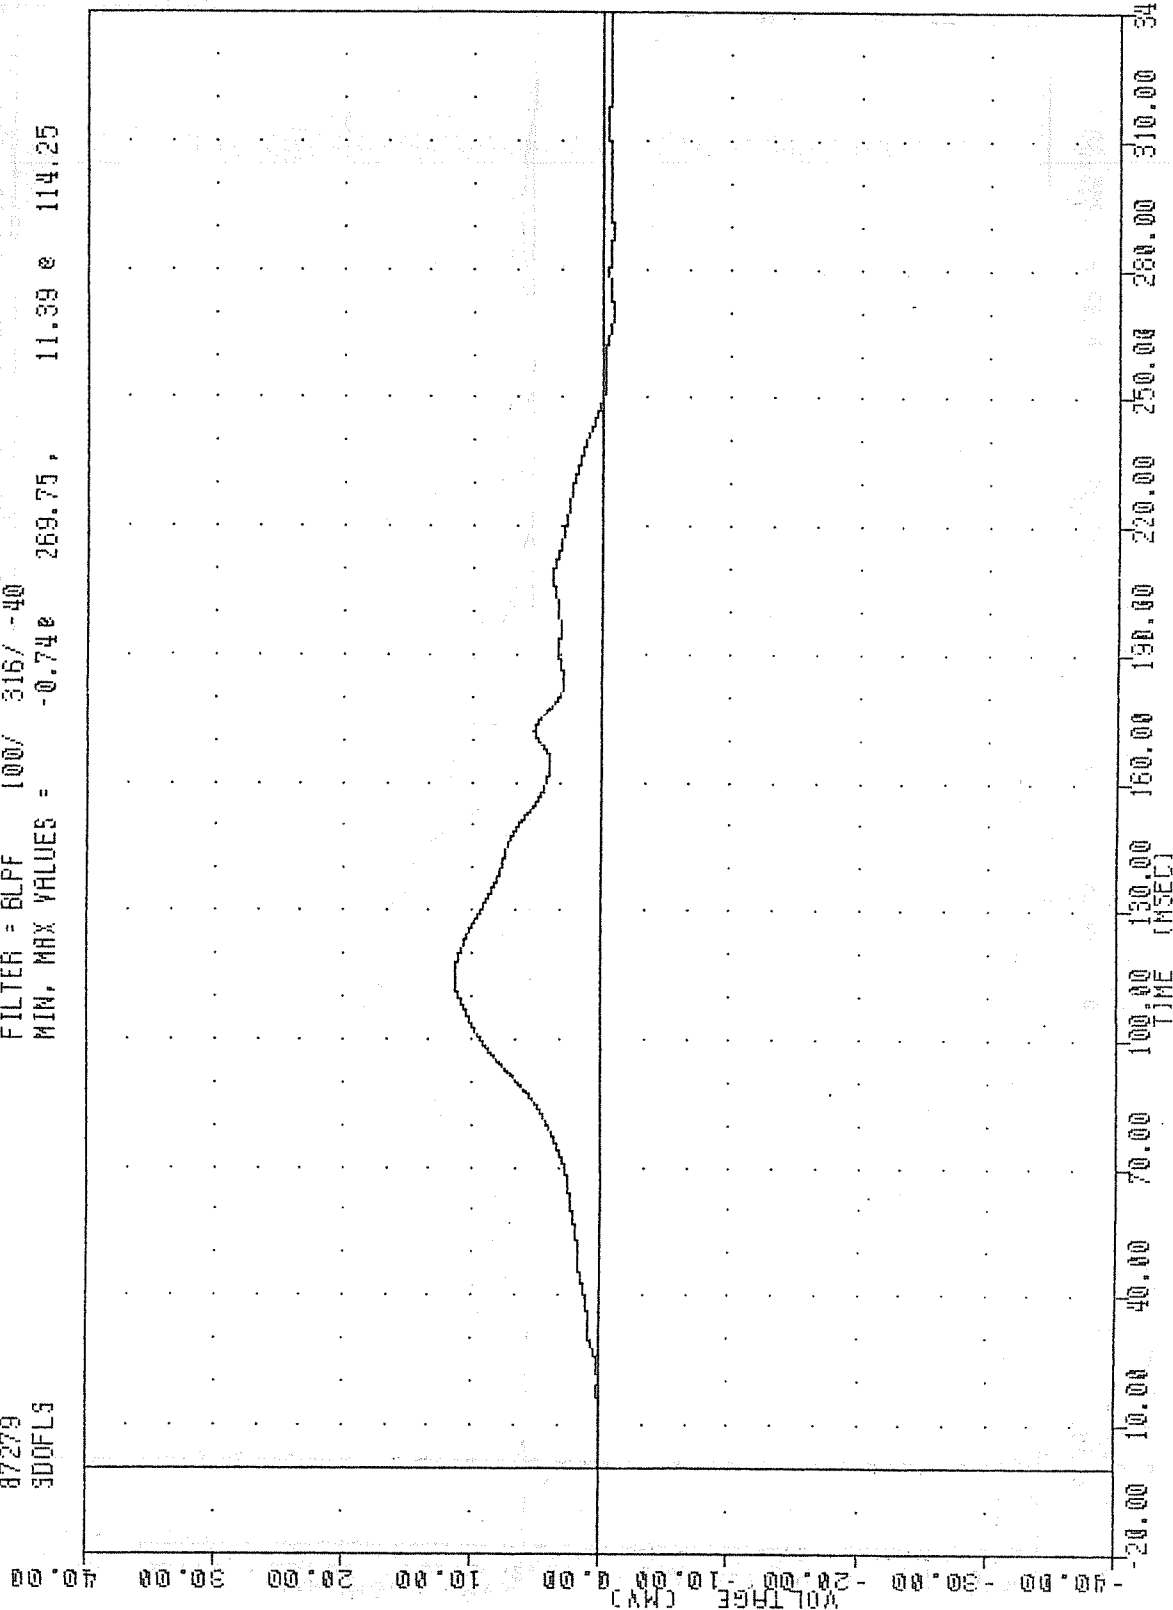

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT D OUTBOARD FORWARD LEG STRAIN

FRA , TEST 02
CRASH SIMULATION

87279
500DSS

FILTER = BLPF 100/ 316/ -40
MIN. MAX VALUES = -21.048 115.38 ,

0.85 252.75

VOLTAGE (MV)



TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION

SEAT D OUTBOARD DIAGONAL STRUT STRAIN

FAR , TEST 02

CRASH SIMULATION


87279

SOIFLS

FILTER = 8LPF 100/ 316/ -40

MIN, MAX VALUES = -0.19e 303.75 , 9.68 e 115.13

VOLTAGE (MV)

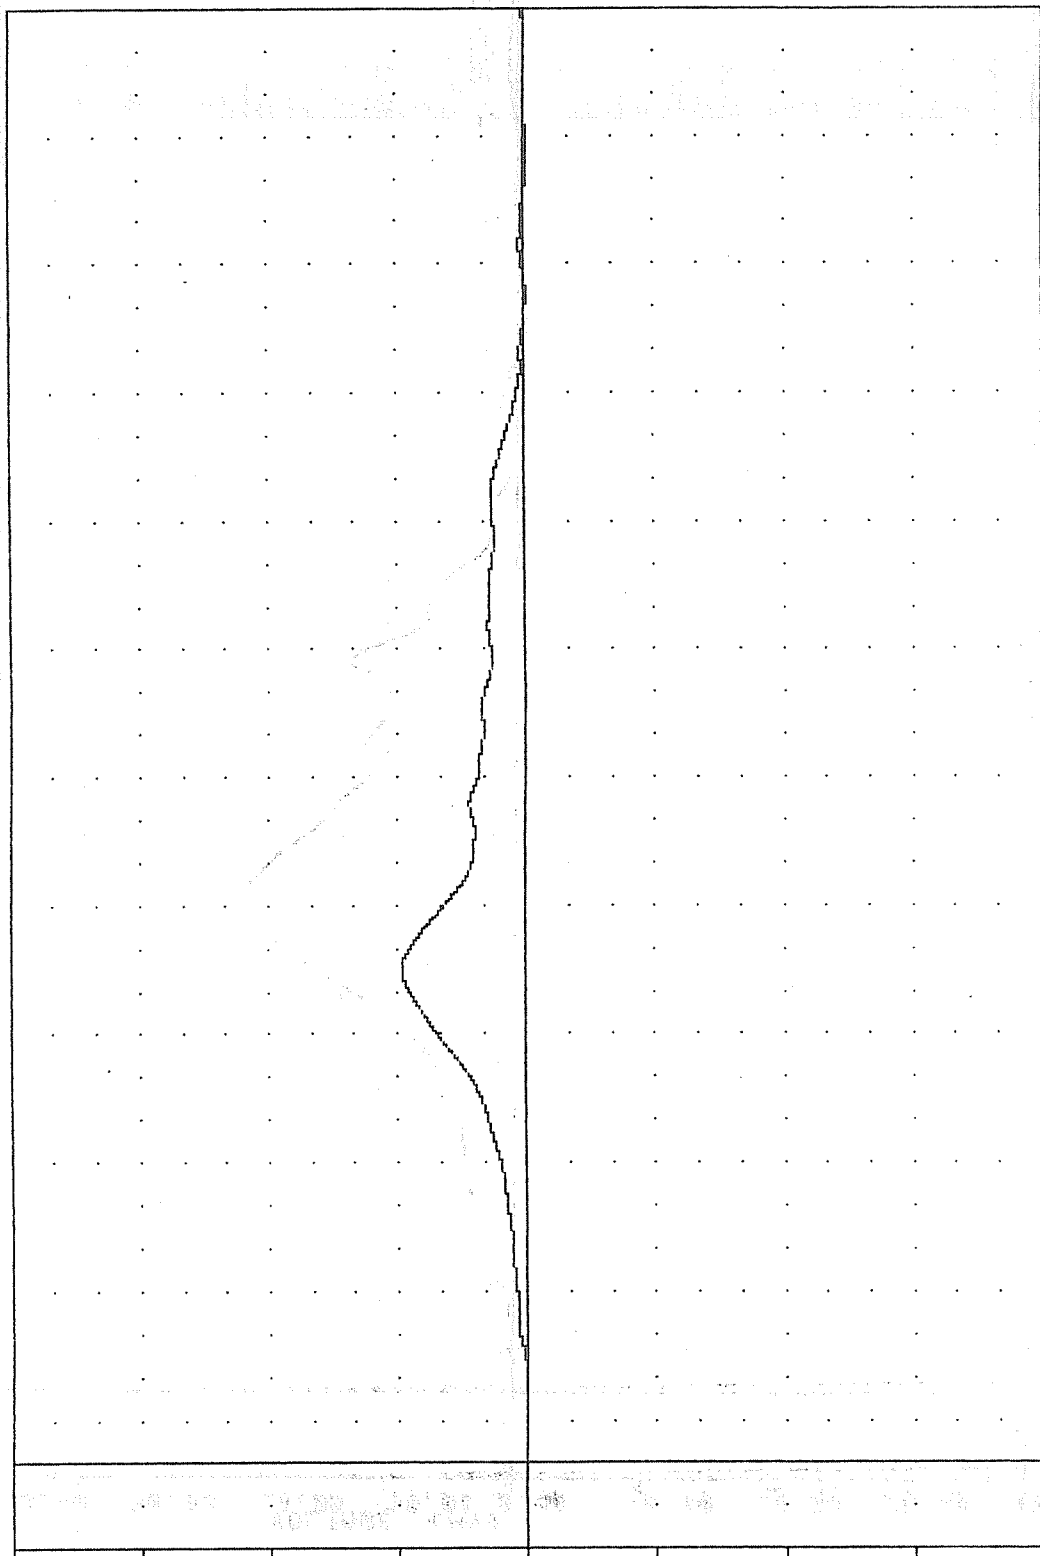

TIME (msec)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D INBOARD FORWARD LEG STRAIN

FAR , TEST 02


CRASH SIMULATION

87279

501059

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -15.83 115.63, 37.98 142.75

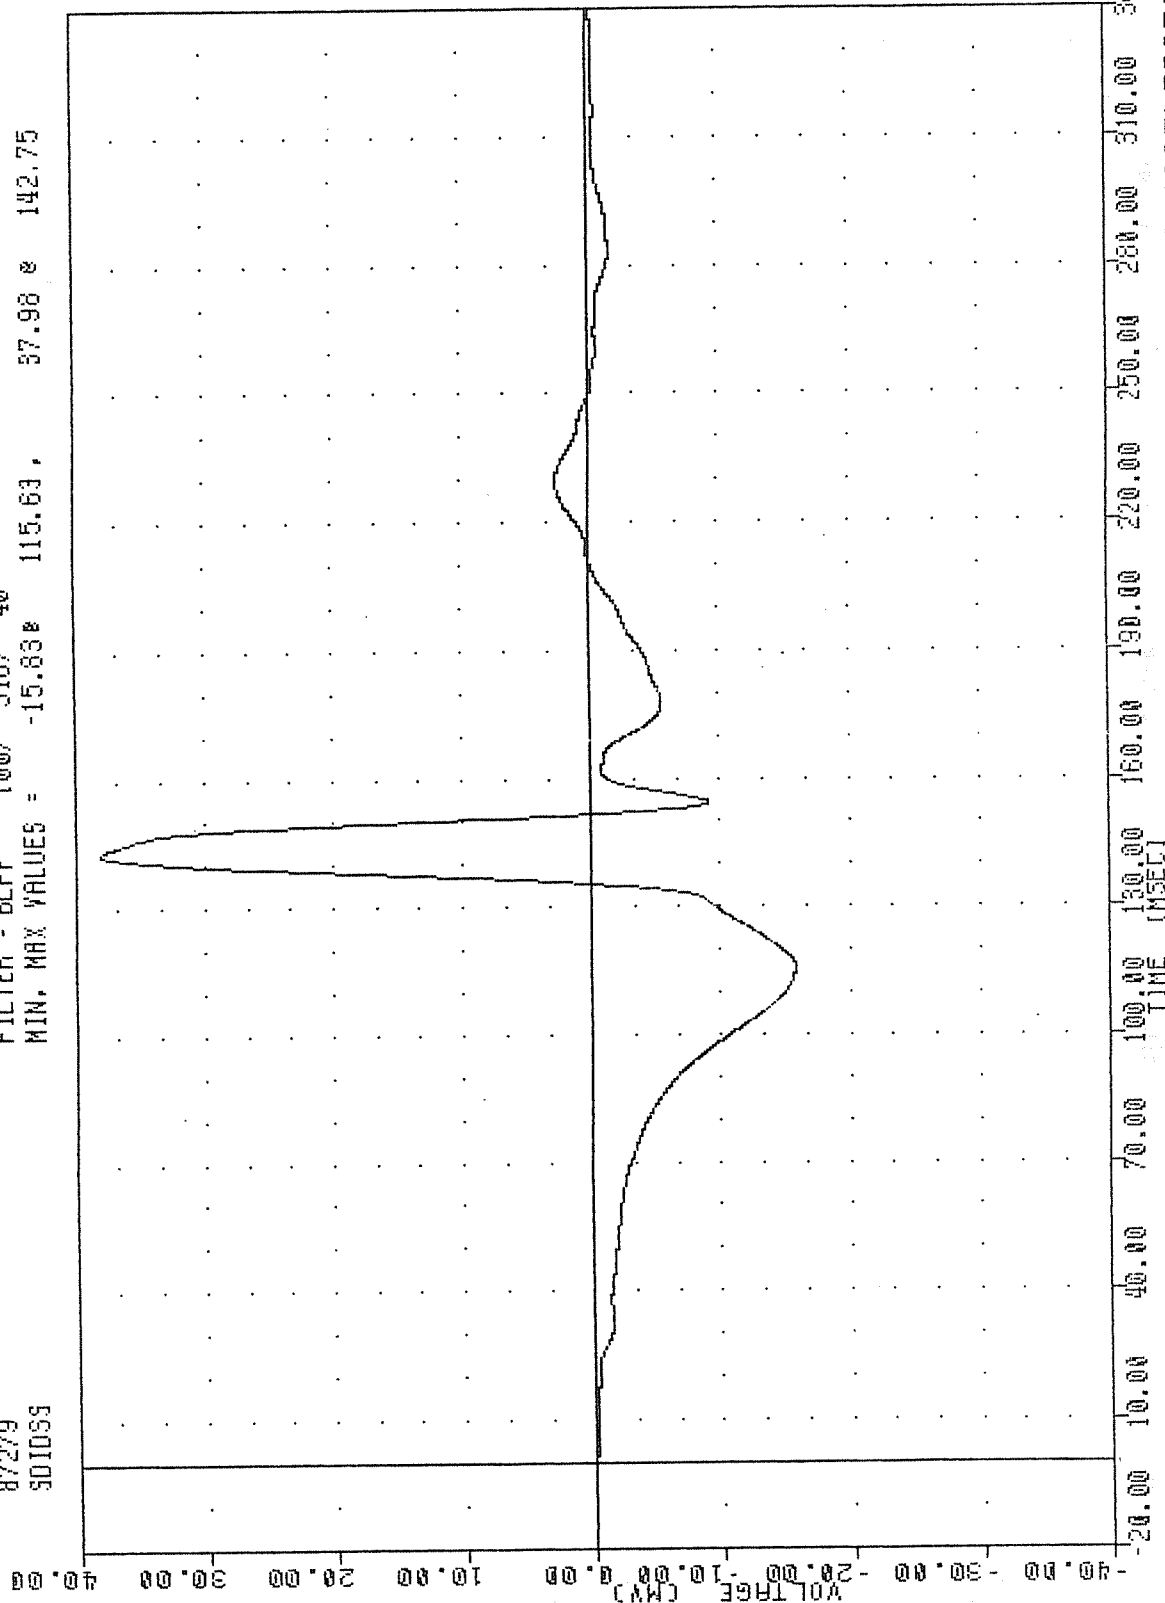


B-127

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
SEAT D INBOARD DIAGONAL STRUT STRAIN

FRA , TEST 02
 CRASH SIMULATION
 87279
 SEIFLS

FILTER = 8LPF 100/ 316/ -40
 MIN, MAX VALUES = -0.518 334.75, 12.66 164.00

VOLTAGE (MV)

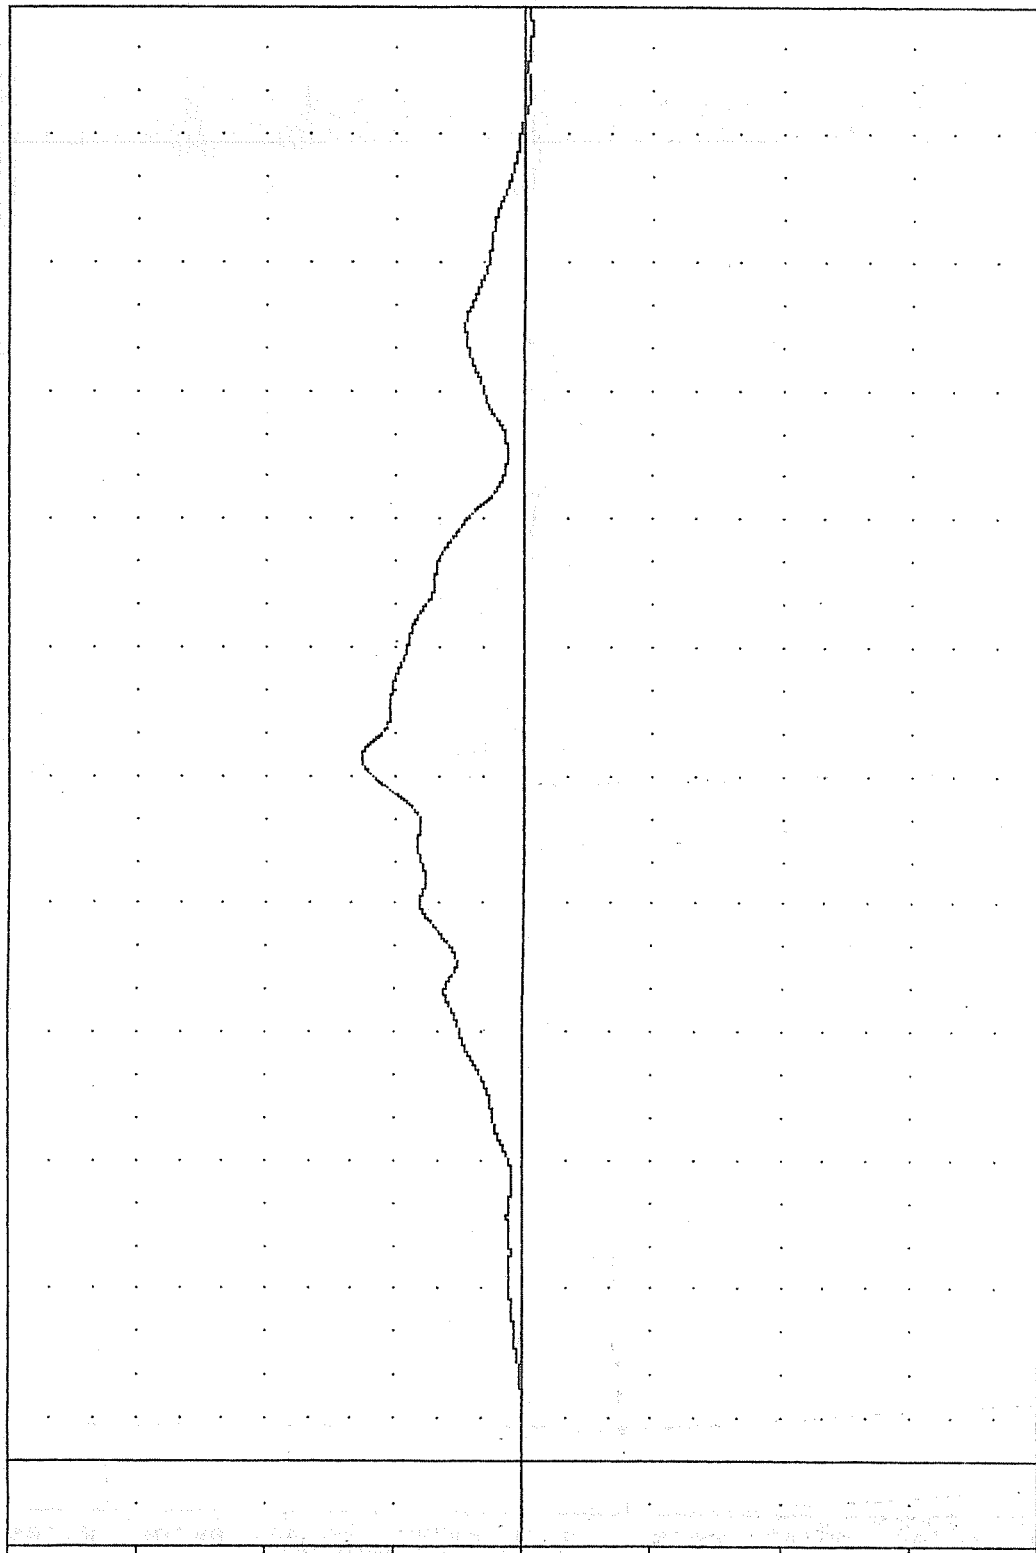


-20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (msec)

TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT E OUTBOARD FORWARD LEG STRAIN

FAR , TEST 02
 CRASH SIMULATION
 87279
 SE0055

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -19.58e 118.13 , 0.01 e -13.88

VOLTAGE (MV)

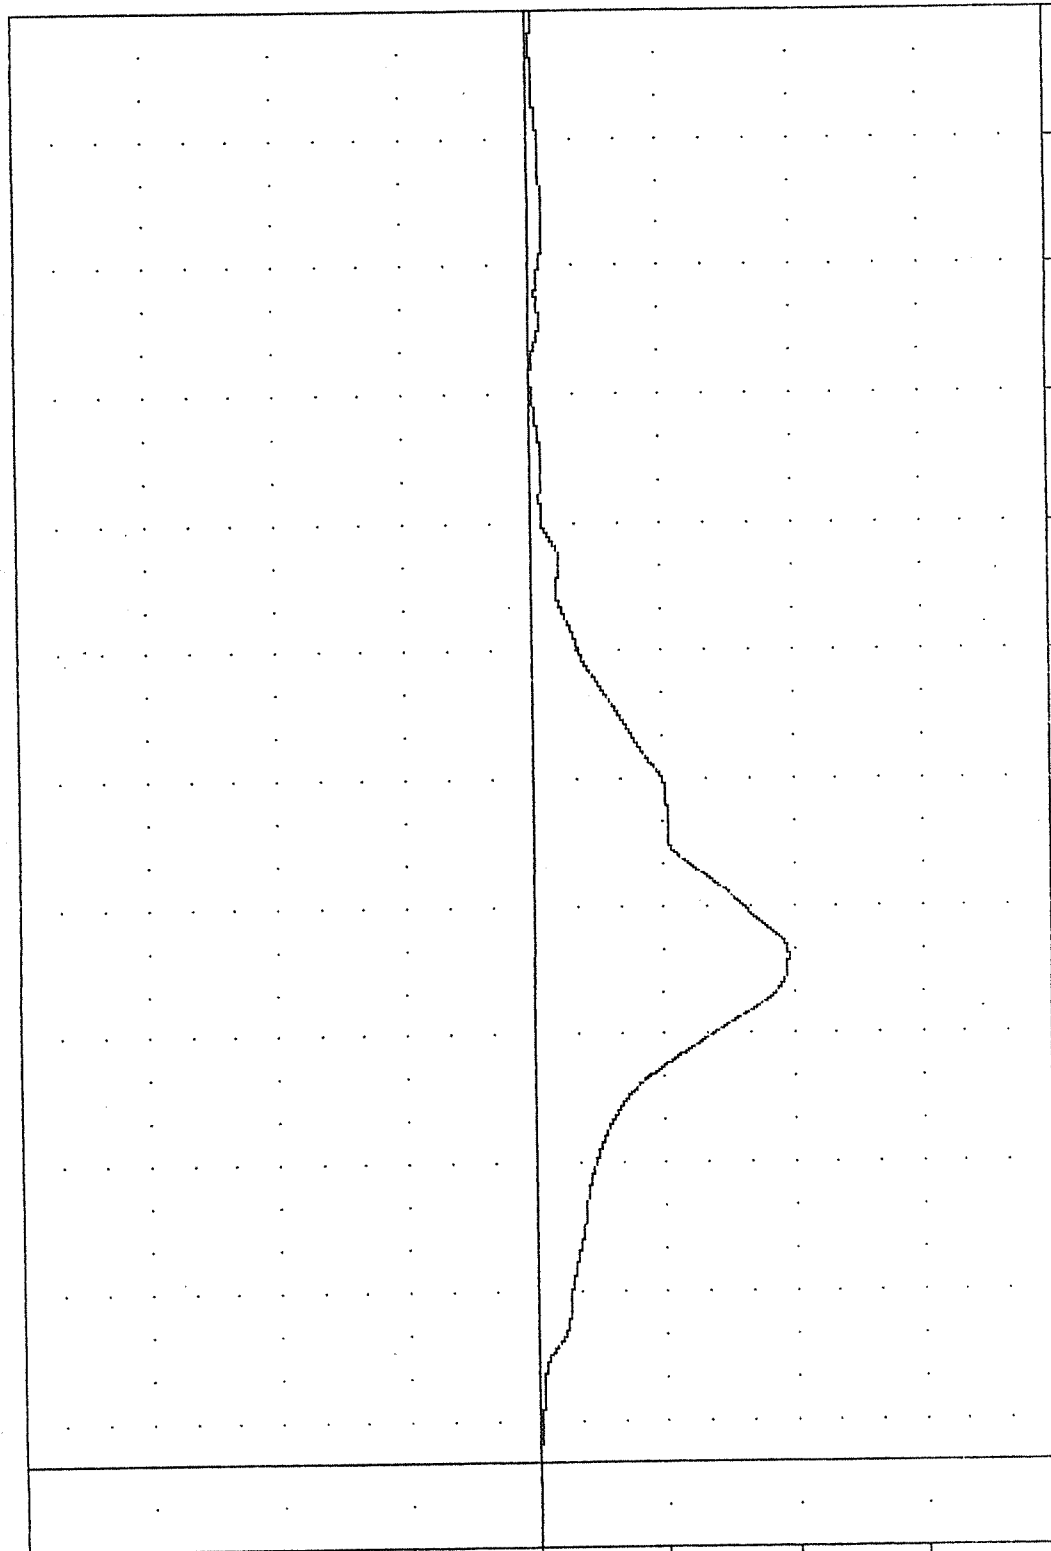


20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (MSEC)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT E OUTBOARD DIAGONAL STRUT STRAIN

FAR TEST 02
 CRASH SIMULATION
 87279
 SF0FLS

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.40% 300.25, 9.66 e 242.63

VOLTAGE (MV)

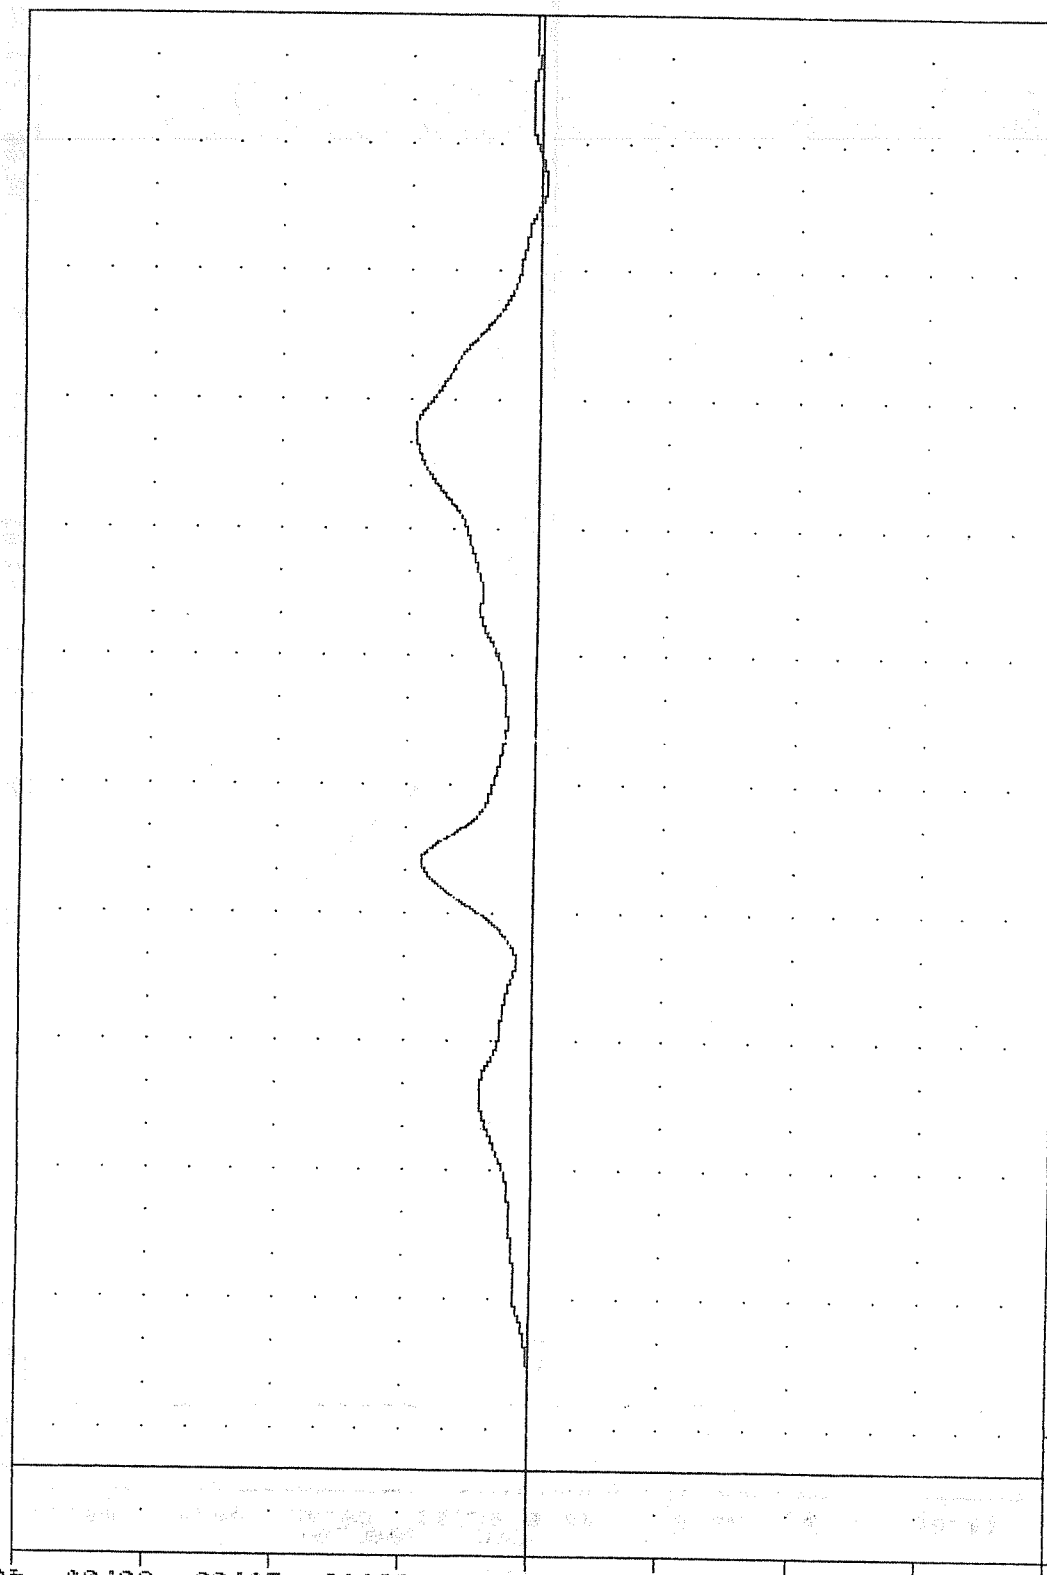

20.00 10.00 40.00 70.00 100.00 130.00 160.00 190.00 220.00 250.00 280.00 310.00 340.00
 TIME (msec)
 TRANSPORT AIRCRAFT LONGITUDINAL IMPACT SIMULATION - 14.2 G ACCELERATION
 SEAT F OUTBOARD FORWARD LEG STRAIN

APPENDIX C

CALIBRATION DATA

1. The first part of the report is a general introduction to the subject of the study. It discusses the importance of the study and the objectives of the research. It also provides a brief overview of the methodology used in the study.

2. Literature Review

The literature review discusses the existing research on the subject of the study. It identifies the strengths and weaknesses of the existing research and highlights the gaps in the literature that the current study aims to address.

INSTRUMENTATION CALIBRATION INFORMATION

CHANNEL	INSTRUMENT				CALIBRATION
ABBREVIATION	MANUFACTURER	MODEL NO.	SERIAL NO.	SENSITIVITY	DATE
PEVXG1	ENDEVCO	7264	CC77H	.2585mv/g	9/04/87
PEVZG1	ENDEVCO	7264	CB07H	.3482mv/g	9/10/87
PEVXG2	ENDEVCO	7264	BK96J	.2554mv/g	8/02/87
PEVZG2	ENDEVCO	7264	BY82J	.3041mv/g	8/02/87
LBOF1	LEBOW	3419	127	2.812mv/v	7/29/87
LBIF1	LEBOW	3419	236	2.704mv/v	7/29/87
LBOF2	LEBOW	3419	234	2.412mv/v	7/29/87
LBIF2	LEBOW	3419	571	0.908mv/v	6/12/87
FUSXG1	ENDEVCO	7264	CF11H	.2893mv/g	10/01/87
FUSXG2	ENDEVCO	7264	CE23H	.3607mv/g	10/01/87
FUSXG3	ENDEVCO	7264	CD74H	.3355mv/g	10/01/87
FLMXG1	ENDEVCO	7264	CE49H	.4135mv/g	10/01/87
FLAXG2	ENDEVCO	7264	CE79H	.3322mv/g	10/01/87
FLAYG2	ENDEVCO	7264	CA57H	.3183mv/g	10/01/87
FLAZG2	ENDEVCO	7264	CC01H	.2991mv/g	10/01/87
FLMXG3	ENDEVCO	7264	CE63H	.3691mv/g	9/19/87
FLMYG3	ENDEVCO	7264	CC02H	.3329mv/g	10/01/87
FLMZG3	ENDEVCO	7264	BY18J	.3267mv/g	10/01/87
FLFXG4	ENDEVCO	7264	CE72H	.3229mv/g	10/01/87
FLFYG4	ENDEVCO	7264	CE91H	.3772mv/g	9/19/87
FLFZG4	ENDEVCO	7264	CE21H	.3384mv/g	10/01/87
SECXG	ENTRAN		A1-1	.513mv/g	
SECYG	ENTRAN		A2-2	.513mv/g	
SECZG	ENTRAN		J1-1	.321mv/g	
SEDXG	ENTRAN		J3-3	.318mv/g	
SEDYG	ENTRAN		J10-1	.310mv/g	
SEDZG	ENTRAN		78-5	.335mv/g	

STATIC PULL TESTS

SETUP

On March 10 and 11, 1988 four (4) static, vertical pull tests were conducted on the B707 fuselage section. The fuselage was re-installed into the test fixture that was utilized on the two sled tests. Figures C-1 and C-2 illustrate the fuselage, the test fixture and the two I-beams that were installed through the windows. Figure C-3 illustrates how the force was applied to the seat tracks.

INSTRUMENTATION

Nine channels of data were collected during each test. The vertical displacement of the beam at body station 1180 was measured beneath each of the four seat tracks. Figures C-4 through C-9 show the displacement potentiometers. Four vertical beam strains and the applied load data were collected also.

Figure C-10 through C-17 illustrate the setup for each pull test.

On the pages following the figures are time history data plots, applied load versus beam strain data plots and applied load versus beam deflection data plots.

TEST NOTES

The Starboard Outboard Beam Strain (SOBS) strain gage output polarity appears to be opposite from the other three strain gages.

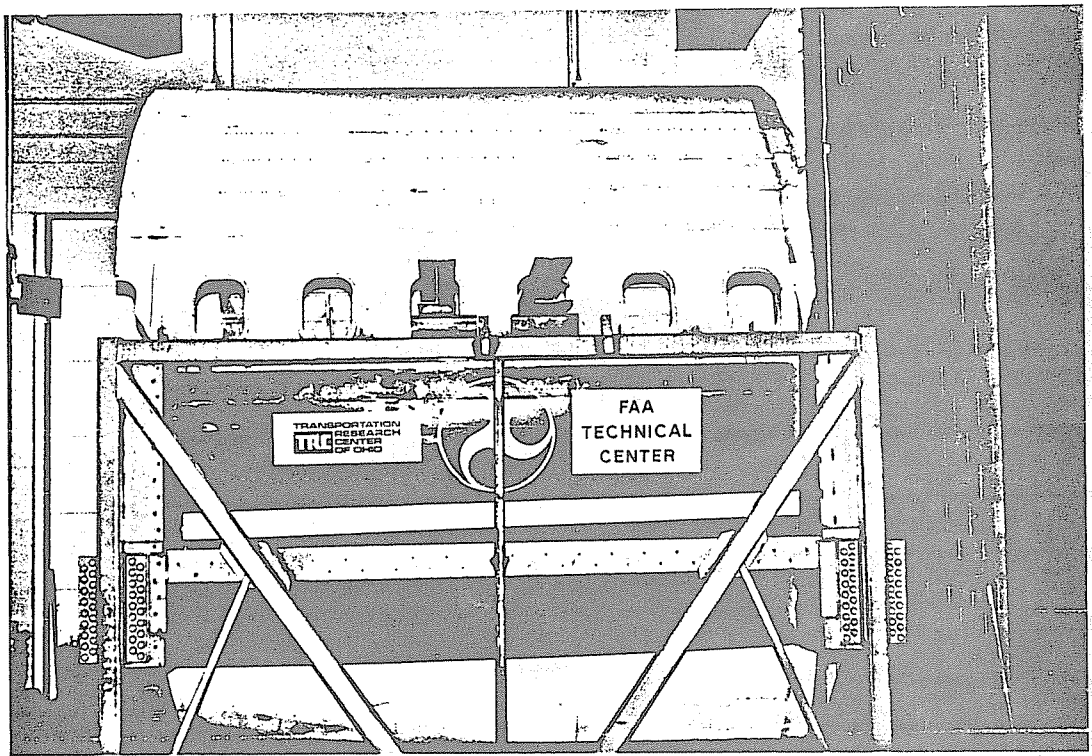


Figure C-1. FUSELAGE AND TEST FIXTURE - VIEW 1

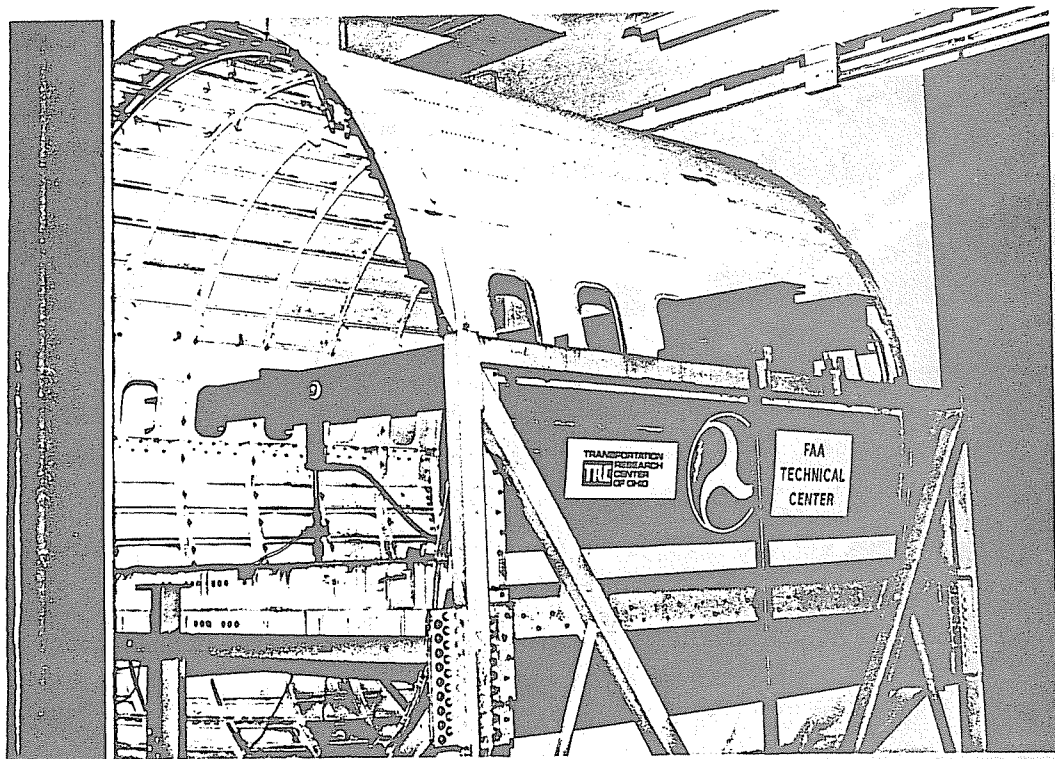


Figure C-2. FUSELAGE AND TEST FIXTURE - VIEW 2

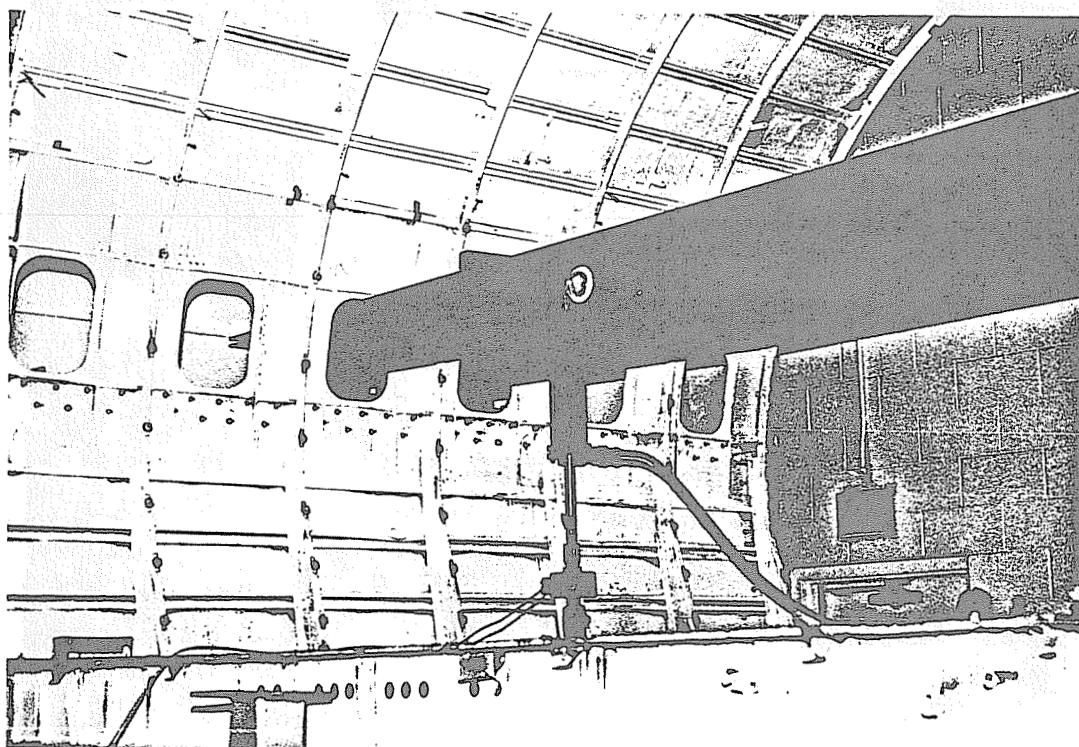


Figure C-3. LOAD APPLICATION

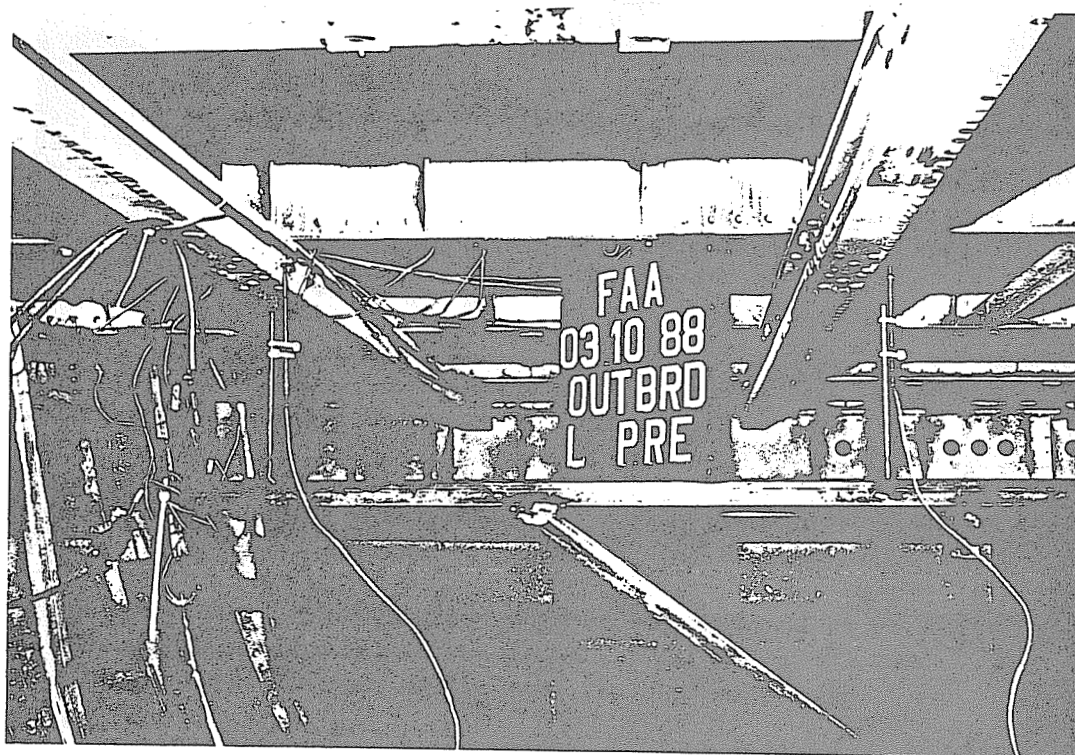


Figure C-4. PORT DISPLACEMENT POTENTIOMETERS
C-4

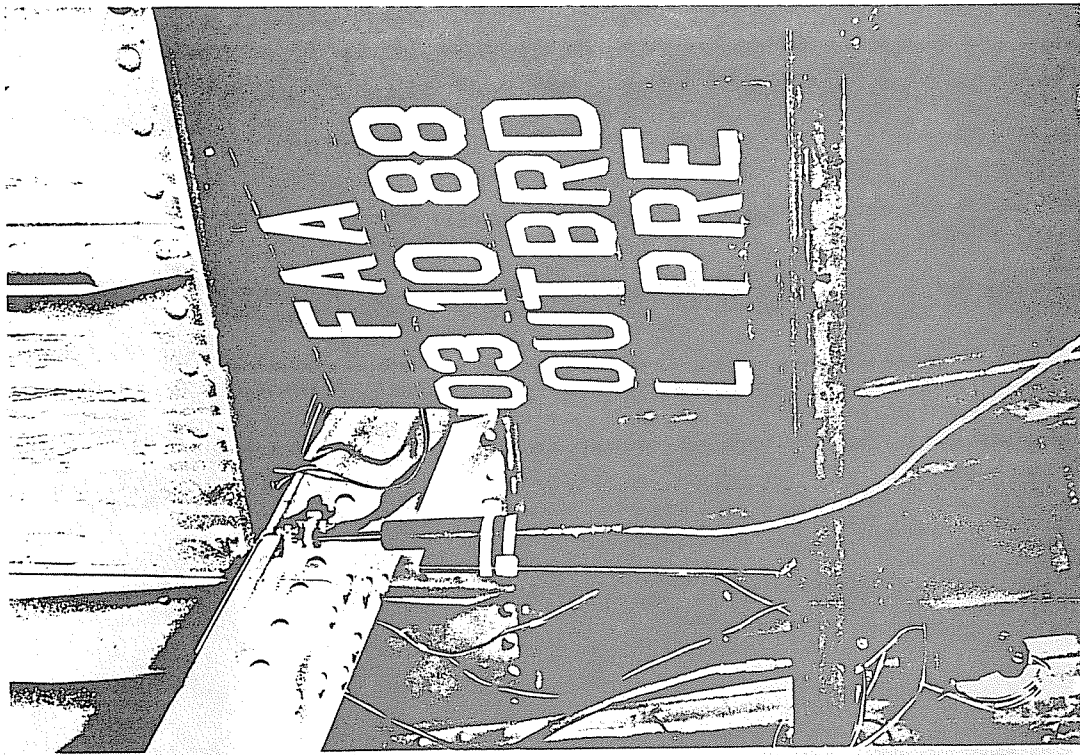


Figure C-5. PORT OUTBOARD DISPLACEMENT POTENTIOMETERS

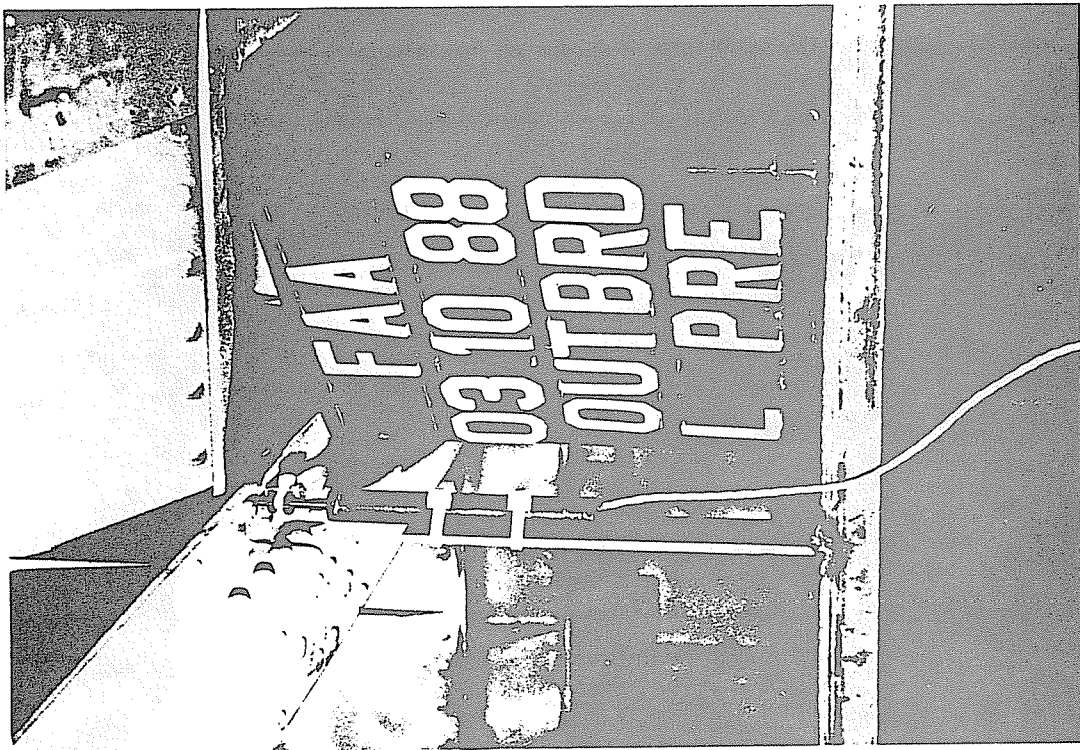


Figure C-6. PORT INBOARD DISPLACEMENT POTENTIOMETER
C-5



Figure C-7. STARBOARD DISPLACEMENT POTENTIOMETERS



Figure C-8. STARBOARD INBOARD DISPLACEMENT POTENTIOMETERS
C-6



Figure C-9. STARBOARD OUTBOARD DISPLACEMENT POTENTIOMETER

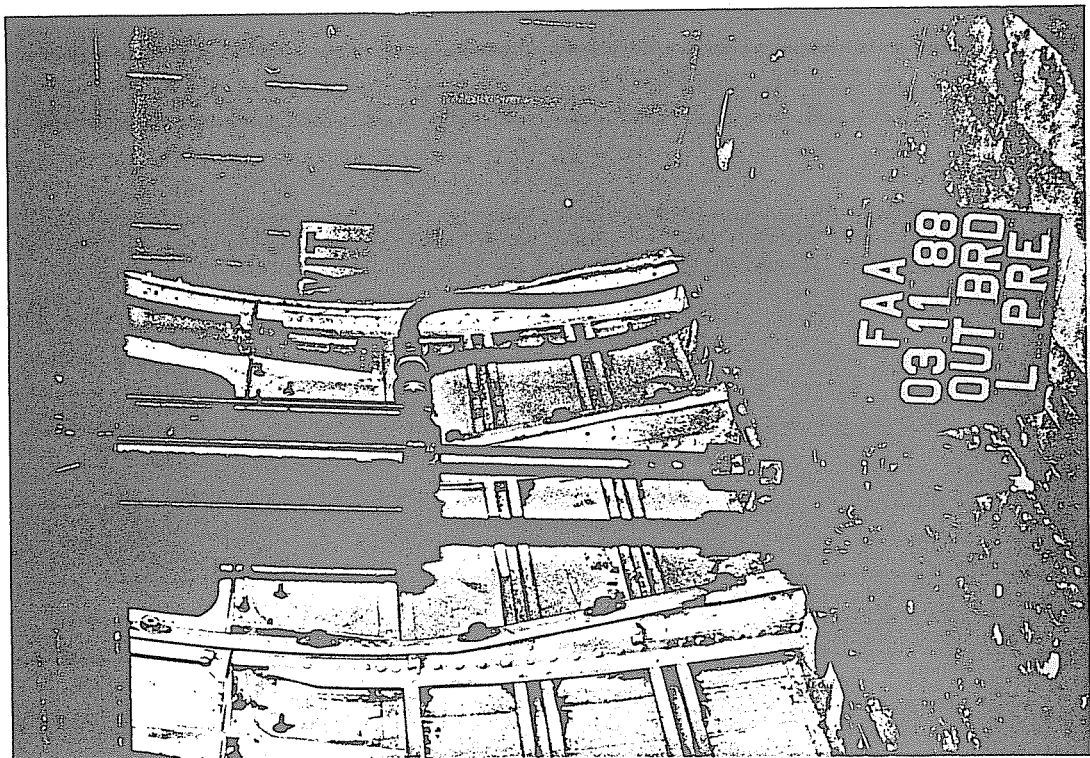


Figure C-10. PORT OUTBOARD TEST SETUP
C-7



Figure C-11. PORT OUTBOARD TEST SETUP - CLOSEUP



Figure C-12. PORT INBOARD TEST SETUP
C-8



Figure C-13. PORT INBOARD TEST SETUP - CLOSEUP

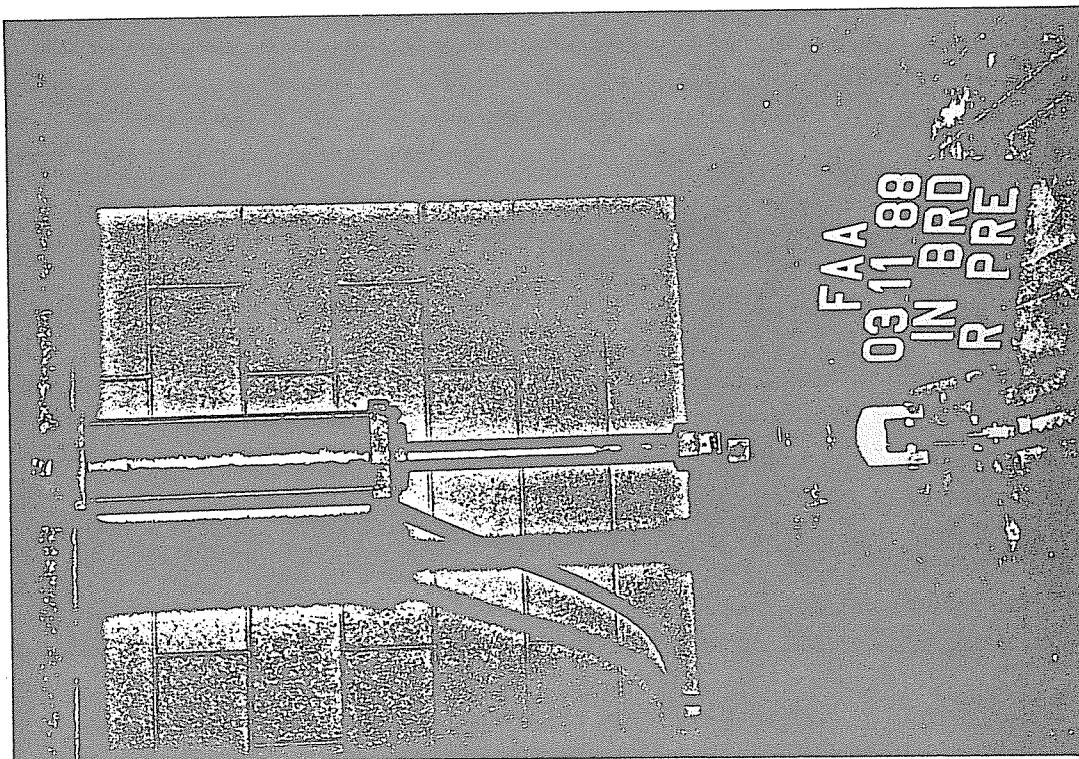


Figure C-14. STARBOARD INBOARD TEST SETUP

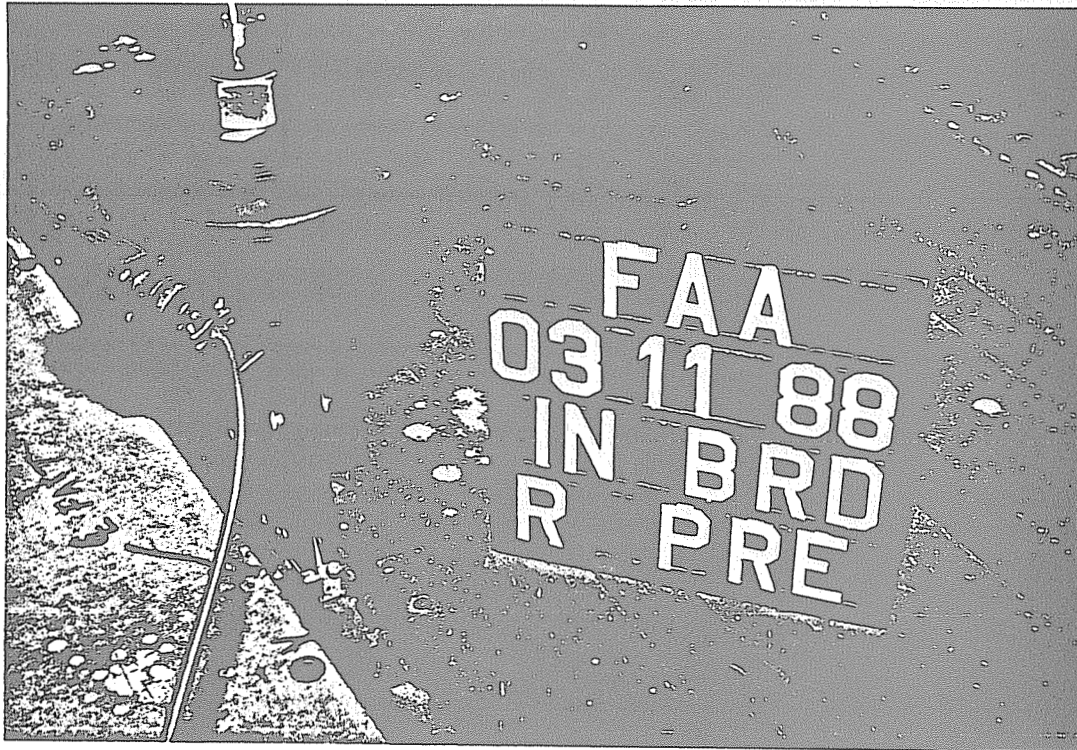


Figure C-15. STARBOARD INBOARD TEST SETUP - CLOSEUP



Figure C-16. STARBOARD OUTBOARD TEST SETUP
C-10


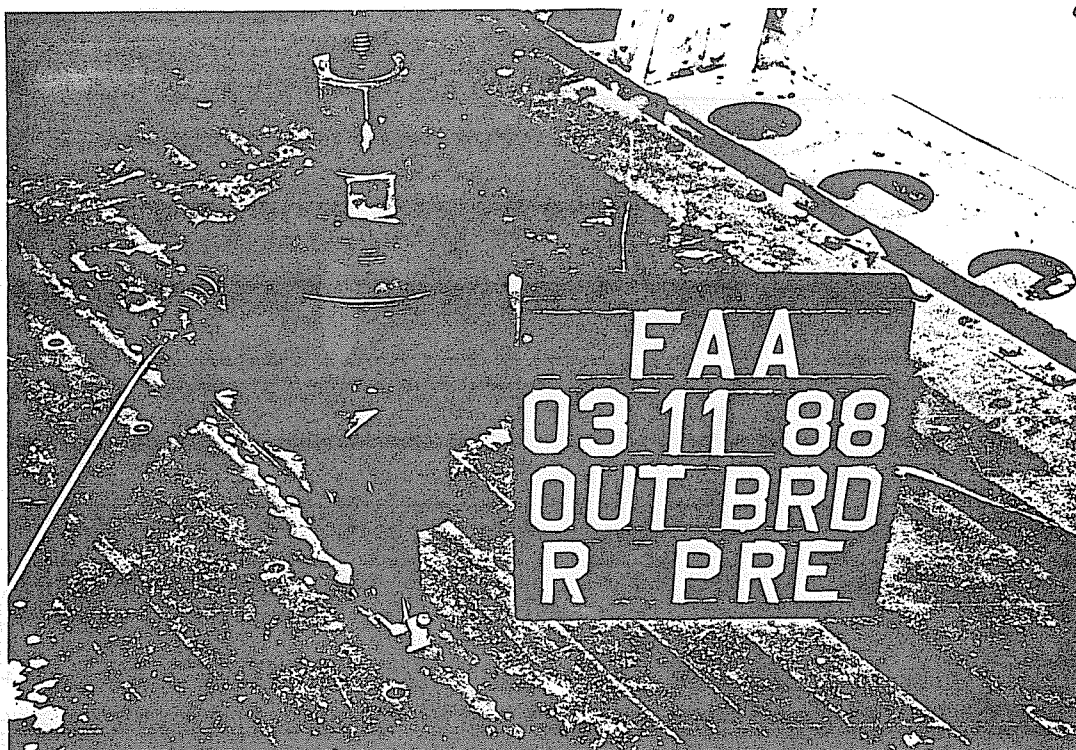


Figure C-17. STARBOARD OUTBOARD TEST SETUP - CLOSEUP

FAA , TEST02
 VERTICAL PULL TESTS
 88071
 LOAD

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -37.44 0.04 , 4445.64 15.05

FORCE (LB)
 (X10³)

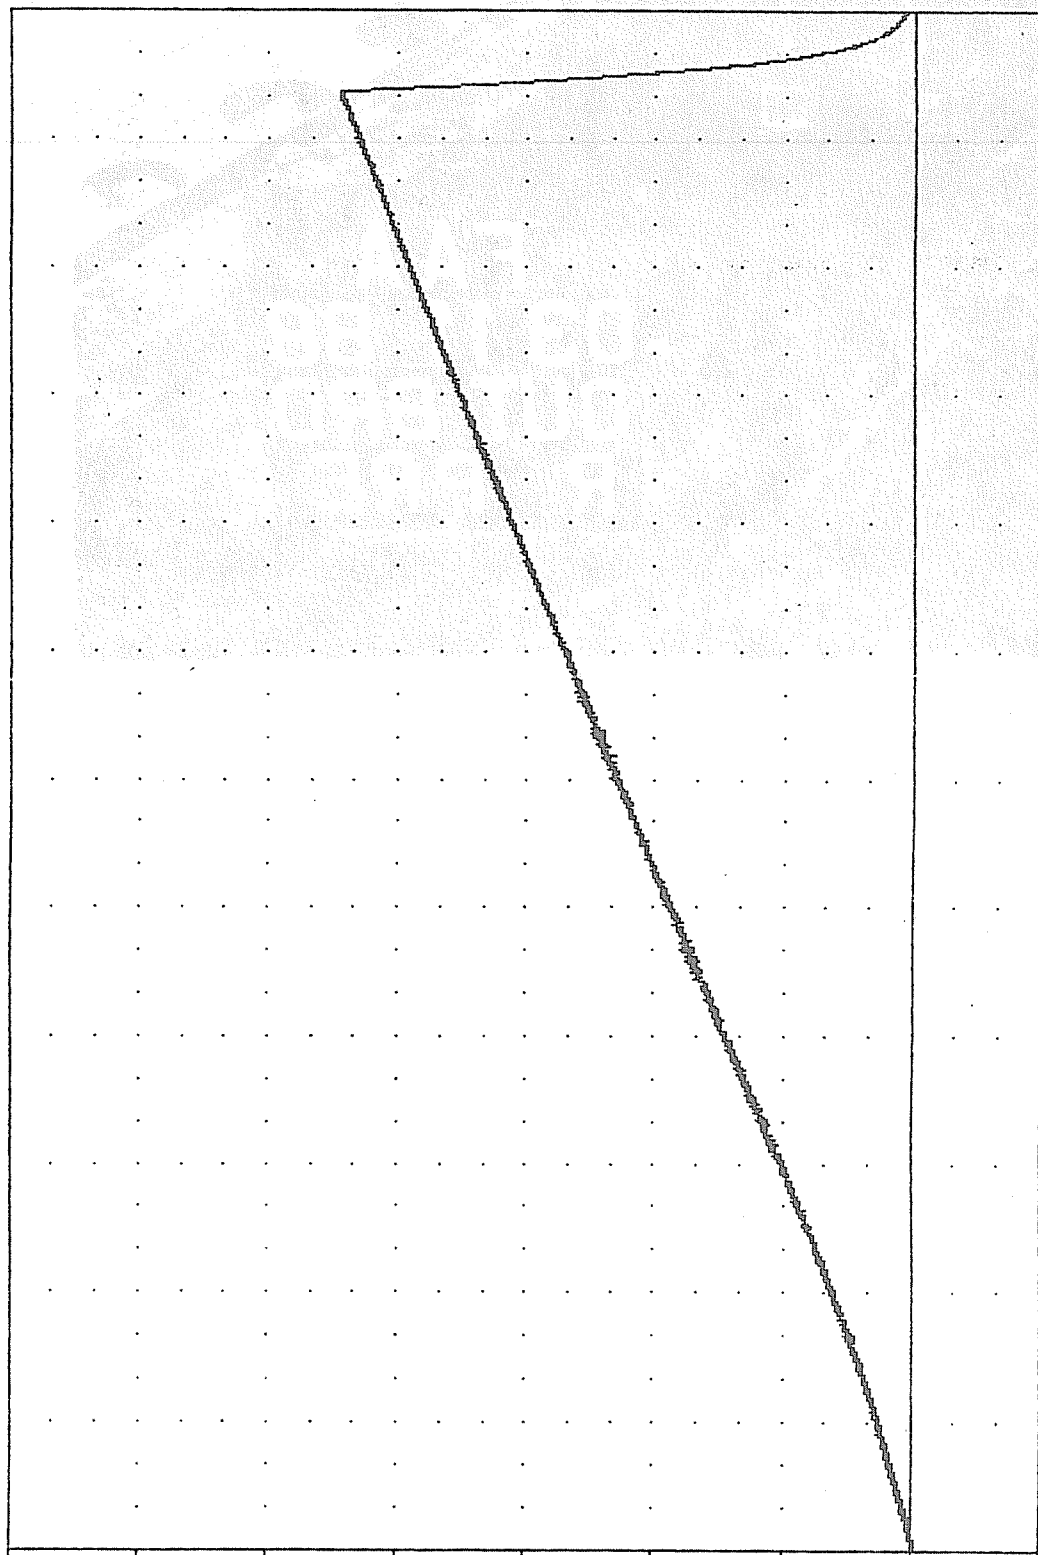


LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK

FRA TEST02
 VERTICAL PULL TESTS
 88071
 P083

FILTER = 6LFF 100/-40 316/-40 15.05
 MIN, MAX VALUES = 0.000 0.11 2.59 15.05

VOLTAGE (MV)

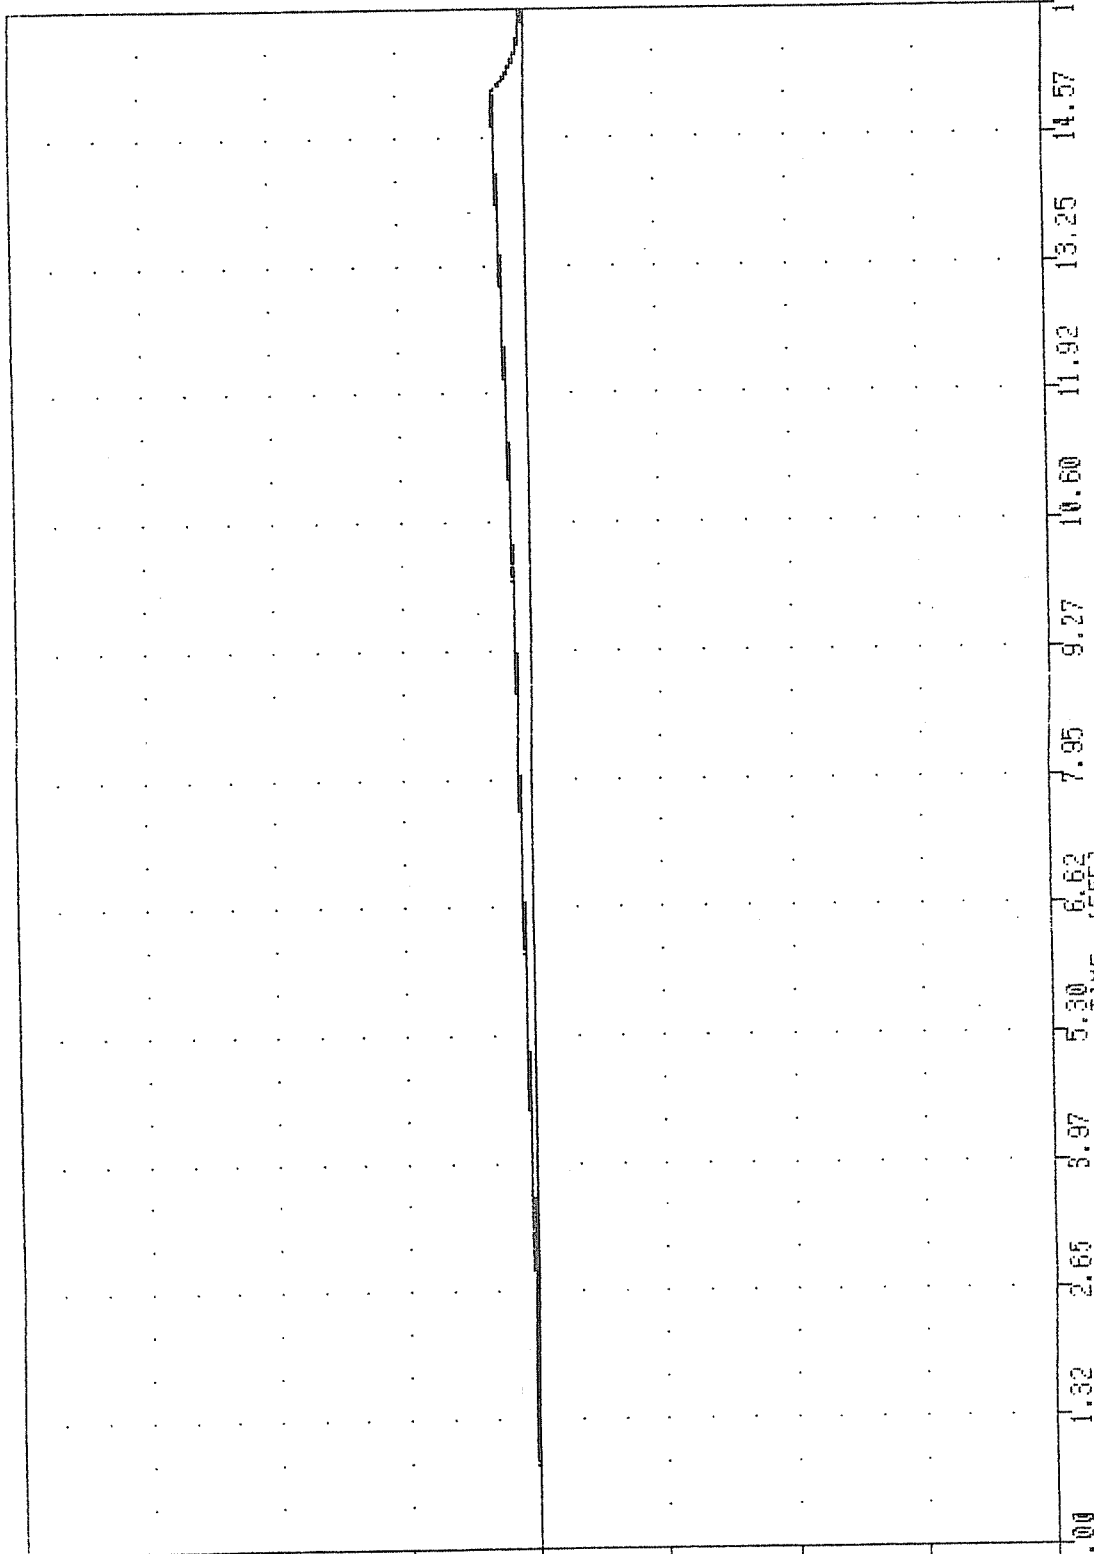


LOAD APPLIED AT PORT INBOARD SEAT TRACK
 PORT OUTBOARD BEAM STRAIN

1100
 VERTICAL PULL TESTS
 80071
 P185

FILTER = 01PF 100/ 316/ -40
 MIN, MAX VALUES = 0.27 0.02, 26.60 15.05

-40.00
 -30.00
 -20.00
 -10.00
 0.00
 10.00
 20.00
 30.00
 40.00

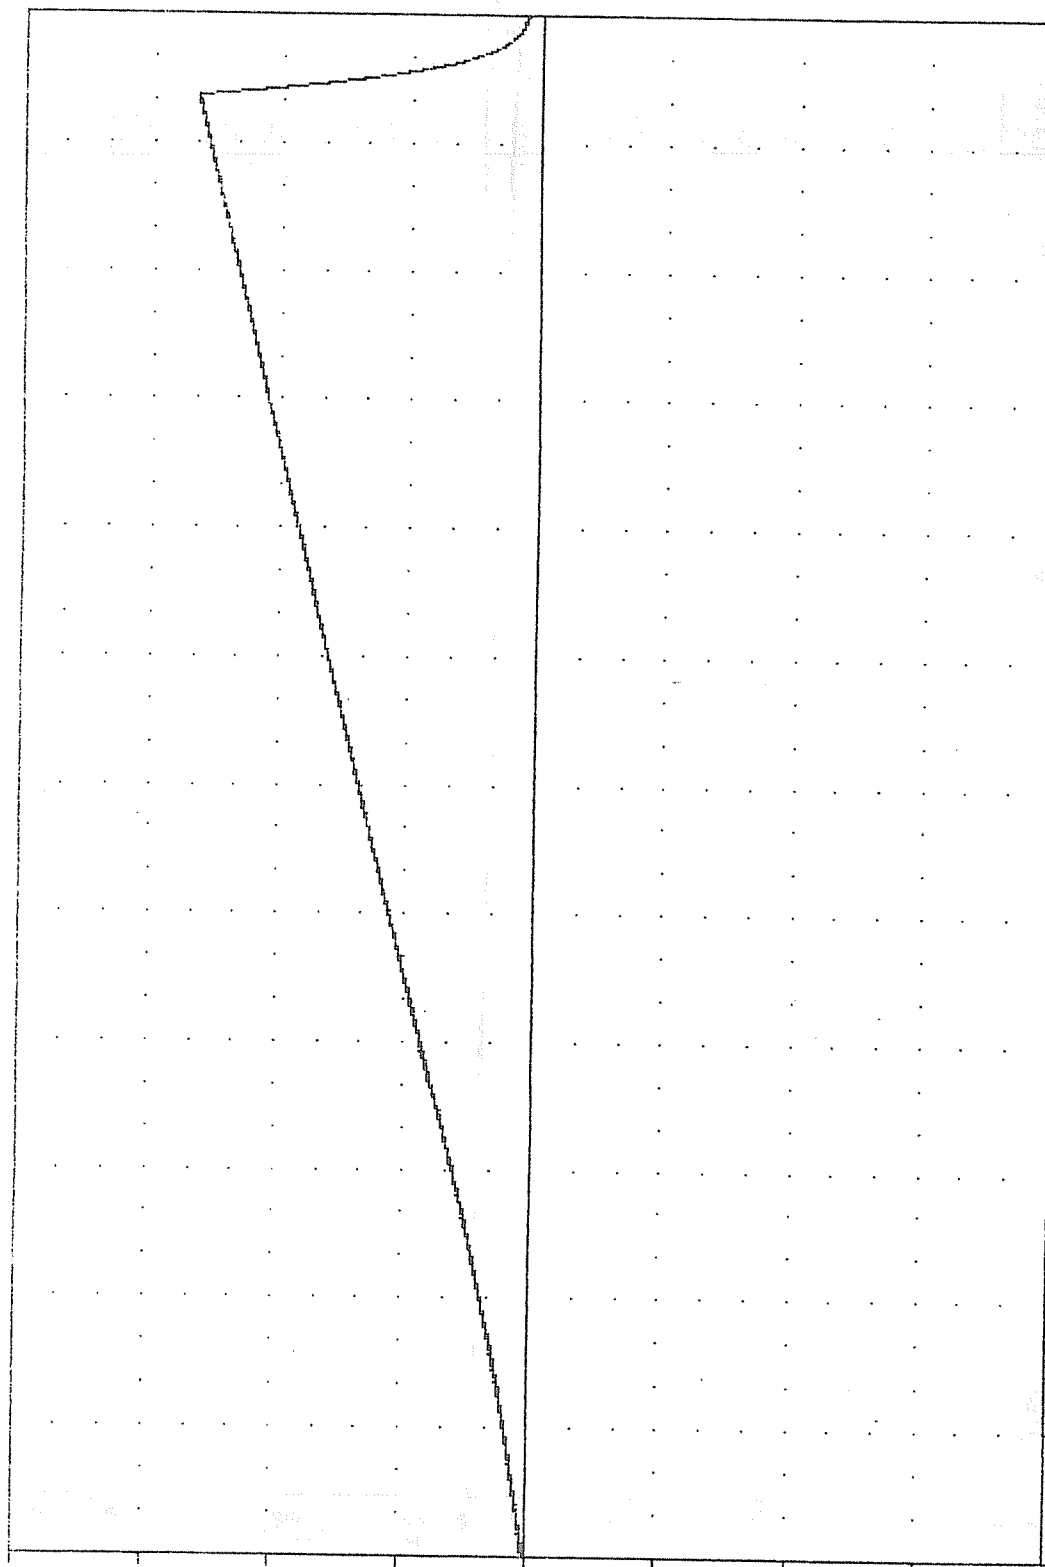

0.00 1.32 2.65 3.97 5.30 6.62 7.95 9.27 10.60 11.92 13.25 14.57 15.90

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 PORT INBOARD BEAM STRAIN

100H - 115102

VERTICAL PULL TESTS

83071

STES

FILTER = BLPF 100/ 316/ -40

MIN. MAX VALUES = -0.22 0.15,

0.31 2 15.07

40.00

30.00

20.00

10.00

0.00

C-15

VOLTAGE (MVA)

10.00

20.00

30.00

40.00

1.00

1.32

2.65

3.97

5.30

6.62

7.95

9.27

10.60

11.92

13.25

14.57

15.90

TIME (SEC)


LOAD APPLIED AT PORT INBOARD SEAT TRACK

STARBOARD INBOARD BEAM STRAIN

FRA , TEST02
 VERTICAL PULL TESTS
 88071
 5065

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -0.418 0.04 , 4.33 & 15.02

VOLTAGE (MV) 40.00 30.00 20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00

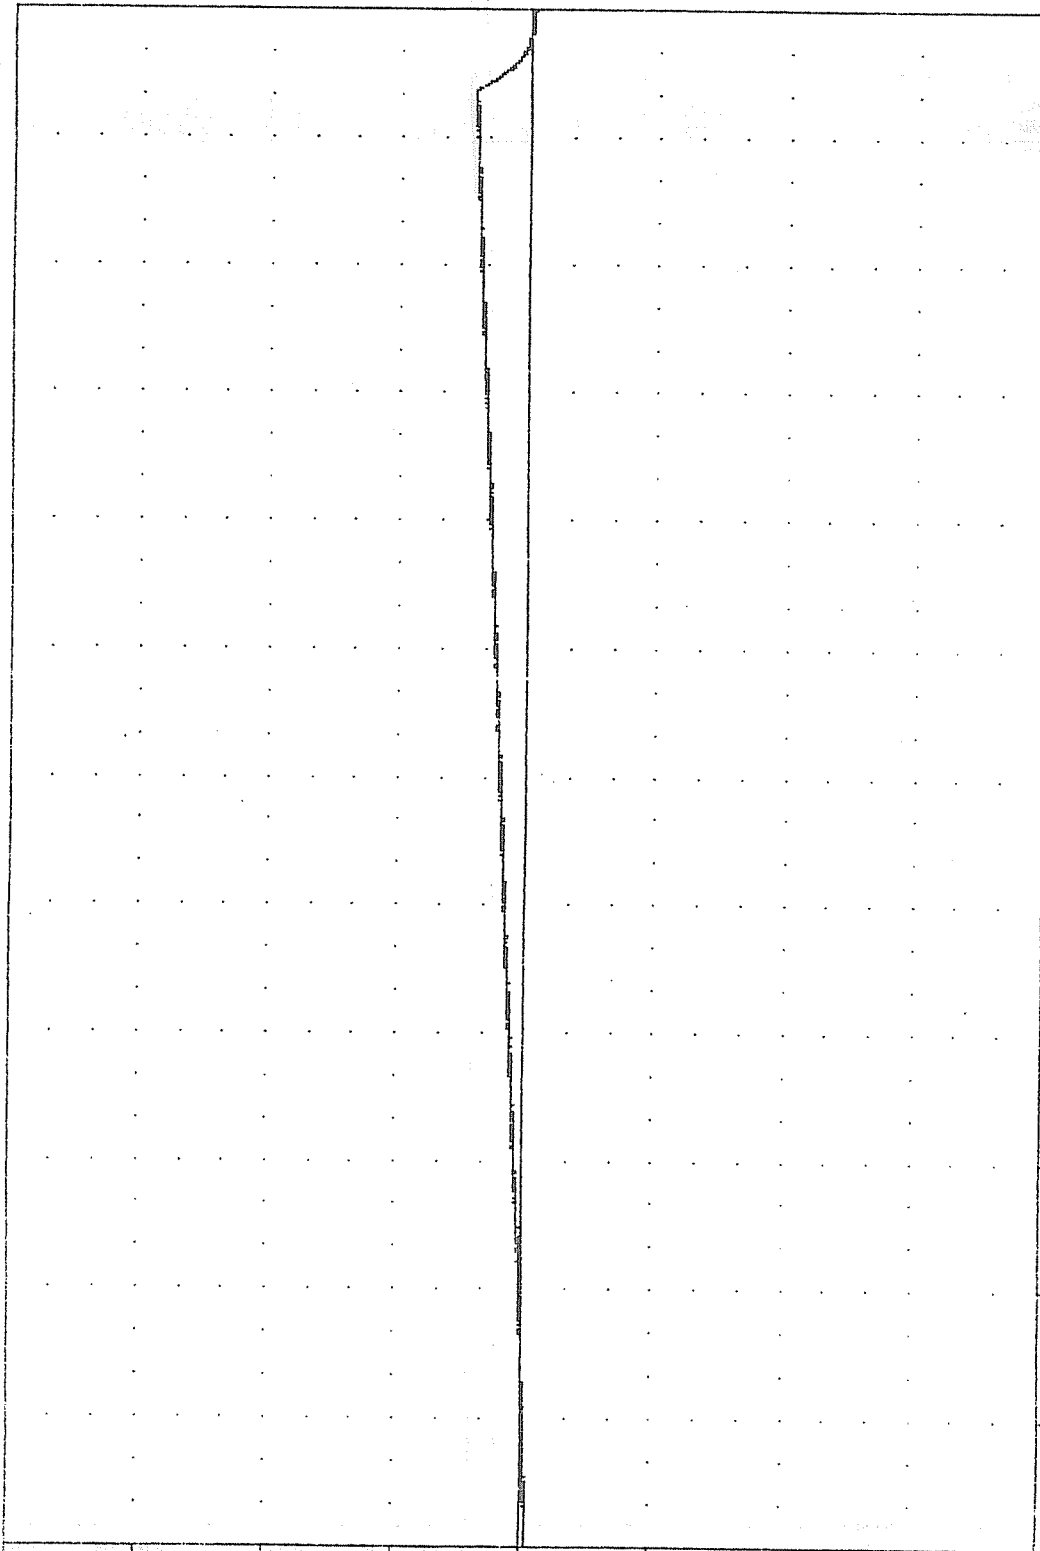


0.00 1.32 2.65 3.97 5.30 6.62 7.95 9.27 10.60 11.92 13.25 14.57 15.90

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 STABBOARD OUTBOARD REAR STRAIN

FAR TEST02
 VERTICAL PULL TESTS
 33071
 POSTED


FILTER = BLPF 100/ 315/ -40
 MIN, MAX VALUES = 0.00e 0.14, 0.29 e 15.03

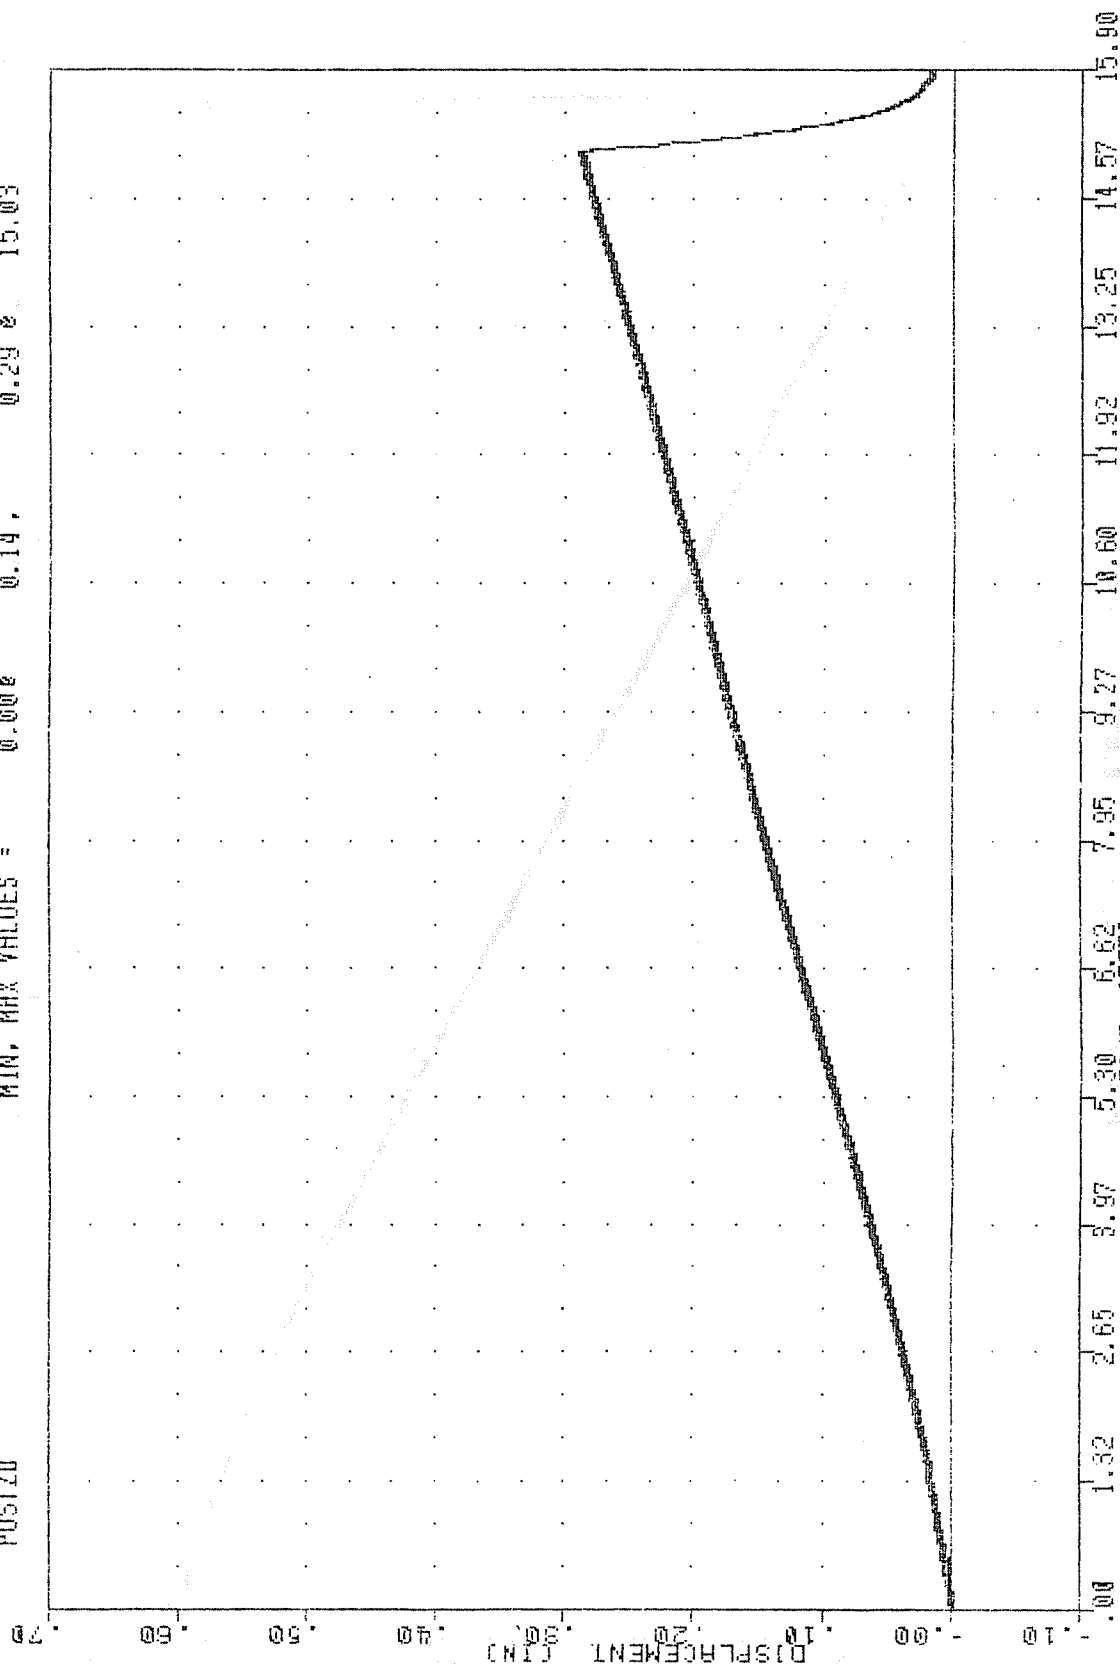

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 PORT OUTBOARD SEAT TRACK DEFLECTION


FOH , TEST02
 VERTICAL PULL TESTS
 88071
 P15120

FILTER = GLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.000 0.04, 0.57 0 15.03

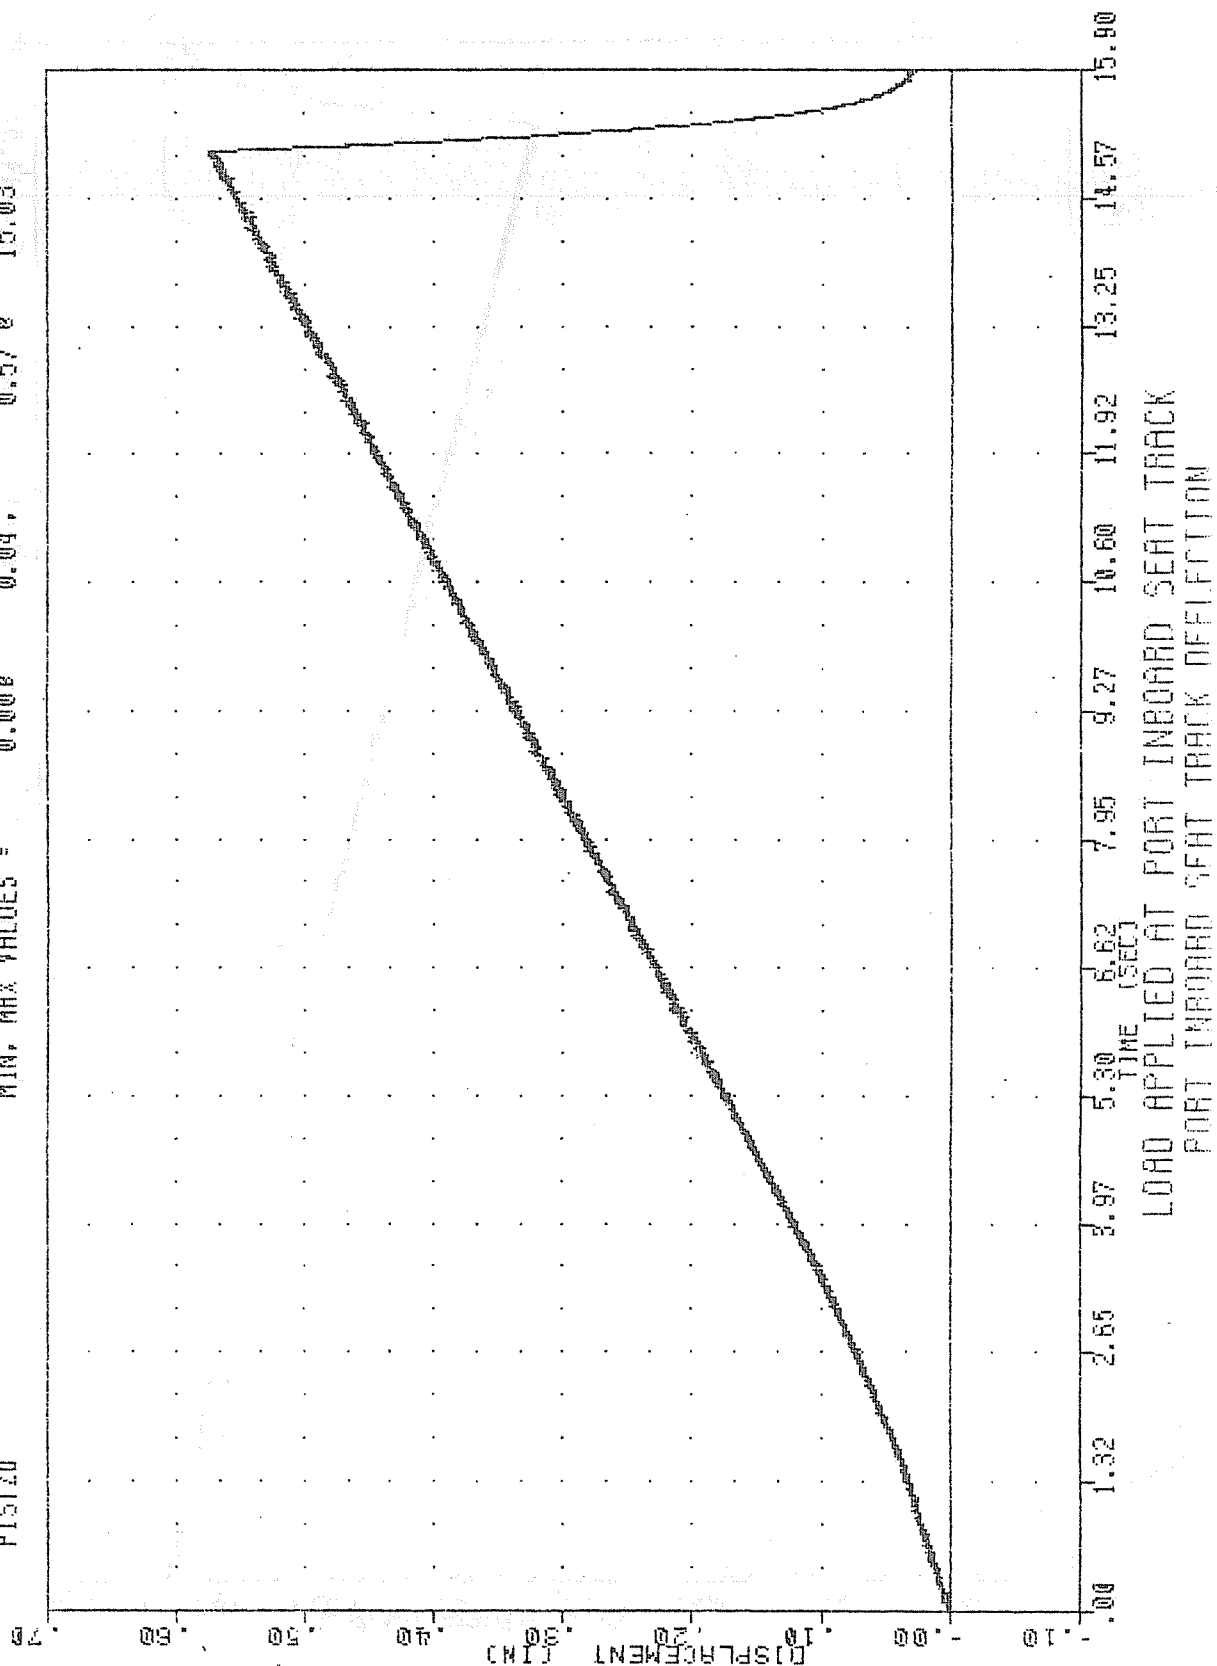

F0A , TEST02
 VERTICAL PULL TESTS
 88071
 91570

FILTER = BLPF 100/ 315/ -40
 MIN. MAX VALUES = 0.00e 0.29 e 15.01

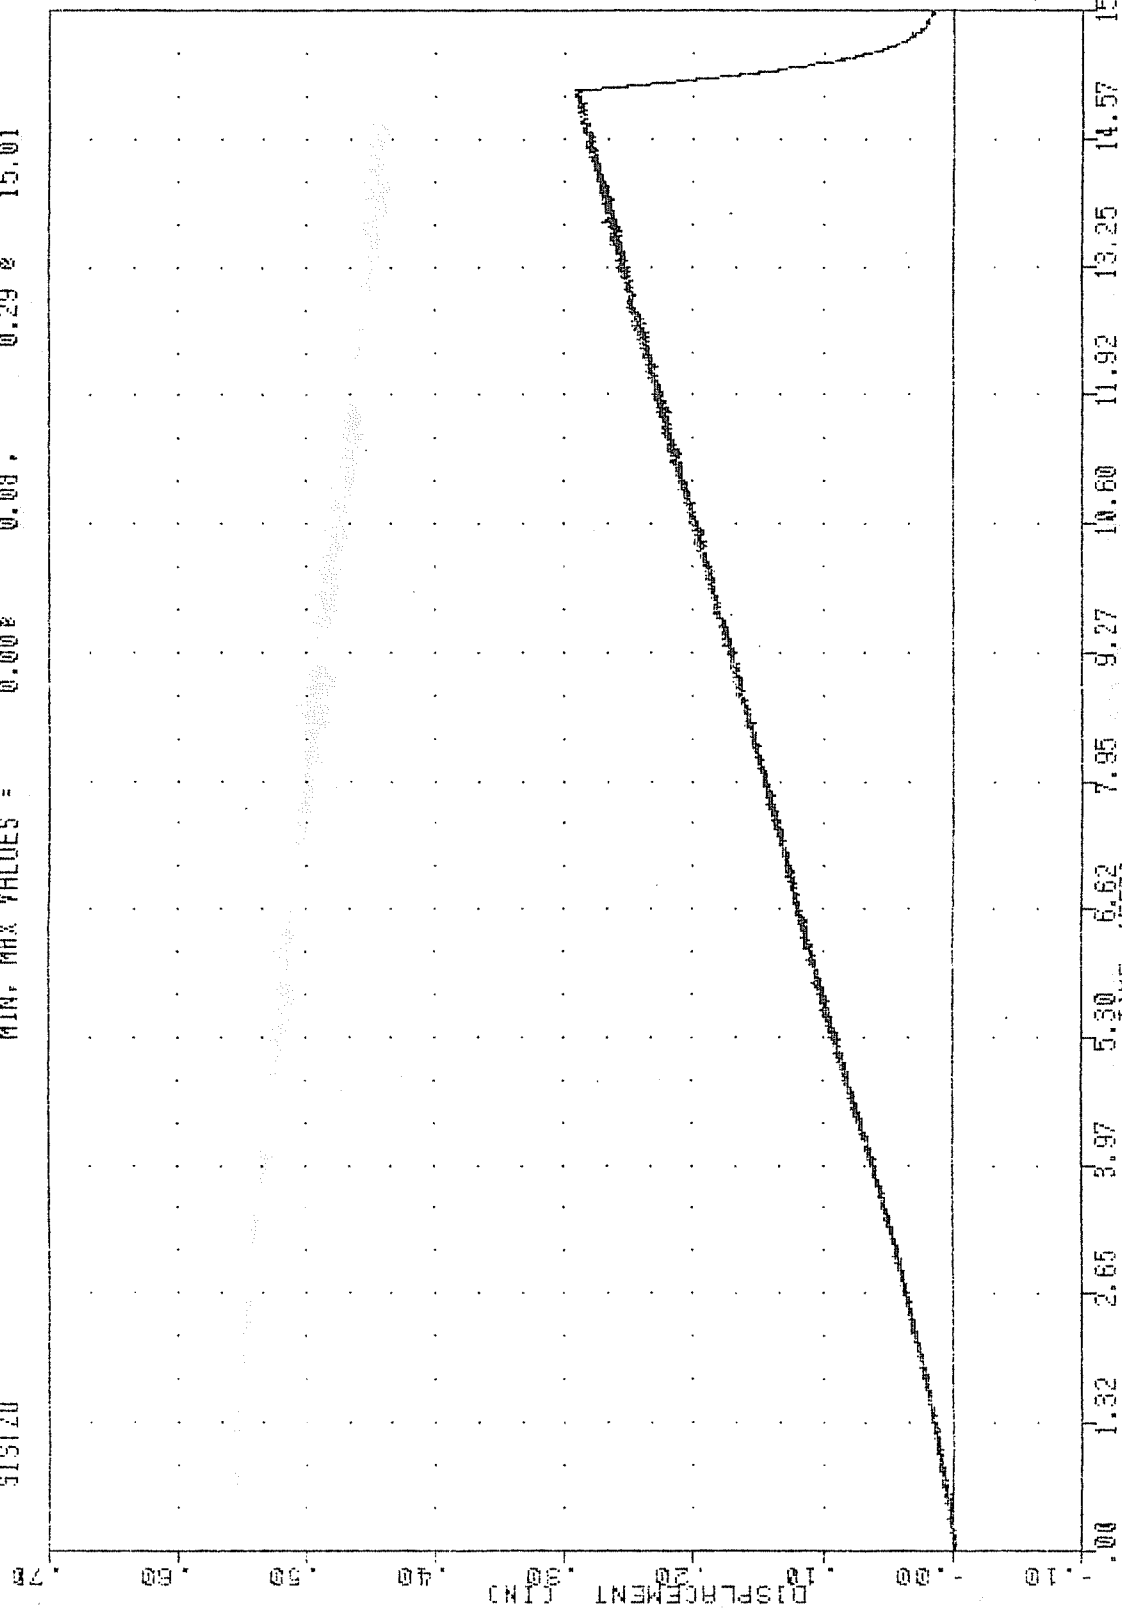


LOAD APPLIED AT PORT INBOARD SEAT TRACK
 STANDARD INBOARD SEAT TRACK DEFLECTION

FAR , TEST02
 VERTICAL PULL TESTS
 88071
 503120

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.03e 0.06, 0.19 e 14.99

70

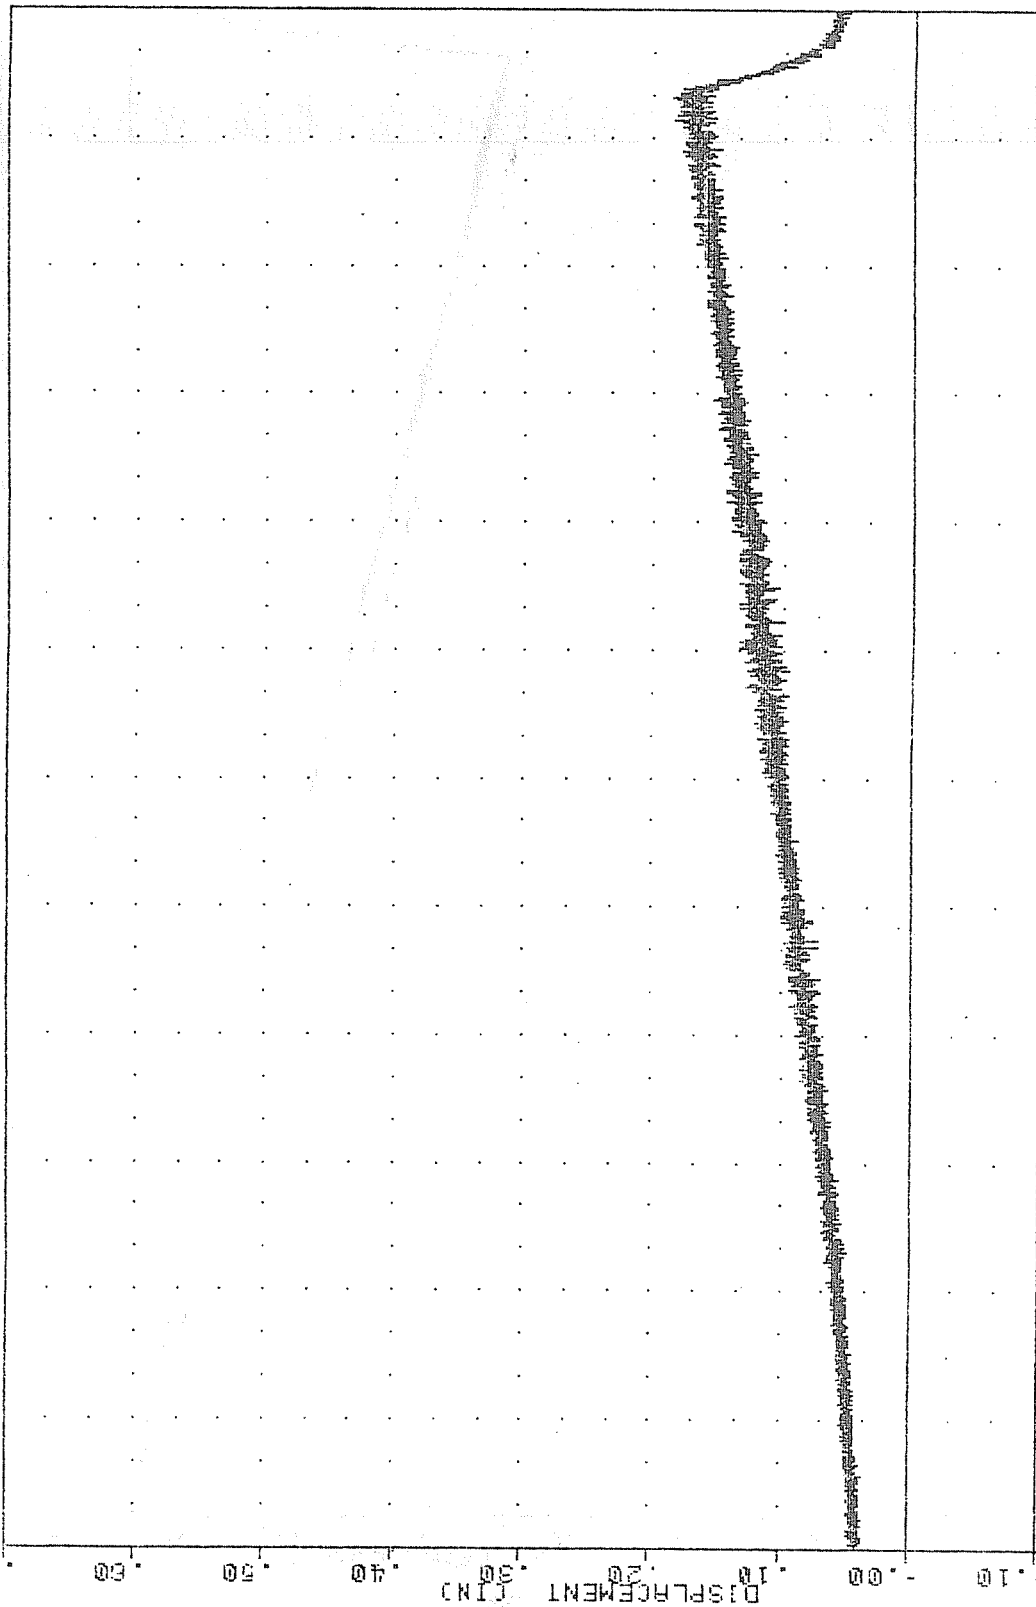

C-20

15.90

0.00

1.32

2.65

3.97

5.30

6.62

7.95

9.27

10.60


11.92

13.25

14.57


LOAD APPLIED AT PORT INBOARD SEAT TRACK
 STARBOARD OUTBOARD SEAT TRACK DEFLECTION

F88
 POSTED
 LOAD
 TEST02
 FILTER = BLPF
 FILTER = BLPF
 VERTICAL FULL TESTS
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX =
 MIN. MAX =
 88071
 0.00 0
 -37.44 0
 0.14,
 0.04,
 0.29 0
 4495.84 0
 15.83
 15.85

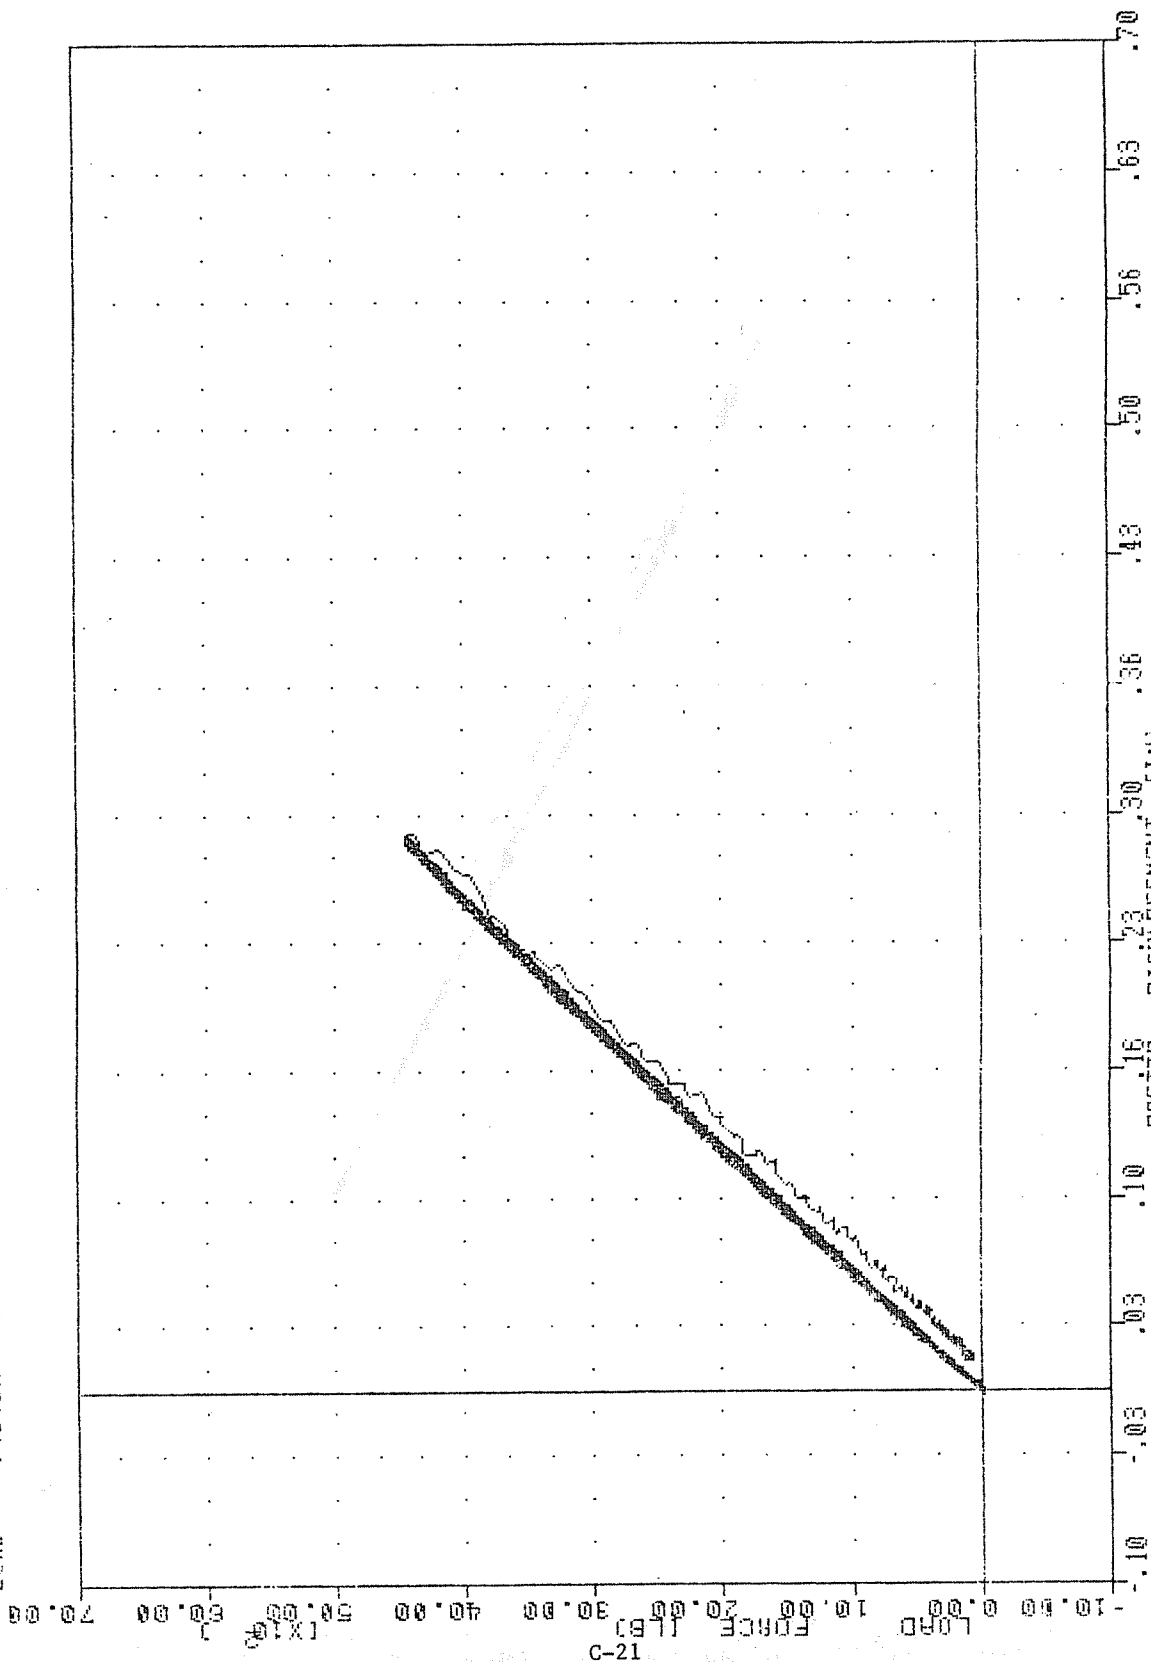


LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD SEAT TRACK DEFLECTION

F03
 F15120
 LOAD
 TEST02
 FILTER = SLPF
 FILTER = SLPF
 VERTICAL FULL TESTS
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX =
 MIN. MAX =
 0.04
 0.04
 0.572
 4415.622
 15.03
 15.05

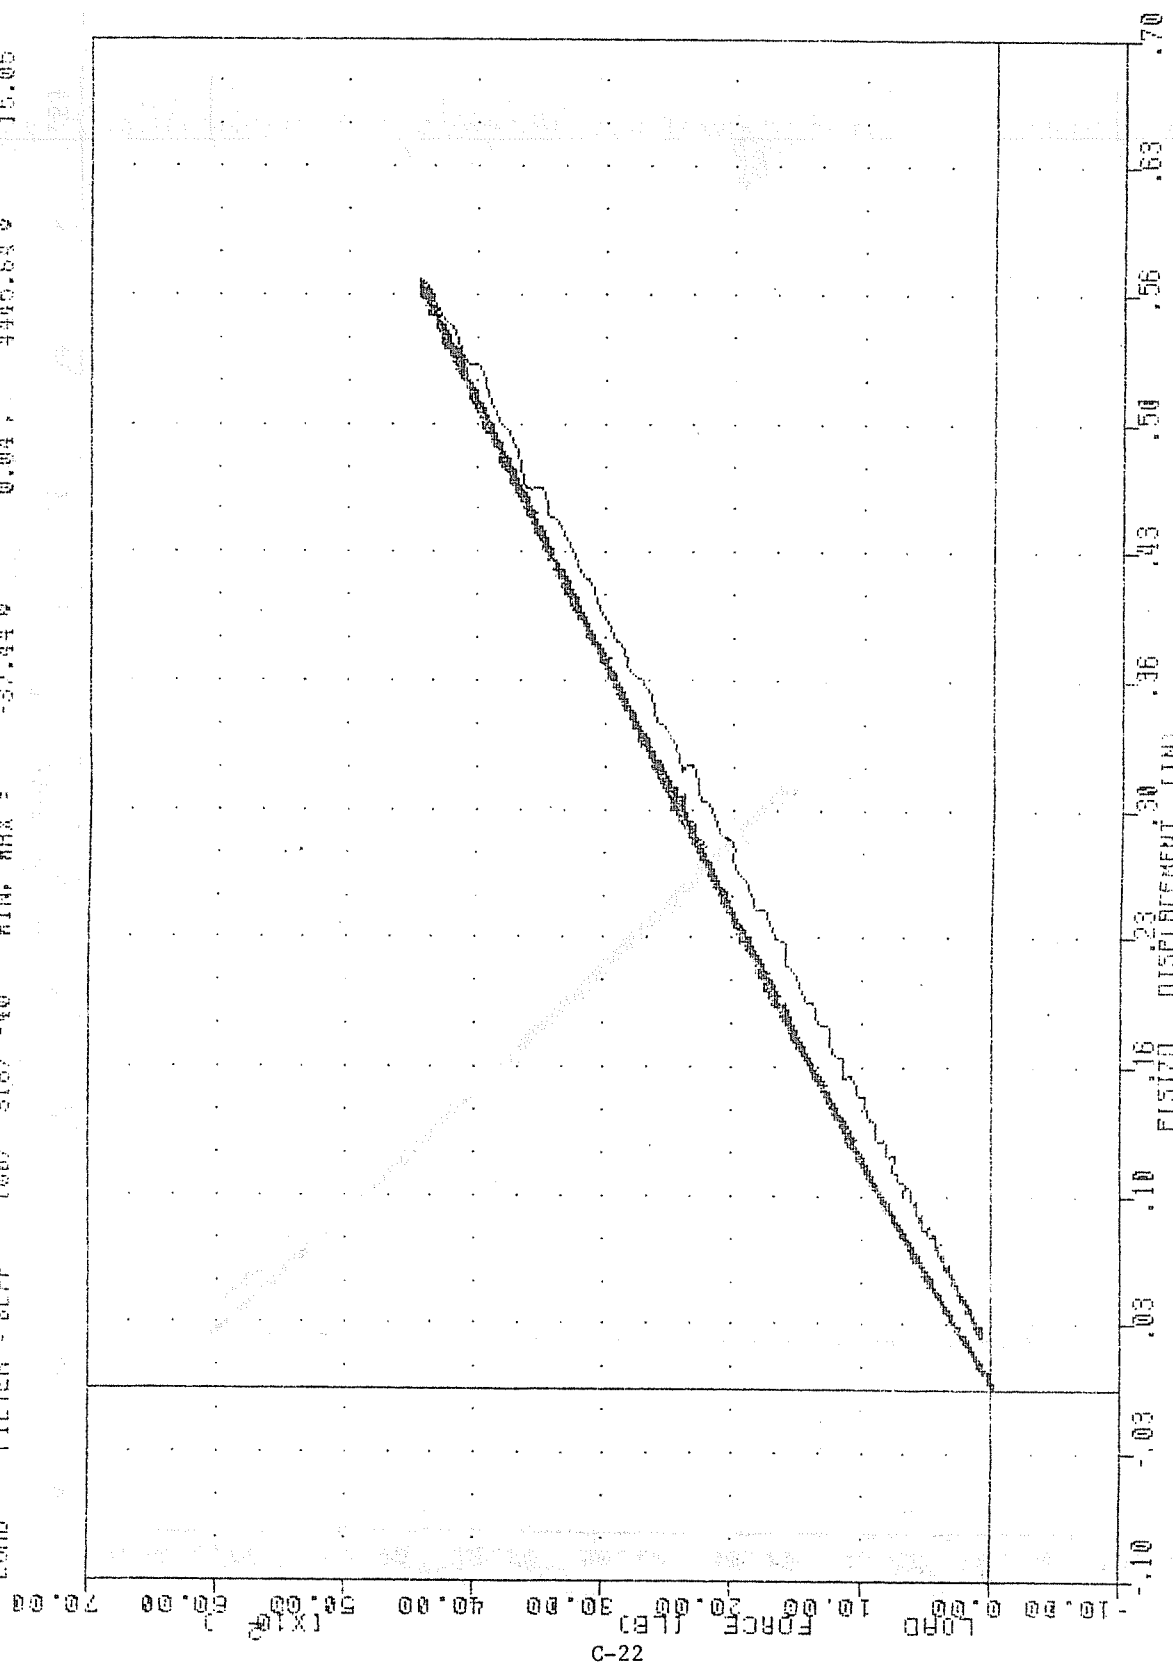


LOAD APPLIED TO SEAT TRACK VS PORT INBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT INBOARD SEAT TRACK

FAR TEST02 VERTICAL PULL TESTS 00071 0.00 0.24 15.01
 S1S1ZD FILTER : BLPF 100/ 316/ -40 MIN, MAX : 0.00 0 4445.64 15.05
 LOAD FILTER : BLPF 100/ 316/ -40 MIN, MAX : -37.44 0

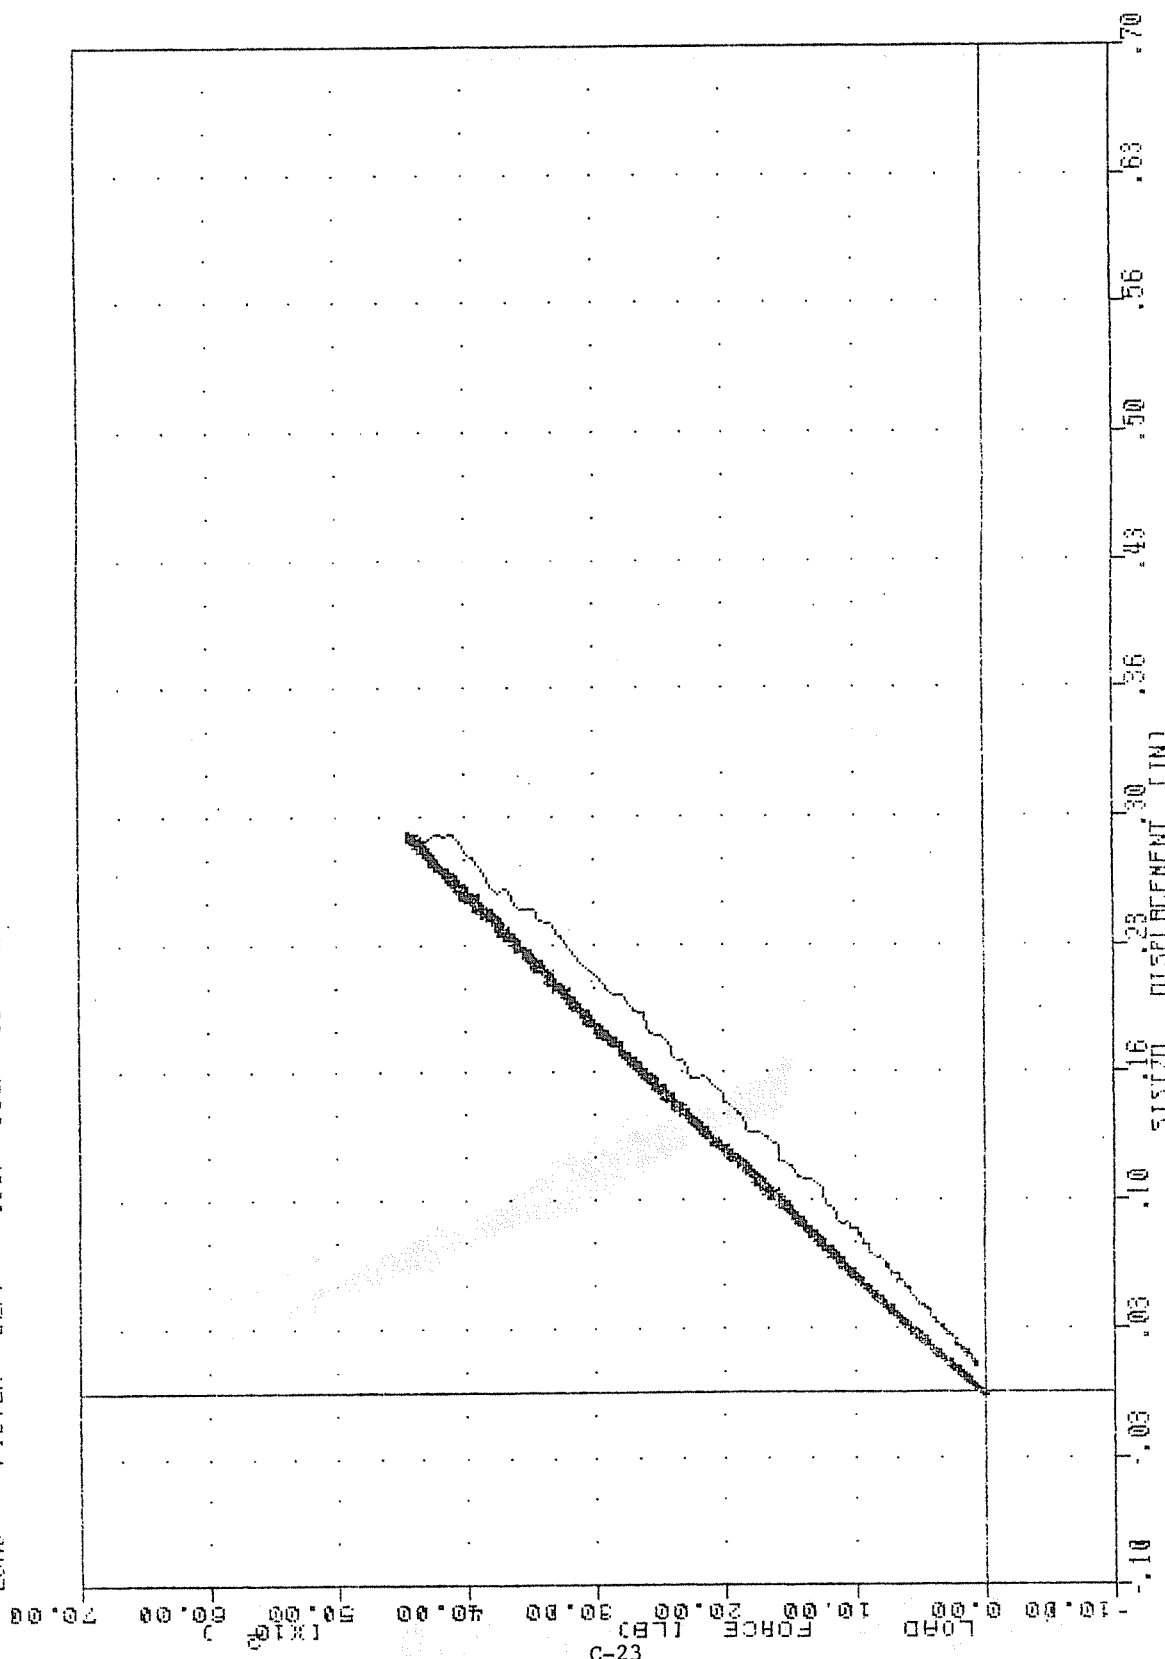


LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT INBOARD SEAT TRACK

F003
 LOAD
 TEST02
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN, MAX =
 MIN, MAX =
 0.11
 0.04
 2.59
 4445.64
 15.05
 15.05

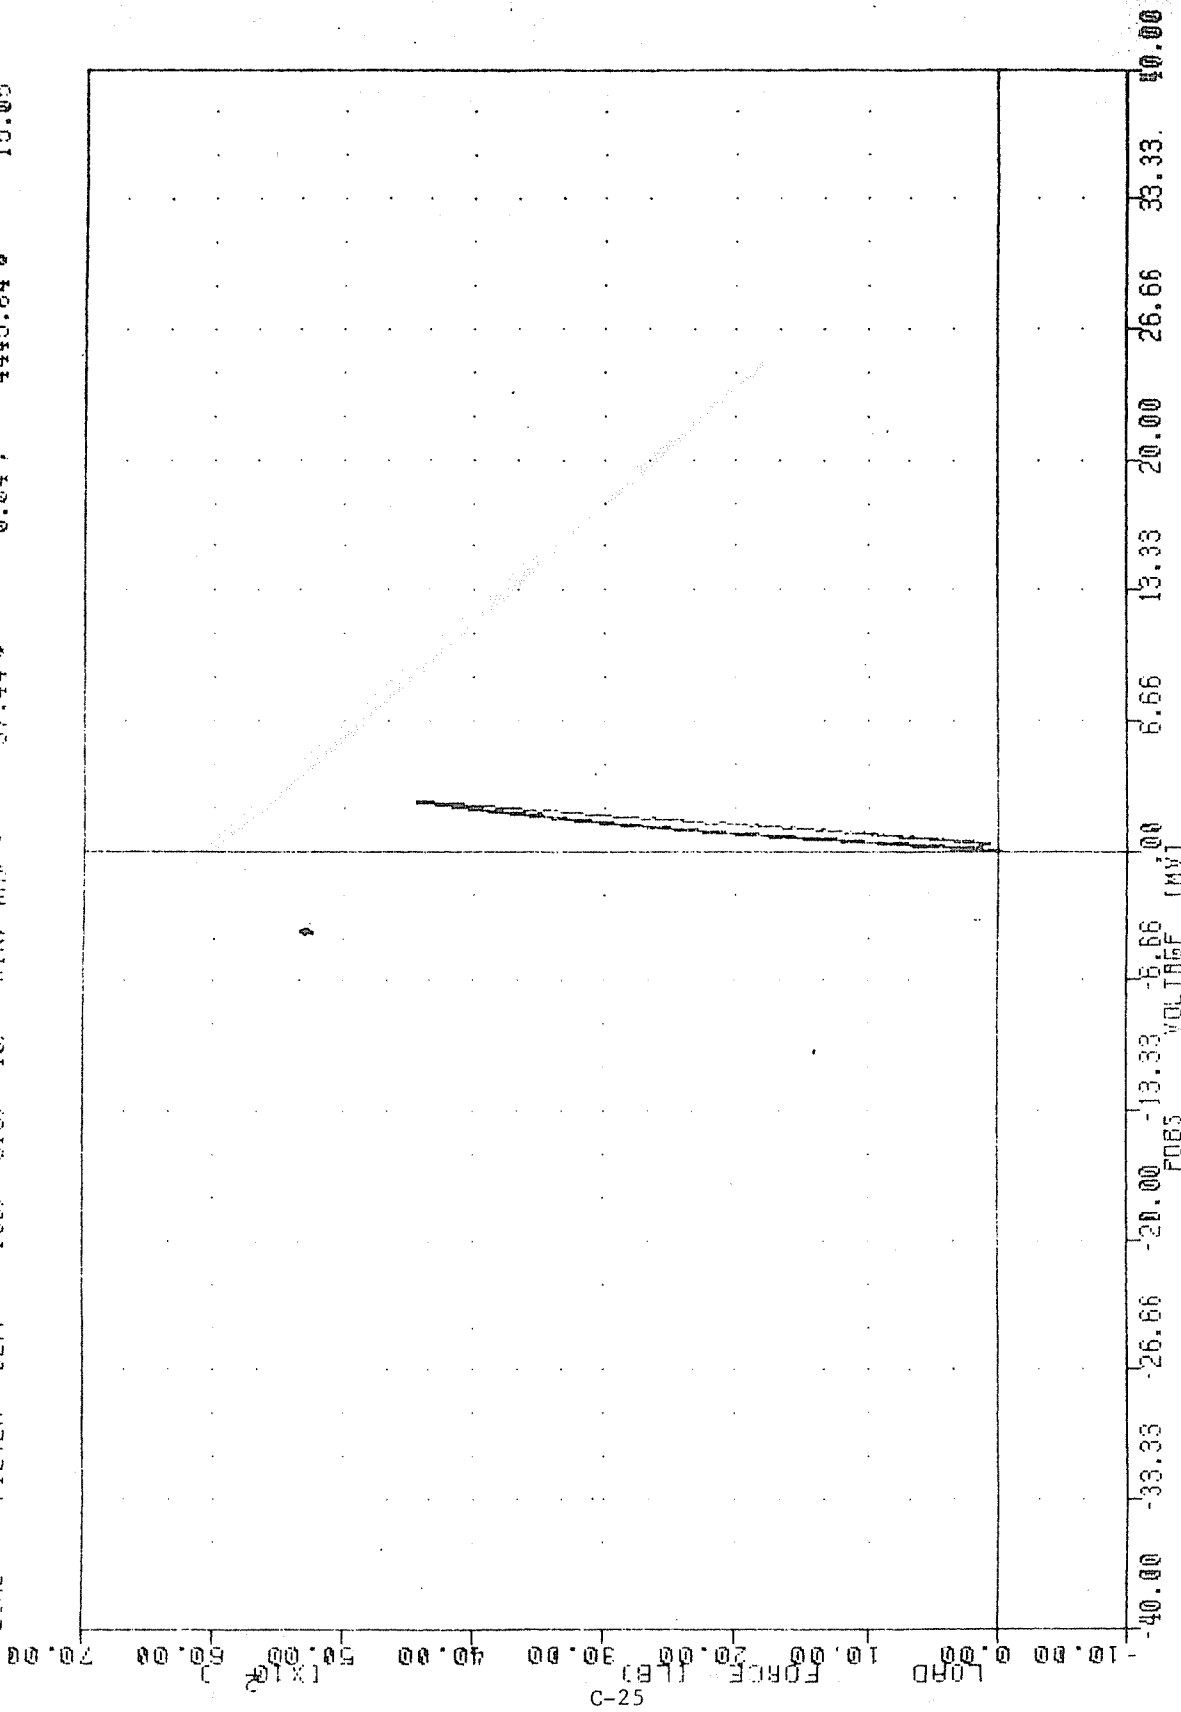

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD BEAM STRAIN

FRS
 P185
 LOAD
 TEST02
 FILTER : BLPF
 FILTER : BLPF
 VERTICAL FULL TESTS
 100/ 316/ -40 MIN. MAX :
 100/ 316/ -40 MIN. MAX :
 88071
 0.27
 -37.44
 0.02
 0.04
 26.60
 4445.64
 15.05
 15.05

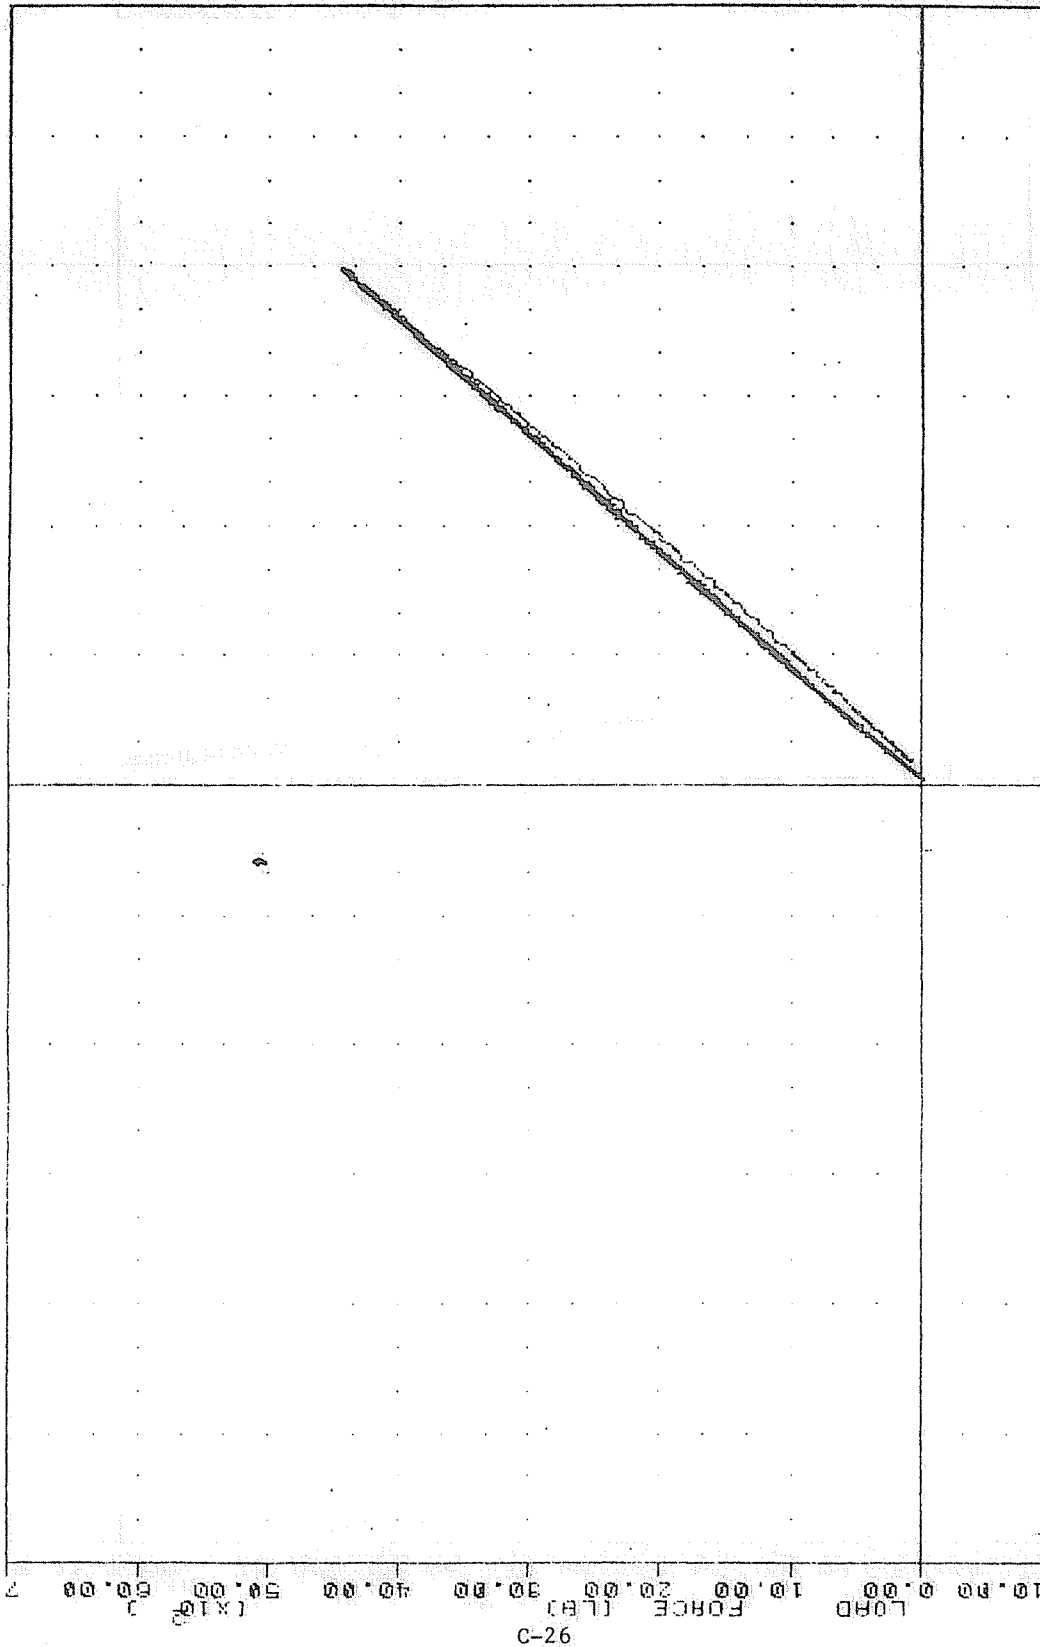


-40.00 -33.33 -26.66 -20.00 -13.33 -6.66 0.00 6.66 13.33 20.00 26.66 33.33 40.00
 P185 VOLTAGE (MV)
 LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT INBOARD BEAM STRAIN

FRR TEST02 VERTICAL PULL TESTS 00071
 SIBS FILTER = BLPF 100/ 316/ -40 MIN. MAX = -0.228
 LOAD FILTER = BLPF 100/ 316/ -40 MIN. MAX = -37.44 0

0.31 8
 4445.64 0

15.07
 15.05

-10.00
 0.00
 10.00
 20.00
 30.00
 40.00
 50.00
 60.00
 70.00

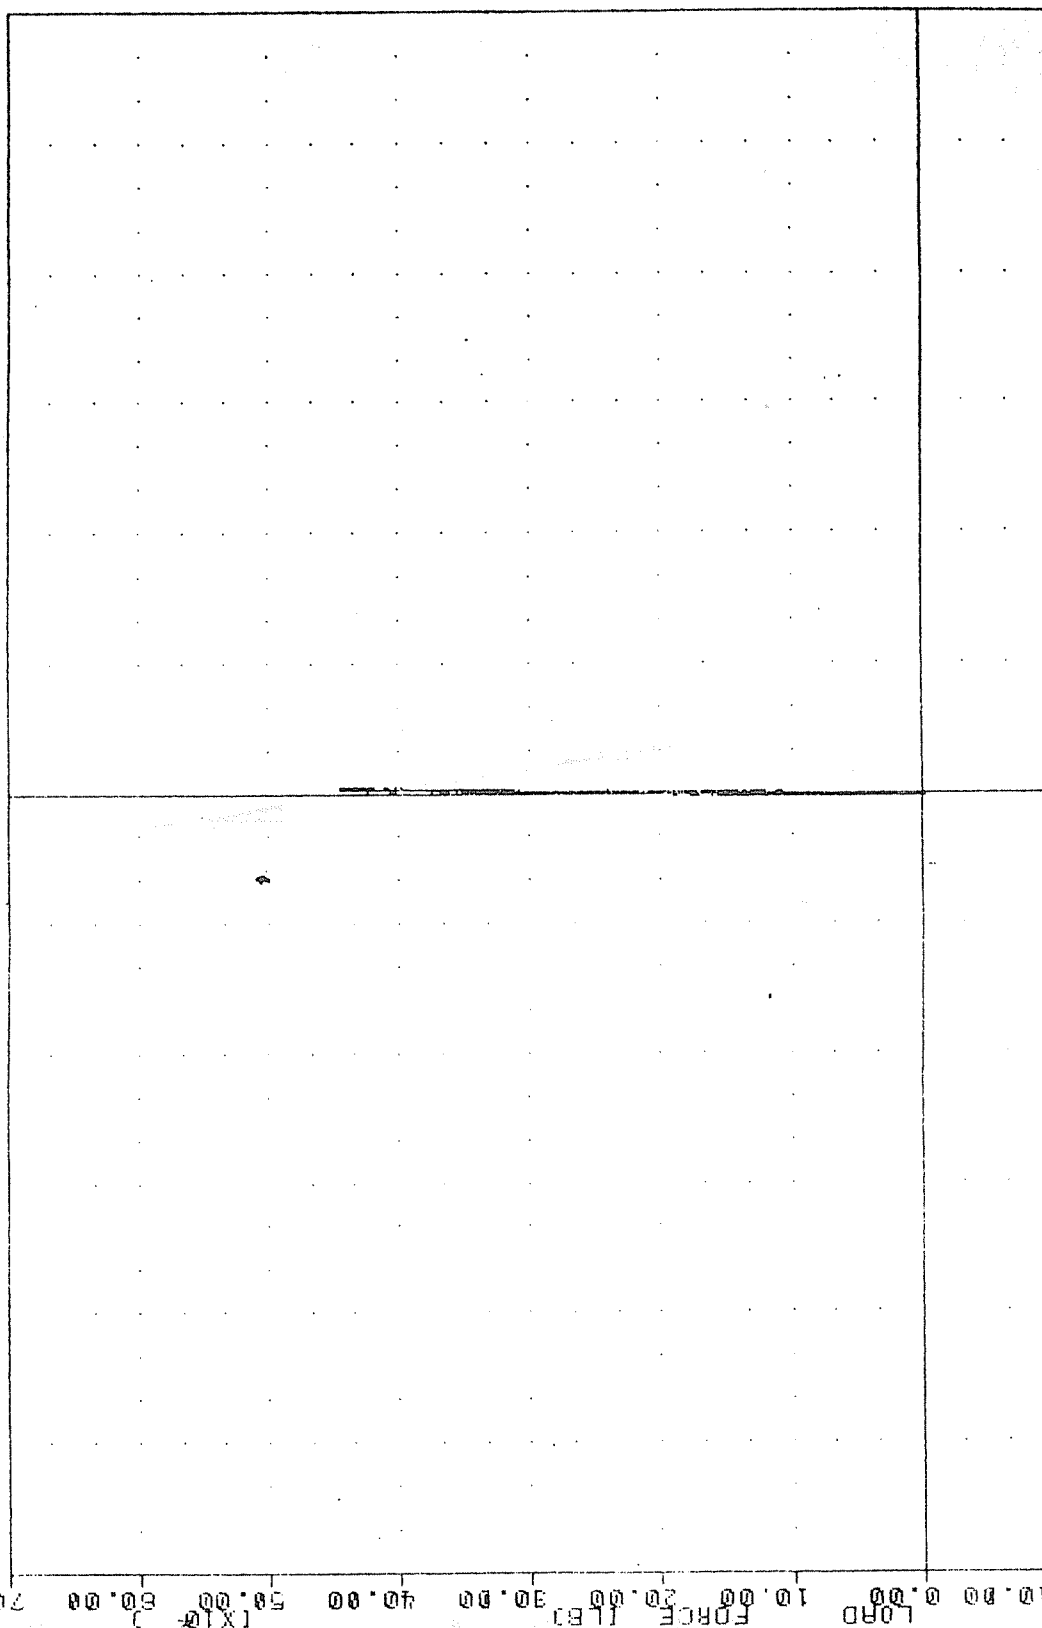


-40.00 -33.33 -26.66 -20.00 -13.33 -6.66 0.00 6.66 13.33 20.00 26.66 33.33 40.00

VOLTAGE (mV)

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD BEAM STRAIN


FRS
 S085
 LOAD
 TEST02
 FILTER = BLPF
 FILTER = BLPF
 VERTICAL FULL TESTS
 100/ 316/ -40
 100/ 316/ -40
 88071
 MIN, MAX =
 MIN, MAX =
 0.04,
 0.04,
 4.33
 445.64
 15.02
 15.05

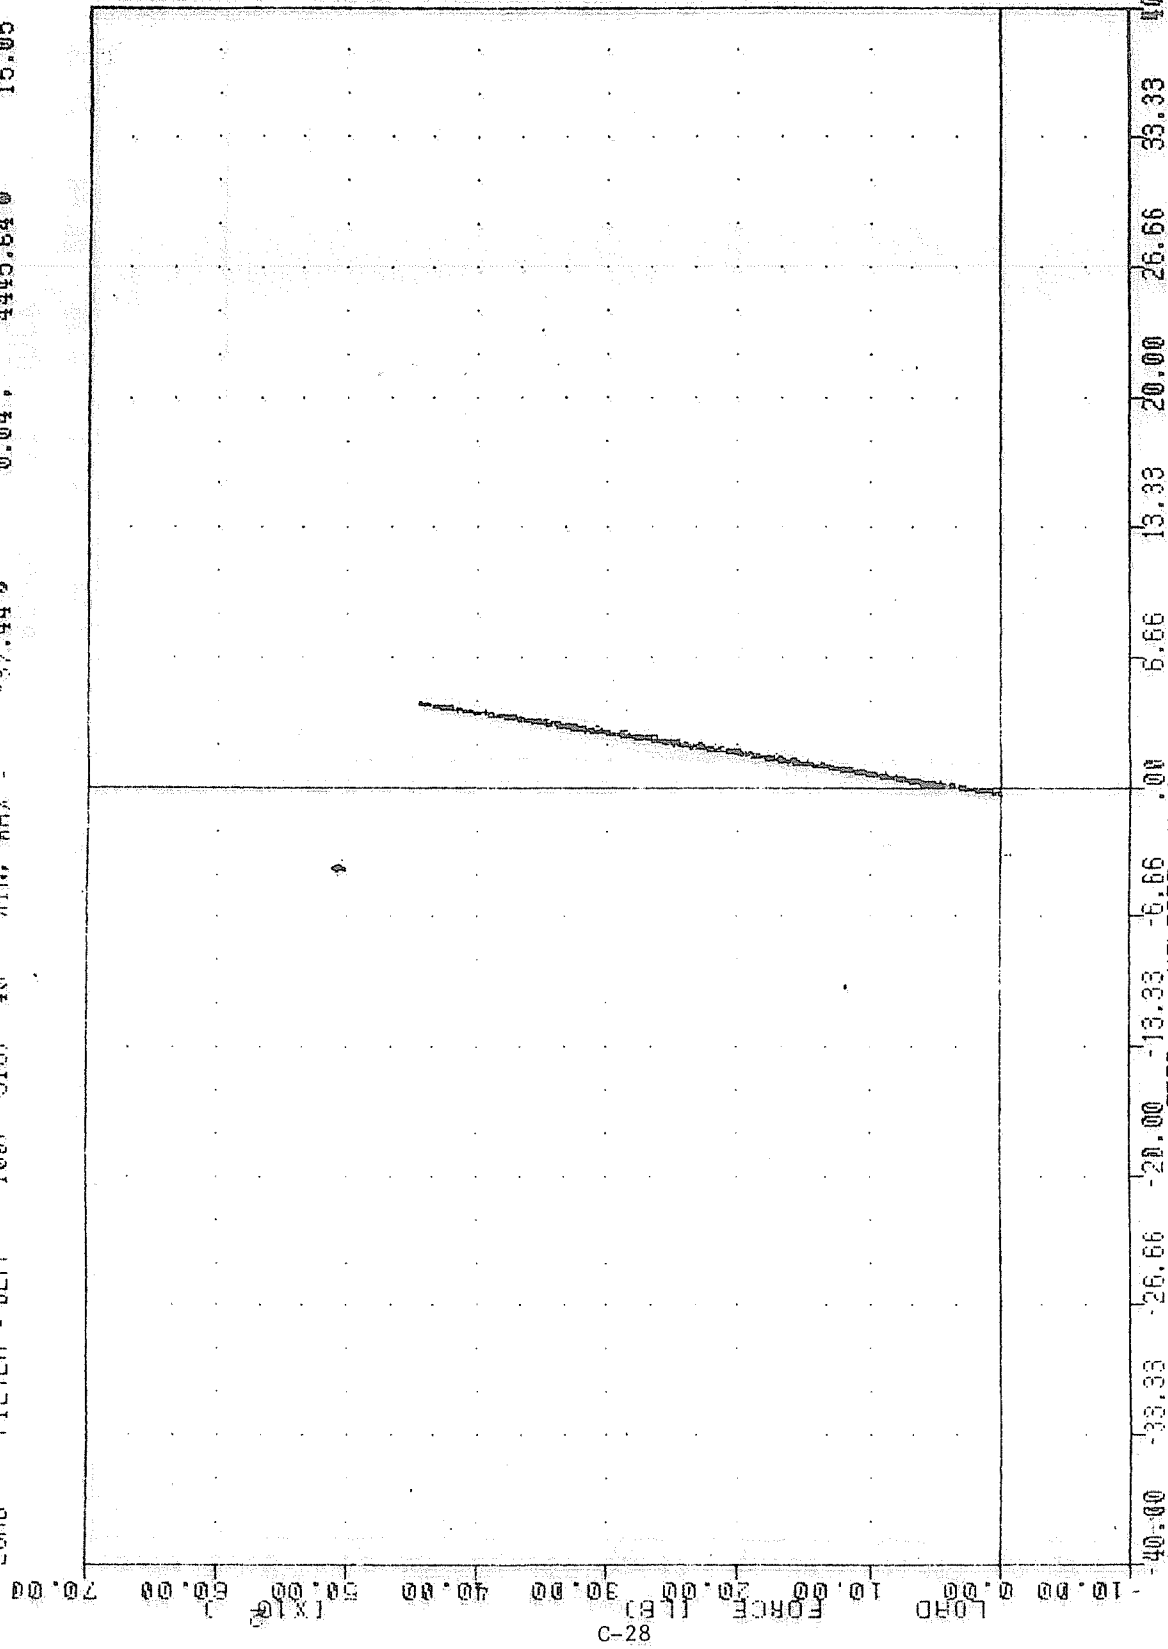

LOAD APPLIED AT PORT INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD BEAM STRAIN


FAR , TEST03
 VERTICAL PULL TESTS
 88071
 LOAD

FILTER = 6LPI 100/ 316/ -40
 MIN, MAX VALUES = 80.35 15.86 , 4480.61 15.05

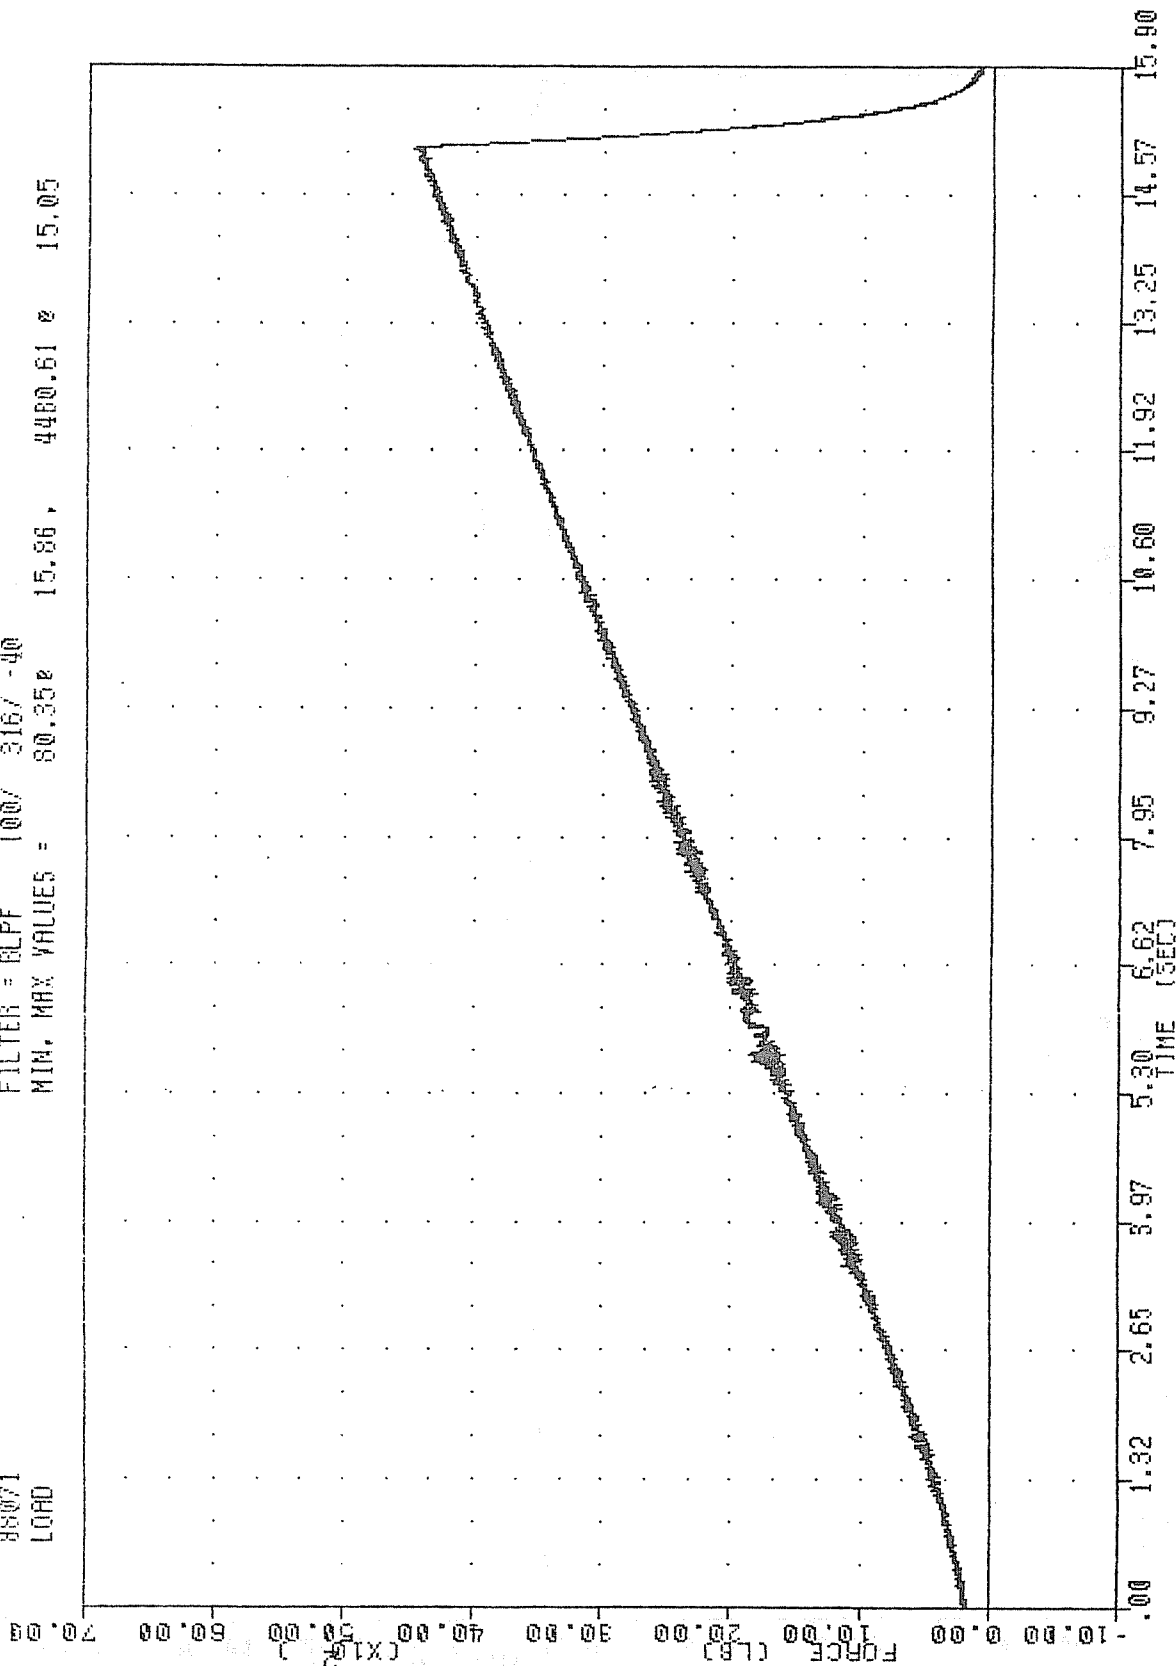

FAH , TEST03
 VERTICAL PULL TESTS
 88071
 P085

FILTER = ELPF 100/ 315/ -40
 MIN, MAX VALUES = -6.50% 15.06, -0.26 15.90

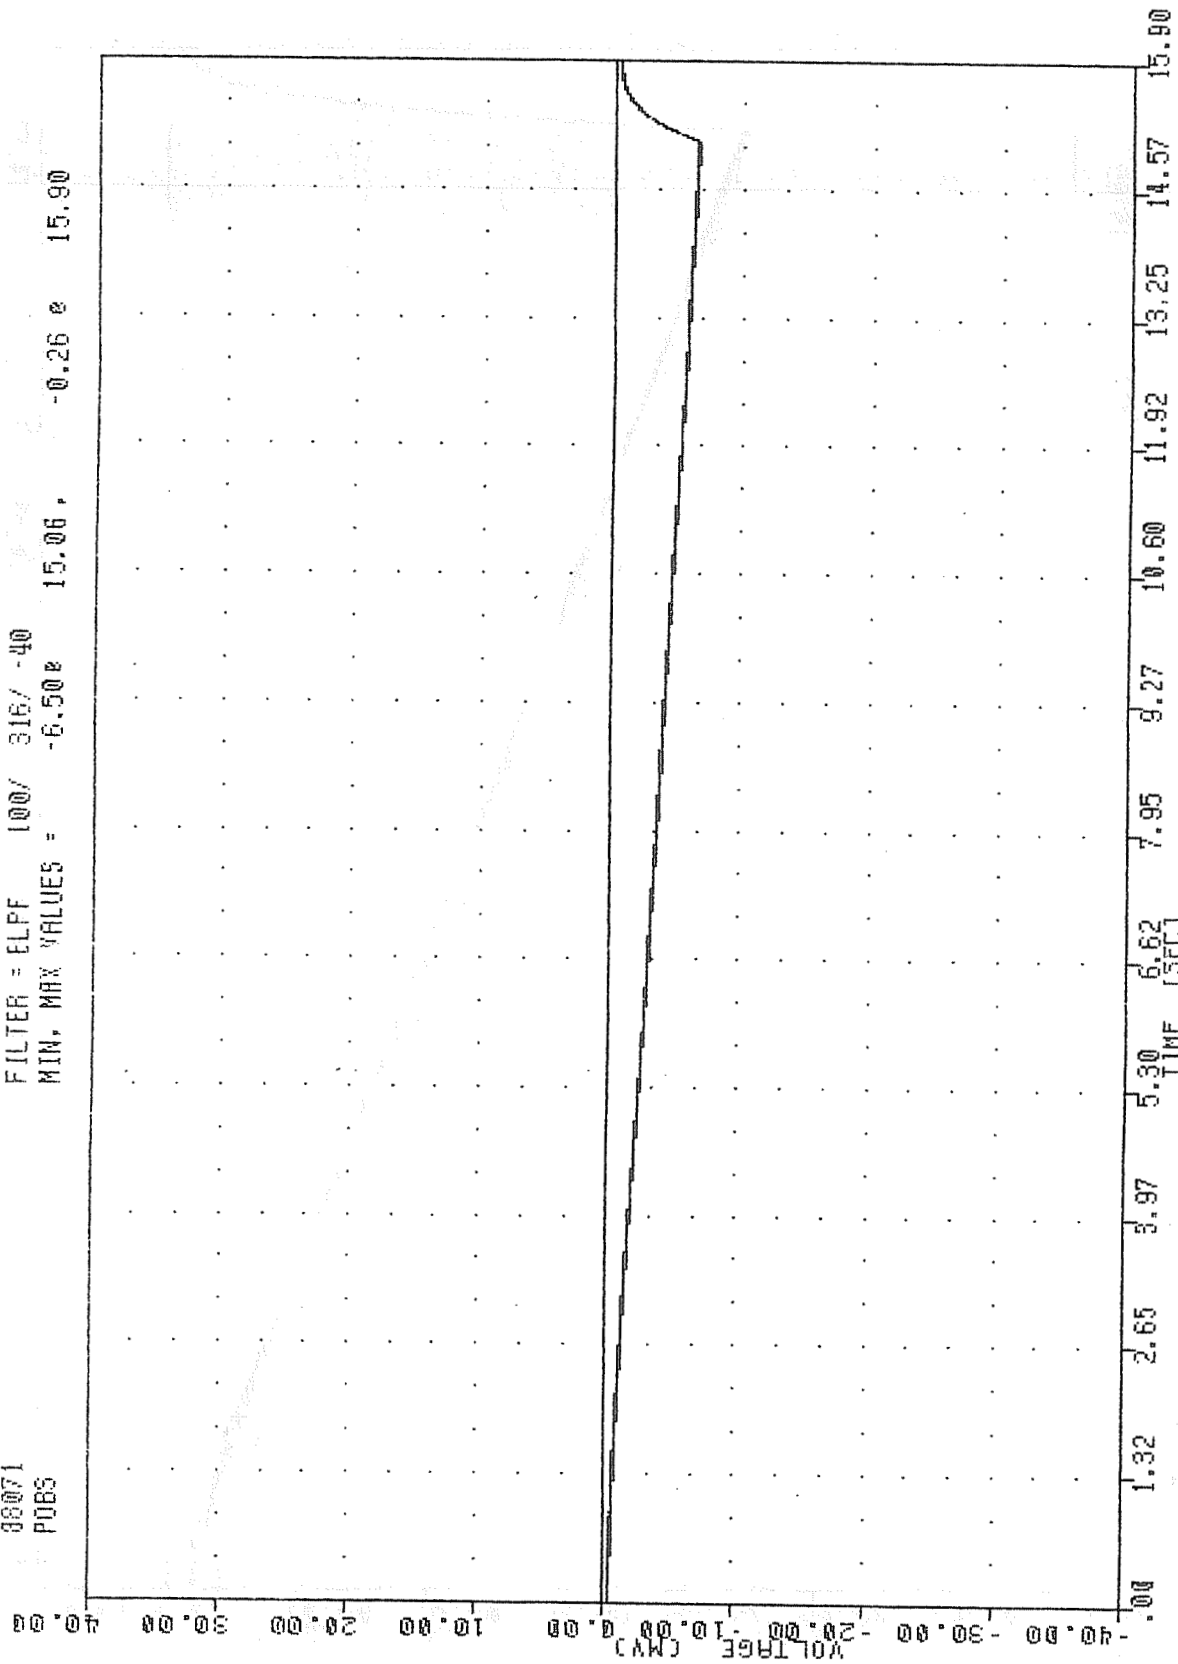


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 PORT OUTBOARD AFAM STRAIN

FHA , TEST03
VERTICAL PULL TESTS

88071
PIES

FILTER = BLFF 100/ 316/ -40
MIN. MAX VALUES = -0.16 1.40 , 0.95 14.42

VOLTAGE (MV) 40.00 30.00 20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00

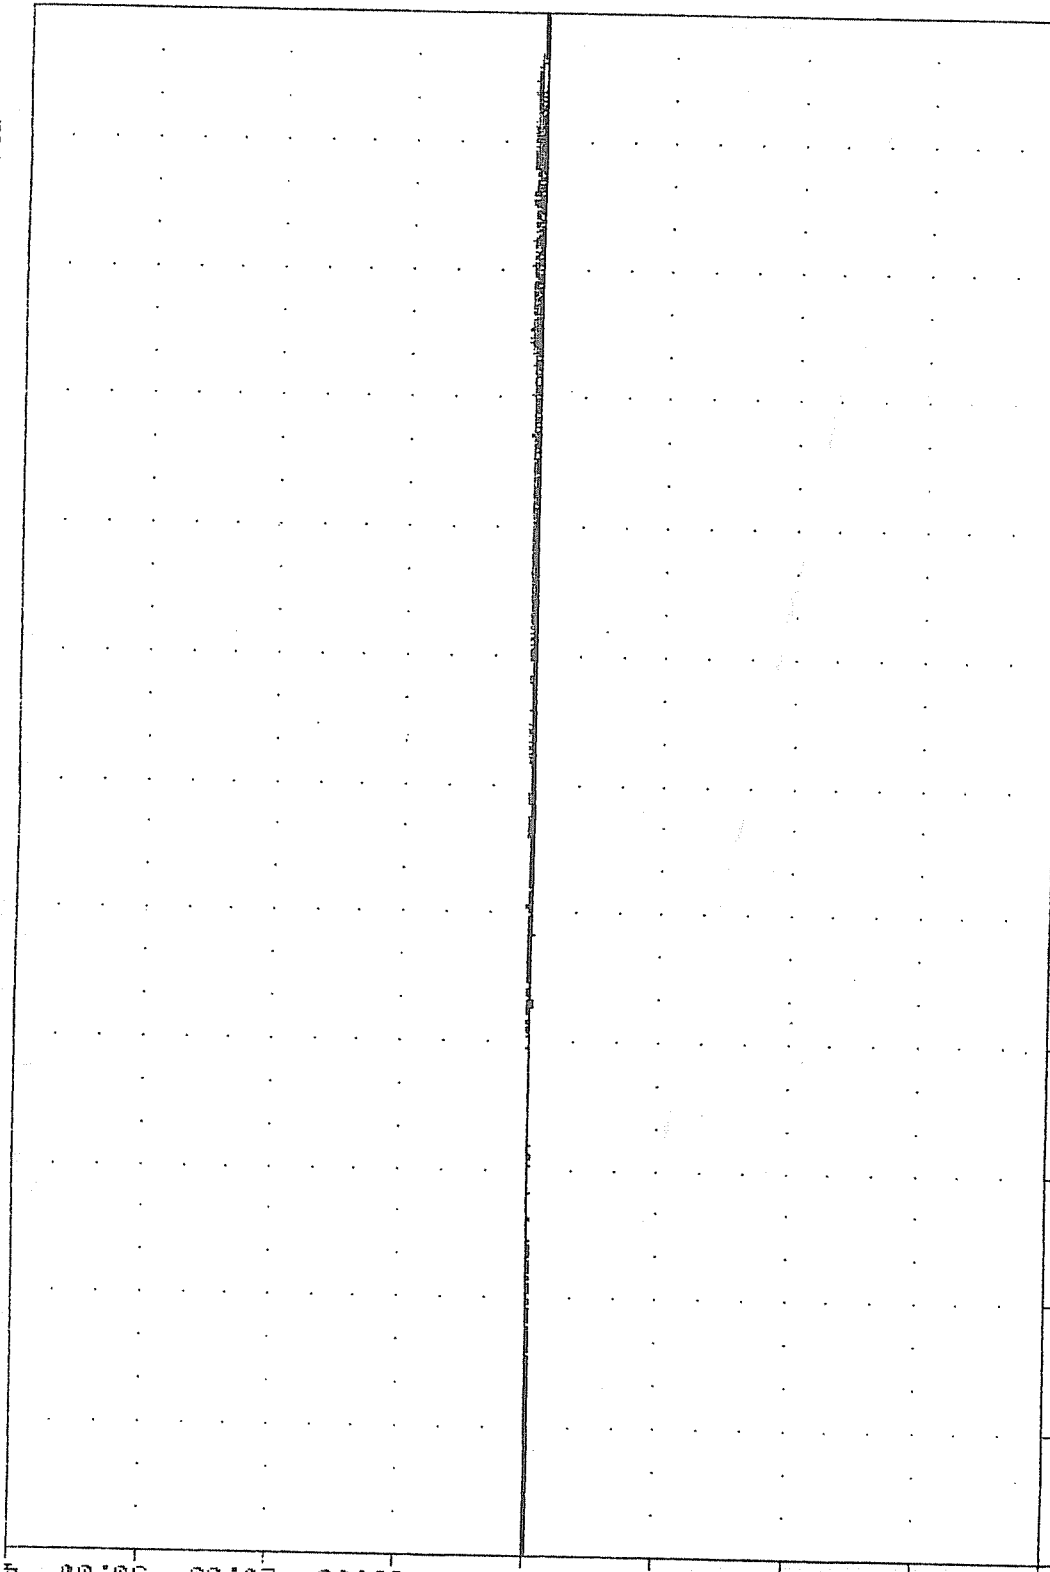


0.00

1.32 2.65 3.97 5.30 6.62 7.95 9.27 10.60 11.92 13.25 14.57 15.90

LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
PORT INBOARD BEAM STRAIN

FAH , TEST03
 VERTICAL FULL TESTS
 83071
 SIDS

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.698 15.89 , 25.71 @ 15.05

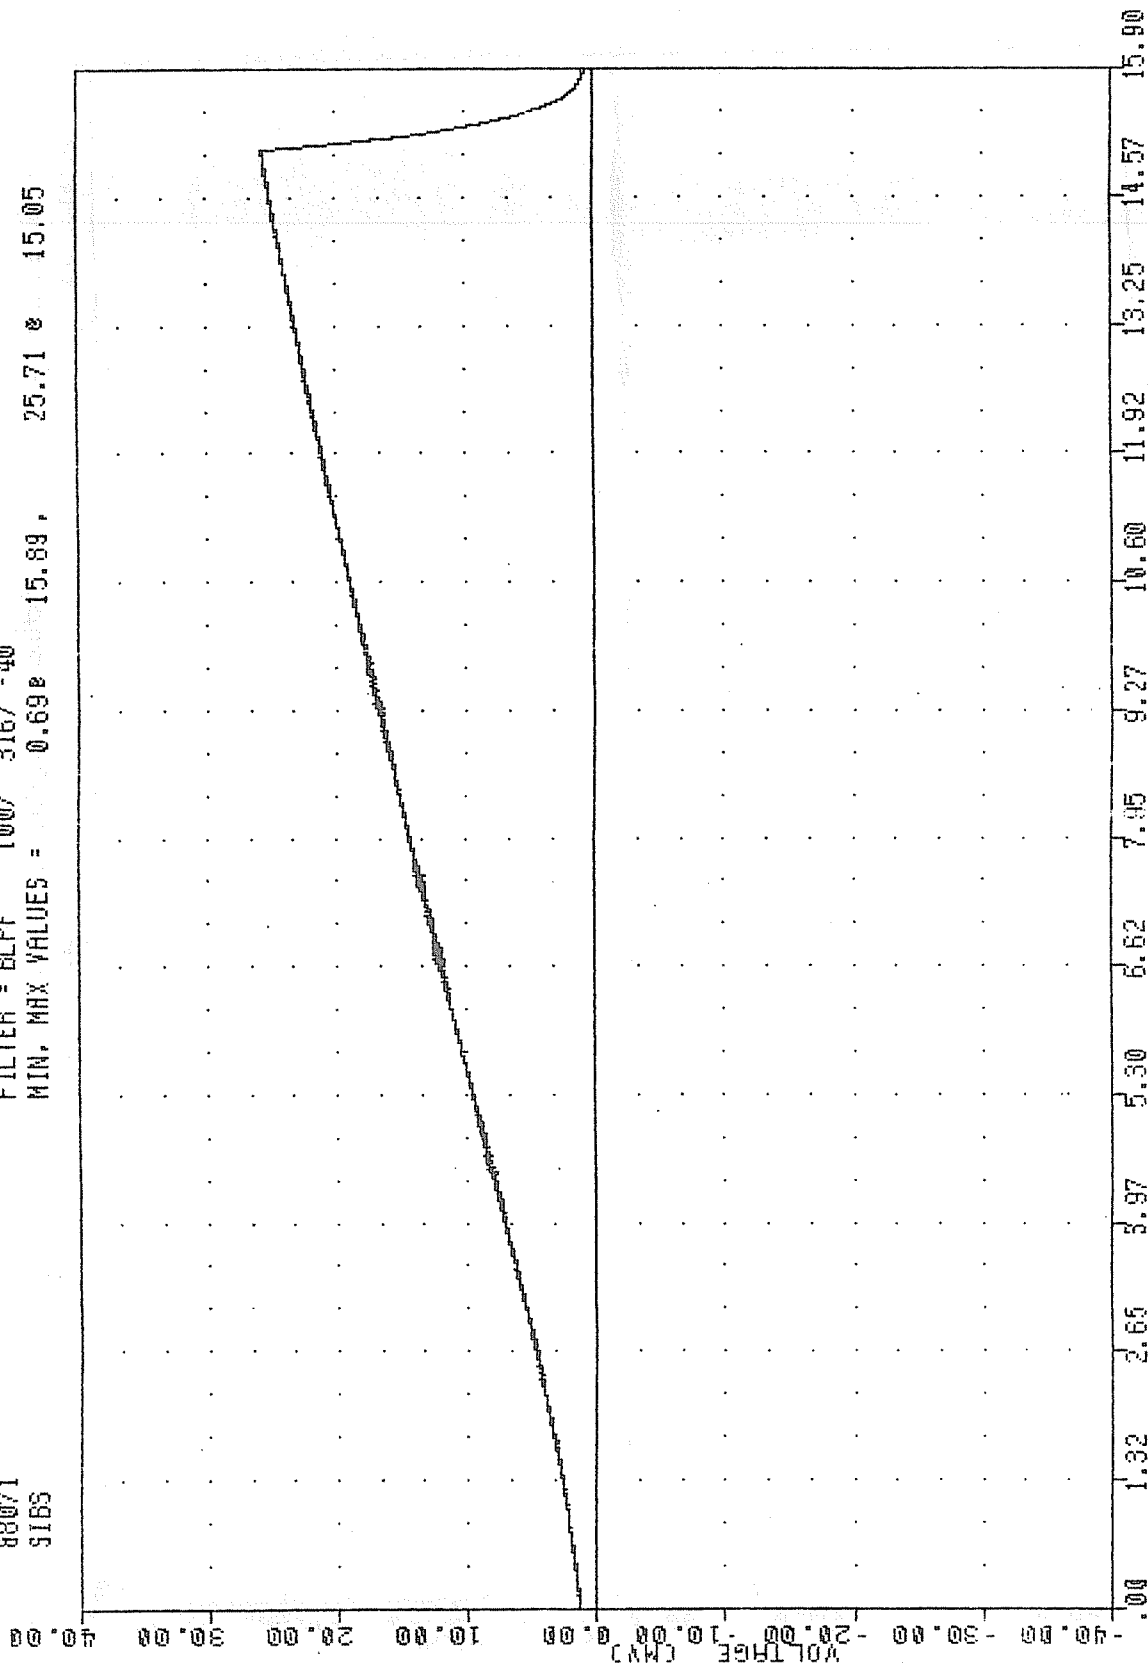


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 STARBOARD INBOARD BEAM STRAIN

FRA , TEST03
 VERTICAL PULL TESTS
 88071
 30BS

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -3.80e 15.00 , -0.52 e 0.06


VOLTAGE (MV) 40.00 30.00 20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00

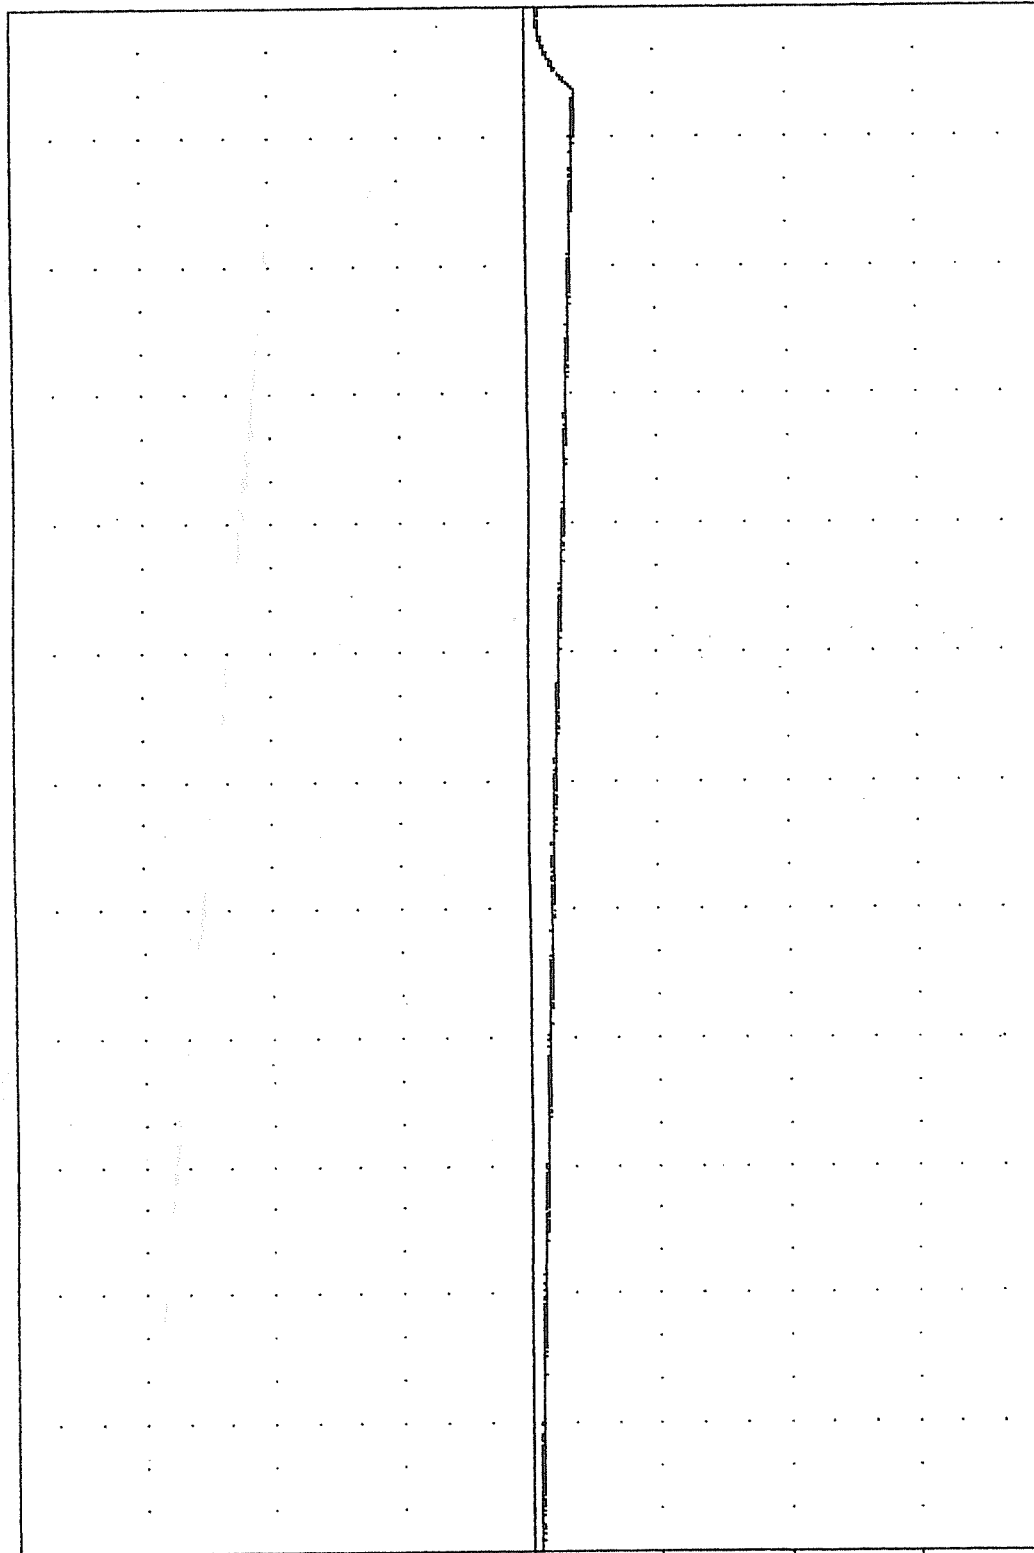

LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 STARBOARD OUTBOARD BEAM STRAIN

FAR , TEST03
 VERTICAL PULL TEST5
 80071
 POST20


FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.00E 0.12, 0.11E 15.05

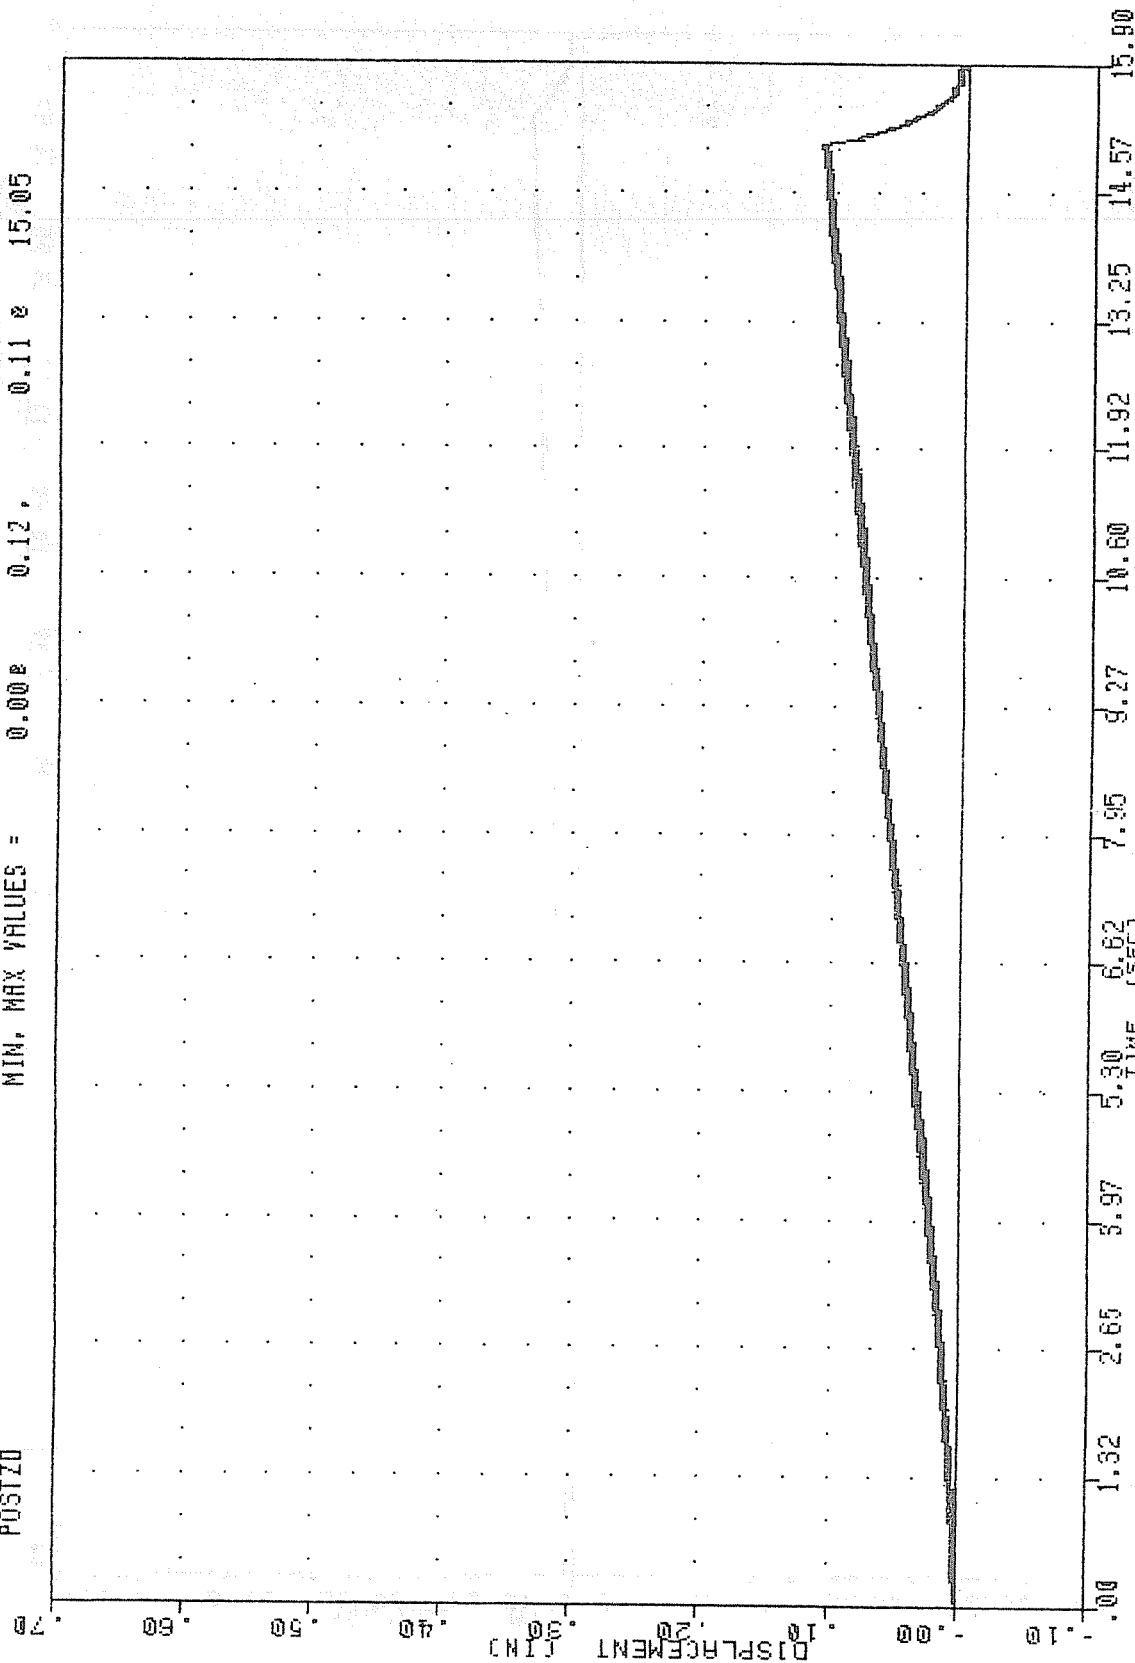

LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 PORT OUTBOARD SEAT TRACK DEFLECTION

FAR TEST03
 VERTICAL PULL TESTS
 88071
 PISTON


FILTER = BLFF 100/ 316/ -40
 MIN. MAX VALUES = 0.018 0.05 0.318 15.04

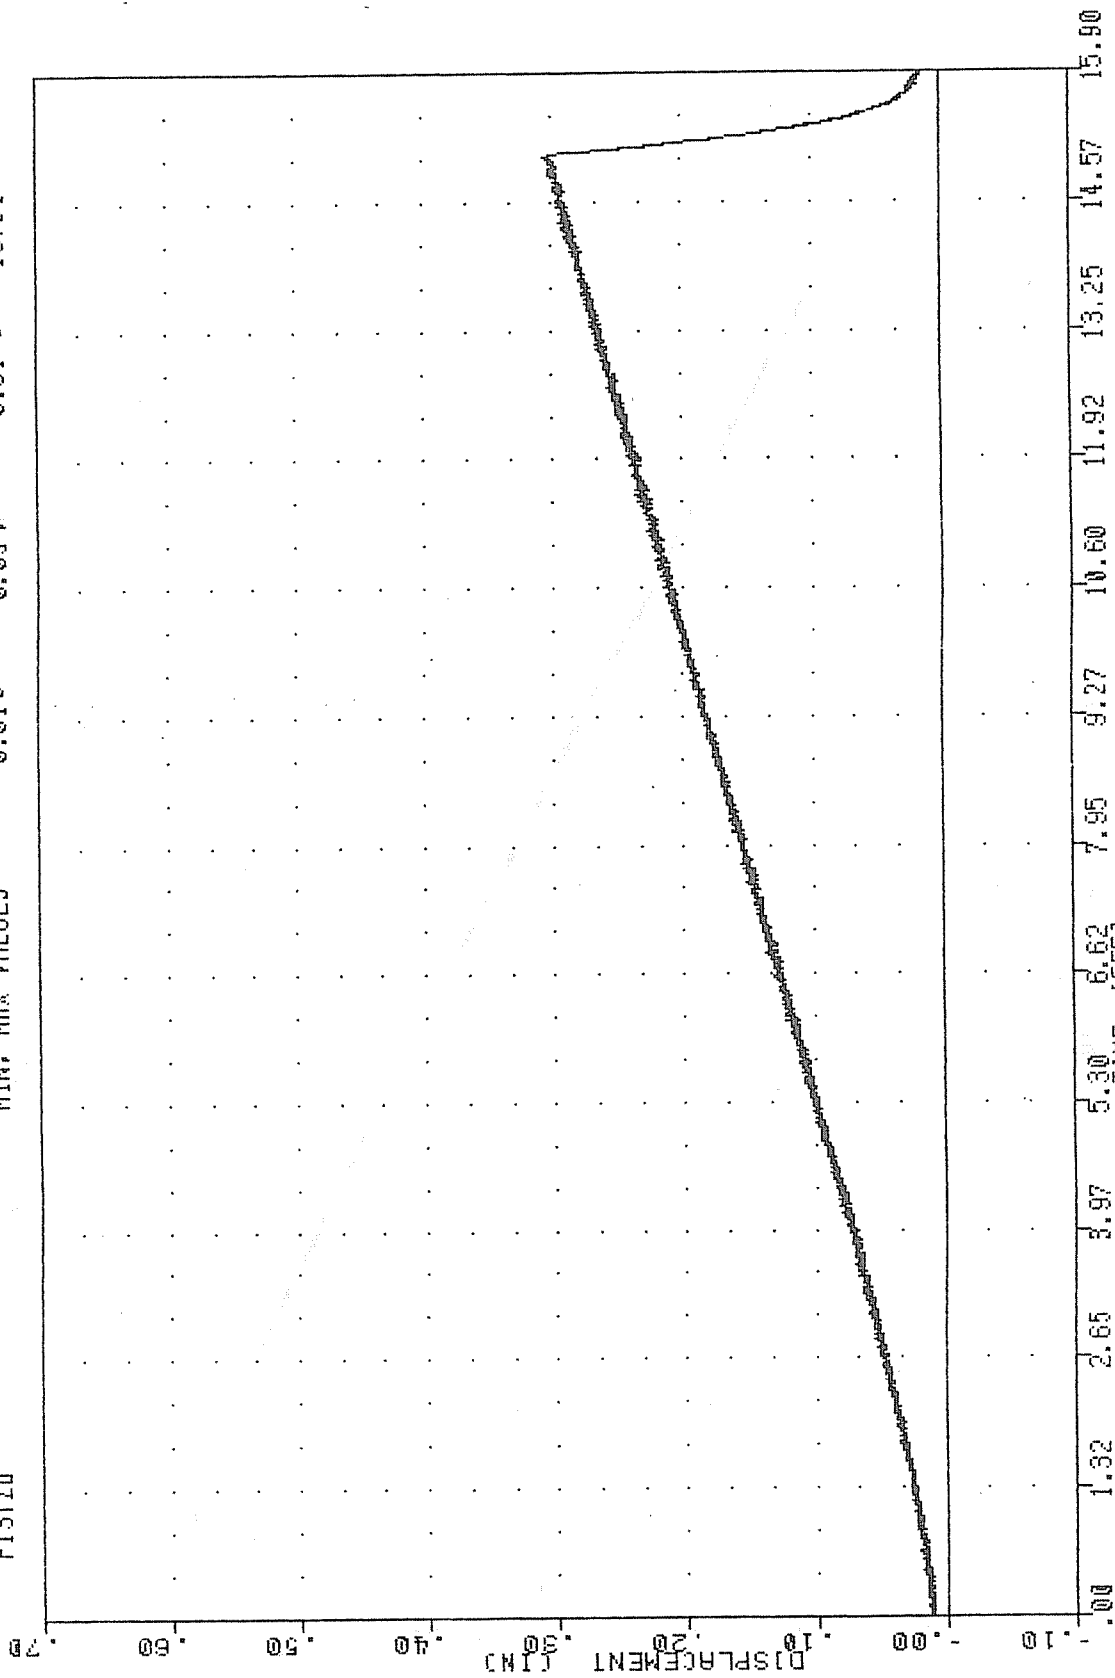

LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 PORT INBOARD SEAT TRACK DEFLECTION

FAR TEST03
 VERTICAL PULL TESTS
 88071
 S1S1Z0


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.02e 0.04, 0.57 e 15.06

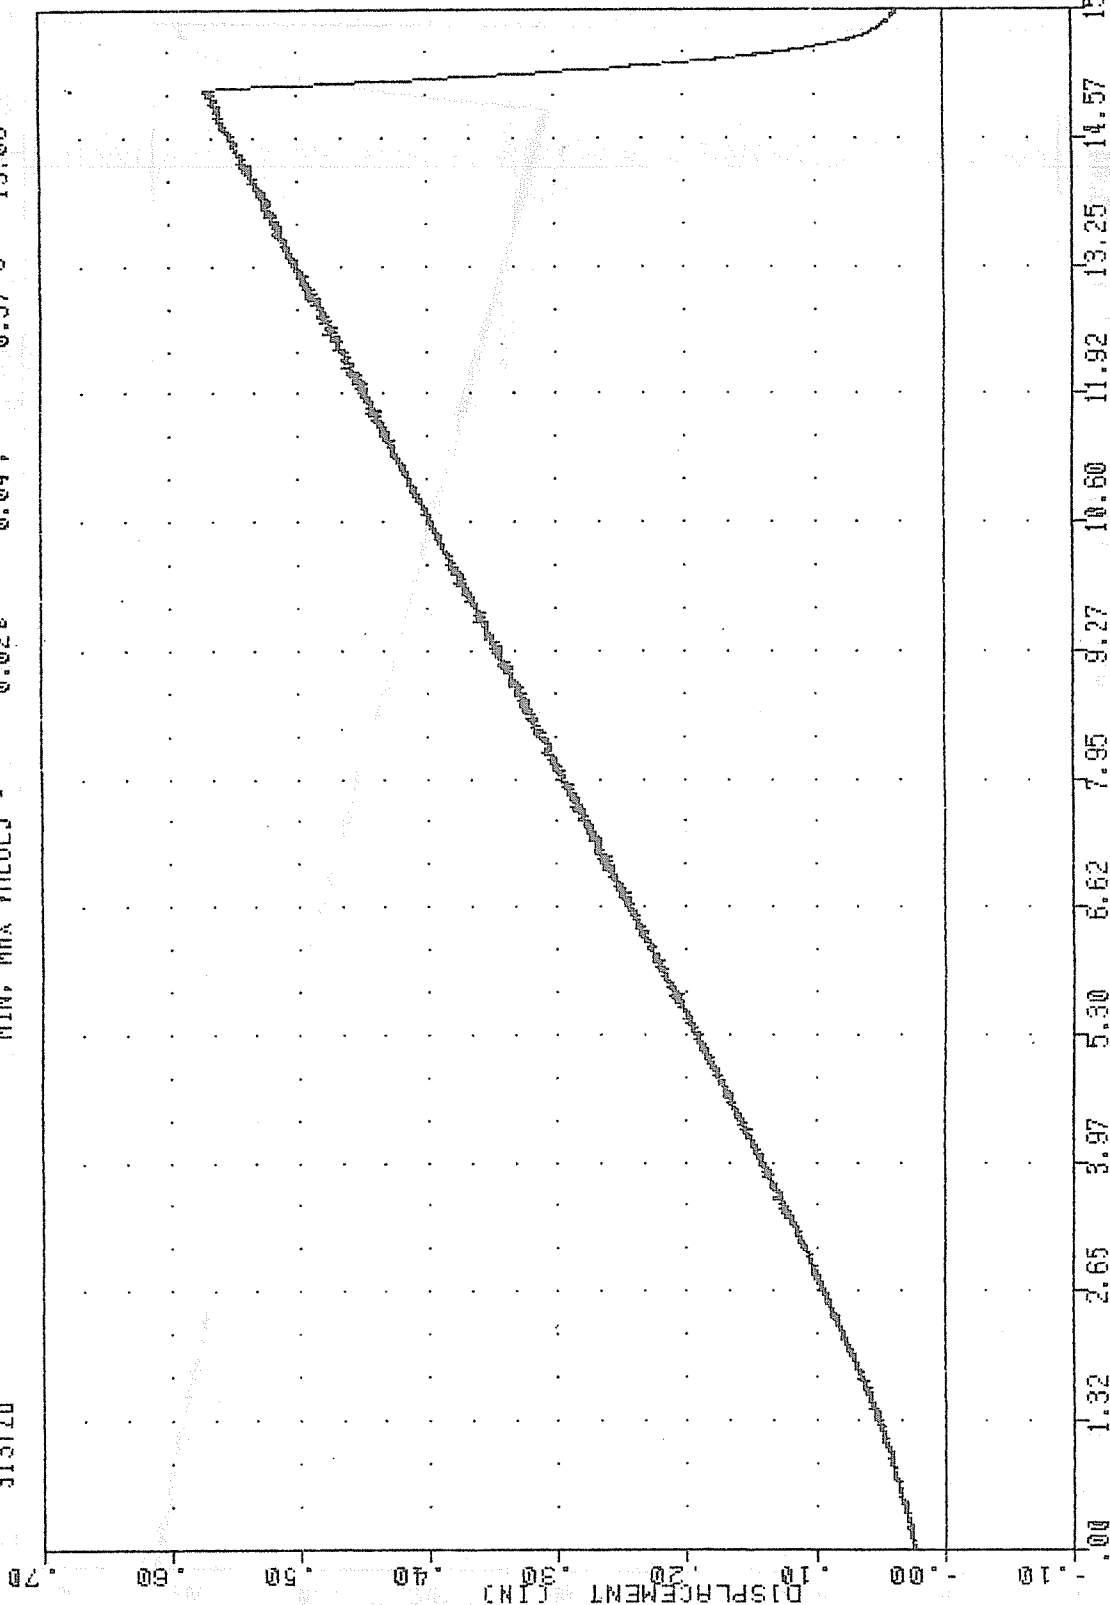

LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 STARBOARD INBOARD SEAT TRACK DEFLECTION


FAR TEST03
 VERTICAL PULL TESTS
 86071
 305720

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.058 0.28 0.39 14.95

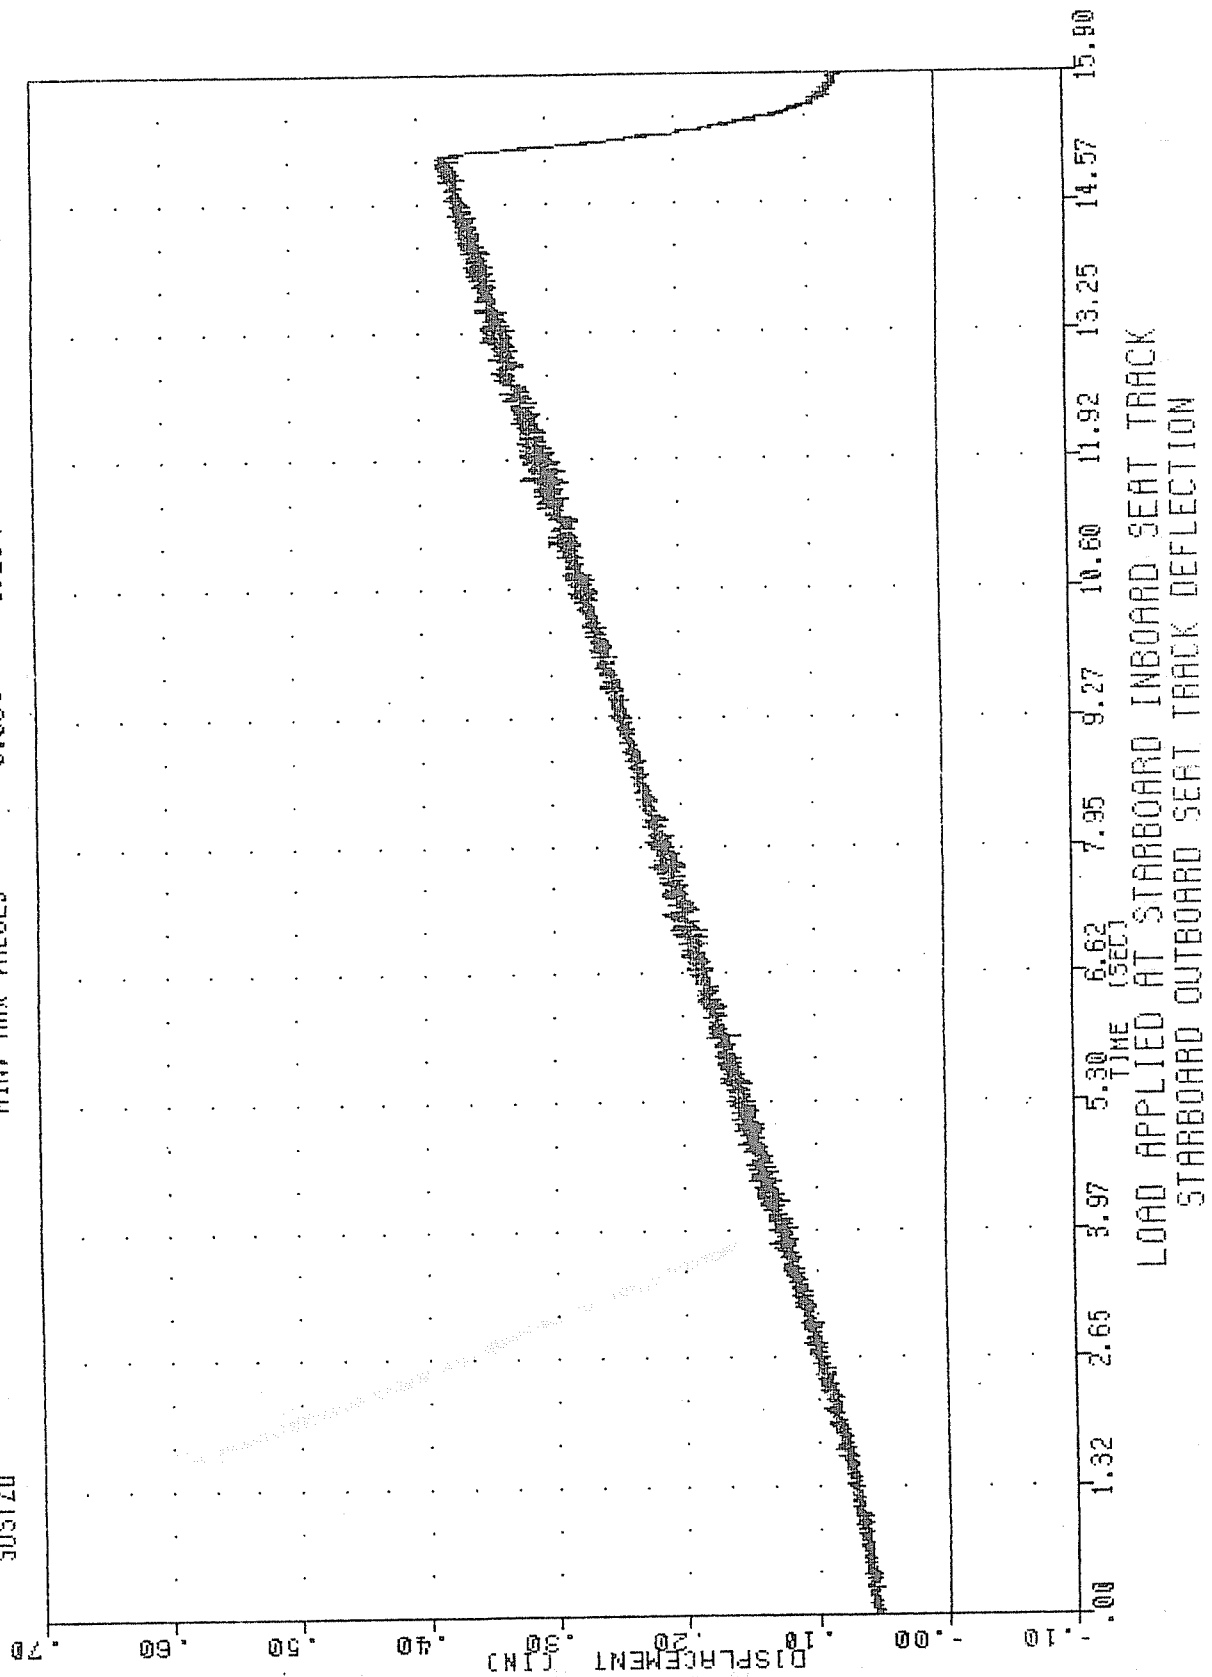


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 STARBOARD OUTBOARD SEAT TRACK DEFLECTION

FOR POSTZD 100/ 316/ -40 MIN. MAX = 0.002 0.11 15.05
 FILTER = BLFF 100/ 316/ -40 MIN. MAX = 0.002 0.11 15.05
 FILTER = BLFF 100/ 316/ -40 MIN. MAX = 0.002 0.11 15.05

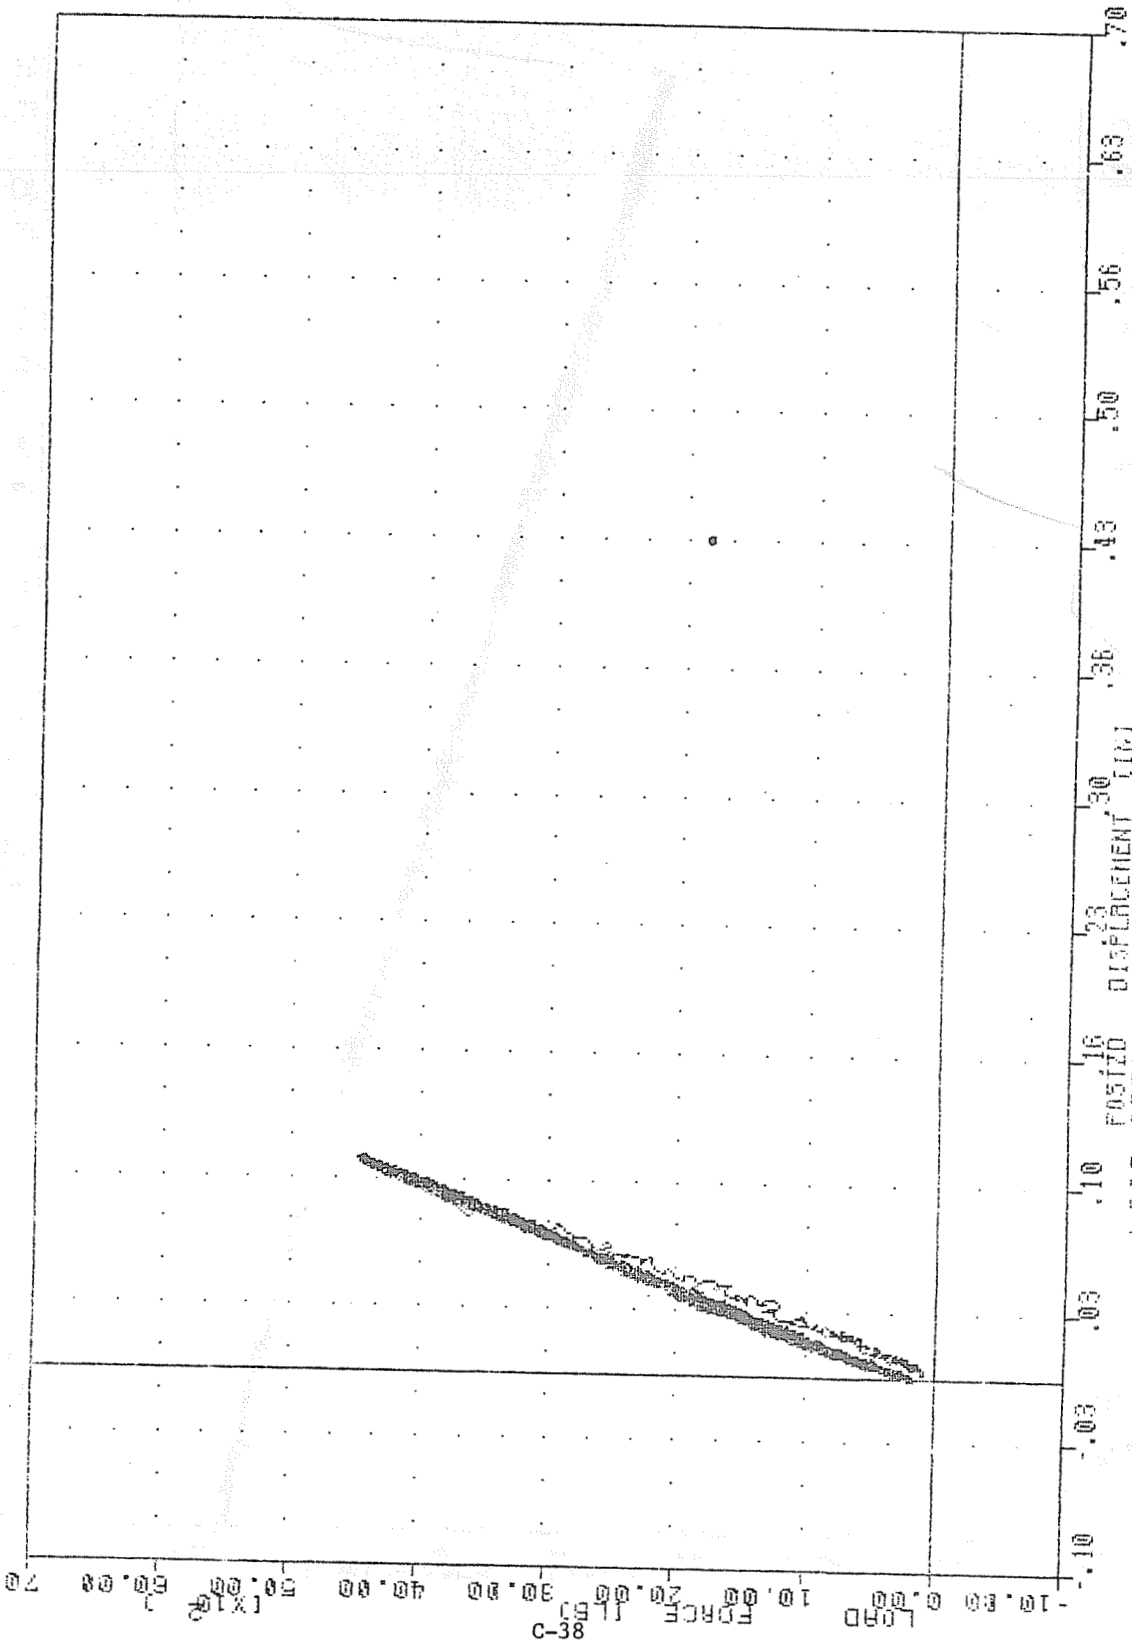


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD SEAT TRACK DEFLECTION

688
 PIST20
 LOAD
 TEST03
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 80.071
 0.01 %
 80.35 %
 0.05 ;
 15.86 ;
 0.31 %
 4480.61 %
 15.04
 15.05

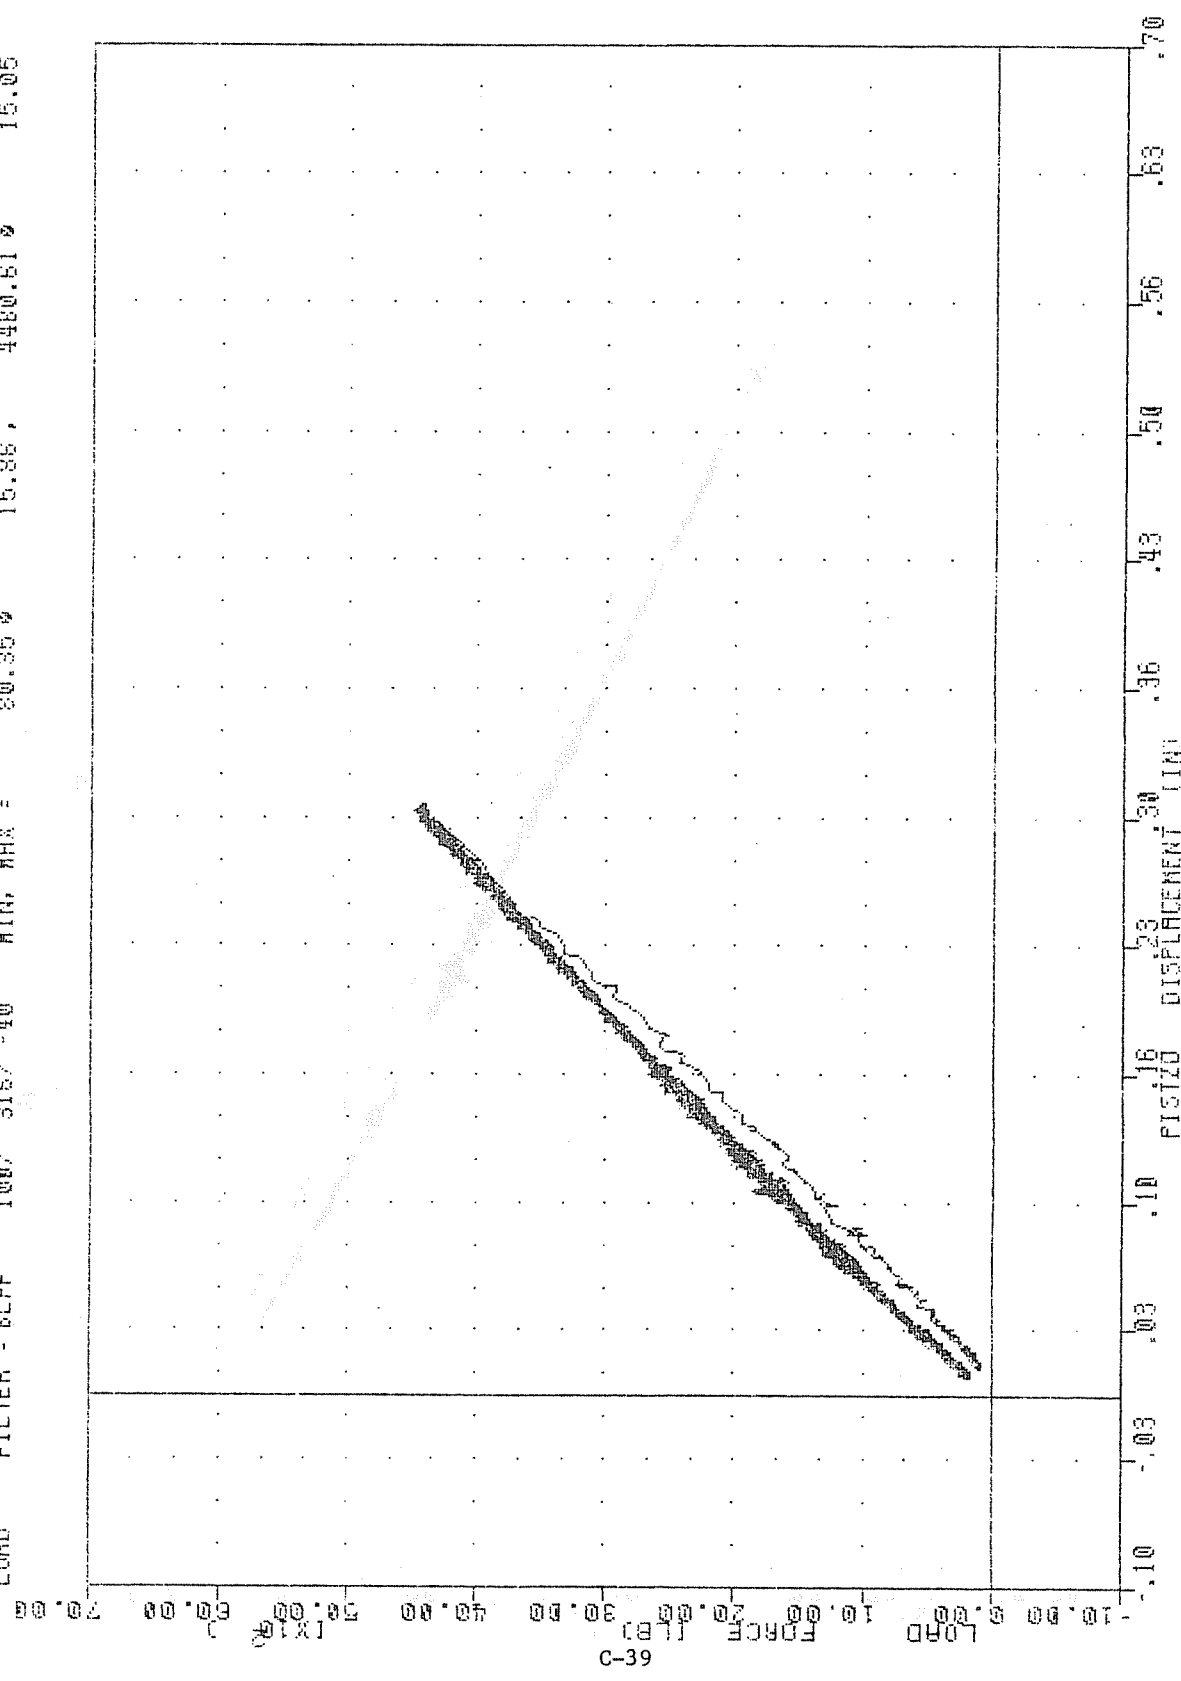


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT INBOARD SEAT TRACK DEFLECTION

F80 TEST03 VERTICAL PULL TESTS 88071 0.57 15.06
 S1S1ZD FILTER : BLFF 100/ 316/ -40 MIN. MAX : 0.02 4480.61 15.05
 LOAD FILTER : BLFF 100/ 316/ -40 MIN. MAX : 15.86

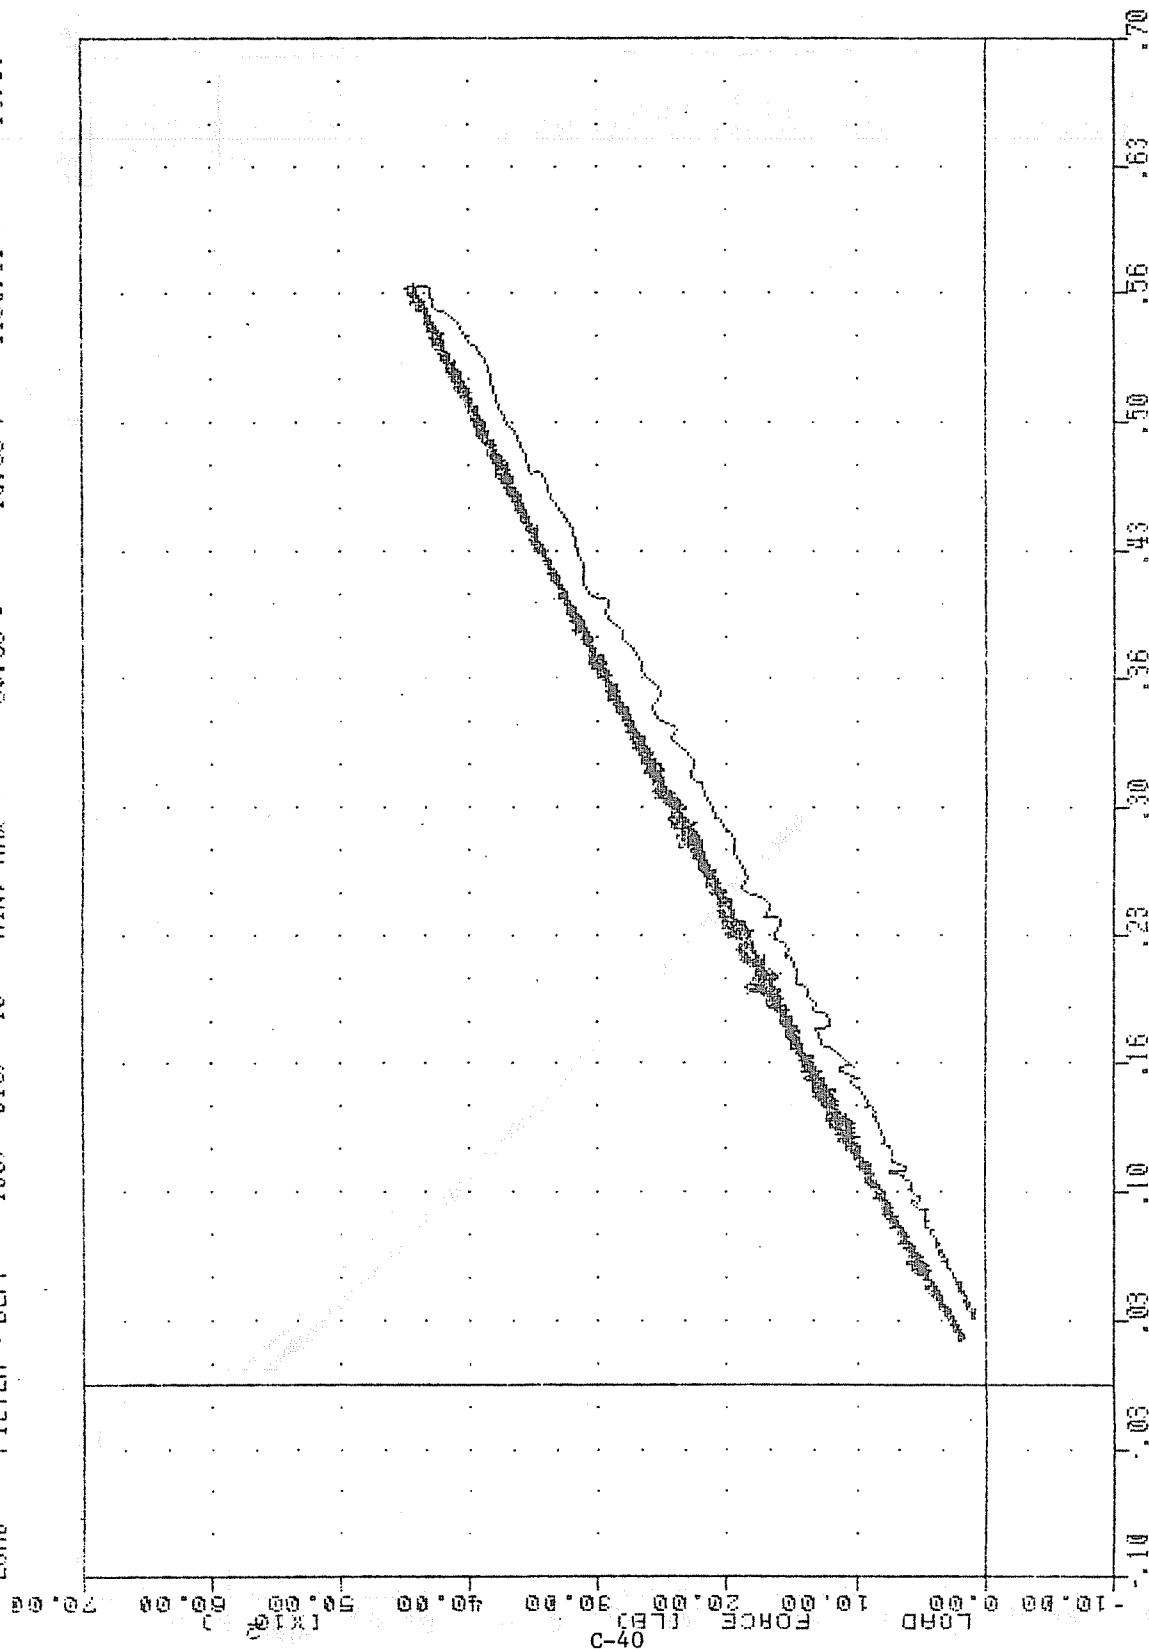

5000
 SUSTDZD
 LOAD
 TEST03
 FILTER = BLPF
 100/ 316/ -40
 MIN. MAX =
 0.05
 4480.61
 0.39
 14.95
 15.05

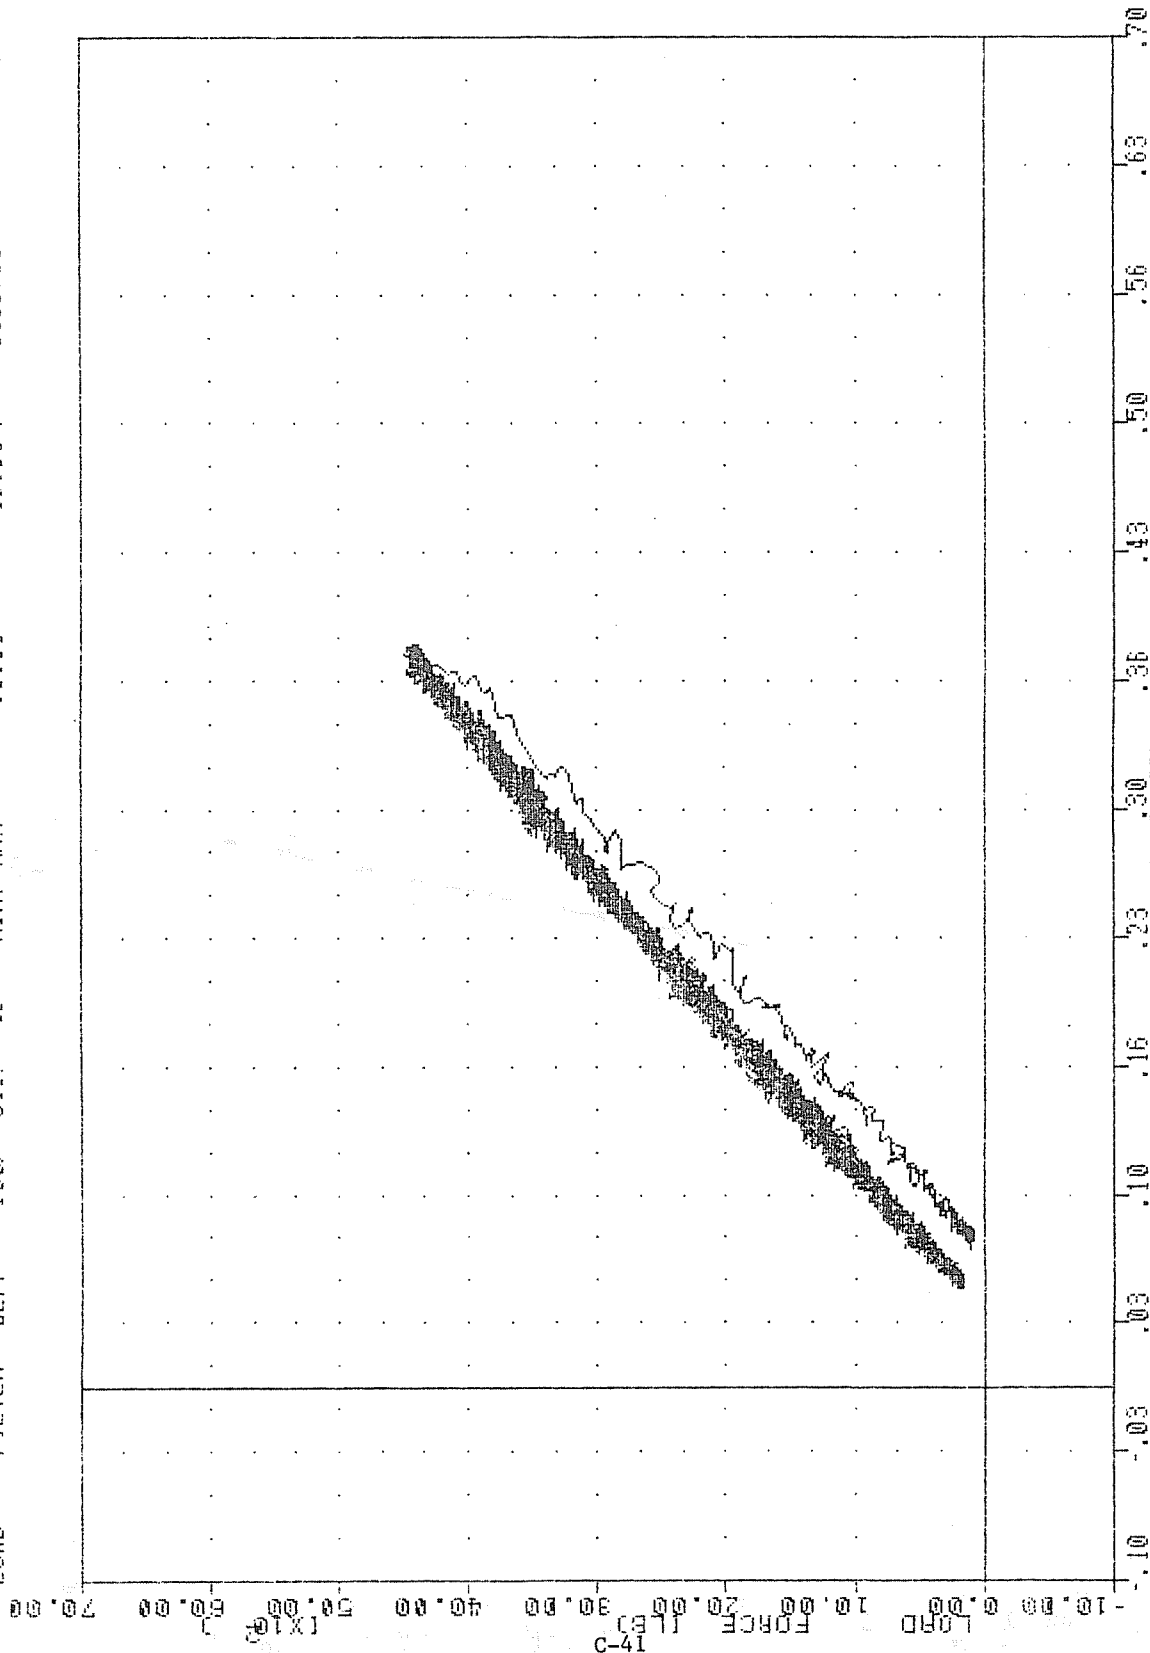

LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK


FBI
F06S
LOAD

TEST03
FILTER = BLPF
FILTER = BLPF

VERTICAL PULL TESTS
100/ 316/ -40 MIN, MAX =
100/ 316/ -40 MIN, MAX =


00021
-6.50
80.35

15.06
15.06
-0.26
4480.61
15.90
15.05

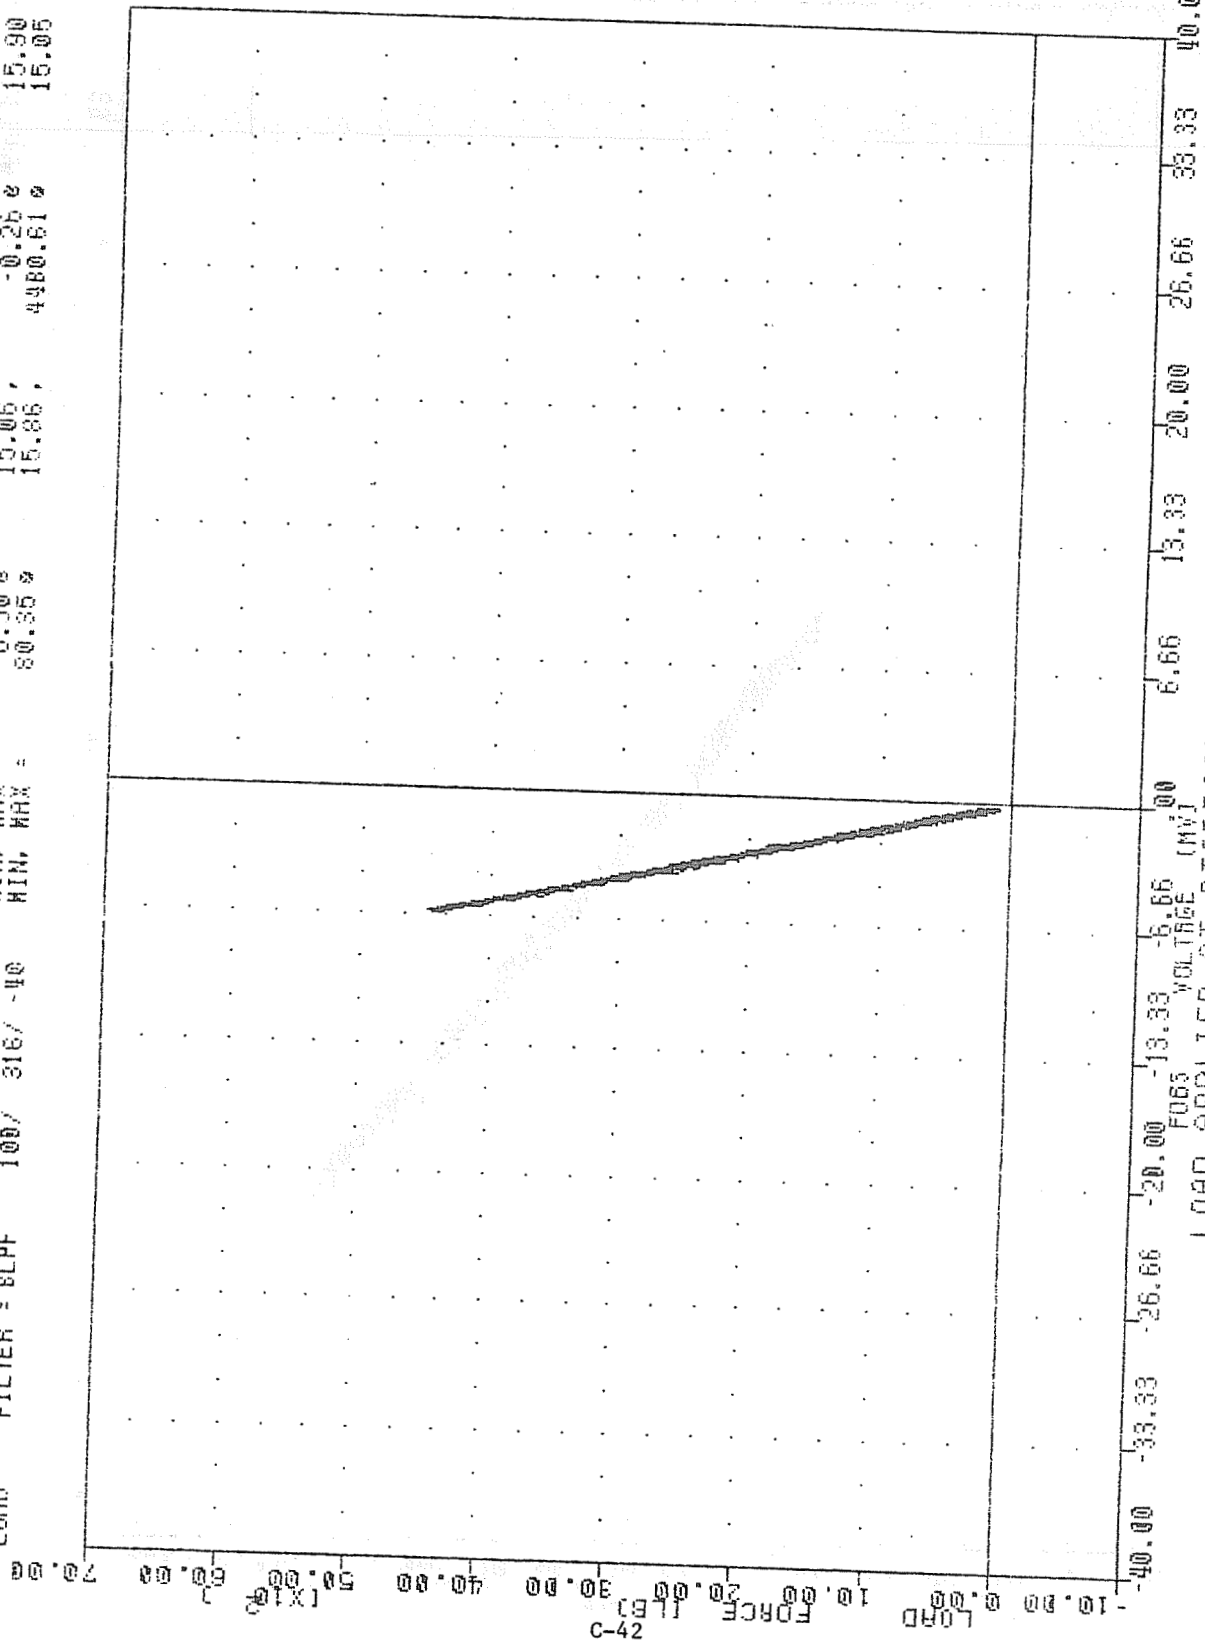


LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD BEAM STRAIN

CUB TESTS VERTICAL FULL TESTS 88871
 FILTER : BLFF 100/ 315/ -40 MIN. MAX : 0.16 2 14.42
 FILTER : BLFF 100/ 315/ -40 MIN. MAX : 0.95 2 15.05
 LOAD

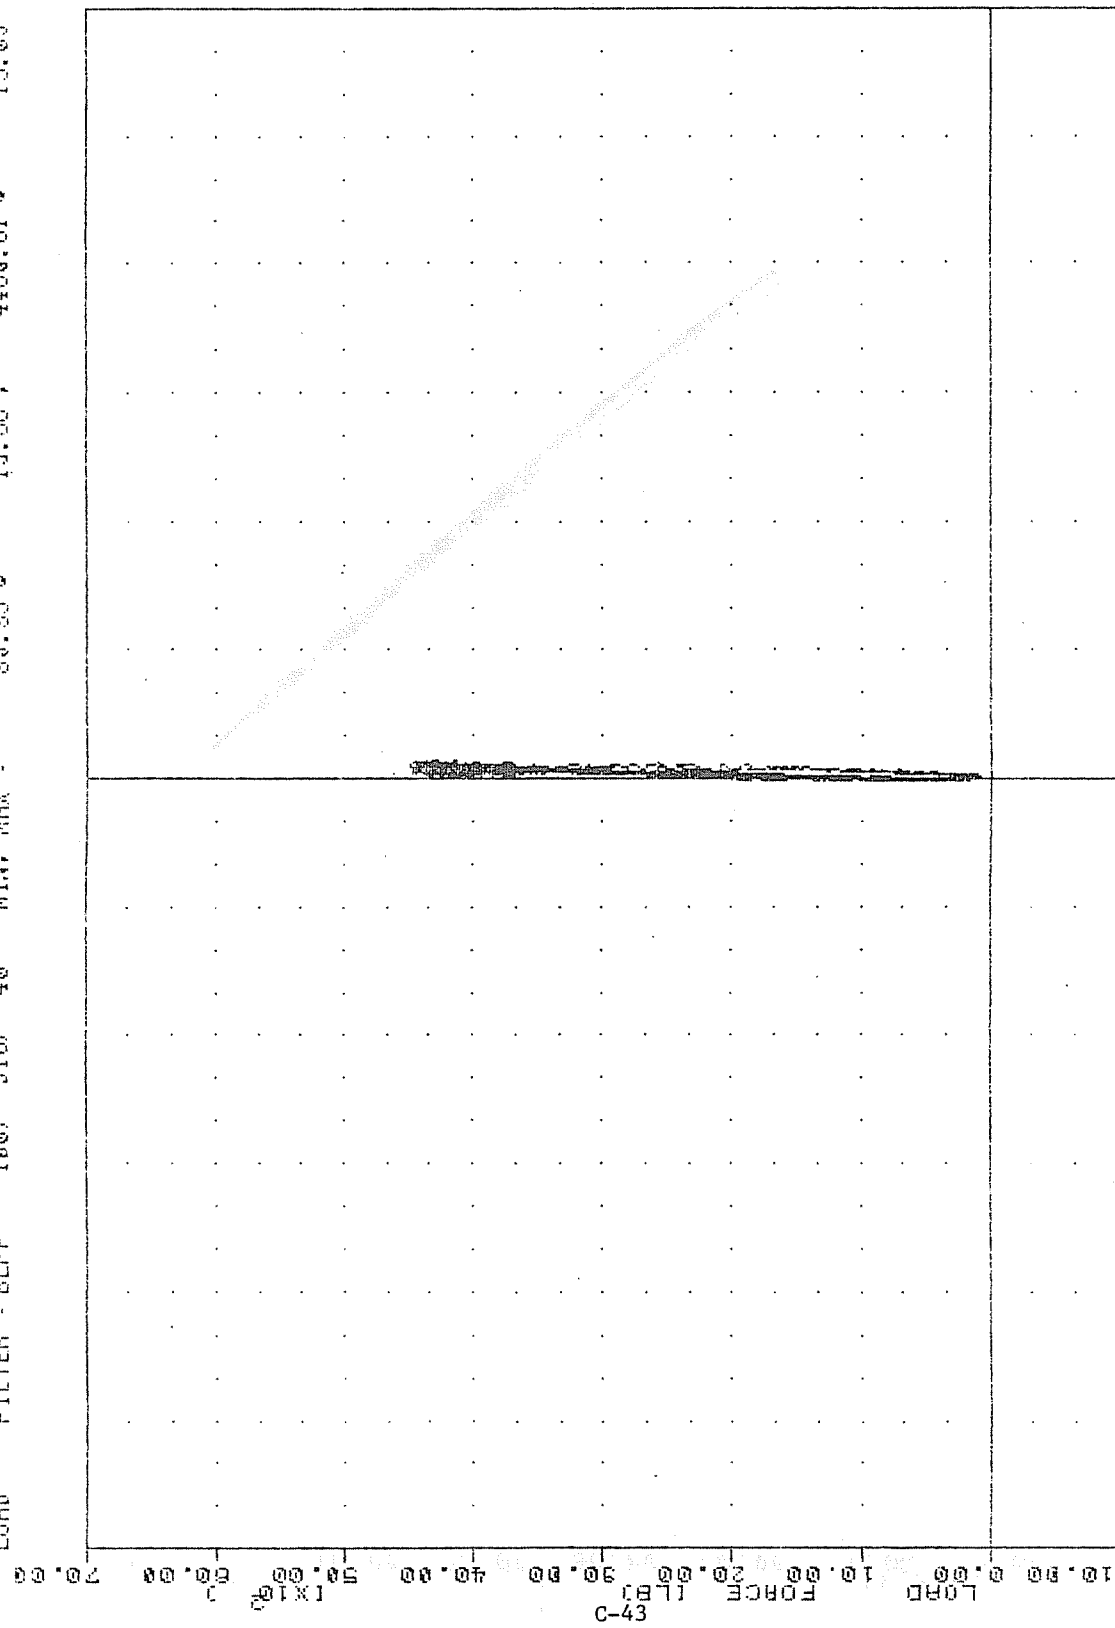


-40.00 -33.33 -26.66 -20.00 -13.33 -6.66 0.00 6.66 13.33 20.00 26.66 33.33 40.00
 LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT INBOARD BEAM STRAIN

FAR 3185
 LOAD
 TEST03
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX =
 MIN. MAX =
 88071
 0.69 e
 80.35 e
 25.71 e
 4480.61 e
 15.05
 15.05

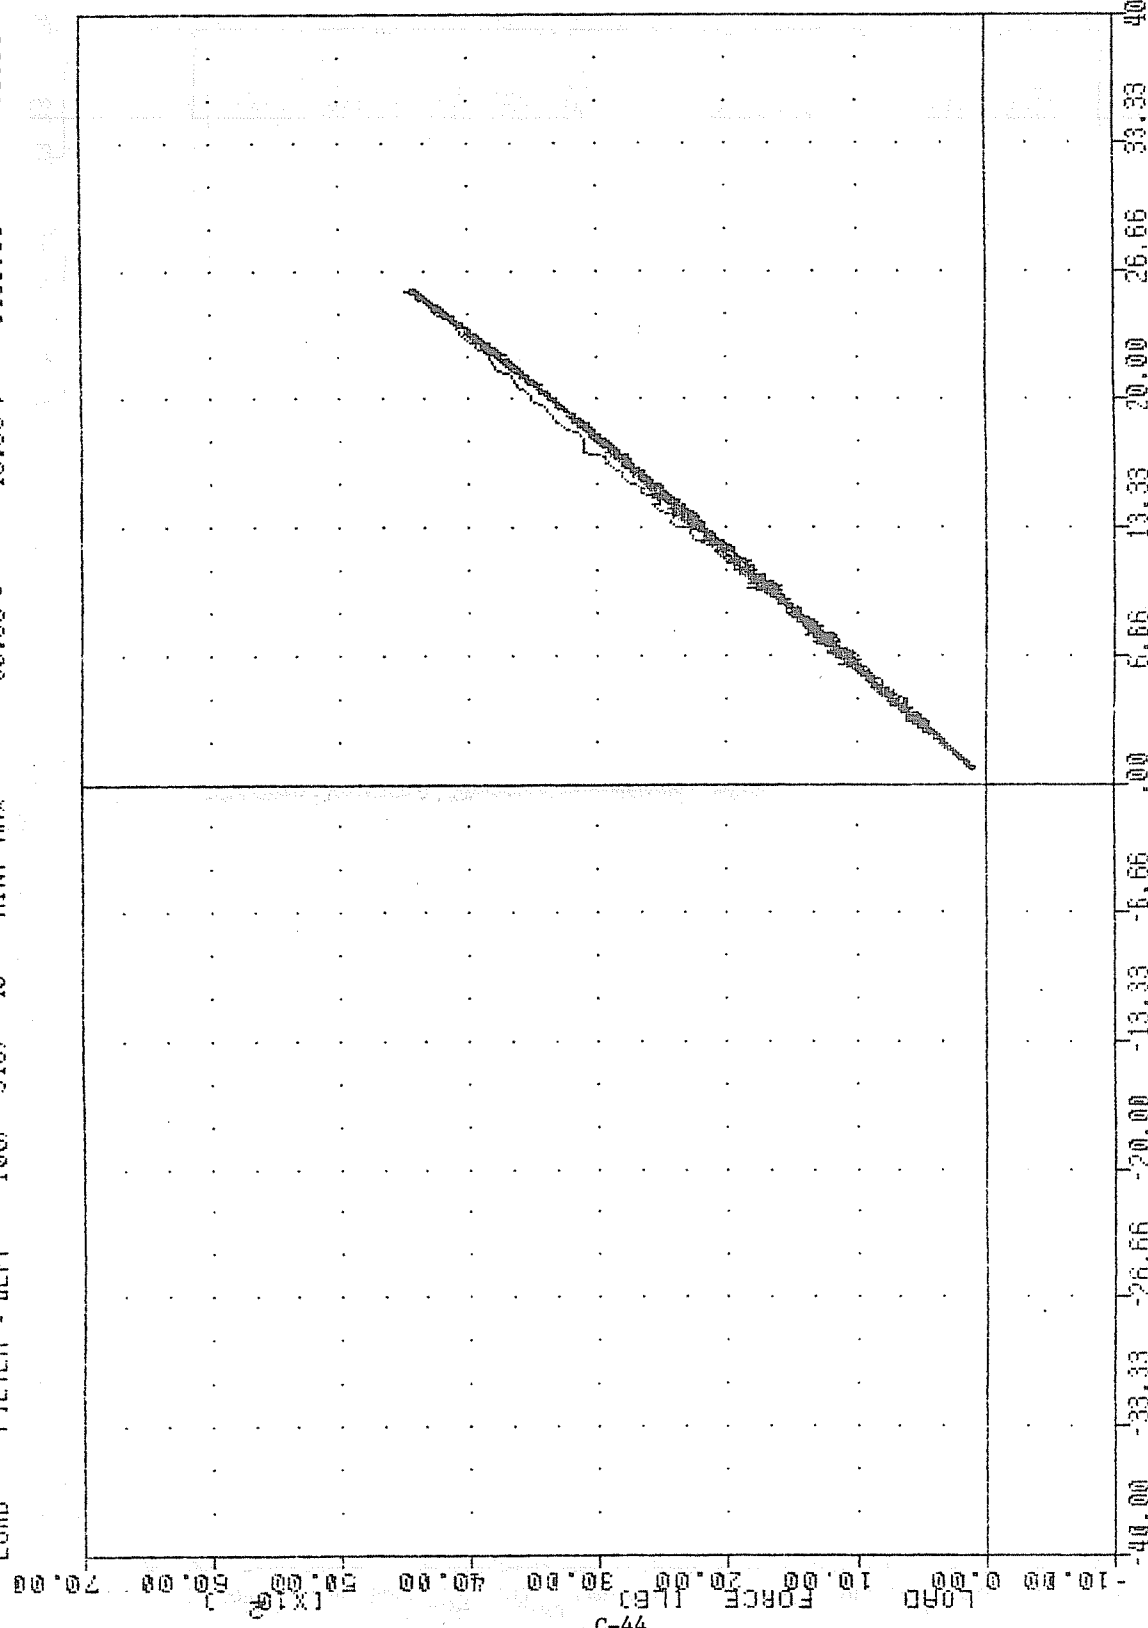

LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD BEAM STRAIN

FRA
 SUBS
 LOAD
 TEST03
 FILTER = BLPF
 FILTER = BLPF
 VERTICAL FULL TESTS
 100/ 316/ -40 MIN. MAX =
 100/ 316/ -40 MIN. MAX =
 88071
 -3.80 2
 80.35 2
 15.00;
 15.86;
 -0.52 2
 4480.61 2
 0.06
 15.05

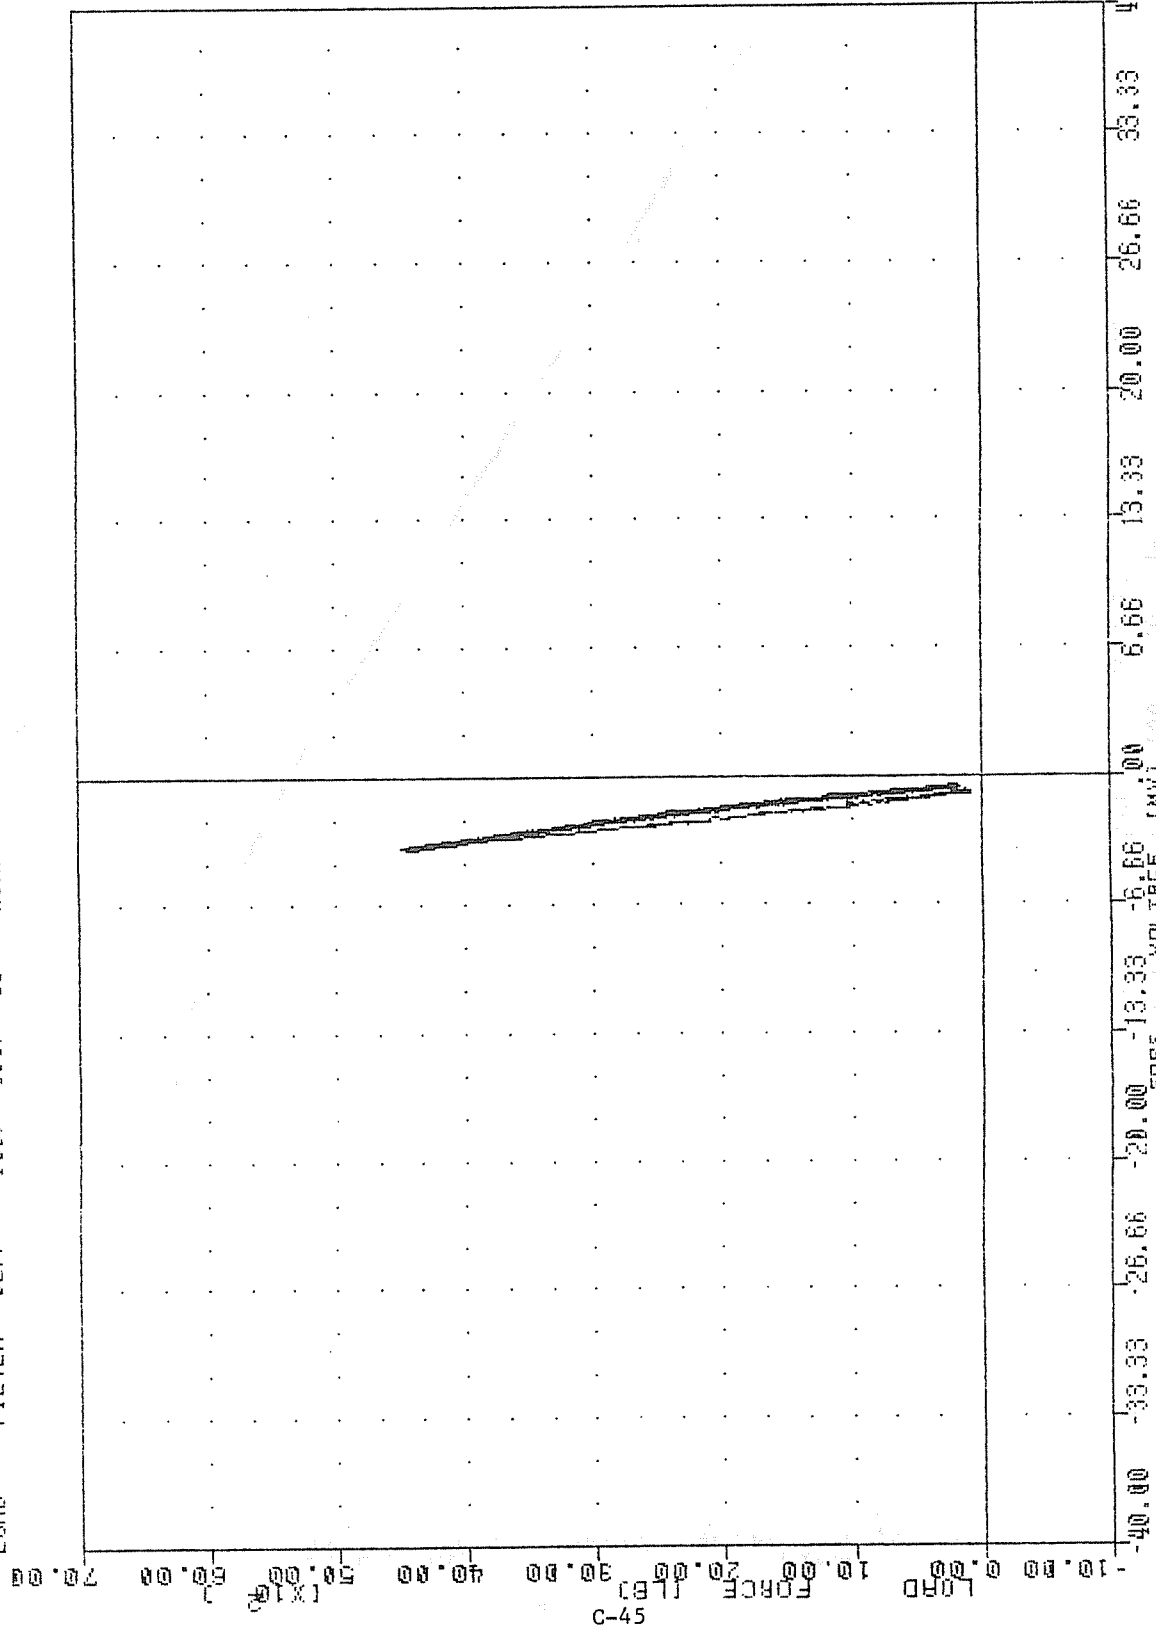


SUBS
 VOLTAGE (MV)
 LOAD APPLIED AT STARBOARD INBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD REAR STRAIN

FRA
VERTICAL PULL TESTS
88071
LOAD

FILTER = BLFF 100/ 316/ -40
MIN. MAX VALUES = -103.90e 1.87, 4454.23 e 15.09

FORCE (LB)
-10.00 0.00 10.00 20.00 30.00 40.00 50.00 60.00 70.00
(X10²)

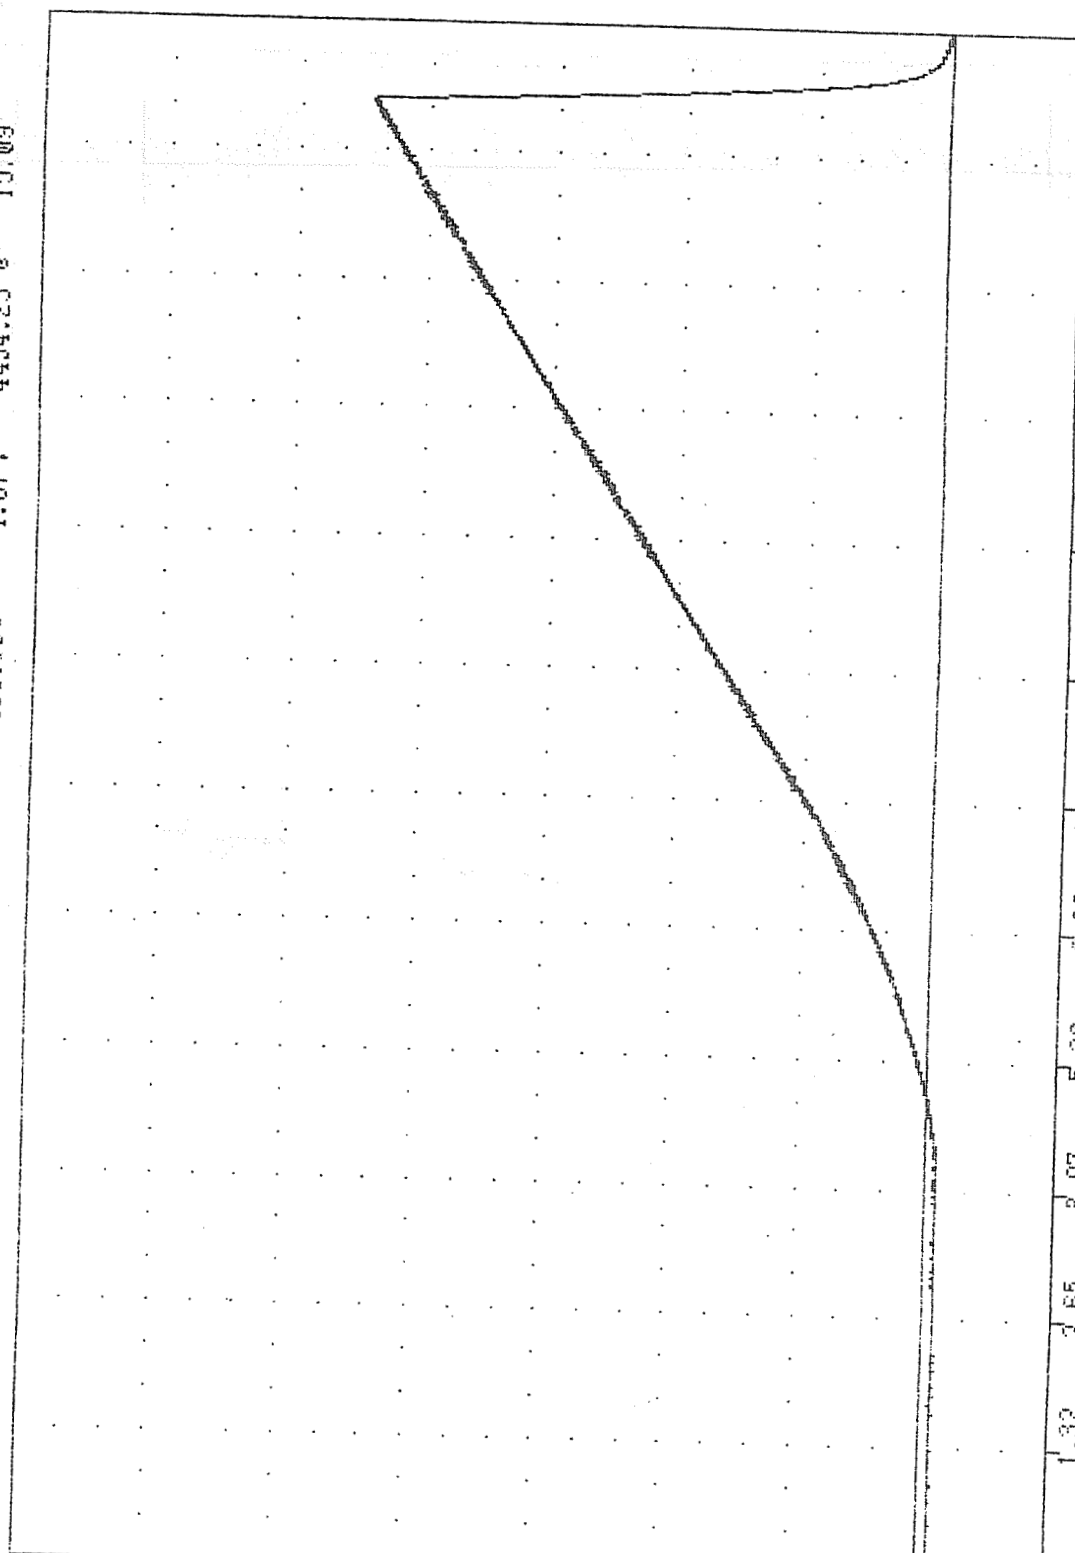

0.00


15.90

LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
LOAD APPLIED TO SEAT TRACK

FAR TEST04
VERTICAL PULL TESTS

38071
POBS

FILTER = BLPF 1000/ 515/ -40
MIN, MAX VALUES = -3.34e 15.10, 0.06 e 1.21

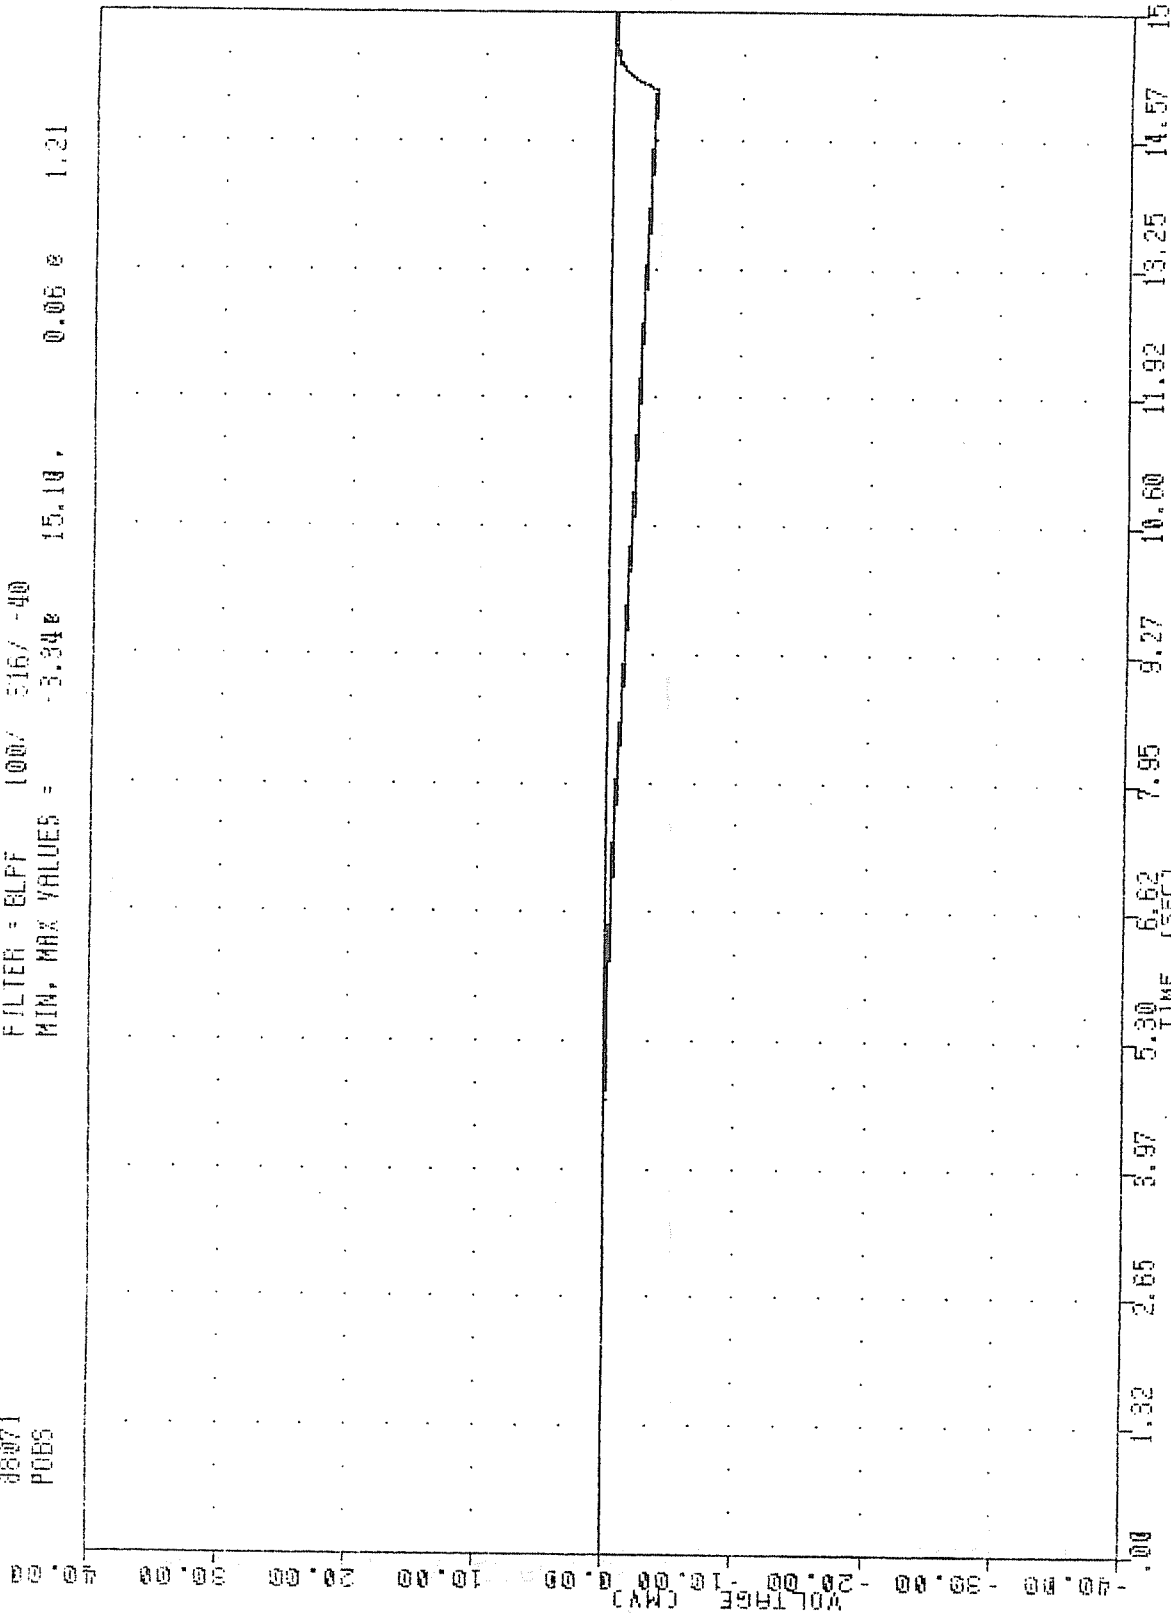


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
PORT OUTBOARD BEAM STRAIN

FRA
VERTICAL PULL TESTS
02071
PIBS

FILTER = BLPF 100/ 316/ -40
MIN, MAX VALUES = -0.94e 15.03e 0.00e 0.14

VOLTAGE (MAY) -40.00 -30.00 -20.00 -10.00 0.00 10.00 20.00 30.00 40.00

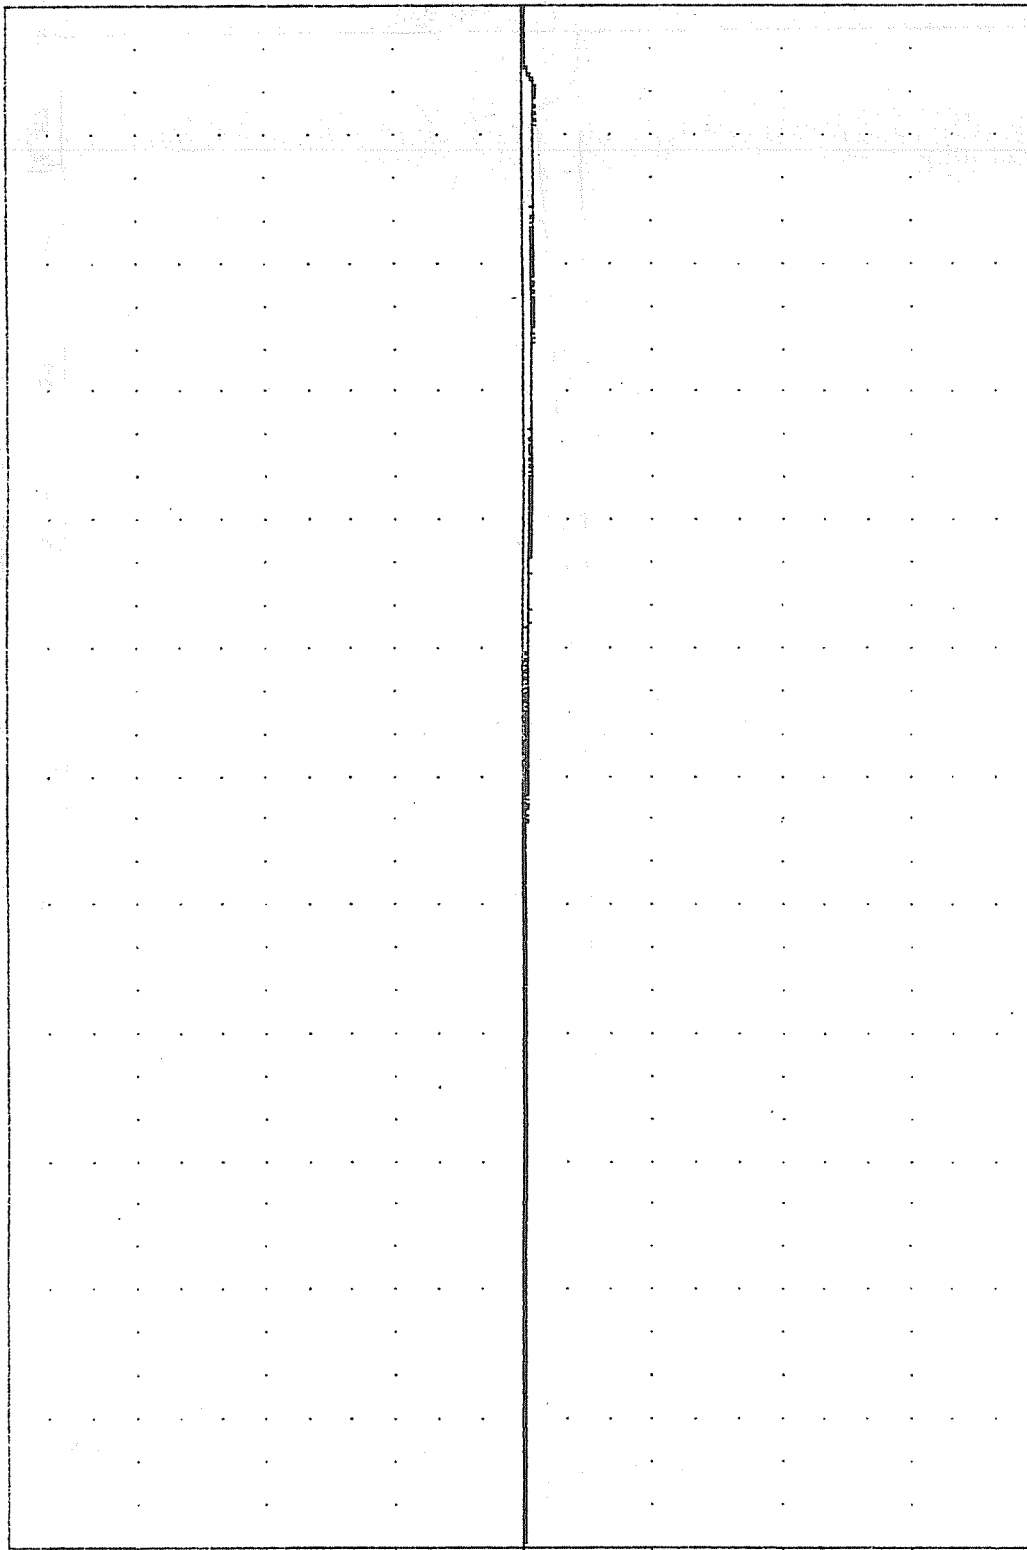

0.00 1.32 2.65 3.97 5.30 6.62 7.95 9.27 10.60 11.92 13.25 14.57 15.90


TIME (SEC)
LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
PORT INBOARD BEAM STRAIN

PAB , TEST04
 VERTICAL PULL TESTS
 88071
 3165

FILTER = BLFF 100/ 316/ -40
 MIN. MAX VALUES = -0.242 1.06 9.05 2 15.09

VOLTAGE (MVS)

C-49

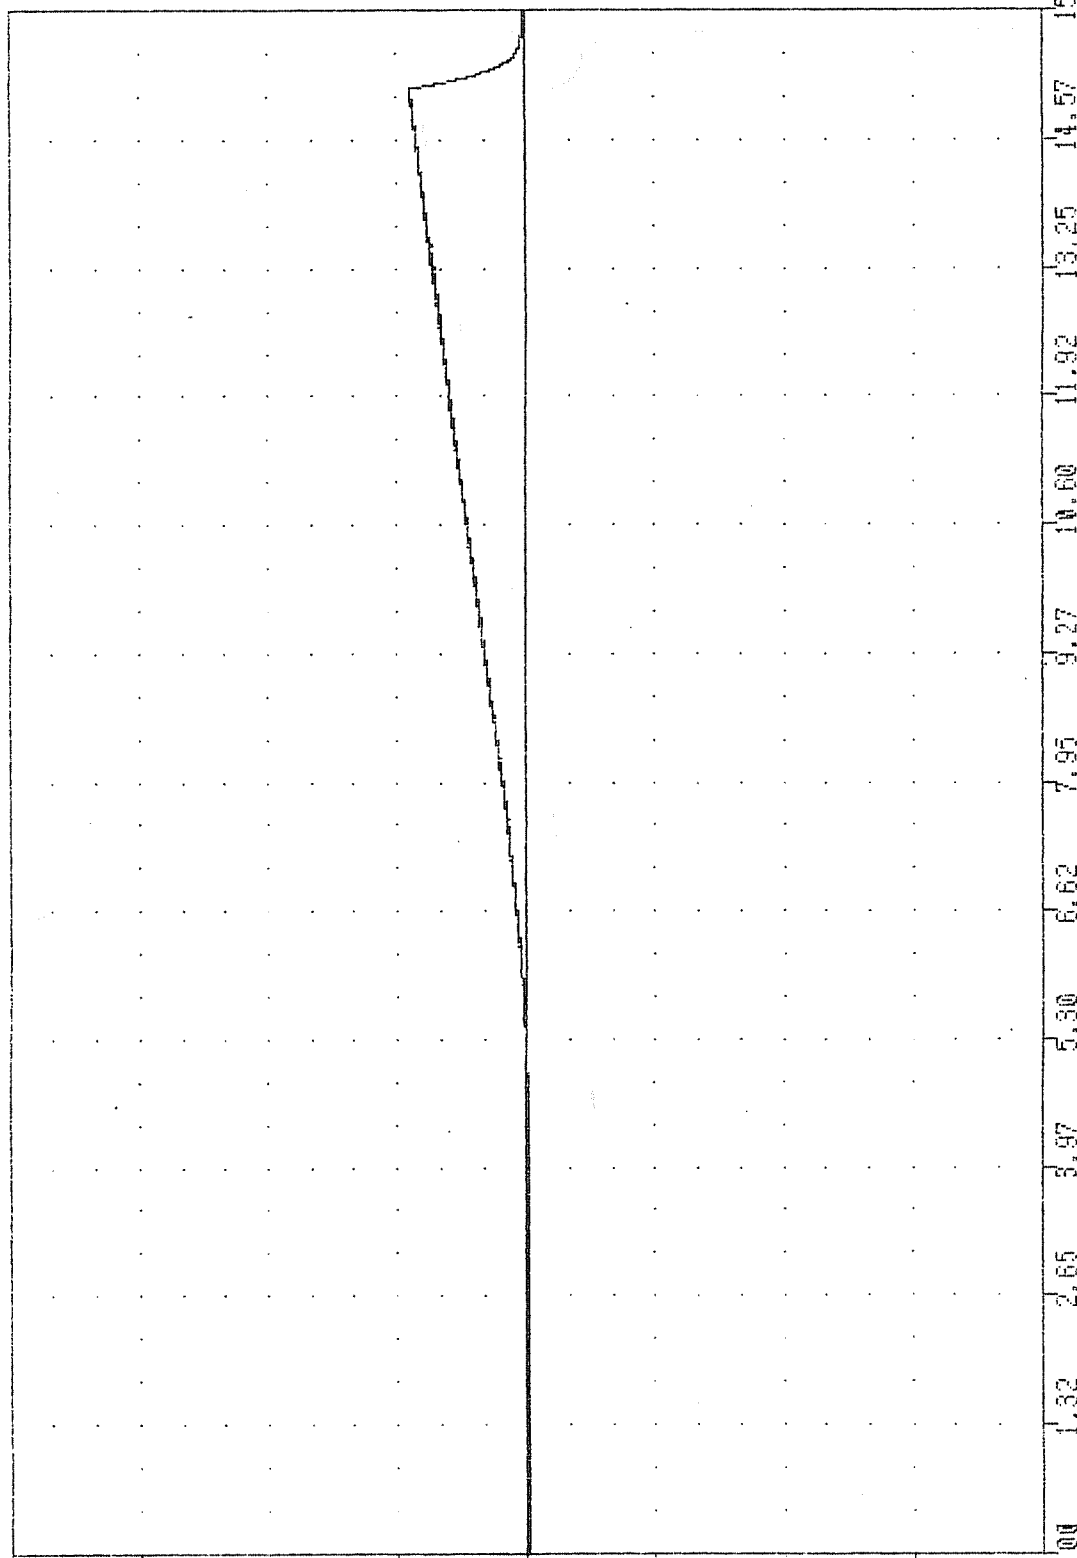


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 STARBOARD INBOARD BEAM STRAIN

FRA . TEST01
 VERTICAL PULL TESTS
 88071
 5065

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -13.48 15.10, -0.36 0.96

VOLTAGE (MW)

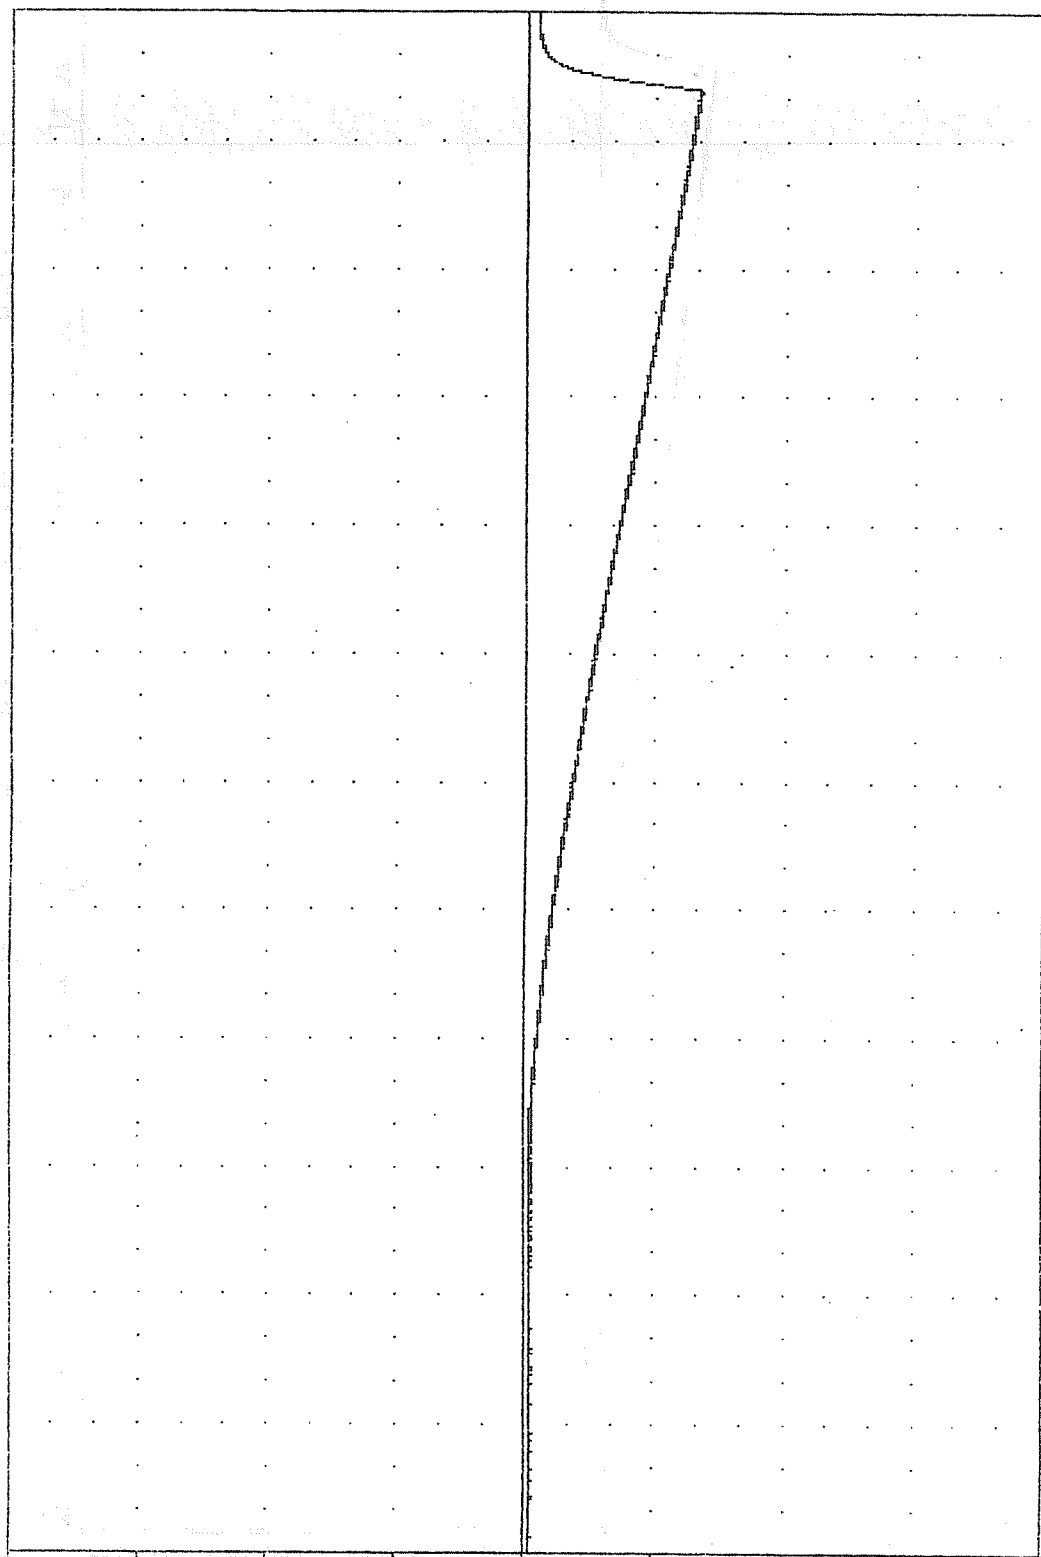


C-50

LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 STARBOARD OUTBOARD BEAM STRAIN


FRA , TEST04
 VERTICAL PULL TESTS
 88071
 505T20

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.032 0.57, 0.34 15.06

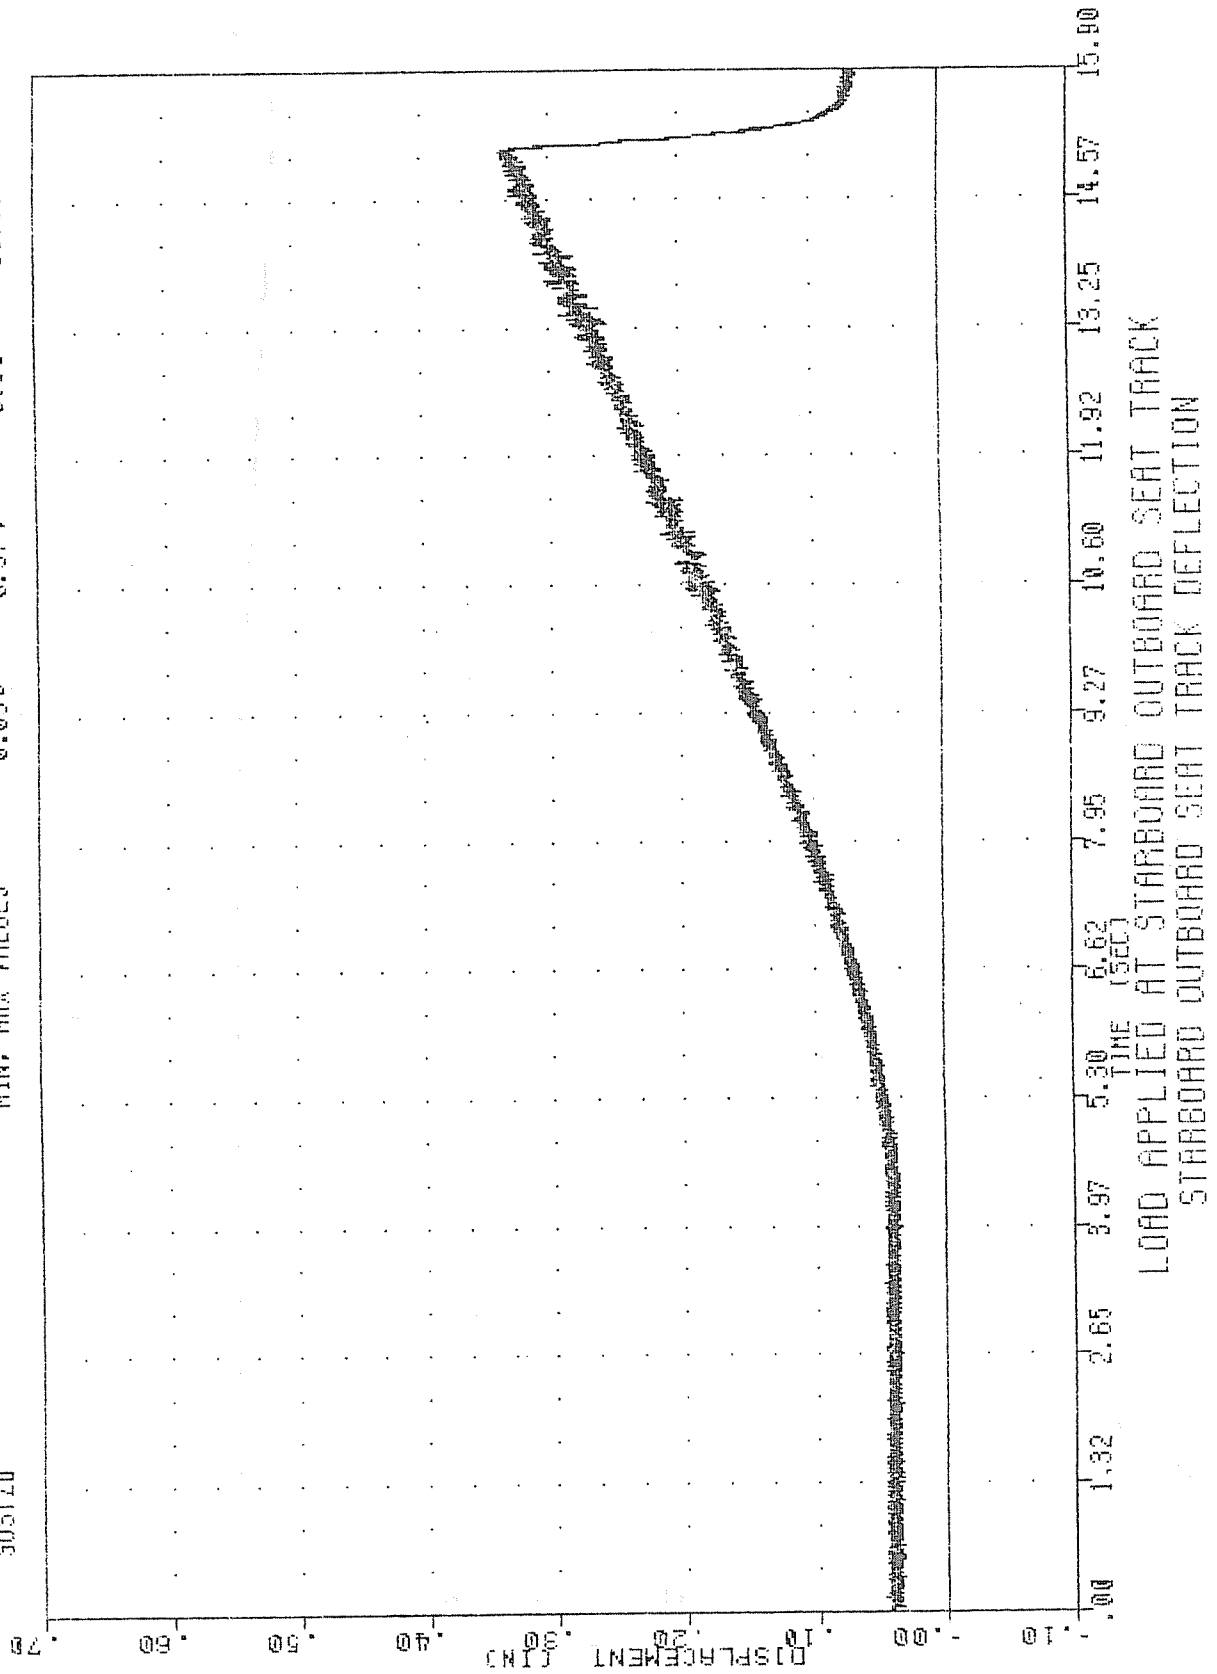

FH
 TEST04
 VERTICAL PULL TESTS
 88071
 POST20


FILTER = BLFF 100/ 316/ -40
 MIN, MAX VALUES = 0.00e 3.66 , 0.03 e 15.09

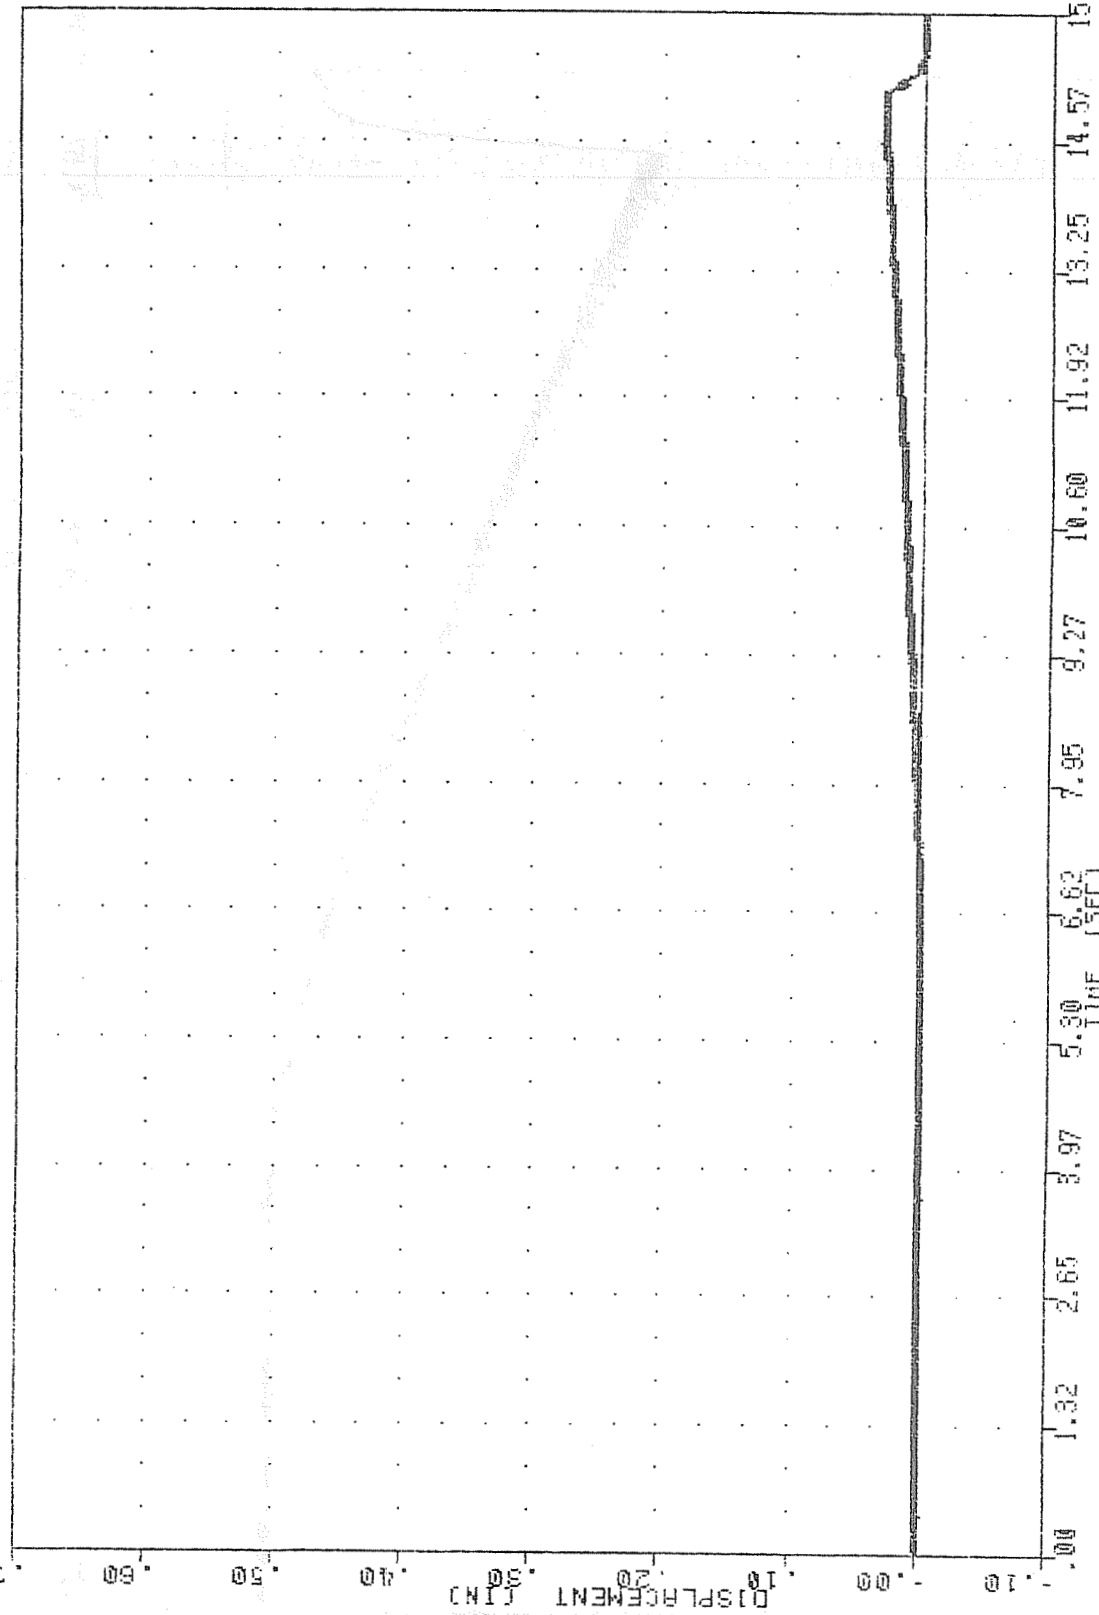

LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 PORT OUTBOARD SEAT TRACK DEFLECTION

FRA , TEST04
 VERTICAL PULL TESTS
 88071
 P15120


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.012 2.92, 0.11 2 15.10

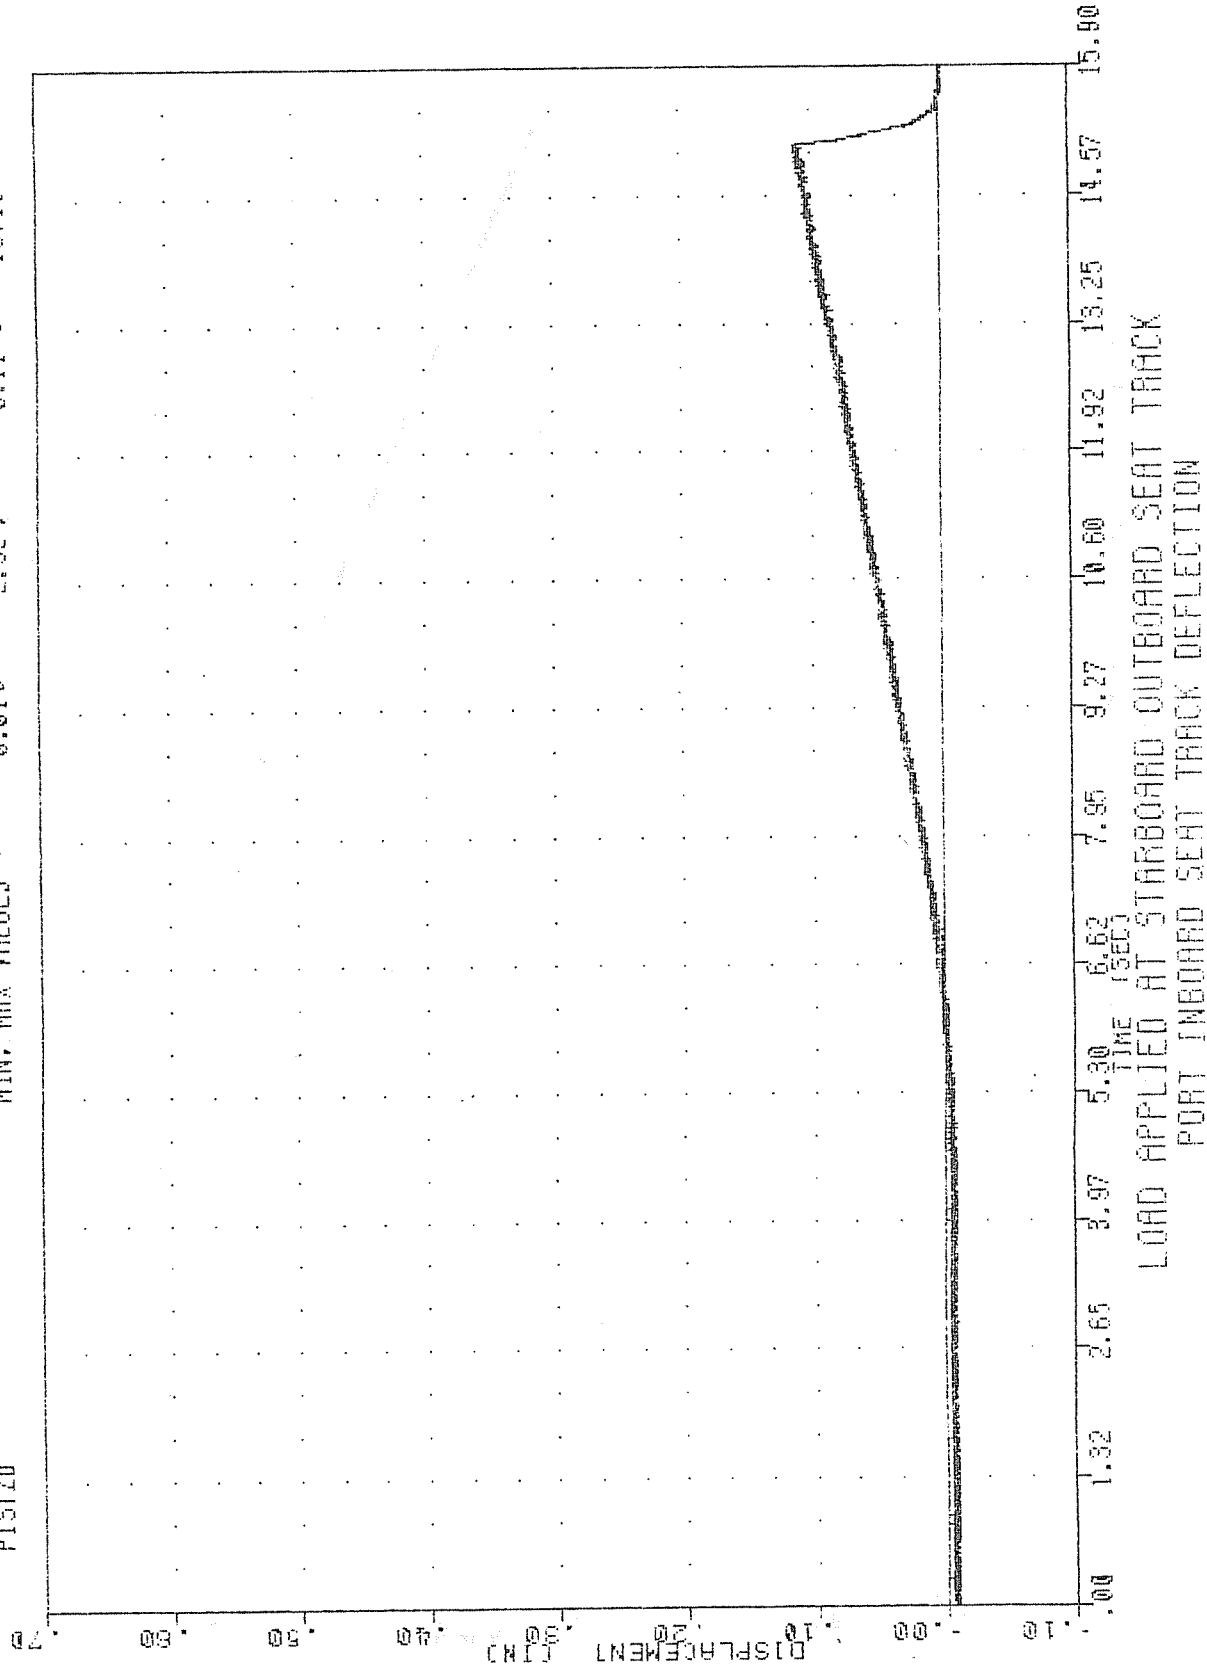

FHM , TEST04
 VERTICAL PULL TESTS
 88071
 515170


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.012

3.15 . 0.28 e 15.09

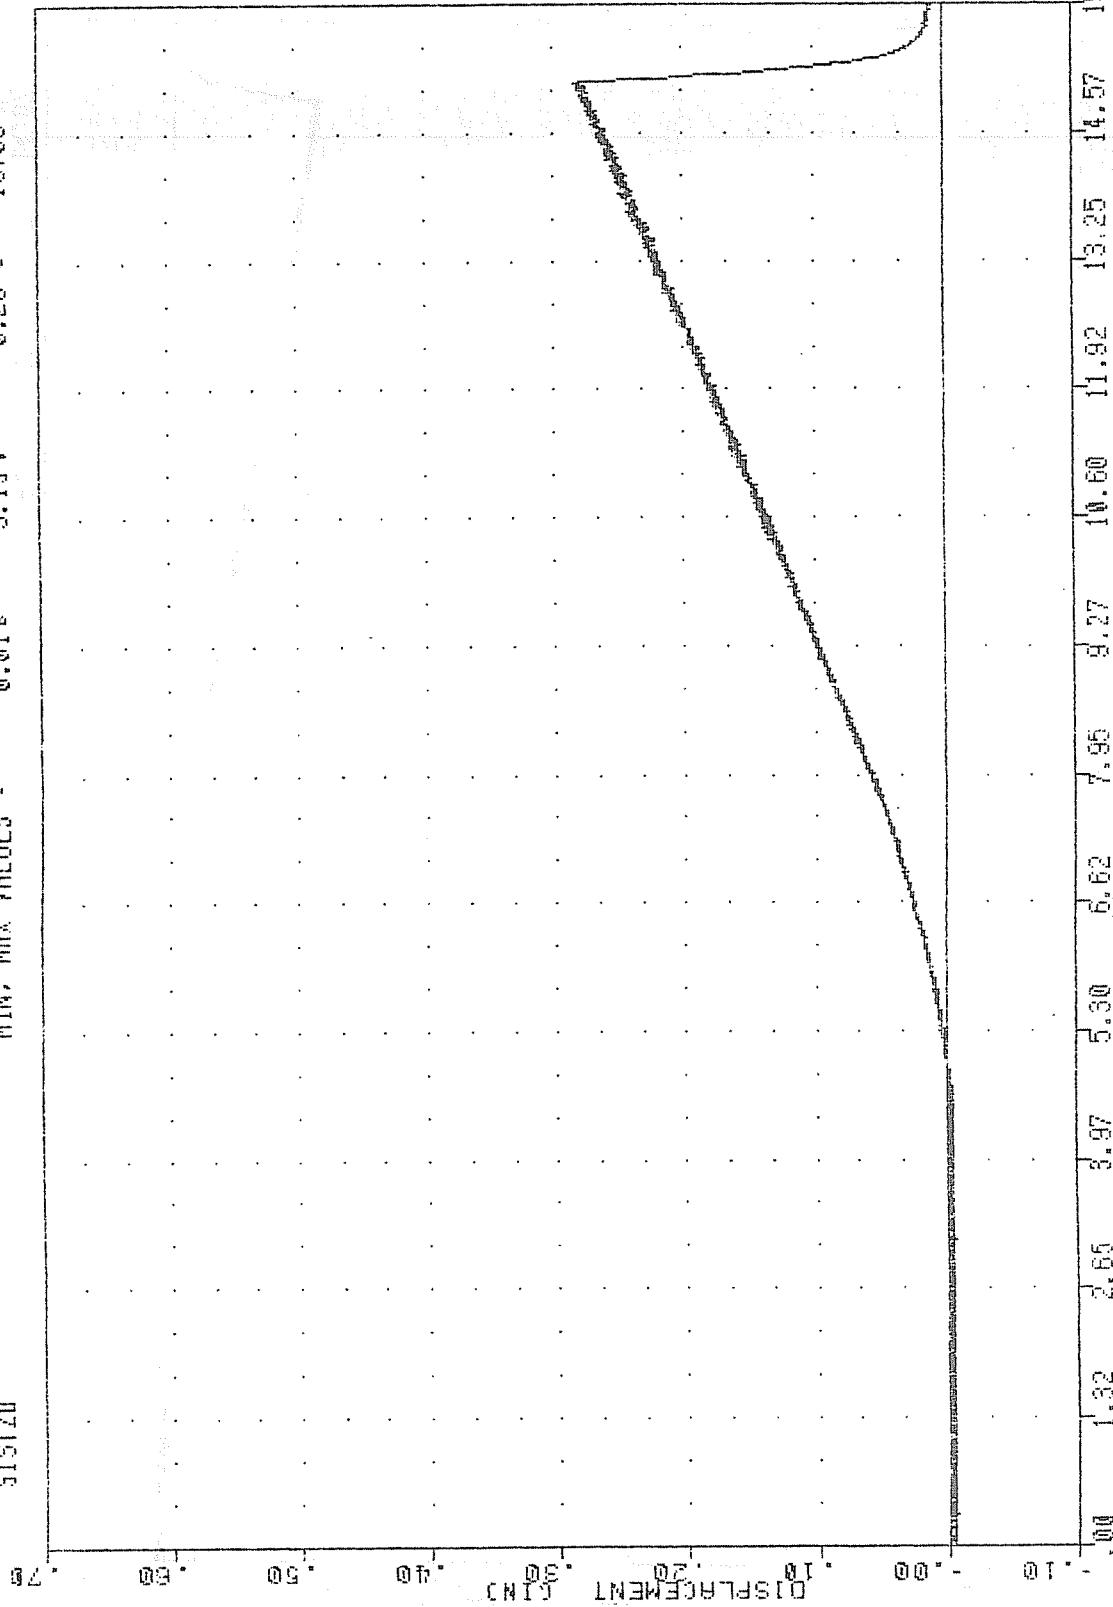


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 STARBOARD INBOARD SEAT TRACK DEFLECTION

F88 POSTZO 100/ 316/ -40 MIN. MAX = 0.00% 0.03% 15.03
 LOAD FILTER = BLPF 100/ 316/ -40 MIN. MAX = -103.90% 4454.23% 15.09

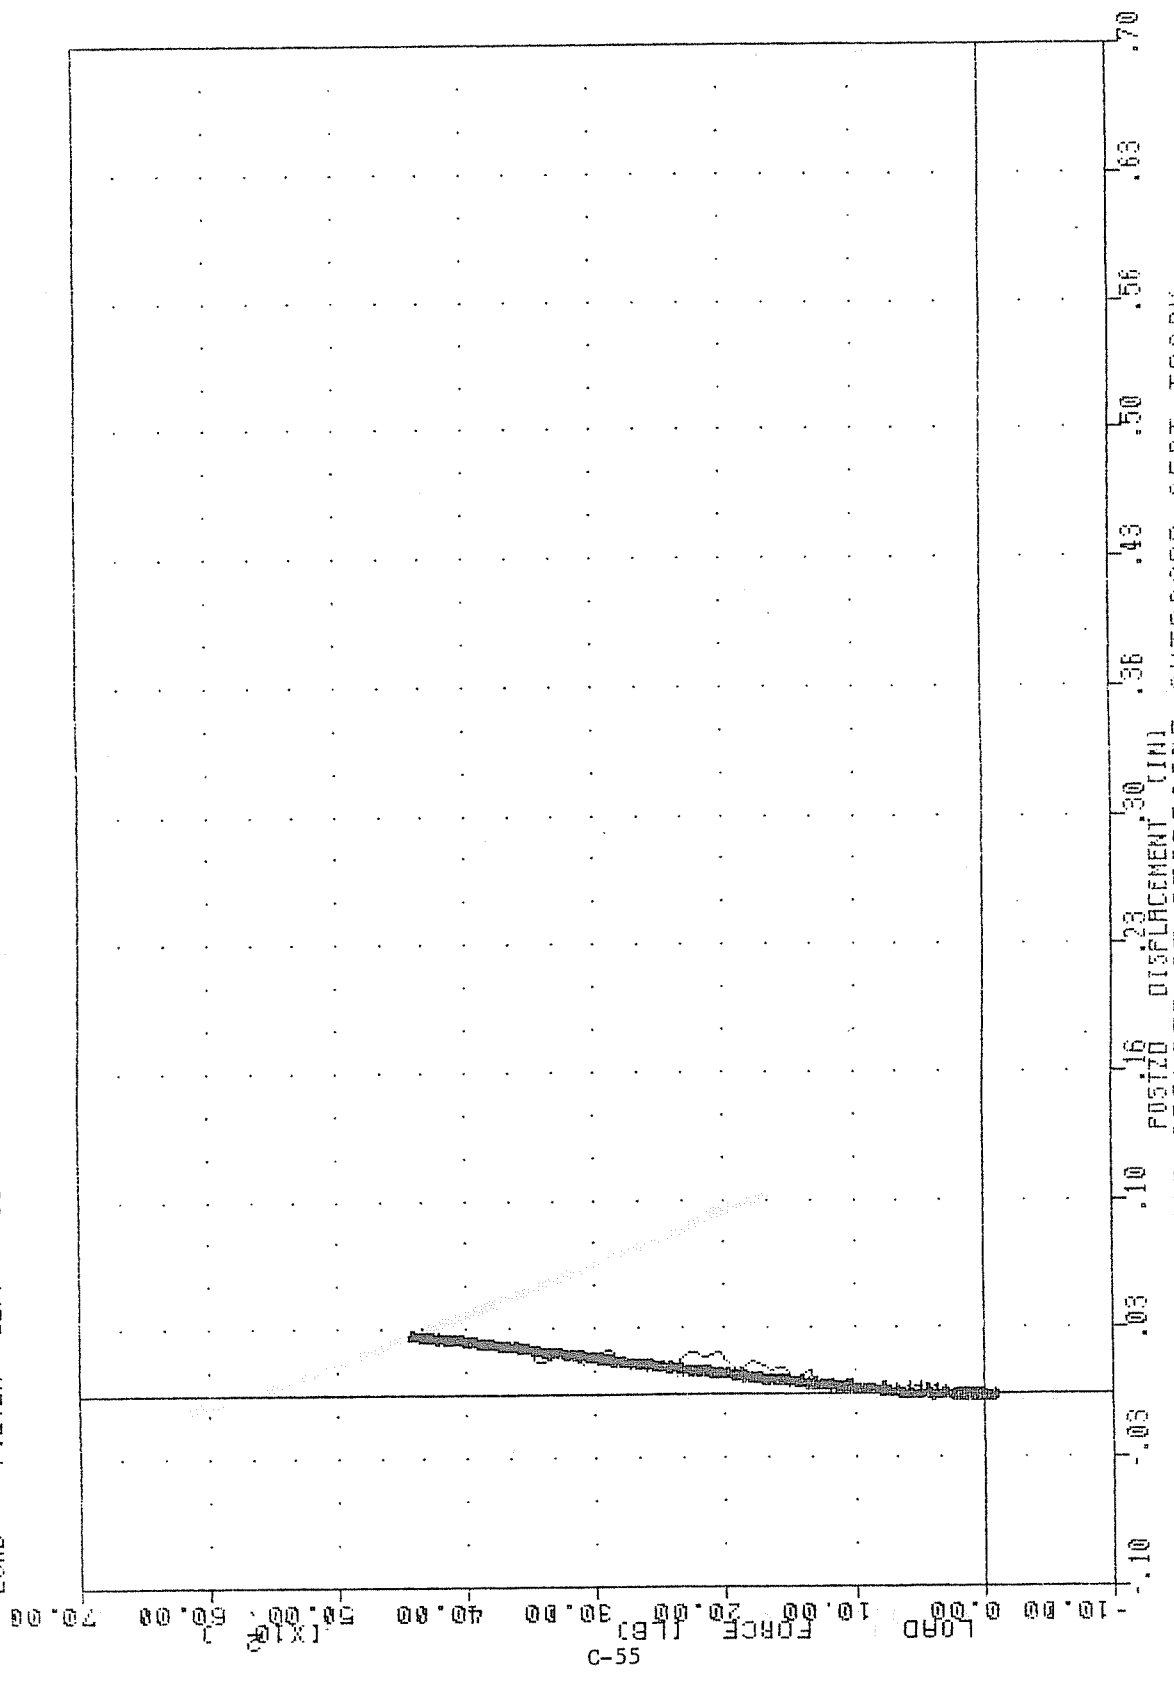


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD SEAT TRACK DEFLECTION

FRR TEST04 VERTICAL PULL TESTS
 PISTZO FILTER = BLPF 100/ 316/ -40 MIN, MAX = 0.11% 15.10
 LOAD FILTER = BLPF 100/ 316/ -40 MIN, MAX = 4454.23% 15.09

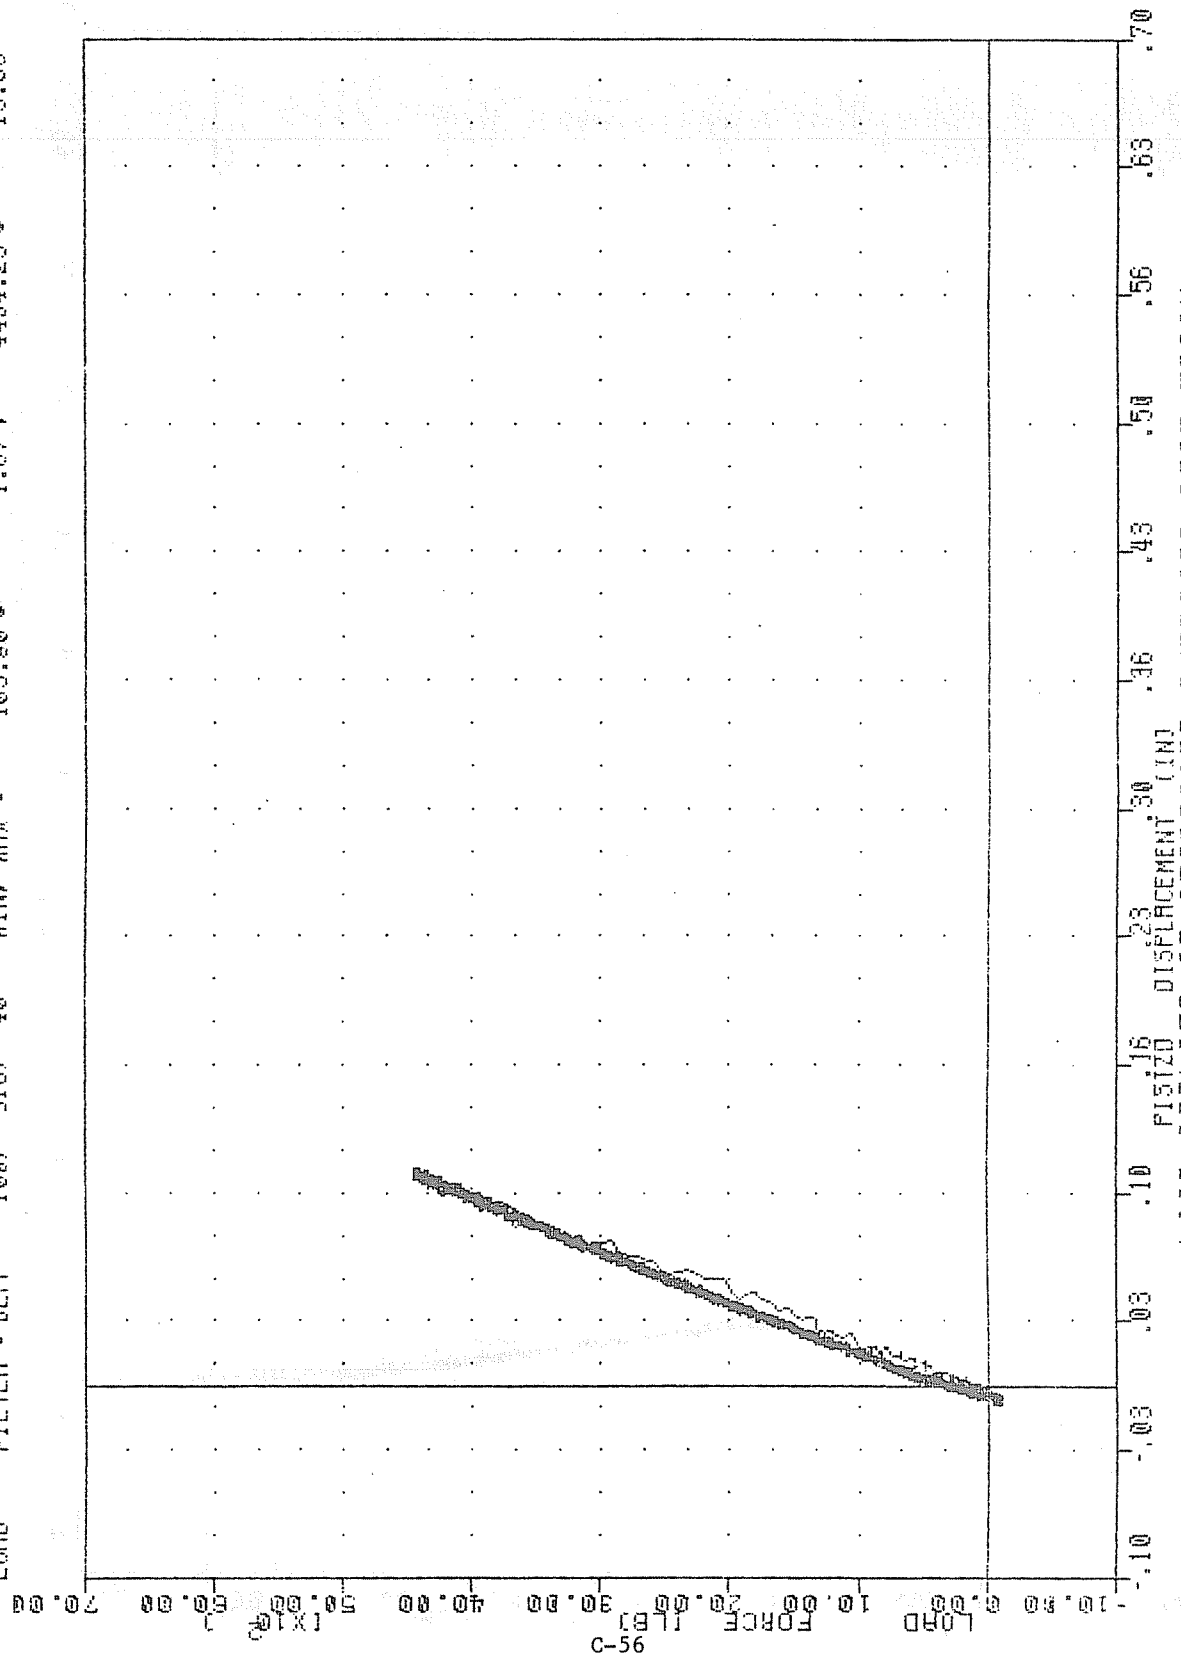


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT INBOARD SEAT TRACK DEFLECTION

PRC TEST04 VERTICAL FULL TESTS 88071 3.15 0.28 15.09
 SYSZD FILTER : BLPF 100/ 318/ -40 MIN, MAX : -0.01 4454.28 15.09
 LOAD FILTER : BLPF 100/ 318/ -40 MIN, MAX : -103.00

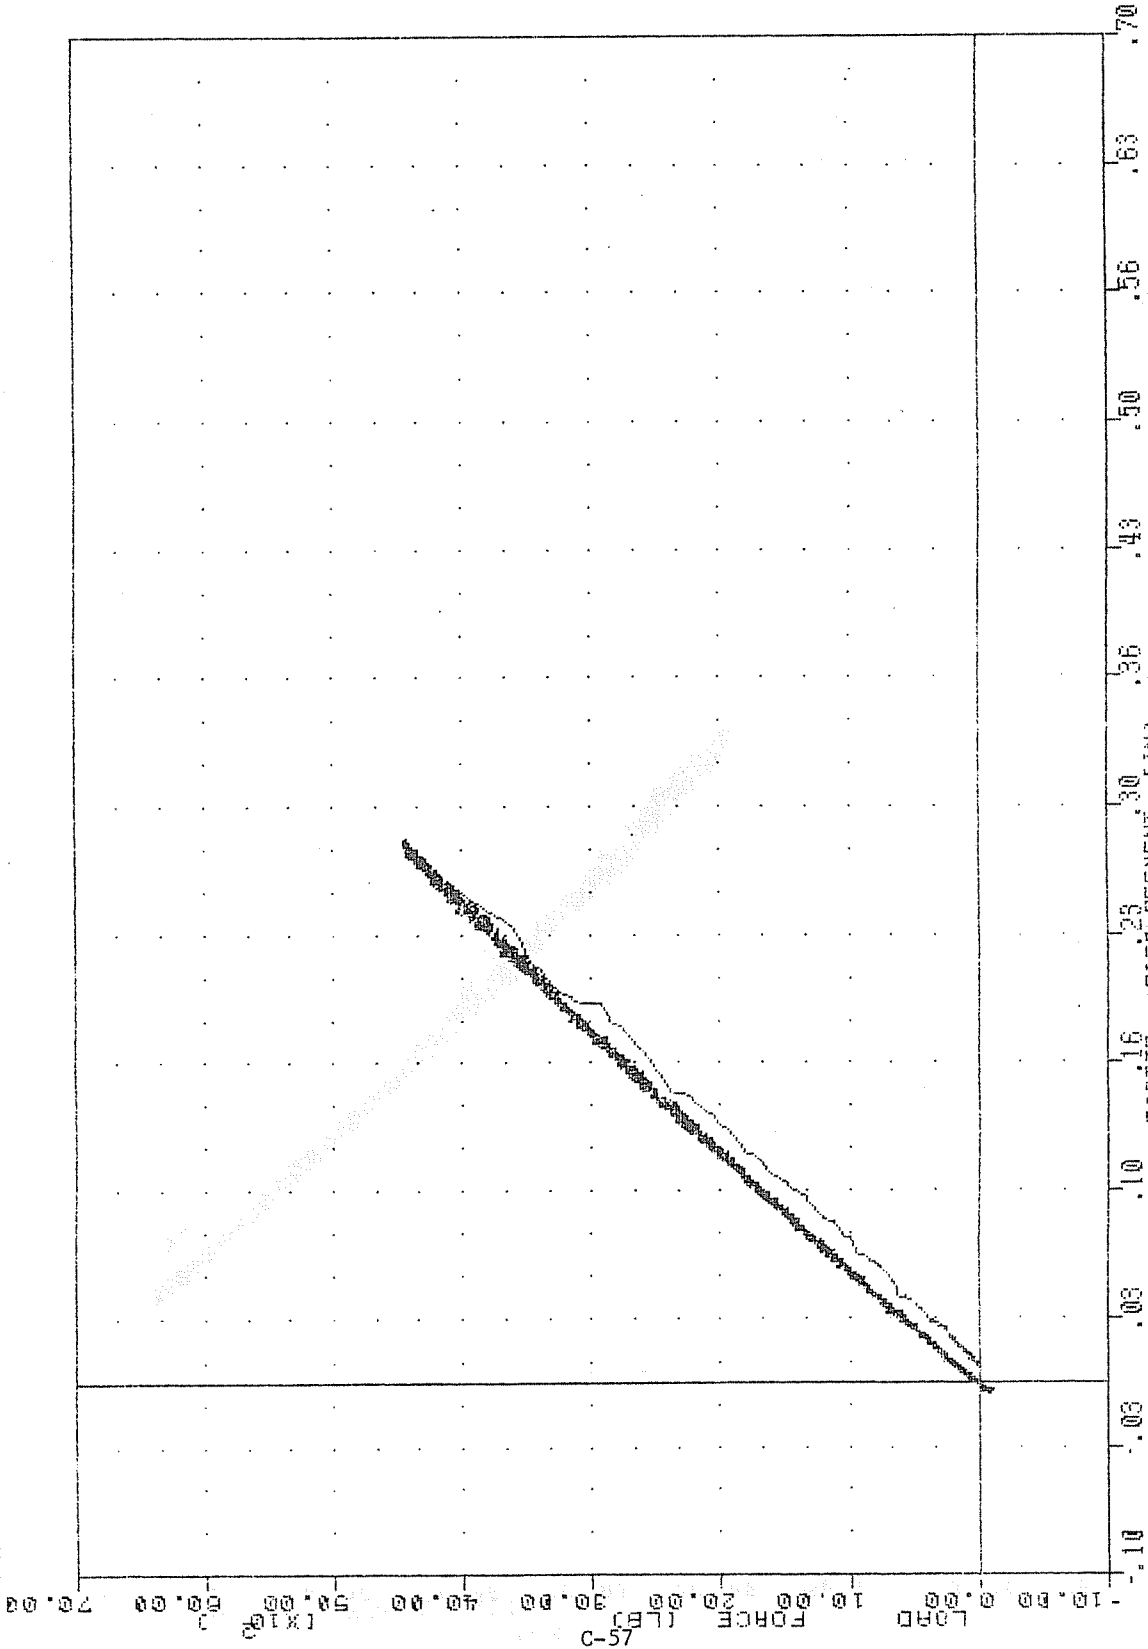


LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD SEAT TRACK DEFLECTION

FAR TEST04 VERTICAL PULL TEST 80071
 305120 FILTER = BLPF 100/ 316/ -40 MIN, MAX = 0.03 0 0.54 0 15.06
 LOAD FILTER = BLPF 100/ 316/ -40 MIN, MAX = -143.00 0 1.87 0 15.00

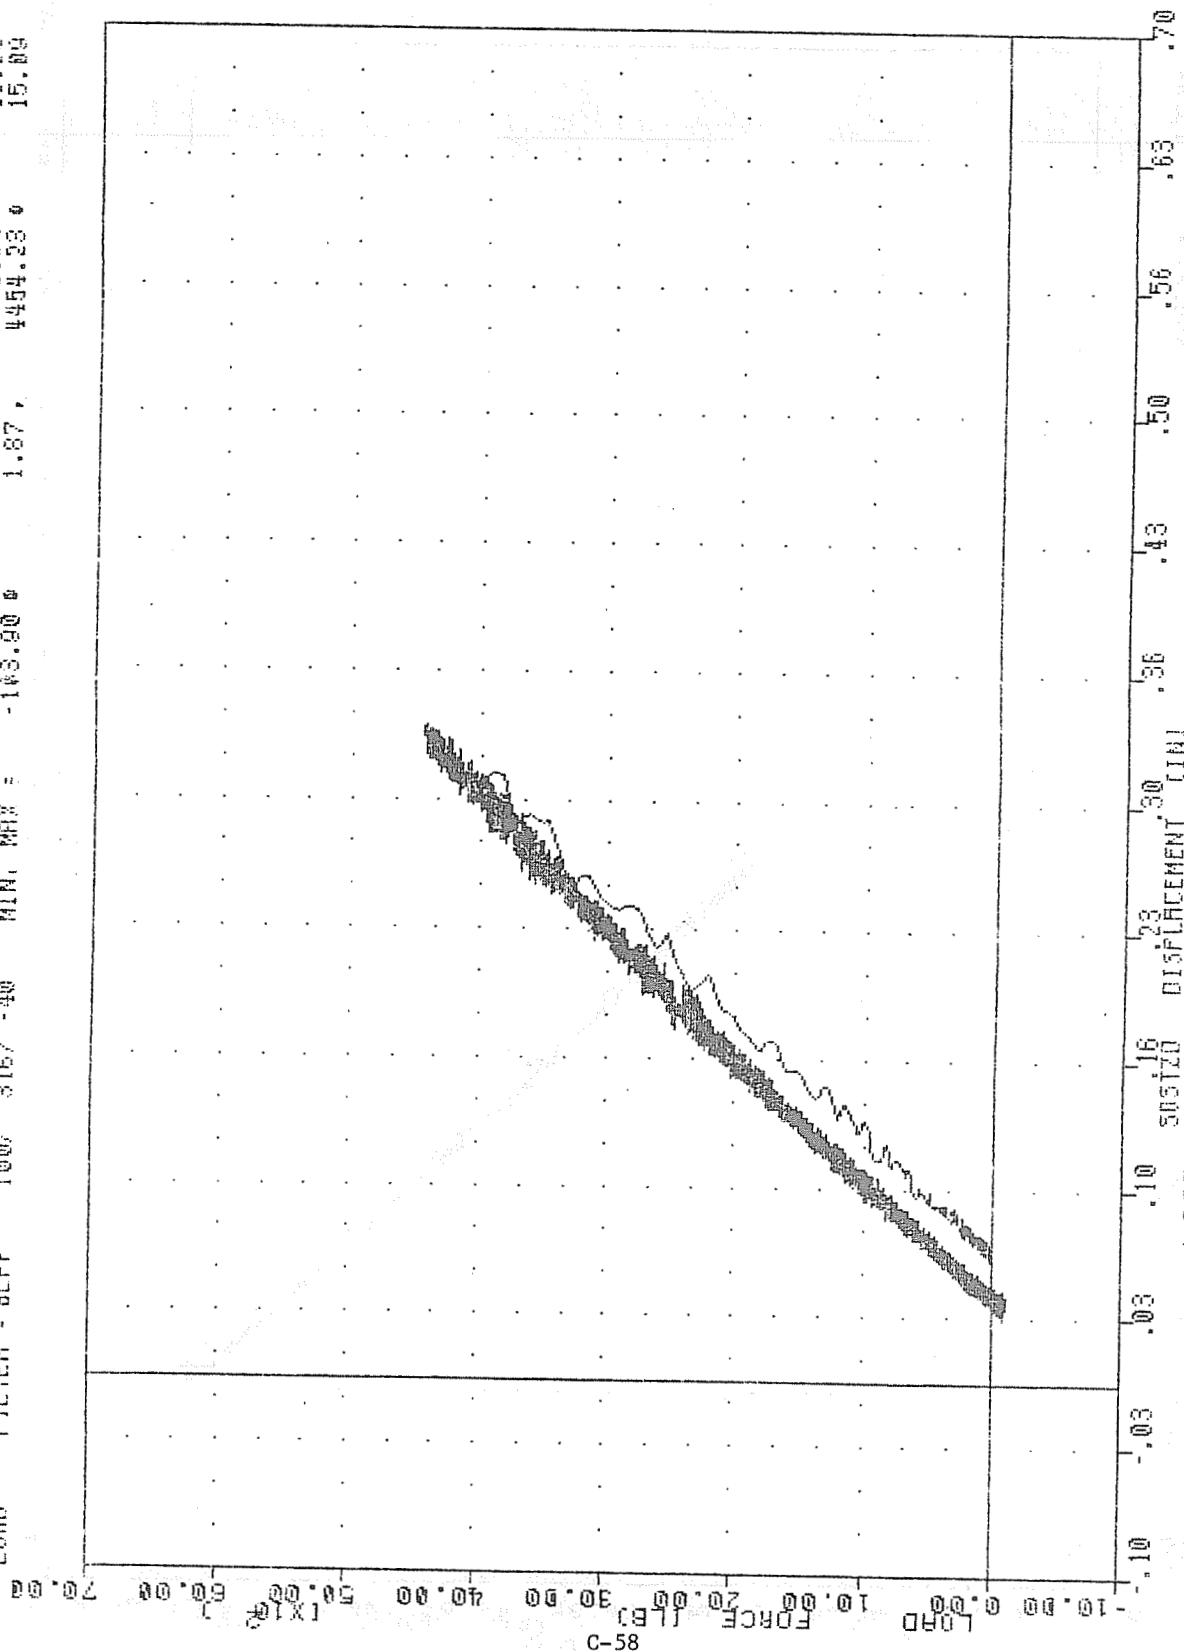


LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK

FRG TESTING VERTICAL FULL TESTS 88071 15.10 0.06 % 1.21
 P063 FILTER = BLPF 100/ 316/ -40 MIN. MAX = -3.34 % 4454.23 % 15.00
 LOAD FILTER = BLPF 100/ 316/ -40 MIN. MAX = -103.00 %

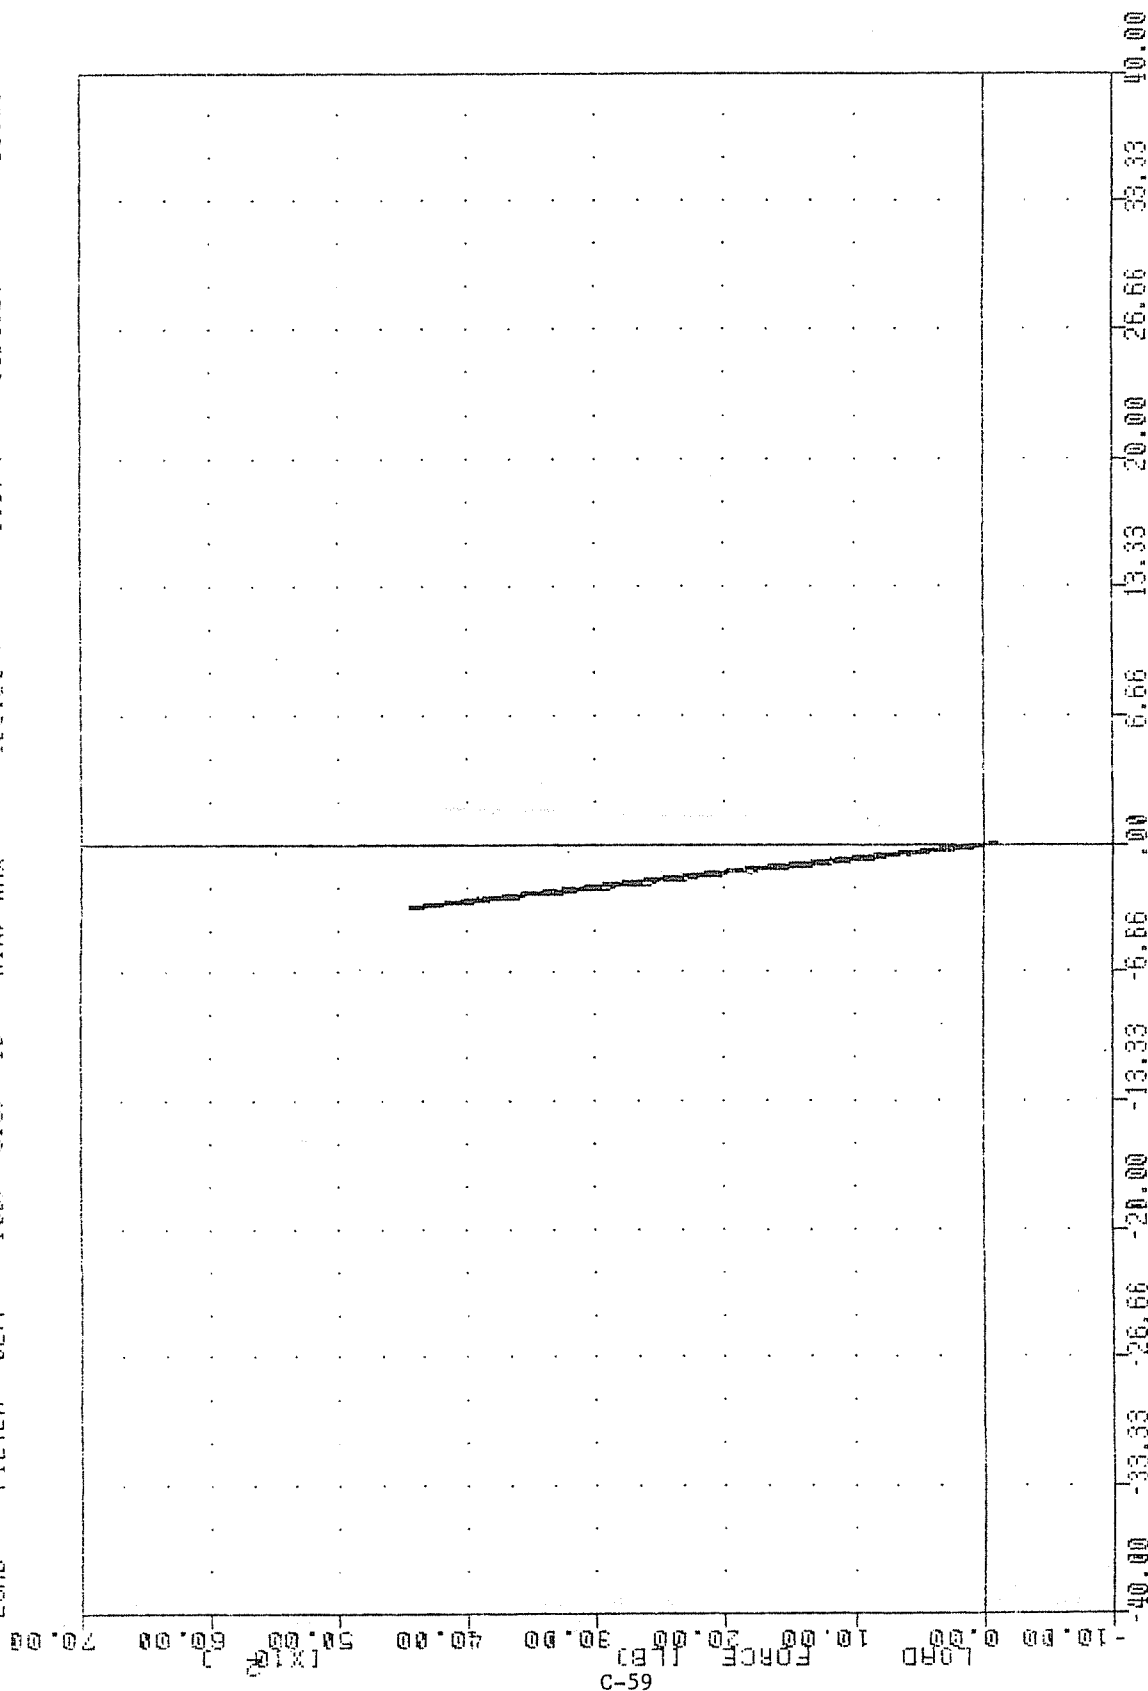

LOAD APPLIED AT SEAT TRACK VS PORT OUTBOARD BEAM STRAIN
 LOAD APPLIED AT SEAT TRACK VS PORT OUTBOARD SEAT TRACK


FIBS
 LOAD
 TEST04
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX :
 MIN. MAX :
 0.14
 15.03
 0.00
 4454.23
 0.14
 15.09

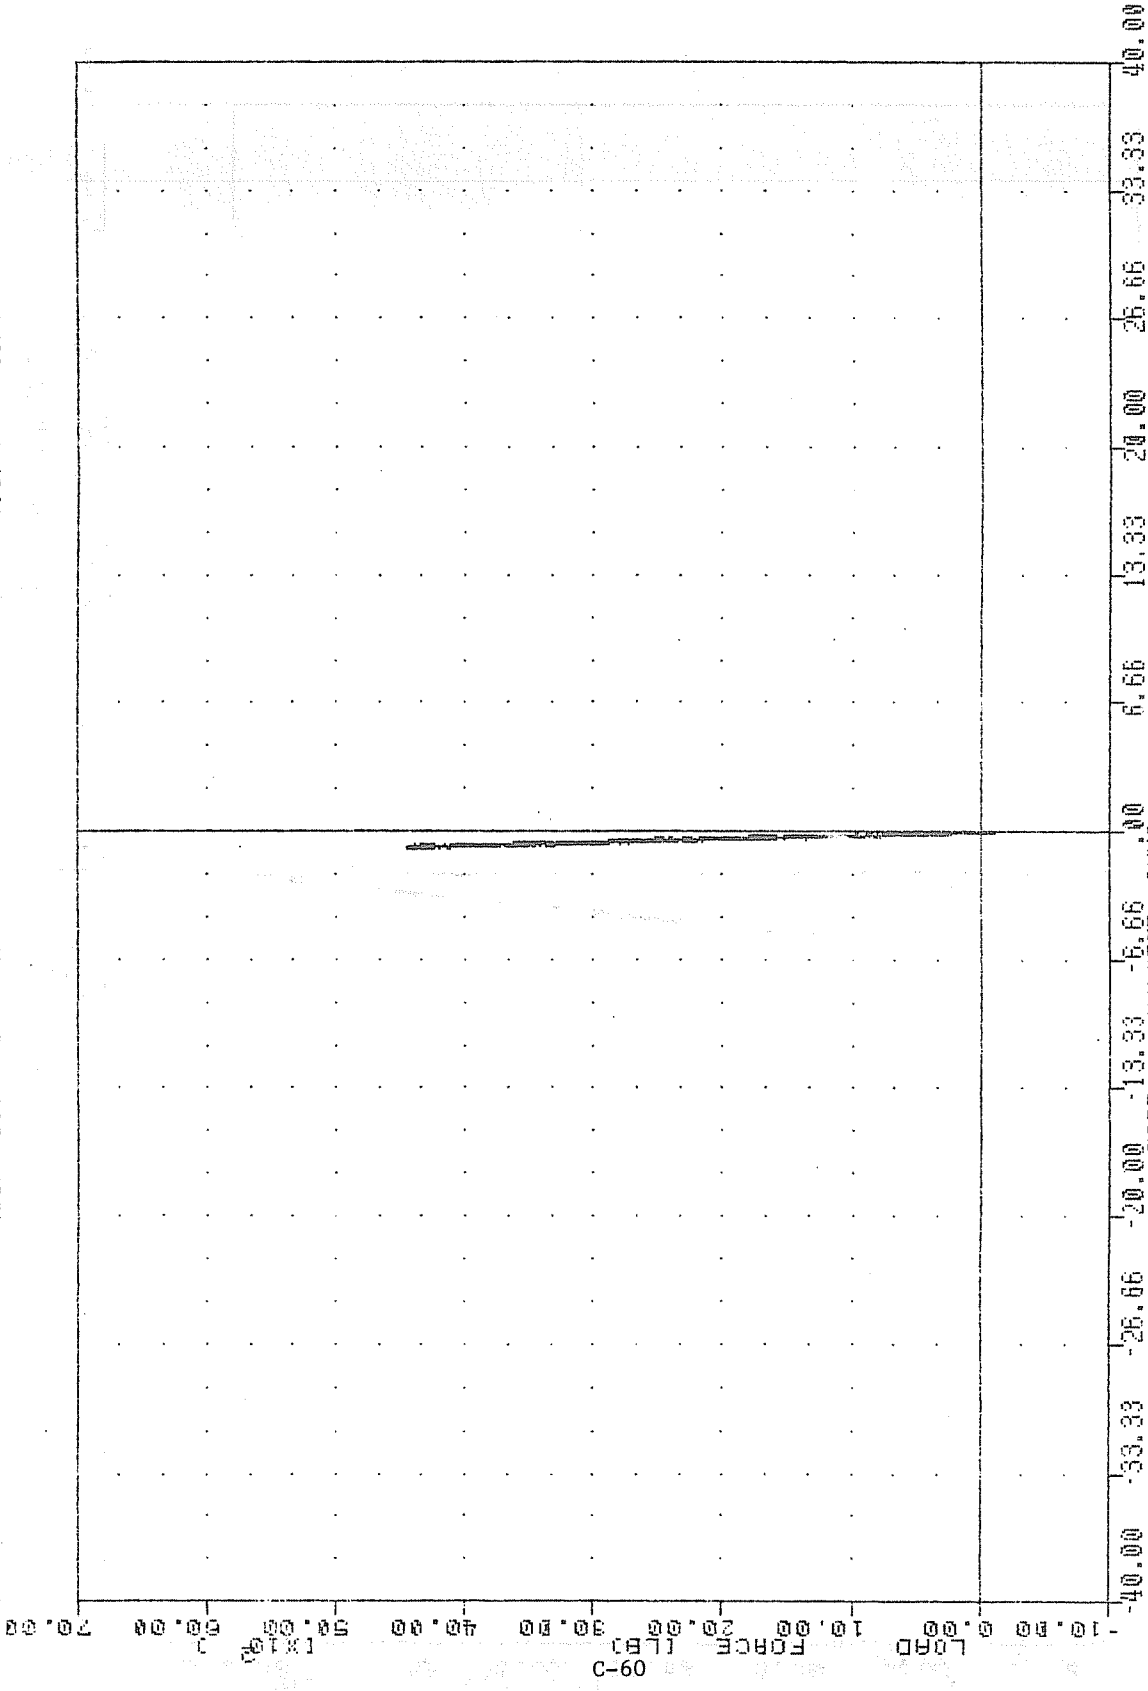

FIBS
 LOAD
 TEST04
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX :
 MIN. MAX :
 0.14
 15.03
 0.00
 4454.23
 0.14
 15.09

FIBS
 LOAD
 TEST04
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN. MAX :
 MIN. MAX :
 0.14
 15.03
 0.00
 4454.23
 0.14
 15.09

FRA
 3183
 LOAD
 TEST 04
 FILTER = BLPF
 FILTER = BLPF
 VERTICAL PULL TESTS
 100/ 316/ -40
 100/ 315/ -40
 MIN. MAX =
 MIN. MAX =
 83071
 -0.24 2
 -193.90 6
 1.06
 1.87
 9.05 2
 4954.23 2
 15.09
 15.09

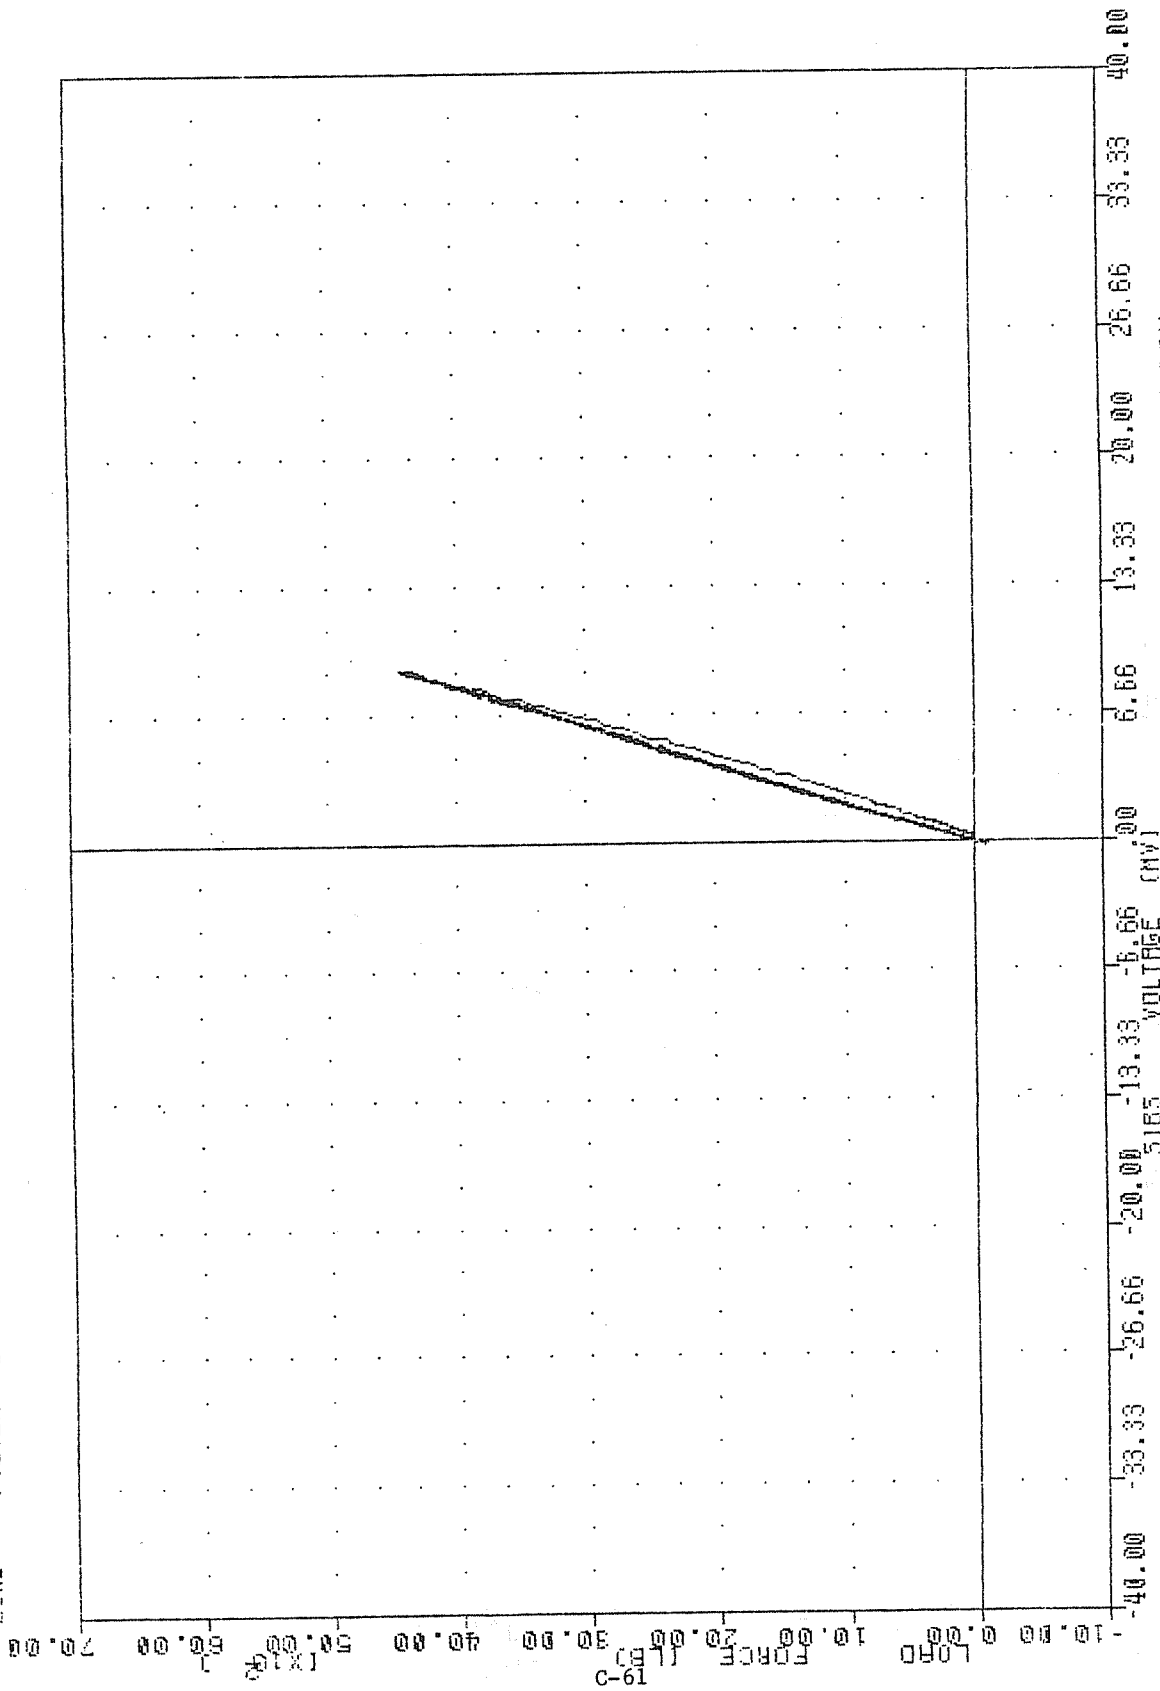

LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD BEAM STRAIN

FAR
SUBS
LOAD

TEST#4
FILTER = BLPF
FILTER = BLPF


VERTICAL PULL TESTS
100/ 316/ -40 MIN, MAX =
100/ 316/ -40 MIN, MAX =

83071
-13.46
-102.00

15.10
1.87
-0.36
4451.23

0.96
16.09

70.00
60.00
50.00
40.00
30.00
20.00
10.00
0.00
-10.00
-20.00
-30.00
-40.00

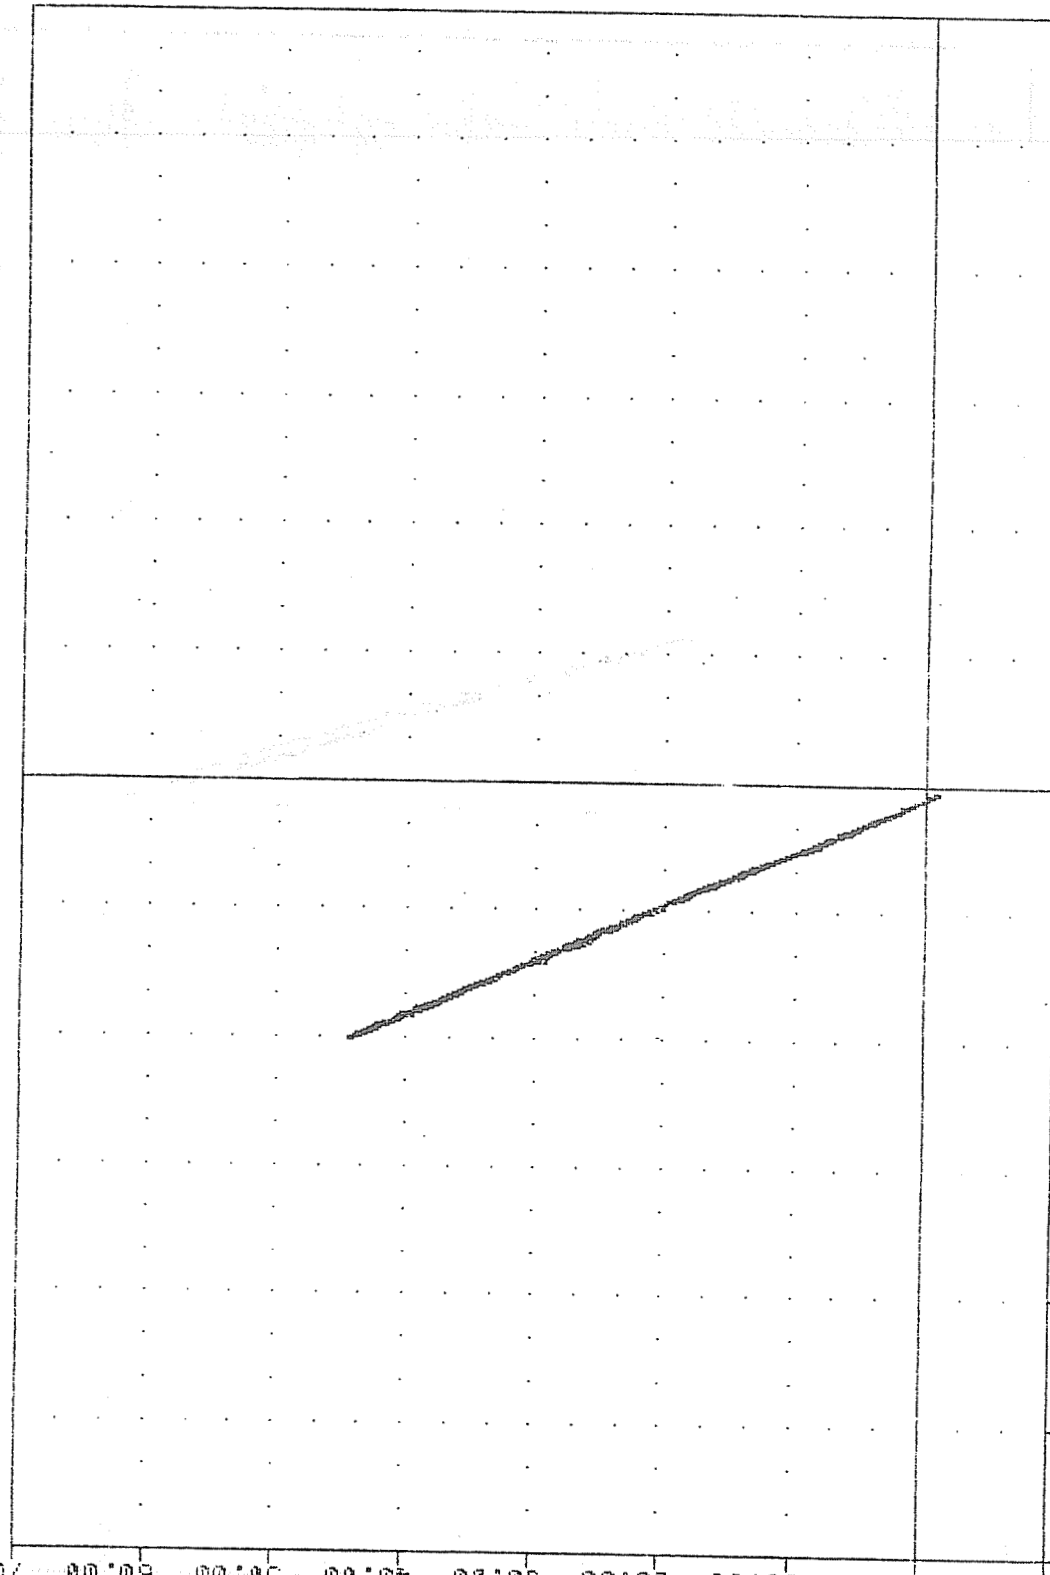


-40.00 -33.33 -26.66 -20.00 -13.33 -6.66 0.00 6.66 13.33 20.00 26.66 33.33 40.00

LOAD APPLIED AT STARBOARD OUTBOARD SEAT TRACK
LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD BEAM STRAIN

FAR TEST05
 VERTICAL PULL TESTS
 88071
 LOAD

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -120.95% 0.38, 4730.23 % 14.88

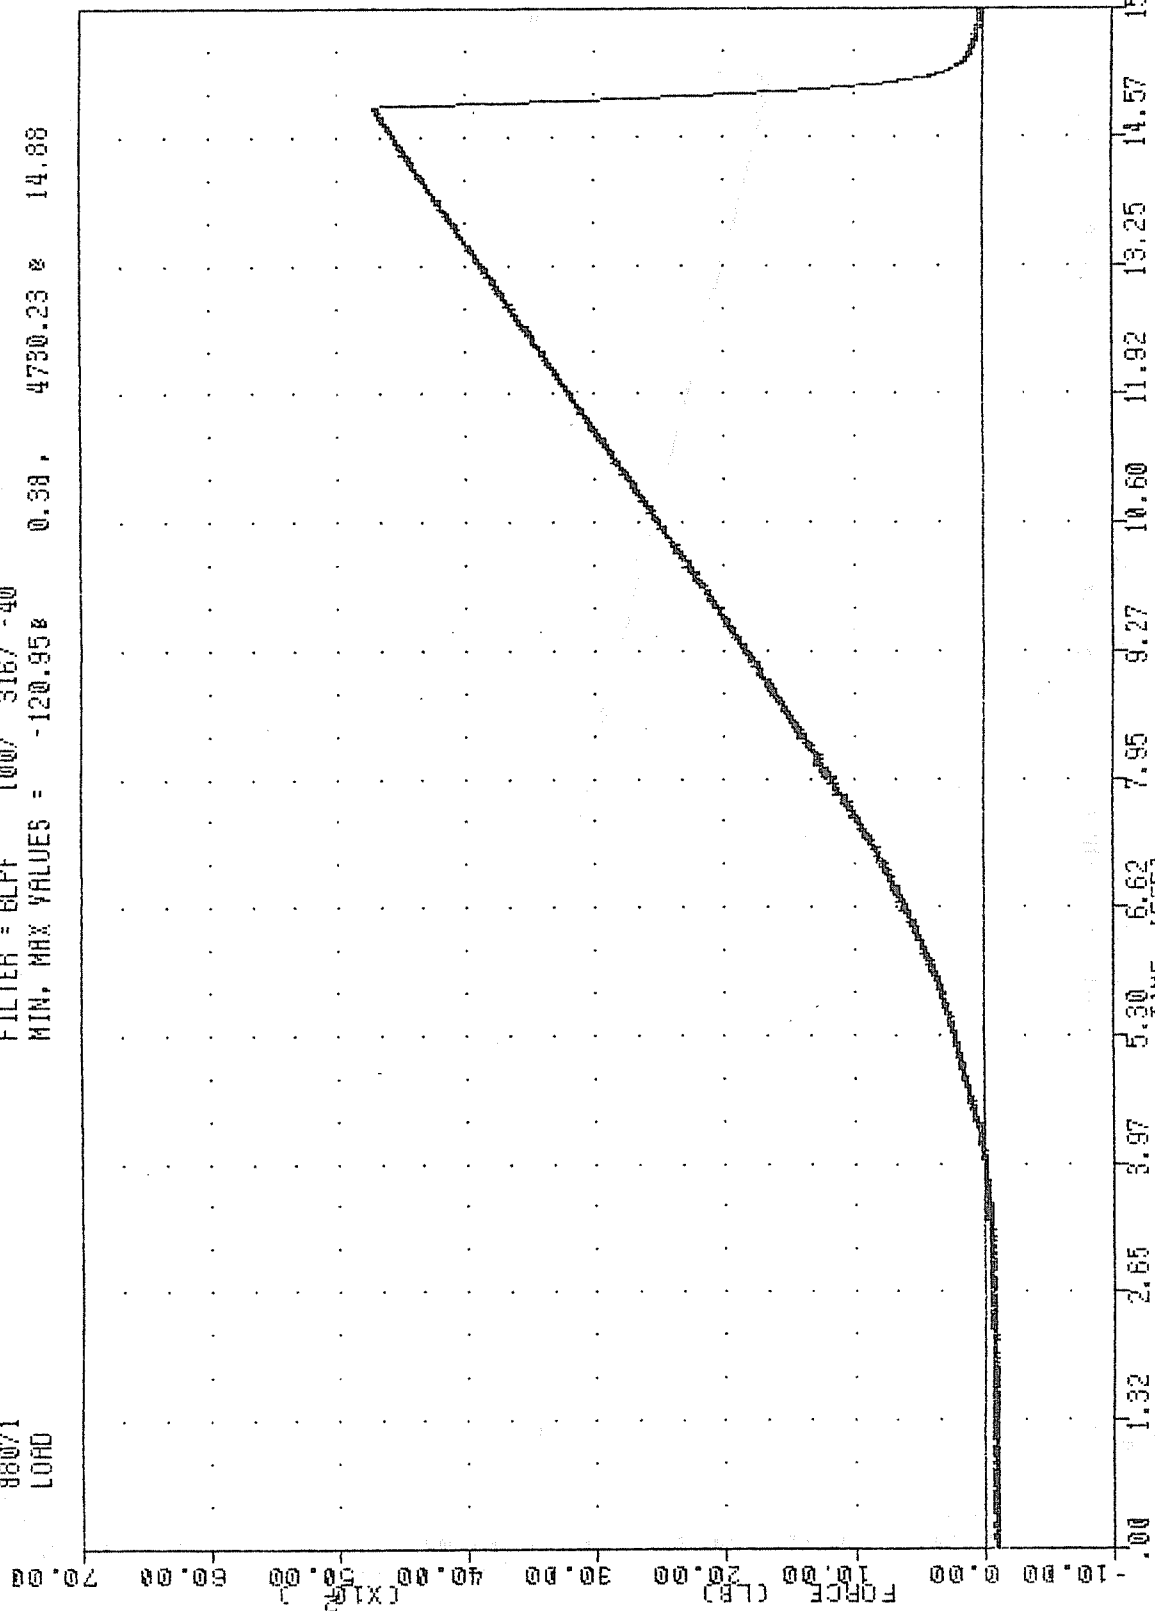


LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK

FRA , TEST05
 VERTICAL PULL TESTS
 88071
 POBS

FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.06e 0.93, 18.70 e 14.88

VOLTAGE (MV)

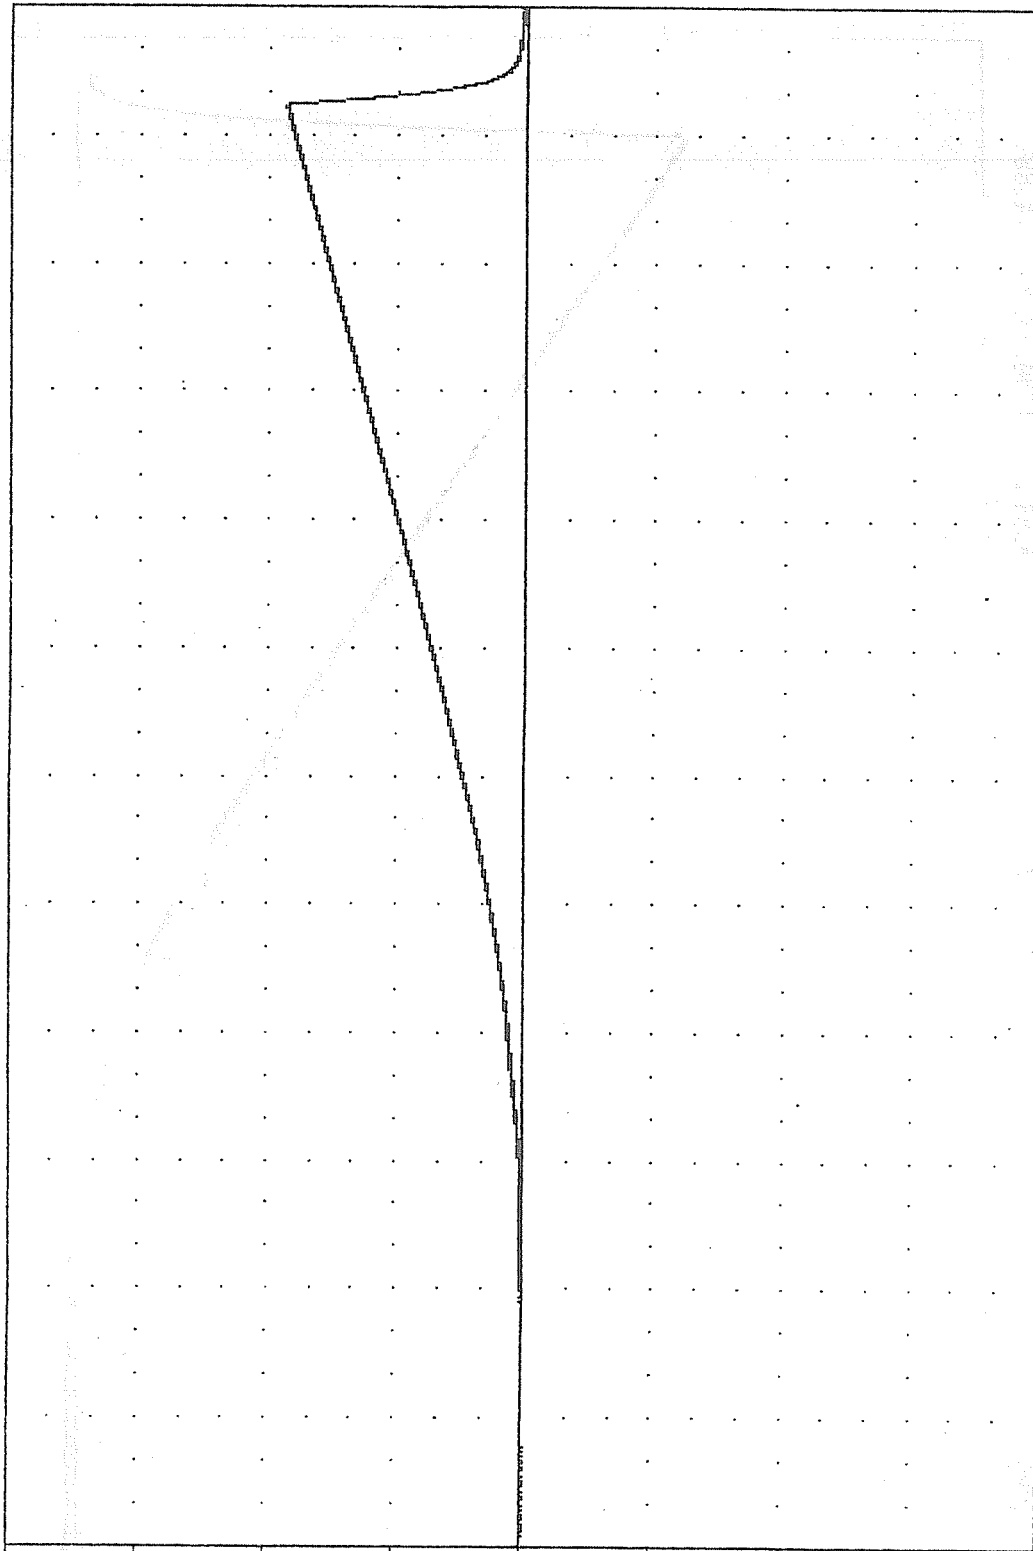

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 PORT OUTBOARD BEAM STRAIN

FAR , TEST05

VERTICAL PULL TESTS

88071

PIBS


FILTER = BLPF 100/ 316/-40

MIN, MAX VALUES = -0.152

0.63,

8.17 e

14.88

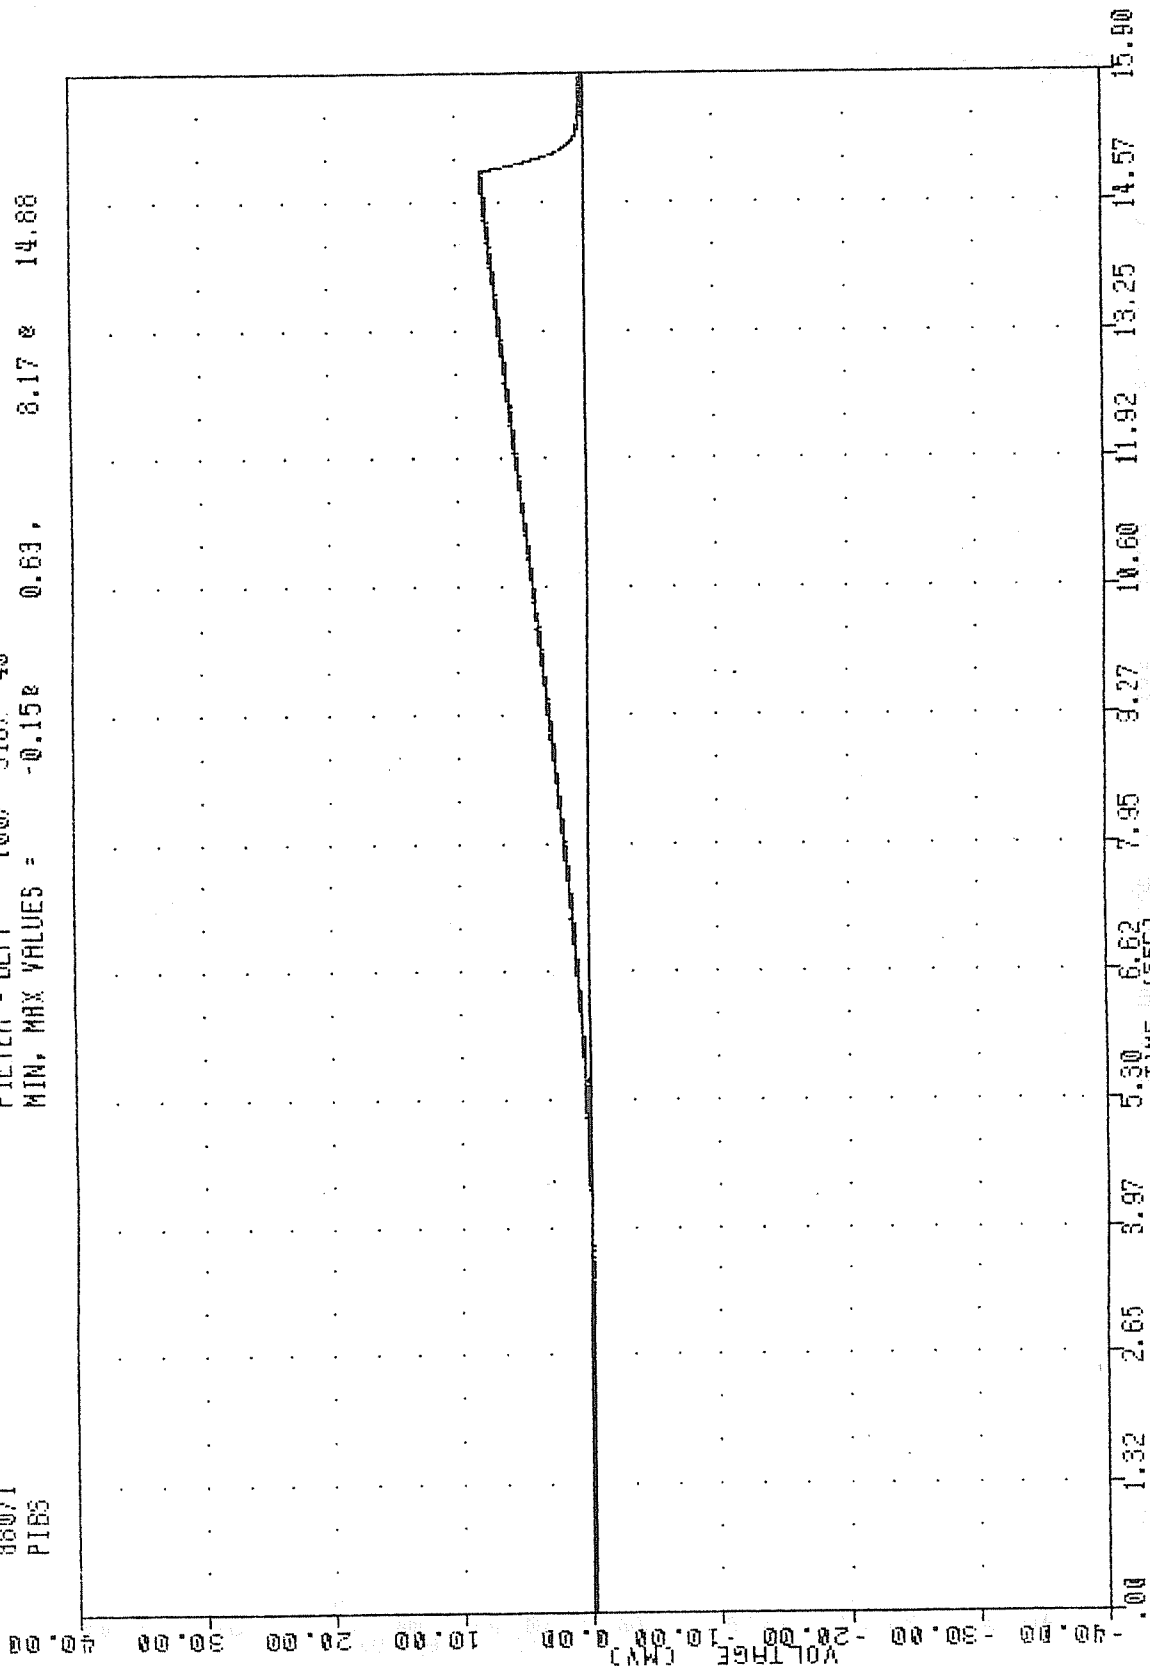


LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
PORT INBOARD BEAM STRAIN

FAH , TEST05
 VERTICAL PULL TESTS
 88071
 SIBS

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = -1.29 14.78

-0.16 0.71

VOLTAGE (MV) 40.00 30.00 20.00 10.00 0.00 -10.00 -20.00 -30.00 -40.00

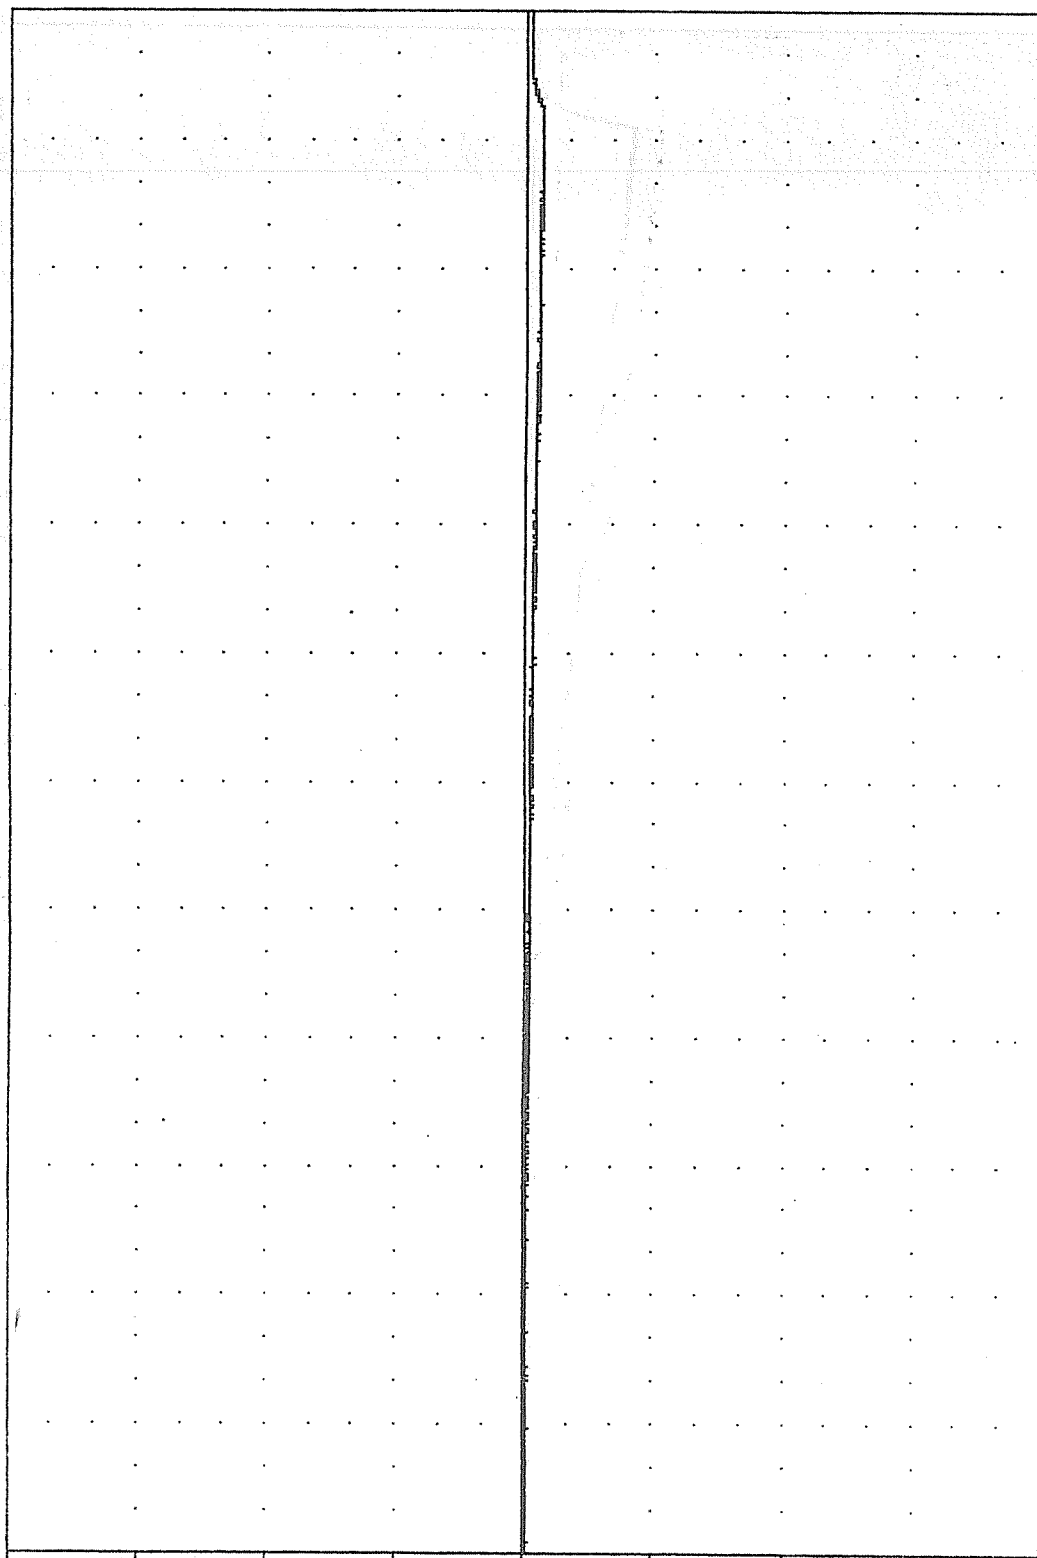

15.90

14.57

13.25

11.92

10.60

9.27

7.95

6.62

5.30

3.97

2.65

1.32

0.00

TIME (SEC)

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 STARBOARD INBOARD BEAM STRAIN

FAR , TEST05

VERTICAL PULL TESTS

83071

5085

FILTER = BLPF 100/ 316/ -40


MIN. MAX VALUES = -0.498

2.04

2.40

14.88

VOLTAGE (MV)

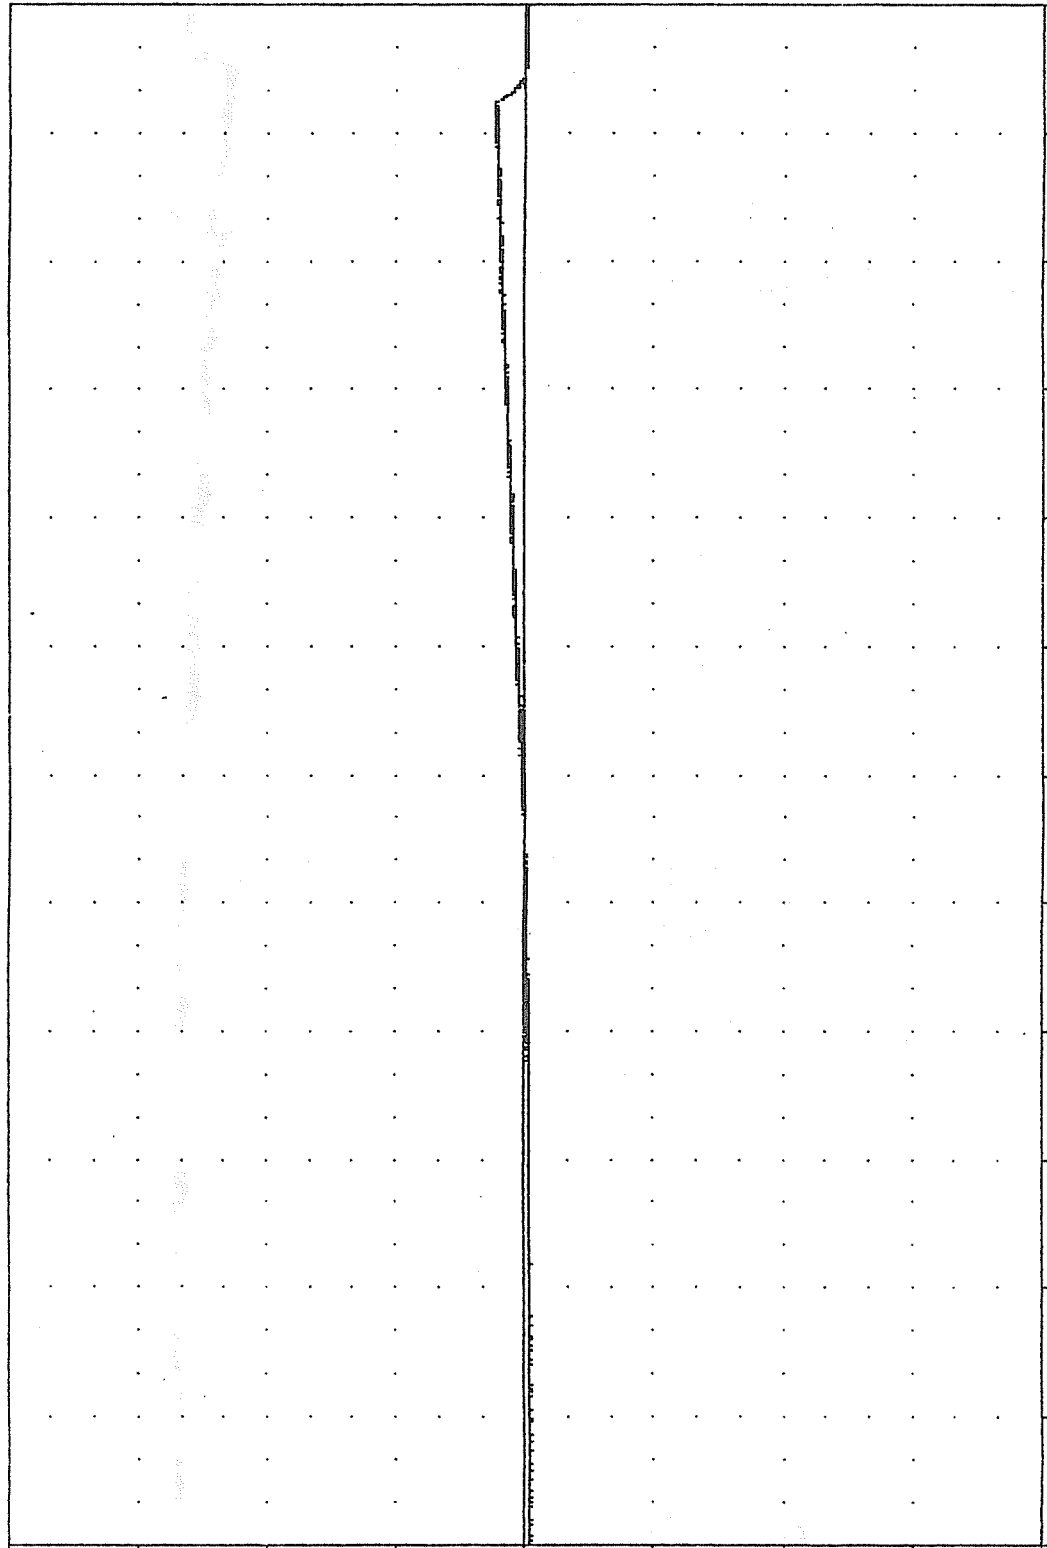


LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
STARBOARD OUTBOARD BEAM STRAIN

FRA , TEST05
 VERTICAL PULL TESTS
 88071
 905TZ0

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.030 0.70 0.10 12.95

70

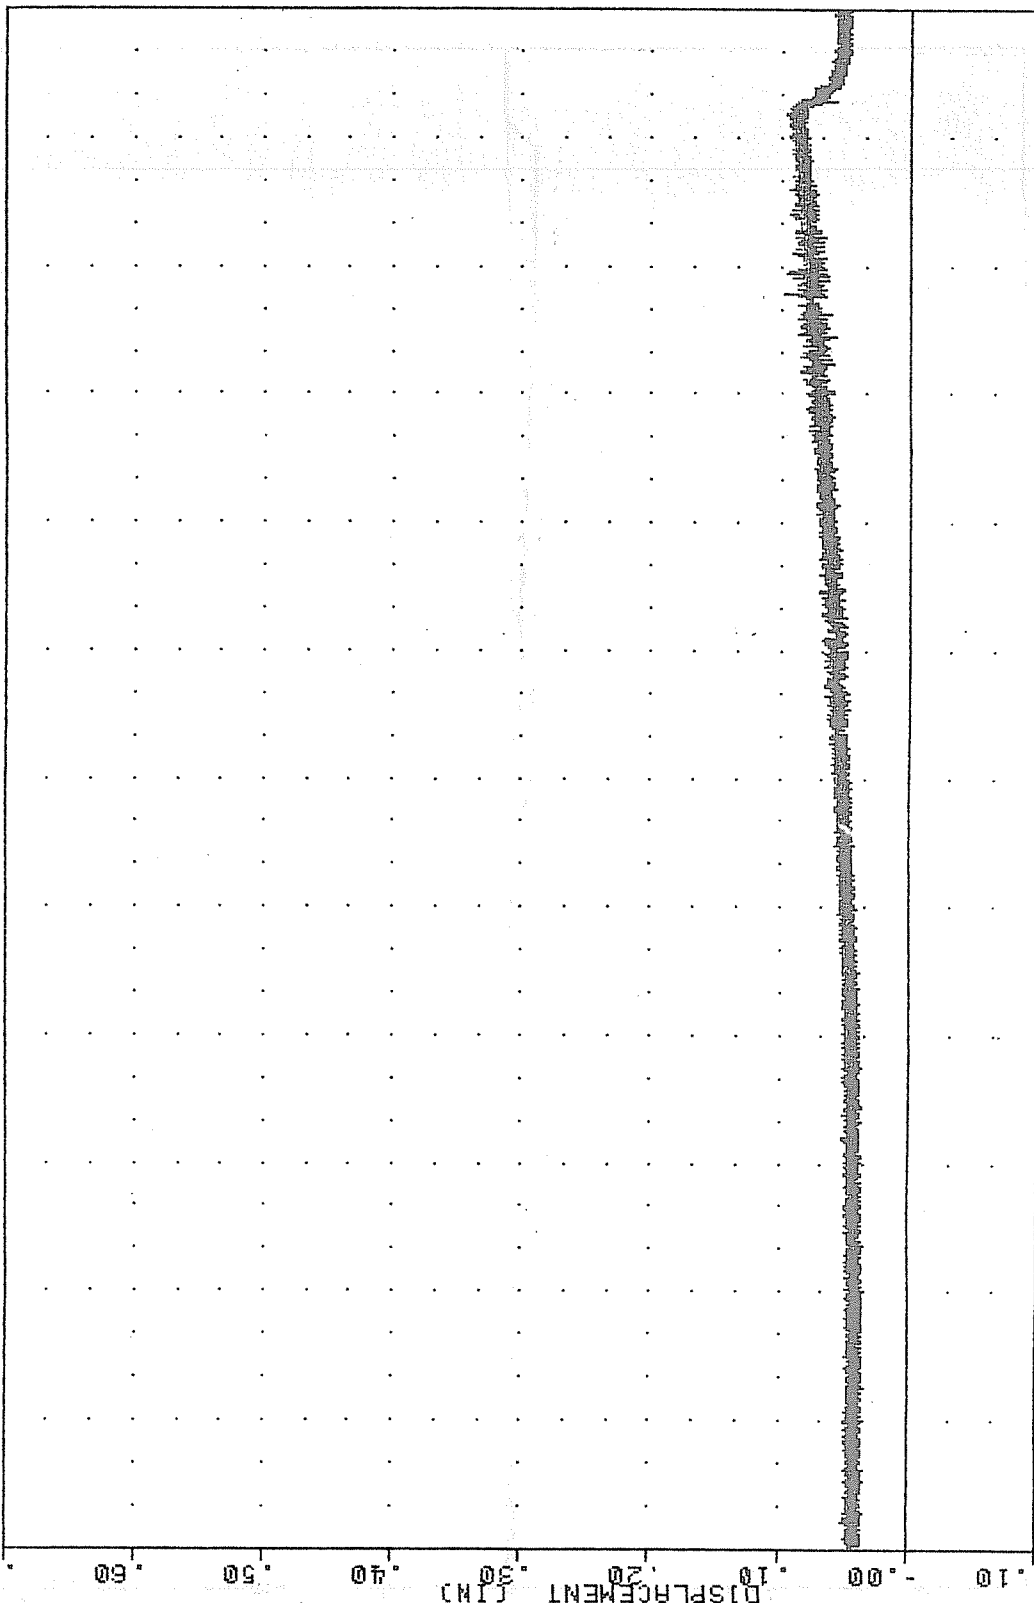


0.00 1.32 2.65 3.97 5.30 6.62 7.95 9.27 10.60 11.92 13.25 14.57 15.90

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 STARBOARD OUTBOARD SEAT TRACK DEFLECTION

FAA , TEST05
 VERTICAL PULL TESTS
 88071
 S1STZD


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = 0.00e 2.74, 0.12 e 14.85

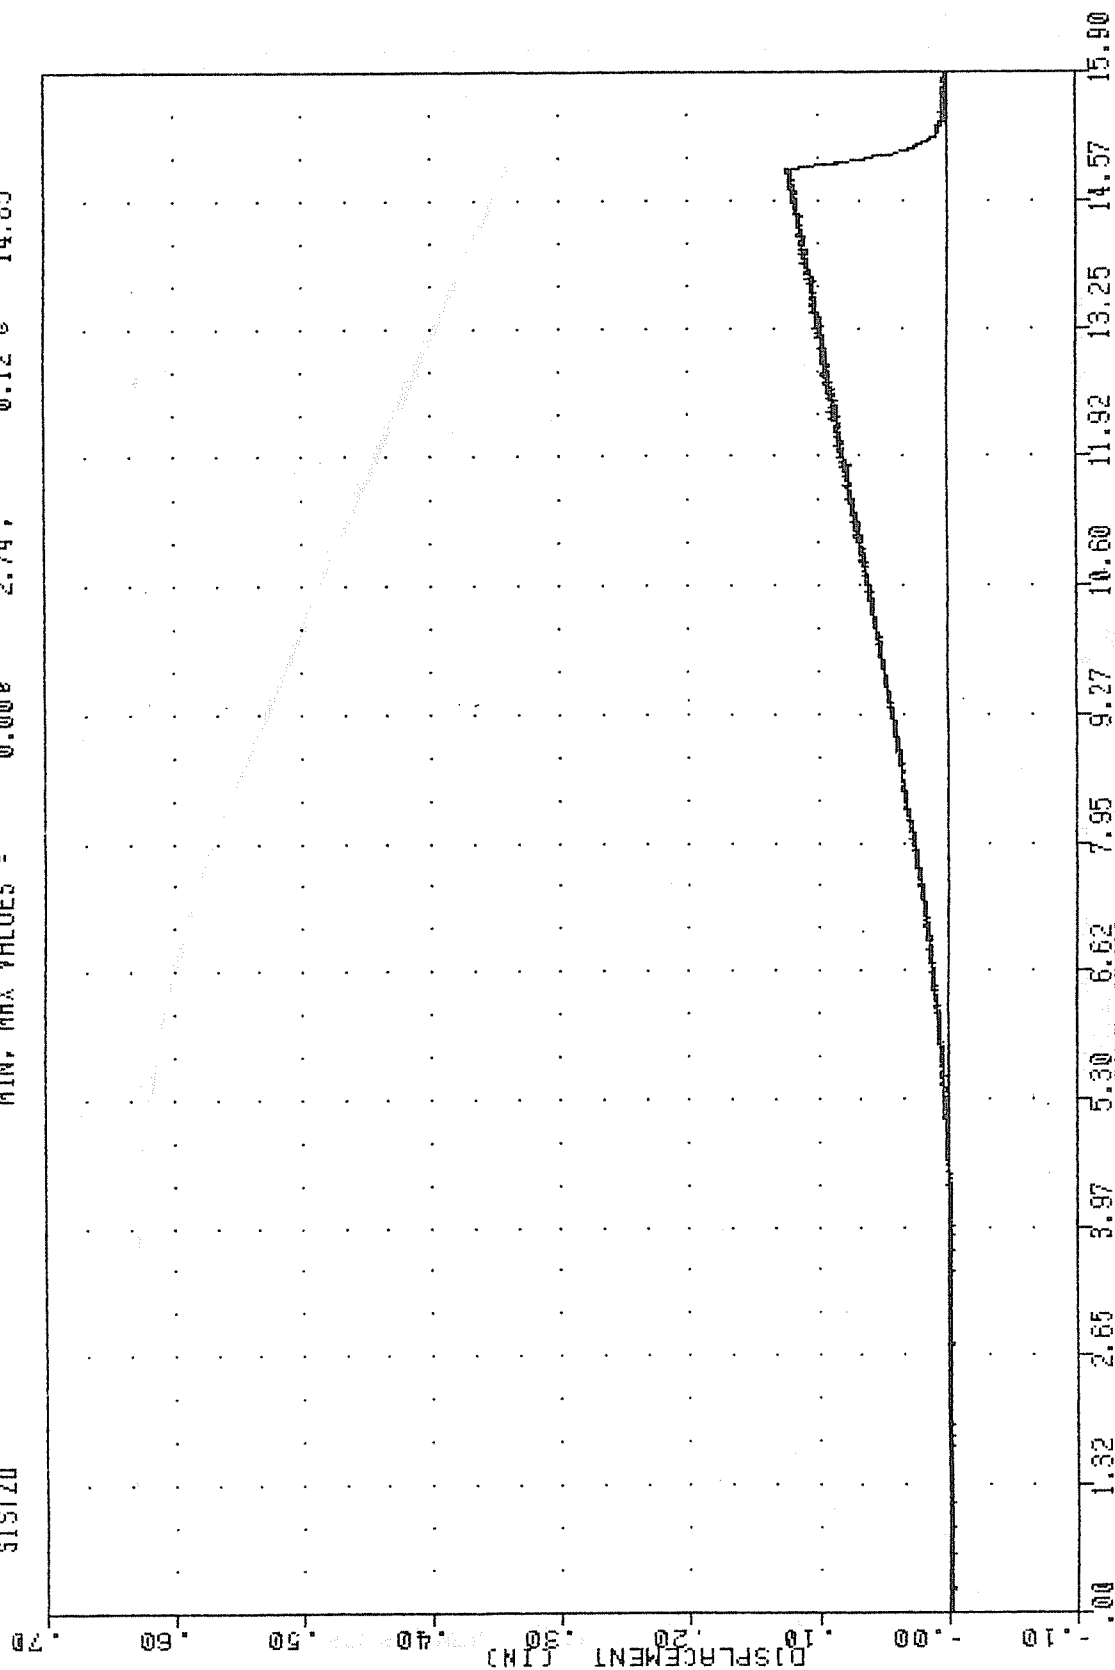

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 STARBOARD INBOARD SEAT TRACK DEFLECTION

FRA , TEST05
 VERTICAL PULL TESTS
 88071
 P15120


FILTER = BLPF 100/ 316/ -40
 MIN, MAX VALUES = -0.018 0.27, 0.30 @ 14.89

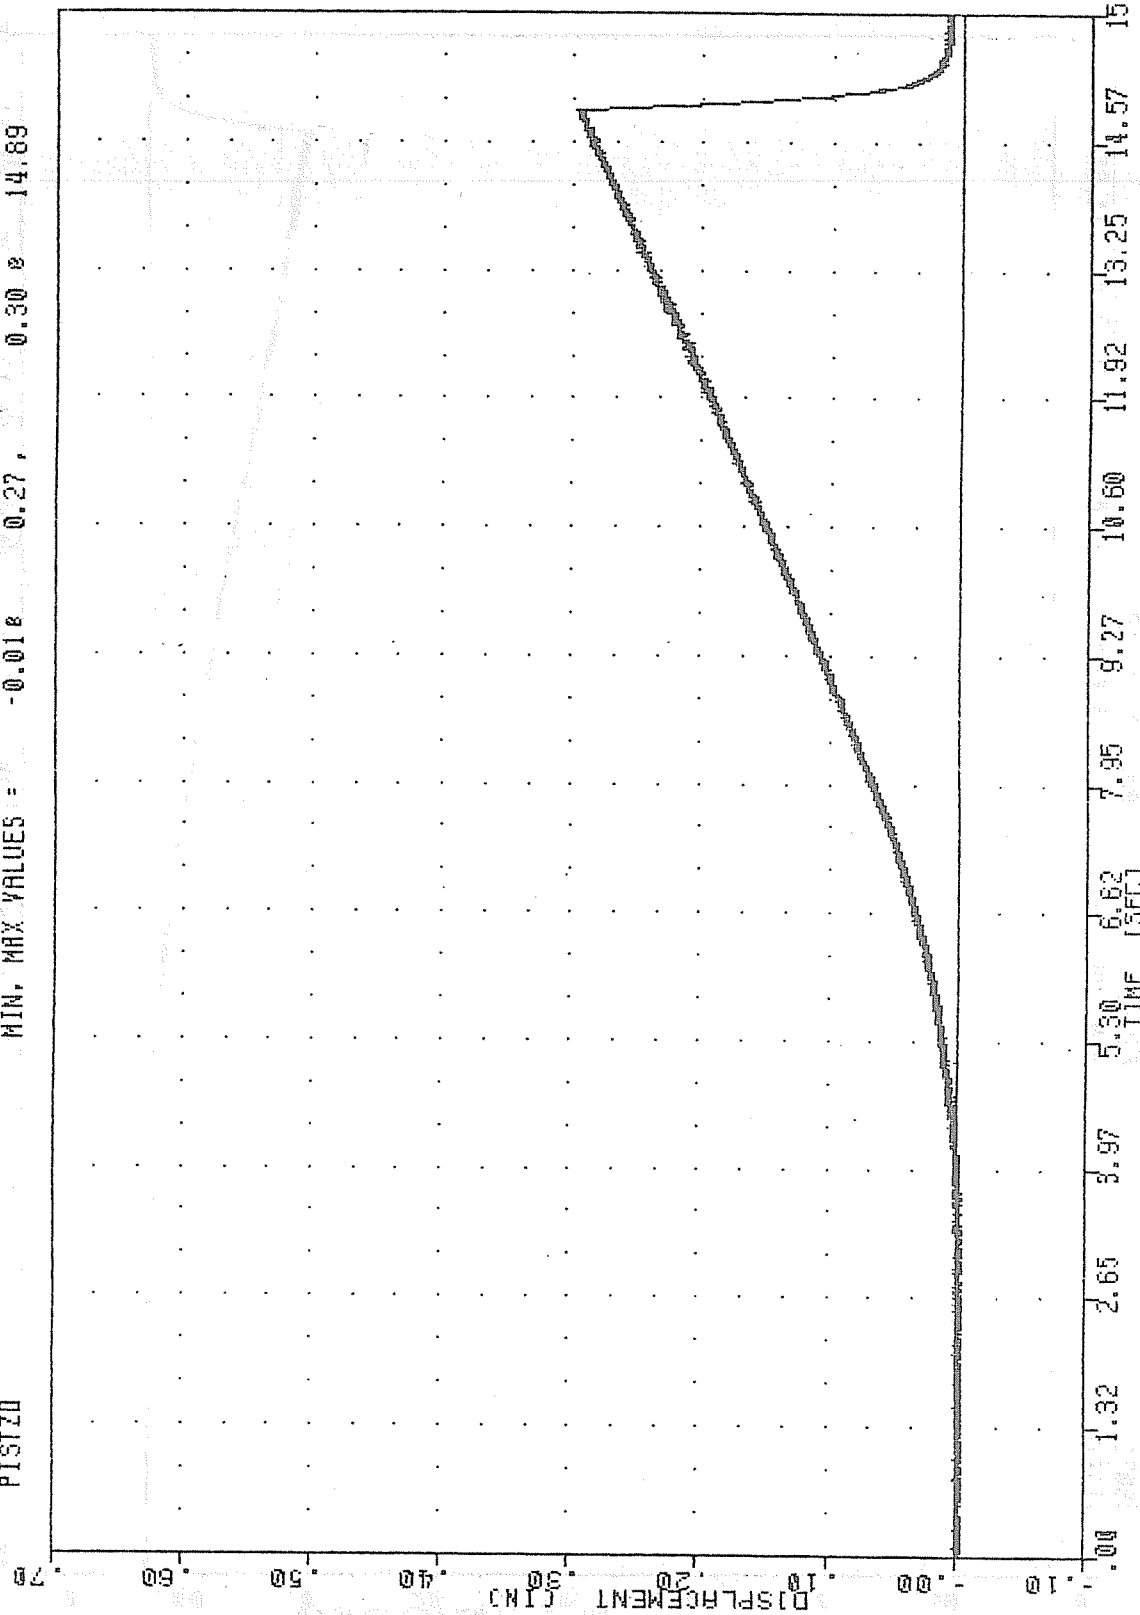

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 PORT INBOARD SEAT TRACK DEFLECTION


FAR , TEST05
 VERTICAL PULL TESTS
 88071
 POST20

FILTER = BLPF 100/ 316/ -40
 MIN. MAX VALUES = 0.00e 0.33, 0.27 e 14.90

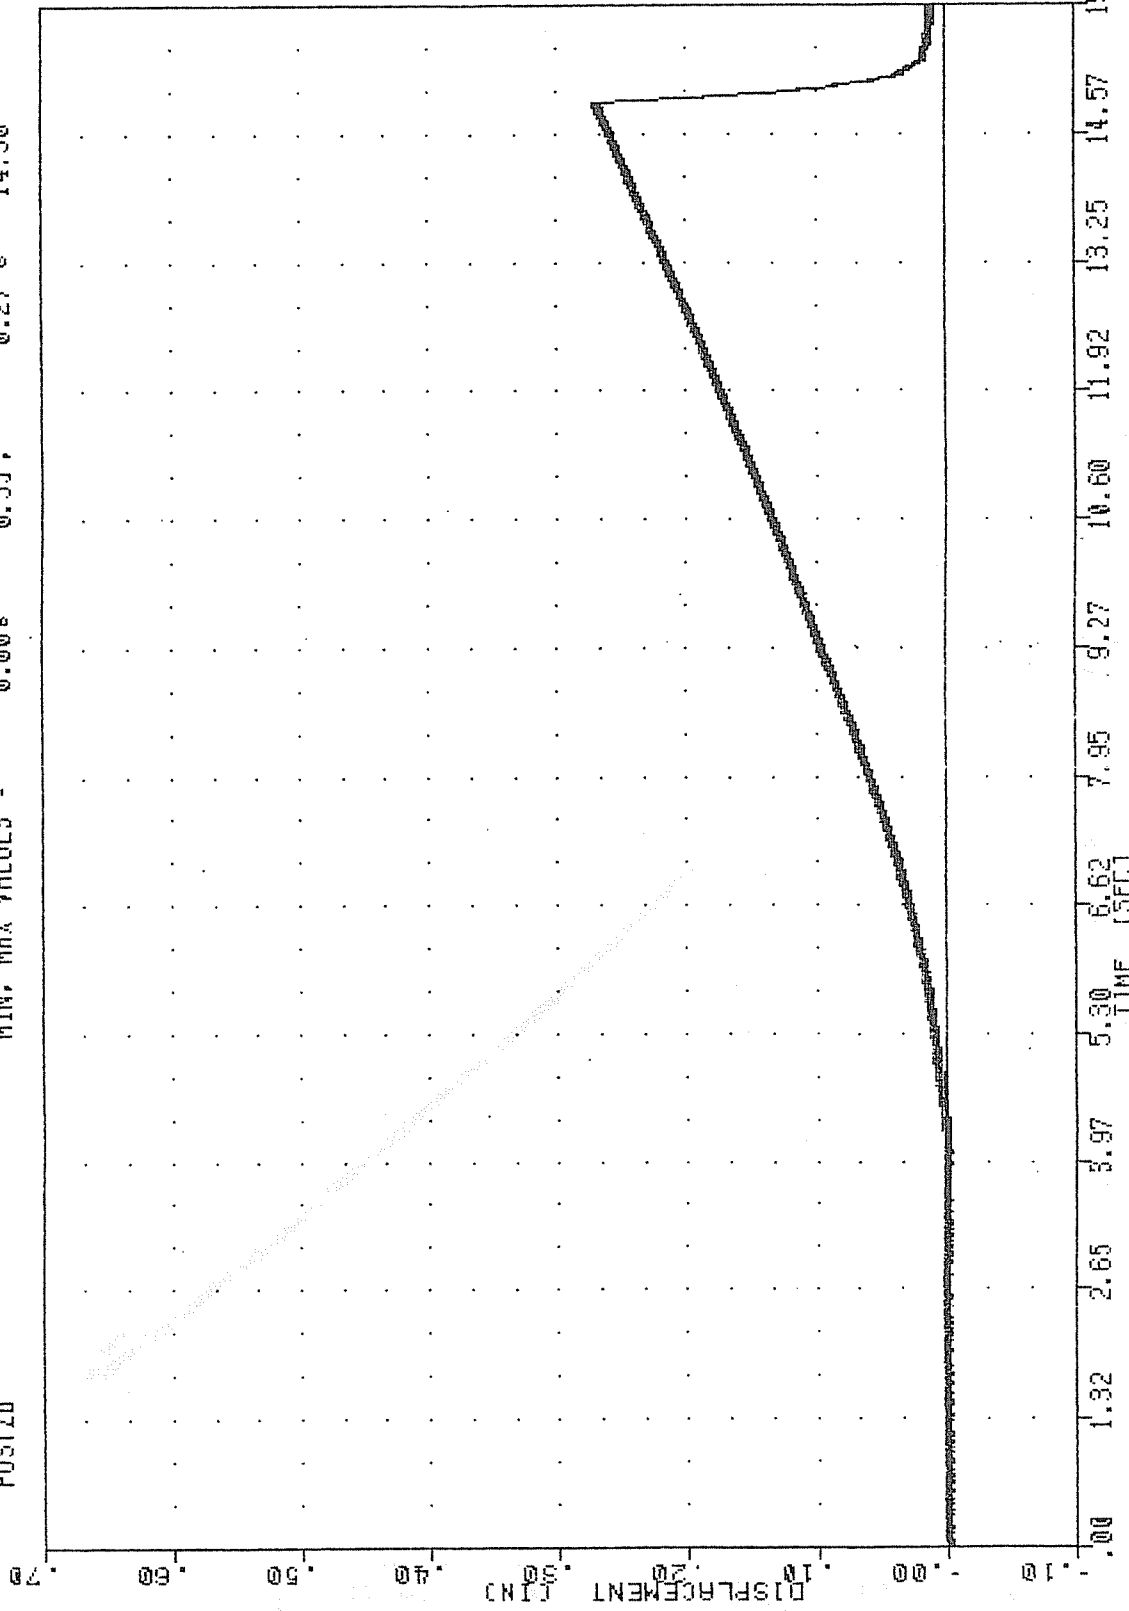


LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 PORT OUTBOARD SEAT TRACK DEFLECTION

FOR POST20 VERTICAL PULL TESTS
 FILTER = BLPF 100/ 316/ -40 MIN, MAX = 0.00 0.33 0.27 14.90
 FILTER = BLPF 100/ 316/ -40 MIN, MAX = -100.95 0 4730.23 14.89

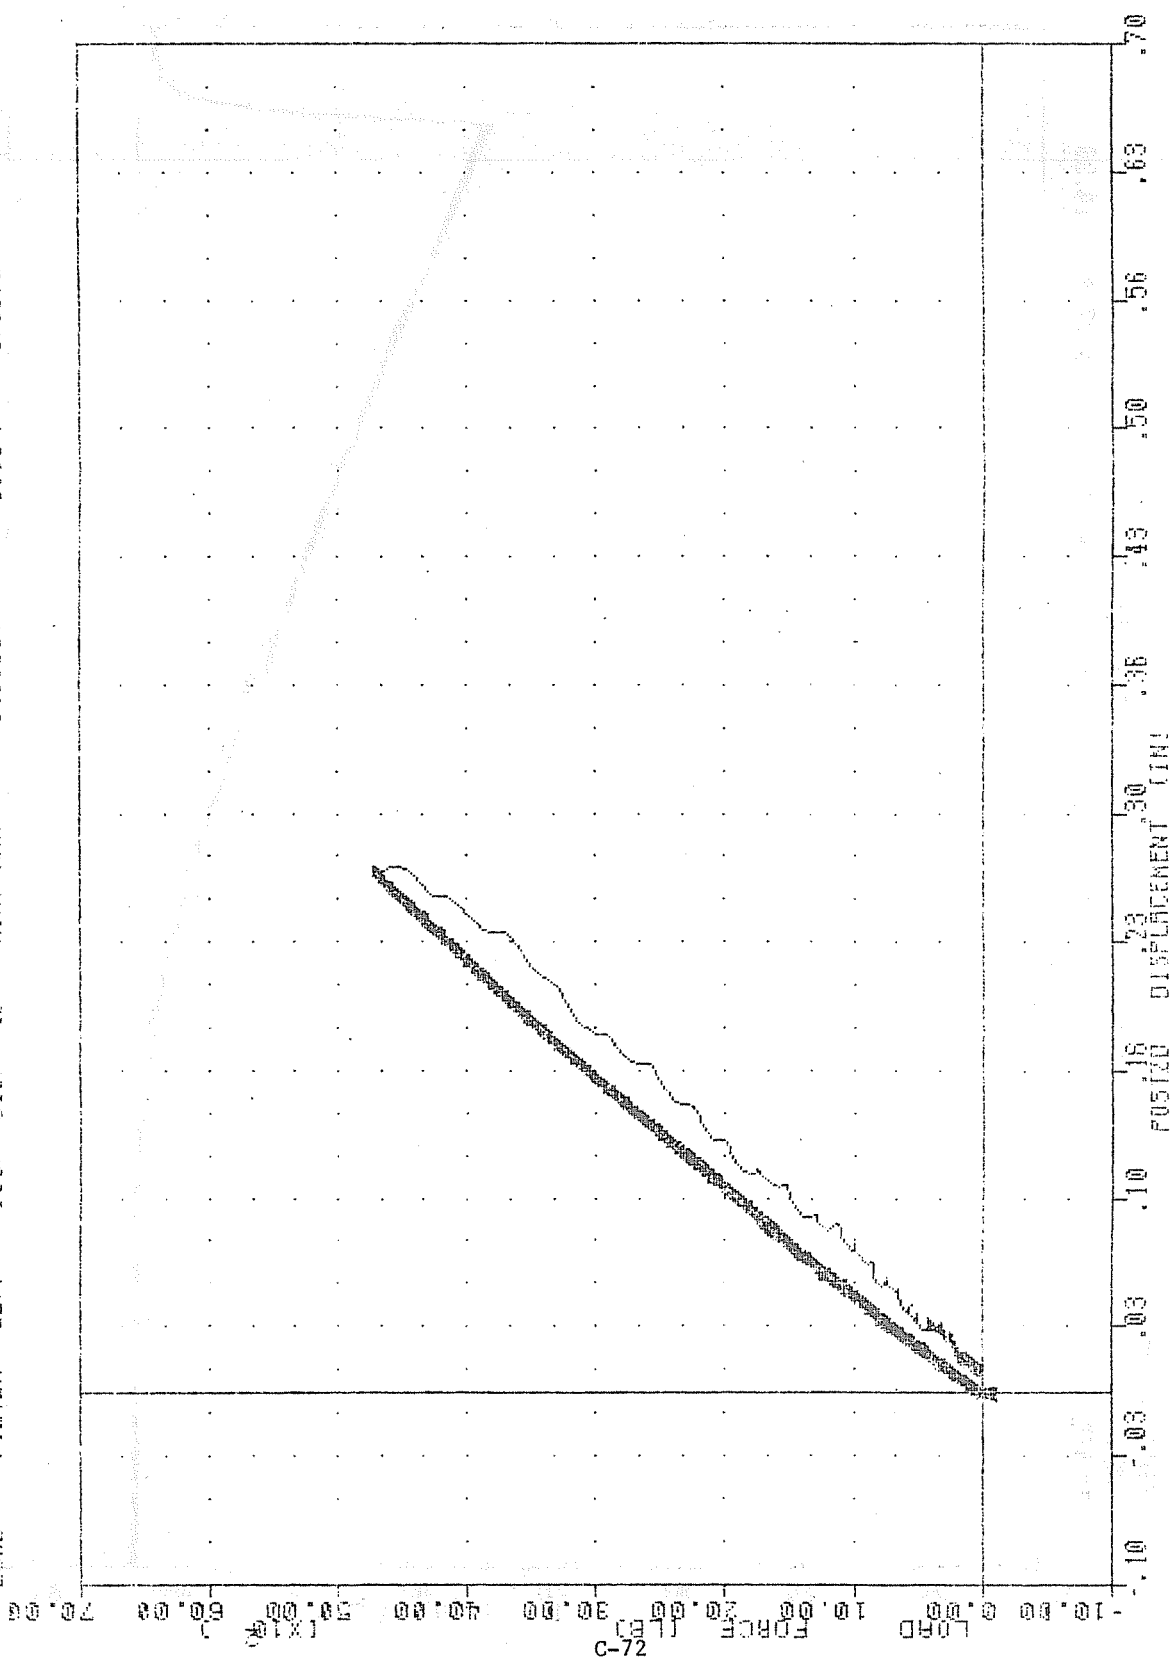


LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT OUTBOARD SEAT TRACK

FOR VERTICAL FULL TESTS
 FILTER = 6LPP 100/ 316/ -40 MIN, MAX = 80071
 FILTER = 6LPP 100/ 316/ -40 MIN, MAX = -0.01
 LOAD 14.89
 4730.23 0 0.27
 0.38 14.88

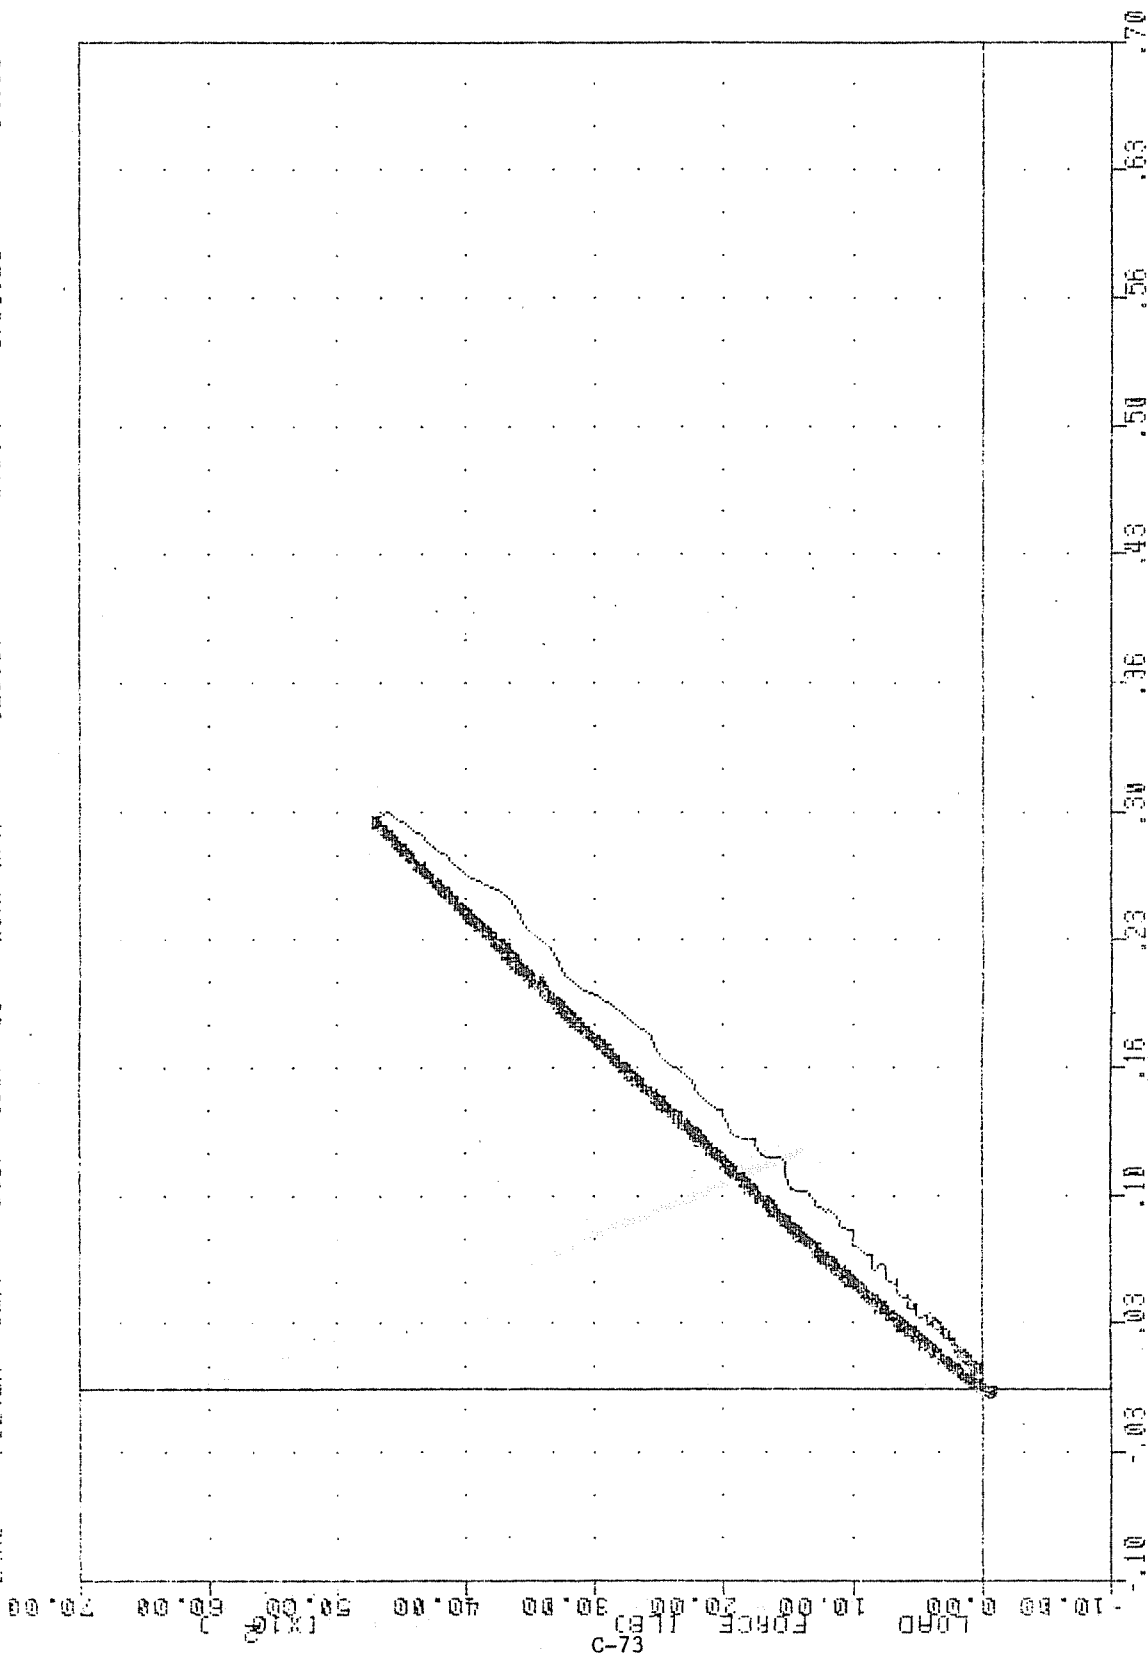


LOAD APPLIED TO SEAT TRACK VS PORT INBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT OUTBOARD SEAT TRACK

CUR SIZED
 SIZED
 LOAD
 DESIGN
 FILTER: BIFF
 FILTER: BIFF
 VERTICAL PULL TEST
 100/ 316/ -40 MIN. MAX
 100/ 316/ -40 MIN. MAX
 88071
 0.00 2
 -120.05 2
 2.74
 0.38
 0.12 2
 4700.23 2
 14.65
 14.88

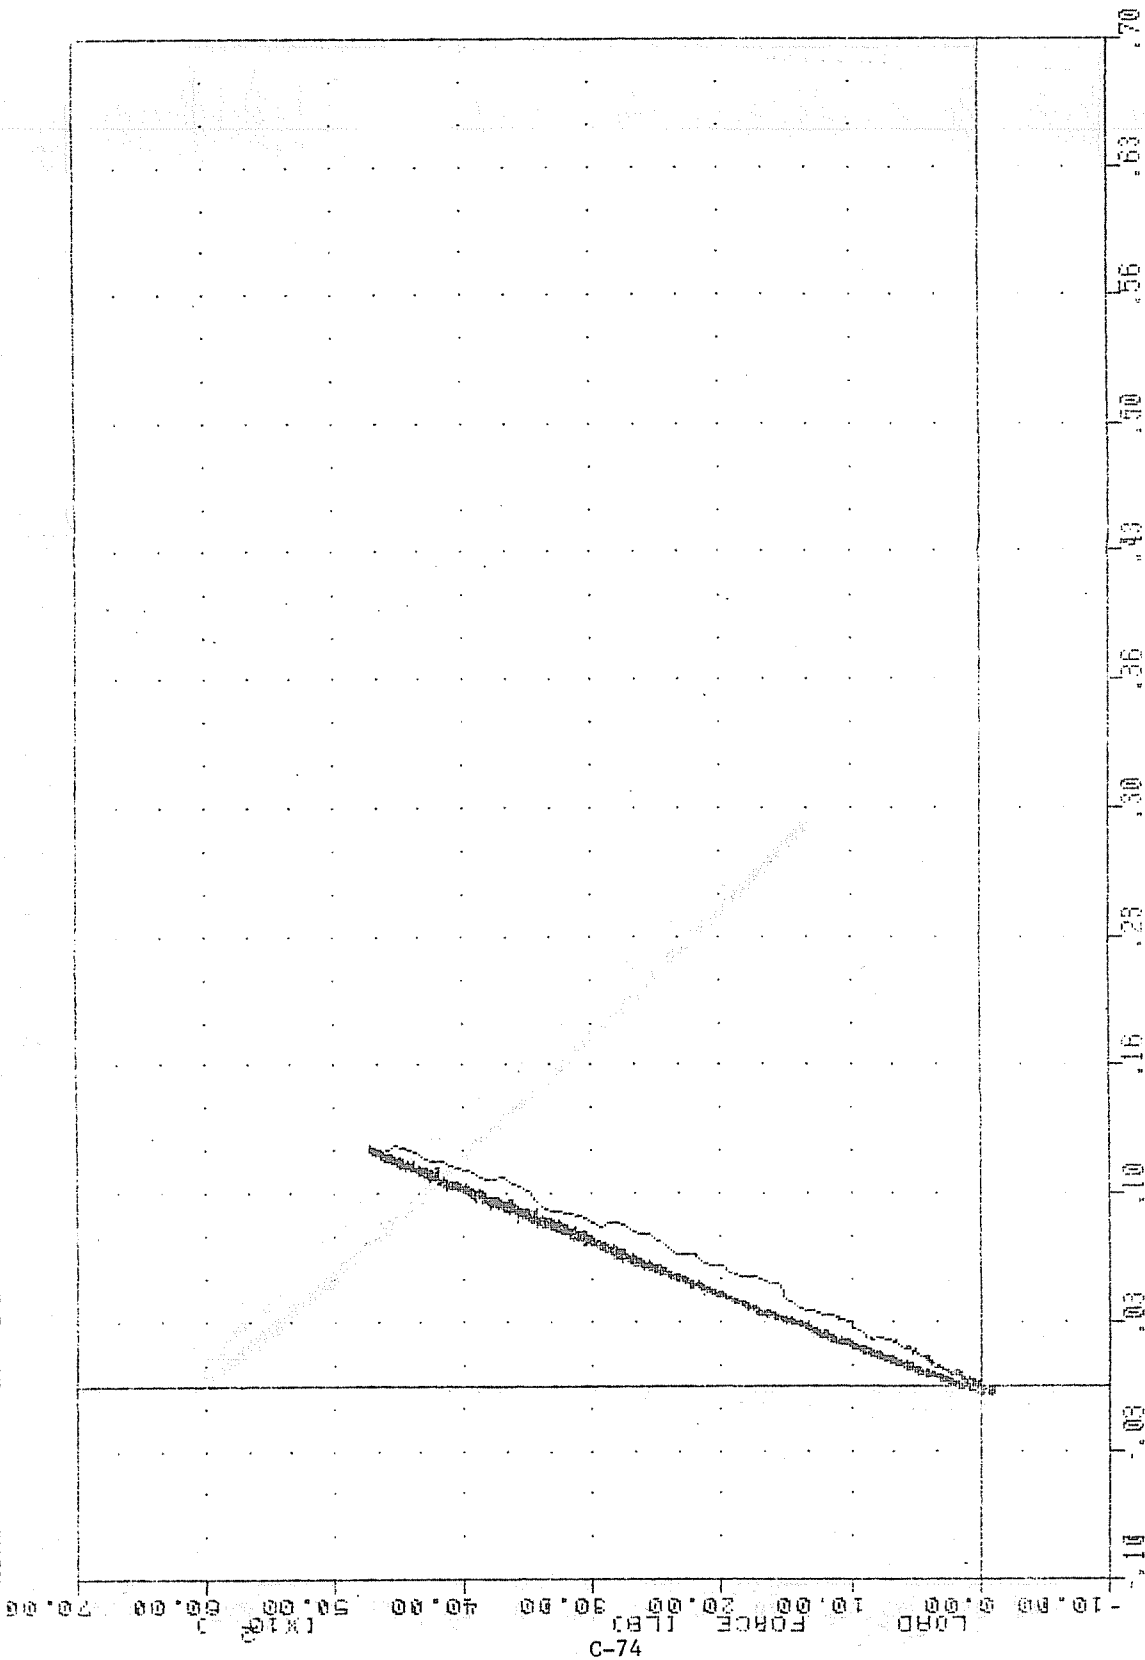


LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT OUTBOARD SEAT TRACK

FAR TESTS VERTICAL PULL TESTS
 SUSZD 100/ 316/ -40 MIN. MAX = 88071 0.70 0.10 12.95
 LOAD 100/ 316/ -40 MIN. MAX = -120.95 0.38 0.23 14.68

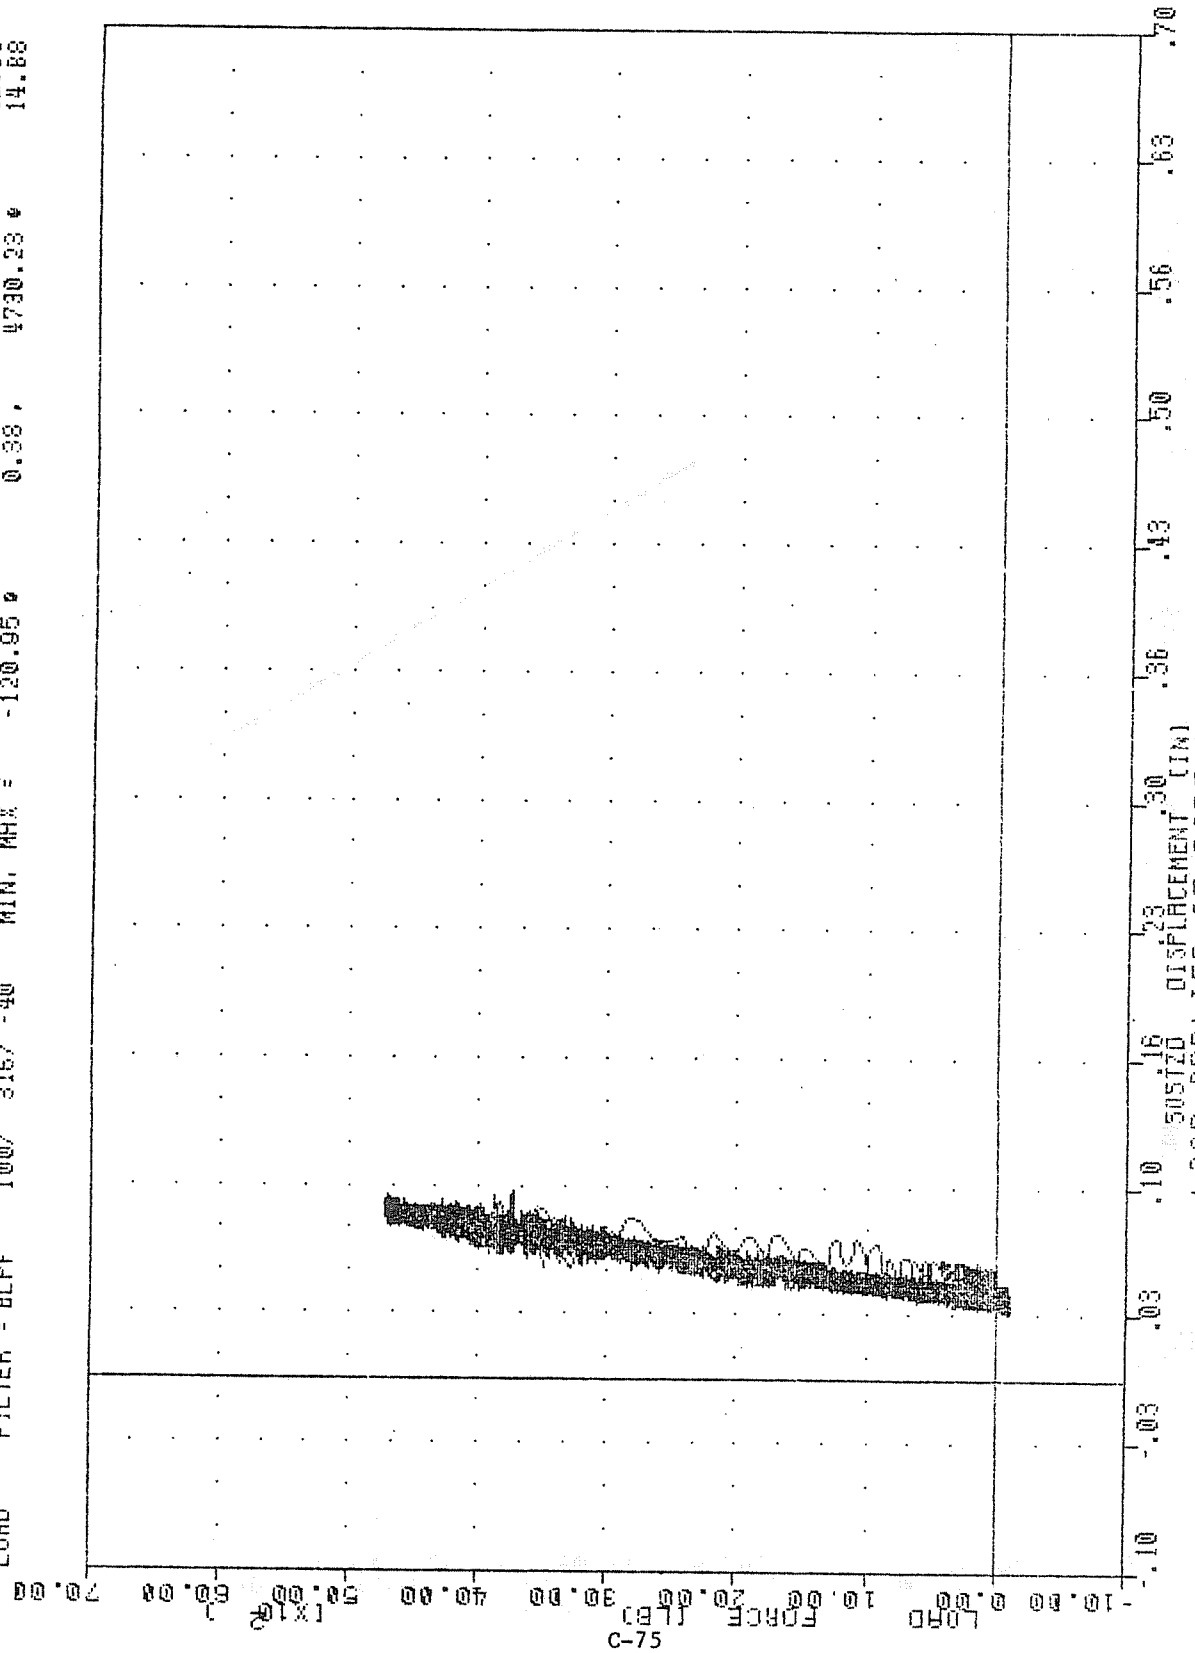


LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD SEAT TRACK DEFLECTION
 LOAD APPLIED AT PORT OUTBOARD SEAT TRACK

FRA
 P063
 LOAD
 TEST05
 FILTER = BLPF
 FILTER = BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN, MAX =
 MIN, MAX =
 0.93;
 0.38;
 18.70 e
 4730.23 e
 14.88
 14.88

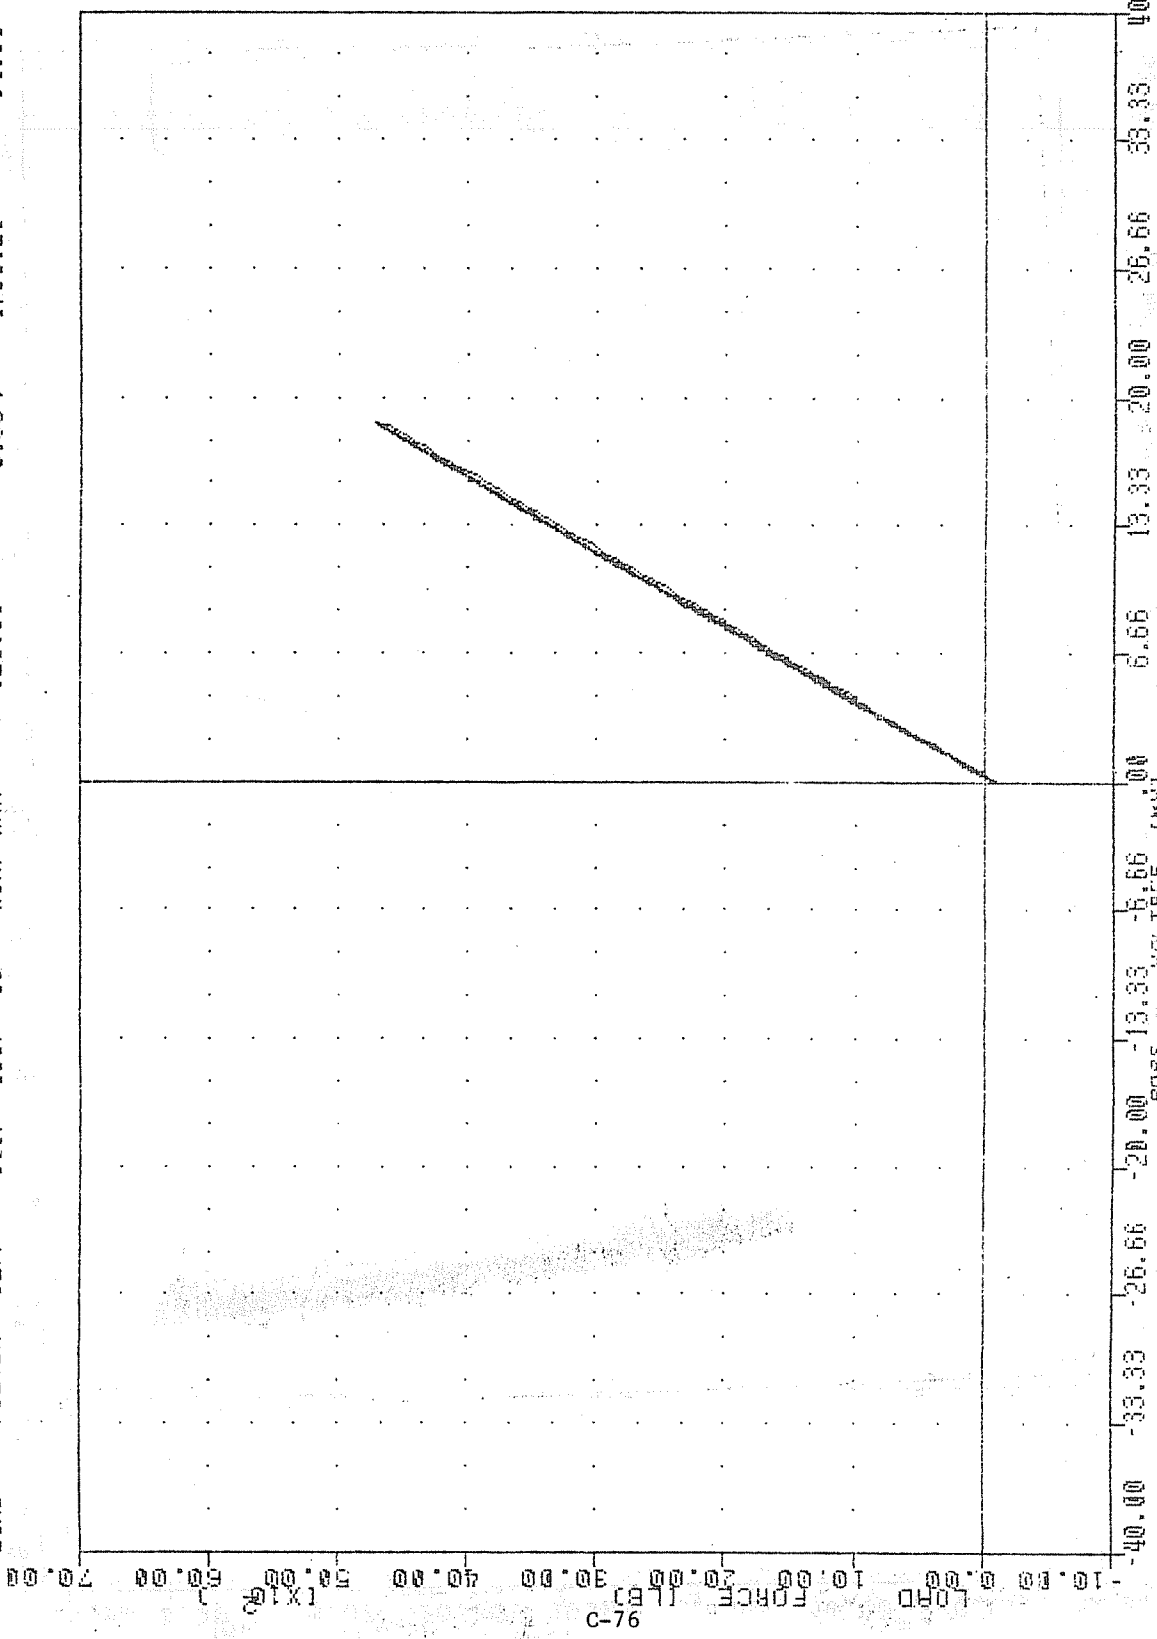


LOAD APPLIED TO SEAT TRACK VS PORT OUTBOARD BEAM STRAIN
 P063
 VOLTAGE (mV)

FRA
 P1B5
 LOAD
 TEST05
 FILTER : BLPF
 FILTER : BLPF
 100/ 316/ -40
 100/ 316/ -40
 MIN, MAX :
 MIN, MAX :
 88071
 -0.15 %
 -120.95 %
 0.63 ;
 0.38 ;
 8.17 %
 4730.23 %
 14.88
 14.88

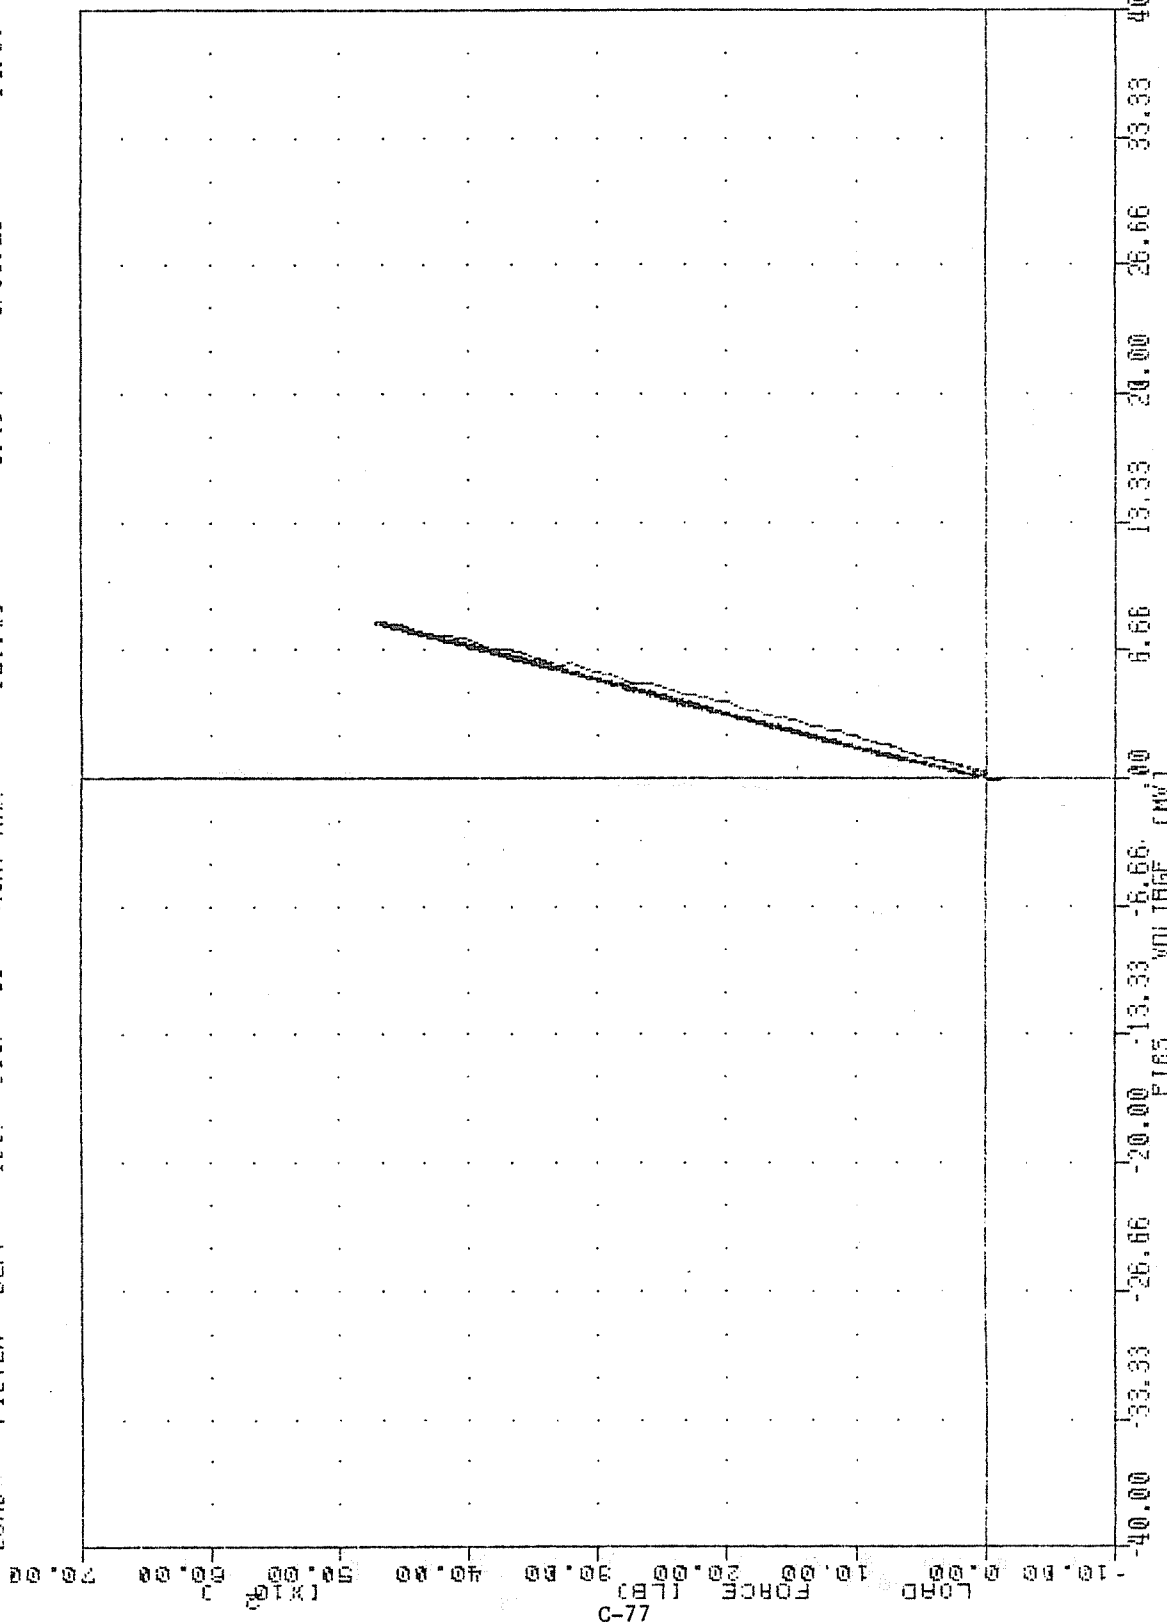


LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS PORT INBOARD BEAM STRAIN

F88
 3183
 LOAD
 TEST05
 FILTER = BLPF
 FILTER = BLPF
 100/ 318/ -40
 100/ 318/ -40
 MIN, MAX =
 MIN, MAX =
 68071
 -1.292
 -120.952
 14.78
 0.38
 -0.182
 4730.232
 0.71
 14.83

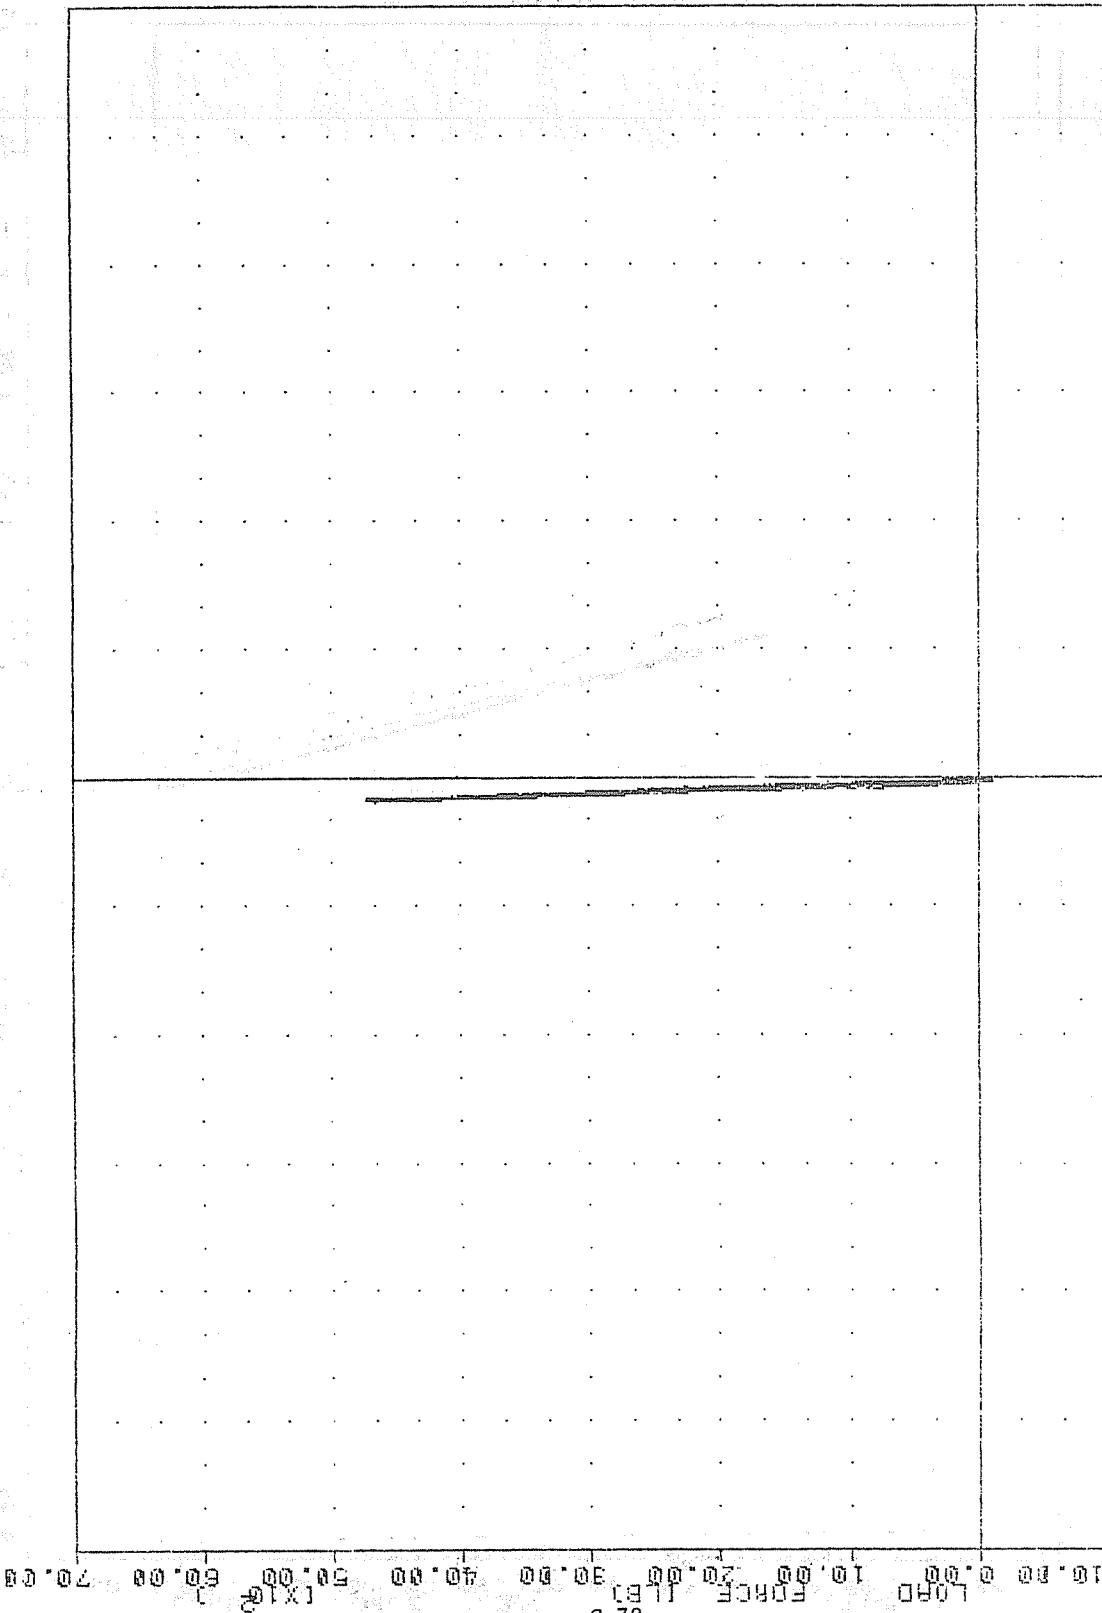

-40.00 -33.33 -26.66 -20.00 -13.33 -6.66 0.00
 3183
 VOLTAGE (mV)
 LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD INBOARD BEAM STRAIN

FAO
 5065
 LOAD
 100/ 316/ -40
 FILTER = BLPF
 100/ 316/ -40
 FILTER = BLPF
 5065
 LOAD
 100/ 316/ -40
 MIN. MAX =
 120.95 0
 2.04
 0.38
 2.40 0
 4780.23 0
 14.88
 14.88

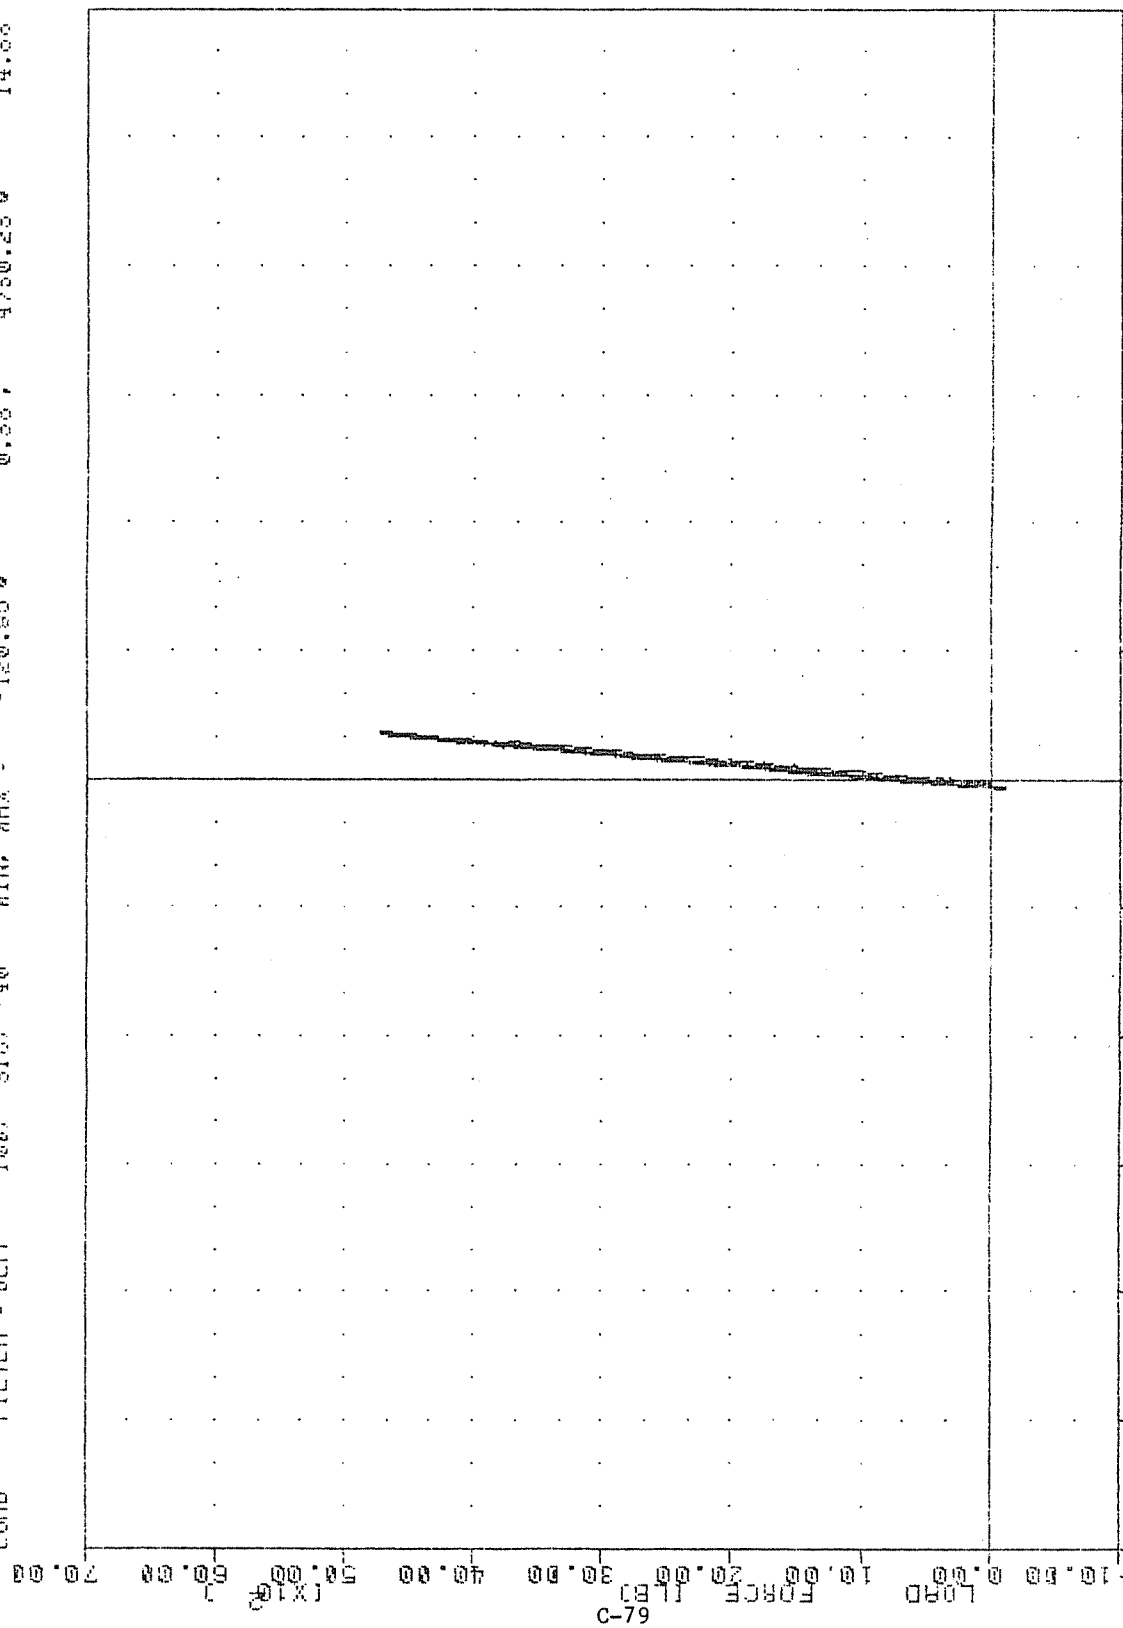

5065
 LOAD
 100/ 316/ -40
 MIN. MAX =
 120.95 0
 2.04
 0.38
 2.40 0
 4780.23 0
 14.88
 14.88

LOAD APPLIED AT PORT OUTBOARD SEAT TRACK
 LOAD APPLIED TO SEAT TRACK VS STARBOARD OUTBOARD BEAM STRAIN

APPENDIX D

FACILITY DESCRIPTION

IMPACT SIMULATOR

General Description

The Impact Simulator is housed in a 25,000-square foot building which is designed and operated for proprietary testing, data reliability, and accuracy.

The test area is 88 feet wide and 95 feet long, with a deceleration area 35 feet wide and 142 feet long, Figure D-1. A 15-foot clearance above the track exists for tall payloads.

Hyge Description

The Impact Simulator features a 24-inch diameter, Hyge Shock Tester, Figure D-2. The Hyge principle, as applied to safety testing, simulates the deceleration conditions of an impact but in reverse. Prior to an actual crash, a vehicle and its occupants are moving at a constant velocity. At impact, they are decelerated very rapidly. With the Hyge system, the test vehicle and occupants (dummies) are initially at zero velocity. This situation simulates the constant velocity condition prior to an actual crash. The programmed, rapid acceleration, of the Hyge thrust column accelerates the sled with attached test article(s) and produces an impulse similar to that generated during the rapid deceleration of a moving automobile or aircraft during a crash impact. Depending upon the orientation of the test article(s), the crash loads can be applied to any axis.

The system can generate a gross thrust of 750,000 pounds which is capable of accelerating a payload of 10,000 pounds to 71 mph and attain a peak acceleration of 55 G's. Peak accelerations of 100 G's and velocities of 100 mph can be attained with lighter payloads.

The system is pneumatically operated and develops its thrust through differential gas pressure acting on the two faces of a thrust piston in a closed cylinder, Figure D-3. Compressed air is supplied to the load chamber by two 100 h.p. compressors. The main cylinder is separated into two chambers (front and rear) by an orifice plate. Each chamber utilizes a floating piston to vary the volume of the compressed gas within the chamber. The volume is changed by pumping "Pydraul" into or out of the cylinder, thereby, varying the position of the floating piston.

NOTE: "Pydraul" is a fire resistant, hydraulic-type fluid used to reduce the possibility of diesel explosions due to the high surge pressures generated when decelerating the thrust column.

In operation, a relatively low gas pressure in Chamber A forces the thrust piston against a seal ring seated on the orifice plate on the rear side of the thrust piston. Only the smaller area within the seal is exposed,



Figure D-1 Test Area



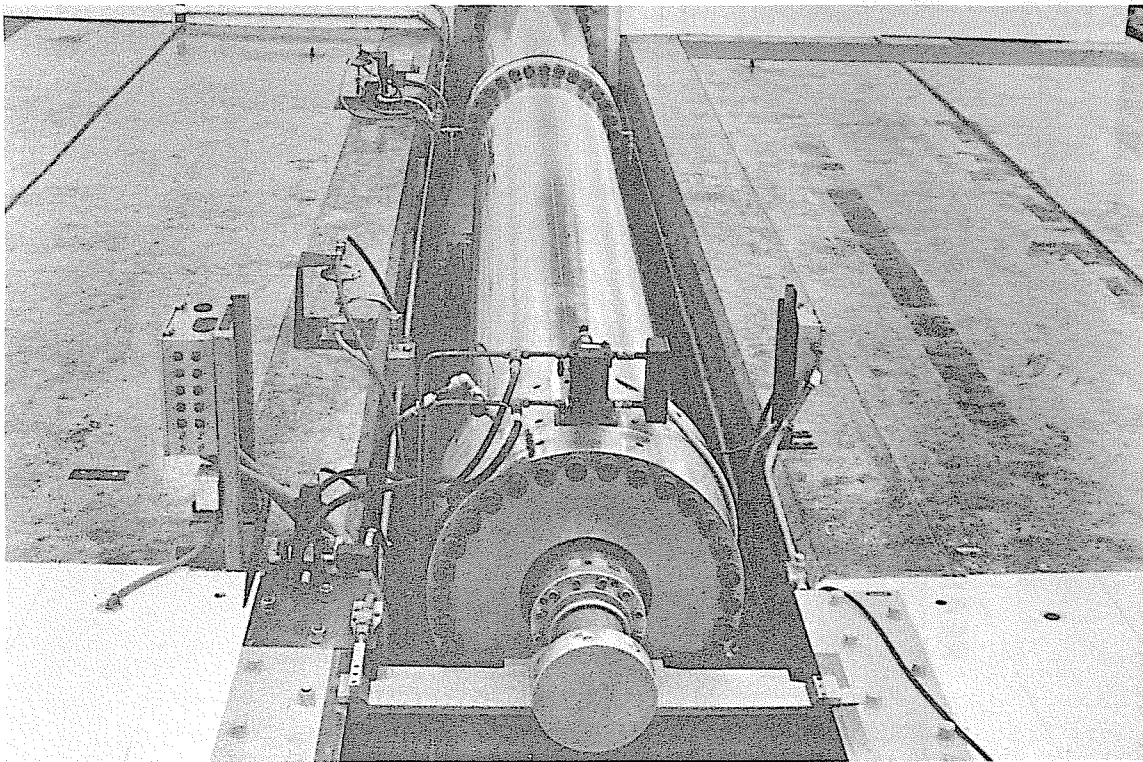


Figure D-2 Hyge Shock Tester

HYGE ACTUATOR

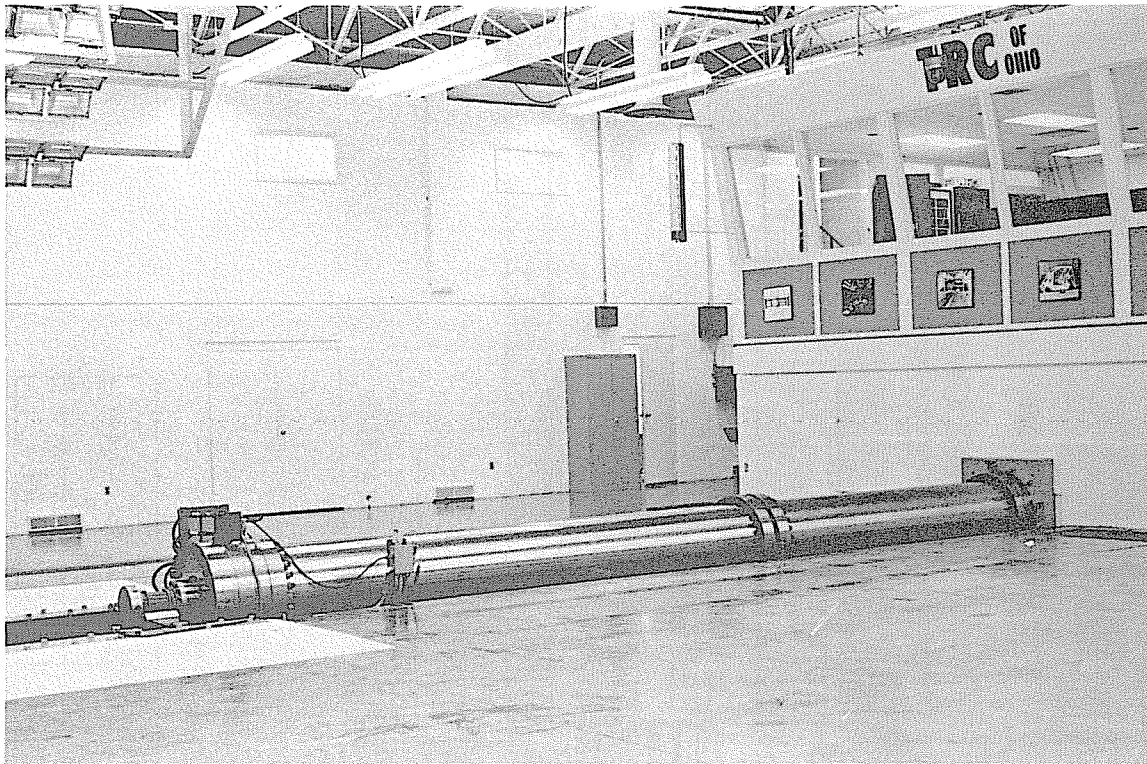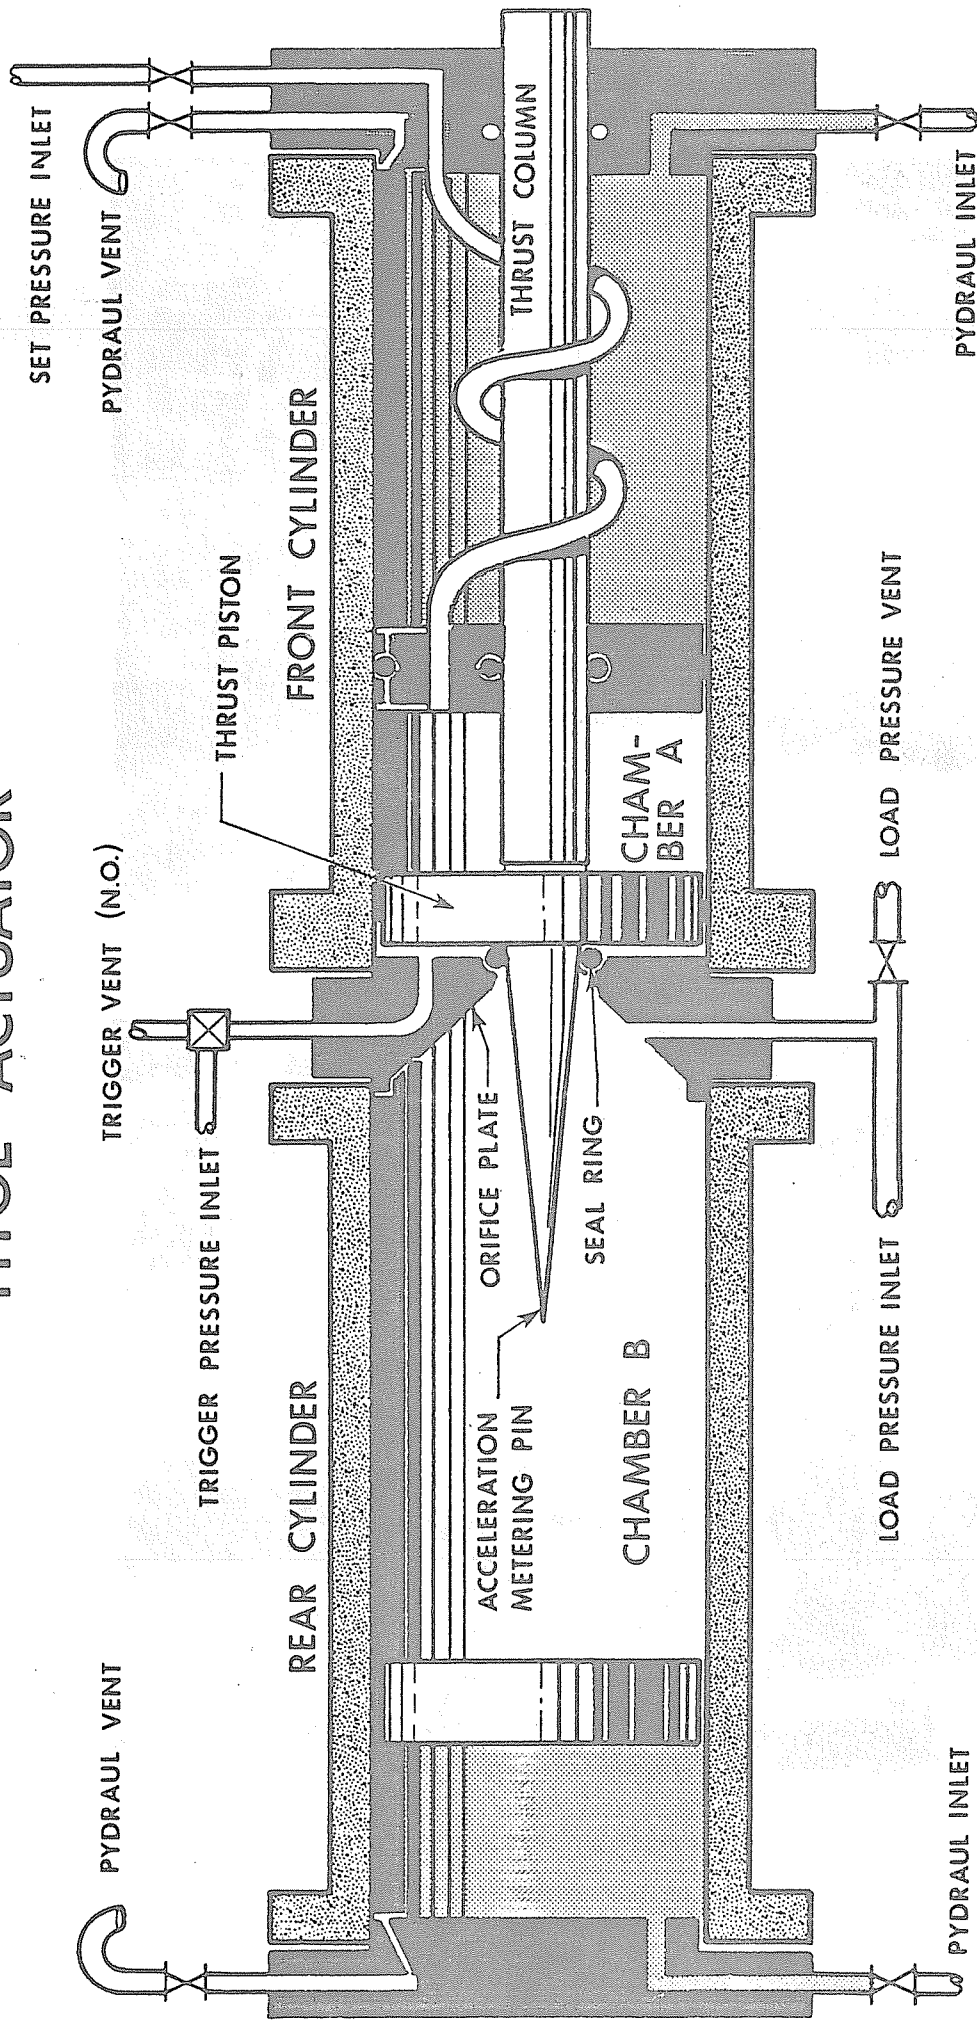

CYLINDER NET AREAS			
CYLINDER I. D.	REAR	FRONT	ORIFICE
24 IN.	452 SQ. IN.	374 SQ. IN.	50 SQ. IN.

Figure D-3 Hyge Actuator

through the orifice opening, to the gas pressure in Chamber "B". The ratio of the net areas of the thrust piston front and rear surfaces, which are exposed to the gas pressures in the chambers, is 7:1 with the front being the larger. This implies that as long as the pressure in the rear chamber is no more than seven times larger than the pressure in the front chamber the system is in equilibrium. To provide a margin of safety, the pressure ratios are never greater than 6:1.

In preparation for firing, compressed gas is introduced into Chamber B until the forces on the thrust piston are equalized. A low volume trigger pressure is injected which upsets the equilibrium, opens the seal at the orifice, moves the thrust piston away from the orifice plate, and instantly exposes the entire rear area of the thrust piston to the gas pressure in Chamber B. A controlled thrust on the piston results. Transmitted by a thrust column, this limited-duration thrust acts upon the test specimen to produce an accurately predictable acceleration or velocity.

Acceleration is governed by a metering pin which projects through the orifice into Chamber B. The contour of the pin meters the flow of gas through the orifice, regulating the acceleration and making the utilized thrust precisely repeatable, Figure D-4. By varying the volumes and pressures in Chambers A and B, the pulse amplitude and duration generated by a metering pin can be modified.

A computer program is utilized to aid in the design of metering pins. The program was used to design the pins to produce the triangular-shaped pulse for the testing of General Aviation aircraft seats, and the input pulse for child restraint testing per Federal Motor Vehicle Safety Standard 213, Figure D-5.

Illustrations of the basic wave forms generated by metering pins currently in our inventory are shown in Figure D-6.

Test Sled

The test sled has a top surface which is five feet wide and twelve feet long, Figure D-7. It weighs approximately 3,600 pounds and is designed to carry a maximum payload of 10,000 pounds. Pneumatic brakes provide up to 24,000 pounds drag force on the sled without causing deceleration irregularities. The brakes may be applied prior to the test to provide a smooth transition between the acceleration and deceleration phase, or they may be applied after the acceleration phase is completed. The sled is instrumented with accelerometers mounted to the center nose to measure acceleration in the longitudinal direction. The sled velocity is obtained by two methods: (1) a real time measuring system which utilizes a 12 foot long film strip, with precisely marked intervals, attached to the lower surface of the sled, Figure D-8. The film strip passes through a photo detector/light source with the output of the detector coupled to a "frequency-to-DC" converter whose output represents the sled velocity, (2) integration of the sled acceleration pulse.

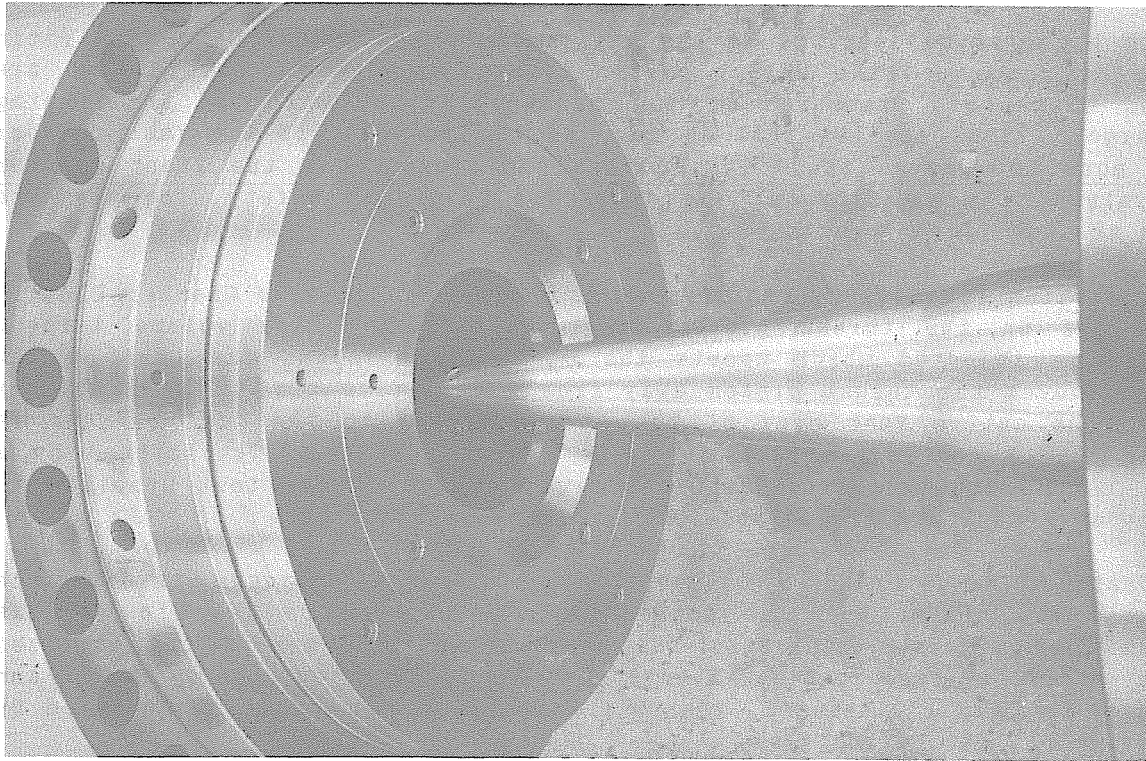


Figure D-4 Metering Pin and Orifice Plate


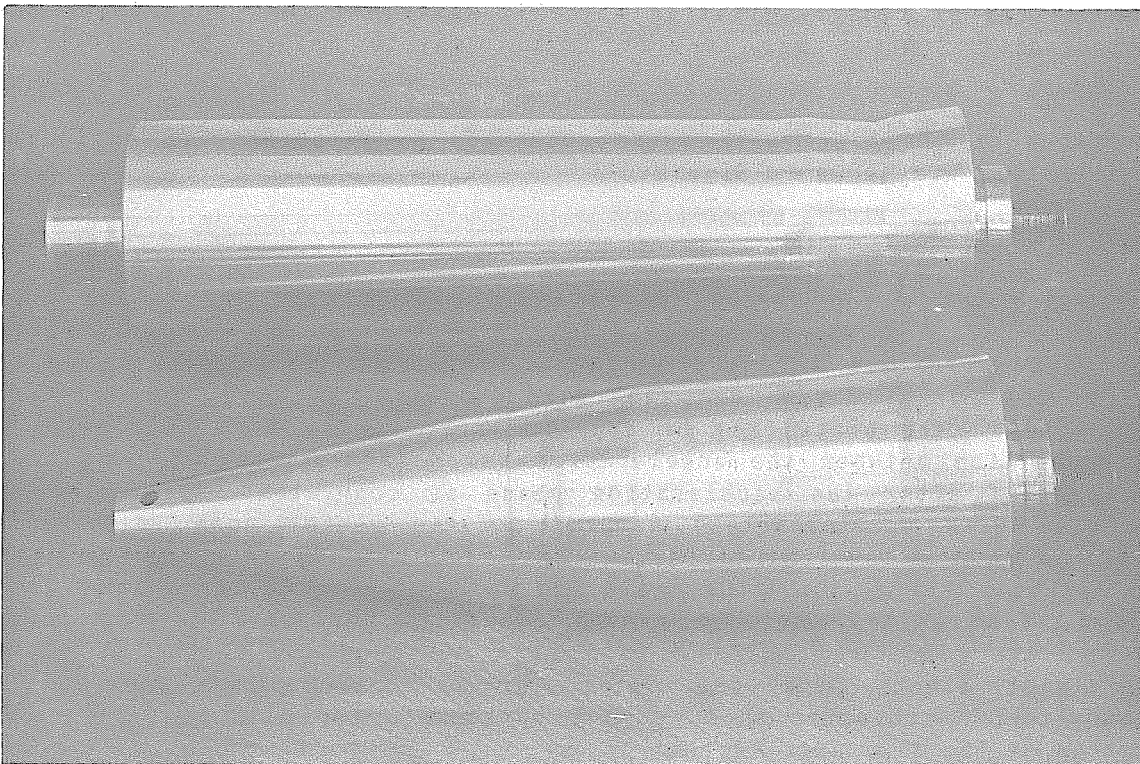



Figure D-5 Metering Pins for Triangle Shape
and Child Restraint Pulses

Figure D-7


TRC SLED PULSES

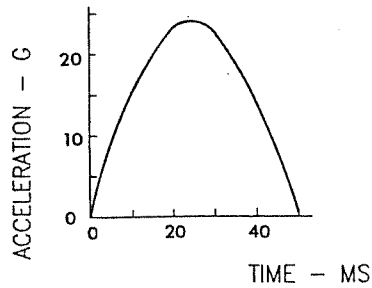


50 MS 1/2 SINE PIN

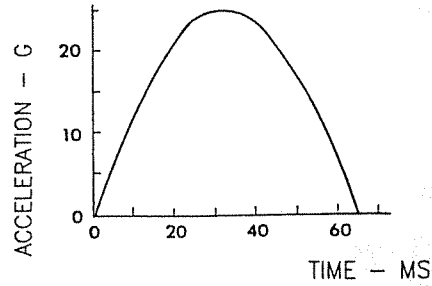


65 MS 1/2 SINE PIN

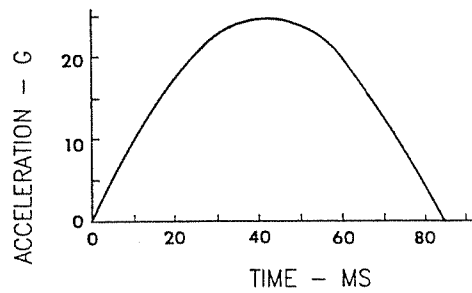


85 MS 1/2 SINE PIN

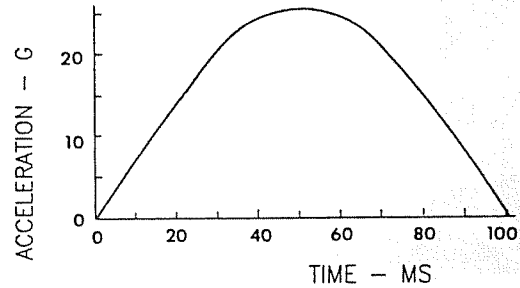


100 MS 1/2 SINE PIN

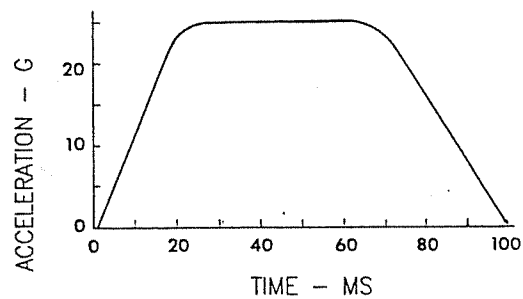


100 MS SQUARE PIN

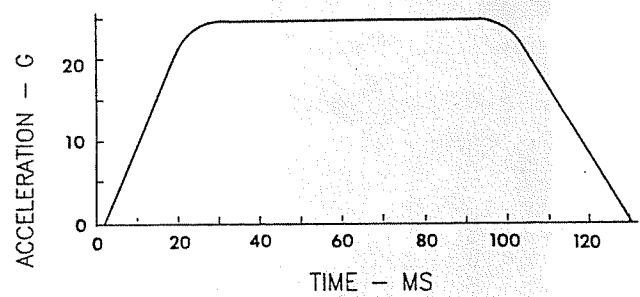

130 MS SQUARE PIN

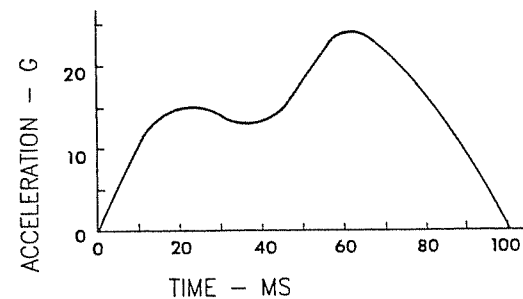

DOUBLE HUMP PIN

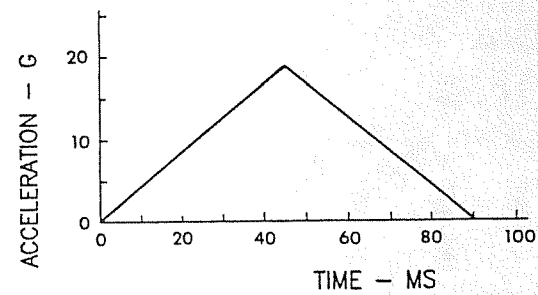

TRIANGLE PIN

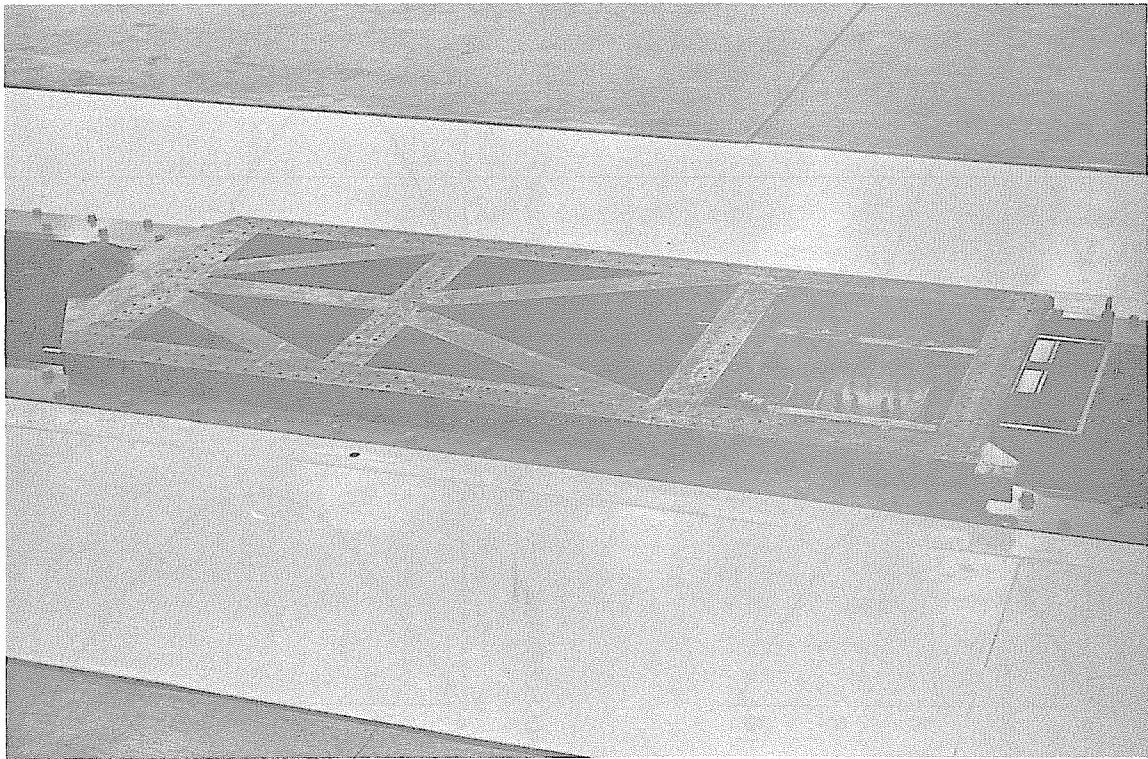


Figure D-7 Test Sled

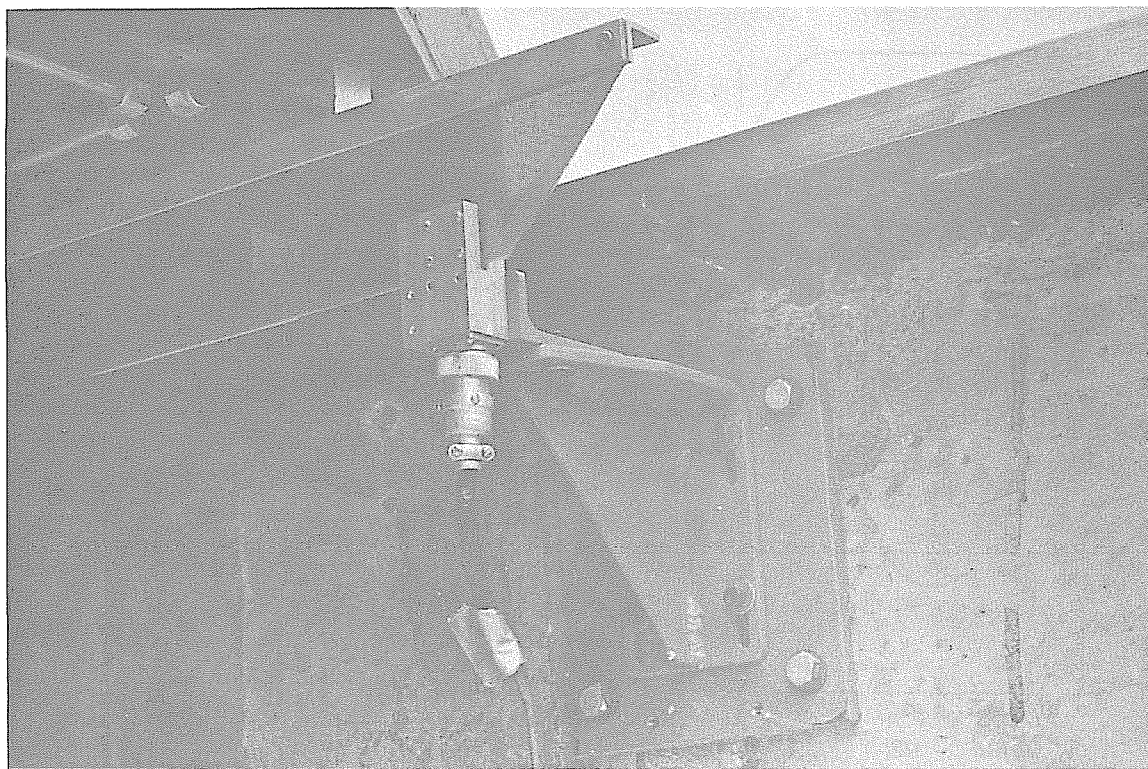


Figure D-8 Velocity Measuring System

Data Acquisition

The data acquisition system has the capacity of simultaneously acquiring and recording, on magnetic tape, 56 data channels from sensors requiring signal conditioning, Figure D-9. Each data channel meets the requirements of SAE Recommended Practice, J211B.

Each sensor is connected, via umbilical cable, to a signal conditioner located in the control room. The signal conditioners supply excitation voltage, amplification, filtering, and remote-controlled insertion of the shunt calibration resistors. The outputs of the signal conditioners are multiplexed and recorded on tape recorders. The analog signals are recorded, unfiltered, on one inch magnetic tape at 60 inches per second. IRIG "B" code is generated and recorded on each magnetic tape to aid in data processing.

Immediately preceding each test, all data channels are checked. After proper balancing of each channel, shunt calibration resistors are inserted, electronically, for each sensor and recorded on the magnetic tapes.

During the test event, selected data channels are recorded on an oscillograph to provide real time verification of the test data. Twelve (12) channels of data can be presented on the oscillograph at the time of the test.

Data Processing

The data processing system includes the analog to digital convertor and the computer with its associated peripherals, Figure D-10.

The analog-to-digital convertor is a 16-channel system with each channel having a simultaneous sample and hold amplifier. The digitizing rate is software-selectable with a maximum throughput of 160,000 samples per second. The computer is a VAX 11/780, 32 bit processor, with 8 megabytes of main memory.

Peripheral equipment includes the following:

- o Model RM05 megabyte hard disk
- o Model RA81 456 megabyte hard disk
- o Model RX02 dual floppy disk
- o Model TU77 tape transport
- o Model 7221T H-P eight pen plotter
- o Floating point processor
- o Thirteen (13) terminals including a Model VT105 waveform graphic terminal

Analog and/or digital filtering of the data can be performed. The filters conform to the Society of Automotive Engineers Recommended Practice J2112b. The digital filter types include Butterworth, Tchebycheff, and Elliptical. The number of poles can be varied from one to ten. Phaseless filtering can also be accomplished with either of the filter types.

Routine calculations include Head Injury Criteria (HIC), resultants from

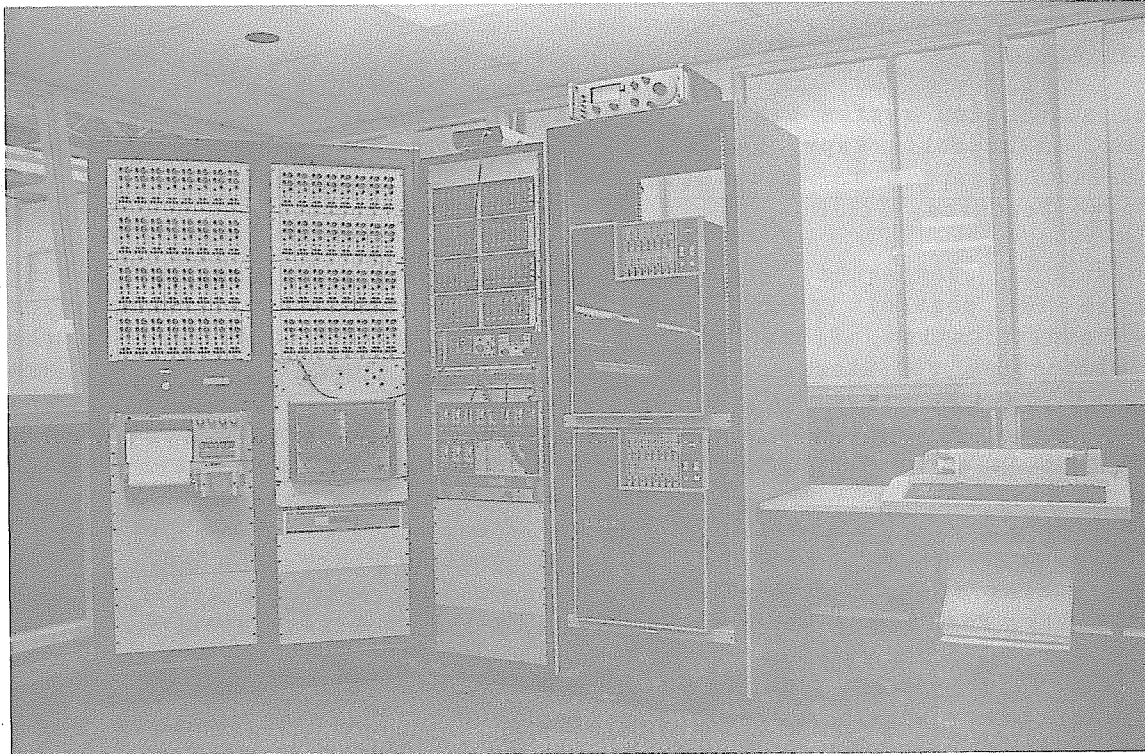


Figure D-9 Data Acquisition System

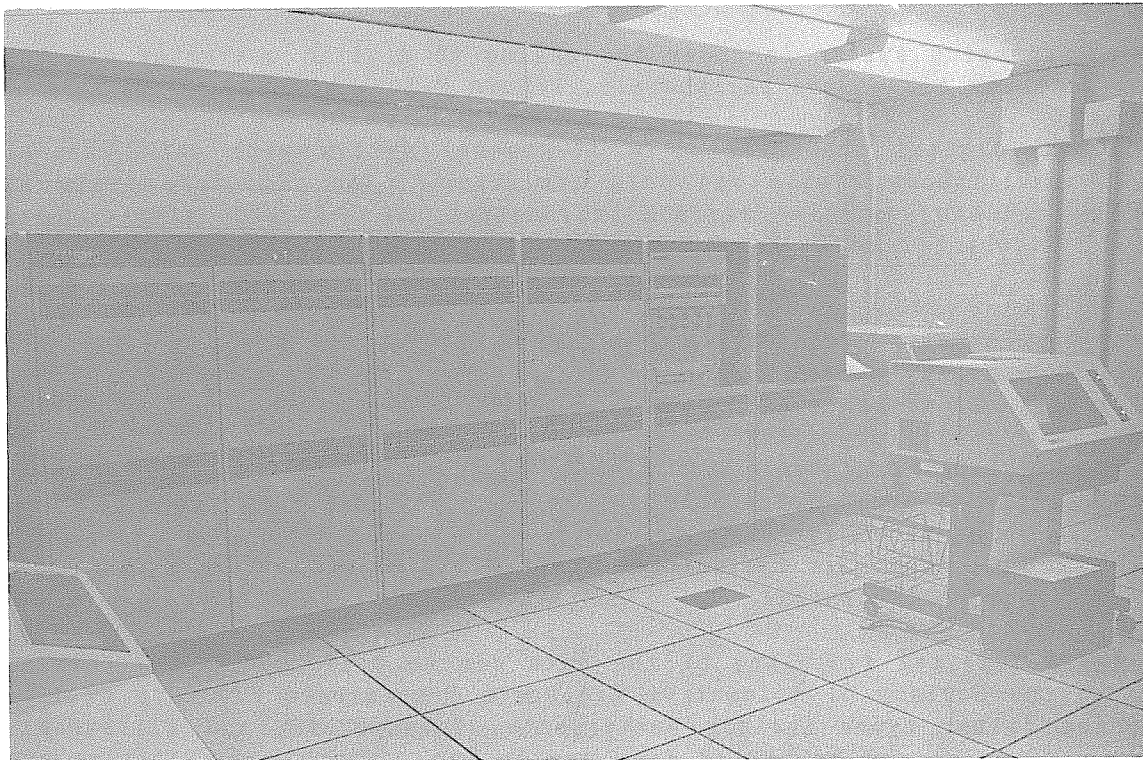


Figure D-10 Data Processing System

orthogonal measurements of accelerations, forces or moments, thorax (three ms clip) acceleration, the proposed lower leg injury criteria for the Hybrid III Dummy, and pass/fail criteria for dummy calibrations.

The data is presented in tabular and/or graphic form and also on magnetic tape, if desired. Various types of tape formats are available.

Photography

High speed, motion picture, cameras are employed to provide slow motion (1000 fps) coverage of each test, Figure D-11. Higher or lower frame rates can be selected. Five onboard and four offboard cameras, with lenses ranging from eight to 50mm, can be utilized to provide side, oblique, frontal, rear, and overhead views, Figure D-12. Real time (24 fps) motion picture cameras, a video tape system, and 35mm documentary cameras are available.

Two hundred and ninety-six (296), 1,500 watt, Tungsten-Halogen lights provide sufficient lighting for motion picture photography at 1000 frames per second. Auxiliary lights can be mounted onboard the sled for test articles which shield the overhead lights from specific areas of interest.

Film processing for the 16mm color motion picture film, (VNF-1 process), Figure D-13, and 35mm color documentary film (C-41 process) are performed in the photograph laboratory located in the Impact Simulator building. Black and white 35mm film can also be processed. The laboratory is equipped for editing and titling the motion picture film, as well as, enlarging and printing color and/or black and white photographs up to 16 by 20 inches. Proof sheets, slides, and view graphs are available.

Schematics, illustrations, and/or computer generated graphics, Figure D-14, can be provided for test reports, publications, proposals or other requirements.

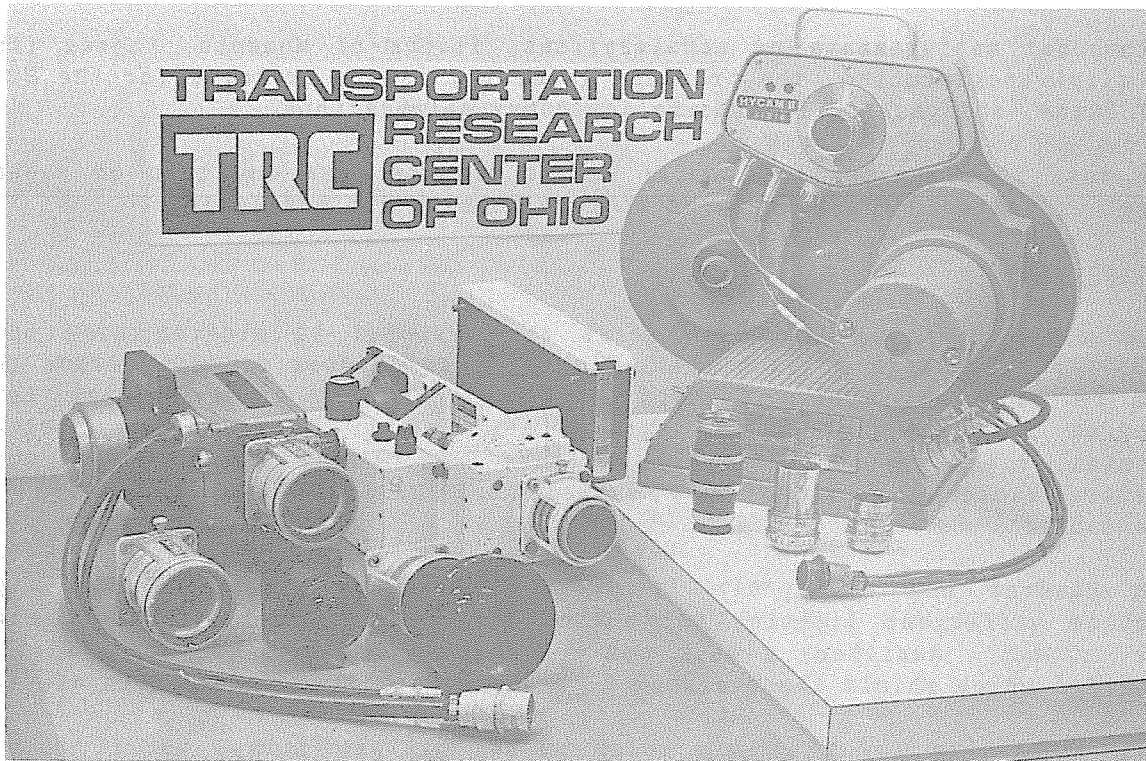


Figure D-11 Motion Picture Cameras



Figure D-12 Test Buck with Cameras

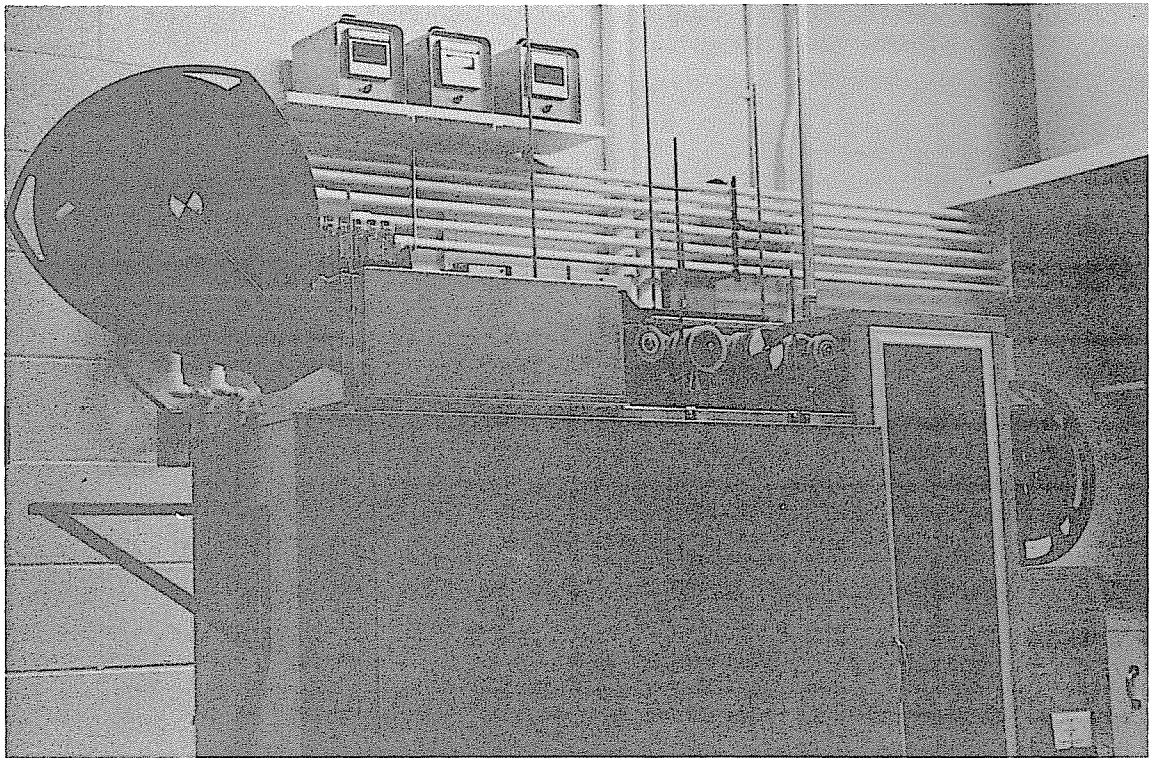


Figure D-13 Motion Picture Processor



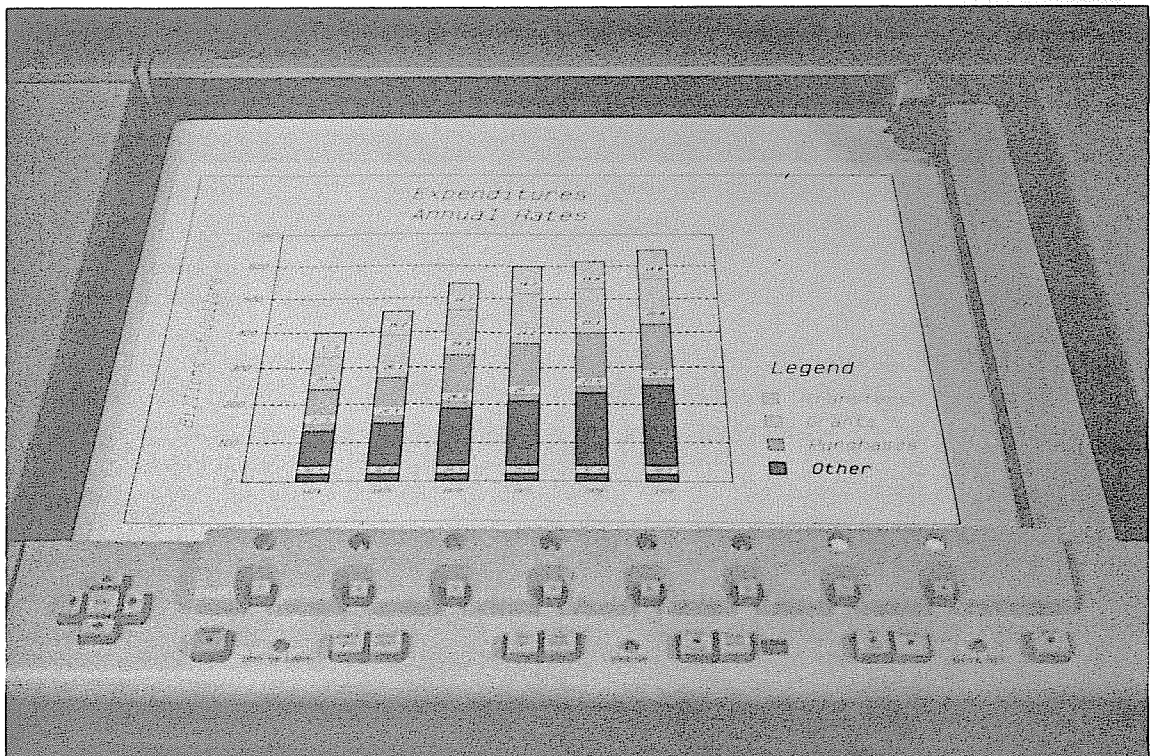


Figure D-14 Computer Graphics

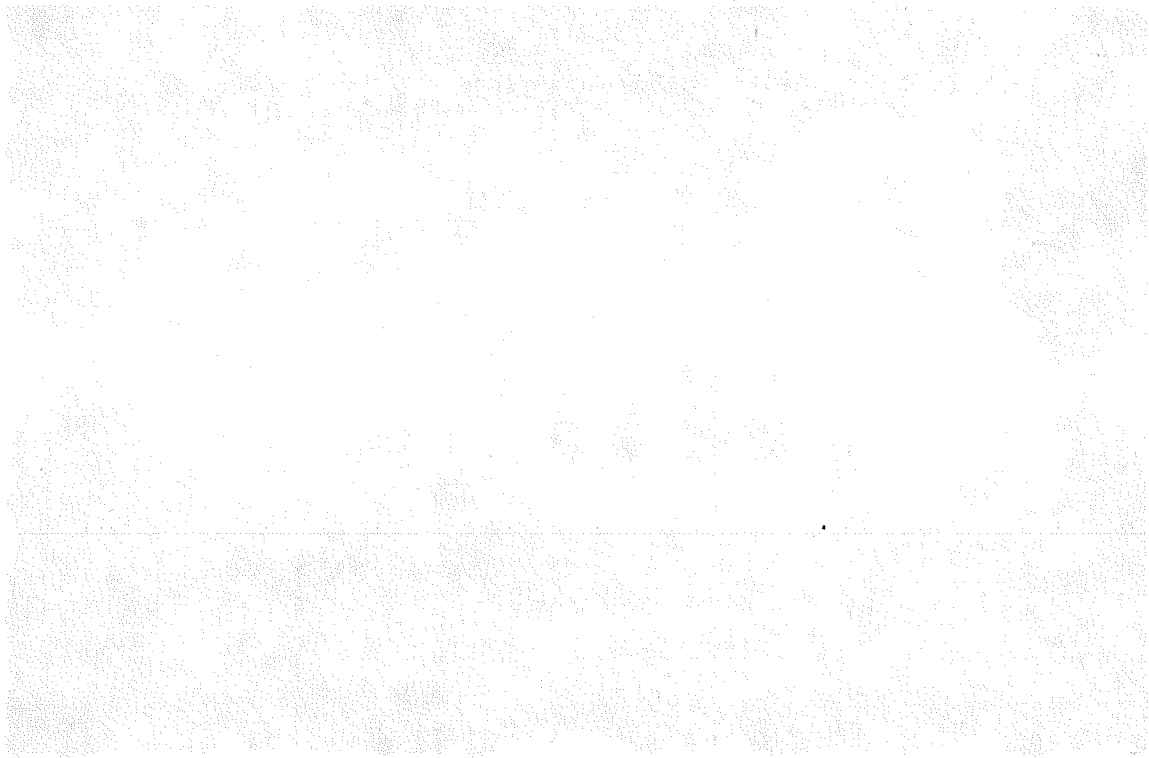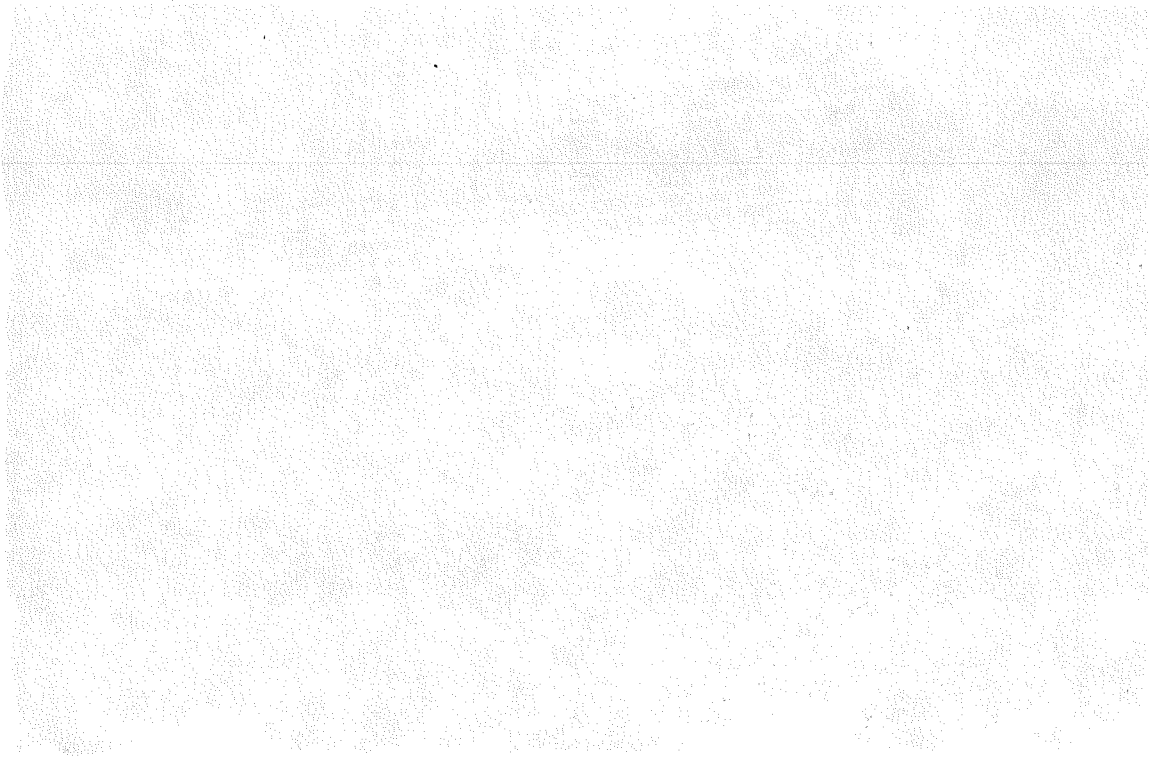

APPENDIX E
DISTRIBUTION LIST

DISTRIBUTION LIST

Civil Aviation Authority (5)
Aviation House
129 Kingsway
London WC2B 6NN England

DOT-FAA AEU-500 (4)
American Embassy
APO New York, NY 09667

Embassy of Australia (1)
Civil Air Attache
1601 Mass. Ave. NW
Washington, DC 20036

University of California (1)
Service Dept Institute of
Transportation Standard Lib
412 McLaughlin Hall
Berkely, CA 94720

Scientific & Tech. Info FAC (1)
ATTN: NASA Rep.
P.O. Box 8757 BWI Airport
Baltimore, MD 21240

British Embassy (1)
Civil Air Attache ATS
3100 Mass. Ave. NW
Washington, DC 20008

Northwestern University (1)
Trisnet Repository
Transportation Center Library
Evanston, ILL 60201

Director DuCentre Exp DE LA (1)
Navigation Aerineene
941 Orly, France

ANE-40	(2)	ACT-61A	(2)	ASW-53B	(2)
ASO-52C4	(2)	AAL-400	(2)	AAC-64D	(2)
APS-13 Nigro	(2)	M-493.2 Bldg.10A	(5)	ACE-66	(2)
AEA-61	(3)			ADL-1	(1)
ADL-4 North	(1)	APS-1	(1)	ALG-300	(1)
AES-3	(1)	APA-300	(1)	ACT-5	(1)
ANM-60	(2)	AGL-60	(2)	AWS-100	(1)

GOVERNMENT

No. of Copies

FAA NATIONAL HEADQUARTERS
800 Independence Ave., SW
Washington, DC 20591

(30)

ATTN: Thomas McSweeney, AWS-100 (2)
Art Hayes, AWS-120 (10)
Henri Branting, AWS-120 (6)
Richard Nelson, AWS-120 (6)
Richard Kirsch, AWS-120 (6)

FAA CENTRAL REGION HEADQUARTERS
601 East 12th Street
Federal Building
Kansas City, MO 64106

ATTN: Barry Clements, ACE-100 (2)
Earsa Tankeseley, ACE-110 (2)
Joe Snitkof, ACE-111 (2)

FAA ALASKAN REGION HEADQUARTERS
701 C Street, Box 14
Anchorage, AL 99513

(2)

ATTN: Dayton Curtis, ANM-170A

FAA MIKE MONRONEY AERONAUTICAL CENTER
P.O. Box 25082
Oklahoma City, OK 73125

(4)

ATTN: Richard Chandler, AAC-119 (2)
Burt Chesterfield, AAC-100 (2)

FAA WESTERN-PACIFIC REGION HEADQUARTERS
P.O. Box 920F07
Worldway Postal Center
Los Angeles, CA 90009

(2)

ATTN: Gary Nakagawa

FAA SOUTHWEST REGION HEADQUARTERS
P.O. Box 1689
Fort Worth, TX 76101

(2)

ATTN: L. B. Andriesen

DISTRIBUTION LIST (cont'd)

FAA SOUTHERN MOUNTAIN REGION HEADQUARTERS
3400 Norman Berry Drive
P.O. Box 20636
Atlanta, GA 30320

(2)

ATTN: William Berry, ASO-200 (2)

FAA NORTHWEST MOUNTAIN REGION HEADQUARTERS
17900 Pacific Highway South
C-68966
Seattle, WA 98168

(16)

ATTN: Steve Wallace, ANM-110N (6)
Bill Boxwell, ANM-111 (2)
Gary Killion, ANM-140L (3)
Iven Connally, ANM-112 (2)
James Hart, ANM-120S (2)
Joseph Starkel, ANM-120S (2)

FAA NEW ENGLAND REGION HEADQUARTERS
12 New England Executive Park
Burlington, MA 01803

(2)

ATTN: Jack Sain, ANE-100 (2)

FAA GREAT LAKES REGION HEADQUARTERS
O'Hare Lake Office Center
2300 East Devon Avenue
Des Plaines, IL 60018

(2)

ATTN: Walter Horn, ACE-115C (2)

FAA DENVER AIRCRAFT CERTIFICATION OFFICE
10455 East 25th Avenue
Aurora, CA 80010

(2)

ATTN: David Grossman, ANM-101D (2)

FAA EASTERN REGION HEADQUARTERS
JFK International Airport
Fitzgerald Federal Building
Jamaica, NY 11430

(2)

ATTN: Ray Borowski, AEA-210 (2)

DISTRIBUTION LIST (cont'd)

FAA EUROPEAN OFFICE HEADQUARTERS
15, Rue de la Loi (3rd Floor)
B-1040 Brussels, Belgium
c/o American Embassy APO, NY 09667
ATTN: Joseph A. Pontecarvo, AEU-200

(2)

FAA LOS ANGELES AIRCRAFT CERTIFICATION OFFICE
3229 East Spring Street
Long Beach, CA 90806-2425

(16)

ATTN: Frederick Lee, ANM-100L (2)
Steve Soltis, ANM-102N (10)
Gilbert Thompson, ANM-130L (2)
Fred Jenkins, ANM-130L (2)

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
Mail Stop 497
Langley Research Center
Hampton, VA 23665

(4)

ATTN: Charles Blankenship (2)
Emilio Alfaro-Bou (2)

CIVIL AVIATION AUTHORITY
CAA Brabazon House
Redhill, Surrey U.K. RH1SQ

(4)

ATTN: Ray Christie (2)
Ray Christie (2)

NATIONAL TRANSPORTATION SAFETY BOARD
800 Independence Ave., SW
Washington, DC 20594

(6)

ATTN: John Clark, TE-60 (2)
Jerry Walhourt, TE-60 (2)
Bill Laynor, TE-60 (2)

NAVAL AIR TEST CENTER
Patuxent River, MD 20670-5304

(2)

ATTN: Dan Watters (2)

DISTRIBUTION LIST (cont'd)

NON-GOVERNMENT

John Reese
Aerospace Industry Association
1725 DeSales St., NW
Washington, DC 20036

(6)

Roy G. Fox
Bell Helicopter Textron
Dept. 81, Flight Technology
P.O. Box 482
Fort Worth, TX 76101

(2)

Bill Shook
McDonnell Douglas Corp.
3855 Lakewood Blvd.
Long Beach, CA 90846

(2)

John L. Gallagher
McDonnell Douglas Corp.
3855 Lakewood Blvd.
Long Beach, CA 90846

(2)

Dayton L. Hartley
Beech Aircraft Corp.
9709 E. Central
Wichita, KS 67201

(2)

Fernon J. Clark
American Airlines
3800 N. Mingo Road
Tulsa, OK 74151

(2)

Richard E. Coykendall
United Airlines, Engineering Dept.
San Francisco International Airport, CA 94128

(2)

Edmund Boullay
Embrassy of France
2164 Florida Ave., NW
Washington, DC 20008

(6)

DISTRIBUTION LIST (cont'd)

Dan M. Motley, Jr.
Lockheed-Georgia Co.
86 South Cobb Drive
Marietta, GA 30063

(2)

Al Grendahl
PTC Aerospace
Route 202
Bantan, CT 06750

(2)

Werner Muenster
Merrerschmitt Bolkow-Blohm
Transport Aircraft Division
D2103 Hamburg 95
P.O. Box 950109

(2)

Donald A. Holmes
USAir
Greater Pittsburg International Airport
Engineering Dept. - Hangar #3 (Room 221)
Pittsburg, PA 15231

(2)

Dennis Manisbusan
Ozark Airlines, Inc.
Box 10007-Lambert
St. Louis International Airport
St. Louis, MO 63145

(2)

Richard Soloski
Cessna Aircraft Company
P.O. Box 7704
Wichita, KS 67217

(2)

Air Transportation Association
1709 New York Ave., NW
Washington, DC 20006

(6)

ATTN: Vern Ballenger (2)
Richard A. Tobiason (2)
Don Collier (2)

DISTRIBUTION LIST (cont'd)

Donald W. Wells (2)
Leigh Instruments, Ltd.
2680 Queensview Drive
Ottawa, Ontario
CANADA K2B8J9

Boeing Commercial Airplane Co. (4)
P.O. Box 3707
Seattle, WA 98124

ATTN: Barry Eberhardt (2)
Edward Widmayer (2)

Gil Wittlin (6)
Lockheed-California Co.
Dept. 76-12, Building 63, Plant A-1
Burbank, CA 91520

Simula, Inc. (27)
10016 S. 51st Street
Phoenix, AZ 85044

ATTN: Richard Zimmermann (2)
Mark Cannon (25)

UNITED STATES DEPARTMENT OF TRANSPORTATION

OFFICE OF THE SECRETARY

WASHINGTON, D.C. 20590

ATTENTION: DIRECTOR, OFFICE OF

SAFETY

WASHINGTON, D.C. 20590

RE: [illegible]

DATE: [illegible]

FROM: [illegible]

SUBJECT: [illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

DOT/FAA Longitudinal impact test of
CT-87/26 a transport airframe section.
transport section
(44) 0000000
00025821

1. Report No. DOT/FAA/CT-87/26	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle LONGITUDINAL IMPACT TEST OF A TRANSPORT AIRFRAME SECTION		5. Report Date July 1988	
		6. Performing Organization Code ACT-330	
7. Author(s) Barry Wade and Dick Johnson		8. Performing Organization Report No. DOT/FAA/CT-87/26	
9. Performing Organization Name and Address Transportation Research Center of Ohio East Liberty, Ohio 43319 Federal Aviation Administration Atlantic City Int. Airport, NJ 08405		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. DTFA03-87-C-00013	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Technical Center Atlantic City Int. Airport, NJ 08405		13. Type of Report and Period Covered Final Feb. - Oct., 1987	
		14. Sponsoring Agency Code	
15. Supplementary Notes			
16. Abstract This report presents the results of longitudinally impact testing a 10-foot section of a transport airplane at peak acceleration and corresponding velocity changes of 7.4g (22.4 ft/sec) and 14.2g (36 ft/sec), respectively. The purpose of the tests was to measure the responses of the fuselage and floor structure to simulated dynamic crash loads. The airframe test section included a full complement of seats and dummies. Acceleration and load/deflection response measurements were obtained from the instrumented fuselage, floor and seat/dummy installation.			
17. Key Words Airframe Section		18. Distribution Statement This document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 281	22. Price

