


Sensing Safety: Developing a Flexible, Portable Alcohol Detection Patch for Community Wellness

Ava Hedayatipour, PhD

Ryan Huynh

Wahaab Ademola

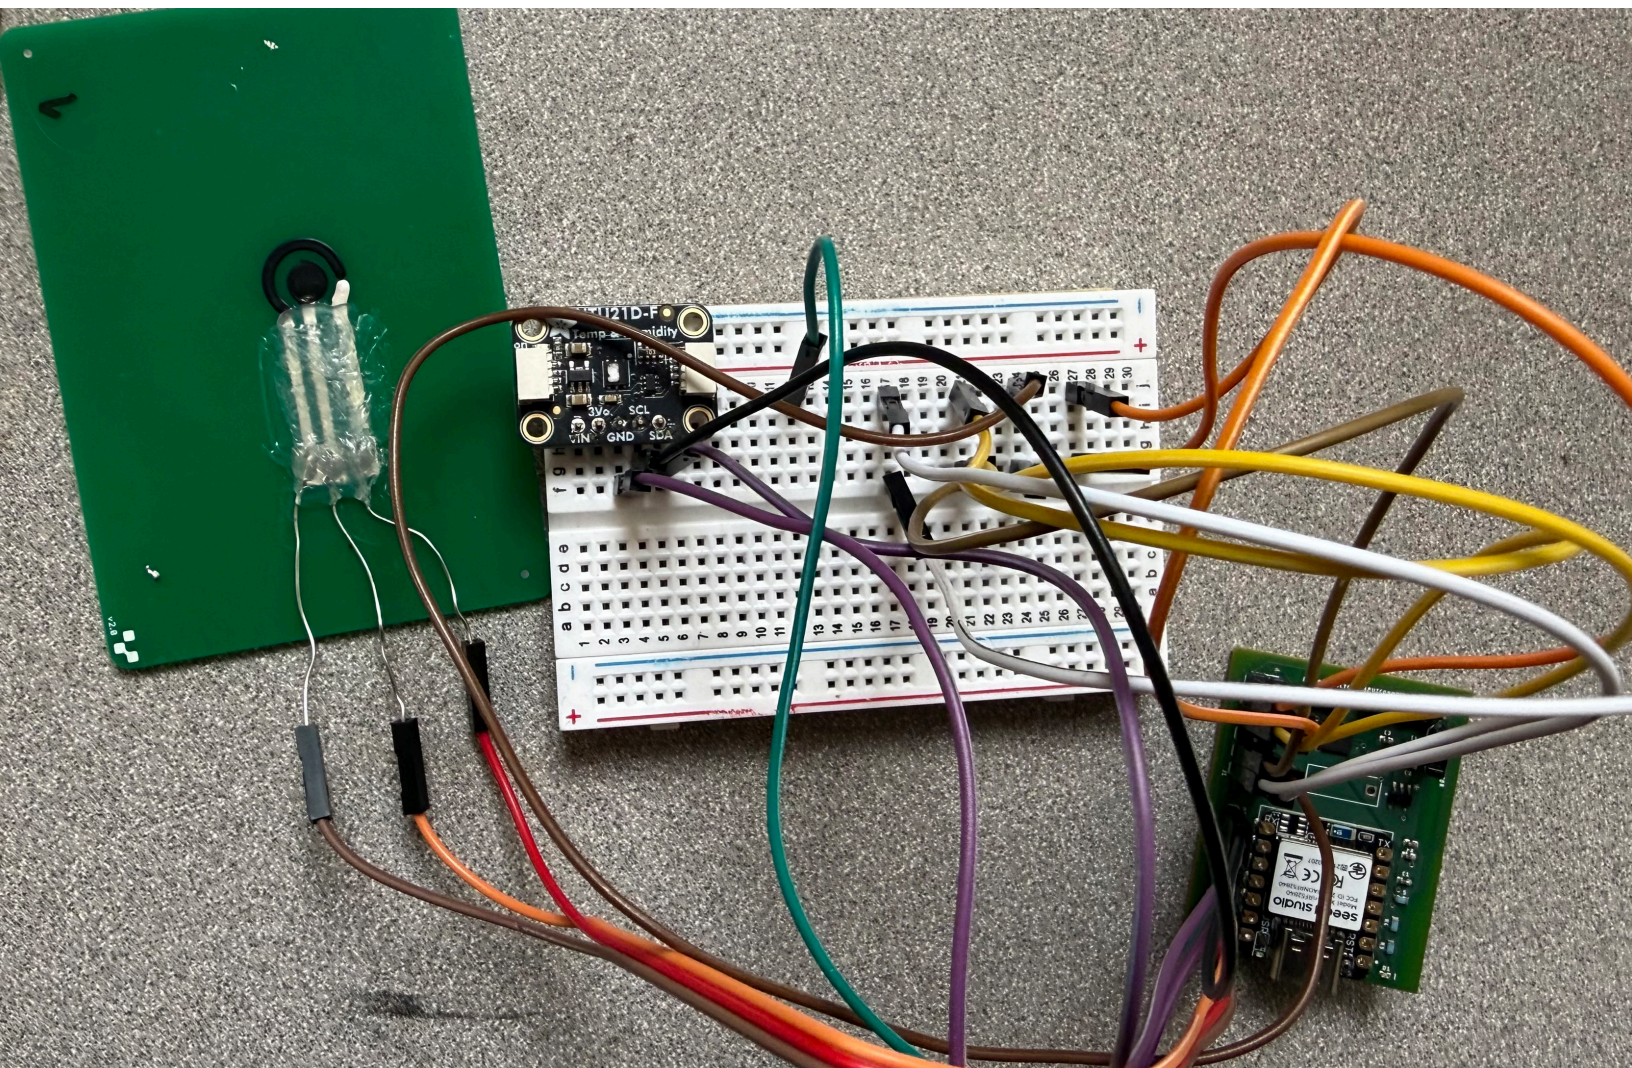

MINETA TRANSPORTATION INSTITUTE

Founded in 1991, the Mineta Transportation Institute (MTI), an organized research and training unit in partnership with the Lucas College and Graduate School of Business at San José State University (SJSU), increases mobility for all by improving the safety, efficiency, accessibility, and convenience of our nation's transportation system. Through research, education, workforce development, and technology transfer, we help create a connected world. MTI leads the [California State University Transportation Consortium \(CSUTC\)](#) funded by the State of California through Senate Bill 1 and the Rail Resilience to Severe Weather: Training and Research Program (RR2SW) funded by the Federal Railroad Administration. MTI focuses on three primary responsibilities:

Research

MTI conducts multi-disciplinary research focused on surface transportation that contributes to effective decision making. Research areas include: active transportation; planning and policy; security and counterterrorism; sustainable transportation and land use; transit and passenger rail; transportation engineering; transportation finance; transportation technology; and workforce and labor. MTI research publications undergo expert peer review to ensure the quality of the research.

Education and Workforce Development

To ensure the efficient movement of people and goods, we must prepare the next generation of skilled transportation professionals who can lead a thriving, forward-thinking transportation industry for a more connected world. To help achieve this, MTI sponsors a suite of workforce development and education opportunities. The Institute supports educational programs offered by the Lucas Graduate School of Business: a Master of Science in Transportation Management, plus graduate certificates that include High-Speed and Intercity Rail Management and Transportation Security Management. These flexible programs offer live online classes so that working transportation professionals can pursue an advanced degree regardless of their location.

Information and Technology Transfer

MTI utilizes a diverse array of dissemination methods and media to ensure research results reach those responsible for managing change. These methods include publication, seminars, workshops, websites, social media, webinars, and other technology transfer mechanisms. Additionally, MTI promotes the availability of completed research to professional organizations and works to integrate the research findings into the graduate education program. MTI's extensive collection of transportation-related publications is integrated into San José State University's world-class Martin Luther King, Jr. Library.

Disclaimer

The contents of this report reflect the views of the authors, who are responsible for the facts and accuracy of the information presented herein. This document is disseminated in the interest of information exchange. MTI's research is funded, partially or entirely, by grants from the U.S. Department of Transportation, the California Department of Transportation, and the California State University Office of the Chancellor, whom assume no liability for the contents or use thereof. This report does not constitute a standard specification, design standard, or regulation.

Report 26-30

Sensing Safety: Developing a Flexible, Portable Alcohol Detection Patch for Community Wellness

Ava Hedayatipour, PhD
Ryan Huynh
Wahaab Ademola

September 2026

A publication of the
Mineta Transportation Institute
Created by Congress in 1991

College of Business
San José State University
San José, CA 95192-0219

Technical Report Documentation Page

1. Report No. 26-30	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Sensing Safety: Developing a Flexible, Portable Alcohol Detection Patch for Community Wellness		5. Report Date September 2026	
		6. Performing Organization Code	
7. Authors Ava Hedayatipour, PhD Ryan Huynh Wahaab Ademola		8. Performing Organization Report CA-MTI-2526	
9. Performing Organization Name and Address Mineta Transportation Institute College of Business San José State University San José, CA 95192-0219		10. Work Unit No.	
		11. Contract or Grant No. SB1-SJAUX_2023-26	
12. Sponsoring Agency Name and Address State of California SB1 2017/2018 Trustees of the California State University Sponsored Programs Administration 401 Golden Shore, 5th Floor Long Beach, CA 90802		13. Type of Report and Period Covered	
		14. Sponsoring Agency Code	
15. Supplemental Notes 10.31979/mti.2026.2526			
16. Abstract Alcohol-impaired driving remains one of the leading causes of traffic fatalities and serious injuries in the United States, posing significant challenges to transportation safety and imposing substantial social and economic costs. Although breathalyzers and wearable alcohol monitoring devices can help detect alcohol consumption, many existing technologies are expensive, bulky, or impractical for continuous, long-term monitoring. This study investigates a low-cost electrochemical sensing platform that could support future wearable alcohol monitoring systems for transportation safety applications. Specifically, the report presents the design, fabrication, and experimental evaluation of a custom screen-printed electrode (SPE) integrated with the Texas Instruments LMP91000 potentiostat. Each disposable electrode was fabricated at an estimated material cost of approximately US\$0.10 and successfully detected ethanol concentrations ranging from 0% to 30% using cyclic voltammetry and chronoamperometry. Flexible carbon and silver conductive inks were used to fabricate the electrode, which was evaluated using artificial sweat solutions containing varying ethanol concentrations. Experimental results demonstrated repeatable electrochemical responses that increased systematically with ethanol concentration, validating both the fabrication approach and sensing methodology. By combining inexpensive disposable electrodes with reusable electronics, the proposed system provides a scalable foundation for future wearable alcohol monitoring technologies that could support impaired-driving prevention, workplace safety, and transportation research.			
17. Key Words Alcohol-impaired driving, traffic safety, wearable sensors, electrochemical sensors, biosensors		18. Distribution Statement No restrictions. This document is available to the public through The National Technical Information Service, Springfield, VA 22161.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 27	22. Price

Copyright © 2026
by **Mineta Transportation Institute**
All rights reserved.

DOI: 10.31979/mti.2026.2526

Mineta Transportation Institute
College of Business
San José State University
San José, CA 95192-0219

Email: mineta-institute@sjsu.edu

transweb.sjsu.edu/research/2526

Acknowledgments

This research was generously funded through a grant from State of California Senate Bill 1, the Road Repair and Accountability Act of 2017.

Contents

Acknowledgements	vi
List of Figures	viii
1. Introduction	1
2. Literature Review	2
3. Materials and Methods	5
3.1 Materials	5
3.2 Sensor Design and Fabrication	5
3.3 Experimental Setup	8
3.4. Preparation of Ethanol Test Solutions	8
4. Tests and Results	11
4.1 Cyclic Voltammetry (CV) Test	11
4.2 Chronoamperometry (CA) Test	12
5. Conclusion	15
Bibliography	16
About the Authors	18

List of Figures

Figure 1. Designed PCB Using EAGLE	6
Figure 2. Electrode Layout on EAGLE	7
Figure 3. SPE printed on Fiberglass Substrate Using Voltera V-One Printer	7
Figure 4. Insulating Coat Applied to the Electrodes	7
Figure 5. Experimental Setup for Electrochemical Testing	8
Figure 6. Solutions for Different Concentration of Deionized Water, Ethyl Alcohol, and Normal Saline Solution	9
Figure 7. Expected CV Graph	11
Figure 8. Experimental CV Response	12
Figure 9. Expected CA Graph	13
Figure 10. Experimental CA Response	13

1. Introduction

Alcohol-impaired driving remains one of the leading causes of traffic fatalities and serious injuries in the United States and throughout California. According to the National Highway Traffic Safety Administration (NHTSA), thousands of fatalities each year involve drivers operating vehicles under the influence of alcohol. In California, impaired driving continues to place significant burdens on transportation safety, emergency response systems, public health, and economic productivity. Reducing alcohol-impaired driving is therefore a major transportation safety priority consistent with California Senate Bill 1 (SB1), which supports research that improves the safety, reliability, and efficiency of transportation systems [1–3].

Recent advances in wearable sensing technologies have created opportunities for continuous, non-invasive monitoring of physiological biomarkers, including transdermal alcohol concentration. Unlike conventional breathalyzers, wearable alcohol sensors provide continuous monitoring without requiring active user participation. Such technologies have potential applications in impaired driving prevention, fleet safety monitoring, rehabilitation programs, and transportation workforce safety.

This research develops a low-cost flexible electrochemical alcohol sensor capable of detecting ethanol concentrations representative of human perspiration. By reducing the cost and increasing the accessibility of wearable alcohol monitoring, this work supports future transportation safety technologies aimed at reducing alcohol-impaired driving and improving roadway safety for Californians. This project aligns with the mission of the Mineta Transportation Institute by investigating sensing technologies that may contribute to safer transportation systems. Although this study focuses on the development of the sensing platform rather than deployment within vehicles, the technology represents a foundational component for future wearable systems capable of identifying alcohol impairment before individuals operate motor vehicles. Such technologies support California SB1's goals of improving transportation safety and protecting the mobility of people and goods.

2. Literature Review

Despite decades of legislation, enforcement, and public education campaigns, alcohol-impaired driving remains a major contributor to roadway fatalities in the United States. According to the National Highway Traffic Safety Administration (NHTSA), 13,524 people were killed in alcohol-impaired traffic crashes in 2022, representing 32% of all roadway fatalities, or approximately one death every 39 minutes. In addition to the human toll, alcohol-impaired crashes resulted in an estimated \$58 billion in economic costs, including medical care, emergency response, property damage, traffic congestion, and lost productivity. These persistent impacts have motivated continued research into technologies capable of preventing impaired driving before a vehicle is operated rather than relying solely on post-incident enforcement strategies [4–6].

Recent transportation research has therefore expanded beyond traditional roadside breath testing toward continuous and passive alcohol monitoring systems that can provide objective measures of alcohol exposure during everyday activities. Wearable alcohol sensing technologies have emerged as a promising research direction because they offer the possibility of continuously monitoring alcohol consumption without requiring active user participation. Such systems could support transportation safety through voluntary self-monitoring, fleet safety programs, rehabilitation monitoring, ignition interlock alternatives, and future intelligent transportation systems capable of identifying impairment before driving occurs. Within this context, researchers have increasingly investigated wearable electrochemical sensors that combine portability, low power consumption, and continuous physiological monitoring. Most wearable alcohol sensors detect ethanol either through transdermal vapor released from the skin or through direct electrochemical analysis of sweat, each offering distinct advantages and technical challenges [7–10].

Transdermal alcohol monitoring systems measure ethanol vapor that diffuses through the skin following alcohol consumption. Commercial devices such as the Secure Continuous Remote Alcohol Monitor (SCRAM) and the BACtrack Skyn employ fuel-cell electrochemical sensing to estimate transdermal alcohol concentration (TAC), enabling continuous and passive alcohol monitoring without active user intervention. The SCRAM system has demonstrated high reliability and has been widely adopted in forensic supervision, legal compliance, and alcohol rehabilitation programs. More recently, the BACtrack Skyn was introduced as a lightweight wrist-worn alternative that improves user comfort while maintaining acceptable agreement with self-reported alcohol consumption and established transdermal monitoring techniques. Courtney et al. [11] reported that participants strongly preferred the BACtrack Skyn over the bulkier SCRAM monitor during a 28-day field study and concluded that the device is suitable for continuous alcohol monitoring in naturalistic environments. Similarly, Ash et al. [12] demonstrated that the

BACtrack Skyn provides promising sensitivity and specificity for alcohol detection while exhibiting substantially greater user comfort than conventional ankle-mounted monitors.

Despite these advances, transdermal alcohol sensing continues to face several practical limitations. Because ethanol must diffuse through body tissues before reaching the skin's surface, transdermal measurements exhibit physiological delays ranging from approximately 30 minutes to several hours relative to blood alcohol concentration. Furthermore, sensor performance is influenced by environmental temperature, humidity, perspiration rate, skin properties, and motion artifacts, which contribute to measurement variability and reduce quantitative accuracy [11,13,14]. Although commercial devices have significantly improved the practicality of continuous alcohol monitoring, they remain relatively expensive and integrate reusable sensing components directly into the wearable device.

To overcome the inherent limitations of transdermal alcohol monitoring, researchers have developed sweat-based electrochemical biosensors capable of directly detecting ethanol present in perspiration. Many of these systems utilize enzymatic reactions involving alcohol oxidase or alcohol dehydrogenase to catalyze ethanol oxidation and generate electrochemically measurable signals proportional to alcohol concentration. Enzymatic biosensors generally provide faster response times, improve skin conformity, and enhance sensitivity compared with transdermal vapor sensing approaches. However, their performance depends heavily on enzyme stability, which deteriorates because of temperature fluctuations, pH changes, dehydration, and prolonged operation. In addition, enzyme immobilization, mediator layers, and protective membranes increase fabrication complexity and manufacturing cost, as well as reduce long-term device reliability [8,9,15].

Recent developments in printed electronics have motivated increasing interest in non-enzymatic electrochemical sensing approaches. Non-enzymatic sensors eliminate biological recognition elements by directly measuring ethanol oxidation at conductive electrode surfaces, thereby simplifying fabrication while improving chemical stability and operational lifetime. Screen-printed electrodes fabricated using conductive carbon and metallic inks have emerged as attractive platforms because they are inexpensive, mechanically flexible, scalable for mass production, and compatible with wearable electronics [7–10]. Nevertheless, most existing wearable alcohol monitoring systems permanently integrate the sensing interface into the wearable device. During repeated use, these sensing surfaces are continuously exposed to perspiration, salts, skin oils, and other biological contaminants that may degrade sensor performance over time. In addition, reusable sensing surfaces require cleaning or long-term reuse, creating practical maintenance and hygiene challenges for wearable alcohol monitoring systems.

The present work addresses these limitations by developing a low-cost disposable screen-printed carbon electrode integrated with a reusable electronic measurement platform based on the Texas Instruments LMP91000 analog front-end. Unlike existing wearable alcohol monitoring systems, only the electrochemical sensing element is discarded after use while the potentiostat, microcontroller, and supporting electronics are retained. The electrode is fabricated using commercially available carbon and silver conductive inks through a printed electronics process, resulting in an estimated material cost of approximately US\$0.10 per electrode. This disposable sensing architecture reduces manufacturing cost, minimizes performance degradation caused by repeated exposure to perspiration, eliminates the need to reuse sweat-exposed sensing surfaces, and enables practical large-scale deployment of wearable alcohol sensors. By combining inexpensive disposable electrodes with reusable electronics, the proposed system establishes a scalable platform for future wearable alcohol monitoring technologies that can support transportation safety, workplace monitoring, and early intervention strategies aimed at reducing alcohol-impaired driving.

3. Materials and Methods

3.1. Materials

Flexible carbon conductive ink (Voltera, Canada) was used to fabricate the working and counter electrodes, while silver conductive ink was used to print the reference electrode and electrical interconnects. The electrodes were fabricated on a fiberglass substrate using a Voltera V-One printed electronics system. A Texas Instruments LMP91000 analog front-end potentiostat served as the electrochemical interface, and a Seeeduino XIAO microcontroller controlled sensor operation and data acquisition. An HTU21D digital temperature and humidity sensor was incorporated to monitor environmental conditions during testing. Additional materials included deionized (DI) water, reagent-grade ethyl alcohol, commercially available 0.9% saline solution, and ethylene-vinyl acetate (EVA) adhesive for insulating the printed electrodes.

3.2 Sensor Design and Fabrication

The printed circuit board (PCB) was designed using Autodesk EAGLE with emphasis on compact size, low-noise signal routing, and compatibility with low-current electrochemical measurements. The LMP91000 potentiostat was selected as the analog front-end because of its programmable bias voltage and transimpedance amplifier, making it well suited for electrochemical sensing applications. Supporting passive components, including pull-up resistors, decoupling capacitors, and filtering circuitry, were incorporated to ensure stable operation and reliable I²C communication between the potentiostat, microcontroller, and environmental sensors.

Special consideration was given to PCB layout to minimize electrical noise. Analog and digital traces were routed separately, while continuous ground planes were implemented to reduce electromagnetic interference and provide low-impedance return paths. Short trace lengths were maintained between the potentiostat and sensor interface to minimize parasitic resistance and capacitance that could distort the small currents generated during ethanol oxidation. Design Rule Checks (DRC) and Electrical Rule Checks (ERC) were completed within Autodesk EAGLE prior to fabrication to verify manufacturability and electrical integrity (Figure 1).

The screen-printed electrode (SPE) geometry was also designed using Autodesk EAGLE. The design consisted of three electrodes: a carbon working electrode, a carbon counter electrode, and a silver reference electrode. Electrode dimensions and spacing were selected to promote uniform current distribution while minimizing electrical resistance and preventing short circuits during fabrication (Figure 2).

Following fabrication, a thin layer of ethylene-vinyl acetate (EVA) was applied to insulate the conductive traces while leaving only the active sensing region exposed. This insulation defined the electrochemical reaction area and prevented unintended electrical contact. Fine-gauge wires were attached to the silver contact pads using controlled-temperature soldering, and continuity measurements were performed to verify electrical connectivity before experimental testing (Figure 4).

The image shows a custom printed circuit board (PCB) assembly. Key components and labels include:

- BATTERY CONNECTOR**: Located at the top left.
- VOLTAGE REGULATOR**: A large component labeled "MP9100C" in the center.
- POTENTIOMETER**: A variable resistor used for adjusting output voltage.
- EXTERNAL INPUT CONNECTOR**: A multi-pin connector on the left side.
- HTU21D1**: A digital temperature and humidity sensor.
- FLEXAODES**: A component or label at the bottom right.
- 2X6 FEMALE**: A header connector for additional modules.
- S1**: A switch or indicator LED.
- HTU21D1 CONN**: Connector for the sensor module.
- 155-1750-1-N0**: A part number or identifier at the bottom.

Figure 2. Electrode Layout on EAGLE

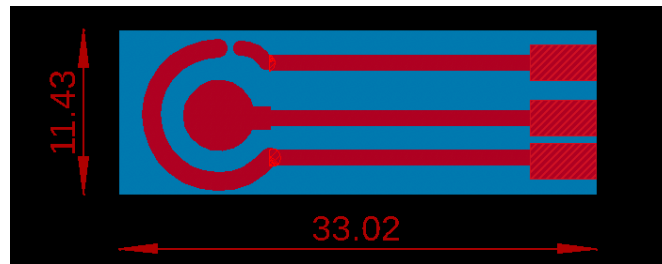


Figure 3. SPE Printed on Fiberglass Substrate Using Voltera V-One Printer


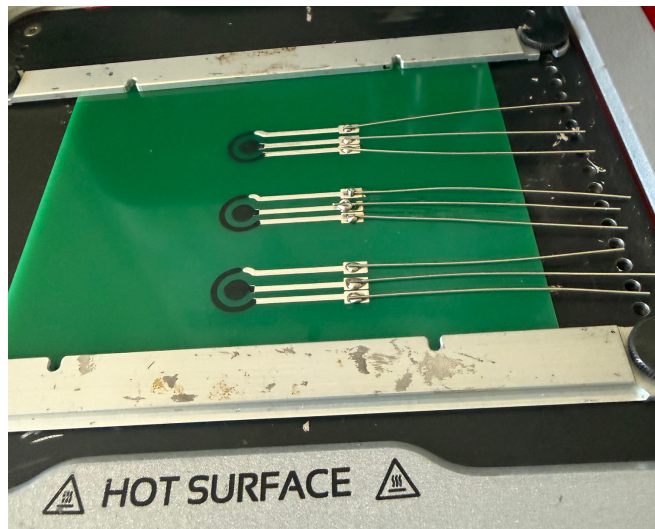



Figure 4. Insulating Coat Applied to the Electrodes

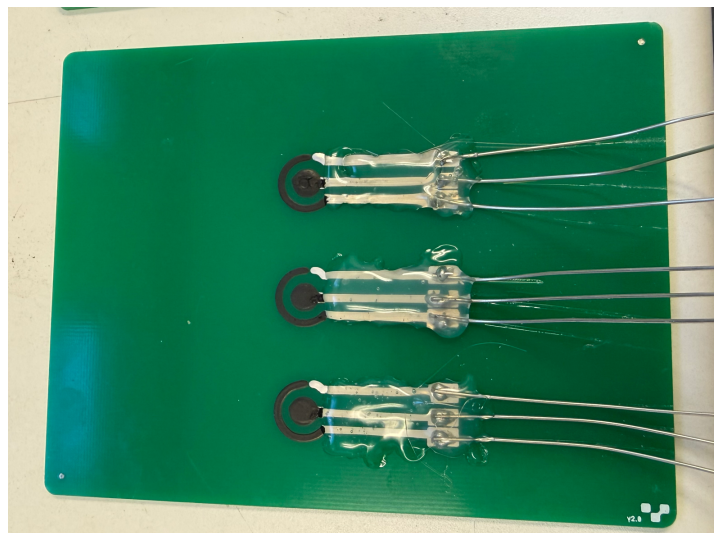

3.3 Experimental Setup

The fabricated screen-printed electrode was interfaced with the LMP91000 potentiostat for electrochemical characterization. The carbon working electrode, silver reference electrode, and carbon counter electrode were connected directly to the corresponding working (WE), reference (RE), and counter (CE) terminals of the potentiostat. The LMP91000 and HTU21D environmental sensor communicated with the Seeeduino XIAO microcontroller through a shared I²C interface. The microcontroller configured the potentiostat, acquired measurement data, and transmitted the recorded signals to a host computer for analysis (Figure 5).

Figure 5. Experimental Setup for Electrochemical Testing

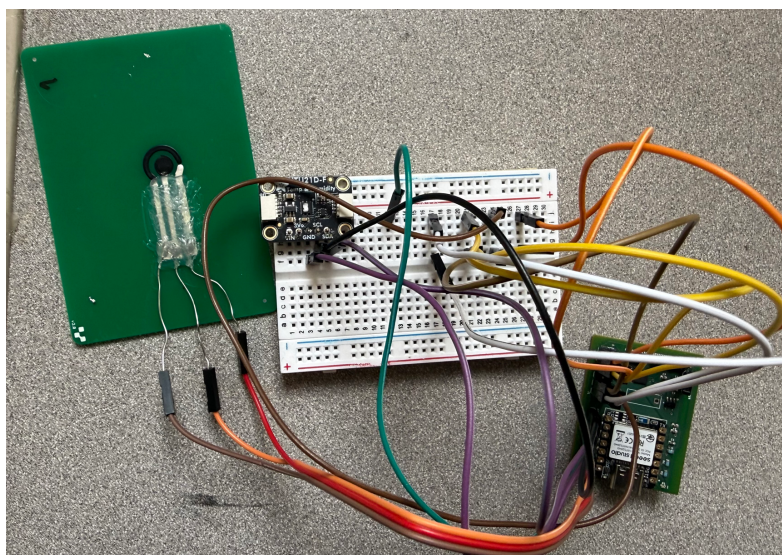

For each experiment, a small droplet of the prepared ethanol solution was dispensed onto the active sensing region of the electrode, ensuring complete coverage of the working, counter, and reference electrodes while avoiding the exposed electrical contacts. Uniform droplet placement was maintained throughout testing to minimize measurement variability resulting from inconsistent electrode coverage.

Because ethanol is highly volatile, prolonged exposure to ambient conditions can alter analyte concentration through evaporation. Although evaporation is commonly reduced by enclosing the sensing region, measurements in this study were completed immediately after sample deposition. The relatively short measurement duration minimized evaporation effects and ensured consistent electrochemical responses among successive experiments.

3.4 Preparation of Ethanol Test Solutions

Electrochemical testing was performed using ethanol solutions prepared to simulate the ionic composition of human sweat. A 0.9% sodium chloride solution (approximately 0.154 M NaCl)

served as the stock electrolyte and was diluted with deionized water to produce an electrolyte concentration of approximately 0.1 M NaCl. This concentration was selected because reported sodium chloride concentrations in human sweat typically range from 0.05 M to 0.15 M depending on environmental conditions and individual physiology.

The required dilution was calculated using the standard dilution relationship

$$M_1V_1 = M_2V_2$$

where M_1 and V_1 represent the concentration and volume of the stock saline solution and M_2 and V_2 represent the desired final concentration and volume.

Six ethanol solutions containing 0%, 5%, 10%, 15%, 20%, and 30% ethanol by volume were prepared. Each solution consisted of diluted saline, deionized water, and the appropriate volume of ethyl alcohol, as summarized in Table 1. The prepared solutions served as artificial sweat samples for evaluating sensor performance across increasing ethanol concentrations (Figure 6).

Figure 6. Solutions for Different Concentrations of Deionized Water, Ethyl Alcohol, and Normal Saline Solution



Table 1. Solutions for Different Concentrations of Deionized Water, Ethyl Alcohol, and Normal Saline Solution

Alcohol Concentration	0.9% Saline (ml)	DI Water (ml)	Ethyl Alcohol (ml)
0	20	10	0
5%	20	10	1.6
10%	20	10	3.
15%	20	10	4.7
20%	20	10	6.3
30%	20	10	9.5

4. Tests and Results

4.1 Cyclic Voltammetry (CV) Test

Cyclic voltammetry (CV) was employed to characterize the oxidation and reduction behavior of ethanol on the surface of the printed carbon electrode. During CV testing, the electrode potential was linearly swept between predetermined voltage limits while continuously recording the resulting current. This procedure generated a current–potential (I–E) curve, which exhibits characteristic oxidation and reduction peaks associated with the electrochemical reactions of ethanol at the electrode interface (Figure 7).

Each ethanol concentration (0%, 5%, 10%, 15%, 20%, and 30%) was tested independently. For each test, the potential was swept from –330 mV to +330 mV during each cycle. The resulting CV curves were then compared with the expected cyclic voltammetry behavior typically observed for ethanol oxidation reactions. The raw data collected during the experiments were exported and processed using MATLAB to generate graphical representations of the electrochemical response.

Figure 7. Expected CV Graph


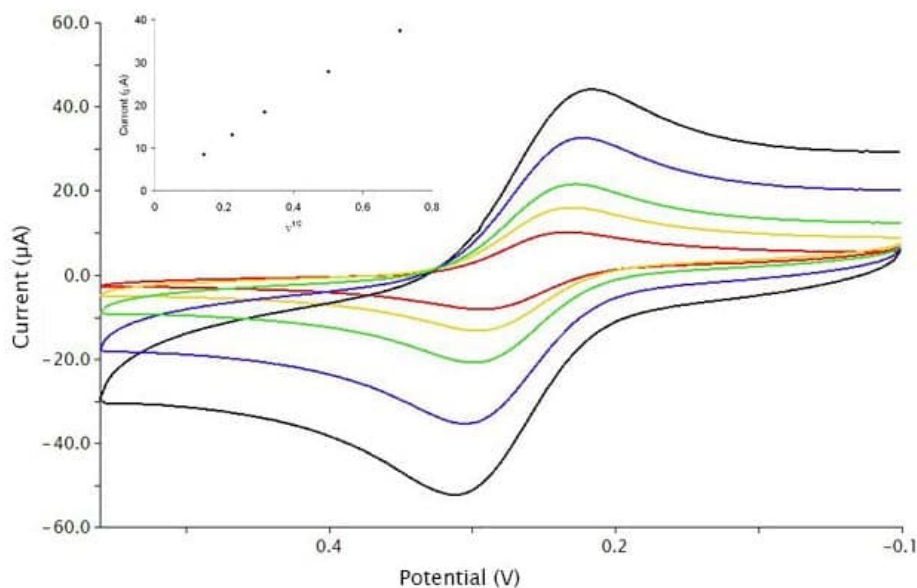


Figure 8. Experimental CV Response

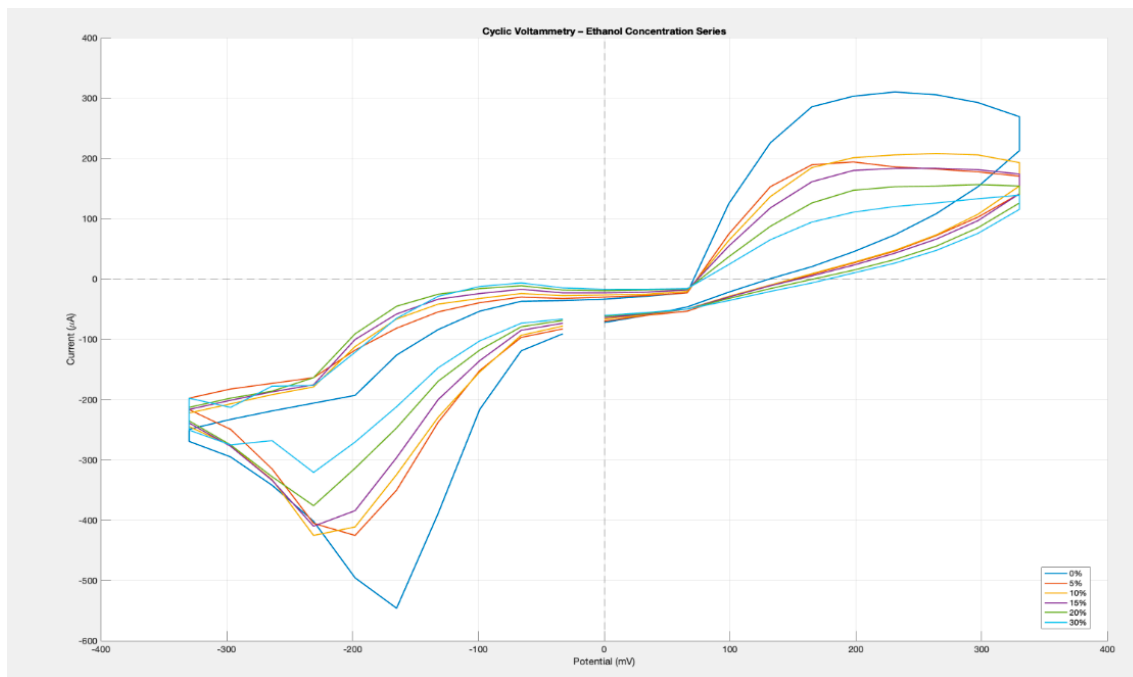

Analysis of the CV results (Figure 8) showed that the oxidation peak current varied systematically with ethanol concentration. This change in peak current indicates differences in electrochemical activity at the electrode surface and confirms the sensitivity of the sensor to varying ethanol levels. Additionally, the separation between the oxidation and reduction peaks provided insight into the reversibility of the electrochemical reaction and the kinetics of electron transfer. Minor variations in peak shape and magnitude were attributed to diffusion effects, the surface condition of the printed electrode, and small differences in droplet placement and contact area between measurements.

4.2 Chronoamperometry (CA) Test

Following cyclic voltammetry characterization, chronoamperometry (CA) was performed to evaluate the time-dependent current response of the sensor at fixed applied potentials. This technique is particularly useful for quantitative analysis, as it allows direct comparison of steady-state current levels across different ethanol concentrations as a function of time (Figure 9).

During CA testing, the applied potential was stepped from an initial value of 0 mV to 60 mV and subsequently to 250 mV. Upon each potential step, the resulting current was recorded over several seconds to capture both the initial transient response and the subsequent decay toward a stable, saturated current value. Each ethanol concentration (0%, 5%, 10%, 15%, 20%, and 30%) was tested individually. The recorded data were exported to Microsoft Excel and subsequently processed and plotted using MATLAB for analysis and visualization.

Figure 9. Expected CA Graph


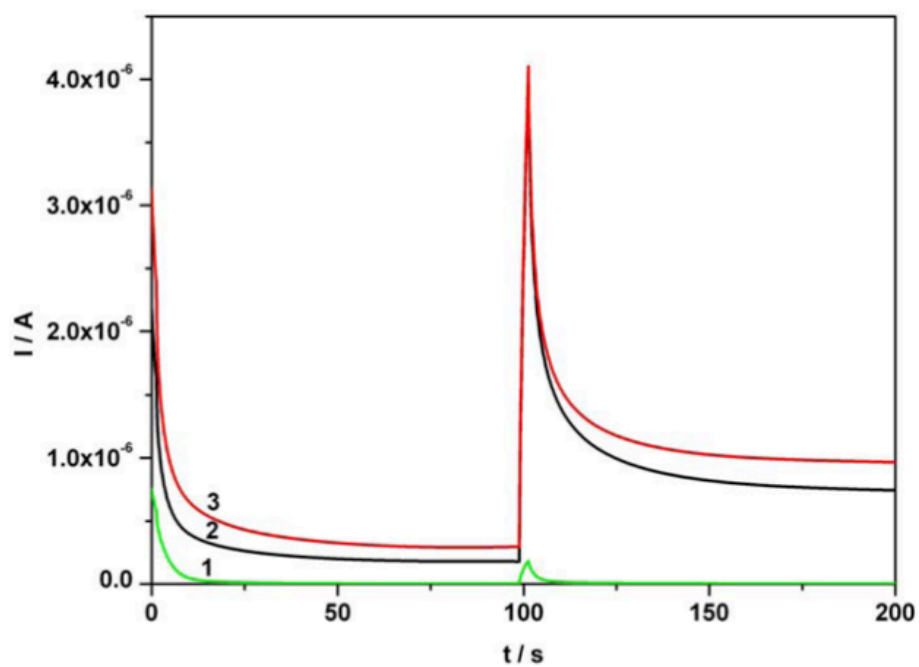


Figure 10. Experimental CA Response

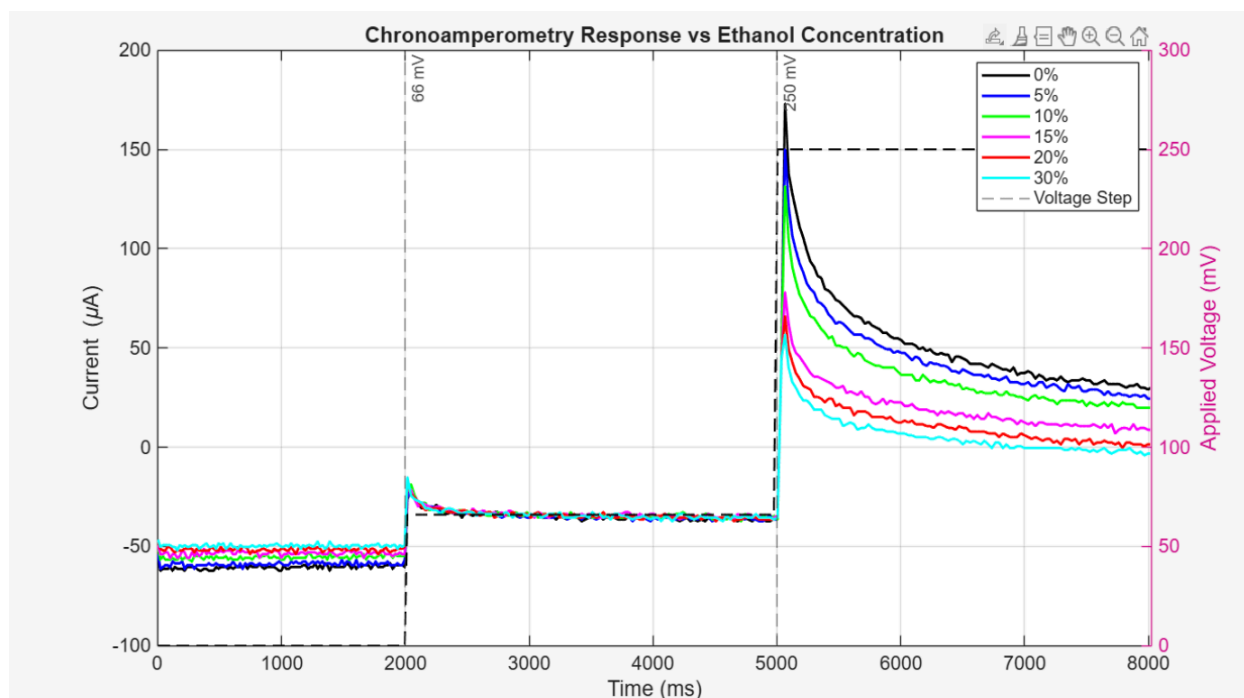

The chronoamperometry results demonstrate the time-dependent current response of the fabricated screen-printed electrode at applied potentials of approximately 60 mV and 250 mV (Figure 10). Immediately following each voltage step, a rapid increase in current was observed, corresponding to the oxidation of ethanol at the electrode surface and the establishment of charge transfer between the electrode and electrolyte. This initial current spike was followed by a gradual exponential decay toward a steady-state current, consistent with diffusion-controlled electrochemical behavior.

Distinct current responses were observed for each ethanol concentration, indicating that the fabricated sensor was capable of differentiating between varying ethanol levels. As ethanol concentration increased, the magnitude of the measured current also changed, confirming that the electrochemical response was directly influenced by ethanol concentration within the artificial sweat electrolyte. Although minor fluctuations and electrical noise were present in several measurements, the overall response remained consistent across repeated tests and followed the expected chronoamperometric behavior.

Combined with the cyclic voltammetry results, these findings demonstrate that the screen-printed carbon electrode successfully detected ethanol through electrochemical oxidation. The reproducible current responses obtained using both electrochemical techniques validate the proposed fabrication method and confirm the suitability of the printed electrode for low-cost alcohol sensing applications. These results establish a foundation for future work involving sensor calibration, optimization, and integration into flexible wearable alcohol monitoring systems.

5. Conclusion

This study demonstrated the successful development of a portable electrochemical alcohol sensing platform based on a custom screen-printed electrode and the LMP91000 potentiostat. Experimental results confirmed that the fabricated sensor responds consistently to varying ethanol concentrations, demonstrating the feasibility of the proposed design for wearable alcohol sensing applications. Beyond the laboratory validation presented in this work, the proposed sensing platform has significant potential for transportation safety applications. Continuous wearable alcohol monitoring could provide early warning systems that discourage impaired driving, assist commercial fleet operators in promoting workplace safety, support court-ordered alcohol monitoring programs, and contribute to reducing alcohol-related traffic crashes. These applications directly support the objectives of California Senate Bill 1 by advancing technologies that improve the safety and reliability of the state's transportation system. Future research will focus on improving sensor sensitivity, calibration with human sweat, wireless communication, miniaturization, and integration into wearable devices suitable for real-world transportation safety applications.

Bibliography

- [1] California Office of Traffic Safety. (2024). California impaired driving program.
- [2] California Transportation Commission. (2023). Road Repair and Accountability Act of 2017 (SB1).
- [3] National Highway Traffic Safety Administration. (2023). Traffic safety facts 2022: Alcohol-impaired driving. U.S. Department of Transportation.
- [4] National Highway Traffic Safety Administration. (2023). Countermeasures that work: A highway safety countermeasure guide for state highway safety offices (11th ed., DOT HS 813 441). U.S. Department of Transportation.
- [5] Centers for Disease Control and Prevention. (2025). What works: Strategies to prevent alcohol-impaired driving. U.S. Department of Health and Human Services.
- [6] National Highway Traffic Safety Administration. (2023). Advanced impaired driving prevention technology: Advance notice of proposed rulemaking. U.S. Department of Transportation.
- [7] Bandodkar, A. J., Molinnus, D., Mirza, O., Guinovart, T., Windmiller, J. R., Valdés-Ramírez, G., Andrade, F. J., Schöning, M. J., & Wang, J. (2014). Epidermal tattoo potentiometric sodium sensors with wireless signal transduction for continuous non-invasive sweat monitoring. *Biosensors and Bioelectronics*, 54, 603–609.
- [8] Gao, W., Emaminejad, S., Nyein, H. Y. Y., Challa, S., Chen, K., Peck, A., Fahad, H. M., Ota, H., Shiraki, H., Kiriya, D., Lien, D. H., Brooks, G. A., Davis, R. W., & Javey, A. (2016). Fully integrated wearable sensor arrays for multiplexed in situ perspiration analysis. *Nature*, 529(7587), 509–514.
- [9] Bariya, M., Nyein, H. Y. Y., & Javey, A. (2018). Wearable sweat sensors. *Nature Electronics*, 1(3), 160–171.
- [10] Shahzad, S., Iftikhar, F. J., Shah, A., Rehman, H. A., & Iwuoha, E. (2024). Novel interfaces for internet of wearable electrochemical sensors. *RSC Advances*, 14(49), 36713–36732.
- [11] Courtney, J. B., Russell, M. A., & Conroy, D. E. (2023). Acceptability and validity of using the BACtrack Skyn wrist-worn transdermal alcohol concentration sensor to capture alcohol use across 28 days under naturalistic conditions: A pilot study. *Alcohol*, 108, 30–43.

- [12] Ash, G. I., Gueorguieva, R., Barnett, N. P., Wang, W., Robledo, D. S., DeMartini, K. S., Redeker, N. S., O'Malley, S. S., & Fucito, L. M. (2022). Sensitivity, specificity, and tolerability of the BACTrack Skyn compared to other alcohol monitoring approaches among young adults in a field-based setting. *Alcoholism: Clinical and Experimental Research*, 46(5), 783–796.
- [13] Marques, J. C., Oliveira, C., Pereira, J., & Moreira, D. N. (2017). Transdermal alcohol monitoring: Scientific and forensic perspectives. *Alcohol and Alcoholism*, 52(3), 285–291.
- [14] Swift, R. (2000). Transdermal alcohol measurement for estimation of blood alcohol concentration. *Alcoholism: Clinical and Experimental Research*, 24(4), 422–423.
- [15] Kim, J., Jeerapan, I., Imani, S., Cho, T. N., Bandodkar, A. J., Cinti, S., Mercier, P. P., & Wang, J. (2016). Noninvasive alcohol monitoring using a wearable tattoo-based iontophoretic-biosensing system. *ACS Sensors*, 1(8), 1011–1019.

About the Authors

Dr. Ava Hedayatipour is an Assistant Professor in the Department of Electrical Engineering at California State University, Long Beach (CSULB). Her research focuses on flexible and printed electronics, wearable biomedical sensors, embedded systems, point-of-care diagnostic devices, and microfabrication technologies. She leads research on the development of low-cost sensing platforms for healthcare and transportation safety applications and has authored numerous publications in wearable sensing, biosensors, and electronic systems.

Ryan Huynh is an undergraduate student in the Department of Electrical Engineering at CSULB. His research interests include printed electronics, embedded systems, electrochemical sensing, and wearable sensor technologies. His work on this project focused on the design, fabrication, and experimental evaluation of low-cost screen-printed electrodes for wearable alcohol sensing.

Wahaab Ademola received his Bachelor of Science degree in Electrical Engineering from CSULB in Fall 2024. As an undergraduate researcher, he contributed to the development of flexible electrochemical sensing platforms, including printed electrode fabrication, embedded hardware integration, and experimental testing for wearable alcohol monitoring systems. His interests include embedded systems, sensor design, and biomedical instrumentation.

Hon. Norman Y. Mineta

MTI BOARD OF TRUSTEES

Founder, Honorable Norman Mineta***
Secretary (ret.),
US Department of Transportation

Chair, Donna DeMartino
Retired Managing Director
LOSSAN Rail Corridor Agency

Vice Chair, Davey S. Kim
Senior Vice President & Principal,
National Transportation Policy &
Multimodal Strategy
WSP

Executive Director, Karen Philbrick, PhD*
Mineta Transportation Institute
San José State University

Rashidi Barnes
CEO
Tri Delta Transit

David Castagnetti
Partner
Dentons Global Advisors

Kristin Decas
CEO & Port Director
Port of Hueneme

Dina El-Tawansy*
Director
California Department of
Transportation (Caltrans)

Anna Harvey
Deputy Project Director –
Engineering
Transbay Joint Powers Authority
(TJPA)

Kimberly Haynes-Slaughter
North America Transportation
Leader,
TYLin

Ian Jefferies
President and CEO
Association of American Railroads
(AAR)

Priya Kannan, PhD*
Dean
Lucas College and
Graduate School of Business
San José State University

Therese McMillan
Retired Executive Director
Metropolitan Transportation
Commission (MTC)

Abbas Mohaddes
Chairman of the Board
Umovity Policy and Multimodal

Jeff Morales**
Managing Principal
InfraStrategies, LLC

Steve Morrissey
Vice President, International
Regulatory and Policy
United Airlines

Toks Omishakin*
Secretary
California State Transportation
Agency (CALSTA)

Sachie Oshima, MD
Chair & CEO
Allied Telesis

April Rai
President & CEO
COMTO

Greg Regan*
President
Transportation Trades Department,
AFL-CIO

Paul Skoutelas*
President & CEO
American Public Transportation
Association (APTA)

Rodney Slater
Partner
Squire Patton Boggs

Lynda Tran
CEO
Lincoln Room Strategies

Matthew Tucker
Global Transit Market Sector
Director
HDR

Jim Tymon*
Executive Director
American Association of
State Highway and Transportation
Officials (AASHTO)

K. Jane Williams
Senior Vice President & National
Practice Consultant
HNTB

* = Ex-Officio
** = Past Chair, Board of Trustees
*** = Deceased

Directors

Karen Philbrick, PhD
Executive Director

Hilary Nixon, PhD
Deputy Executive Director

Asha Weinstein Agrawal, PhD
Education Director
National Transportation Finance Center Director

Brian Michael Jenkins
Allied Telesis National Transportation Security Center